

(19)



(11)

EP 3 244 394 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
15.11.2017 Bulletin 2017/46

(51) Int Cl.:
G09G 3/36 (2006.01) G02F 1/1368 (2006.01)
H01L 29/786 (2006.01) H01L 27/12 (2006.01)
G09G 5/18 (2006.01)

(21) Application number: 17173363.7

(22) Date of filing: 28.09.2010

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO SE SI SK SM TR

(30) Priority: 16.10.2009 JP 2009238916
01.12.2009 JP 2009273913
08.12.2009 JP 2009278999

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
10823300.8 / 2 489 032

(71) Applicant: Semiconductor Energy Laboratory Co., Ltd.
Kanagawa-ken 243-0036 (JP)

(72) Inventors:
• YAMAZAKI, Shunpei
Atsugi-shi, Kanagawa 243-0036 (JP)

- KOYAMA, Jun
Atsugi-shi, Kanagawa 243-0036 (JP)
- MIYAKE, Hiroyuki
Atsugi-shi, Kanagawa 243-0036 (JP)
- TSUBUKU, Masashi
Atsugi-shi, Kanagawa 243-0036 (JP)
- NODA, Kosei
Atsugi-shi, Kanagawa 243-0036 (JP)

(74) Representative: Grünecker Patent- und Rechtsanwälte PartG mbB Leopoldstraße 4 80802 München (DE)


Remarks:

This application was filed on 30-05-2017 as a divisional application to the application mentioned under INID code 62.

(54) LIQUID CRYSTAL DISPLAY DEVICE AND ELECTRONIC APPARATUS HAVING THE SAME

(57) A driving method of a liquid crystal display device comprising a driver circuit portion and a pixel portion, the driving method comprising steps of: stopping a supply of a start pulse to the driver circuit portion; stopping a supply of a clock signal to the driver circuit after stopping the supply of the start pulse; supplying a reset signal to the driver circuit after stopping the supply of the clock signal; and displaying an image while the supply of clock signal is stopped.

FIG. 1

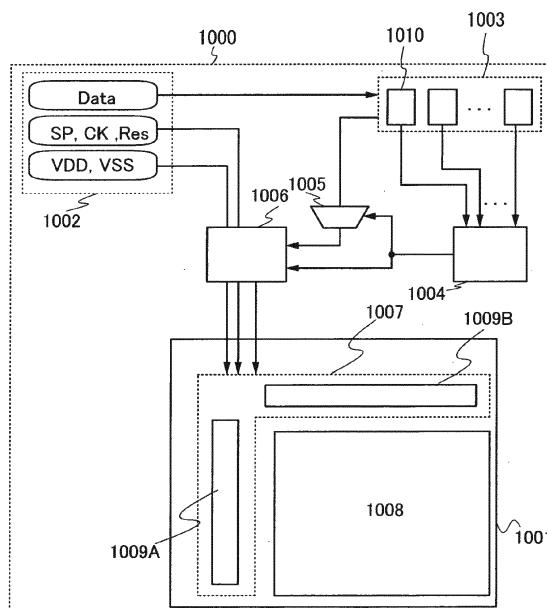

Description

TECHNICAL FIELD

[0001] The present invention relates to liquid crystal display devices. The present invention relates to electronic apparatuses having the liquid crystal display devices.

BACKGROUND ART

[0002] Thin film transistors formed over a flat plate such as a glass substrate have been manufactured using amorphous silicon, polycrystalline silicon, or the like, as typically seen in liquid crystal display devices. Thin film transistors manufactured using amorphous silicon have low field effect mobility but can be formed over a large glass substrate. On the other hand, thin film transistors manufactured using crystalline silicon have high field effect mobility, but due to a crystallization step such as laser annealing, such a transistor is not necessarily suitable for being formed over a large glass substrate.

[0003] In view of the foregoing, attention has been drawn to a technique by which a thin film transistor is manufactured using an oxide semiconductor, and such a transistor is applied to an electronic device or an optical device. For example, Patent Document 1 discloses a technique by which a thin film transistor is manufactured using zinc oxide or an In-Ga-Zn-O-based oxide semiconductor as an oxide semiconductor film, and such a transistor is used as, for example, a switching element of a liquid crystal display device.

[Reference]

[0004] Patent Document 1: Japanese Published Patent Application No. 2006-165528

DISCLOSURE OF INVENTION

[0005] It is said that a thin film transistor in which an oxide semiconductor is used to form a channel region achieves higher field effect mobility than a thin film transistor in which amorphous silicon is used to form a channel region. A pixel including such a thin film transistor using an oxide semiconductor is expected to be applied to a display device such as a liquid crystal display device.

[0006] Each pixel included in a liquid crystal display device is provided with a storage capacitor in which a voltage for controlling the orientation of a liquid crystal element is held. Off-leakage current (hereinafter referred to as off-state current) of a thin film transistor is one factor by which the amount of the holding capacitance is determined. Reduction of the off-state current which leads to increase of the period for holding a voltage in the storage capacitor is important for reduction of power consumption when a still image or the like is displayed.

[0007] Further, it is important for the enhancement of

the added value of a display device to manufacture the display device such that a moving image can be displayed in addition to low power consumption when a still image or the like is displayed. Therefore, it is important that whether an image is a still image or a moving image is determined and display is performed by switching between a still image and a moving image so that power consumption is further reduced by reducing the power consumption when a still image is displayed.

[0008] Note that in this specification, off-state current is current which flows between a source and a drain when a thin film transistor is in an off state (also called a non-conductive state). In the case of an n-channel thin film transistor (for example, with a threshold voltage of about 0 V to 2 V), the off-state current means a current which flows between a source and a drain when a negative voltage is applied between a gate and the source.

[0009] Further, in a liquid crystal display device with higher value added, such as a 3D display or a 4k2k display, the area per pixel is expected to be small and the aperture ratio needs to be improved. It is important to reduce the area of the storage capacitor in order to improve the aperture ratio. Accordingly, the off-state current of a thin film transistor needs to be decreased.

[0010] In view of the foregoing, it is an object of one embodiment of the present invention to provide a liquid crystal display device with power consumption reduced in which an off-state current of a thin film transistor using an oxide semiconductor is reduced in a pixel.

[0011] An embodiment of the present invention is a liquid crystal display device including: a display panel including a driver circuit portion and a pixel portion in which a transistor including a semiconductor layer using an oxide semiconductor is provided in each pixel; a signal generation circuit for generating a control signal for driving the driver circuit portion and an image signal which is supplied to the pixel portion; a memory circuit for storing the image signal for each frame period; a comparison circuit for detecting a difference of image signals for a series of frame periods among the image signals stored for respective frame periods in the memory circuit; a selection circuit which selects and outputs the image signals for the series of frame periods when the difference is detected in the comparison circuit; and a display control

40 circuit which supplies the control signal and the image signals output from the selection circuit, to the driver circuit portion when the difference is detected in the comparison circuit, and stops supplying the control signal to the driver circuit portion when the difference is not detected in the comparison circuit.

[0012] The control signal in the liquid crystal display device may be any of a high power supply potential, a low power supply potential, a clock signal, a start pulse signal, and a reset signal.

[0013] The oxide semiconductor in the liquid crystal display device may have a hydrogen concentration of $1 \times 10^{16} / \text{cm}^3$ or less which is detected by secondary ion mass spectrometry.

[0014] The oxide semiconductor in the liquid crystal display device may have a carrier density which is less than $1 \times 10^{14} / \text{cm}^3$.

[0015] In accordance with the present invention, in a pixel including a thin film transistor using an oxide semiconductor, the off-state current can be reduced. Therefore, the period for holding voltage in a storage capacitor can be extended, so that a liquid crystal display device in which the power consumption when a still image or the like is displayed can be decreased can be provided. Further, the aperture ratio can be improved, so that a liquid crystal display device including a high-definition display portion can be provided.

[0016] Further, a display device which displays not only a still image but also a moving image can be provided, so that the added value of the display device can be enhanced. Whether an image is a still image or a moving image is determined, and display is performed by switching between a still image and a moving image, so that the power consumption when a still image is displayed can be reduced.

BRIEF DESCRIPTION OF DRAWINGS

[0017]

FIG. 1 is a diagram showing one example of a block diagram of a liquid crystal display device;
 FIGS. 2A to 2C are diagrams showing one example of a driver circuit.
 FIG. 3 is a timing chart of a driver circuit.
 FIGS. 4A to 4C are diagrams showing one example of a driver circuit.
 FIGS. 5A and 5B illustrate a thin film transistor.
 FIGS. 6A to 6E illustrate a method for manufacturing a thin film transistor.
 FIGS. 7A and 7B illustrate a thin film transistor.
 FIGS. 8A to 8E illustrate a method for manufacturing a thin film transistor.
 FIGS. 9A and 9B each illustrate a thin film transistor;
 FIGS. 10A to 10E illustrate a method for manufacturing a thin film transistor.
 FIGS. 11A to 11E illustrate a method for manufacturing a thin film transistor.
 FIGS. 12A to 12D illustrate a method for manufacturing a thin film transistor.
 FIGS. 13A to 13D illustrate a method for manufacturing a thin film transistor.
 FIG. 14 illustrates a thin film transistor.
 FIGS. 15A to 15C illustrate a liquid crystal panel.
 FIGS. 16A to 16C each illustrate an electronic apparatus.
 FIGS. 17A to 17C each illustrate an electronic apparatus.
 FIGS. 18A and 18B illustrate a display panel and a thin film transistor.
 FIG. 19 is a diagram for describing Embodiment 13.
 FIGS. 20A and 20B are diagrams for describing Em-

bodiment 13.

FIGS. 21A and 21B are diagrams for describing Embodiment 13.

FIG. 22 is a diagram for describing Embodiment 13.

FIG. 23 is a graph for describing Embodiment 14.

FIGS. 24A and 24B are photographs for describing Embodiment 14.

FIGS. 25A and 25B are graphs for describing Embodiment 14.

FIGS. 26A to 26D are diagrams for describing Embodiment 1.

FIG. 27 is a photograph for describing Example 1.

FIG. 28 is a graph for describing Example 1.

FIG. 29 is a photograph for describing Example 2.

FIG. 30 is a graph for describing Example 2.

FIG. 31 is a photograph for describing Example 3.

FIG. 32 is a graph for describing Example 3.

FIG. 33 is a photograph for describing Example 4.

FIG. 34 is a diagram for describing Example 5.

BEST MODE FOR CARRYING OUT THE INVENTION

[0018] Hereinafter, embodiments and examples of the present invention will be described with reference to the accompanying drawings. However, it is easily understood by those skilled in the art that modes and details disclosed herein can be modified in various ways without departing from the spirit and scope of the present invention. Therefore, the present invention is not construed as being limited to description of the embodiments and examples. Note that in the structures of the present invention described below, the same portions are denoted by the same reference numerals throughout the drawings.

[0019] Note that the size, the thickness of a layer, or a region of each structure illustrated in the drawings or the like in the embodiments is exaggerated for simplicity in some cases. Therefore, embodiments of the present invention are not limited to such a scale.

[0020] In this specification, ordinal numbers such as "first", "second", and "third" are used in order to avoid confusion among components, and the terms do not limit the components numerically.

(Embodiment 1)

[0021] In this embodiment, a block diagram of a display device and a stop sequence and a start sequence of an operation in a driver circuit are described. First, a block diagram of a display device is described using FIG. 1.

[0022] A liquid crystal display device 1000 described in Embodiment 1 includes a display panel 1001, a signal generation circuit 1002, a memory circuit 1003, a comparison circuit 1004, a selection circuit 1005, and a display control circuit 1006.

[0023] The display panel 1001 includes, for example, a driver circuit portion 1007 and a pixel portion 1008. A gate line driver circuit 1009A and a signal line driver circuit 1009B are included, which are driver circuits for driving

the pixel portion 1008 including a plurality of pixels. The gate line driver circuit 1009A, the signal line driver circuit 1009B, and the pixel portion 1008 may be formed using transistors formed over one substrate.

[0024] The gate line driver circuit 1009A, the signal line driver circuit 1009B, and the pixel portion 1008 can be formed using n-channel transistors in each of which a semiconductor layer is formed using an oxide semiconductor. The gate line driver circuit 1009A and/or the signal line driver circuit 1009B may be formed over the same substrate as the pixel portion or a different substrate.

[0025] As a display method in the pixel portion 1008, a progressive method, an interlace method or the like can be employed. Color components controlled in the pixel at the time of color display are not limited to three colors of R, G, and B (R, G, and B correspond to red, green, and blue, respectively); for example, R, G, B, and W (W corresponds to white), or R, G, B, and one or more of yellow, cyan, magenta, and the like can be employed. Further, the size of a display region may be different depending on respective dots of the color components. The present invention is not limited to the application to a display device for color display but can also be applied to a display device for monochrome display.

[0026] Next, an oxide semiconductor layer used as the semiconductor layer of the transistor included in any of the gate line driver circuit 1009A, the signal line driver circuit 1009B, and the pixel portion 1008 is described.

[0027] As for the oxide semiconductor used in this embodiment, hydrogen is contained at $1 \times 10^{16} / \text{cm}^3$ or less in the oxide semiconductor, and hydrogen or an contained in the oxide semiconductor is removed. An oxide semiconductor film has a carrier density which is less than $1 \times 10^{14} / \text{cm}^3$, preferably equal to or less than $1 \times 10^{12} / \text{cm}^3$, and is used to form a channel region of a thin film transistor. In this specification, an oxide semiconductor having a carrier density which is less than $1 \times 10^{12} / \text{cm}^3$ is called an intrinsic (I-type) oxide semiconductor, and an oxide semiconductor having a carrier density equal to or greater than $1 \times 10^{12} / \text{cm}^3$ but equal to or less than $1 \times 10^{14} / \text{cm}^3$ is called a substantially-intrinsic oxide semiconductor. In this specification, the concentration of hydrogen in the oxide semiconductor layer is measured by secondary ion mass spectrometry (SIMS).

[0028] The number of carriers caused by thermal excitation is negligible in the case where the bandgap of an oxide semiconductor is 2 eV or more, preferably 2.5 eV or more, far preferably 3 eV or more. Therefore, impurities such as hydrogen which may serve as a donor are reduced as much as possible so that the carrier density is less than $1 \times 10^{14} / \text{cm}^3$, preferably equal to or less than $1 \times 10^{12} / \text{cm}^3$. That is, the carrier density of the oxide semiconductor layer is reduced as much as possible to be extremely close to zero.

[0029] Such an oxide semiconductor which is highly purified by removing hydrogen from the oxide semiconductor as much as possible is used for the channel formation region of the thin film transistor, whereby the drain

current is equal to or less than $1 \times 10^{-13} \text{ A}$ at a drain voltage in the range of 1 V to 10 V and a gate voltage in the range of -5 V to -20 V even when the channel width is 10 mm.

[0030] In the case where a display device is manufactured using such a thin film transistor the off-state current of which is extremely small, the leakage current is reduced, so that a period for holding display data can be extended.

[0031] Specifically, in a transistor including the above-described oxide semiconductor layer with a channel width of 10 μm , the off-state current per micrometer of the channel width can be equal to or less than $10 \text{ aA}/\mu\text{m}$ ($1 \times 10^{-17} \text{ A}/\mu\text{m}$), and further can be equal to or less than $1 \text{ aA}/\mu\text{m}$ ($1 \times 10^{-18} \text{ A}/\mu\text{m}$).

Such a transistor, whose off-state current is extremely small, is used as a transistor included in any of the gate line driver circuit 1009A, the signal line driver circuit 1009B, and the pixel portion 1008, whereby a holding time of an electrical signal such as a

video signal can be increased. Since the holding time can be increased, for example, the holding time after the writing of a video signal is set to 10 seconds or more, preferably 30 seconds or more, far preferably one minute or more and less than ten minutes. By increasing the holding time, the interval between writing timings can be increased, so that power consumption can be further suppressed.

[0032] The resistance to flow of off-state current in a transistor can be referred to as the off-state resistivity.

[0033] Specifically, the resistance when the transistor is off (off-state resistance R) can be calculated using Ohm's law from the off-state current and the drain voltage, which leads to the off-state resistivity ρ which can be calculated using Formula, $\rho = RA/L$ (R is the off-state resistance), from the cross-sectional area A of the channel formation region and the length L of the channel formation region (which corresponds to the distance between a source electrode and a drain electrode).

[0034] The cross-sectional area A can be calculated from $A = dW$ where the thickness of the channel formation region is d and the channel width is W . The length L of the channel formation region is the channel length L . In this manner, the off-state resistivity can be calculated from the off-state current.

[0035] The off-state resistivity of the transistor including the oxide semiconductor layer in this embodiment is preferably $1 \times 10^9 \Omega \cdot \text{m}$ or more, far preferably $1 \times 10^{10} \Omega \cdot \text{m}$ or more.

[0036] On the other hand, for example, in the case of a transistor using low-temperature polysilicon, design or the like is performed assuming that the off-state current is about $1 \times 10^{-12} \text{ A}/\mu\text{m}$. Therefore, in the transistor including the oxide semiconductor, the holding period of the voltage can be extended to a period about 10^5 times as long as that of the transistor using low-temperature

polysilicon when the holding capacitances are equal to each other (about 0.1 pF). Further, in the case of a transistor using amorphous silicon, the off-state current per micrometer of the channel width is 1×10^{-13} A/ μm or more. Therefore, in the transistor including an oxide semiconductor with high purity, the holding period of the voltage can be extended to a period 10^4 times or more as long as that of the transistor using amorphous silicon when the holding capacitances are equal to each other (about 0.1 pF).

[0037] For example, in the case of a pixel using the transistor using low-temperature polysilicon, image display is generally performed at 60 frames per second (for 16 msec per frame). The same can be applied to the case of still-image display, and this is because if the rate is decreased (the interval between writing timings is increased), the voltage of the pixel is decreased, which adversely affects the image display. On the other hand, in the case of using the above-described transistor including the oxide semiconductor layer, the holding period per signal writing can be extended to 1600 seconds which is about 10^5 times as long as that of the transistor using low-temperature polysilicon since the off-state current is small.

[0038] In this manner, still image display can be performed on a display portion even by less frequent writing of image signals. Since the holding period can be extended, the frequency of performing writing of signals can be decreased particularly when a still image is displayed. For example, the number of times of signal writing in a display period of one still image can be one or n (n is greater than or equal to 2 and less than or equal to 10^3). Thus, low power consumption of a display device can be achieved.

[0039] Generally, each pixel is provided with a storage capacitor formed by a pair of electrodes and an insulating layer provided as a dielectric between the pair of electrodes. The size of the storage capacitor can be set considering the off-state current of a transistor provided in each pixel, or the like. In this embodiment, since the transistor including a high-purity oxide semiconductor layer is used as the transistor provided in each pixel, a storage capacitor having capacitance which is less than or equal to $1/3$, preferably less than or equal to $1/5$ with respect to the liquid crystal capacitance of each pixel is sufficient to be provided.

[0040] Since the holding period can be long in the above-described transistor including the high-purity oxide semiconductor layer, the frequency of signal writing can be extremely decreased particularly when a still image is displayed. Therefore, the number of times of signal writing to pixels can be reduced in displaying, for example, a still image which involves less frequent switching of display, so that low power consumption can be achieved.

[0041] In displaying a still image, refresh operation can be performed as appropriate considering the holding rate of the voltage applied to a liquid crystal element during

the holding period. For example, the refresh operation can be performed at the time when the voltage in the storage capacitor reaches a predetermined level with respect to a value (initial value) of a voltage which is just after the signal writing into a pixel electrode of the liquid crystal element. It is preferable to set the predetermined level of the voltage such that flicker is not sensed with respect to the initial value. Specifically, it is preferable to perform the refresh operation (rewriting) every time the voltage reaches a voltage which is less than the initial value by 10 %, far preferably 3 %.

[0042] In the holding period in displaying a still image, a counter electrode (also called a common electrode) can be made in the floating state. Specifically, a switch may be provided between a power source which supplies a common potential to the counter electrode and the counter electrode, the switch is turned on to supply the common potential from the power source to the counter electrode in a writing period, and then, the switch is turned off to make the counter electrode in the floating state in the holding period. It is preferable to use the transistor including the above-described high-purity oxide semiconductor layer as the switch.

[0043] The signal generation circuit 1002 is a circuit for generating a signal for driving the gate line driver circuit 1009A and a signal for driving the signal line driver circuit 1009B. The signal generation circuit 1002 is also a circuit for outputting a signal for driving the driver circuit portion 1007 through a wiring, and is a circuit for outputting an image signal (also called a video voltage, a video signal, or video data) to the memory circuit 1003 through a wiring. In other words, the signal generation circuit 1002 is a circuit for generating and outputting a control signal for controlling the driver circuit portion 1007 and an image signal to be supplied to the pixel portion 1008.

[0044] Specifically, the signal generation circuit 1002 supplies, as control signals, a high power supply potential VDD and a low power supply potential VSS to the gate line driver circuit 1009A and the signal line driver circuit 1009B, a start pulse SP and a clock pulse CK for the gate line driver circuit 1009A, and a start pulse SP and a clock pulse CK for the signal line driver circuit 1009B. Further, the signal generation circuit 1002 supplies an image signal Data for displaying a moving image or a still image to the memory circuit 1003.

[0045] The moving image refers to an image which is recognized as a moving image with human eyes by rapid switch of a plurality of images which are time-divided into a plurality of frames. Specifically, the moving image refers to a series of image signals which are recognized as a moving image with less flicker with human eyes by switching images at least 60 times (60 frames) per second. The still image refers to image signals which do not change in a series of frame periods, for example, in the n -th frame and $(n+1)$ -th frame, unlike the moving image, though a plurality of images which are time-divided into a plurality of frame periods are switched rapidly.

[0046] The signal generation circuit 1002 may further

generates another signal such as an image signal or a latch signal. The signal generation circuit 1002 may output a reset signal Res for stopping the output of the pulse signal of each driver circuit, to the gate line driver circuit 1009A and/or the signal line driver circuit 1009B. Each signal may include a plurality of signals such as a first clock signal and a second clock signal.

[0047] The high power supply potential VDD refers to a potential which is higher than a reference potential, and the low power supply potential VSS refers to a potential which is lower than or equal to the reference potential. It is preferable that the high power supply potential and the low power supply potential are potentials as high as potentials high enough for the transistor to operate.

[0048] The voltage refers to a potential difference between a given potential and a reference potential (e.g., a ground potential) in many cases. Accordingly, the voltage, the potential, and the potential difference can also be referred to as a potential, a voltage, and a voltage difference, respectively.

[0049] In the case where the image signal which is output from the signal generation circuit 1002 to the memory circuit 1003 is an analog signal, the analog signal may be converted into a digital signal through an A/D converter or the like to be output to the memory circuit 1003.

[0050] The memory circuit 1003 includes a plurality of frame memories 1010 for storing image signals for a plurality of frames. The frame memory may be formed using a memory element such as Dynamic Random Access Memory (DRAM) or Static Random Access Memory (SRAM).

[0051] The number of frame memories 1010 is not particularly limited as long as an image signal can be stored for each frame period. The image signals of the frame memories 1010 are selectively read out by the comparison circuit 1004 and the selection circuit 1005.

[0052] The comparison circuit 1004 is a circuit which selectively reads out image signals in a series of frame periods stored in the memory circuit 1003, compares the image signals, and detects a difference thereof. An image of the series of frame periods is determined as a moving image in the case where the difference is detected by the comparison of the image signals in the comparison circuit 1004, and is determined as a still image in the case where the difference is not detected by the comparison of the image signals in the comparison circuit 1004. That is, whether image signals in a series of frame periods are image signals for displaying a moving image or image signals for displaying a still image is determined by the detection of the difference in the comparison circuit 1004. The difference obtained by the comparison may be set so as to be determined as a difference to be detected when it is over a predetermined level.

[0053] The selection circuit 1005 includes a plurality of switches such as thin film transistors, and is a circuit which selects, when image signals for displaying a moving image are determined by the difference detection in the comparison circuit 1004, the image signals from the

frame memories 1010 in which the image signals are stored, and outputs to the display control circuit 1006. When the difference of image signals between a series of frames compared in the comparison circuit 1004 is not detected, an image displayed in the series of frames is a still image, and in that case, the selection circuit 1005 may output no signal of the image signal of the latter frame to the display control circuit 1006.

[0054] The display control circuit 1006 is a circuit which switches supplying and stop of supplying of the image signal and the control signal such as the high power supply potential VDD, the low power supply potential VSS, the start pulse SP, the clock pulse CK, and the reset signal Res to the driver circuit portion 1007. Specifically, when an image is determined to be a moving image by the comparison circuit 1004, that is, a difference of image signals in a series of frames is detected, the image signals are supplied from the selection circuit 1005 to the driver circuit portion 1007 through the display control circuit 1006, and the control signals are supplied to the driver circuit portion 1007 through the display control circuit 1006. On the other hand, when an image is determined to be a still image by the comparison circuit 1004, that is, a difference of image signals in a series of frames is not detected, the image signal of the latter frame is not supplied from the selection circuit 1005, so that the image signal is not supplied to the driver circuit portion 1007 through the display control circuit 1006, and the display control circuit 1006 stops supplying the control signals to the driver circuit portion 1007.

[0055] Note that in the case where the still image is determined, when the period during which an image is assumed to be a still image is short, stop of supplying of the high power supply potential VDD and the low power supply potential VSS among the control signals is not necessarily performed. This is because an increase of the power consumption due to frequent stop and start of supplying of the high power supply potential VDD and the low power supply potential VSS can be reduced, which is preferable.

[0056] It is preferable that the stop of supplying of the image signals and the control signals is performed entirely in the period for holding an image signal in each pixel in the pixel portion 1008, and the image signals and the control signals which the display control circuit 1006 supplies before are supplied again, such that the image signal is supplied again after the holding period of each pixel.

[0057] The supplying of any signal refers to supplying a predetermined potential to a wiring. The stop of supplying of any signal refers to stop of supplying of the predetermined potential to the wiring, and connection to a wiring to which a predetermined fixed potential is supplied, for example, a wiring to which the low power supply potential VSS is supplied. The stop of supplying of any signal also refers to cut of an electrical connection to a wiring to which a predetermined potential is supplied, to make a floating state.

[0058] As described above, in the thin film transistor including the oxide semiconductor layer, the off-state current can be reduced to less than or equal to 1×10^{-12} A/ μ m, so that the holding period can be extended. Accordingly, a synergistic effect is expected to be generated in reduction of power consumption when a still image is displayed in this embodiment.

[0059] In this manner, image signals are compared to determine whether an image thereof is a moving image or a still image, and supplying or stop of supplying of control signals such as a clock signal or a start pulse is selectively performed, whereby power consumption can be reduced.

[0060] Next, an example of a structure of a shift register included in each of the gate line driver circuit 1009A and the signal line driver circuit 1009B of the driver circuit portion 1007 is described using FIGS. 2A to 2C.

[0061] The shift register shown in FIG. 2A includes first to N -th pulse output circuits 10_1 to 10_N (N is a natural number of 3 or more). A first clock signal CK1 from a first wiring 11, a second clock signal CK2 from a second wiring 12, a third clock signal CK3 from a third wiring 13, and a fourth clock signal CK4 from a fourth wiring 14 are supplied to the first to the N -th pulse output circuits 10_1 to 10_N of the shift register shown in FIG. 2A. A start pulse SP1 (a first start pulse) from a fifth wiring 15 is input to the first pulse output circuit 10_1. A signal from the pulse output circuit in the previous stage (the signal called a previous stage signal OUT($n-1$)) (n is a natural number of more than or equal to 2 and lower than or equal to N) is input to the N -th pulse output circuit 10_N in the second or later stage. A signal from the third pulse output circuit 10_3 in the stage two stages after the first pulse output circuit 10_1 is input to the first pulse output circuit 10_1; similarly, a signal from the ($N+2$)-th pulse output circuit 10_($N+2$) in the stage two stages after the N -th pulse output circuit 10_N (the signal called a subsequent-stage signal OUT($n+2$)) is input to the N -th pulse output circuit. In this manner, a first output signal (corresponding one of OUT(1)(SR) to OUT(N)(SR)) to be input to the pulse output circuit of the next stage and/or the two-stage-previous stage and a second output signal (corresponding one of OUT(1) to OUT(N)) which is input to another circuit or the like are output from each of the pulse output circuits. Note that as shown in FIG. 2A, the subsequent-stage signal OUT($n+2$) is not input to the last two stages of the shift register; therefore, as an example, a second start pulse SP2 may be input to one of the last two stages of the shift register and a third start pulse SP3 may be input to the other of the same. Alternatively, signals may be generated inside to be input thereto. For example, a ($N+1$)-th pulse output circuit 10_($N+1$) and a ($N+2$)-th pulse output circuit 10_($N+2$) which do not contribute to output of pulses to the display portion (such circuits are also referred to as dummy stages) may be provided, and signals corresponding to the second start pulse (SP2) and the third start pulse (SP3) may be generated in the dummy stages.

[0062] Note that the first to the fourth clock signals (CK1) to (CK4) each are a signal which oscillates between an H-level signal and an L-level signal at a constant cycle. The first to the fourth clock signals (CK1) to (CK4)

5 are delayed by 1/4 period sequentially. In this embodiment, by using the first to fourth clock signals (CK1) to (CK4), control of driving of the pulse output circuit or the like is performed. Note that the clock signal is also called GCK or SCK depending on a driver circuit to which the

10 clock signal is input; however, description is made in this embodiment by using CK as the clock signal.

[0063] Note that when it is explicitly described that "A and B are connected," the case where A and B are electrically connected, the case where A and B are functionally connected, and the case where A and B are directly connected are included therein. Here, each of A and B corresponds to an object (e.g., a device, an element, a

15 circuit, a wiring, an electrode, a terminal, a conductive film, or a layer). Accordingly, other connection relations 20 are included without being limited to a predetermined connection relation, for example, the connection relation shown in the drawings and the texts.

[0064] Each of the first to N -th pulse output circuits 10_1 to 10_N includes a first input terminal 21, a second

25 input terminal 22, a third input terminal 23, a fourth input terminal 24, a fifth input terminal 25, a first output terminal 26, and a second output terminal 27 (see FIG. 2B).

[0065] The first input terminal 21, the second input terminal 22, and the third input terminal 23 are electrically

30 connected to any of the first to fourth wirings 11 to 14. For example, in FIGS. 2A and 2B, the first input terminal 21 of the first pulse output circuit 10_1 is electrically connected to the first wiring 11, the second input terminal 22 of the first pulse output circuit 10_1 is electrically connected to the second wiring 12, and the third input terminal 23 of the first pulse output circuit 10_1 is electrically connected to the third wiring 13. In addition, the first input

35 terminal 21 of the second pulse output circuit 10_2 is electrically connected to the second wiring 12, the second input terminal 22 of the second pulse output circuit 10_2 is electrically connected to the third wiring 13, and the third input terminal 23 of the second pulse output circuit 10_2 is electrically connected to the fourth wiring 14.

[0066] In FIGS. 2A and 2B, in the first pulse output circuit 10_1, the first start pulse SP1 is input to the fourth input terminal 24, a subsequent-stage signal OUT(3) is input to the fifth input terminal 25, the first output signal OUT(1)(SR) is output from the first output terminal 26, and the second output signal OUT(1) is output from the second output terminal 27.

[0067] Next, an example of a specific circuit structure of the pulse output circuit is described with reference to FIG. 2C.

[0068] In FIG. 2C, a first terminal of the first transistor 31 is electrically connected to the power supply line 51, a second terminal of the first transistor 31 is electrically connected to a first terminal of the ninth transistor 39,

and a gate electrode of the first transistor 31 is electrically connected to the fourth input terminal 24. A first terminal of the second transistor 32 is electrically connected to the power supply line 52, a second terminal of the second transistor 32 is electrically connected to the first terminal of the ninth transistor 39, and a gate electrode of the second transistor 32 is electrically connected to a gate electrode of the fourth transistor 34. A first terminal of the third transistor 33 is electrically connected to the first input terminal 21, and a second terminal of the third transistor 33 is electrically connected to the first output terminal 26. A first terminal of the fourth transistor 34 is electrically connected to the power supply line 52, and a second terminal of the fourth transistor 34 is electrically connected to the first output terminal 26. A first terminal of the fifth transistor 35 is electrically connected to the power supply line 52, a second terminal of the fifth transistor 35 is electrically connected to the gate electrode of the second transistor 32 and the gate electrode of the fourth transistor 34, and a gate electrode of the fifth transistor 35 is electrically connected to the fourth input terminal 24. A first terminal of the sixth transistor 36 is electrically connected to the power supply line 51, a second terminal of the sixth transistor 36 is electrically connected to the gate electrode of the second transistor 32 and the gate electrode of the fourth transistor 34, and a gate electrode of the sixth transistor 36 is electrically connected to the fifth input terminal 25. A first terminal of the seventh transistor 37 is electrically connected to the power supply line 51, a second terminal of the seventh transistor 37 is electrically connected to a second terminal of the eighth transistor 38, and a gate electrode of the seventh transistor 37 is electrically connected to the third input terminal 23. A first terminal of the eighth transistor 38 is electrically connected to the gate electrode of the second transistor 32 and the gate electrode of the fourth transistor 34, and a gate electrode of the eighth transistor 38 is electrically connected to the second input terminal 22. The first terminal of the ninth transistor 39 is electrically connected to the second terminal of the first transistor 31 and the second terminal of the second transistor 32, a second terminal of the ninth transistor 39 is electrically connected to the gate electrode of the third transistor 33 and the gate electrode of the tenth transistor 40, and a gate electrode of the ninth transistor 39 is electrically connected to the power supply line 51. A first terminal of the tenth transistor 40 is electrically connected to the first input terminal 21, a second terminal of the tenth transistor 40 is electrically connected to the second output terminal 27, and the gate electrode of the tenth transistor 40 is electrically connected to the second terminal of the ninth transistor 39. A first terminal of the eleventh transistor 41 is electrically connected to the power supply line 52, a second terminal of the eleventh transistor 41 is electrically connected to the second output terminal 27, and a gate electrode of the eleventh transistor 41 is electrically connected to the gate electrode of the second transistor 32 and the gate electrode of the fourth transistor 34.

[0069] In FIG. 2C, a connection point of the gate electrode of the third transistor 33, the gate electrode of the tenth transistor 40, and the second terminal of the ninth transistor 39 is referred to as a node NA. In addition, a connection point of the gate electrode of the second transistor 32, the gate electrode of the fourth transistor 34, the second terminal of the fifth transistor 35, the second terminal of the sixth transistor 36, the first terminal of the eighth transistor 38, and the gate electrode of the eleventh transistor 41 is referred to as a node NB.

[0070] In the case where the pulse output circuit in FIG. 2C is the first pulse output circuit 10_1, the first clock signal CK1 is input to the first input terminal 21, the second clock signal CK2 is input to the second input terminal 22, the third clock signal CK3 is input to the third input terminal 23, the start pulse SP is input to the fourth input terminal 24, a subsequent-stage signal OUT(3) is input to the fifth input terminal 25, the first output signal OUT(1)(SR) is output from the first output terminal 26, and the second output signal OUT(1) is output from the second output terminal 27.

[0071] FIG. 3 shows a timing chart of a shift register including the plurality of pulse output circuits shown in FIG. 2C. In the case where the shift register is a scan line driver circuit, a period 61 in FIG. 3 is a vertical retrace period and a period 62 is a gate selection period.

[0072] The order of supplying or stop of supplying of potentials of wirings in the driver circuit including a plurality of n-channel transistors described as an example in FIGS. 2A to 2C and FIG. 3 in the case where a still image and a moving image are displayed is described below.

[0073] First, in the case where operation of the driver circuit portion 1007 is stopped, supplying of the start pulse SP is stopped by the display control circuit 1006. Next, after the supplying of the start pulse SP is stopped, supplying of each clock signal CK is stopped after pulse output reaches the last stage of the shift register. Then, supplying of the high power supply potential VDD and the low power supply potential VSS of the power supply voltage is stopped (see FIG. 26A). In the case where the operation of the driver circuit portion 1007 is started, first, the display control circuit 1006 supplies the high power supply potential VDD and the low power supply potential VSS of the power supply voltage to the driver circuit portion 1007. Then, each clock signal CK is supplied, and then, supplying of the start pulse SP is started (see FIG. 26B).

[0074] In the description of FIGS. 2A to 2C and FIG. 3, the reset signal Res is not supplied to the driver circuit. A structure to which the reset signal Res is supplied is shown and described in FIGS. 4A to 4C.

[0075] A shift register shown in FIG. 4A includes first to N -th pulse output circuits 10_1 to 10_N (N is a natural number of 3 or more). A first clock signal CK1 from a first wiring 11, a second clock signal CK2 from a second wiring 12, a third clock signal CK3 from a third wiring 13, and a fourth clock signal CK4 from a fourth wiring 14 are sup-

plied to the first to the N -th pulse output circuits 10_1 to 10_N of the shift register shown in FIG. 4A. A start pulse SP1 (a first start pulse) from a fifth wiring 15 is input to the first pulse output circuit 10_1. A signal from the pulse output circuit in the previous stage (the signal called a previous stage signal OUT($n-1$)) (n is a natural number of more than or equal to 2 and less than or equal to N) is input to the N -th pulse output circuit 10_N in the second or later stage. A signal from the third pulse output circuit 10_3 in the stage two stages after the first pulse output circuit 10_1 is input to the first pulse output circuit 10_1; similarly, a signal from the ($N+2$)-th pulse output circuit 10_($N+2$) in the stage two stages after the N -th pulse output circuit 10_N (the signal called a subsequent-stage signal OUT($n+2$)) is input to the N -th pulse output circuit. In this manner, a first output signal (corresponding one of OUT(1)(SR) to OUT(N)(SR)) to be input to the pulse output circuit of the next stage and/or the two-stage-previous stage and a second output signal (corresponding one of OUT(1) to OUT(N)) which is input to another circuit or the like are output from each of the pulse output circuits. To the pulse output circuit in each stage, a reset signal Res is supplied from a sixth wiring 16.

[0076] The pulse output circuit shown in FIGS. 4A to 4C is different from the pulse output circuit shown in FIGS. 2A to 2C in that the sixth wiring 16 for supplying the reset signal Res is provided; the other portions is as described in FIGS. 2A to 2C.

[0077] Each of the first to N -th pulse output circuits 10_1 to 10_N includes a first input terminal 21, a second input terminal 22, a third input terminal 23, a fourth input terminal 24, a fifth input terminal 25, a first output terminal 26, a second output terminal 27, and a sixth output terminal 28 (see FIG. 4B).

[0078] The first input terminal 21, the second input terminal 22, and the third input terminal 23 are electrically connected to any of the first to fourth wirings 11 to 14. For example, in FIGS. 4A and 4B, the first input terminal 21 of the first pulse output circuit 10_1 is electrically connected to the first wiring 11, the second input terminal 22 of the first pulse output circuit 10_1 is electrically connected to the second wiring 12, and the third input terminal 23 of the first pulse output circuit 10_1 is electrically connected to the third wiring 13. In addition, the first input terminal 21 of the second pulse output circuit 10_2 is electrically connected to the second wiring 12, the second input terminal 22 of the second pulse output circuit 10_2 is electrically connected to the third wiring 13, and the third input terminal 23 of the second pulse output circuit 10_2 is electrically connected to the fourth wiring 14.

[0079] In FIGS. 4A and 4B, in the first pulse output circuit 10_1, the first start pulse SP1 is input to the fourth input terminal 24, the subsequent-stage signal OUT(3) is input to the fourth input terminal 25, the first output signal OUT(1)(SR) is output from the first output terminal 26, the second output signal OUT(1) is output from the second output terminal 27, and the reset signal Res is

input from the sixth input terminal 28.

[0080] Next, an example of a specific circuit structure of the pulse output circuit is described with reference to FIG. 4C.

[0081] In FIG. 4C, a first terminal of the first transistor 31 is electrically connected to the power supply line 51, a second terminal of the first transistor 31 is electrically connected to a first terminal of the ninth transistor 39, and a gate electrode of the first transistor 31 is electrically connected to the fourth input terminal 24. A first terminal of the second transistor 32 is electrically connected to the power supply line 52, a second terminal of the second transistor 32 is electrically connected to the first terminal of the ninth transistor 39, and a gate electrode of the second transistor 32 is electrically connected to a gate electrode of the fourth transistor 34. A first terminal of the third transistor 33 is electrically connected to the first input terminal 21, and a second terminal of the third transistor 33 is electrically connected to the first output terminal 26. A first terminal of the fourth transistor 34 is electrically connected to the power supply line 52, and a second terminal of the fourth transistor 34 is electrically connected to the first output terminal 26. A first terminal of the fifth transistor 35 is electrically connected to the power supply line 52, a second terminal of the fifth transistor 35 is electrically connected to the gate electrode of the second transistor 32 and the gate electrode of the fourth transistor 34, and a gate electrode of the fifth transistor 35 is electrically connected to the fourth input terminal 24. A first terminal of the sixth transistor 36 is electrically connected to the power supply line 51, a second terminal of the sixth transistor 36 is electrically connected to the gate electrode of the second transistor 32 and the gate electrode of the fourth transistor 34, and a gate electrode of the sixth transistor 36 is electrically connected to the fifth input terminal 25. A first terminal of the seventh transistor 37 is electrically connected to the power supply line 51, a second terminal of the seventh transistor 37 is electrically connected to a second terminal of the eighth transistor 38, and a gate electrode of the seventh transistor 37 is electrically connected to the third input terminal 23. A first terminal of the eighth transistor 38 is electrically connected to the gate electrode of the second transistor 32 and the gate electrode of the fourth transistor 34, and a gate electrode of the eighth transistor 38 is electrically connected to the second input terminal 22. The first terminal of the ninth transistor 39 is electrically connected to the second terminal of the first transistor 31 and the second terminal of the second transistor 32, a second terminal of the ninth transistor 39 is electrically connected to the gate electrode of the third transistor 33 and the gate electrode of the tenth transistor 40, and a gate electrode of the ninth transistor 39 is electrically connected to the power supply line 51. A first terminal of the tenth transistor 40 is electrically connected to the first input terminal 21, a second terminal of the tenth transistor 40 is electrically connected to the second output terminal 27, and the gate electrode of the tenth transistor 40 is

electrically connected to the second terminal of the ninth transistor 39. A first terminal of the eleventh transistor 41 is electrically connected to the power supply line 52, a second terminal of the eleventh transistor 41 is electrically connected to the second output terminal 27, and a gate electrode of the eleventh transistor 41 is electrically connected to the gate electrode of the second transistor 32 and the gate electrode of the fourth transistor 34. The gate electrode of the second transistor 32, the gate electrode of the fourth transistor 34, the second terminal of the fifth transistor 35, the second terminal of the sixth transistor 36, the first terminal of the eighth transistor 38, and the gate electrode of the eleventh transistor 41 are electrically connected to a wiring 53 for supplying the reset signal Res. The reset signal Res is a signal by which a signal with a high power supply potential level is supplied to the gate electrode of the second transistor 32, the gate electrode of the fourth transistor 34, the second terminal of the fifth transistor 35, the second terminal of the sixth transistor 36, the first terminal of the eighth transistor 38, and the gate electrode of the eleventh transistor 41 to reduce the output from the pulse output circuit to a signal with a low power supply potential level.

[0082] In FIG. 4C, a connection point of the gate electrode of the third transistor 33, the gate electrode of the tenth transistor 40, and the second terminal of the ninth transistor 39 is referred to as a node NA. In addition, a connection point of the gate electrode of the second transistor 32, the gate electrode of the fourth transistor 34, the second terminal of the fifth transistor 35, the second terminal of the sixth transistor 36, the first terminal of the eighth transistor 38, and the gate electrode of the eleventh transistor 41 is referred to as a node NB.

[0083] In the case where the pulse output circuit in FIG. 4C is the first pulse output circuit 10_1, the first clock signal CK1 is input to the first input terminal 21, the second clock signal CK2 is input to the second input terminal 22, the third clock signal CK3 is input to the third input terminal 23, the start pulse SP is input to the fourth input terminal 24, a subsequent-stage signal OUT(3) is input to the fifth input terminal 25, the first output signal OUT(1)(SR) is output from the first output terminal 26, the second output signal OUT(1) is output from the second output terminal 27, and the reset signal Res is input from the sixth input terminal 28.

[0084] The timing chart of the shift register including a plurality of pulse output circuits shown in FIG. 4C is similar to that of FIG. 2C, shown in FIG. 3.

[0085] The order of supplying or stop of supplying of potentials of wirings in the driver circuit including a plurality of n-channel transistors described as an example in FIGS. 4A to 4C in the case where a still image or a moving image is displayed are described below.

[0086] First, in the case where operation of the driver circuit portion 1007 is stopped, supplying of the start pulse SP is stopped by the display control circuit 1006. Next, after the supplying of the start pulse SP is stopped, supplying of each clock signal CK is stopped after pulse

output reaches the last stage of the shift register. Then, the reset signal Res is supplied. Next, supplying of the high power supply potential VDD and the low power supply potential VSS of the power supply voltage is stopped (see FIG. 26C). In the case where the operation of the driver circuit portion 1007 is started, first, the display control circuit 1006 supplies the high power supply potential VDD and the low power supply potential VSS of the power supply voltage to the driver circuit portion 1007. Then, the reset signal Res is supplied. Next, each clock signal CK is supplied, and then, supplying of the start pulse SP is started (see FIG. 26D).

[0087] The structure as described in FIGS. 4A to 4C in which the reset signal is supplied in addition to the structure shown in FIGS. 2A to 2C and FIG. 3 is preferable because malfunction due to signal delay at the time of switching between a still image and a moving image or the like can be reduced.

[0088] In the case where a still image is displayed, a common potential electrode provided over the thin film transistor included in the driver circuit portion may be cut off from a common potential line to be made in the floating state. Then, after the still-image mode, in the case where operation of the driver circuit is started again, the common potential electrode is connected to the common potential line. Accordingly, malfunction of the thin film transistor in the driver circuit portion can be prevented.

[0089] FIG. 18A illustrates a display panel 1800 having such a structure, and FIG. 18B is a view for describing the cross-sectional structure thereof. The display panel 1800 includes driver circuits 1802 and 1804 and a pixel portion 1806. A common potential electrode 1808 is provided so as to overlap the driver circuit 1802. A switch 1810 for controlling connection/non-connection between the common potential electrode 1808 and a common potential terminal 1812 is provided therebetween.

[0090] The common potential electrode 1808 is provided over a TFT 1803 of the driver circuit as shown in FIG. 18B, thereby shielding the TFT 1803 from static electricity, so that a change of the threshold voltage or generation of a parasitic channel is prevented.

[0091] The same structure as the TFT 1803 can be used as the switch 1810. Such an element in which the leakage current in the off-state is extremely small contributes to stabilization of operation of the display panel. That is, in the case where a still image is displayed, even when the switch 1803 is turned off to make the common potential electrode in the floating state, the potential can be kept constant.

[0092] In this manner, by using the TFT formed using an oxide semiconductor having wide bandgap and providing the common potential electrode to shield the external electric field, a still image can be displayed even in the state where the operation of the driver circuit is stopped. Further, by controlling the potential of the common potential electrode as appropriate in accordance with the operation of the driver circuit, the operation of the display panel can be stabilized.

[0093] As described above, by using a feature of less off-state current of the thin film transistor using an oxide semiconductor, for a liquid crystal display device, a period for holding voltage in a storage capacitor can be extended, and power consumption when a still image or the like is displayed can be decreased. Further, by stopping supplying a control signal in the case where a still image is displayed, power consumption can be further decreased. In addition, a still image and a moving image can be switched without malfunction.

[0094] Embodiment 1 can be implemented in appropriate combination with any of the structures described in the other embodiments.

(Embodiment 2)

[0095] A thin film transistor of this embodiment and an embodiment of a method for manufacturing the thin film transistor are described using FIGS. 5A and 5B and FIGS. 6A to 6E.

[0096] In Embodiment 2, an example of a thin film transistor which can be applied to a liquid crystal display device described in this specification will be described. A thin film transistor 410 described in Embodiment 2 can be used as a thin film transistor in each pixel of the pixel portion 1008 described in Embodiment 1.

[0097] FIG. 5A illustrates an example of a planar structure of the thin film transistor, and FIG. 5B illustrates an example of a cross-sectional structure thereof. The thin film transistor 410 shown in FIGS. 5A and 5B is a top-gate thin film transistor.

[0098] FIG. 5A is a plane view of the top-gate thin film transistor 410 and FIG. 5B is a cross-sectional view along line C1-C2 in FIG. 5A.

[0099] The thin film transistor 410 includes over a substrate 400 having an insulating surface, an insulating layer 407, an oxide semiconductor layer 412, a source and drain electrode layers 415a and 415b, a gate insulating layer 402, and a gate electrode layer 411. Wiring layers 414a and 414b are provided in contact with the source and drain electrode layers 415a and 415b, respectively to be electrically connected thereto.

[0100] The thin film transistor 410 is described as a single-gate thin film transistor; a multi-gate thin film transistor including a plurality of channel formation regions can be formed when needed.

[0101] A process for manufacturing the thin film transistor 410 over the substrate 400 is described below with reference to FIGS. 6A to 6E.

[0102] There is no particular limitation on a substrate which can be used as the substrate 400 having an insulating surface as long as the substrate has enough heat resistance to a heat treatment to be performed later.

[0103] As the substrate 400, a glass substrate whose strain point is higher than or equal to 730 °C may be used when the temperature of the heat treatment performed later is high. As a material of the glass substrate, a glass material such as aluminosilicate glass, aluminoborosili-

cate glass, or barium borosilicate glass is used, for example. Note that by containing a larger amount of barium oxide (BaO) than boron oxide, a heat-resistant glass substrate which is of more practical use can be formed.

5 Therefore, it is preferable that a glass substrate containing a larger amount of BaO than B₂O₃ be used.

[0104] Note that a substrate formed using an insulator such as a ceramic substrate, a quartz substrate, or a sapphire substrate may be used instead of the above-10 described glass substrate, as the substrate 400. Alternatively, a crystallized glass substrate or the like may be used. Further alternatively, a plastic substrate or the like may be used.

[0105] First, the insulating layer 407 which functions 15 as a base film is formed over the substrate 400 having an insulating surface. It is preferable that an oxide insulating layer such as a silicon oxide layer, a silicon oxynitride layer, an aluminum oxide layer, or an aluminum oxynitride layer be used as the insulating layer 407 which is in contact with the oxide semiconductor layer. The insulating layer 407 can be formed by a plasma CVD method, a sputtering method, or the like. It is preferable to form the insulating layer 407 by a sputtering method in order not to contain hydrogen in the insulating layer 407.

20 **[0106]** In this embodiment, a silicon oxide layer is formed as the insulating layer 407 by a sputtering method. The substrate 400 is transferred into a chamber, a sputtering gas containing high-purity oxygen in which hydrogen and moisture are removed is introduced into the 25 chamber, and a target is used, so that the silicon oxide layer is deposited on the substrate 400 as the insulating layer 407. The substrate 400 may be at room temperature or may be heated.

[0107] For example, a silicon oxide film is formed as 30 follows: quartz (preferably quart) is used as the target; the substrate temperature is 108 °C; the distance between the target and the substrate (T-S distance) is 60 mm; the pressure is 0.4 Pa; the high-frequency power is 1.5 kW; the atmosphere is oxygen and argon (flow rate 35 ratio of oxygen to argon is 25 sccm: 25 sccm = 1:1); and an RF sputtering method is used. The thickness of the silicon oxide film is 100 nm in this embodiment. A silicon target may be used instead of the quartz (preferably quart) to form the silicon oxide film. As a sputtering gas, oxygen or a mixed gas of oxygen and argon is used in 40 this embodiment.

[0108] In that case, it is preferable to remove residual 45 moisture in the chamber in the deposition of the insulating layer 407. This is in order to prevent the insulating layer 407 from containing hydrogen, a hydroxyl group, or moisture.

[0109] In order to remove residual moisture from the 50 chamber, an adsorption-type vacuum pump is preferably used. For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. As an exhaustion unit, a turbo molecular pump to which a cold trap is added may be used. In the chamber in which exhaustion 55 is performed with the use of a cryopump, a hydrogen

molecule, a compound including a hydrogen atom such as water (H_2O), or the like, for example, is exhausted. Accordingly, the concentration of impurities included in the insulating layer 407 formed in the chamber can be reduced.

[0110] It is preferable that a high-purity gas in which an impurity such as hydrogen, water, a hydroxyl group, or hydride is removed to 1 ppm or less, preferably 10 ppb or less be used as the sputtering gas for the deposition of the insulating layer 407.

[0111] Examples of a sputtering method include an RF sputtering method in which a high-frequency power source is used as a sputtering power source, a DC sputtering method in which a DC power source is used, and a pulsed DC sputtering method in which a bias is applied in a pulsed manner. The RF sputtering method is mainly used in the case where an insulating film is formed, and the DC sputtering method is mainly used in the case where a metal film is formed.

[0112] A multi-target sputtering apparatus in which a plurality of targets which are formed of different materials from each other can be set may be used. With the multi-target sputtering apparatus, films of different materials can be stacked to be formed in the same chamber, or plural kinds of materials can be deposited by electric discharge at the same time in the same chamber.

[0113] Alternatively, a sputtering apparatus provided with a magnet system inside the chamber and used for a magnetron sputtering method, or a sputtering apparatus used for an ECR sputtering method in which plasma generated with the use of microwaves is used without using glow discharge may be used.

[0114] Further, as the deposition method using a sputtering method, a reactive sputtering method in which a target substance and a sputtering gas component are chemically reacted with each other during deposition to form a thin compound film thereof, or a bias sputtering method in which a voltage is also applied to a substrate during deposition may be used.

[0115] The insulating layer 407 may have a stacked-layer structure; for example, a stacked-layer structure in which a nitride insulating layer such as a silicon nitride layer, a silicon nitride oxide layer, an aluminum nitride layer, or an aluminum nitride oxide layer and the above-described oxide insulating layer are stacked in this order over the substrate 400 may be used.

[0116] For example, a silicon nitride layer is formed between the silicon oxide layer and the substrate 400 by introducing a sputtering gas containing high-purity nitrogen in which hydrogen and moisture are removed and using a silicon target. In that case also, it is preferable to remove residual moisture in the chamber in the formation of the silicon nitride layer as is the case of the deposition of the silicon oxide layer.

[0117] The substrate may be heated at the time of the film deposition of the silicon nitride layer.

[0118] In the case where the silicon nitride layer and the silicon oxide layer are stacked to form the insulating

layer 407, the silicon nitride layer and the silicon oxide layer can be formed in the same chamber with the same silicon target. For example, first, a sputtering gas containing nitrogen is introduced and a silicon target placed inside the chamber is used to form the silicon nitride layer, and then, the sputtering gas is switched to a sputtering gas containing oxygen and the same silicon target is used to form the silicon oxide layer. Since the silicon nitride layer and the silicon oxide layer can be formed in succession without exposure to the air, an impurity such as hydrogen or moisture can be prevented from being adsorbed on a surface of the silicon nitride layer.

[0119] Next, an oxide semiconductor film is formed to a thickness of greater than or equal to 2 nm and less than or equal to 200 nm over the insulating layer 407.

[0120] In order for the oxide semiconductor film not to contain impurities such as hydrogen, a hydroxyl group, and moisture as much as possible, it is preferable to preheat the substrate 400 provided with the insulating layer 407 in a preheating chamber of the sputtering apparatus before the film formation so that an impurity such as hydrogen or moisture adsorbed on the substrate 400 is eliminated, and perform exhaustion. As an exhaustion unit provided in the preheating chamber, a cryopump is preferable. This preheating step is not necessarily performed.

[0121] Note that before the oxide semiconductor film is formed by a sputtering method, it is preferable to perform reverse sputtering in which an argon gas is introduced and plasma is generated so that dust on a surface of the insulating layer 407 is removed. The reverse sputtering is a method by which voltage is applied to a substrate side with a high-frequency power source in an argon atmosphere to generate plasma on the substrate side without applying voltage to a target side, so that a surface is modified. Instead of the argon atmosphere, a nitrogen atmosphere, a helium atmosphere, an oxygen atmosphere, or the like may be used.

[0122] The oxide semiconductor film is formed by the sputtering method. The oxide semiconductor film is formed using an In-Ga-Zn-O-based oxide semiconductor film, an In-Sn-Zn-O-based oxide semiconductor film, an In-Al-Zn-O-based oxide semiconductor film, a Sn-Ga-Zn-O-based oxide semiconductor film, an Al-Ga-Zn-O-based oxide semiconductor film, a Sn-Al-Zn-O-based oxide semiconductor film, an In-Zn-O-based oxide semiconductor film, a Sn-Zn-O-based oxide semiconductor film, an Al-Zn-O-based oxide semiconductor film, an In-O-based oxide semiconductor film, a Sn-O-based oxide semiconductor film, or a Zn-O-based oxide semiconductor film. In this embodiment, the oxide semiconductor film is formed by a sputtering method using an In-Ga-Zn-O-based oxide semiconductor target. Specifically, a target having a composition ratio of $In_2O_3:Ga_2O_3:ZnO = 1:1:1$ [mol%] (that is, In:Ga:Zn = 1:1:0.5 [atom%]) is used. Alternatively, a target having a composition ratio of In:Ga:Zn = 1:1:1 [atom%] or In:Ga:Zn = 1:1:2 [atom%] can be used. In this embodiment, the filling rate of the

oxide semiconductor target is equal to or greater than 90 % and equal to or less than 100 %, preferably equal to or greater than 95 % and equal to or less than 99.9 %. With use of the oxide semiconductor target having high filling rate, the deposited oxide semiconductor film has high density. The atmosphere in the sputtering may be an atmosphere of a rare gas (typically argon), an atmosphere of oxygen, or a mixed atmosphere of a rare gas and oxygen. The target may contain SiO_2 at 2 wt% or more and 10 wt% or less.

[0123] It is preferable that a high-purity gas in which an impurity such as hydrogen, water, a hydroxyl group, or hydride is removed to 1 ppm or less, preferably 10 ppb or less be used as the sputtering gas for the deposition of the oxide semiconductor film.

[0124] The oxide semiconductor film is formed over the substrate 400 as follows: the substrate is held in the chamber with pressure reduced, residual moisture in the chamber is removed, a sputtering gas from which hydrogen and moisture are removed is introduced, and the above-described target is used. In order to remove the residual moisture in the chamber, it is preferable to use an adsorption-type vacuum pump. For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. As an exhaustion unit, a turbo molecular pump to which a cold trap is added may be used. In the chamber in which exhaustion is performed using a cryopump, a hydrogen molecule, a compound including a hydrogen atom such as water (H_2O) a compound including a carbon atom, or the like is exhausted. Accordingly, the concentration of impurities included in the oxide semiconductor film formed in the chamber can be reduced. The substrate may be heated at the time of the film deposition of the oxide semiconductor film.

[0125] As an example of the film deposition condition, the following condition is employed: the temperature of the substrate is room temperature; the distance between the substrate and the target is 110 mm; the pressure is 0.4 Pa; the direct current (DC) power is 0.5 kW; and the atmosphere is oxygen and argon (the flow rate ratio of oxygen to argon is 15 sccm : 30 sccm). It is preferable that a pulsed direct current (DC) power supply be used because powder substances (also referred to as particles or dust) generated in the film deposition can be reduced and the film thickness can be made uniform. The oxide semiconductor film has a thickness greater than or equal to 2 nm and less than or equal to 200 nm, preferably greater than or equal to 5 nm and less than or equal to 30 nm. Note that appropriate thickness of the oxide semiconductor film varies depending on a material thereof; therefore, the thickness may be determined as appropriate depending on the material.

[0126] Next, the oxide semiconductor film is processed into the island-shaped oxide semiconductor layer 412 by a first photolithography step (see FIG. 6A). A resist mask for forming the island-shaped oxide semiconductor layer 412 may be formed using an ink jet method. Formation of the resist mask by an inkjet method needs no photo-

mask; thus, manufacturing cost can be reduced.

[0127] For the etching of the oxide semiconductor film, either one or both of wet etching and dry etching may be employed.

5 **[0128]** As an etching gas for the dry etching, a gas containing chlorine (chlorine-based gas such as chlorine (Cl_2), boron chloride (BCl_3), silicon chloride (SiCl_4), or carbon tetrachloride (CCl_4)) is preferably used.

10 **[0129]** Alternatively, a gas containing fluorine (fluorine-based gas such as carbon tetrafluoride (CF_4), sulfur fluoride (SF_6), nitrogen fluoride (NF_3), or trifluoromethane (CHF_3)); hydrogen bromide (HBr); oxygen (O_2); any of these gases to which a rare gas such as helium (He) or argon (Ar) is added; or the like can be used.

15 **[0130]** As the dry etching method, a parallel-plate RIE (reactive ion etching) method or an ICP (inductively coupled plasma) etching method can be used. In order to etch the layer into a desired shape, the etching conditions (the amount of electric power applied to a coil-shaped electrode, the amount of electric power applied to an electrode on a substrate side, the temperature of the electrode on the substrate side, or the like) are adjusted as appropriate.

20 **[0131]** As an etchant used for wet etching, a mixed solution of phosphoric acid, acetic acid, and nitric acid, an ammonia hydrogen peroxide mixture (hydrogen peroxide: ammonia: water = 5:2:2), an ammonium hydroxide/hydrogen peroxide mixture (a 31 wt% hydrogen peroxide solution : 28 wt% ammonia water : water = 5:2:2), or the like can be used. ITO07N (produced by KANTO CHEMICAL CO., INC.) may be used.

25 **[0132]** After the wet etching, the etchant is removed by cleaning together with the material which is etched off. Waste liquid of the etchant containing the removed material may be purified and the material contained in the waste liquid may be reused. The resources can be efficiently used and the cost can be reduced by collecting and reusing a material such as indium included in the oxide semiconductor from the waste liquid after the etching.

30 **[0133]** The etching conditions (such as an etchant, etching time, or temperature) are appropriately adjusted depending on a material so that the material can be etched into a desired shape.

35 **[0134]** In this embodiment, the oxide semiconductor film is processed into the island-shaped oxide semiconductor layer 412 by a wet etching method using a solution obtained by mixing phosphoric acid, acetic acid, and nitric acid.

40 **[0135]** In this embodiment, a first heat treatment is performed on the oxide semiconductor layer 412. The temperature of the first heat treatment is higher than or equal to 400 °C and lower than or equal to 750 °C, and higher than or equal to 400 °C and lower than the strain point 45 of the substrate 400 when the strain point of the substrate 400 is lower than or equal to 750 °C. In this embodiment, the substrate is put in an electric furnace which is a kind of heat treatment apparatus and heat treatment is per-

formed on the oxide semiconductor layer at 450 °C for one hour in a nitrogen atmosphere, and then, the temperature is reduced to room temperature and water or hydrogen is prevented from entering the oxide semiconductor layer, without exposure to the air; thus, an oxide semiconductor layer is obtained. The oxide semiconductor layer 412 can be dehydrated or dehydrogenated by the first heat treatment.

[0136] The heat treatment apparatus is not limited to an electric furnace and may be provided with a device that heats an object to be processed by thermal conduction or thermal radiation from a heater such as a resistance heater or the like. For example, an RTA (rapid thermal annealing) apparatus such as a GRTA (gas rapid thermal annealing) apparatus or an LRTA (lamp rapid thermal annealing) apparatus can be used. The LRTA apparatus is an apparatus for heating an object to be processed by radiation of light (an electromagnetic wave) emitted from a lamp such as a halogen lamp, a metal halide lamp, a xenon arc lamp, a carbon arc lamp, a high pressure sodium lamp, or a high pressure mercury lamp. The GRTA apparatus is an apparatus for heat treatment using a high-temperature gas. As the gas, an inert gas which does not react with the object to be processed, by heat treatment, such as nitrogen or a rare gas such as argon is used.

[0137] For example, as the first heat treatment, GRTA may be performed as follows: the substrate is transferred into an inert gas heated to a high temperature of 650 °C to 700 °C, heated for several minutes, and transferred and taken out of the inert gas heated to the high temperature. GRTA enables a high-temperature heat treatment for a short time.

[0138] In the first heat treatment, it is preferable that water, hydrogen, or the like be not contained in nitrogen or a rare gas such as helium, neon, or argon. It is preferable that nitrogen or a rare gas such as helium, neon, or argon which is introduced into the heat treatment apparatus have a purity of 6N (99.9999 %) or more, far preferably 7N (99.99999 %) or more (that is, the concentration of impurities be 1 ppm or less, far preferably 0.1 ppm or less).

[0139] Further, depending on the condition of the first heat treatment or a material of the oxide semiconductor layer, the oxide semiconductor layer 412 might be crystallized to be a microcrystalline film or a polycrystalline film. For example, the oxide semiconductor layer may be crystallized to be a microcrystalline oxide semiconductor film in which the degree of crystallization is greater than or equal to 90 % or greater than or equal to 80 %. Further, depending on the condition of the first heat treatment or the material of the oxide semiconductor layer, the oxide semiconductor layer 412 may be an amorphous oxide semiconductor film which does not contain crystalline components. The oxide semiconductor layer may become an oxide semiconductor film in which a microcrystalline portion (with a grain diameter greater than or equal to 1 nm and greater than or less than 20 nm, typically

greater than or equal to 2 nm and greater than or less than 4 nm) is mixed into an amorphous oxide semiconductor.

[0140] The first heat treatment of the oxide semiconductor layer can also be performed on the oxide semiconductor film before being processed into the island-like oxide semiconductor layer 412. In that case, the substrate is taken out from the heat apparatus after the first heat treatment, and then a photolithography step is performed thereon.

[0141] The example in which the heat treatment for dehydration and/or dehydrogenation on the oxide semiconductor layer is performed just after the formation of the oxide semiconductor layer 412 is described above.

15 However, the heat treatment for dehydration and/or dehydrogenation may be performed after a source electrode and a drain electrode are stacked on the oxide semiconductor layer or after a gate insulating layer is formed over a source electrode and a drain electrode as long as 20 it is performed after the deposition of the oxide semiconductor layer.

[0142] A conductive film is formed over the insulating layer 407 and the oxide semiconductor layer 412. The conductive film may be formed by a sputtering method 25 or a vacuum evaporation method. As a material of the conductive film, an element selected from Al, Cr, Cu, Ta, Ti, Mo, and W; an alloy containing any of these elements as a component; an alloy film containing any of these elements in combination; and the like can be given. Further, one or more materials selected from manganese, 30 magnesium, zirconium, beryllium, and yttrium may be used. Further, the conductive film may have a single-layer structure or a stacked-layer structure of two or more layers. For example, a single-layer structure of an aluminum film including silicon, a two-layer structure in which 35 a titanium film is stacked over an aluminum film, a three-layer structure in which a titanium film, an aluminum film, and a titanium film are stacked in this order, and the like can be given. Alternatively, a film, an alloy film, or a nitride film which contains aluminum (Al) and one or a plurality 40 of elements selected from titanium (Ti), tantalum (Ta), tungsten (W), molybdenum (Mo), chromium (Cr), neodymium (Nd), and scandium (Sc) may be used. In this embodiment, a titanium film with a thickness of 150 nm 45 is formed as the conductive film by a sputtering method.

[0143] Next, a resist mask is formed over the conductive film by a second photolithography step. The resist mask may be formed using an ink jet method. Formation of the resist mask by an inkjet method needs no photo-mask; thus, manufacturing cost can be reduced. After 50 that, etching is selectively performed thereon, so that the source and drain electrode layers 415a and 415b are formed, and then, the resist mask is removed (see FIG. 6B). It is preferable that an end portion of the each of the source and drain electrode layers have a tapered shape 55 because coverage with a gate insulating layer stacked thereover is improved.

[0144] Note that each material and etching conditions

are adjusted as appropriate so that the oxide semiconductor layer 412 is not removed by the etching of the conductive film and the insulating layer 407 under the oxide semiconductor layer 412 is not exposed.

[0145] In this embodiment, since the Ti film is used as the conductive film and the In-Ga-Zn-O-based oxide semiconductor is used as the oxide semiconductor layer 412, an ammonium hydroxide/hydrogen peroxide mixture (a 31 wt% hydrogen peroxide solution : 28 wt% ammonia water : water = 5:2:2) is used as an etchant.

[0146] In the second photolithography step, in some cases, part of the oxide semiconductor layer 412 is etched, whereby an oxide semiconductor layer having a groove (a depression portion) may be formed.

[0147] Light exposure at the time of the formation of the resist mask in the second photolithography step may be performed using ultraviolet light, KrF laser light, or ArF laser light. The channel length L of a thin film transistor to be formed is determined by a pitch between a lower end of the source electrode layer and a lower end of the drain electrode layer, which are adjacent to each other over the oxide semiconductor layer 412. In the case where light exposure is performed for a channel length L of less than 25 nm, the light exposure at the time of the formation of the resist mask in the second photolithography step is performed using extreme ultraviolet light having an extremely short wavelength of several nanometers to several tens of nanometers. In the light exposure by extreme ultraviolet light, the resolution is high and the focus depth is large. Accordingly, the channel length L of the thin film transistor can be made to be greater than or equal to 10 nm and less than or equal to 1000 nm, the operation rate of a circuit can be increased, and low power consumption can be achieved by extremely small off-state current.

[0148] Next, the gate insulating layer 402 is formed over the insulating layer 407, the oxide semiconductor layer 412, and the source and drain electrode layers 415a and 415b (see FIG. 6C).

[0149] The gate insulating layer 402 can be formed with a single-layer structure or a stacked-layer structure using one or more of a silicon oxide layer, a silicon nitride layer, a silicon oxynitride layer, a silicon nitride oxide layer, and an aluminum oxide layer by a plasma CVD method, a sputtering method, or the like. In order to prevent the gate insulating layer 402 from containing hydrogen as much as possible, it is preferable to form the gate insulating layer 402 by a sputtering method. In the case of forming a silicon oxide film by a sputtering method, a silicon target or a quartz target is used as a target, and oxygen or a mixed gas of oxygen and argon is used as a sputtering gas. In this embodiment, a 100-nm-thick silicon oxide layer is formed as follows: the pressure is 0.4 Pa; the high-frequency power is 1.5 kW; the atmosphere is oxygen and argon (flow rate ratio of oxygen to argon is 25 sccm: 25 sccm = 1:1); and an RF sputtering method is used.

[0150] The gate insulating layer 402 can have a struc-

ture in which a silicon oxide layer and a silicon nitride layer are stacked in this order. For example, a gate insulating layer with a thickness of greater than or equal to 70 nm and less than or equal to 400 nm, for example, a thickness of 100 nm is formed in such a manner that a silicon oxide layer (SiO_x ($x > 0$)) having a thickness of greater than or equal to 5 nm and less than or equal to 300 nm is formed by a sputtering method as a first gate insulating layer and then a silicon nitride layer (SiN_y ($y > 0$)) having a thickness of greater than or equal to 50 nm and less than or equal to 200 nm is stacked as a second gate insulating layer over the first gate insulating layer.

[0151] Next, a resist mask is formed by a third photolithography step, and etching is selectively performed to remove parts of the gate insulating layer 402, so that openings 421a and 421b reaching the source and drain electrode layers 415a and 415b are formed (see FIG. 6D).

[0152] Next, a conductive film is formed over the gate insulating layer 402 and the openings 421a and 421b. In this embodiment, a titanium film with a thickness of 150 nm is formed by a sputtering method. After that, a fourth photolithography step is performed thereon, so that the gate electrode layer 411 and the wiring layers 414a and 414b are formed. Note that a resist mask may be formed by an inkjet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing cost can be reduced.

[0153] The gate electrode layer 411 and the wiring layers 414a and 414b can be formed each to have a single-layer or stacked-layer structure using a metal material such as molybdenum, titanium, chromium, tantalum, tungsten, aluminum, copper, neodymium, or scandium, or an alloy material which contains any of these materials as its main component.

[0154] For example, as a two-layer structure of each of the gate electrode layer 411 and the wiring layers 414a and 414b, any of the following structures is preferable: a two-layer structure of an aluminum layer and a molybdenum layer stacked thereover, a two-layer structure of a copper layer and a molybdenum layer stacked thereover, a two-layer structure of a copper layer and a titanium nitride layer or a tantalum nitride layer stacked thereover, and a two-layer structure of a titanium nitride layer and a molybdenum layer. As a three-layer structure, a stack of a tungsten layer or a tungsten nitride layer, a layer of an alloy of aluminum and silicon or an alloy of aluminum and titanium, and a titanium nitride layer or a titanium layer is preferable. The gate electrode layer can be formed using a light-transmitting conductive film. As an example of a material of the light-transmitting conductive film, a light-transmitting conductive oxide can be given.

[0155] Next, a second heat treatment (preferably at a temperature higher than or equal to 200 °C and lower than or equal to 400 °C, for example, at a temperature higher than or equal to 250 °C and lower than or equal to 350 °C) is performed in an inert gas atmosphere or an oxygen gas atmosphere. In this embodiment, the second

heat treatment is performed at 250 °C for one hour in a nitrogen atmosphere. The second heat treatment may be performed after a protective insulating layer or a planarization insulating layer is formed over the thin film transistor 410.

[0156] Furthermore, heat treatment may be performed at a temperature higher than or equal to 100 °C and lower than or equal to 200 °C for one hour to 30 hours both inclusive in an air atmosphere. This heat treatment may be performed at a fixed heating temperature. Alternatively, the following change in the heating temperature may be conducted plural times repeatedly: the heating temperature is increased from room temperature to a temperature higher than or equal to 100 °C and lower than or equal to 200 °C and then decreased to room temperature. This heat treatment may be performed before the formation of the oxide insulating layer under a reduced pressure. Under the reduced pressure, the heat treatment time can be shortened.

[0157] Through the above-described process, the thin film transistor 410 including the oxide semiconductor layer 412 in which the concentration of hydrogen, moisture, hydride, and hydroxide is reduced can be formed (see FIG. 6E). The thin film transistor 410 can be used as the thin film transistor 105 described in Embodiment 1.

[0158] A protective insulating layer or a planarization insulating layer for planarization may be provided over the thin film transistor 410. For example, the protective insulating layer can be formed with a single-layer structure or a stacked-layer structure using one or more of a silicon oxide layer, a silicon nitride layer, a silicon oxynitride layer, a silicon nitride oxide layer, and an aluminum oxide layer.

[0159] The planarization insulating layer can be formed using a heat-resistant organic material such as polyimide, acrylic, benzocyclobutene, polyamide, or epoxy. Other than such organic materials, it is possible to use a low-dielectric constant material (a low-k material), a siloxane-based resin, PSG (phosphosilicate glass), BPSG (borophosphosilicate glass), or the like. The planarization insulating layer may be formed by stacking a plurality of insulating films formed using these materials.

[0160] Note that the siloxane-based resin corresponds to a resin including a Si-O-Si bond formed using a siloxane-based material as a starting material. The siloxane-based resin may include as a substituent an organic group (e.g., an alkyl group or an aryl group) or a fluoro group. The organic group may include a fluoro group.

[0161] There is no particular limitation on the method for forming the planarization insulating layer. The planarization insulating layer can be formed, depending on a material thereof, by a method such as a sputtering method, an SOG method, a spin coating method, a dipping method, a spray coating method, or a droplet discharge method (e.g., an inkjet method, screen printing, or offset printing), or with the use of a tool such as a doctor knife,

a roll coater, a curtain coater, or a knife coater.

[0162] By removing residual moisture in the reaction atmosphere at the time of the film deposition of the oxide semiconductor film as described above, the concentration of hydrogen and hydride in the oxide semiconductor film can be reduced. Accordingly, the oxide semiconductor film can be stabilized.

[0163] By using the thin film transistor manufactured as described above in each of a plurality of pixels of a display portion of a liquid crystal display device, the leakage current from the pixel can be suppressed. Accordingly, a period for holding voltage in a storage capacitor can be increased, and the power consumption when a still image or the like is displayed in the liquid crystal display device can be decreased. Further, by stopping supplying a control signal in the case where a still image is displayed, power consumption can be further decreased. In addition, a still image and a moving image can be switched without malfunction.

[0164] Embodiment 2 can be implemented in appropriate combination with any of the structures described in the other embodiments.

(Embodiment 3)

[0165] In Embodiment 3, another example of a thin film transistor which can be applied to a liquid crystal display device disclosed in this specification will be described. Note that Embodiment 2 can be applied to the same portions and the portions and steps having similar functions as to Embodiment 2, and description thereof is not repeated. Further, a specific description for the same portions is omitted. A thin film transistor 460 described in this embodiment can be used as a thin film transistor in each pixel of the pixel portion 1008 described in Embodiment 1.

[0166] A thin film transistor of this embodiment and an embodiment of a method for manufacturing the thin film transistor are described using FIGS. 7A and 7B and FIGS. 8A to 8E.

[0167] FIG. 7A illustrates an example of a planar structure of the thin film transistor, and FIG. 7B illustrates an example of a cross-sectional structure thereof. The thin film transistor 460 shown in FIGS. 7A and 7B is a top-gate thin film transistor.

[0168] FIG. 7A is a plane view of the top-gate thin film transistor 460 and FIG. 7B is a cross-sectional view along line D1-D2 in FIG. 7A.

[0169] The thin film transistor 460 includes over a substrate 450 having an insulating surface, an insulating layer 457, a source or drain electrode layer 465a (465a1 and 465a2), an oxide semiconductor layer 462, a source or drain electrode layer 465b, a wiring layer 468, a gate insulating layer 452, and a gate electrode layer 461 (461a and 461b). The source or drain electrode layer 465a (465a1 and 465a2) is electrically connected to a wiring layer 464 through the wiring layer 468. Further, not shown in the drawing, the source or drain electrode layer 465b

is also electrically connected to the wiring layer in an opening formed in the gate insulating layer 452.

[0170] A process for manufacturing the thin film transistor 460 over the substrate 450 is described below with reference to FIGS. 8A to 8E.

[0171] First, the insulating layer 457 which functions as a base film is formed over the substrate 450 having an insulating surface.

[0172] In this embodiment, a silicon oxide layer is formed as the insulating layer 457 by a sputtering method. The substrate 450 is transferred into a chamber, a sputtering gas containing high-purity oxygen in which hydrogen and moisture are removed is introduced into the chamber, and a silicon target or quartz (preferably quartz) is used, so that the silicon oxide layer is deposited on the substrate 450 as the insulating layer 457. In this embodiment, oxygen or a mixed gas of oxygen and argon is used as the sputtering gas.

[0173] For example, a silicon oxide film is formed in this embodiment as follows: quartz (preferably quartz) which has a purity of 6N is used as the target; the substrate temperature is 108 °C; the distance between the target and the substrate (T-S distance) is 60 mm; the pressure is 0.4 Pa; the high-frequency power is 1.5 kW; the atmosphere is oxygen and argon (flow rate ratio of oxygen to argon is 25 sccm: 25 sccm = 1:1); and an RF sputtering method is used. The thickness of the silicon oxide film is 100 nm in this embodiment. A silicon target may be used instead of the quartz (preferably quartz) to form the silicon oxide film.

[0174] In that case, it is preferable to remove residual moisture in the chamber in the deposition of the insulating layer 457. This is in order to prevent the insulating layer 457 from containing hydrogen, a hydroxyl group, and/or moisture. In the chamber in which exhaustion is performed with the use of a cryopump, a hydrogen molecule, a compound including a hydrogen atom such as water (H₂O), or the like, for example, is exhausted. Accordingly, the concentration of impurities included in the insulating layer 457 formed in the chamber can be reduced.

[0175] It is preferable that a high-purity gas in which an impurity such as hydrogen, water, a hydroxyl group, or hydride is removed to 1 ppm or less, preferably 10 ppb or less be used as the sputtering gas for the deposition of the insulating layer 457.

[0176] The insulating layer 457 may have a stacked-layer structure; for example, a stacked-layer structure in which a nitride insulating layer such as a silicon nitride layer, a silicon nitride oxide layer, an aluminum nitride layer, or an aluminum nitride oxide layer and the above-described oxide insulating layer are stacked in this order over the substrate 450 may be used.

[0177] For example, a silicon nitride layer is formed between the silicon oxide layer and the substrate 450 by introducing a sputtering gas containing high-purity nitrogen in which hydrogen and moisture are removed and using a silicon target. In that case also, it is preferable to remove residual moisture in the chamber in the formation

of the silicon nitride layer as is the case of the deposition of the silicon oxide layer.

[0178] A conductive film is formed over the insulating layer 457. As a material of the conductive film, an element selected from Al, Cr, Cu, Ta, Ti, Mo, and W; an alloy containing any of these elements as a component; an alloy film containing any of these elements in combination; and the like can be given. Further, one or more materials selected from manganese, magnesium, zirconium, beryllium, and yttrium may be used. Further, the conductive film may have a single-layer structure or a stacked-layer structure of two or more layers. For example, a single-layer structure of an aluminum film including silicon, a two-layer structure in which a titanium film is stacked over an aluminum film, a three-layer structure in which a titanium film, an aluminum film, and a titanium film are stacked in this order, and the like can be given. Alternatively, a film, an alloy film, or a nitride film which contains aluminum (A1) and one or a plurality of elements selected from titanium (Ti), tantalum (Ta), tungsten (W), molybdenum (Mo), chromium (Cr), neodymium (Nd), and scandium (Sc) may be used. In this embodiment, a titanium film with a thickness of 150 nm is formed as the conductive film by a sputtering method. Next, a resist mask is formed over the conductive film by a first photolithography step, etching is selectively thereon, so that the source and drain electrode layers 465a1 and 465a2 are formed, and then, the resist mask is removed (see FIG. 8A). The source and drain electrode layers 465a1 and 465a2, which are shown as being cut in the cross-sectional view, are one film having a torus-shaped portion as shown in FIG. 7A. It is preferable that an end portion of the each of the source and drain electrode layers 465a1 and 465a2 have a tapered shape because coverage with a gate insulating layer stacked thereover is improved.

[0179] Next, an oxide semiconductor film with a thickness greater than or equal to 2 nm and less than or equal to 200 nm, for example, greater than or equal to 5 nm and less than or equal to 30 nm is formed. Note that appropriate thickness of the oxide semiconductor film varies depending on a material thereof; therefore, the thickness may be determined as appropriate depending on the material. In this embodiment, the oxide semiconductor film is formed by a sputtering method with the use of an In-Ga-Zn-O-based oxide semiconductor target.

[0180] The oxide semiconductor film is formed over the substrate 450 as follows: the substrate is held in the chamber with pressure reduced, residual moisture in the chamber is removed, a sputtering gas from which hydrogen and moisture are removed is introduced, and a target is used. In order to remove the residual moisture in the chamber, it is preferable to use an adsorption-type vacuum pump. For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. As an exhaustion unit, a turbo molecular pump to which a cold trap is added may be used. In the chamber in which exhaustion is performed using a cryopump, a hydrogen

molecule, a compound including a hydrogen atom such as water (H_2O), a compound including a carbon atom, or the like is exhausted. Accordingly, the concentration of impurities included in the oxide semiconductor film formed in the chamber can be reduced. The substrate may be heated at the time of the film deposition of the oxide semiconductor film.

[0181] It is preferable that a high-purity gas in which an impurity such as hydrogen, water, a hydroxyl group, or hydride is removed to 1 ppm or less, preferably 10 ppb or less be used as the sputtering gas for the deposition of the oxide semiconductor film.

[0182] As an example of the film deposition condition, the following condition is employed: the temperature of the substrate is room temperature; the distance between the substrate and the target is 110 mm; the pressure is 0.4 Pa; the direct current (DC) power supply is 0.5 kW; and the atmosphere is oxygen and argon (the flow rate ratio of oxygen to argon is 15 sccm : 30 sccm).

[0183] Next, the oxide semiconductor film is processed into an island-shaped oxide semiconductor layer 462 by a second photolithography step (see FIG. 8B). In this embodiment, the oxide semiconductor film is processed into the island-shaped oxide semiconductor layer 462 by a wet etching method using a solution obtained by mixing phosphoric acid, acetic acid, and nitric acid.

[0184] In this embodiment, a first heat treatment is performed on the oxide semiconductor layer 462. The temperature of the first heat treatment is higher than or equal to 400 °C and lower than or equal to 750 °C, and higher than or equal to 400 °C and lower than the strain point of the substrate 450 when the strain point of the substrate 450 is lower than or equal to 750 °C. In this embodiment, the substrate is put in an electric furnace which is a kind of heat treatment apparatus and heat treatment is performed on the oxide semiconductor layer at 450 °C for one hour in a nitrogen atmosphere, and then, the temperature is reduced to room temperature without exposure to the air and water or hydrogen is prevented from entering the oxide semiconductor layer; thus, an oxide semiconductor layer is obtained. The oxide semiconductor layer 462 can be dehydrated or dehydrogenated by the first heat treatment.

[0185] The heat treatment apparatus is not limited to an electric furnace and may be provided with a device that heats an object to be processed by thermal conduction or thermal radiation from a heater such as a resistance heater or the like. For example, an RTA (rapid thermal annealing) apparatus such as a GRTA (gas rapid thermal annealing) apparatus or an LRTA (lamp rapid thermal annealing) apparatus can be used. For example, as the first heat treatment, GRTA may be performed as follows: the substrate is transferred into an inert gas heated to a high temperature of 650 °C to 700 °C, heated for several minutes, and transferred and taken out of the inert gas heated to the high temperature. GRTA enables a high-temperature heat treatment for a short time.

[0186] In the first heat treatment, it is preferable that

water, hydrogen, or the like be not contained in nitrogen or a rare gas such as helium, neon, or argon. It is preferable that nitrogen or a rare gas such as helium, neon, or argon which is introduced into the heat treatment apparatus have a purity of 6N (99.9999 %) or more, far preferably 7N (99.99999 %) or more (that is, the concentration of impurities be 1 ppm or less, far preferably 0.1 ppm or less).

[0187] Further, depending on the condition of the first heat treatment or a material of the oxide semiconductor layer, the oxide semiconductor layer 462 might be crystallized to be a microcrystalline film or a polycrystalline film.

[0188] The first heat treatment of the oxide semiconductor layer can also be performed on the oxide semiconductor film before being processed into the island-like oxide semiconductor layer 462. In that case, the substrate is taken out from the heat apparatus after the first heat treatment, and then a photolithography step is performed thereon.

[0189] The example in which the heat treatment for dehydration and/or dehydrogenation on the oxide semiconductor layer is performed just after the formation of the oxide semiconductor layer 462 is described above. However, the heat treatment for dehydration and/or dehydrogenation may be performed after the source or drain electrode layer 465b is stacked on the oxide semiconductor layer or after the gate insulating layer 452 is formed over the source or drain electrode layer 465b as long as it is performed after the deposition of the oxide semiconductor layer.

[0190] Next, a conductive film is formed over the insulating layer 457 and the oxide semiconductor layer 462. After that, a resist mask is formed over the conductive film by a third photolithography step, the conductive film is selectively etched to form the source or drain electrode layer 465b and the wiring layer 468, and then, the resist mask is removed (see FIG. 8C). The source or drain electrode layer 465b and the wiring layer 468 may be each formed by a similar material and a similar step to the material and the step of each of the source or drain electrode layers 465a1 and 465a2.

[0191] In this embodiment, a 150-nm-thick titanium film is formed as each of the source or drain electrode layer 465b and the wiring layer 468 by a sputtering method. In this embodiment, since the source or drain electrode layers 465a1 and 465a2 and the source or drain electrode layer 465b are the titanium films which are the same as each other, etching selectivity between the source or drain electrode layer 465b and each of the source or drain electrode layers 465a1 and 465a2 cannot be provided. Therefore, in order to prevent the source or drain electrode layers 465a1 and 465a2 from being etched when the source or drain electrode layer 465b is etched, the wiring layer 468 is provided over the source or drain electrode layer 465a2 which is not covered with the oxide semiconductor layer 462. In the case where different materials which have high selectivity at the time of etching

are used to form the source or drain electrode layers 465a1 and 465a2 and the source or drain electrode layer 465b, the wiring layer 468 by which the source or drain electrode layer 465a2 is protected at the time of etching is not necessarily provided

[0192] The oxide semiconductor layer 462 may be partly etched off by the etching of the conductive film. Materials and the etching conditions are controlled as appropriate so as not to remove the oxide semiconductor layer 462 beyond necessity.

[0193] In this embodiment, since the Ti film is used as the conductive film and the In-Ga-Zn-O-based oxide semiconductor is used as the oxide semiconductor layer 462, an ammonium hydroxide/hydrogen peroxide mixture (a 31 wt% hydrogen peroxide solution : 28 wt% ammonia water : water = 5:2:2) is used as an etchant.

[0194] In the third photolithography step, in some cases, part of the oxide semiconductor layer 462 is etched, whereby an oxide semiconductor layer having a groove (a depression portion) may be formed. The resist mask used for forming the source or drain electrode layer 465b and the wiring layer 468 may be formed by an inkjet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing cost can be reduced.

[0195] Next, the gate insulating layer 452 is formed over the insulating layer 457, the oxide semiconductor layer 462, the source or drain electrode layers 465a1 and 465a2, and the source or drain electrode layer 465b.

[0196] The gate insulating layer 452 can be formed with a single-layer structure or a stacked-layer structure using one or more of a silicon oxide layer, a silicon nitride layer, a silicon oxynitride layer, a silicon nitride oxide layer, and an aluminum oxide layer by a plasma CVD method, a sputtering method, or the like. In order to prevent the gate insulating layer 452 from containing hydrogen as much as possible, it is preferable to form the gate insulating layer 452 by a sputtering method. In the case of forming a silicon oxide film by a sputtering method, a silicon target or a quartz target is used as a target, and oxygen or a mixed gas of oxygen and argon is used as a sputtering gas.

[0197] The gate insulating layer 452 may have a structure in which a silicon oxide layer and a silicon nitride layer are stacked in this order over the source or drain electrode layers 465a1 and 465a2 and the source or drain electrode layer 465b. In this embodiment, a 100-nm-thick silicon oxide film is formed as follows: the pressure is 0.4 Pa; the high-frequency power is 1.5 kW; the atmosphere is oxygen and argon (flow rate ratio of oxygen to argon is 25 sccm: 25 sccm = 1:1); and an RF sputtering method is used.

[0198] Next, a resist mask is formed by a fourth photolithography step, and etching is selectively performed to remove part of the gate insulating layer 452, so that an opening 423 reaching the wiring layer 438 is formed (see FIG. 8D). An opening reaching the source or drain electrode layer 465b may be formed when the opening

423 is formed, though not shown. In this embodiment, the opening reaching the source or drain electrode layer 465b is formed after stacking an interlayer insulating layer, and a wiring layer for electrical connection is formed in the opening.

[0199] Next, a conductive film is formed over the gate insulating layer 452 and the opening 423. After that, a fifth photolithography step is performed thereon, so that the gate electrode layer 461 (461a and 461b) and the wiring layer 464 are formed. Note that a resist mask may be formed by an inkjet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing cost can be reduced.

[0200] The gate electrode layer 461 (461a and 461b) and the wiring layer 464 can be formed each to have a single-layer or stacked-layer structure using a metal material such as molybdenum, titanium, chromium, tantalum, tungsten, aluminum, copper, neodymium, or scandium, or an alloy material which contains any of these materials as its main component.

[0201] In this embodiment, a 150-nm-thick titanium film is formed as each of the gate electrode layer 461 (461a and 461b) and the wiring layer 464 by a sputtering method. Although the gate electrode layer 461 (461a and 461b) is shown as being divided in FIG. 8E, the gate electrode layer 461 (461a and 461b) is formed so as to overlap a torus-shaped void formed by the source or drain electrode layers 465a1 and 465a2 and the source or drain electrode layer 465b as shown in FIG. 7A.

[0202] Next, a second heat treatment (preferably at a temperature higher than or equal to 200 °C and lower than or equal to 400 °C, for example, at a temperature higher than or equal to 250 °C and lower than or equal to 350 °C) is performed in an inert gas atmosphere or an oxygen gas atmosphere. In this embodiment, the second heat treatment is performed at 250 °C for one hour in a nitrogen atmosphere. The second heat treatment may be performed after a protective insulating layer or a planarization insulating layer is formed over the thin film transistor 460.

[0203] Furthermore, heat treatment may be performed at a temperature higher than or equal to 100 °C and lower than or equal to 200 °C for one hour to 30 hours both inclusive in an air atmosphere. This heat treatment may be performed at a fixed heating temperature. Alternatively, the following change in the heating temperature may be conducted plural times repeatedly: the heating temperature is increased from room temperature to a temperature higher than or equal to 100 °C and lower than or equal to 200 °C and then decreased to room temperature. This heat treatment may be performed before the formation of the oxide insulating layer under a reduced pressure. Under the reduced pressure, the heat treatment time can be shortened.

[0204] Through the above-described process, the thin film transistor 460 including the oxide semiconductor layer 462 in which the concentration of hydrogen, moisture, hydride, and hydroxide is reduced can be formed (see

FIG. 8E). The thin film transistor 460 can be used as the thin film transistor used in each pixel of the pixel portion 1008 described in Embodiment 1.

[0205] A protective insulating layer or a planarization insulating layer for planarization may be provided over the thin film transistor 460. Although not shown, in this embodiment, an opening reaching the source or drain electrode layer 465b is formed in the gate insulating layer 452 and the protective insulating layer and/or the planarization insulating layer, and a wiring layer which is electrically connected to the source or drain electrode layer 465b is formed in the opening.

[0206] By removing residual moisture in the reaction atmosphere at the time of the film deposition of the oxide semiconductor film as described above, the concentration of hydrogen and hydride in the oxide semiconductor film can be reduced. Accordingly, the oxide semiconductor film can be stabilized.

[0207] In this manner, in a plurality of pixels included in a display portion of a liquid crystal display device including a thin film transistor using an oxide semiconductor layer, the off-state current can be suppressed. Accordingly, a period for holding voltage in a storage capacitor can be extended, and the power consumption when a still image or the like is displayed in the liquid crystal display device can be decreased. Further, by stopping supplying a control signal in the case where a still image is displayed, power consumption can be further decreased. In addition, a still image and a moving image can be switched without malfunction. In this embodiment, the shape of a channel is circular and the source electrode layer and the drain electrode layer are formed using different layers, whereby the channel length can be decreased and the channel width can be increased. In this manner, a thin film transistor having a large channel width can be formed even in a relatively small area, which enables switching for large current. In addition, although the channel width is large, the off-state current is extremely small since the oxide semiconductor is highly purified.

[0208] Embodiment 3 can be implemented in appropriate combination with any of the structures described in the other embodiments.

(Embodiment 4)

[0209] Thin film transistors in this embodiment are described using FIGS. 9A and 9B. In Embodiment 4, other examples of a thin film transistor which can be applied to a liquid crystal display device disclosed in this specification will be described. Note that Embodiment 2 can be applied to the same portions and the portions and steps having similar functions as to Embodiment 2, and description thereof is not repeated. Further, a specific description for the same portions is omitted. Thin film transistors 425 and 426 described in this embodiment each can be used as a thin film transistor in each pixel of the pixel portion 1008 described in Embodiment 1.

[0210] FIGS. 9A and 9B illustrate examples of a cross-sectional structure of a thin film transistor. The thin film transistors 425 and 426 shown in FIGS. 9A and 9B each are a kind of thin film transistor having a structure in which an oxide semiconductor layer is interposed between a conductive layer and a gate electrode layer.

[0211] In FIGS. 9A and 9B, a silicon substrate 420 is used, and the thin film transistors 425 and 426 are provided over an insulating layer 422 provided over the silicon substrate 420, respectively.

[0212] In FIG. 9A, a conductive layer 427 is provided between the insulating layer 422 provided over the silicon substrate 420 and an insulating layer 407 so as to overlap at least an oxide semiconductor layer 412 entirely.

[0213] FIG. 9B is an example in which a conductive layer between the insulating layer 422 and the insulating layer 407 is processed by etching to be a conductive layer 424 and overlaps at least part including a channel region of the oxide semiconductor layer 412.

[0214] The conductive layers 427 and 424 each are formed by a metal material which is resistant to the temperature of a heat treatment performed later. An element selected from titanium (Ti), tantalum (Ta), tungsten (W), molybdenum (Mo), chromium (Cr), neodymium (Nd), and scandium (Sc), an alloy including any of the above elements as its component, an alloy film including a combination of any of these elements as its component, or the like can be used. A single layer structure or a stacked-layer structure may be used; for example, a single layer of a tungsten layer, a stacked-layer structure of a tungsten nitride layer and a tungsten layer, or the like can be used.

[0215] The potential of each of the conductive layers 427 and 424 may be equal to or different from the potential of the gate electrode layer 411 of each of the thin film transistors 425 and 426, respectively, and each of the conductive layers 427 and 424 may function as a second gate electrode layer. The potentials of the conductive layers 427 and 424 each may be a fixed potential such as GND or 0 V.

[0216] Electric characteristics of the thin film transistors 425 and 426 can be controlled by the conductive layers 427 and 424, respectively.

[0217] Embodiment 4 can be implemented in appropriate combination with any of the structures described in the other embodiments.

(Embodiment 5)

[0218] In Embodiment 5, an example of a thin film transistor which can be applied to a liquid crystal display device disclosed in this specification will be described.

[0219] A thin film transistor of this embodiment and an embodiment of a method for manufacturing the thin film transistor are described using FIGS. 10A to 10E.

[0220] FIGS. 10A to 10E illustrate an example of a cross-sectional structure of a thin film transistor. A thin film transistor 390 shown in FIGS. 10A to 10E is a kind

of bottom-gate structure which is also referred to as an inverted staggered thin film transistor.

[0221] Although the thin film transistor 390 is described using a single-gate thin film transistor, a multi-gate thin film transistor including a plurality of channel formation regions can be formed as necessary.

[0222] Hereinafter, a process for manufacturing the thin film transistor 390 over a substrate 394 is described using FIGS. 10A to 10E.

[0223] First, a conductive film is formed over the substrate 394 having an insulating surface, and then, a first photolithography step is performed thereon, so that a gate electrode layer 391 is formed. It is preferable that an end portion of the gate electrode layer have a tapered shape because coverage with a gate insulating layer stacked thereover is improved. Note that a resist mask may be formed by an ink-jet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing cost can be reduced.

[0224] Although there is no particular limitation on a substrate which can be used as the substrate 394 having an insulating surface, it is necessary that the substrate 394 has at least heat resistance high enough to withstand heat treatment to be performed later.

[0225] For example, in the case where a glass substrate is used as the substrate 394, if the temperature of the heat treatment to be performed later is high, it is preferable to use a glass substrate whose strain point is 730 °C or higher. As the glass substrate, a glass material such as aluminosilicate glass, aluminoborosilicate glass, or barium borosilicate glass is used, for example. Note that by containing a larger amount of barium oxide (BaO) than boron oxide, a glass substrate is heat-resistant and of more practical use. Therefore, it is preferable that a glass substrate containing more BaO than B₂O₃ be used.

[0226] Note that a substrate formed of an insulator such as a ceramic substrate, a quartz glass substrate, or a sapphire substrate may be used instead of the glass substrate as the substrate 394. Alternatively, a crystallized glass substrate or the like may be used. Further alternatively, a plastic substrate or the like may be used as appropriate.

[0227] An insulating film which functions as a base film may be provided between the substrate 394 and the gate electrode layer 391. The base film has a function of preventing diffusion of an impurity element from the substrate 394, and can be formed with a single-layer structure or a stacked-layer structure using one or more of a silicon nitride film, a silicon oxide film, a silicon nitride oxide film, and a silicon oxynitride film.

[0228] The gate electrode layer 391 can be formed with a single-layer structure or a stacked-layer structure using a metal material such as molybdenum, titanium, chromium, tantalum, tungsten, aluminum, copper, neodymium, or scandium, or an alloy material containing any of these materials as a main component.

[0229] For example, as a two-layer structure of the gate electrode layer 391, any of the following structures is pref-

erable: a two-layer structure of an aluminum layer and a molybdenum layer stacked thereover, a two-layer structure of a copper layer and a molybdenum layer stacked thereover, a two-layer structure of a copper layer and a titanium nitride layer or a tantalum nitride layer stacked thereover, a two-layer structure of a titanium nitride layer and a molybdenum layer, and a two-layer structure of a tungsten nitride layer and a tungsten layer. As a three-layer structure, a stack of a tungsten layer or a tungsten

nitride layer, a layer of an alloy of aluminum and silicon or an alloy of aluminum and titanium, and a titanium nitride layer or a titanium layer is preferable. The gate electrode layer may also be formed using a light-transmitting conductive film. As an example of a material of the light-transmitting conductive film, a light-transmitting conductive oxide or the like can be given.

[0230] Next, a gate insulating layer 397 is formed over the gate electrode layer 391.

[0231] The gate insulating layer 397 can be formed with a single-layer structure or a stacked-layer structure using one or more of a silicon oxide layer, a silicon nitride layer, a silicon oxynitride layer, a silicon nitride oxide layer, and an aluminum oxide layer by a plasma CVD method, a sputtering method, or the like. In order to prevent the gate insulating layer 397 from containing hydrogen as much as possible, it is preferable to form the gate insulating layer 397 by a sputtering method. In the case of forming a silicon oxide film by a sputtering method, a silicon target or a quartz target is used as a target, and oxygen or a mixed gas of oxygen and argon is used as a sputtering gas.

[0232] The gate insulating layer 397 can have a structure in which a silicon nitride layer and a silicon oxide layer are stacked in this order over the gate electrode layer 391. For example, a 100-nm-thick gate insulating layer is formed in such a manner that a silicon nitride layer (SiN_y (y > 0)) having a thickness of greater than or equal to 50 nm and less than or equal to 200 nm is formed by a sputtering method as a first gate insulating layer and then a silicon oxide layer (SiO_x (x > 0)) having a thickness of greater than or equal to 5 nm and less than or equal to 300 nm is stacked as a second gate insulating layer over the first gate insulating layer.

[0233] In order for the oxide semiconductor film not to contain hydrogen, a hydroxyl group, and moisture as much as possible in the gate insulating layer 397 and an oxide semiconductor film 393, it is preferable to preheat the substrate 394 provided with the gate electrode layer 391 or the substrate 394 provided with the gate electrode layer 391 and the gate insulating layer 397 in a preheating chamber of a sputtering apparatus before the film formation so that an impurity such as hydrogen or moisture adsorbed on the substrate 394 is eliminated, and perform exhaustion. The temperature of the preheating be higher than or equal to 100 °C and lower than or equal to 400 °C, preferably higher than or equal to 150 °C and lower than or equal to 300 °C. As an exhaustion unit provided in the preheating chamber, a cryopump is preferable.

This preheating step is not necessarily performed. This preheating step may be performed in a similar manner on the substrate 394 with which a source electrode layer 395a and a drain electrode layer 395b shown in FIG. 10C are provided before an oxide insulating layer 396 is formed.

[0234] Next, over the gate insulating layer 397, the oxide semiconductor film 393 is formed to a thickness greater than or equal to 2 nm and less than or equal to 200 nm, preferably greater than or equal to 5 nm and less than or equal to 30 nm by a sputtering method (see FIG. 10A).

[0235] Before the oxide semiconductor film 393 is formed by a sputtering method, it is preferable to perform reverse sputtering in which an argon gas is introduced and plasma is generated so that dust on a surface of the gate insulating layer 397 is removed. The reverse sputtering refers to a method in which, without application of a voltage to a target side, an RF power source is used for application of a voltage to a substrate side in an argon atmosphere to modify a surface. Instead of the argon atmosphere, a nitrogen atmosphere, a helium atmosphere, an oxygen atmosphere, or the like may be used.

[0236] The oxide semiconductor film 393 is formed using an In-Ga-Zn-O-based oxide semiconductor film, an In-Sn-Zn-O-based oxide semiconductor film, an In-Al-Zn-O-based oxide semiconductor film, a Sn-Ga-Zn-O-based oxide semiconductor film, an Al-Ga-Zn-O-based oxide semiconductor film, a Sn-Al-Zn-O-based oxide semiconductor film, an In-Zn-O-based oxide semiconductor film, a Sn-Zn-O-based oxide semiconductor film, an Al-Zn-O-based oxide semiconductor film, an In-O-based oxide semiconductor film, a Sn-O-based oxide semiconductor film, or a Zn-O-based oxide semiconductor film. In this embodiment, the oxide semiconductor film 393 is formed by a sputtering method using an In-Ga-Zn-O-based oxide semiconductor target. Specifically, a target having a composition ratio of $\text{In}_2\text{O}_3:\text{Ga}_2\text{O}_3:\text{ZnO} = 1:1:1$ [mol%] (that is, $\text{In}:\text{Ga}:\text{Zn} = 1:1:0.5$ [atom%]) is used. Alternatively, a target having a composition ratio of $\text{In}:\text{Ga}:\text{Zn} = 1:1:1$ [atom%] or $\text{In}:\text{Ga}:\text{Zn} = 1:1:2$ [atom%] can be used. In this embodiment, the filling rate of the oxide semiconductor target is equal to or greater than 90 % and equal to or less than 100 %, preferably equal to or greater than 95 % and equal to or less than 99.9 %. With use of the oxide semiconductor target having high filling rate, the deposited oxide semiconductor film has high density. The atmosphere in the sputtering of the oxide semiconductor film 393 may be an atmosphere of a rare gas (typically argon), an oxygen atmosphere, or a mixed atmosphere of a rare gas (typically argon) and oxygen. The target may contain SiO_2 at 2 wt% or more and 10 wt% or less.

[0237] The oxide semiconductor film 393 is formed over the substrate 394 as follows: the substrate is held in the chamber with pressure reduced, and the substrate is heated to room temperature or a temperature lower than 400 °C; and residual moisture in the chamber is

removed, a sputtering gas from which hydrogen and moisture are removed is introduced, and the above-described target is used. In order to remove the residual moisture in the chamber, it is preferable to use an absorption-type vacuum pump.

For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. As an exhaustion unit, a turbo molecular pump to which a cold trap is added may be used. In the chamber in which exhaustion is performed using a cryopump, a hydrogen molecule, a compound including a hydrogen atom such as water (H_2O), a compound including a carbon atom, or the like is exhausted. Accordingly, the concentration of impurities included in the oxide semiconductor film formed in the chamber can be reduced. Moisture left in the chamber is removed by a cryopump in the sputtering film deposition, the substrate temperature at the time of film deposition of the oxide semiconductor film 393 can have a temperature equal to or higher than room temperature and lower than 400 °C.

[0238] As an example of the film deposition condition, the following condition is employed: the distance between the substrate and the target is 100 mm; the pressure is 0.6 Pa; the direct current (DC) power supply is 0.5 kW; and the atmosphere is oxygen (the flow rate ratio of oxygen is 100 %). It is preferable that a pulsed direct current (DC) power supply be used because powder substances (also referred to as particles or dust) generated in the film deposition can be reduced and the film thickness can be made uniform.

[0239] Examples of a sputtering method include an RF sputtering method in which a high-frequency power source is used as a sputtering power source, a DC sputtering method in which a DC power source is used, and a pulsed DC sputtering method in which a bias is applied in a pulsed manner. The RF sputtering method is mainly used in the case where an insulating film is formed, and the DC sputtering method is mainly used in the case where a metal film is formed.

[0240] A multi-target sputtering apparatus in which a plurality of targets which are formed of different materials from each other can be set may be used. With the multi-target sputtering apparatus, films of different materials can be stacked to be formed in the same chamber, or plural kinds of materials can be deposited by electric discharge at the same time in the same chamber.

[0241] Alternatively, a sputtering apparatus provided with a magnet system inside the chamber and used for a magnetron sputtering method, or a sputtering apparatus used for an ECR sputtering method in which plasma generated with the use of microwaves is used without using glow discharge may be used.

[0242] Further, as the deposition method using a sputtering method, a reactive sputtering method in which a target substance and a sputtering gas component are chemically reacted with each other during deposition to form a thin compound film thereof, or a bias sputtering method in which a voltage is also applied to a substrate during deposition may be used.

[0243] Next, the oxide semiconductor film is processed into an island-shaped oxide semiconductor layer 399 by a second photolithography step (see FIG. 10B). A resist mask for forming the island-shaped oxide semiconductor layer 399 may be formed using an ink jet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing cost can be reduced.

[0244] In the case where a contact hole is formed in the gate insulating layer 397, a step thereof can be performed at the time of the formation of the oxide semiconductor layer 399.

[0245] For the etching of the oxide semiconductor film 393, either one or both of wet etching and dry etching may be employed.

[0246] As an etching gas for the dry etching, a gas containing chlorine (chlorine-based gas such as chlorine (Cl₂), boron chloride (BCl₃), silicon chloride (SiCl₄), or carbon tetrachloride (CCl₄)) is preferably used.

[0247] Alternatively, a gas containing fluorine (fluorine-based gas such as carbon tetrafluoride (CF₄), sulfur fluoride (SF₆), nitrogen fluoride (NF₃), or trifluoromethane (CHF₃)); hydrogen bromide (HBr); oxygen (O₂); any of these gases to which a rare gas such as helium (He) or argon (Ar) is added; or the like can be used.

[0248] As the dry etching method, a parallel-plate RIE (reactive ion etching) method or an ICP (inductively coupled plasma) etching method can be used. In order to etch the layer into a desired shape, the etching conditions (the amount of electric power applied to a coil-shaped electrode, the amount of electric power applied to an electrode on a substrate side, the temperature of the electrode on the substrate side, or the like) are adjusted as appropriate.

[0249] As an etchant used for wet etching, a mixed solution of phosphoric acid, acetic acid, and nitric acid, an ammonium hydroxide/hydrogen peroxide mixture (a 31 wt% hydrogen peroxide solution : 28 wt% ammonia water : water = 5:2:2), or the like can be used. ITO07N (produced by KANTO CHEMICAL CO., INC.) may be used.

[0250] After the wet etching, the etchant is removed by cleaning together with the material which is etched off. Waste liquid of the etchant containing the removed material may be purified and the material contained in the waste liquid may be reused. The resources can be efficiently used and the cost can be reduced by collecting and reusing a material such as indium included in the oxide semiconductor from the waste liquid after the etching.

[0251] The etching conditions (such as an etchant, etching time, or temperature) are appropriately adjusted depending on a material so that the material can be etched into a desired shape.

[0252] Note that in that case, it is preferable to perform reverse sputtering before a conductive film is formed by the following step to remove a resist residue or the like from a surface of the oxide semiconductor layer 399 and the gate insulating layer 397.

[0253] Next, a conductive film is formed over the gate insulating layer 397 and the oxide semiconductor layer 399. The conductive film may be formed by a sputtering method or a vacuum evaporation method. As a material

5 of the conductive film, an element selected from Al, Cr, Cu, Ta, Ti, Mo, and W; an alloy containing any of these elements as a component; an alloy film containing any of these elements in combination; and the like can be given. Further, one or more materials selected from manganese, magnesium, zirconium, beryllium, and yttrium may be used. Further, the conductive film may have a single-layer structure or a stacked-layer structure of two or more layers. For example, a single-layer structure of an aluminum film including silicon, a two-layer structure 10 in which a titanium film is stacked over an aluminum film, a three-layer structure in which a titanium film, an aluminum film, and a titanium film are stacked in this order, and the like can be given. Alternatively, a film, an alloy film, or a nitride film which contains aluminum (Al) and 15 one or a plurality of elements selected from titanium (Ti), tantalum (Ta), tungsten (W), molybdenum (Mo), chromium (Cr), neodymium (Nd), and scandium (Sc) may be used.

[0254] Next, a resist mask is formed over the conductive film by a third photolithography step. After that, etching is selectively thereon, so that the source and drain electrode layers 395a and 395b are formed, and then, the resist mask is removed (see FIG. 10C).

[0255] Light exposure at the time of the formation of 25 the resist mask in the third photolithography step may be performed using ultraviolet light, KrF laser light, or ArF laser light. The channel length L of a thin film transistor to be formed is determined by a pitch between a lower end of the source electrode layer and a lower end of the 30 drain electrode layer, which are adjacent to each other over the oxide semiconductor layer 399. In the case where light exposure is performed for a channel length L of less than 25 nm, the light exposure at the time of the 35 formation of the resist mask in the third photolithography step is performed using extreme ultraviolet light having an extremely short wavelength of several nanometers to several tens of nanometers. In the light exposure by extreme ultraviolet light, the resolution is high and the focus depth is large. Accordingly, the channel length L of the 40 thin film transistor can be made to be greater than or equal to 10 nm and less than or equal to 1000 nm, the operation rate of a circuit can be increased, and low power consumption can be achieved by extremely small off-state current.

[0256] The oxide semiconductor layer 462 may be partly etched off by the etching of the conductive film. Materials and the etching conditions are controlled as appropriate so as not to remove the oxide semiconductor layer 399 at the time of etching of the conductive film.

[0257] In this embodiment, since the Ti film is used as the conductive film and the In-Ga-Zn-O-based oxide semiconductor is used as the oxide semiconductor layer 399, an ammonium hydroxide/hydrogen peroxide mix-

ture (a mixture of ammonia, water, and a hydrogen peroxide solution) is used as an etchant.

[0258] In the third photolithography step, in some cases, part of the oxide semiconductor layer 399 is etched, whereby an oxide semiconductor layer having a groove (a depression portion) may be formed. The resist mask used for forming the source and drain electrode layers 395a and 395b may be formed by an inkjet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing cost can be reduced.

[0259] In order to reduce the number of photomasks and steps in the photolithography step, etching may be performed with the use of a resist mask formed using a multi-tone mask which is a light-exposure mask through which light is transmitted so as to have a plurality of intensities. Since a resist mask formed using a multi-tone mask has a plurality of thicknesses and can be further changed in shape by performing etching, the resist mask can be used in a plurality of etching steps to provide different patterns. Therefore, a resist mask corresponding to at least two kinds of different patterns can be formed by using one multi-tone mask. Thus, the number of light-exposure masks can be reduced and the number of corresponding photolithography steps can also be reduced, whereby simplification of the manufacturing process can be realized.

[0260] After the removal of the resist mask, plasma treatment using a gas such as N₂O, N₂, or Ar may be performed to remove water or the like adsorbed on a surface of the oxide semiconductor layer 399 which is exposed. Plasma treatment may be performed using a mixed gas of oxygen and argon.

[0261] Next, the oxide insulating layer 396 is formed as an oxide insulating layer which functions as a protective insulating layer which is in contact with part of the oxide semiconductor layer (see FIG. 10D). In the case where the plasma treatment is performed, the oxide insulating layer 396 may be formed without exposure of the oxide semiconductor layer 399 to the air successively after the plasma treatment. In this embodiment, the oxide semiconductor layer 399 is in contact with the oxide insulating layer 396 in a region where the oxide semiconductor layer 399 overlaps neither the source electrode layer 395a nor the drain electrode layer 395b.

[0262] In this embodiment, as the oxide insulating layer 396, a silicon oxide layer including a defect is formed as follows: the substrate 394 over which the island-shaped oxide semiconductor layer 399, the source electrode layer 395a, and the drain electrode layer 395b are formed is heated at room temperature to a temperature lower than 100 °C; a sputtering gas containing high-purity oxygen from which hydrogen and moisture are removed is introduced; and a silicon semiconductor target is used.

[0263] For example, the silicon oxide film is formed in this embodiment as follows: a silicon target doped with boron (with a resistivity of 0.01 Ω·cm) and which has a purity of 6N is used; the distance between the target and the substrate (T-S distance) is 89 mm; the pressure is

0.4 Pa; the direct current (DC) power source is 6 kW; the atmosphere is oxygen (flow rate ratio of oxygen is 100 %); and a pulsed DC sputtering method is used. The thickness of the silicon oxide film is 300 nm in this embodiment. Quartz (preferably quart) may be used instead of the silicon target to form the silicon oxide film.

[0264] In that case, it is preferable to remove residual moisture in the chamber in the deposition of the oxide insulating layer 396. This is in order to prevent the oxide semiconductor layer 399 and the oxide insulating layer 396 from containing hydrogen, a hydroxyl group, and/or moisture.

[0265] In order to remove the residual moisture in the chamber, it is preferable to use an adsorption-type vacuum pump. For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. As an exhaustion unit, a turbo molecular pump to which a cold trap is added may be used. In the chamber in which exhaustion is performed using a cryopump, a hydrogen molecule, a compound including a hydrogen atom such as water (H₂O), or the like is exhausted. Accordingly, the concentration of impurities included in the oxide insulating layer 396 formed in the chamber can be reduced.

[0266] As the oxide insulating layer 396, instead of the silicon oxide layer, a silicon oxynitride layer, an aluminum oxide layer, an aluminum oxynitride layer, or the like can be used.

[0267] Further, heat treatment at 100 °C to 400 °C may be performed on the state where the oxide insulating layer 396 is in contact with the oxide semiconductor layer 399 after the formation of the oxide insulating layer 396. Since the oxide insulating layer 396 in this embodiment includes many defects, an impurity such as hydrogen, moisture, a hydroxyl group, or hydride included in the oxide semiconductor layer 399 is diffused into the oxide insulating layer 396 by this heat treatment, so that the impurity included in the oxide semiconductor layer 399 is further reduced.

[0268] Through the above-described process, the thin film transistor 390 including an oxide semiconductor layer 392 in which the concentration of hydrogen, moisture, a hydroxyl group, and/or hydride is reduced can be formed (see FIG. 10E).

[0269] By removing residual moisture in the reaction atmosphere at the time of the film deposition of the oxide semiconductor film as described above, the concentration of hydrogen and hydride in the oxide semiconductor film can be reduced. Accordingly, the oxide semiconductor film can be stabilized.

[0270] A protective insulating layer may be provided over the oxide insulating layer. In this embodiment, a protective insulating layer 398 is formed over the oxide insulating layer 396. As the protective insulating layer 398, a silicon nitride film, a silicon nitride oxide film, an aluminum nitride film, or an aluminum nitride oxide film, or the like can be used. In this embodiment, the protective insulating layer 153 is formed using a silicon nitride film.

[0271] As the protective insulating layer 398, a silicon

nitride film is formed by heating the substrate 394 over which layers up to and including the oxide insulating layer 396 are formed, to a temperature of 100 °C to 400 °C, introducing a sputtering gas containing high-purity nitrogen from which hydrogen and moisture are removed, and using a target of silicon semiconductor. In that case also, it is preferable that residual moisture be removed from the treatment chamber in the formation of the protective insulating layer 398 as is the case of the oxide insulating layer 396.

[0272] In the case where the protective insulating layer 398 is formed, the substrate 394 is heated to a temperature of 100 °C to 400 °C at the time of the formation of the protective insulating layer 398, whereby hydrogen and/or moisture included in the oxide semiconductor layer can be diffused into the oxide insulating layer. In such a case, heat treatment after the formation of the oxide insulating layer 396 is not necessarily performed.

[0273] In the case where the silicon oxide layer is formed as the oxide insulating layer 396 and the silicon nitride layer is stacked as the protective insulating layer 398, the silicon oxide layer and the silicon nitride layer can be formed in the same chamber using a common silicon target. First, an etching gas containing oxygen is introduced and a silicon target placed inside the chamber is used, so that a silicon oxide layer is formed; and then, the etching gas is switched to an etching gas containing nitrogen and the same silicon target is used, so that a silicon nitride layer is formed. Since the silicon oxide layer and the silicon nitride layer can be formed in succession without exposure to the air, an impurity such as hydrogen or moisture can be prevented from being adsorbed on a surface of the silicon oxide layer. In that case, after silicon oxide layer is formed as the oxide insulating layer 396 and the silicon nitride layer is stacked as the protective insulating layer 398, heat treatment (at a temperature of 100 °C to 400 °C) for diffusing hydrogen or moisture included in the oxide semiconductor layer into the oxide insulating layer may be performed.

[0274] After the formation of the protective insulating layer, heat treatment may be performed at a temperature higher than or equal to 100 °C and lower than or equal to 200 °C in the air for 1 hour to 30 hours both inclusive. This heat treatment may be performed at a fixed heating temperature. Alternatively, the following change in the heating temperature may be conducted plural times repeatedly: the heating temperature is increased from room temperature to a temperature higher than or equal to 100 °C and lower than or equal to 200 °C and then decreased to room temperature. Further, this heat treatment may be performed before the formation of the oxide insulating film under a reduced pressure. Under the reduced pressure, the heat treatment time can be shortened. With this heat treatment, a normally-off thin film transistor (threshold voltage thereof is positive in the case of an n-channel transistor) can be obtained. Therefore, reliability of the liquid crystal display device can be improved.

[0275] Further, by removing residual moisture in the

reaction atmosphere at the time of the formation of the oxide semiconductor layer, in which a channel formation region is to be formed, over the gate insulating layer, the concentration of hydrogen or hydride in the oxide semiconductor layer can be reduced.

[0276] The above-described process can be used for manufacturing a backplane (a substrate over which a thin film transistor is formed) of a liquid crystal display panel, an electroluminescent display panel, a display device using electronic ink, or the like. Since the above-described process is performed at a temperature lower than or equal to 400 °C, the process can be applied to a manufacturing process using a glass substrate having a side longer than or equal to one meter and a thickness less than or equal to one millimeter. Further, since the whole process can be performed at a treatment temperature of 400 °C or lower, a display panel can be manufactured without consuming too much energy.

[0277] The off-state current can be reduced in the thin film transistor using an oxide semiconductor layer, manufactured as described above. Therefore, by using the thin film transistor in each of a plurality of pixels of a display portion of a liquid crystal display device, a period for holding voltage in a storage capacitor can be extended, and the power consumption when a still image or the like is displayed in the liquid crystal display device can be decreased. Further, by stopping supplying a control signal in the case where a still image is displayed, power consumption can be further decreased. In addition, a still image and a moving image can be switched without malfunction.

[0278] Embodiment 5 can be implemented in appropriate combination with any of the structures described in the other embodiments.

(Embodiment 6)

[0279] A thin film transistor of this embodiment and an embodiment of a method for manufacturing the thin film transistor are described using FIGS. 11A to 11E.

[0280] In Embodiment 6, another example of a thin film transistor which can be applied to a liquid crystal display device disclosed in this specification will be described. A thin film transistor 310 described in this embodiment can be used as a thin film transistor in each pixel of the pixel portion 1008 described in Embodiment 1.

[0281] FIGS. 11A to 11E illustrate an example of a cross-sectional structure of a thin film transistor. The thin film transistor 310 shown in FIGS. 11A to 11E is a kind of bottom-gate structure which is also referred to as an inverted staggered thin film transistor.

[0282] Although the thin film transistor 310 is described using a single-gate thin film transistor, a multi-gate thin film transistor including a plurality of channel formation regions can be formed as necessary.

[0283] Hereinafter, a process for manufacturing the thin film transistor 310 over a substrate 300 is described using FIGS. 11A to HE.

[0284] First, a conductive film is formed over the substrate 300 having an insulating surface, and then, a first photolithography step is performed thereon, so that a gate electrode layer 311 is formed. Note that a resist mask may be formed by an ink-jet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing cost can be reduced.

[0285] Although there is no particular limitation on a substrate which can be used as the substrate 300 having an insulating surface, it is necessary that the substrate 300 has at least heat resistance high enough to withstand heat treatment to be performed later.

[0286] For example, in the case where a glass substrate is used as the substrate 300, if the temperature of the heat treatment to be performed later is high, it is preferable to use a glass substrate whose strain point is 730 °C or higher. As the glass substrate, a glass material such as aluminosilicate glass, aluminoborosilicate glass, or barium borosilicate glass is used, for example. Note that by containing a larger amount of barium oxide (BaO) than boron oxide, a glass substrate is heat-resistant and of more practical use. Therefore, it is preferable that a glass substrate containing more BaO than B₂O₃ be used.

[0287] Note that a substrate formed of an insulator such as a ceramic substrate, a quartz glass substrate, or a sapphire substrate may be used instead of the glass substrate as the substrate 300. Alternatively, a crystallized glass substrate or the like may be used.

[0288] An insulating film which functions as a base film may be provided between the substrate 300 and the gate electrode layer 311. The base film has a function of preventing diffusion of an impurity element from the substrate 300, and can be formed with a single-layer structure or a stacked-layer structure using one or more of a silicon nitride film, a silicon oxide film, a silicon nitride oxide film, and a silicon oxynitride film.

[0289] The gate electrode layer 311 can be formed with a single-layer structure or a stacked-layer structure using a metal material such as molybdenum, titanium, chromium, tantalum, tungsten, aluminum, copper, neodymium, or scandium, or an alloy material containing any of these materials as a main component.

[0290] For example, as a two-layer structure of the gate electrode layer 311, any of the following structures is preferable: a two-layer structure of an aluminum layer and a molybdenum layer stacked thereover, a two-layer structure of a copper layer and a molybdenum layer stacked thereover, a two-layer structure of a copper layer and a titanium nitride layer or a tantalum nitride layer stacked thereover, a two-layer structure of a titanium nitride layer and a molybdenum layer, and a two-layer structure of a tungsten nitride layer and a tungsten layer. As a three-layer structure, a stack of a tungsten layer or a tungsten nitride layer, a layer of an alloy of aluminum and silicon or an alloy of aluminum and titanium, and a titanium nitride layer or a titanium layer is preferable.

[0291] Next, a gate insulating layer 302 is formed over the gate electrode layer 311.

[0292] The gate insulating layer 302 can be formed to have a single layer of a silicon oxide layer, a silicon nitride layer, a silicon oxynitride layer, a silicon nitride oxide layer, or an aluminum oxide layer or a stacked layer thereof by a plasma CVD method, a sputtering method, or the like. For example, a silicon oxynitride layer may be formed by a plasma CVD method using SiH₄, oxygen, and nitrogen as a deposition gas. In this embodiment, the thickness of the gate insulating layer 302 is greater than or equal to 100 nm and less than or equal to 500 nm. In the case of a stacked-layer structure, a first gate insulating layer with a thickness greater than or equal to 50 nm and less than or equal to 200 nm and a second gate insulating layer with a thickness greater than or equal to 5 nm and less than or equal to 300 nm are stacked on the first gate insulating layer.

[0293] In this embodiment, a silicon oxynitride layer having a thickness of 100 nm or less is formed by a plasma CVD method as the gate insulating layer 302.

[0294] Next, over the gate insulating layer 302, an oxide semiconductor film 330 is formed by a sputtering method to a thickness greater than or equal to 2 nm and less than or equal to 200 nm, preferably greater than or equal to 5 nm and less than or equal to 30 nm. Note that an appropriate thickness differs depending on an oxide semiconductor material, and the thickness may be set as appropriate depending on the material. A cross-sectional view in this step is FIG. 11A.

[0295] Before the oxide semiconductor film 330 is formed by a sputtering method, it is preferable to perform reverse sputtering in which an argon gas is introduced and plasma is generated so that dust on a surface of the gate insulating layer 302 is removed. Instead of the argon atmosphere, a nitrogen atmosphere, a helium atmosphere, an oxygen atmosphere, or the like may be used.

[0296] The oxide semiconductor film 330 is formed using an In-Ga-Zn-O-based oxide semiconductor film, an In-Sn-Zn-O-based oxide semiconductor film, an In-Al-Zn-O-based oxide semiconductor film, a Sn-Ga-Zn-O-based oxide semiconductor film, an Al-Ga-Zn-O-based oxide semiconductor film, a Sn-Al-Zn-O-based oxide semiconductor film, an In-Zn-O-based oxide semiconductor film, a Sn-Zn-O-based oxide semiconductor film, an Al-Zn-O-based oxide semiconductor film, an In-O-based oxide semiconductor film, a Sn-O-based oxide semiconductor film, or a Zn-O-based oxide semiconductor film. In this embodiment, the oxide semiconductor film 330 is formed by a sputtering method using an In-Ga-Zn-O-based oxide semiconductor target. Specifically, a target having a composition ratio of In₂O₃:Ga₂O₃:ZnO = 1:1:1 [mol%] (that is, In:Ga:Zn = 1:1:0.5 [atom%]) is used. Alternatively, a target having a composition ratio of In:Ga:Zn = 1:1:1 [atom%] or In:Ga:Zn = 1:1:2 [atom%] can be used. In this embodiment, the filling rate of the oxide semiconductor target is equal to or greater than 90 % and equal to or less than 100 %, preferably equal to or greater than 95 % and equal to or less than 99.9 %. With use of the oxide semiconductor target having high

filling rate, the deposited oxide semiconductor film has high density. The target may contain SiO_2 at 2 wt% or more and 10 wt% or less. The atmosphere in the sputtering of the oxide semiconductor film 330 may be an atmosphere of a rare gas (typically argon), an oxygen atmosphere, or a mixed atmosphere of a rare gas and oxygen.

[0297] It is preferable that a high-purity gas in which an impurity such as hydrogen, water, a hydroxyl group, or hydride is removed to 1 ppm or less, preferably 10 ppb or less be used as the sputtering gas for the deposition of the oxide semiconductor film 330.

[0298] The sputtering is performed by holding the substrate in the chamber with pressure reduced at a substrate temperature higher than or equal to 100 °C and lower than or equal to 600 °C, preferably higher than or equal to 200 °C and lower than or equal to 400 °C. By heating the substrate in the film deposition, the concentration of impurities contained in the oxide semiconductor film can be decreased. Further, damage by the sputtering can be suppressed. Then, residual moisture in the chamber is removed, a sputtering gas from which hydrogen and moisture are removed is introduced, and the above-described target is used, so that the oxide semiconductor film 330 is formed over the substrate 300. In order to remove the residual moisture in the chamber, it is preferable to use an adsorption-type vacuum pump. For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. As an exhaustion unit, a turbo molecular pump to which a cold trap is added may be used. In the chamber in which exhaustion is performed using a cryopump, a hydrogen molecule, a compound including a hydrogen atom such as water (H_2O), a compound including a carbon atom, or the like is exhausted. Accordingly, the concentration of impurities included in the oxide semiconductor film formed in the chamber can be reduced.

[0299] As an example of the film deposition condition, the following condition is employed: the distance between the substrate and the target is 100 mm; the pressure is 0.6 Pa; the direct current (DC) power supply is 0.5 kW; and the atmosphere is oxygen (the flow rate ratio of oxygen is 100 %). It is preferable that a pulsed direct current (DC) power supply be used because powder substances (also referred to as particles or dust) generated in the film deposition can be reduced and the film thickness can be made uniform.

[0300] Next, the oxide semiconductor film 330 is processed into an island-shaped oxide semiconductor layer 331 by a second photolithography step. A resist mask for forming the island-shaped oxide semiconductor layer may be formed using an ink jet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing cost can be reduced.

[0301] Next, a first heat treatment is performed on the oxide semiconductor layer 331. The oxide semiconductor layer 331 can be dehydrated or dehydrogenated by the first heat treatment. The temperature of the first heat

treatment is higher than or equal to 400 °C and lower than or equal to 750 °C, preferably higher than or equal to 400 °C and lower than the strain point of the substrate. In this embodiment, the substrate is put in an electric furnace which is a kind of heat treatment apparatus and heat treatment is performed on the oxide semiconductor layer at 450 °C for one hour in a nitrogen atmosphere, and then, the temperature is reduced to room temperature without exposure to the air and water or hydrogen

5 is prevented from entering the oxide semiconductor layer; thus, the oxide semiconductor layer 331 is obtained (see FIG. 11B).

[0302] The heat treatment apparatus is not limited to an electric furnace and may be provided with a device 10 that heats an object to be processed by thermal conduction or thermal radiation from a heater such as a resistance heater or the like. For example, an RTA (rapid thermal annealing) apparatus such as a GRTA (gas rapid thermal annealing) apparatus or an LRTA (lamp rapid thermal annealing) apparatus can be used. The LRTA apparatus 15 is an apparatus for heating an object to be processed by radiation of light (an electromagnetic wave) emitted from a lamp such as a halogen lamp, a metal halide lamp, a xenon arc lamp, a carbon arc lamp, a high pressure sodium lamp, or a high pressure mercury lamp. The GRTA apparatus is an apparatus for heat treatment using a high-temperature gas. As the gas, an inert gas 20 which does not react with the object to be processed, by heat treatment, such as nitrogen or a rare gas such as argon is used.

[0303] For example, as the first heat treatment, GRTA 25 may be performed as follows: the substrate is transferred into an inert gas heated to a high temperature of 650 °C to 700 °C, heated for several minutes, and transferred 30 and taken out of the inert gas heated to the high temperature. GRTA enables a high-temperature heat treatment for a short time.

[0304] In the first heat treatment, it is preferable that 35 water, hydrogen, or the like be not contained in nitrogen or a rare gas such as helium, neon, or argon. It is preferable that nitrogen or a rare gas such as helium, neon, or argon which is introduced into the heat treatment apparatus have a purity of 6N (99.9999 %) or more, far preferably 7N (99.99999 %) or more (that is, the concentration of impurities be 1 ppm or less, far preferably 0.1 ppm or less).

[0305] By the first heat treatment, hydrogen and/or the like contained in the oxide semiconductor layer 331 can be removed and oxygen loss is generated, so that the 40 oxide semiconductor layer 331 becomes an n-type semiconductor (a semiconductor with resistance reduced). Further, depending on the condition of the first heat treatment or a material of the oxide semiconductor layer 331, the oxide semiconductor layer 331 might be crystallized 45 to be a microcrystalline film or a polycrystalline film. For example, the oxide semiconductor layer may be crystallized to be a microcrystalline oxide semiconductor film in which the degree of crystallization is greater than or equal

to 90 % or greater than or equal to 80 %. Further, depending on the condition of the first heat treatment or the material of the oxide semiconductor layer 331, the oxide semiconductor layer 331 may be an amorphous oxide semiconductor film which does not contain crystalline components. The oxide semiconductor layer 331 may become an oxide semiconductor film in which a microcrystalline portion (with a grain diameter greater than or equal to 1 nm and greater than or less than 20 nm, typically greater than or equal to 2 nm and greater than or less than 4 nm) is mixed into an amorphous oxide semiconductor.

[0306] The first heat treatment of the oxide semiconductor layer can also be performed on the oxide semiconductor film 330 before being processed into the island-like oxide semiconductor layer 331. In that case, the substrate is taken out from the heat apparatus after the first heat treatment, and then a photolithography step is performed thereon.

[0307] The heat treatment for dehydration and/or dehydrogenation may be performed after a source electrode and a drain electrode are stacked on the oxide semiconductor layer or after a protective insulating film is formed over a source electrode and a drain electrode as long as it is performed after the deposition of the oxide semiconductor layer.

[0308] In the case where a contact hole is formed in the gate insulating layer 302, a step thereof can be performed before or after the heat treatment for dehydration and/or dehydrogenation is performed on the oxide semiconductor film 330 or the oxide semiconductor layer 331.

[0309] For the etching of the oxide semiconductor film, dry etching may be employed as well as wet etching.

[0310] The etching conditions (such as an etchant, etching time, or temperature) are appropriately adjusted depending on a material so that the material can be etched into a desired shape.

[0311] Next, a conductive film is formed over the gate insulating layer 302 and the oxide semiconductor layer 331. The conductive film may be formed by a sputtering method or a vacuum evaporation method. As a material of the conductive film, an element selected from Al, Cr, Cu, Ta, Ti, Mo, and W; an alloy containing any of these elements as a component; an alloy film containing any of these elements in combination; and the like can be given. Further, one or more materials selected from manganese, magnesium, zirconium, beryllium, and yttrium may be used. Further, the conductive film may have a single-layer structure or a stacked-layer structure of two or more layers. For example, a single-layer structure of an aluminum film including silicon, a two-layer structure in which a titanium film is stacked over an aluminum film, a three-layer structure in which a titanium film, an aluminum film, and a titanium film are stacked in this order, and the like can be given. Alternatively, a film, an alloy film, or a nitride film which contains aluminum (Al) and one or a plurality of elements selected from titanium (Ti), tantalum (Ta), tungsten (W), molybdenum (Mo), chromi-

um (Cr), neodymium (Nd), and scandium (Sc) may be used.

[0312] In the case where heat treatment is performed after the deposition of the conductive film, it is preferable that the conductive film have heat resistance high enough to withstand the heat treatment.

[0313] Next, a resist mask is formed over the conductive film by a third photolithography step. After that, etching is selectively thereon, so that a source and drain electrode layers 315a and 315b are formed, and then, the resist mask is removed (see FIG. 11C).

[0314] Light exposure at the time of the formation of the resist mask in the third photolithography step may be performed using ultraviolet light, KrF laser light, or ArF laser light. The channel length L of a thin film transistor to be formed is determined by a pitch between a lower end of the source electrode layer and a lower end of the drain electrode layer, which are adjacent to each other over the oxide semiconductor layer 331. In the case

where light exposure is performed for a channel length L of less than 25 nm, the light exposure at the time of the formation of the resist mask in the third photolithography step is performed using extreme ultraviolet light having an extremely short wavelength of several nanometers to

several tens of nanometers. In the light exposure by extreme ultraviolet light, the resolution is high and the focus depth is large. Accordingly, the channel length L of the thin film transistor can be made to be greater than or equal to 10 nm and less than or equal to 1000 nm, the operation rate of a circuit can be increased, and low power consumption can be achieved by extremely small off-state current.

[0315] Materials and the etching conditions are controlled as appropriate so as not to remove the oxide semiconductor layer 331 at the time of etching of the conductive film.

[0316] In this embodiment, since the Ti film is used as the conductive film and the In-Ga-Zn-O-based oxide semiconductor is used as the oxide semiconductor layer 331, an ammonium hydroxide/hydrogen peroxide mixture (a mixture of ammonia, water, and a hydrogen peroxide solution) is used as an etchant.

[0317] In the third photolithography step, in some cases, part of the oxide semiconductor layer 331 is etched, whereby an oxide semiconductor layer having a groove (a depression portion) may be formed. The resist mask used for forming the source and drain electrode layers 315a and 315b may be formed by an inkjet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing cost can be reduced.

[0318] Further, an oxide conductive layer may be formed between the oxide semiconductor layer and the source and drain electrode layers. The oxide conductive layer and the metal layer for forming the source and drain electrode layers can be formed successively. The oxide conductive layer can function as a source and drain regions.

[0319] By providing the oxide conductive layer as the

source region and the drain region between the oxide semiconductor layer and the source and drain electrode layers, the resistance of the source region and the drain region can be decreased and the transistor can be operated at high speed.

[0320] In order to reduce the number of photomasks and steps in the photolithography step, etching may be performed with the use of a resist mask formed using a multi-tone mask which is a light-exposure mask through which light is transmitted so as to have a plurality of intensities. Since a resist mask formed using a multi-tone mask has a plurality of thicknesses and can be further changed in shape by performing etching, the resist mask can be used in a plurality of etching steps to provide different patterns. Therefore, a resist mask corresponding to at least two kinds of different patterns can be formed by using one multi-tone mask. Thus, the number of light-exposure masks can be reduced and the number of corresponding photolithography steps can also be reduced, whereby simplification of the manufacturing process can be realized.

[0321] Next, plasma treatment using a gas such as N_2O , N_2 , or Ar may be performed to remove water or the like adsorbed on a surface of the oxide semiconductor layer which is exposed. Plasma treatment may be performed using a mixed gas of oxygen and argon.

[0322] After the plasma treatment, an oxide insulating layer 316 which functions as a protective insulating film and is in contact with part of the oxide semiconductor layer is formed without exposure to the air.

[0323] The oxide insulating layer 316 can be formed to a thickness at least 1 nm by a method by which an impurity such as water or hydrogen does not enter the oxide insulating layer 316, such as a sputtering method as appropriate. When hydrogen is contained in the oxide insulating layer 316, entry of the hydrogen to the oxide semiconductor layer or extraction of oxygen in the oxide semiconductor layer by hydrogen may be caused, thereby making the backchannel of the oxide semiconductor layer n-type (making the resistance thereof low), so that a parasitic channel may be formed. Therefore, it is important that a formation method in which hydrogen is used as little as possible is employed such that the oxide insulating layer 316 contains hydrogen as little as possible.

[0324] In this embodiment, a 200-nm-thick silicon oxide film is deposited as the oxide insulating layer 316 by a sputtering method. The substrate temperature at the time of film deposition may be higher than or equal to room temperature and lower than or equal to 300 °C and in this embodiment, is 100 °C. The silicon oxide film can be formed with a sputtering method in a rare gas (typically argon) atmosphere, an oxygen atmosphere, or a mixed atmosphere containing a rare gas and oxygen. As a target, a silicon oxide target or a silicon target may be used. For example, with the use of a silicon target, silicon oxide can be deposited by a sputtering method under an atmosphere of oxygen and nitrogen. As the oxide insulating

layer 316 which is formed in contact with the oxide semiconductor layer whose resistance is reduced, an inorganic insulating film which does not include impurities such as moisture, a hydrogen ion, and OH^- and blocks entry of these from the outside is used. Typically, a silicon oxide film, a silicon oxynitride film, an aluminum oxide film, an aluminum oxynitride film, or the like is used.

[0325] In that case, it is preferable to remove residual moisture in the chamber in the deposition of the oxide insulating layer 316. This is in order to prevent the oxide semiconductor layer 331 and the oxide insulating layer 316 from containing hydrogen, a hydroxyl group, or moisture.

[0326] In order to remove residual moisture from the chamber, an adsorption-type vacuum pump is preferably used. For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. As an exhaustion unit, a turbo molecular pump to which a cold trap is added may be used. In the chamber in which exhaustion is performed with the use of a cryopump, a hydrogen molecule, a compound including a hydrogen atom such as water (H_2O), or the like, for example, is exhausted. Accordingly, the concentration of impurities included in the oxide insulating layer 316 formed in the chamber can be reduced.

[0327] It is preferable that a high-purity gas in which an impurity such as hydrogen, water, a hydroxyl group, or hydride is removed to 1 ppm or less, preferably 10 ppb or less be used as the sputtering gas for the deposition of the oxide insulating layer 316.

[0328] Next, a second heat treatment (preferably at a temperature higher than or equal to 200 °C and lower than or equal to 400 °C, for example, at a temperature higher than or equal to 250 °C and lower than or equal to 350 °C) is performed in an inert gas atmosphere or an oxygen gas atmosphere. For example, the second heat treatment is performed at 250 °C for one hour in a nitrogen atmosphere. With the second heat treatment, heat is applied on the state where part of the oxide semiconductor layer (the channel formation region) is in contact with the oxide insulating layer 316.

[0329] Through the above process, heat treatment for dehydration and/or dehydrogenation is performed on the deposited oxide semiconductor film to lower the resistance, and then, a part of the oxide semiconductor film is selectively made to include excessive oxygen. As a result, a channel formation region 313 overlapping the gate electrode layer 311 becomes i-type, a high-resistance source region 314a which overlaps the source electrode layer 315a and is formed using a low-resistance oxide semiconductor, and a high-resistance drain region 314b which overlaps the drain electrode layer 315b and is formed using a low-resistance oxide semiconductor are formed in a self-aligned manner. Through the above steps, the thin film transistor 310 is formed (see FIG. 11D).

[0330] Furthermore, heat treatment at a temperature higher than or equal to 100 °C and lower than or equal

to 200 °C in the air for 1 hour to 30 hours both inclusive may be performed. In this embodiment, heat treatment is performed at 150 °C for 10 hours. This heat treatment may be performed at a fixed heating temperature. Alternatively, the following change in the heating temperature may be conducted plural times repeatedly: the heating temperature is increased from room temperature to a temperature higher than or equal to 100 °C and lower than or equal to 200 °C and then decreased to room temperature. Further, this heat treatment may be performed before the formation of the oxide insulating film under a reduced pressure. Under the reduced pressure, the heat treatment time can be shortened. With this heat treatment, hydrogen is introduced from the oxide semiconductor layer to the oxide insulating layer; thus, a normally-off thin film transistor can be obtained. Therefore, reliability of the liquid crystal display device can be improved. Further, by using a silicon oxide layer containing many defects as the oxide insulating layer, impurities such as hydrogen, moisture, a hydroxyl group, or hydride contained in the oxide semiconductor layer are diffused into the oxide insulating layer by this heat treatment to further reduce the impurities contained in the oxide semiconductor layer.

[0331] The high-resistance drain region 314b (or the high-resistance source region 314a) is formed in a portion of the oxide semiconductor layer which overlaps the drain electrode layer 315b (or the source electrode layer 315a), so that the reliability of the thin film transistor can be increased. Specifically, with the formation of the high-resistance drain region 314b, the conductivity can be gradually varied from the drain electrode layer 315b to the high-resistance drain region 314b and the channel formation region 313 in the transistor. Therefore, in the case where the thin film transistor operates using the drain electrode layer 315b connected to a wiring for supplying a high power supply potential VDD, the high-resistance drain region serves as a buffer and a high electric field is not applied locally even if a high electric field is applied between the gate electrode layer 311 and the drain electrode layer 315b, so that the withstand voltage of the transistor can be improved.

[0332] The high-resistance source region and the high-resistance drain region may be formed at all the depths in the film thickness direction in the oxide semiconductor layer in the case where the oxide semiconductor layer is as thin as 15 nm or less; whereas in the case where the oxide semiconductor layer is as thick as a thickness greater than or equal to 30 nm and less than or equal to 50 nm, parts of the oxide semiconductor layer, that is, regions of the oxide semiconductor layer, which are in contact with the source and drain electrode layers and the vicinity thereof may be reduced in the resistance, so that the high-resistance source region and the high-resistance drain region are formed and a region of the oxide semiconductor layer, near the gate insulating layer can be made to be i-type.

[0333] A protective insulating layer may be formed over

the oxide insulating layer 316. For example, a silicon nitride film is formed by an RF sputtering method. An RF sputtering method is preferable as a method for forming a protective insulating layer because it has high productivity. As the protective insulating layer, an inorganic insulating film which does not contain impurities such as moisture, a hydrogen ion, and OH⁻ and blocks entry of these from the outside is used; a silicon nitride film, an aluminum nitride film, a silicon nitride oxide film, an aluminum nitride oxide film, or the like is used. In this embodiment, the protective insulating layer 303 is formed using a silicon nitride film as the protective insulating layer (see FIG. 11E).

[0334] In this embodiment, as the protective insulating layer 303, a silicon nitride film is formed by heating the substrate 300 over which layers up to and including the oxide insulating layer 316 are formed, to a temperature of 100 °C to 400 °C, introducing a sputtering gas containing high-purity nitrogen from which hydrogen and moisture are removed, and using a target of silicon semiconductor. In that case also, it is preferable that residual moisture be removed from the treatment chamber in the formation of the protective insulating layer 303 as is the case of the oxide insulating layer 316.

[0335] A planarization insulating layer for planarization may be provided over the protective insulating layer 303.

[0336] The off-state current can be reduced in each of a plurality of pixels of a display portion of a liquid crystal display device using the thin film transistor using an oxide semiconductor layer as described above. Therefore, a period for holding voltage in a storage capacitor can be extended, and the power consumption when a still image or the like is displayed in the liquid crystal display device can be decreased. Further, by stopping supplying a control signal in the case where a still image is displayed, power consumption can be further decreased. In addition, a still image and a moving image can be switched without malfunction.

[0337] Embodiment 6 can be implemented in appropriate combination with any of the structures described in the other embodiments.

(Embodiment 7)

[0338] A thin film transistor of this embodiment and an embodiment of a method for manufacturing the thin film transistor are described using FIGS. 12A to 12D.

[0339] In Embodiment 7, another example of a thin film transistor which can be applied to a liquid crystal display device disclosed in this specification will be described. A thin film transistor 360 described in this embodiment can be used as a thin film transistor in each pixel of the pixel portion 1008 described in Embodiment 1.

[0340] FIGS. 12A to 12D illustrate an example of a cross-sectional structure of a thin film transistor. The thin film transistor 360 shown in FIGS. 12A to 12D is a kind of bottom-gate structure called a channel-protective structure (also referred to as a channel-stop structure)

and is also referred to as an inverted staggered thin film transistor.

[0341] Although the thin film transistor 360 is described using a single-gate thin film transistor, a multi-gate thin film transistor including a plurality of channel formation regions can be formed as necessary.

[0342] Hereinafter, a process for manufacturing the thin film transistor 360 over a substrate 320 is described using FIGS. 12A to 12D.

[0343] First, a conductive film is formed over the substrate 320 having an insulating surface, a first photolithography step is performed to form a resist mask, and the conductive film is selectively etched by using the resist mask, so that a gate electrode layer 361 is formed. After that, the resist mask is removed. Note that the resist mask may be formed by an ink-jet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing cost can be reduced.

[0344] The gate electrode layer 361 can be formed with a single-layer structure or a stacked-layer structure using a metal material such as molybdenum, titanium, chromium, tantalum, tungsten, aluminum, copper, neodymium, or scandium, or an alloy material containing any of these materials as a main component.

[0345] Next, a gate insulating layer 322 is formed over the gate electrode layer 361.

[0346] In this embodiment, a silicon oxynitride layer having a thickness of 100 nm or less is formed by a plasma CVD method as the gate insulating layer 322.

[0347] Next, an oxide semiconductor film having a thickness greater than or equal to 2 nm and less than or equal to 200 nm is formed over the gate insulating layer 322, and is processed into an island-shaped oxide semiconductor layer 331 by a second photolithography step. In this embodiment, the oxide semiconductor film is formed by a sputtering method using an In-Ga-Zn-O-based oxide semiconductor target.

[0348] In that case, it is preferable to remove residual moisture in the chamber in the deposition of the oxide insulating film. This is in order to prevent the oxide semiconductor film from containing hydrogen, a hydroxyl group, or moisture.

[0349] In order to remove residual moisture from the chamber, an adsorption-type vacuum pump is preferably used. For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. As an exhaustion unit, a turbo molecular pump to which a cold trap is added may be used. In the chamber in which exhaustion is performed with the use of a cryopump, a hydrogen molecule, a compound including a hydrogen atom such as water (H₂O), or the like, for example, is exhausted. Accordingly, the concentration of impurities included in the oxide insulating film formed in the chamber can be reduced.

[0350] It is preferable that a high-purity gas in which an impurity such as hydrogen, water, a hydroxyl group, or hydride is removed to 1 ppm or less, preferably 10 ppb or less be used as the sputtering gas for the deposition

of the oxide insulating film.

[0351] Next, dehydration and/or dehydrogenation of the oxide semiconductor layer are/is performed. The temperature of the first heat treatment for dehydration and/or dehydrogenation is higher than or equal to 400 °C and lower than or equal to 750 °C, preferably higher than or equal to 400 °C and lower than the stain point of the substrate. In this embodiment, the substrate is put in an electric furnace which is a kind of heat treatment apparatus and heat treatment is performed on the oxide semiconductor layer at 450 °C for one hour in a nitrogen atmosphere, and then, water or hydrogen is prevented from entering the oxide semiconductor layer, without exposure to the air; thus, an oxide semiconductor layer 332 is obtained (see FIG. 12A).

[0352] Next, plasma treatment using a gas such as N₂O, N₂, or Ar is performed. This plasma treatment removes water or the like adsorbed on a surface of the oxide semiconductor layer which is exposed. In addition, plasma treatment may be performed using a mixed gas of oxygen and argon.

[0353] Next, an oxide insulating layer is formed over the gate insulating layer 322 and the oxide semiconductor layer 332. After that, a resist mask is formed by a third photolithography step, and etching is performed selectively thereon, so that an oxide insulating layer 366 is formed. After that, the resist mask is removed.

[0354] In this embodiment, a 200-nm-thick silicon oxide film is deposited as the oxide insulating layer 366 by a sputtering method. The substrate temperature at the time of film deposition may be higher than or equal to room temperature and lower than or equal to 300 °C and in this embodiment, is 100 °C. The silicon oxide film can be formed with a sputtering method in a rare gas (typically argon) atmosphere, an oxygen atmosphere, or a mixed atmosphere containing a rare gas and oxygen. As a target, a silicon oxide target or a silicon target may be used. For example, with the use of a silicon target, silicon oxide can be deposited by a sputtering method under an atmosphere of oxygen and nitrogen. As the oxide insulating layer 366 which is formed in contact with the oxide semiconductor layer, an inorganic insulating film which does not include impurities such as moisture, a hydrogen ion, and OH⁻ and blocks entry of these from the outside is used. Typically, a silicon oxide film, a silicon oxynitride film, an aluminum oxide film, an aluminum oxynitride film, or the like is used.

[0355] In that case, it is preferable to remove residual moisture in the chamber in the deposition of the oxide insulating layer 366. This is in order to prevent the oxide semiconductor layer 322 and the oxide insulating layer 366 from containing hydrogen, a hydroxyl group, or moisture.

[0356] In order to remove residual moisture from the chamber, an adsorption-type vacuum pump is preferably used. For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. As an exhaustion unit, a turbo molecular pump to which a cold trap is

added may be used. In the chamber in which exhaustion is performed with the use of a cryopump, a hydrogen molecule, a compound including a hydrogen atom such as water (H_2O), or the like, for example, is exhausted. Accordingly, the concentration of impurities included in the oxide insulating layer 366 formed in the chamber can be reduced.

[0357] It is preferable that a high-purity gas in which an impurity such as hydrogen, water, a hydroxyl group, or hydride is removed to 1 ppm or less, preferably 10 ppb or less be used as the sputtering gas for the deposition of the oxide insulating layer 366.

[0358] Next, a second heat treatment (preferably at a temperature higher than or equal to 200 °C and lower than or equal to 400 °C, for example, at a temperature higher than or equal to 250 °C and lower than or equal to 350 °C) is performed in an inert gas atmosphere or an oxygen gas atmosphere. For example, the second heat treatment is performed at 250 °C for one hour in a nitrogen atmosphere. With the second heat treatment, heat is applied on the state where part of the oxide semiconductor layer (the channel formation region) is in contact with the oxide insulating layer 366.

[0359] In this embodiment, the oxide semiconductor layer 332 which is provided with the oxide insulating layer 366 and is partly exposed is further subjected to heat treatment in a nitrogen atmosphere or an inert gas atmosphere or under a reduced pressure. By the heat treatment in a nitrogen atmosphere or an inert gas atmosphere or under a reduced pressure, the resistance of the exposed region of the oxide semiconductor layer 332, which is not covered by the oxide insulating layer 366 can be reduced. For example, heat treatment is performed at 250 °C in a nitrogen atmosphere for one hour.

[0360] With the heat treatment on the oxide semiconductor layer 332 provided with the oxide insulating layer 366 in a nitrogen atmosphere, the resistance of the exposed region of the oxide semiconductor layer 332 is reduced, so that an oxide semiconductor layer 362 including regions with different resistances (indicated as a shaded region and a white region in FIG. 12B) is formed.

[0361] Next, a conductive film is formed over the gate insulating layer 322, the oxide semiconductor layer 362, and the oxide insulating layer 366. After that, a resist mask is formed by a fourth photolithography step, and selective etching is performed thereon, so that a source electrode layer 365a and a drain electrode layer 365b are formed. After that, the resist mask is removed (see FIG. 12C).

[0362] The source electrode layer 365a and the drain electrode layer 365b each are formed by an element selected from Al, Cr, Cu, Ta, Ti, Mo, and W, an alloy including any of the above elements as its component, an alloy film including a combination of any of these elements, or the like can be used. A single layer structure or a stacked-layer structure including two or more layer may be used as the conductive film.

[0363] Through the above process, a part of the oxide

semiconductor film is selectively made to include excessive oxygen. As a result, a channel formation region 363 overlapping the gate electrode layer 361 becomes i-type, and a high-resistance source region 364a which overlaps

5 the source electrode layer 365a and a high-resistance drain region 364b which overlaps the drain electrode layer 365b are formed in a self-aligned manner. Through the above steps, the thin film transistor 360 is formed.

[0364] Furthermore, heat treatment at a temperature 10 higher than or equal to 100 °C and lower than or equal to 200 °C in the air for 1 hour to 30 hours both inclusive may be performed. In this embodiment, heat treatment is performed at 150 °C for 10 hours. This heat treatment may be performed at a fixed heating temperature. Alternatively, the following change in the heating temperature 15 may be conducted plural times repeatedly: the heating temperature is increased from room temperature to a temperature higher than or equal to 100 °C and lower than or equal to 200 °C and then decreased to room

20 temperature. Further, this heat treatment may be performed before the formation of the oxide insulating film under a reduced pressure. Under the reduced pressure, the heat treatment time can be shortened. With this heat treatment, hydrogen is introduced from the oxide semiconductor layer to the oxide insulating layer; thus, a normally-off thin film transistor can be obtained. Therefore, reliability of the liquid crystal display device can be improved.

[0365] The high-resistance drain region 365b (or the 25 high-resistance source region 365a) is formed in a portion of the oxide semiconductor layer which overlaps the drain electrode layer 365b (or the source electrode layer 365a), so that the reliability of the thin film transistor can be increased. Specifically, with the formation of the high-resistance drain region 364b, the conductivity can be gradually varied from the drain electrode layer 365b to the high-resistance drain region 364b and the channel formation region 363 in the transistor. Therefore, in the case where the thin film transistor operates using the

35 drain electrode layer 365b connected to a wiring for supplying a high power supply potential VDD, the high-resistance drain region serves as a buffer and a high electric field is not applied locally even if a high electric field is applied between the gate electrode layer 361 and the 40 drain electrode layer 365b, so that the withstand voltage of the transistor can be improved.

[0366] A protective insulating layer 323 is formed over the source electrode layer 365a, the drain electrode layer 365b, and the oxide insulating layer 366. In this embodiment, the protective insulating layer 323 is formed using a silicon nitride film (see FIG. 12D).

[0367] An oxide insulating layer may be formed over the source electrode layer 365a, the drain electrode layer 365b, and the oxide insulating layer 366, and the protective insulating layer 323 may be stacked over the oxide insulating layer.

[0368] The off-state current can be reduced in each of a plurality of pixels of a display portion of a liquid crystal

display device using the thin film transistor using an oxide semiconductor layer as described above. Therefore, a period for holding voltage in a storage capacitor can be extended, and the power consumption when a still image or the like is displayed in the liquid crystal display device can be decreased. Further, by stopping supplying a control signal in the case where a still image is displayed, power consumption can be further decreased. In addition, a still image and a moving image can be switched without malfunction.

[0369] Embodiment 7 can be implemented in appropriate combination with any of the structures described in the other embodiments.

(Embodiment 8)

[0370] In Embodiment 8, another example of a thin film transistor which can be applied to a liquid crystal display device disclosed in this specification will be described. A thin film transistor 350 described in this embodiment can be used as a thin film transistor in each pixel of the pixel portion 1008 described in Embodiment 1.

[0371] A thin film transistor of this embodiment and an embodiment of a method for manufacturing the thin film transistor are described using FIGS. 13A to 13D.

[0372] Although the thin film transistor 350 is described using a single-gate thin film transistor, a multi-gate thin film transistor including a plurality of channel formation regions can be formed as necessary.

[0373] Hereinafter, a process for manufacturing the thin film transistor 350 over a substrate 340 is described using FIGS. 13A to 13D.

[0374] First, a conductive film is formed over the substrate 340 having an insulating surface, and a first photolithography step is performed, so that a gate electrode layer 351 is formed. In this embodiment, a 150-nm-thick tungsten film is formed by a sputtering method as the gate electrode layer 351.

[0375] Next, a gate insulating layer 342 is formed over the gate electrode layer 351. In this embodiment, a silicon oxynitride layer having a thickness of 100 nm or less is formed by a plasma CVD method as the gate insulating layer 342.

[0376] Next, a conductive film is formed over the gate insulating layer 342, and a resist mask is formed over the conductive film by a second photolithography step, and selective etching is performed thereon, so that a source electrode layer 355a and a drain electrode layer 355b are formed. After that, the resist mask is removed (see FIG. 13A).

[0377] Next, an oxide semiconductor film 345 is formed (see FIG. 13B). In this embodiment, the oxide semiconductor film 345 is formed by a sputtering method using an In-Ga-Zn-O-based oxide semiconductor target. The oxide semiconductor film 345 is processed into an island-shaped oxide semiconductor layer by a third photolithography step.

[0378] In that case, it is preferable to remove residual

moisture in the chamber in the deposition of the oxide semiconductor film 345. This is in order to prevent the oxide semiconductor layer 345 from containing hydrogen, a hydroxyl group, or moisture.

[0379] In order to remove residual moisture from the chamber, an adsorption-type vacuum pump is preferably used. For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. As an exhaustion unit, a turbo molecular pump to which a cold trap is added may be used. In the chamber in which exhaustion is performed with the use of a cryopump, a hydrogen molecule, a compound including a hydrogen atom such as water (H_2O), or the like, for example, is exhausted. Accordingly, the concentration of impurities included in the oxide insulating layer 345 formed in the chamber can be reduced.

[0380] It is preferable that a high-purity gas in which an impurity such as hydrogen, water, a hydroxyl group, or hydride is removed to 1 ppm or less, preferably 10 ppb or less be used as the sputtering gas for the deposition of the oxide insulating layer 345.

[0381] Next, dehydration and/or dehydrogenation of the oxide semiconductor layer are/is performed. The temperature of the first heat treatment for dehydration and/or dehydrogenation is higher than or equal to 400 °C and lower than or equal to 750 °C, preferably higher than or equal to 400 °C and lower than the stain point of the substrate. In this embodiment, the substrate is put in an electric furnace which is a kind of heat treatment apparatus and heat treatment is performed on the oxide semiconductor layer at 450 °C for one hour in a nitrogen atmosphere, and then, water or hydrogen is prevented from entering the oxide semiconductor layer, without exposure to the air; thus, an oxide semiconductor layer 346 is obtained (see FIG. 13C).

[0382] For example, as the first heat treatment, GRTA may be performed as follows: the substrate is transferred into an inert gas heated to a high temperature of 650 °C to 700 °C, heated for several minutes, and transferred and taken out of the inert gas heated to the high temperature. GRTA enables a high-temperature heat treatment for a short time.

[0383] Next, an oxide insulating layer 356 serving as a protective insulating film which is in contact with the oxide semiconductor layer 346 is formed.

[0384] The oxide insulating layer 356 can be formed to a thickness at least 1 nm by a method by which an impurity such as water or hydrogen does not enter the oxide insulating layer 356, such as a sputtering method as appropriate. When hydrogen is contained in the oxide insulating layer 356, entry of the hydrogen to the oxide semiconductor layer or extraction of oxygen in the oxide semiconductor layer by hydrogen may be caused, thereby making the backchannel of the oxide semiconductor layer n-type (making the resistance thereof low), so that a parasitic channel may be formed. Therefore, it is important that a formation method in which hydrogen is used as little as possible is employed such that the oxide

insulating layer 356 contains hydrogen as little as possible.

[0385] In this embodiment, a 200-nm-thick silicon oxide film is deposited as the oxide insulating layer 356 by a sputtering method. The substrate temperature at the time of film deposition may be higher than or equal to room temperature and lower than or equal to 300 °C and in this embodiment, is 100 °C. The silicon oxide film can be formed with a sputtering method in a rare gas (typically argon) atmosphere, an oxygen atmosphere, or a mixed atmosphere containing a rare gas and oxygen. As a target, a silicon oxide target or a silicon target may be used. For example, with the use of a silicon target, silicon oxide can be deposited by a sputtering method under an atmosphere of oxygen and nitrogen. As the oxide insulating layer 356 which is formed in contact with the oxide semiconductor layer, an inorganic insulating film which does not include impurities such as moisture, a hydrogen ion, and OH⁻ and blocks entry of these from the outside is used. Typically, a silicon oxide film, a silicon oxynitride film, an aluminum oxide film, an aluminum oxynitride film, or the like is used.

[0386] In that case, it is preferable to remove residual moisture in the chamber in the deposition of the oxide insulating layer 356. This is in order to prevent the oxide semiconductor layer 346 and the oxide insulating layer 356 from containing hydrogen, a hydroxyl group, or moisture.

[0387] In order to remove residual moisture from the chamber, an adsorption-type vacuum pump is preferably used. For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. As an exhaustion unit, a turbo molecular pump to which a cold trap is added may be used. In the chamber in which exhaustion is performed with the use of a cryopump, a hydrogen molecule, a compound including a hydrogen atom such as water (H₂O), or the like, for example, is exhausted. Accordingly, the concentration of impurities included in the oxide insulating layer 356 formed in the chamber can be reduced.

[0388] It is preferable that a high-purity gas in which an impurity such as hydrogen, water, a hydroxyl group, or hydride is removed to 1 ppm or less, preferably 10 ppb or less be used as the sputtering gas for the deposition of the oxide insulating layer 356.

[0389] Next, a second heat treatment (preferably at a temperature higher than or equal to 200 °C and lower than or equal to 400 °C, for example, at a temperature higher than or equal to 250 °C and lower than or equal to 350 °C) is performed in an inert gas atmosphere or an oxygen gas atmosphere. For example, the second heat treatment is performed at 250 °C for one hour in a nitrogen atmosphere. With the second heat treatment, heat is applied on the state where part of the oxide semiconductor layer (the channel formation region) is in contact with the oxide insulating layer 356.

[0390] Through the above process, the oxide semiconductor film is selectively made to include excessive oxy-

gen. As a result, an i-type oxide semiconductor layer 352 is formed. Through the above steps, the thin film transistor 350 is formed.

[0391] Furthermore, heat treatment at a temperature higher than or equal to 100 °C and lower than or equal to 200 °C in the air for 1 hour to 30 hours both inclusive may be performed. In this embodiment, heat treatment is performed at 150 °C for 10 hours. This heat treatment may be performed at a fixed heating temperature. Alternatively, the following change in the heating temperature may be conducted plural times repeatedly: the heating temperature is increased from room temperature to a temperature higher than or equal to 100 °C and lower than or equal to 200 °C and then decreased to room temperature. Further, this heat treatment may be performed before the formation of the oxide insulating film under a reduced pressure. Under the reduced pressure, the heat treatment time can be shortened. With this heat treatment, hydrogen is introduced from the oxide semiconductor layer to the oxide insulating layer; thus, a normally-off thin film transistor can be obtained. Therefore, reliability of the liquid crystal display device can be improved.

[0392] A protective insulating layer may be formed over the oxide insulating layer 356. For example, a silicon nitride film is formed by an RF sputtering method. In this embodiment, a protective insulating layer 343 is formed using a silicon nitride film as the protective insulating layer (see FIG. 13D).

[0393] A planarization insulating layer for planarization may be provided over the protective insulating layer 343.

[0394] The off-state current can be reduced in the thin film transistor using an oxide semiconductor layer, manufactured as described above. Therefore, by using the thin film transistor in each of a plurality of pixels of a display portion of a liquid crystal display device, a period for holding voltage in a storage capacitor can be extended, and the power consumption when a still image or the like is displayed in the liquid crystal display device can be decreased. Further, by stopping supplying a control signal in the case where a still image is displayed, power consumption can be further decreased. In addition, a still image and a moving image can be switched without malfunction.

[0395] Embodiment 8 can be implemented in appropriate combination with any of the structures described in the other embodiments.

(Embodiment 9)

[0396] In Embodiment 9, an example which is different from Embodiment 6 in the manufacturing process of a thin film transistor will be described using FIG. 14. Since FIG. 14 is the same as FIGS. 11A to 11E except for part of the steps, the same reference numerals are used for the same portions, and detailed description of the same portions is not repeated.

[0397] In Embodiment 9, another example of a thin film

transistor which can be applied to a liquid crystal display device disclosed in this specification will be described. A thin film transistor 380 described in this embodiment can be used as a thin film transistor in each pixel of the pixel portion 1008 described in Embodiment 1.

[0398] In accordance with Embodiment 6, a gate electrode layer 381 is formed over a substrate 370, and a first gate insulating layer 372a and a second gate insulating layer 372b are stacked. In this embodiment, a gate insulating layer has a two-layer structure, in which a nitride insulating layer is used as the first gate insulating layer 372a and an oxide insulating layer is used as the second gate insulating layer 372b.

[0399] As the oxide insulating layer, a silicon oxide layer, a silicon oxynitride layer, an aluminum oxide layer, an aluminum oxynitride layer, or the like can be used. As the nitride insulating layer, a silicon nitride layer, a silicon nitride oxide layer, an aluminum nitride layer, an aluminum nitride oxide layer, or the like can be used.

[0400] In this embodiment, the gate insulating layer has a structure in which a silicon nitride layer and a silicon oxide layer are stacked over the gate electrode layer 381. For example, a 150-nm-thick gate insulating layer is formed in such a manner that a silicon nitride layer (SiN_y ($y > 0$)) having a thickness of greater than or equal to 50 nm and less than or equal to 200 nm (50 nm in this embodiment) is formed by a sputtering method as the first gate insulating layer 372a and then a silicon oxide layer (SiO_x ($x > 0$)) having a thickness of greater than or equal to 5 nm and less than or equal to 300 nm (100 nm in this embodiment) is stacked as the second gate insulating layer 372b over the first gate insulating layer 372a.

[0401] Next, an oxide semiconductor film is formed and is processed into an island-shaped oxide semiconductor layer by a photolithography step. In this embodiment, the oxide semiconductor film is formed by a sputtering method using an In-Ga-Zn-O-based oxide semiconductor target.

[0402] In that case, it is preferable to remove residual moisture in the chamber in the deposition of the oxide semiconductor film. This is in order to prevent the oxide semiconductor film from containing hydrogen, a hydroxyl group, or moisture.

[0403] In order to remove residual moisture from the chamber, an adsorption-type vacuum pump is preferably used. For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. As an exhaustion unit, a turbo molecular pump to which a cold trap is added may be used. In the chamber in which exhaustion is performed with the use of a cryopump, a hydrogen molecule, a compound including a hydrogen atom such as water (H_2O), or the like, for example, is exhausted. Accordingly, the concentration of impurities included in the oxide insulating film formed in the chamber can be reduced.

[0404] It is preferable that a high-purity gas in which an impurity such as hydrogen, water, a hydroxyl group, or hydride is removed to 1 ppm or less, preferably 10 ppb

or less be used as the sputtering gas for the deposition of the oxide insulating film.

[0405] Next, dehydration and/or dehydrogenation of the oxide semiconductor layer are/is performed. The temperature of the first heat treatment for dehydration and/or dehydrogenation is higher than or equal to 400 °C and lower than or equal to 750 °C, preferably higher than or equal to 425 °C. The heat treatment time is one hour or shorter at a temperature of higher than or equal to 425 °C and is longer than one hour at a temperature of lower than 425 °C. In this embodiment, the substrate is put in an electric furnace which is a kind of heat treatment apparatus and heat treatment is performed on the oxide semiconductor layer in a nitrogen atmosphere, and then, water or hydrogen is prevented from entering the oxide semiconductor layer, without exposure to the air; thus, an oxide semiconductor layer is obtained. After that, cooling is performed by introduction of a high-purity oxygen gas, a high-purity N_2O gas, or ultra-dry air (having a dew point of -40 °C or lower, preferably -60 °C or lower) into the same furnace. It is preferable that the oxygen gas or the N_2O gas do not contain water, hydrogen, or the like. Alternatively, the purity of an oxygen gas or an N_2O gas which is introduced into the heat treatment apparatus is preferably 6N (99.9999 %) or higher, far preferably 7N (99.99999 %) or higher (that is, the impurity concentration of the oxygen gas or the N_2O gas is 1 ppm or lower, preferably 0.1 ppm or lower).

[0406] The heat treatment apparatus is not limited to an electric furnace. For example, an RTA (rapid thermal annealing) apparatus such as a GRTA (gas rapid thermal annealing) apparatus or an LRTA (lamp rapid thermal annealing) apparatus can be used. The LRTA apparatus is an apparatus for heating an object to be processed by radiation of light (an electromagnetic wave) emitted from a lamp such as a halogen lamp, a metal halide lamp, a xenon arc lamp, a carbon arc lamp, a high pressure sodium lamp, or a high pressure mercury lamp. The LRTA apparatus may be provided with not only a lamp but also a device that heats an object to be processed by thermal conduction or thermal radiation from a heater such as a resistance heater or the like. The GRTA is a method for heat treatment using a high-temperature gas. As the gas, an inert gas which does not react with the object to be processed, by heat treatment, such as nitrogen or a rare gas such as argon is used. The heat treatment may be performed at 600 °C to 750 °C for several minutes by an RTA method.

[0407] After the first heat treatment for dehydration and/or dehydrogenation, heat treatment may be performed at a temperature higher than or equal to 200 °C and lower than or equal to 400 °C, preferably higher than or equal to 200 °C and lower than or equal to 300 °C, in an oxygen gas atmosphere or a N_2O gas atmosphere.

[0408] The first heat treatment of the oxide semiconductor layer can also be performed on the oxide semiconductor film before being processed into the island-like oxide semiconductor layer. In that case, the substrate

is taken out from the heat apparatus after the first heat treatment, and then a photolithography step is performed thereon.

[0409] The entire oxide semiconductor film is made to contain an excess amount of oxygen through the above steps, whereby the oxide semiconductor film has higher resistance, that is, becomes i-type. Accordingly, an oxide semiconductor layer 382 whose entire region is i-type is formed.

[0410] Next, a resist mask is formed by a photolithography step over the oxide semiconductor layer 382, and is selectively etched to form a source electrode layer 385a and a drain electrode layer 385b, and then, an oxide insulating layer 386 is formed by a sputtering method.

[0411] In that case, it is preferable to remove residual moisture in the chamber in the deposition of the oxide insulating layer 386. This is in order to prevent the oxide semiconductor layer 382 and the oxide insulating layer 386 from containing hydrogen, a hydroxyl group, and/or moisture.

[0412] In order to remove the residual moisture in the chamber, it is preferable to use an adsorption-type vacuum pump. For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. As an exhaustion unit, a turbo molecular pump to which a cold trap is added may be used. In the chamber in which exhaustion is performed using a cryopump, a hydrogen molecule, a compound including a hydrogen atom such as water (H_2O), or the like is exhausted. Accordingly, the concentration of impurities included in the oxide insulating layer 386 formed in the chamber can be reduced.

[0413] It is preferable that a high-purity gas in which an impurity such as hydrogen, water, a hydroxyl group, or hydride is removed to 1 ppm or less, preferably 10 ppb or less be used as the sputtering gas for the deposition of the oxide insulating layer 386.

[0414] Through the above steps, the thin film transistor 380 can be manufactured.

[0415] Next, heat treatment (preferably at a temperature higher than or equal to 150 °C and lower than 350 °C) may be performed in an inert gas atmosphere or a nitrogen gas atmosphere in order to suppress variation of electrical characteristics of the thin film transistor. For example, heat treatment is performed at 250 °C for one hour in a nitrogen atmosphere.

[0416] Furthermore, heat treatment at a temperature higher than or equal to 100 °C and lower than or equal to 200 °C in the air for 1 hour to 30 hours both inclusive may be performed. In this embodiment, heat treatment is performed at 150 °C for 10 hours. This heat treatment may be performed at a fixed heating temperature. Alternatively, the following change in the heating temperature may be conducted plural times repeatedly: the heating temperature is increased from room temperature to a temperature higher than or equal to 100 °C and lower than or equal to 200 °C and then decreased to room temperature. Further, this heat treatment may be performed before the formation of the oxide insulating film

under a reduced pressure. Under the reduced pressure, the heat treatment time can be shortened. With this heat treatment, hydrogen is introduced from the oxide semiconductor layer to the oxide insulating layer; thus, a normally-off thin film transistor can be obtained. Therefore, reliability of the liquid crystal display device can be improved.

[0417] A protective insulating layer 373 is formed over the oxide insulating layer 386. In this embodiment, a 100-nm-thick silicon nitride film is formed as the protective insulating layer 373 by a sputtering method.

[0418] The protective insulating layer 373 and the first gate insulating layer 372a, which are nitride insulating layers, do not contain impurities such as moisture, hydrogen, hydride, or hydroxide and blocks them from entering from the outside.

[0419] Therefore, in the manufacturing process after the formation of the protective insulating layer 373, entry of impurities such as moisture from the outside can be prevented. Further, even after a device is completed as a semiconductor device such as a liquid crystal display device, entry of impurities such as moisture from the outside can be prevented in the long term; therefore, long-term reliability of the device can be improved.

[0420] The insulating layers provided between the protective insulating layer 373 which is a nitride insulating layer and the first gate insulating layer 372a may be removed to make the protective insulating layer 373 in contact with the first gate insulating layer 372a.

[0421] Accordingly, impurities such as moisture, hydrogen, hydride, or hydroxide in the oxide semiconductor layer can be reduced and entry thereof is prevented, so that the concentration of impurities in the oxide semiconductor layer can be kept to be low.

[0422] A planarization insulating layer for planarization may be provided over the protective insulating layer 373.

[0423] The off-state current can be reduced in each of a plurality of pixels of a display portion of a liquid crystal display device using the thin film transistor using an oxide semiconductor layer as described above. Therefore, a period for holding voltage in a storage capacitor can be extended, and the power consumption when a still image or the like is displayed in the liquid crystal display device can be decreased. Further, by stopping supplying a control signal in the case where a still image is displayed, power consumption can be further decreased. In addition, a still image and a moving image can be switched without malfunction.

[0424] Embodiment 9 can be implemented in appropriate combination with any of the structures described in the other embodiments.

(Embodiment 10)

[0425] In Embodiment 10, another example of a thin film transistor which can be applied to a liquid crystal display device disclosed in this specification will be described. A thin film transistor described in this embodi-

ment can be used as the thin film transistor in any of Embodiments 2 to 8, which can be used as the thin film transistor 105 in Embodiment 1.

[0426] In Embodiment 10, an example of using a conductive material having a light-transmitting property as any of a gate electrode layer, a source electrode layer, and a drain electrode layer will be described. Note that the above embodiment can be applied to the same portions and the portions and steps having similar functions as/to the above embodiment, and description thereof is not repeated. Further, a specific description for the same portions is omitted.

[0427] As a material of any of a gate electrode layer, a source electrode layer, and a drain electrode layer, a conductive material that transmits visible light can be used. For example, any of the following metal oxides can be used: an In-Sn-O-based metal oxide; an In-Sn-Zn-O-based metal oxide; an In-Al-Zn-O-based metal oxide; a Sn-Ga-Zn-O-based metal oxide; an Al-Ga-Zn-O-based metal oxide; a Sn-Al-Zn-O-based metal oxide; an In-Zn-O-based metal oxide; a Sn-Zn-O-based metal oxide; an Al-Zn-O-based metal oxide; an In-O-based metal oxide; a Sn-O-based metal oxide; and a Zn-O-based metal oxide. The thickness thereof is set in the range of greater than or equal to 50 nm and less than or equal to 300 nm as appropriate. As a deposition method of the metal oxide used for any of the gate electrode layer, the source electrode layer, and the drain electrode layer, a sputtering method, a vacuum evaporation method (an electron beam evaporation method or the like), an arc discharge ion plating method, or a spray method is used. In the case where a sputtering method is employed, it is preferable that deposition be performed using a target containing SiO_2 at 2 wt% to 10 wt% both inclusive and SiO_x ($x > 0$) which inhibits crystallization be contained in the light-transmitting conductive film so as to prevent crystallization at the time of the heat treatment in a later step.

[0428] Note that the unit of the percentage of components in the light-transmitting conductive film is atomic percent, and the percentage of components is evaluated by analysis using an electron probe X-ray microanalyzer (EPMA).

[0429] In a pixel provided with a thin film transistor, when a pixel electrode layer, another electrode layer (such as a capacitor electrode layer), or a wiring layer (such as a capacitor wiring layer) is formed using a conductive film that transmits visible light, a display device having high aperture ratio can be realized. Needless to say, it is preferable that a gate insulating layer, an oxide insulating layer, a protective insulating layer, and a planarization insulating layer in the pixel be also each formed using a film that transmits visible light.

[0430] In this specification, a film that transmits visible light means a film having such a thickness as to have transmittance of visible light of 75 % to 100 %. In the case where the film has conductivity, the film is also referred to as a transparent conductive film. Further, a conductive film which is semi-transmissive with respect to visible

light may be used as metal oxide applied to the gate electrode layer, the source electrode layer, the drain electrode layer, the pixel electrode layer, another electrode layer, or another wiring layer. The conductive film which is semi-transmissive with respect to visible light indicates a film having transmittance of visible light of 50 % to 75 %.

[0431] When a thin film transistor has a light-transmitting property, the aperture ratio can be increased. For small liquid crystal display panels of 10 inches or smaller in particular, a high aperture ratio can be achieved even when the size of pixels is decreased in order to realize higher resolution of display images by increasing the number of gate wirings, for example. Further, by using a film having a light-transmitting property for components of a thin film transistor, a high aperture ratio can be achieved even when one pixel is divided into a plurality of sub-pixels in order to realize a wide viewing angle. That is, a high aperture ratio can be maintained even when a group of high-density thin film transistors is provided, so that a sufficient area of a display region can be secured. For example, in the case where one pixel includes two to four sub-pixels, an aperture ratio can be improved because the thin film transistor has a light-transmitting property. Further, a storage capacitor may be formed using the same material by the same step as the component in the thin film transistor so that the storage capacitor can have a light-transmitting property, whereby the aperture ratio can be further improved.

[0432] Embodiment 10 can be implemented in appropriate combination with any of the structures described in the other embodiments.

(Embodiment 11)

[0433] The appearance and the cross section of a liquid crystal display panel, which is an embodiment of a liquid crystal display device, are described with reference to FIGS. 15A to 15C. FIGS. 15A and 15C are each a top view of a panel in which thin film transistors 4010 and 4011 and a liquid crystal element 4013, which are formed over a first substrate 4001, are sealed between the first substrate 4001 and a second substrate 4006 with a sealant 4505. FIG. 15B corresponds to a cross-sectional view of FIG. 15A or 15C along line M-N.

[0434] The sealant 4005 is provided so as to surround a pixel portion 4002 and a scan line driver circuit 4004 which are provided over the first substrate 4001. The second substrate 4006 is provided over the pixel portion 4002 and the scan line driver circuit 4004. Therefore, the pixel portion 4002 and the scan line driver circuit 4004 are sealed together with a liquid crystal layer 4008, by the first substrate 4001, the sealant 4005, and the second substrate 4006. A signal line driver circuit 4003 that is formed using a single crystal semiconductor film or a polycrystalline semiconductor film over a substrate separately prepared is mounted in a region that is different from the region surrounded by the sealant 4005 over the first substrate 4001.

[0435] Note that a connection method of a driver circuit which is separately formed is not particularly limited; a COG method, a wire bonding method, a TAB method, or the like can be used. FIG. 15A illustrates an example of mounting the signal line driver circuit 4003 by a COG method, and FIG. 15C illustrates an example of mounting the signal line driver circuit 4003 by a TAB method.

[0436] Further, the pixel portion 4002 and the scan line driver circuit 4004 provided over the first substrate 4001 each include a plurality of thin film transistors. FIG. 15B illustrates the thin film transistor 4010 included in the pixel portion 4002 and the thin film transistor 4011 included in the scan line driver circuit 4004. Over the thin film transistors 4010 and 4011, insulating layers 4041, 4042, 4020, and 4021 are provided.

[0437] Any one of the thin film transistors described in Embodiments 2 to 9 can be used as each of the thin film transistors 4010 and 4011 as appropriate, and can be formed using a similar process and a similar material. In the oxide semiconductor layer of each of the thin film transistors 4010 and 4011, hydrogen or water is reduced. Thus, the thin film transistors 4010 and 4011 have high reliability. In this embodiment, the thin film transistors 4010 and 4011 are n-channel thin film transistors.

[0438] A conductive layer 4040 is provided over part of the insulating layer 4021, which overlaps a channel formation region of the oxide semiconductor layer in the thin film transistor 4011 for the drive circuit. The conductive layer 4040 is provided at the position overlapping the channel formation region of the oxide semiconductor layer, whereby the amount of change in the threshold voltage of the thin film transistor 4011 by a BT test can be reduced. A potential of the conductive layer 4040 may be the same as or different from that of a gate electrode layer of the thin film transistor 4011. The conductive layer 4040 can also function as a second gate electrode layer. In addition, the potential of the conductive layer 4040 may be GND or 0 V, or the conductive layer 4040 may be in a floating state.

[0439] A pixel electrode layer 4030 included in the liquid crystal element 4013 is electrically connected to a source electrode layer or a drain electrode layer of the thin film transistor 4010. A counter electrode layer 4031 of the liquid crystal element 4013 is provided on the second substrate 4006. A portion where the pixel electrode layer 4030, the counter electrode layer 4031, and the liquid crystal layer 4008 overlap each other corresponds to the liquid crystal element 4013. Note that the pixel electrode layer 4030 and the counter electrode layer 4031 are provided with an insulating layer 4032 and an insulating layer 4033 respectively which each function as an alignment film, and the liquid crystal layer 4008 is sandwiched between the pixel electrode layer 4030 and the counter electrode layer 4031 with the insulating layers 4032 and 4033 interposed therebetween.

[0440] As each of the first substrate 4001 and the second substrate 4006, a light-transmitting substrate can be used; glass, ceramic, or plastic can be used. As plastic,

a fiberglass-reinforced plastic (FRP) plate, a polyvinyl fluoride (PVF) film, a polyester film, or an acrylic resin film can be used.

[0441] A spacer 4035 is a columnar spacer obtained by selective etching of an insulating film and is provided in order to control the distance (a cell gap) between the pixel electrode layer 4030 and the counter electrode layer 4031. Alternatively, a spherical spacer may be used. In addition, the counter electrode layer 4031 is electrically connected to a common potential line formed over the same substrate as the thin film transistor 4010. With the use of a common connection portion, the counter electrode layer 4031 and the common potential line can be electrically connected to each other by conductive particles arranged between a pair of substrates. The conductive particles are included in the sealant 4005.

[0442] As the liquid crystal, a thermotropic liquid crystal, a low-molecular liquid crystal, a high-molecular liquid crystal, a polymer-dispersed liquid crystal, a ferroelectric liquid crystal, an anti-ferroelectric liquid crystal, or the like is used. Such a liquid crystal material exhibits a cholesteric phase, a smectic phase, a cubic phase, a chiral nematic phase, an isotropic phase, or the like depending on conditions.

[0443] Alternatively, liquid crystal exhibiting a blue phase for which an alignment film is unnecessary may be used. A blue phase is one of liquid crystal phases, which is generated just before a cholesteric phase changes into an isotropic phase while temperature of cholesteric liquid crystal is increased. Since the blue phase is only generated within a narrow range of temperatures, a liquid crystal composition containing a chiral agent at greater than or equal to 5 wt% is used for the liquid crystal layer 4008 in order to widen the temperature range. The liquid crystal composition which includes a liquid crystal exhibiting a blue phase and a chiral agent has a short response time of less than or equal to 1 msec, has optical isotropy, which makes the alignment process unneeded, and has a small viewing angle dependence. An alignment film does not need to be provided and rubbing treatment is thus not necessary; accordingly, electrostatic discharge damage caused by the rubbing treatment can be prevented and defects and damage of the liquid crystal display device in the manufacturing process can be reduced. Thus, productivity of the liquid crystal display device can be improved. A thin film transistor including an oxide semiconductor layer particularly has a possibility that electrical characteristics of the thin film transistor may significantly change and deviate from the designed range by the influence of static electricity. Therefore, it is more effective to use a blue phase liquid crystal material for a liquid crystal display device having a thin film transistor including an oxide semiconductor layer.

[0444] The specific resistance of the liquid crystal material in this embodiment is $1 \times 10^{12} \Omega \cdot \text{cm}$ or more, preferably $1 \times 10^{13} \Omega \cdot \text{cm}$ or more, far preferably $1 \times 10^{14} \Omega \cdot \text{cm}$ or more. The resistance in the case where a liquid crystal cell using the liquid crystal material is 1×10^{11}

$\Omega\cdot\text{cm}$ or more, in which an impurity from the alignment film or the sealant may enter, and is preferably over $1 \times 10^{12} \Omega\cdot\text{cm}$. The value of the specific resistance in this specification is measured at 20 °C.

[0445] As the specific resistance of the liquid crystal material increases, the amount of charge which leaks through the liquid crystal material can be decreased, so that a decrease over time of a voltage for holding the operation state of the liquid crystal element can be suppressed. As a result, the holding period can be extended, the frequency of signal writing can be decreased, and low power consumption of the display device can be achieved.

[0446] This embodiment of the present invention can also be applied to either a semi-transmissive (transflective) or reflective liquid crystal display device as well as a transmissive liquid crystal display device. The display device of this embodiment is not limited to a liquid crystal display device, and may be an EL display device using a light-emitting element such as an electroluminescent element (also called an EL element) as a display element.

[0447] An example of the liquid crystal display device is illustrated in which a polarizing plate is provided on the outer surface of the substrate (on the viewer side) and a coloring layer and an electrode layer used for a display element are provided on the inner surface of the substrate in this order; however, the polarizing plate may be provided on the inner surface of the substrate. The stacked-layer structure of the polarizing plate and the coloring layer is not limited to that described in this embodiment and may be set as appropriate depending on materials of the polarizing plate and the coloring layer or conditions of the manufacturing process. Further, a light blocking film serving as a black matrix may be provided in a region other than a display portion.

[0448] Over the thin film transistors 4011 and 4010, the insulating layer 4041 is formed in contact with the oxide semiconductor layers. The insulating layer 4041 may be formed using a similar material by a similar method to the oxide insulating layer 416 described in Embodiment 2. In this embodiment, as the insulating layer 4041, a silicon oxide layer is formed by a sputtering method, using Embodiment 2. Further, the protective insulating layer 4042 is formed on and in contact with the insulating layer 4041. The protective insulating layer 4042 may be formed in a similar manner to the protective insulating layer 403 described in Embodiment 2; for example, a silicon nitride film can be used. In addition, in order to reduce the surface roughness of the thin film transistors, the protective insulating layer 4042 is covered with the insulating layer 4021 functioning as a planarization insulating film.

[0449] The insulating layer 4021 is formed as the planarization insulating film. As the insulating layer 4021, an organic material having heat resistance such as polyimide, acrylic, benzocyclobutene, polyamide, or epoxy can be used. Other than such organic materials, it is also possible to use a low-dielectric constant material (a low-

k material), a siloxane-based resin, phosphosilicate glass (PSG), borophosphosilicate glass (BPSG), or the like. The insulating layer 4021 may be formed by stacking a plurality of insulating films formed using these materials.

[0450] There is no particular limitation on the method for forming the insulating layer 4021. The insulating layer 4021 can be formed, depending on the material, by a method such as a sputtering method, an SOG method, a spin coating method, a dipping method, a spray coating method, or a droplet discharge method (e.g., an ink-jet method, screen printing, or offset printing), or a tool (equipment) such as a doctor knife, a roll coater, a curtain coater, or a knife coater. The baking step of the insulating layer 4021 also serves as annealing of the semiconductor layer, whereby a liquid crystal display device can be manufactured efficiently.

[0451] The pixel electrode layer 4030 and the counter electrode layer 4031 can be formed using a light transmitting conductive material, such as indium tin oxide (ITO), indium zinc oxide (IZO) in which zinc oxide (ZnO) is mixed in indium oxide, a conductive material in which silicon oxide (SiO_2) is mixed in indium oxide, organoindium, organotin, indium oxide containing tungsten oxide, indium zinc oxide containing tungsten oxide, indium oxide containing titanium oxide, or indium tin oxide containing titanium oxide. Alternatively, in the case where a light transmitting property is not needed or a reflective property is needed for the pixel electrode layer 4030 or the counter electrode layer 4031 in a reflective liquid crystal display device, the pixel electrode layer 4030 or the counter electrode layer 4031 can be formed using one kind or plural kinds selected from metal such as tungsten (W), molybdenum (Mo), zirconium (Zr), hafnium (Hf), vanadium (V), niobium (Nb), tantalum (Ta), chromium (Cr), cobalt (Co), nickel (Ni), titanium (Ti), platinum (Pt), aluminum (Al), copper (Cu), or silver (Ag), an alloy thereof, and a nitride thereof.

[0452] A conductive composition containing a conductive high molecule (also referred to as a conductive polymer) can be used for the pixel electrode layer 4030 and the counter electrode layer 4031. The pixel electrode formed using the conductive composition preferably has a sheet resistance of 10000 ohms per square or less and a transmittance of 70 % or more at a wavelength of 550 nm. Further, the resistivity of the conductive high molecule contained in the conductive composition is preferably 0.1 $\Omega\cdot\text{cm}$ or less.

[0453] As the conductive high molecule, a so-called π -electron conjugated conductive polymer can be used. For example, polyaniline or a derivative thereof, polypyrrrole or a derivative thereof, polythiophene or a derivative thereof, a copolymer of two or more kinds of them, and the like can be given.

[0454] Furthermore, a variety of signals and potentials are supplied to the signal line driver circuit 4003 which is formed separately, the scan line driver circuit 4004, or the pixel portion 4002 from an FPC 4018.

[0455] A connection terminal electrode 4015 is formed from the same conductive film as the pixel electrode layer 4030 included in the liquid crystal element 4013, and a terminal electrode 4016 is formed from the same conductive film as the source and drain electrode layers of the thin film transistors 4010 and 4011.

[0456] The connection terminal electrode 4015 is electrically connected to a terminal included in the FPC 4018 via an anisotropic conductive film 4019.

[0457] FIGS. 15A to 15C illustrate an example in which the signal line driver circuit 4003 is formed separately and mounted on the first substrate 4001; however, this embodiment is not limited to this structure. The scan line driver circuit may be separately formed and then mounted, or only part of the signal line driver circuit or part of the scan line driver circuit may be separately formed and then mounted.

[0458] A black matrix (a light blocking layer), an optical member (an optical substrate) such as a polarizing member, a retardation member, or an anti-reflection member, and the like are provided as appropriate. For example, circular polarization may be employed by using a polarizing substrate and a retardation substrate. In addition, a backlight, a sidelight, or the like may be used as a light source.

[0459] In an active matrix liquid crystal display device, display patterns are formed on a screen by driving of pixel electrodes that are arranged in matrix. Specifically, voltage is applied between a selected pixel electrode and a counter electrode corresponding to the pixel electrode, and thus, a liquid crystal layer disposed between the pixel electrode and the counter electrode is optically modulated. This optical modulation is recognized as a display pattern by a viewer.

[0460] Further, since the thin film transistor is easily damaged due to static electricity or the like, a protective circuit is preferably provided over the same substrate as the pixel portion or the driver circuit portion. The protective circuit is preferably formed with a non-linear element including an oxide semiconductor layer. For example, a protective circuit is provided between the pixel portion, and a scan line input terminal and a signal line input terminal. In this embodiment, a plurality of protective circuits is provided so that the pixel transistor and the like are not damaged when surge voltage due to static electricity or the like is applied to the scan line, the signal line, or a capacitor bus line. Accordingly, the protective circuit is configured to release charges to a common wiring when surge voltage is applied to the protective circuit. The protective circuit includes non-linear elements which are arranged in parallel between the common wiring and the scan line, the signal line, or the capacitor bus line. Each of the non-linear elements includes a two-terminal element such as a diode or a three-terminal element such as a transistor. For example, the non-linear element can be formed through the same steps as the thin film transistor of the pixel portion. For example, characteristics similar to those of a diode can be achieved by connecting

a gate terminal to a drain terminal.

[0461] Further, for a liquid crystal display module, a twisted nematic (TN) mode, an in-plane-switching (IPS) mode, a fringe field switching (FFS) mode, an axially symmetric aligned micro-cell (ASM) mode, an optical compensated birefringence (OCB) mode, a ferroelectric liquid crystal (FLC) mode, an antiferroelectric liquid crystal (AFLC) mode, or the like can be used.

[0462] There is no particular limitation on the liquid crystal display device disclosed in this specification; a TN liquid crystal, an OCB liquid crystal, an STN liquid crystal, a VA liquid crystal, an ECB liquid crystal, a GH liquid crystal, a polymer dispersed liquid crystal, a discotic liquid crystal, or the like can be used. In particular, a normally black liquid crystal panel such as a transmissive liquid crystal display device utilizing a vertical alignment (VA) mode is preferable. There are some examples of a vertical alignment mode; for example, a multi-domain vertical alignment (MVA) mode, a patterned vertical alignment (PVA) mode, an ASV mode, or the like can be employed.

[0463] Furthermore, this embodiment can be applied to a VA liquid crystal display device. The VA liquid crystal display device has a kind of form in which alignment of liquid crystal molecules of a liquid crystal display panel is controlled. In the VA liquid crystal display device, liquid crystal molecules are aligned in a vertical direction with respect to a panel surface when no voltage is applied. Furthermore, it is possible to use a method called domain multiplication or multi-domain design, in which a pixel is divided into some regions (subpixels) and molecules are aligned in different directions in their respective regions.

[0464] Embodiment 11 can be implemented in appropriate combination with any of the structures described in the other embodiments.

(Embodiment 12)

[0465] In Embodiment 12, examples of electronic apparatuses including any of the liquid crystal display devices of the embodiments described above will be described.

[0466] FIG. 16A illustrates a portable game machine, which can include a housing 9630, a display portion 9631, a speaker 9633, operation keys 9635, a connection terminal 9636, a recording medium reading portion 9672, and the like. The portable game machine illustrated in FIG. 16A can have a function of reading a program or data stored in a recording medium to display it on the display portion, a function of sharing information with another portable game machine by wireless communication, and the like. The portable game machine illustrated in FIG. 16A can have various functions besides those given above.

[0467] FIG. 16B illustrates a digital camera, which can include a housing 9630, a display portion 9631, a speaker 9633, operation keys 9635, a connection terminal 9636, a shutter button 9676, an image receiving portion 9677,

and the like. The digital camera having a television reception function in FIG. 16B can have a function of photographing a still image and/or a moving image, a function of automatically or manually correcting the photographed image, a function of obtaining various kinds of information from an antenna, a function of storing the photographed image or the information obtained from the antenna, and a function of displaying the photographed image or the information obtained from the antenna on the display portion. The digital camera having the television reception function in FIG. 16B can have various functions besides those given above.

[0468] FIG. 16C illustrates a television set, which can include a housing 9630, a display portion 9631, a speaker 9633, operation keys 9635, a connection terminal 9636, and the like. The television set in FIG. 16C can have a function of processing and converting an electric wave for television into an image signal, a function of processing and converting the image signal into a signal suitable for display, a function of converting a frame frequency of the image signal, and the like. The television set in FIG. 16C can have various functions besides those given above.

[0469] FIG. 17A illustrates a computer, which can include a housing 9630, a display portion 9631, a speaker 9633, operation keys 9635, a connection terminal 9636, a pointing device 9681, an external connection port 9680, and the like. The computer in FIG. 17A can have a function of displaying a variety of information (e.g., a still image, a moving image, and a text image) on the display portion, a function of controlling processing by a variety of software (programs), a communication function such as wireless communication or wired communication, a function of being connected to various computer networks with the communication function, a function of transmitting or receiving a variety of data with the communication function, and the like. The computer illustrated in FIG. 17A can have various functions besides those given above.

[0470] FIG. 17B illustrates a mobile phone, which can include a housing 9630, a display portion 9631, a speaker 9633, operation keys 9635, a microphone 9638, and the like. The mobile phone in FIG. 17B can have a function of displaying a variety of information (e.g., a still image, a moving image, and a text image) on the display portion, a function of displaying a calendar, a date, the time, or the like on the display portion, a function of operating or editing the information displayed on the display portion, a function of controlling processing by various kinds of software (programs), and the like. The mobile phone in FIG. 17B can have various functions besides those given above.

[0471] FIG. 17C illustrates electronic paper (also referred to as an e-book), which can include a housing 9630, a display portion 9631, operation key 9635, and the like. The electronic paper in FIG. 17C can have a function of displaying a variety of information (e.g., a still image, a moving image, and a text image) on the display

portion, a function of displaying a calendar, a date, the time, and the like on the display portion, a function of operating or editing the information displayed on the display portion, a function of controlling processing by various kinds of software (programs), and the like. The electronic paper in FIG. 17C can have various functions besides those given above.

[0472] In each of the electronic apparatuses described in this embodiment, in each of a plurality of pixels of a display portion of a liquid crystal display device, the off-state current can be decreased. Accordingly, a period for holding voltage in a storage capacitor can be increased, and the electronic apparatuses in which the power consumption when a still image or the like is displayed in the liquid crystal display device can be decreased can be manufactured. Further, by stopping supplying a control signal in the case where a still image is displayed, power consumption can be further decreased. In addition, a still image and a moving image can be switched without malfunction.

[0473] Embodiment 12 can be implemented in appropriate combination with any of the structures described in the other embodiments.

25 (Embodiment 13)

[0474] In Embodiment 13, a principle of operation of a bottom-gate transistor including an oxide semiconductor will be described.

[0475] FIG. 19 is a cross-sectional view of an inverted-staggered insulated-gate transistor including an oxide semiconductor. An oxide semiconductor layer (OS) is provided over a gate electrode (GE1) with a first gate insulating film (GI1) interposed therebetween, and a source electrode (S) and a drain electrode (D) are provided thereover. Further, a second gate insulating film (GI2) is provided over the source electrode (S) and the drain electrode (D), and a second gate electrode (G2) is provided thereover. G2 is maintained to ground potential.

[0476] Hereinafter, description is made using energy band diagrams. The energy band diagrams described here are so simplified as much as possible for understanding that they are not strict. FIGS. 20A and 20B are energy band diagrams (schematic diagrams) along an A-A' section illustrated in FIG. 19. FIG. 20A illustrates the case where the potential of a voltage applied to the source is equal to the potential of a voltage applied to the drain ($VD = 0$ V), and FIG. 20B illustrates the case where a positive potential with respect to the source is applied to the drain ($VD > 0$).

[0477] FIGS. 21A and 21B are energy band diagrams (schematic diagrams) along a B-B' section illustrated in FIG. 19. FIG. 21A illustrates an on state in which a positive potential ($+VG$) is applied to the gate (G1) and carriers (electrons) flow between the source and the drain. FIG. 21B illustrates an off state in which a negative potential ($-VG$) is applied to the gate (G1) and minority carriers do not flow.

[0478] FIG. 22 illustrates the relationships between the vacuum level and the work function of a metal (ϕ_M) and between the vacuum level and the electron affinity (χ) of an oxide semiconductor.

[0479] Since metal is degenerated, the conduction band and the Fermi level correspond to each other. On the other hand, a conventional oxide semiconductor is typically an n-type semiconductor, in which case the Fermi level (E_F) is away from the intrinsic Fermi level (E_I) located in the middle of a band gap and is located closer to the conduction band. Note that it is known that hydrogen is a donor in an oxide semiconductor and is one factor causing an oxide semiconductor to be an n-type semiconductor.

[0480] On the other hand, an oxide semiconductor of the present invention is an intrinsic (i-type) or a substantially intrinsic oxide semiconductor which is obtained by removing hydrogen that is an n-type impurity from an oxide semiconductor and purifying the oxide semiconductor such that an impurity other than a main component of the oxide semiconductor is prevented from being contained therein as much as possible. In other words, a feature is that a purified i-type (intrinsic) semiconductor, or a semiconductor close thereto, is obtained not by adding an impurity but by removing an impurity such as hydrogen or water as much as possible. This enables the Fermi level (E_F) to be at the same level as the intrinsic Fermi level (E_I).

[0481] In the case where the band gap (E_g) of an oxide semiconductor is 3.15 eV, the electron affinity (χ) is said to be 4.3 eV. The work function of titanium (Ti) included in the source electrode and the drain electrode is substantially equal to the electron affinity (χ) of the oxide semiconductor. In that case, a Schottky barrier for electrons is not formed at an interface between the metal and the oxide semiconductor.

[0482] In other words, in the case where the work function of metal (ϕ_M) and the electron affinity (χ) of the oxide semiconductor are equal to each other and the metal and the oxide semiconductor are in contact with each other, an energy band diagram (a schematic diagram) as illustrated in FIG. 20A is obtained.

[0483] In FIG. 20B, a black circle (•) represents an electron, and when a positive potential is applied to the gate and the drain, the electron is injected into the oxide semiconductor over the barrier (h) and flows toward the drain. In that case, the height of the barrier (h) changes depending on the gate voltage and the drain voltage; in the case where a positive drain voltage is applied, the height of the barrier (h) is smaller than the height of the barrier, in FIG. 20A where no voltage is applied, i.e., 1/2 of the band gap (E_g).

[0484] The electron injected into the oxide semiconductor at this time flows in the oxide semiconductor as illustrated in FIG. 21A. In addition, in FIG. 21B, when a negative potential (reverse bias) is applied to the gate electrode (G1), the value of current is extremely close to zero because holes that are minority carriers are sub-

stantially zero.

[0485] For example, even when an insulated-gate transistor as described above has a channel width W of $1 \times 10^4 \mu\text{m}$ and a channel length of $3 \mu\text{m}$, the off-state current is 10^{-13} A or less and the subthreshold swing (S value) can be 0.1 V/dec (the thickness of the gate insulating film: 100 nm).

[0486] Note that the intrinsic carrier concentration of a silicon semiconductor is $1.45 \times 10^{10} / \text{cm}^3$ (300 K) and carriers exist even at room temperature. This means that thermally excited carriers exist even at room temperature. A silicon wafer to which an impurity such as phosphorus or boron is added is practically used. In addition, even in a so-called intrinsic silicon wafer, impurities that cannot be controlled exist. Therefore, carriers exist in practice in a silicon semiconductor at $1 \times 10^{14} / \text{cm}^3$ or more, which contributes to a conduction between the source and the drain. Furthermore, the band gap of a silicon semiconductor is 1.12 eV, and thus the off-state current of a transistor including a silicon semiconductor significantly changes depending on temperature.

[0487] Therefore, not by simply using an oxide semiconductor having a wide band gap for a transistor but by purifying the oxide semiconductor such that an impurity other than a main component can be prevented from being contained therein as much as possible so that the carrier concentration becomes less than $1 \times 10^{14} / \text{cm}^3$, preferably $1 \times 10^{12} / \text{cm}^3$ or less, carriers to be thermally excited at a practical operation temperature can be eliminated, and the transistor can be operated only with carriers that are injected from the source side. This makes it possible to decrease the off-state current to $1 \times 10^{-13} \text{ A}$ or less and to obtain a transistor whose off-state current hardly changes with a change in temperature and which is capable of extremely stable operation.

[0488] A technical idea of the present invention is that an impurity is not added to an oxide semiconductor and on the contrary the oxide semiconductor itself is purified by removing an impurity such as water or hydrogen which undesirably exists therein. In other words, a feature of an embodiment of the present invention is that an oxide semiconductor itself is purified by removing water or hydrogen which forms a donor level and further by sufficiently supplying oxygen to eliminate oxygen defects.

[0489] In an oxide semiconductor, even just after the deposition, hydrogen is observed on the order of $10^{20} / \text{cm}^3$ by secondary ion mass spectrometry (SIMS). One technical idea of the present invention is to purify an oxide semiconductor and obtain an electrically i-type (intrinsic) semiconductor by intentionally removing an impurity such as water or hydrogen which forms a donor level and further by adding oxygen (one of components of the oxide semiconductor), which decreases at the same time as removing water or hydrogen, to the oxide semiconductor.

[0490] As a result, it is preferable that the amount of hydrogen be as small as possible, and it is also preferable that the number of carriers in the oxide semiconductor be as small as possible. The oxide semiconductor is a

purified i-type (intrinsic) semiconductor from which carriers have been eliminated and to which a meaning as a path of carriers as a semiconductor is given, rather than intentionally including carriers as a semiconductor, when used for an insulated-gate transistor.

[0491] As a result, by completely eliminating carriers from an oxide semiconductor or significantly reducing carriers therein, the off-state current of an insulated-gate transistor can be decreased, which is a technical idea of an embodiment of the present invention. In other words, as a criterion, the hydrogen concentration is $1 \times 10^{16} / \text{cm}^3$ or less and the carrier concentration is less than $1 \times 10^{14} / \text{cm}^3$, preferably $1 \times 10^{12} / \text{cm}^3$ or less. According to a technical idea of the present invention, the ideal hydrogen concentration and carrier concentration are zero or close to zero.

[0492] In addition, as a result, the oxide semiconductor functions as a path, and the oxide semiconductor itself is an i-type (intrinsic) semiconductor which is purified so as to include no carriers or extremely few carriers, and carriers are supplied by an electrode on the source side. The degree of supply is determined by the barrier height that is obtained from the electron affinity χ of the oxide semiconductor, the Fermi level, which ideally corresponds to the intrinsic Fermi level, and the work function of the source or drain electrode.

[0493] Therefore, it is preferable that off-state current be as small as possible, and a feature of an embodiment of the present invention is that in characteristics of an insulated-gate transistor to which a drain voltage of 1 V to 10 V is applied, the off-state current per micrometer of channel width is 100 aA/ μm or less, preferably 10 aA/ μm or less, far preferably 1 aA/ μm or less.

(Embodiment 14)

[0494] In Embodiment 14, measured values of the off-state current using a test element group (also referred to as a TEG) will be described below.

[0495] FIG. 23 shows initial characteristics of a thin film transistor with $L/W = 3 \mu\text{m}/10000 \mu\text{m}$ in which 200 thin film transistors each with $L/W = 3 \mu\text{m}/50 \mu\text{m}$ are connected in parallel. In addition, a top view thereof is FIG. 24A and a partially enlarged top view thereof is FIG. 24B. The region enclosed by a dotted line in FIG. 24B is a thin film transistor of one stage with $L/W = 3 \mu\text{m}/50 \mu\text{m}$ and $L_{ov} = 1.5 \mu\text{m}$. In order to measure initial characteristics of the thin film transistor, the changing characteristics of the source-drain current (hereinafter referred to as a drain current or I_d), i.e., V_g - I_d characteristics, were measured, under the conditions where the substrate temperature was set to room temperature, the voltage between source and drain (hereinafter, a drain voltage or V_d) was set to 10 V, and the voltage between source and gate (hereinafter, a gate voltage or V_g) was changed from -20 V to +20 V. Note that FIG. 23 shows V_g in the range of from -20 V to +5 V.

[0496] As shown in FIG. 23, the thin film transistor hav-

ing a channel width W of 10000 μm has an off-state current of $1 \times 10^{-13} \text{ A}$ or less at V_d of 1 V and 10 V, which is less than or equal to the resolution (100 fA) of a measurement device (a semiconductor parameter analyzer, Agilent 4156C manufactured by Agilent Technologies Inc.).

[0497] A method for manufacturing the thin film transistor used for the measurement is described.

[0498] First, a silicon nitride layer was formed as a base layer over a glass substrate by a CVD method, and a silicon oxynitride layer was formed over the silicon nitride layer. A tungsten layer was formed as a gate electrode layer over the silicon oxynitride layer by a sputtering method. In this embodiment, the tungsten layer was selectively etched into the gate electrode layer.

[0499] Then, a silicon oxynitride layer having a thickness of 100 nm was formed as a gate insulating layer over the gate electrode layer by a CVD method.

[0500] Then, an oxide semiconductor layer having a thickness of 50 nm was formed over the gate insulating layer by a sputtering method using an In-Ga-Zn-O-based oxide semiconductor target (at a molar ratio of $\text{In}_2\text{O}_3:\text{Ga}_2\text{O}_3:\text{ZnO} = 1:1:2$). Here, the oxide semiconductor layer was selectively etched into an island-shaped oxide semiconductor layer.

[0501] Then, first heat treatment was performed on the oxide semiconductor layer in a nitrogen atmosphere in a clean oven at 450 °C for 1 hour.

[0502] Then, a titanium layer (having a thickness of 150 nm) was formed as a source electrode layer and a drain electrode layer over the oxide semiconductor layer by a sputtering method. Here, the source electrode layer and the drain electrode layer were selectively etched such that 200 thin film transistors each having a channel length L of 3 μm and a channel width W of 50 μm were connected in parallel to obtain a thin film transistor with $L/W = 3 \mu\text{m}/10000 \mu\text{m}$.

[0503] Next, a silicon oxide layer having a thickness of 300 nm was formed as a protective insulating layer in contact with the oxide semiconductor layer by a reactive sputtering method. Here, the silicon oxide layer which is a protective layer was selectively etched to form opening portions over the gate electrode layer, the source electrode layer, and the drain electrode layer. After that, second heat treatment was performed in a nitrogen atmosphere at 250 °C for 1 hour.

[0504] Then, heat treatment was performed at 150 °C for 10 hours before the measurement of V_g - I_d characteristics.

[0505] Through the above process, a bottom-gate thin film transistor was manufactured.

[0506] The reason why the thin film transistor has an off-state current of about $1 \times 10^{-13} \text{ A}$ as shown in FIG 23 is that the concentration of hydrogen in the oxide semiconductor layer could be sufficiently reduced in the above manufacturing process. The concentration of hydrogen in the oxide semiconductor layer is $1 \times 10^{16} / \text{cm}^3$ or less. Note that the concentration of hydrogen in the

oxide semiconductor layer was measured by secondary ion mass spectrometry (SIMS).

[0507] Although the example of using an In-Ga-Zn-O-based oxide semiconductor is described, this embodiment is not particularly limited thereto. Another oxide semiconductor material, such as an In-Sn-Zn-O-based oxide semiconductor, a Sn-Ga-Zn-O-based oxide semiconductor, an Al-Ga-Zn-O-based oxide semiconductor, a Sn-Al-Zn-O-based oxide semiconductor, an In-Zn-O-based oxide semiconductor, an In-Sn-O-based oxide semiconductor, a Sn-Zn-O-based oxide semiconductor, an Al-Zn-O-based oxide semiconductor, an In-O-based oxide semiconductor, a Sn-O-based oxide semiconductor, or a Zn-O-based oxide semiconductor, can also be used. As an oxide semiconductor material, an In-Al-Zn-O-based oxide semiconductor mixed with AlO_x of 2.5 wt% to 10 wt% or an In-Zn-O-based oxide semiconductor mixed with SiO_x of 2.5 wt% to 10 wt% can be used.

[0508] The carrier concentration of the oxide semiconductor layer which is measured by a carrier measurement device is less than $1 \times 10^{14} / \text{cm}^3$, preferably $1 \times 10^{12} / \text{cm}^3$ or less. In other words, the carrier concentration of the oxide semiconductor layer can be made as close to zero as possible.

[0509] The thin film transistor can also have a channel length L of greater than or equal to 10 nm and less than or equal to 1000 nm, which enables an increase in circuit operation speed, and the off-state current is extremely small, which enables a further reduction in power consumption.

[0510] In addition, in circuit design, the oxide semiconductor layer can be regarded as an insulator when the thin film transistor is in an off state.

[0511] After that, the temperature characteristics of off-state current of the thin film transistor manufactured in this embodiment were evaluated. Temperature characteristics are important in considering the environmental resistance, maintenance of performance, or the like of an end product in which the thin film transistor is used. It is to be understood that a smaller amount of change is more preferable, which increases the degree of freedom for product designing.

[0512] For the temperature characteristics, the V_g - I_d characteristics were obtained using a constant-temperature chamber under the conditions where substrates provided with thin film transistors were kept at respective constant temperatures of -30 °C, 0 °C, 25 °C, 40 °C, 60 °C, 80 °C, 100 °C, and 120 °C, the drain voltage was set to 6 V, and the gate voltage was changed from -20 V to +20V.

[0513] FIG. 25A shows V_g - I_d characteristics measured at the above temperatures and superimposed on one another, and FIG. 25B shows an enlarged view of a range of off-state current enclosed by a dotted line in FIG. 25A. The rightmost curve indicated by an arrow in the diagram is a curve obtained at -30 °C; the leftmost curve is a curve obtained at 120 °C; and curves obtained at the other temperatures are located therebetween. The

temperature dependence of on-state currents can hardly be observed. On the other hand, as clearly shown also in the enlarged view of FIG. 25B, the off-state currents are less than or equal to $1 \times 10^{-12} \text{ A}$, which is near the

5 resolution of the measurement device, at all temperatures except in the vicinity of a gate voltage of -20 V, and the temperature dependence thereof is not observed. In other words, even at a high temperature of 120 °C, the off-state current is kept less than or equal to 1×10^{-12}

10 A, and given that the channel width W is 10000 μm , it can be seen that the off-state current is significantly small.

[0514] A thin film transistor including a purified oxide semiconductor (purified OS) as described above shows almost no dependence of off-state current on temperature. It can be said that an oxide semiconductor does not show temperature dependence when purified because the conductivity type becomes extremely close to an intrinsic type and the Fermi level is located in the middle of the forbidden band, as illustrated in the band diagram

20 of FIG. 19A. This also results from the fact that the oxide semiconductor has an energy gap of 3 eV or more and includes very few thermally excited carriers. In addition, the source region and the drain region are in a degenerated state, which is also a factor for showing no temperature

25 dependence. The thin film transistor is mainly operated with carriers which are injected from the degenerated source region to the oxide semiconductor, and the above characteristics (independence of off-state current on temperature) can be explained by independence of carrier concentration on temperature.

[0515] In the case where a display device is manufactured using such a thin film transistor the off-state current of which is extremely small, the leakage current is reduced, so that a period for holding display data can be extended.

[Example 1]

[0516] In Example 1, the results of evaluation of image signal holding characteristics of the liquid crystal display device, which is described in the above embodiment, shown in FIG. 1, and actually manufactured, at the time of displaying a still image will be described.

[0517] First, regarding an upper-side layout diagram 45 of a plurality of pixels included in a pixel portion, a photograph of elements such as thin film transistors formed over a substrate, which is taken from the rear side, is shown in FIG. 27.

[0518] From the photograph of the pixels shown in FIG. 50 27, it can be seen that rectangular pixels are provided and gate lines 2701 and signal lines 2702 are provided at right angles to each other. It can also be seen that capacitor lines 2703 are provided in a position parallel with the gate lines 2701. In a region where the gate line 55 2701 and the capacitor line 2703, and the signal line 2702 overlap each other, an insulating film is provided in order to reduce parasitic capacitance, and can be observed as a bump in FIG. 27. The liquid crystal display device de-

scribed in this example is a reflective liquid crystal display device, and a red (R) color filter 2704R, a green (G) color filter 2704G, and a blue (B) color filter 2704B are observed. In FIG. 27, in a region controlled by the gate line 2701, an In-Ga-Zn-O-based non-single-crystal film which is an oxide semiconductor is provided as a light-transmitting semiconductor layer, and a thin film transistor is formed.

[0519] FIG. 28 shows a graph of changes in luminance over time, of each pixel shown in FIG. 27 at the time of displaying a still image according to the above embodiment.

[0520] It can be seen from FIG. 28 that in the case of the upper-side layout of the pixel of FIG. 27, the image signal holding period is about 1 minute long. Therefore, at the time of displaying a still image, a constant luminance may be maintained by performing the operation to regularly supply the same image signal (in the diagram, "refresh"). As a result, the length of time to apply a voltage to a transistor included in a driver circuit portion can be drastically shortened. Furthermore, deterioration of a driver circuit over time can be drastically slowed down, which produces advantageous effects such as an improvement in reliability of a liquid crystal display device.

[Example 2]

[0521] In Example 2, the results of evaluation of image signal holding characteristics of the liquid crystal display device, which is described in the above embodiment, shown in FIG. 1, and actually manufactured to have a structure which is different from Example 1, at the time of displaying a still image will be described.

[0522] First, regarding an upper-side layout diagram of a plurality of pixels included in a pixel portion, a photograph of elements such as thin film transistors formed over a substrate, which is taken from the rear side, is shown in FIG. 29.

[0523] From the photograph of the pixels shown in FIG. 29, it can be seen that rectangular pixels are provided and gate lines 2901 and signal lines 2902 are provided at right angles to each other. It can also be seen that capacitor lines 2903 are provided in a position parallel with the gate lines 2901. In a region where the gate line 2901 and the capacitor line 2903, and the signal line 2902 overlap each other, an insulating film is provided in order to reduce parasitic capacitance, and can be observed as a bump in FIG. 29. The liquid crystal display device described in this example is a reflective liquid crystal display device, and a reflective electrode 2904R overlapping a red (R) color filter, a reflective electrode 2904G overlapping a green (G) color filter, and a reflective electrode 2904B overlapping a blue (B) color filter are observed. In FIG. 29, in a region controlled by the gate line 2901, an In-Ga-Zn-O-based non-single-crystal film which is an oxide semiconductor is provided as a light-transmitting semiconductor layer, and a thin film transistor is formed.

[0524] FIG. 30 shows a graph of changes in luminance

over time, of each pixel shown in FIG. 29 at the time of displaying a still image according to the above embodiment.

[0525] It can be seen from FIG. 30 that in the case of the upper-side layout of the pixel of FIG. 29, the image signal holding period is about 1 minute long. Therefore, at the time of displaying a still image, a constant luminance may be maintained by performing the operation to regularly supply the same image signal (in the diagram, "refresh"). As a result, the length of time to apply a voltage to a transistor included in a driver circuit portion can be drastically shortened. Furthermore, deterioration of a driver circuit over time can be drastically slowed down, which produces advantageous effects such as an improvement in reliability of a liquid crystal display device.

[Example 3]

[0526] In Example 3, the results of evaluation of image signal holding characteristics of the liquid crystal display device, which is described in the above embodiment, shown in FIG. 1, and actually manufactured to have a structure which is different from Examples 1 and 2, at the time of displaying a still image will be described.

[0527] First, regarding an upper-side layout diagram of a plurality of pixels included in a pixel portion, a photograph of elements such as thin film transistors formed over a substrate, which is taken from the rear side, is shown in FIG. 31.

[0528] From the photograph of the pixels shown in FIG. 31, it can be seen that rectangular pixels are provided and gate lines 3101 and signal lines 3102 are provided at right angles to each other. It can also be seen that capacitor lines 3103 are provided in a position parallel with the gate lines 3101. In a region where the gate line 3101 and the capacitor line 3103, and the signal line 3102 overlap each other, an insulating film is provided in order to reduce parasitic capacitance, and can be observed as a bump in FIG. 31. The liquid crystal display device described in this example is a liquid crystal display device using a polymer dispersed liquid crystal, and a reflective electrode 3104 is observed. In FIG. 31, in a region controlled by the gate line 3101, an In-Ga-Zn-O-based non-single-crystal film which is an oxide semiconductor is provided as a light-transmitting semiconductor layer, and a thin film transistor is formed.

[0529] FIG. 32 shows a graph of changes in luminance over time, of each pixel shown in FIG. 31 at the time of displaying a still image according to the above embodiment.

[0530] It can be seen from FIG. 32 that in the case of the upper-side layout of the pixel of FIG. 31, the image signal holding period can be longer than that of any of Examples 1 and 2 since the polymer dispersed liquid crystal has a property of holding an image signal. Therefore, at the time of displaying a still image, the interval of operation of supplying the same image signal can be extended. As a result, the length of time to apply a voltage

to a transistor included in a driver circuit portion can be drastically shortened. Furthermore, deterioration of a driver circuit over time can be drastically slowed down, which produces advantageous effects such as an improvement in reliability of a liquid crystal display device.

[Example 4]

[0531] In Example 4, the results of evaluation of image signal holding characteristics of the liquid crystal display device, which is described in the above embodiment, shown in FIG. 1, and actually manufactured to have a structure which is different from Examples 1 to 3, at the time of displaying a still image will be described. Particularly in this example, an example which is different from the upper-side layout diagram of a plurality of pixels described in any of Examples 1 to 3 will be described. A photograph of elements such as thin film transistors formed over a substrate, which is taken from the rear side, is shown in FIG. 33.

[0532] From the photograph of the pixels shown in FIG. 33, it can be seen that rectangular pixels are provided and gate lines 3301 and signal lines 3302 are provided at right angles to each other. Unlike the photograph of the pixels described any of Examples 1 to 3, an upper-side layout diagram in which a capacitor line is omitted is described. The liquid crystal display device described in this example is a transmissive liquid crystal display device, and a pixel electrode 3304 is observed. In FIG. 33, in a region controlled by the gate line 3301, an In-Ga-Zn-O-based non-single-crystal film which is an oxide semiconductor is provided as a light-transmitting semiconductor layer, and a thin film transistor is formed.

[Example 5]

[0533] In Example 5, an example of operation method of the liquid crystal display device shown in FIG. 1 and described in the above embodiment will be described. The procedure of supplying, or stopping the supply of, a potential to each wiring of the driver circuit portion during the operations to display a still image and a moving image, or the operation to rewrite a voltage to be applied to a liquid crystal element (hereinafter also referred to as refresh operation), in the driver circuit manufactured using a plurality of n-channel transistors, which is given as an example in FIGS. 2A to 2C and FIG. 3, will be described with reference to FIG. 34. Note that FIG. 34 illustrates changes in potentials, before and after a period T1, of a wiring for supplying a high power supply potential (VDD), a wiring for supplying a low power supply potential (VSS), a wiring for supplying a start pulse (SP), and wirings for supplying first to fourth clock signals (CK1 to CK4) to a shift register.

[0534] The liquid crystal display device of this embodiment can display a still image without constantly operating the driver circuit portion. Therefore, as illustrated in FIG. 34, there are a period in which control signals such

as the high power supply potential (VDD), the first to fourth clock signals (CK1 to CK4), and the start pulse are supplied to a shift register and a period in which control signals are not supplied. Note that the period T1 illustrated in FIG. 34 corresponds to the period in which control signals are supplied, in other words, a period in which a moving image is displayed and a period in which refresh operation is performed. The period T2 illustrated in FIG. 34 corresponds to the period in which control signals are not supplied, in other words, a period in which a still image is displayed.

[0535] In FIG. 34, a period in which the high power supply potential (VDD) is supplied is provided not only in the period T1 but also in part of the period T2. In addition, in FIG. 34, a period in which the first to fourth clock signals (CK1 to CK4) are supplied is provided between the start of the supply of the high power supply potential (VDD) and the stop of the supply of the high power potential (VDD).

[0536] Moreover, as illustrated in FIG. 34, the first to fourth clock signals (CK1 to CK4) may be set so as to start to oscillate at a constant frequency after being set to a high potential once before the period T1 begins and stop oscillating after being set to a low potential after the period T1 ends.

[0537] As described above, in the liquid crystal display device of this example, the supply of control signals such as the high power supply potential (VDD), the first to fourth clock signals (CK1 to CK4), and the start pulse to the shift register is stopped in the period T2. Then, in the period in which the supply of control signals is stopped, whether each transistor is turned on or turned off is controlled and the output of a pulse signal from the shift register is also stopped. Therefore, power consumption of the shift register and power consumption of the pixel portion which is driven by the shift register can be reduced.

[0538] The aforementioned refresh operation needs to be performed regularly because there is a possibility that the quality of a displayed still image may deteriorate. In the liquid crystal display device of this example, the aforementioned transistor including an oxide semiconductor is employed as a switching element for controlling a voltage to be applied to a liquid crystal element of each pixel. Accordingly, off-state current can be drastically decreased, and a change in voltage to be applied to the liquid crystal element of each pixel can be reduced. In other words, even when the period in which the operation of the shift register is stopped is long due to display of a still image, the deterioration of image quality can be suppressed. For example, even when the period is 3 minutes long, the quality of a displayed still image can be maintained. For example, if a liquid crystal display device in which rewrite is performed 60 times per second and a liquid crystal display device in which refresh operation is performed once in 3 minutes are compared with each other, power consumption can be reduced to about 1/10000.

[0539] Note that the stop of the supply of the high power

supply potential (VDD) is to set a potential equal to the low power supply potential (VSS) as illustrated in FIG. 34. In addition, the stop of the supply of the high power supply potential (VDD) may be to set the potential of a wiring, to which the high power supply potential is supplied, in a floating state.

[0540] Note that when the potential of the wiring to which the high power supply potential (VDD) is supplied is increased, which means that the potential is increased from the low power supply potential (VSS) to the high power supply potential (VDD) before the period T1, it is preferable that the potential of the wiring is controlled so as to change gradually. If the gradient of the change in potential of the wiring is steep, there is a possibility that the change in potential may become noise and a fault pulse may be output from the shift register. In the case where the shift register is included in a gate line driver circuit, the fault pulse serves as a signal for turning on a transistor. Thus, there is a possibility that a voltage to be applied to a liquid crystal element may be changed by the fault pulse and the quality of a still image may be changed. Therefore, it is preferable to control the change in potential of the wiring as described above. In view of the above content, FIG. 34 illustrates an example in which a rise in signal to the high power supply potential (VDD) is more gradual than a fall. In particular, in the liquid crystal display device of this embodiment, when a still image is displayed in the pixel portion, the stop of the supply, and the resupply, of the high power supply potential (VDD) to the shift register are performed as appropriate. In other words, in the case where a change in potential of the wiring for supplying the high power supply potential (VDD) adversely affects the pixel portion as noise, the noise directly leads to deterioration of a display image. Therefore, it is important to control the liquid crystal display device of this embodiment so as to prevent a change in potential (particularly, an increase in potential) of the wiring from entering the pixel portion as noise.

[0541] This application is based on Japanese Patent Application serial no.2009-238916, 2009-273913, and 2009-278999 filed with Japan Patent Office on October 16, 2009, December 1, 2009, and December 8, 2009, respectively, the entire contents of which are hereby incorporated by reference.

[0542] The following are further embodiments of the invention.

1. A liquid crystal display device comprising:

a display panel including a driver circuit portion and a pixel portion in which a transistor including a semiconductor layer comprising an oxide semiconductor is provided in each pixel;

a signal generation circuit for generating a control signal for driving the driver circuit portion and an image signal which is supplied to the pixel portion;

a memory circuit for storing the image signal for each frame period;

a comparison circuit for detecting a difference of the image signals for a series of frame periods among the image signals stored for the respective frame periods in the memory circuit;

a selection circuit which selects and outputs the image signals for the series of frame periods when the difference is detected in the comparison circuit; and

a display control circuit which supplies the control signal and the image signals output from the selection circuit, to the driver circuit portion when the difference is detected in the comparison circuit, and stops supplying the control signal to the driver circuit portion when the difference is not detected in the comparison circuit.

2. The liquid crystal display device according to embodiment 1, wherein the control signal is a high power supply potential, a low power supply potential, a clock signal, a start pulse signal, or a reset signal.

3. The liquid crystal display device according to embodiment 1, wherein the oxide semiconductor has a hydrogen concentration of $1 \times 10^{16} / \text{cm}^3$ or less which is detected by secondary ion mass spectrometry.

4. The liquid crystal display device according to embodiment 1, wherein the oxide semiconductor has a carrier density which is less than $1 \times 10^{14} / \text{cm}^3$.

5. An electronic apparatus comprising the liquid crystal display device according to embodiment 1.

6. The liquid crystal display device according to embodiment 1, wherein an off-state resistivity of the transistor is $1 \times 10^9 \Omega \cdot \text{m}$ or more.

7. The liquid crystal display device according to embodiment 1, wherein the liquid crystal display device is incorporated into one selected from the group consisting of a game machine, a digital camera, a television set, a computer, a mobile phone, and an electronic paper.

8. A liquid crystal display device, comprising:

a display panel including a driver circuit portion and a pixel portion in which a transistor including a semiconductor layer comprising an oxide semiconductor is provided in each pixel;

a signal generation circuit for generating a con-

trol signal for driving the driver circuit portion and an image signal which is supplied to the pixel portion;

a memory circuit for storing the image signal for each frame period; 5

a comparison circuit for detecting a difference of the image signals for a series of frame periods among the image signals stored for the respective frame periods in the memory circuit; 10

a selection circuit which selects and outputs the image signals for the series of frame periods when the difference is detected in the comparison circuit; and 15

a display control circuit which supplies the control signal and the image signals output from the selection circuit, to the driver circuit portion when the difference is detected in the comparison circuit, and stops supplying the control signal to the driver circuit portion when the difference is not detected in the comparison circuit, 20

25 wherein the transistor comprises:

a gate electrode provided over a substrate;

a gate insulating layer provided over the 30 gate electrode;

the semiconductor layer comprising the oxide semiconductor provided over the gate electrode with the gate insulating layer ther- 35 ebetween; and

a source electrode and a drain electrode provided over the semiconductor layer and separated from each other at a location 40 overlapping with the gate electrode.

9. The liquid crystal display device according to embodiment 8, wherein the control signal is a high power supply potential, a low power supply potential, a 45 clock signal, a start pulse signal, or a reset signal.

10. The liquid crystal display device according to embodiment 8, wherein the oxide semiconductor has a hydrogen concentration of $1 \times 10^{16} / \text{cm}^3$ or less 50 which is detected by secondary ion mass spectrometry.

11. The liquid crystal display device according to embodiment 8, wherein the oxide semiconductor has a carrier density which is less than $1 \times 10^{14} / \text{cm}^3$. 55

12. An electronic apparatus comprising the liquid

crystal display device according to embodiment 8.

13. The liquid crystal display device according to embodiment 8, wherein an off-state resistivity of the transistor is $1 \times 10^9 \Omega \cdot \text{m}$ or more.

14. The liquid crystal display device according to embodiment 8, wherein the liquid crystal display device is incorporated into one selected from the group consisting of a game machine, a digital camera, a television set, a computer, a mobile phone, and an electronic paper.

15. A liquid crystal display device comprising:

a display panel including a driver circuit portion and a pixel portion in which a transistor including a semiconductor layer comprising an oxide semiconductor is provided in each pixel;

a signal generation circuit for generating a control signal for driving the driver circuit portion and an image signal which is supplied to the pixel portion;

a memory circuit for storing the image signal for each frame period;

a comparison circuit for detecting a difference of the image signals for a series of frame periods among the image signals stored for the respective frame periods in the memory circuit;

a selection circuit which selects and outputs the image signals for the series of frame periods when the difference is detected in the comparison circuit; and

a display control circuit which supplies the control signal and the image signals output from the selection circuit, to the driver circuit portion when the difference is detected in the comparison circuit, and stops supplying the control signal to the driver circuit portion when the difference is not detected in the comparison circuit,

wherein the transistor comprises:

a gate electrode provided over a substrate;

a gate insulating layer provided over the gate electrode;

a channel region provided in the semiconductor layer and provided over the gate electrode with the gate insulating layer ther- 5 ebetween;

an oxide insulating layer provided over the channel region; and

a source electrode and a drain electrode provided over the semiconductor layer and the oxide insulating layer and separated from each other at a location overlapping with the gate electrode. 5

16. The liquid crystal display device according to embodiment 15, wherein the control signal is a high power supply potential, a low power supply potential, a clock signal, a start pulse signal, or a reset signal. 10

17. The liquid crystal display device according to embodiment 15, wherein the oxide semiconductor has a hydrogen concentration of $1 \times 10^{16} / \text{cm}^3$ or less which is detected by secondary ion mass spectrometry. 15

18. The liquid crystal display device according to embodiment 15, wherein the oxide semiconductor has a carrier density which is less than $1 \times 10^{14} / \text{cm}^3$. 20

19. An electronic apparatus comprising the liquid crystal display device according to embodiment 15. 25

20. The liquid crystal display device according to embodiment 15, wherein an off-state resistivity of the transistor is $1 \times 10^9 \Omega \cdot \text{m}$ or more. 30

21. The liquid crystal display device according to embodiment 15, wherein the liquid crystal display device is incorporated into one selected from the group consisting of a game machine, a digital camera, a television set, a computer, a mobile phone, and an electronic paper. 35

Claims 40

1. A driving method of a liquid crystal display device comprising a driver circuit portion and a pixel portion, the driving method comprising steps of: 45

stopping a supply of a start pulse to the driver circuit portion;
stopping a supply of a clock signal to the driver circuit after stopping the supply of the start pulse;
supplying a reset signal to the driver circuit after 50
stopping the supply of the clock signal; and
displaying an image while the supply of clock signal is stopped.

2. The driving method according to claim 1, further comprising a step of stopping a supply of a power supply potential. 55

FIG. 1

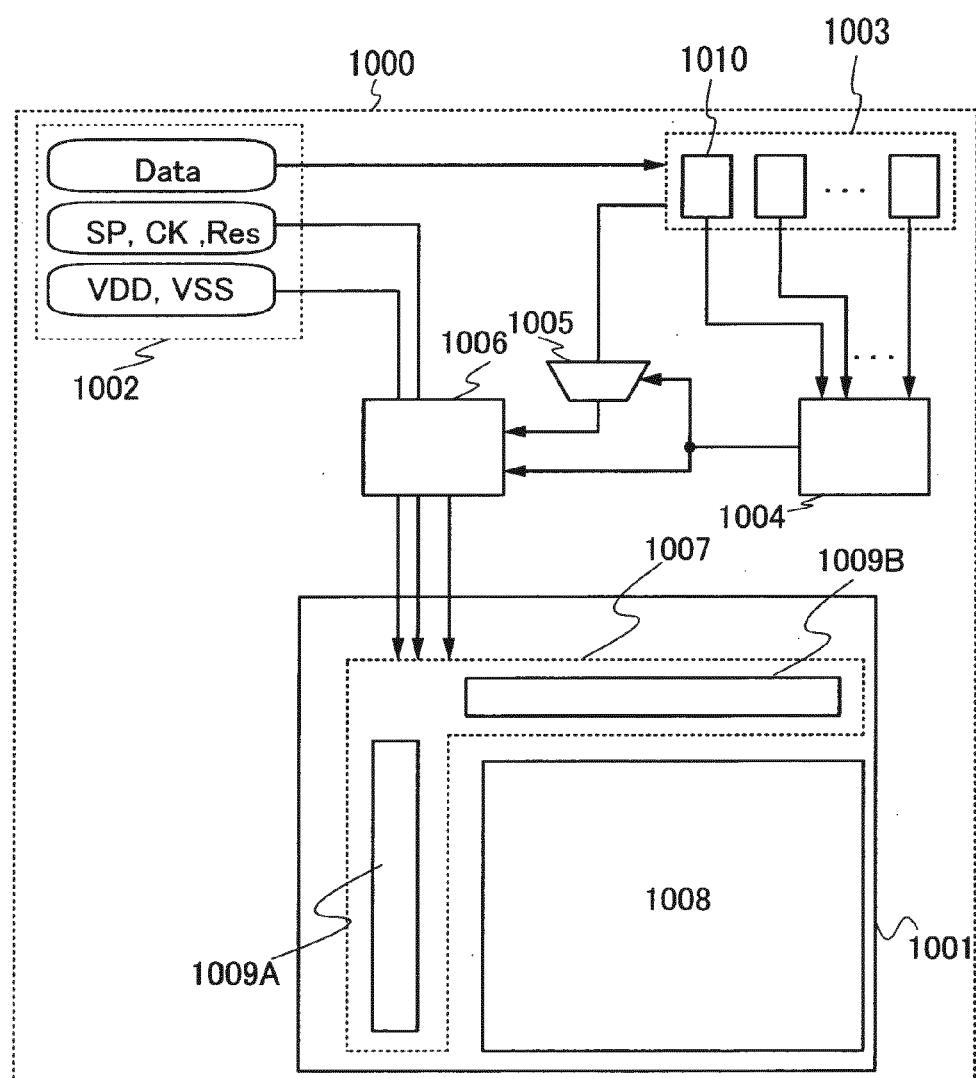


FIG. 2A

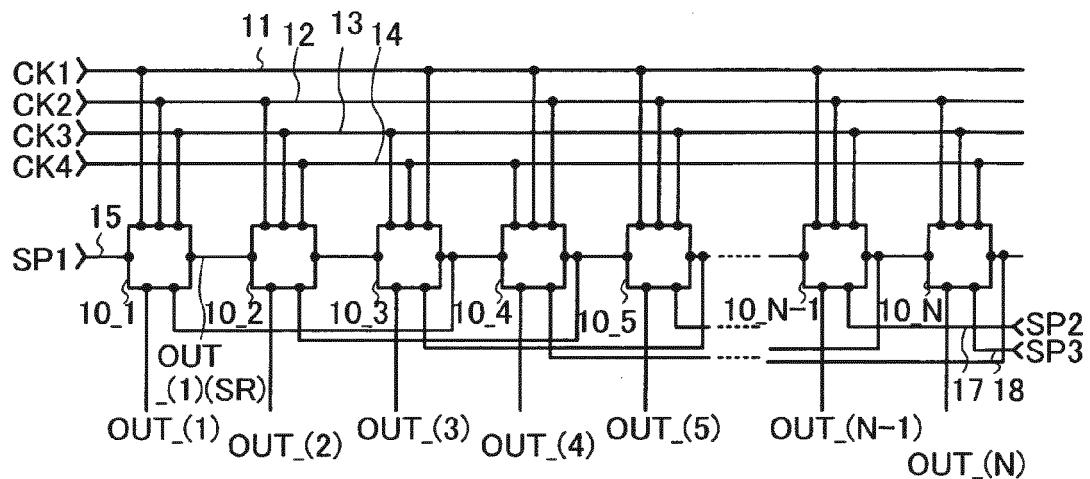


FIG. 2B




FIG. 2C

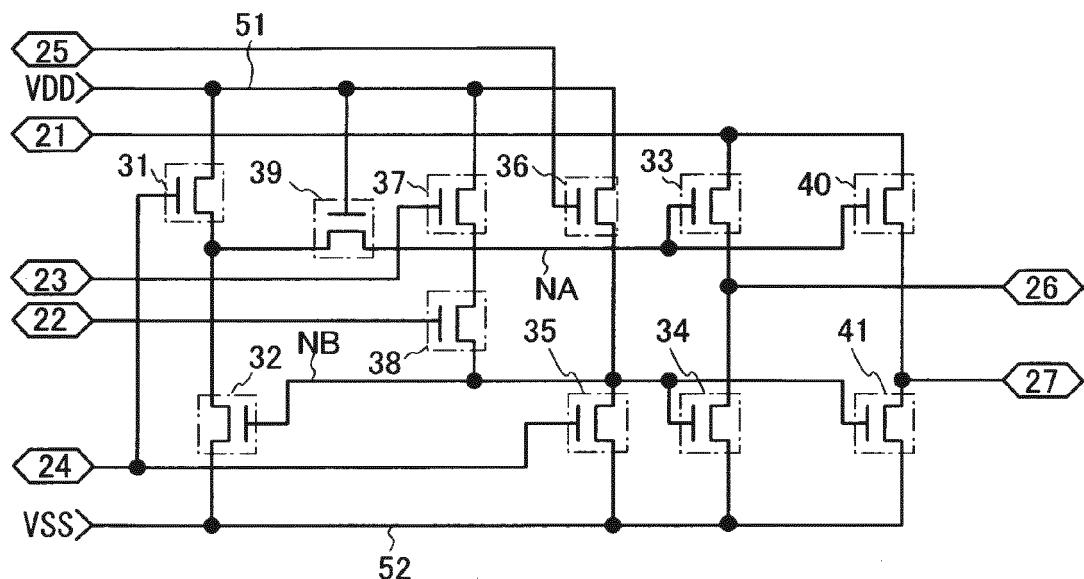


FIG .3

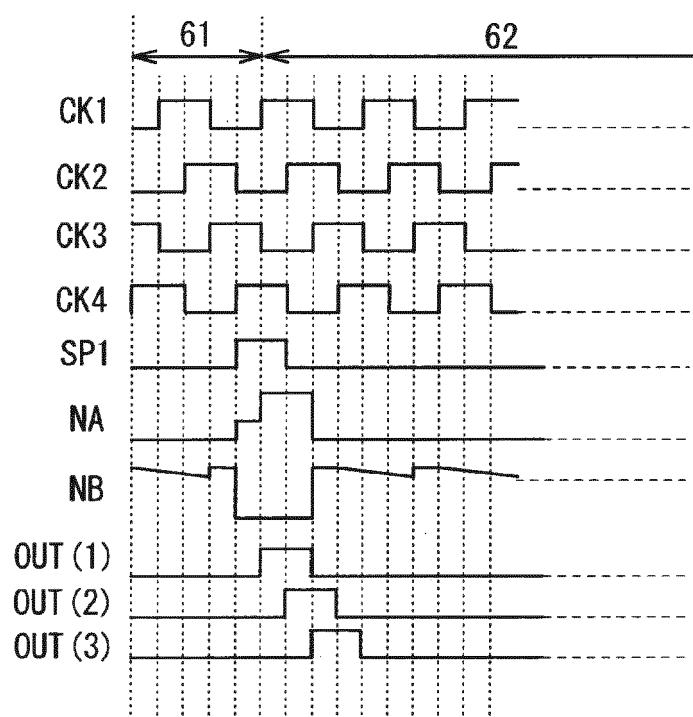


FIG. 4A

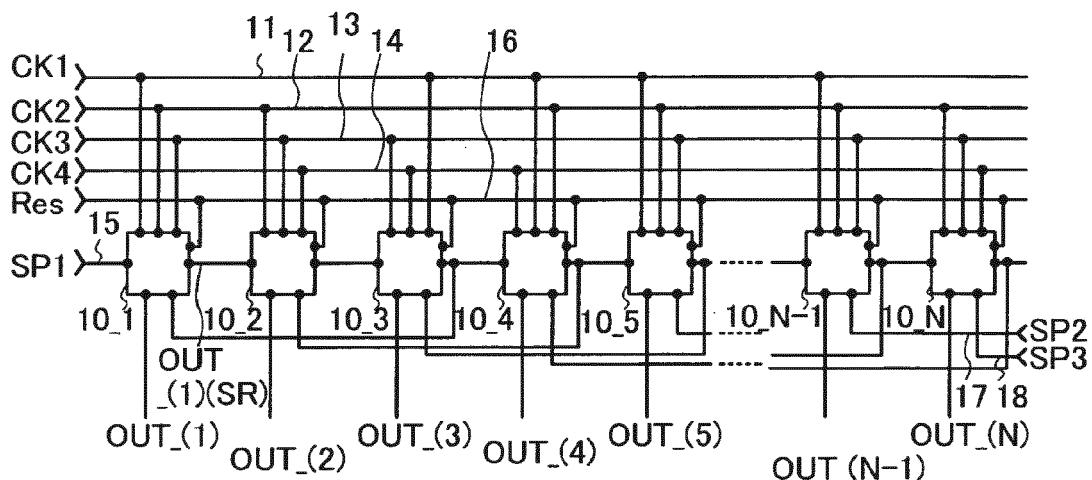


FIG. 4B




FIG. 4C

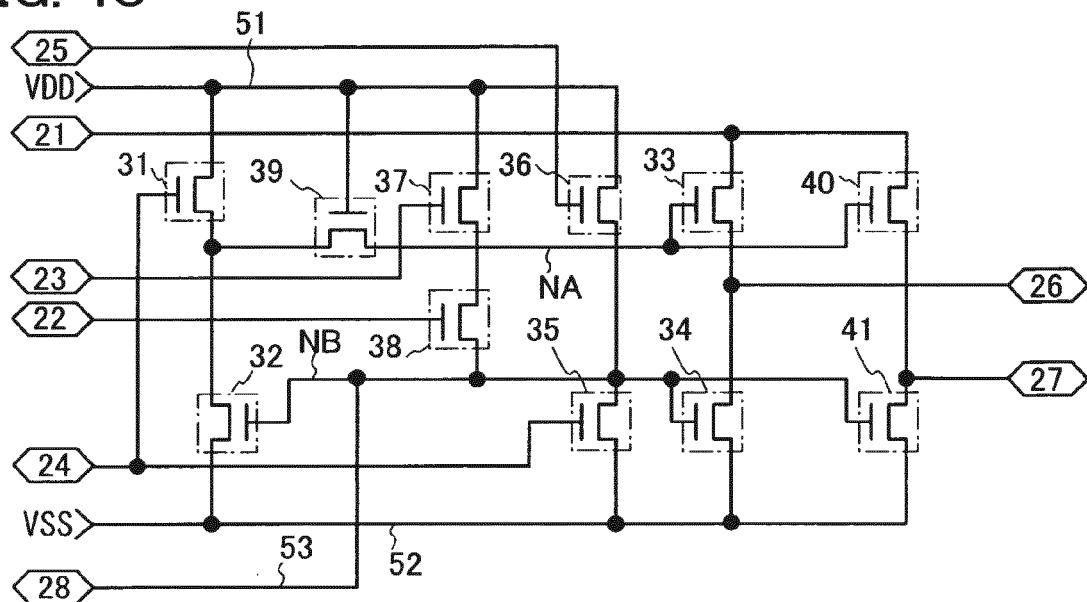


FIG. 5A

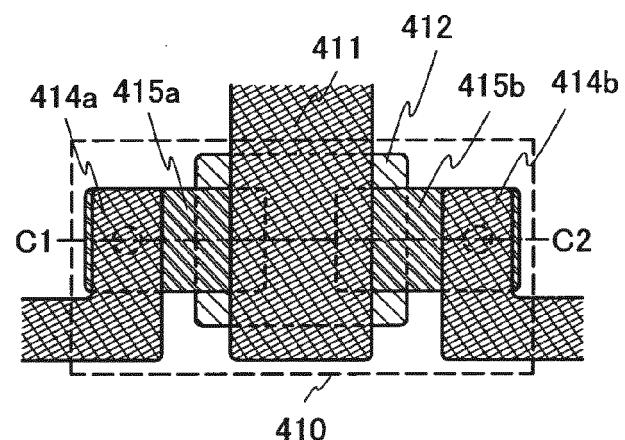


FIG. 5B

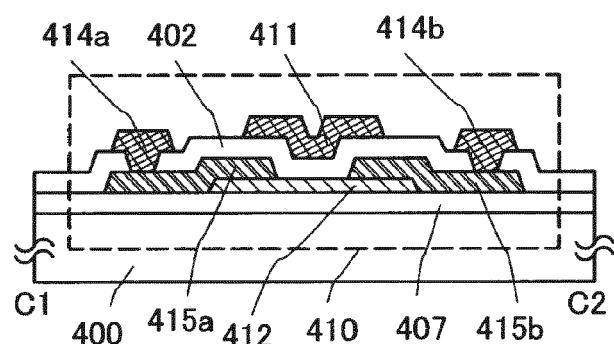


FIG. 6A

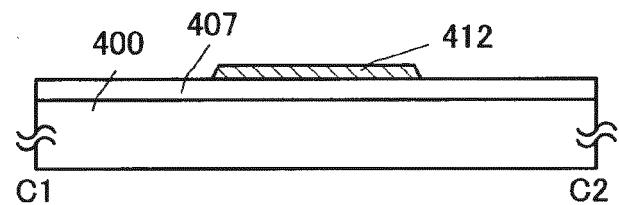


FIG. 6B

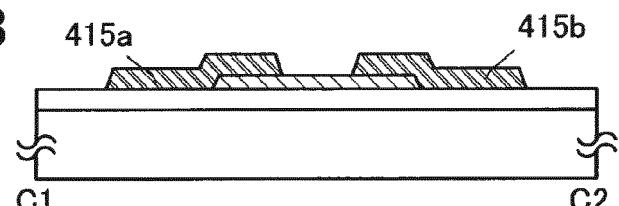


FIG. 6C

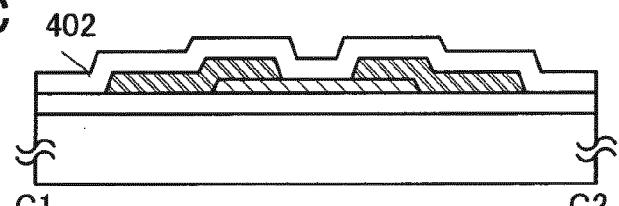


FIG. 6D

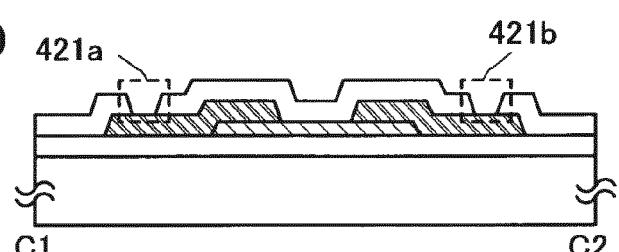


FIG. 6E

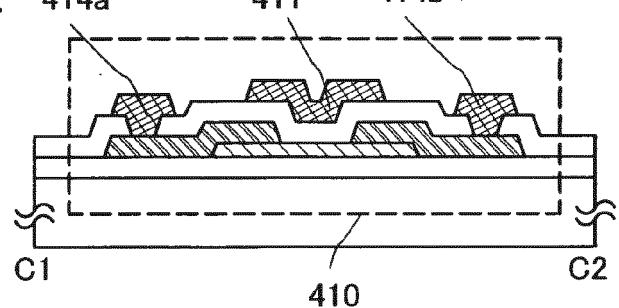


FIG. 7A

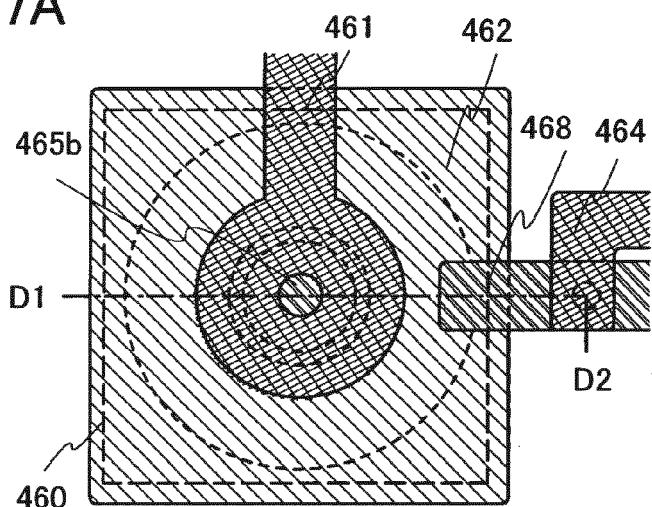


FIG. 7B

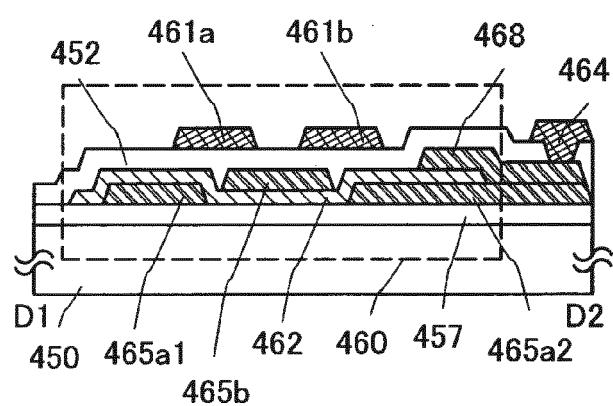


FIG. 8A

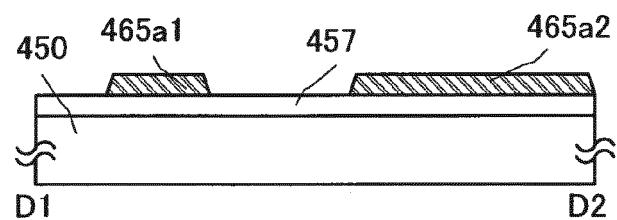


FIG. 8B

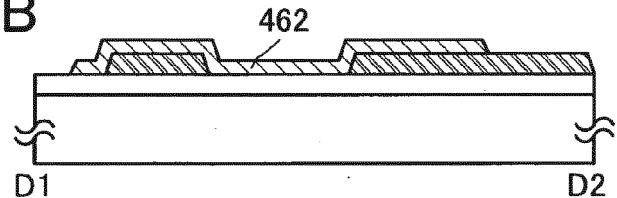


FIG. 8C

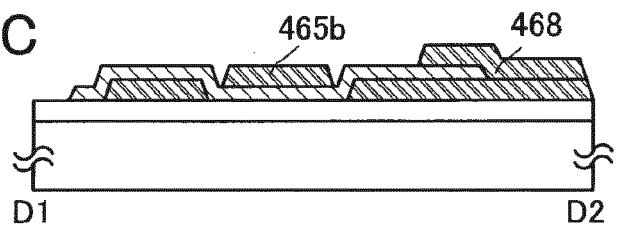


FIG. 8D

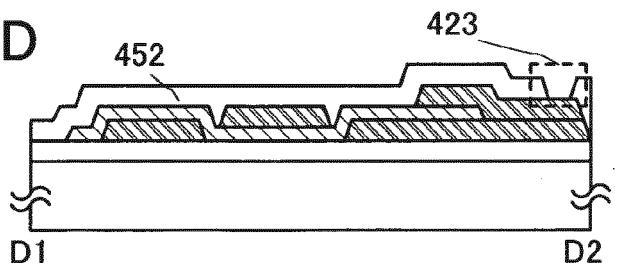


FIG. 8E

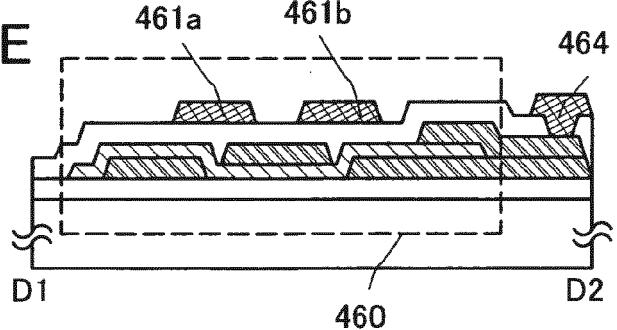


FIG. 9A

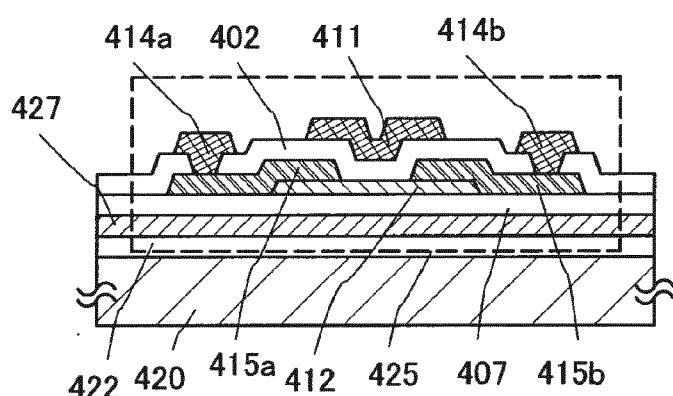


FIG. 9B

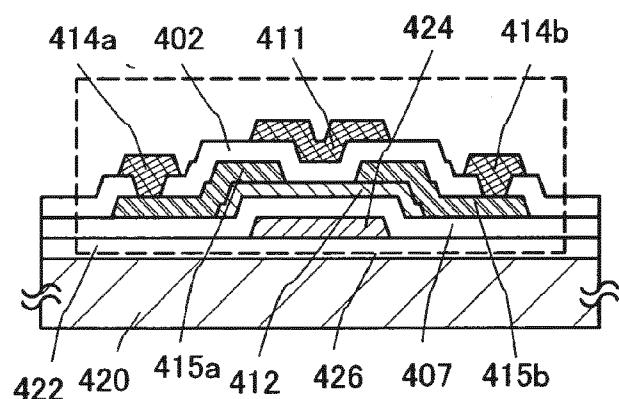


FIG. 10A

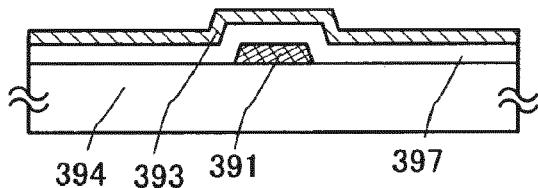


FIG. 10B

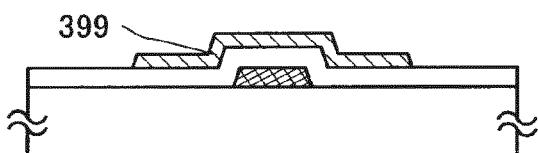


FIG. 10C

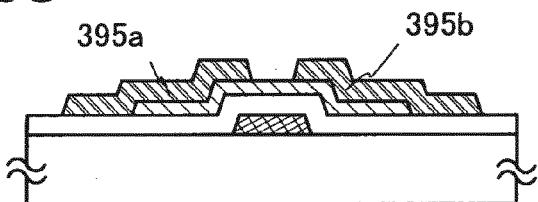


FIG. 10D

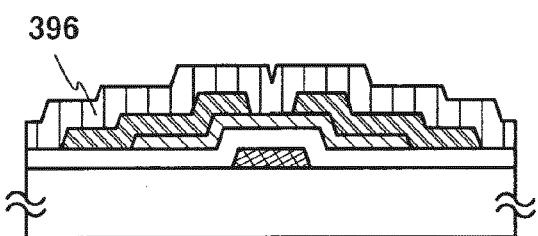


FIG. 10E

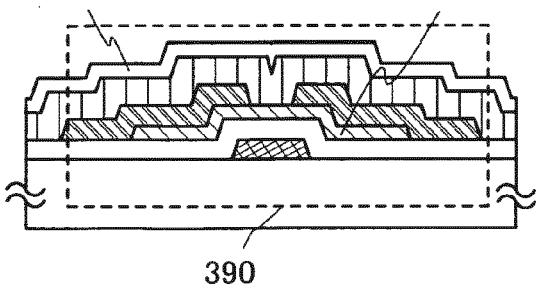


FIG. 11A

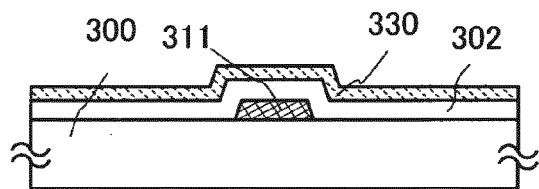


FIG. 11B

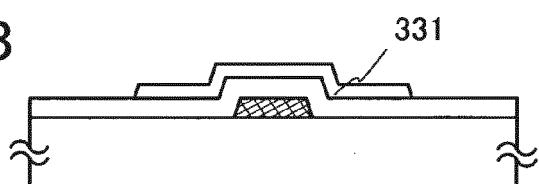


FIG. 11C

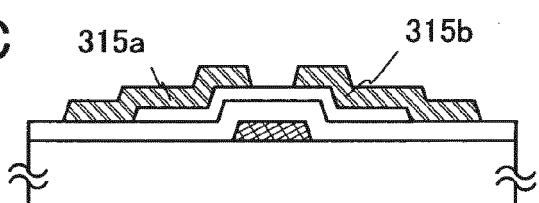


FIG. 11D

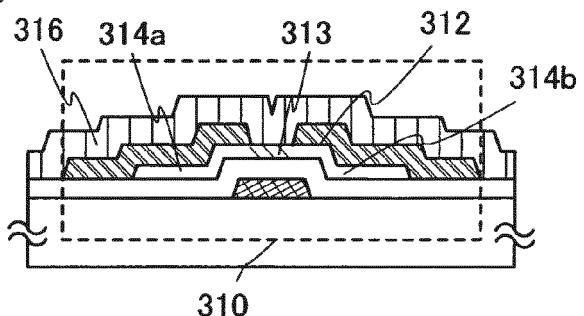


FIG. 11E

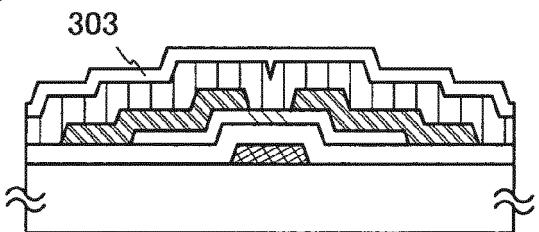


FIG. 12A

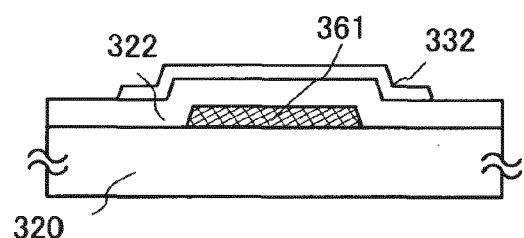


FIG. 12B

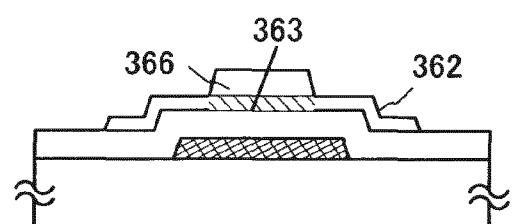


FIG. 12C

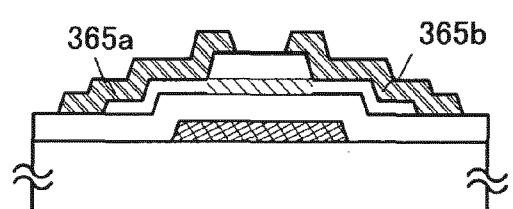


FIG. 12D

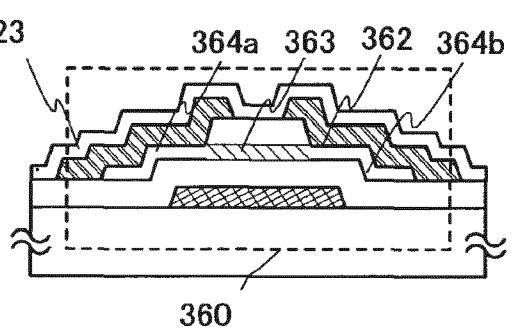


FIG. 13A

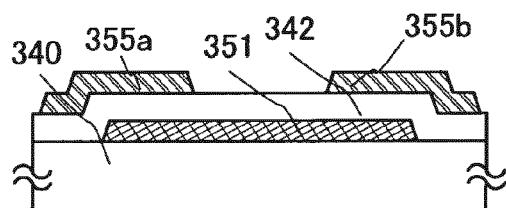


FIG. 13B

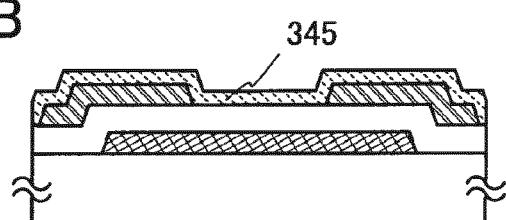


FIG. 13C

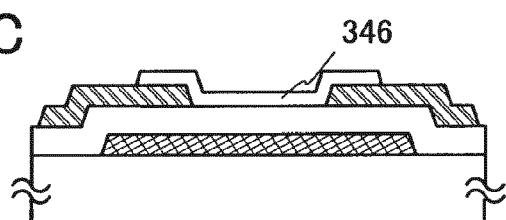


FIG. 13D

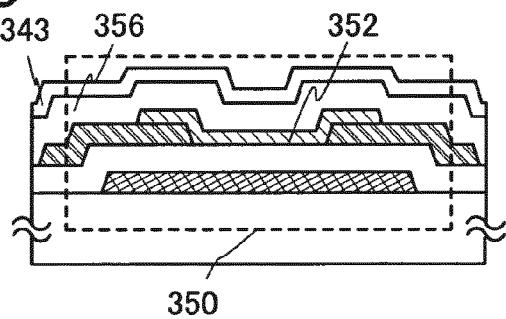


FIG. 14

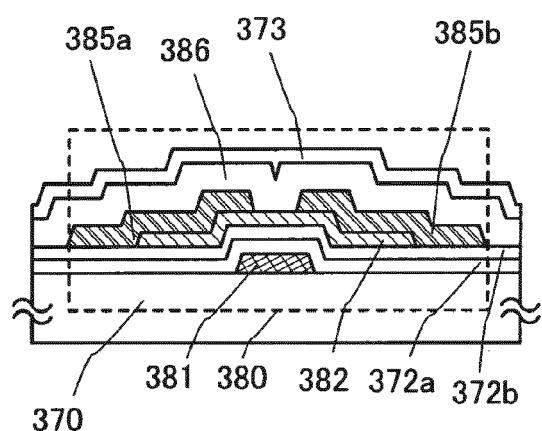


FIG. 15A

FIG. 15C

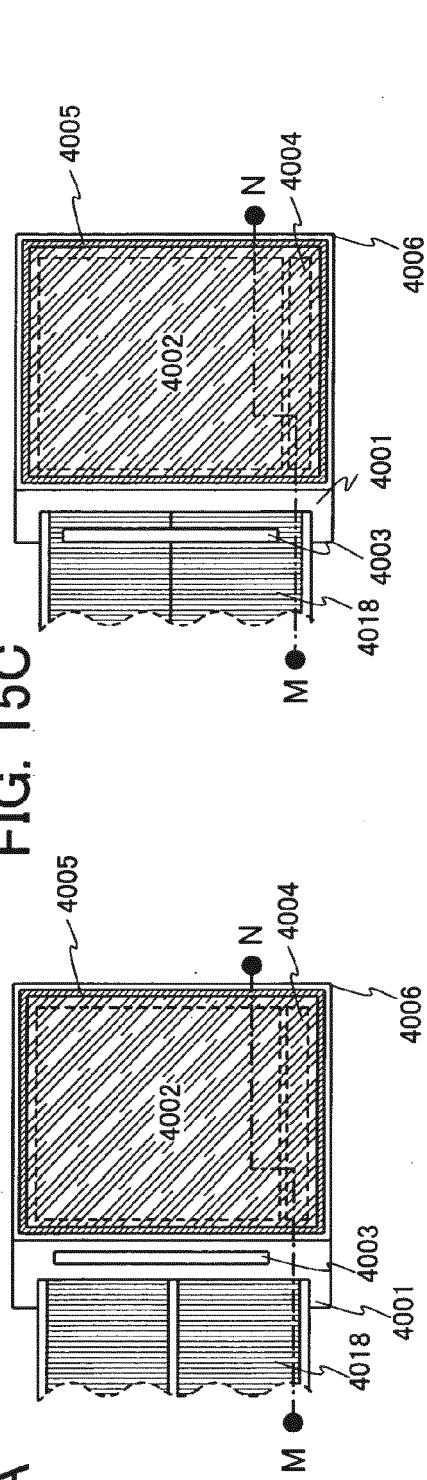


FIG. 15B

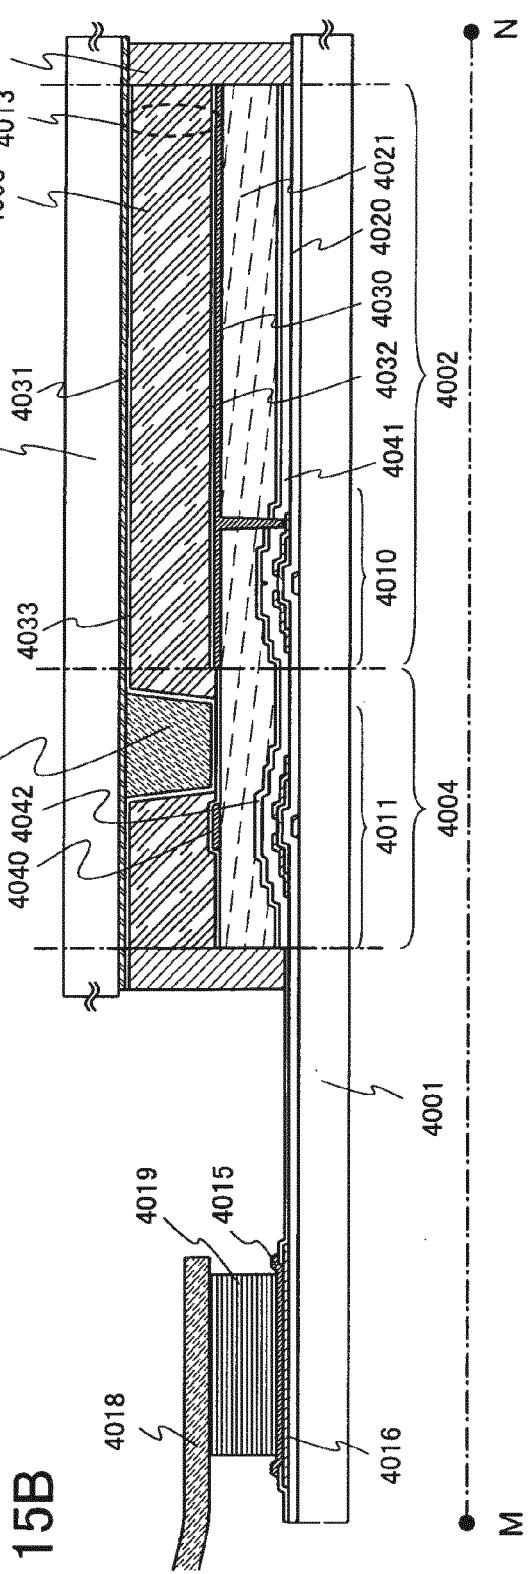


FIG. 16A

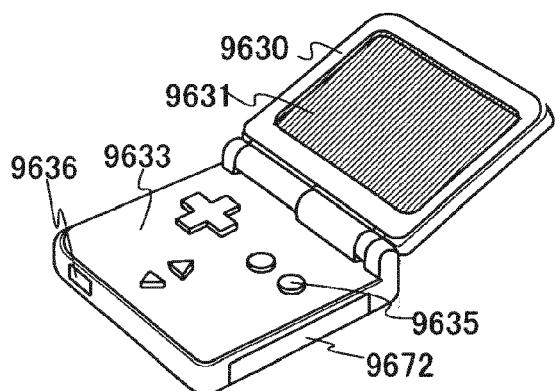


FIG. 16B

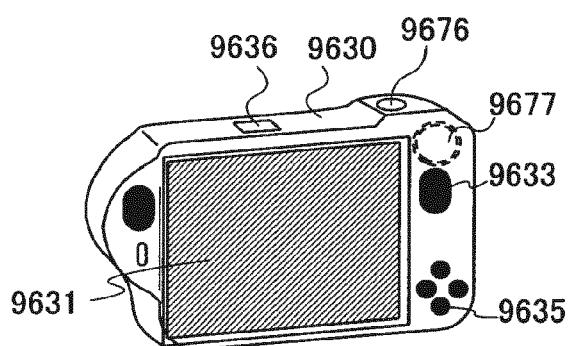


FIG. 16C

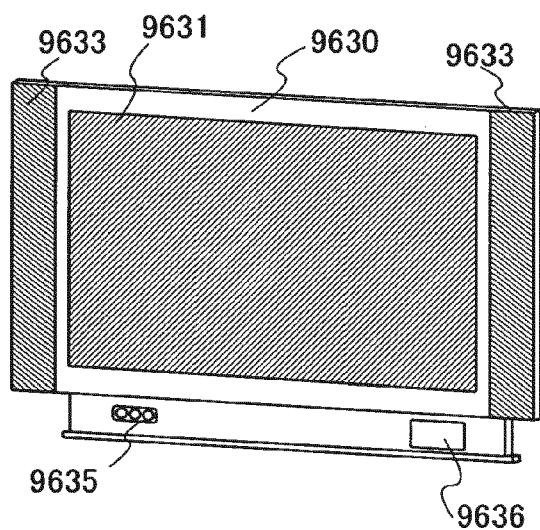


FIG. 17A

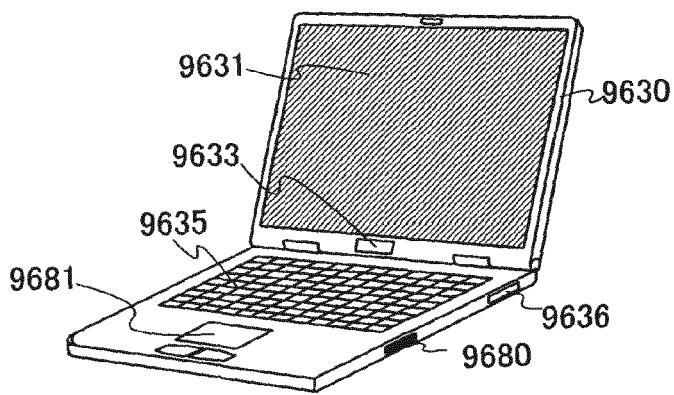


FIG. 17B

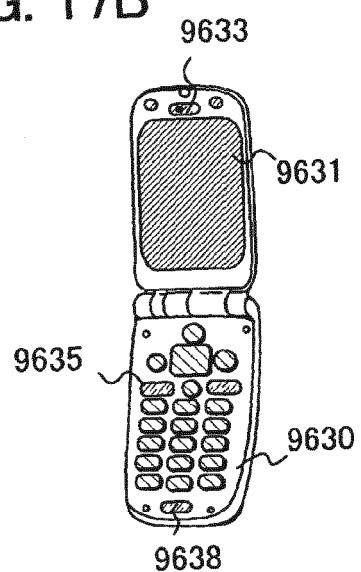


FIG. 17C

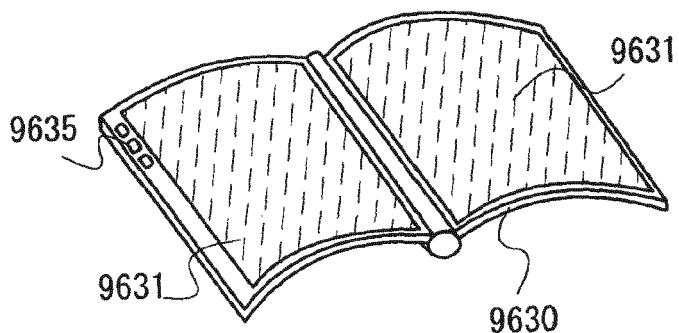


FIG. 18A

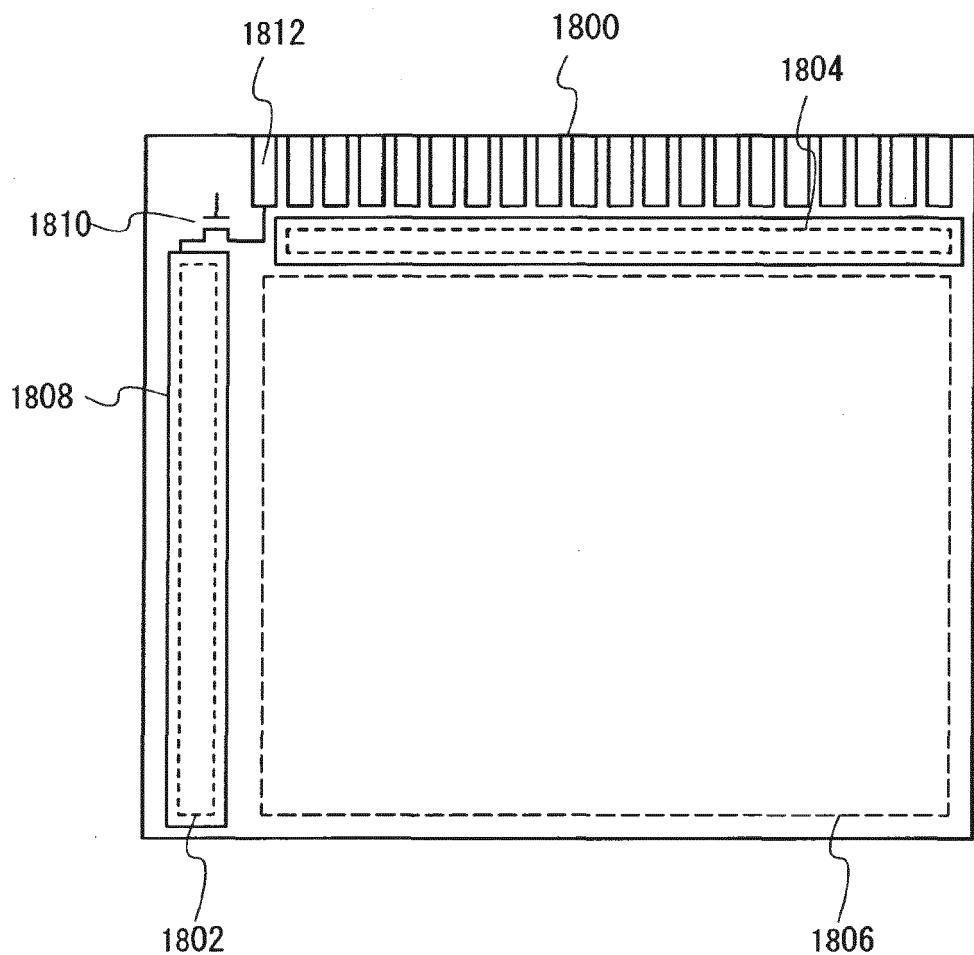


FIG. 18B

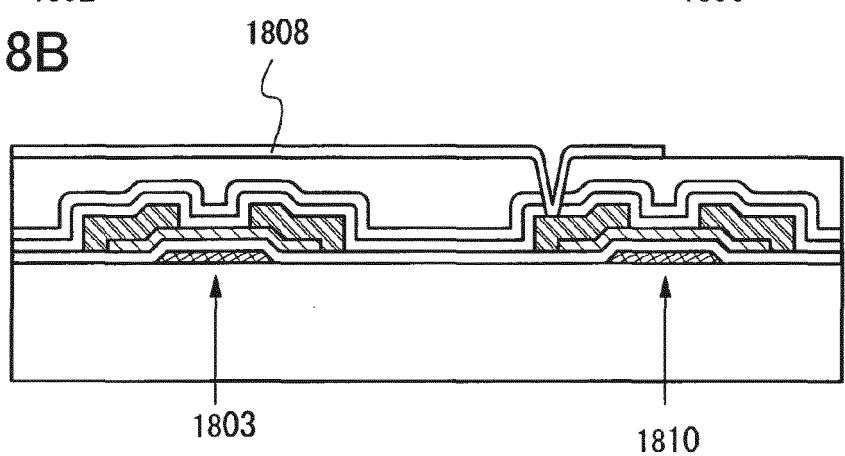


FIG. 19

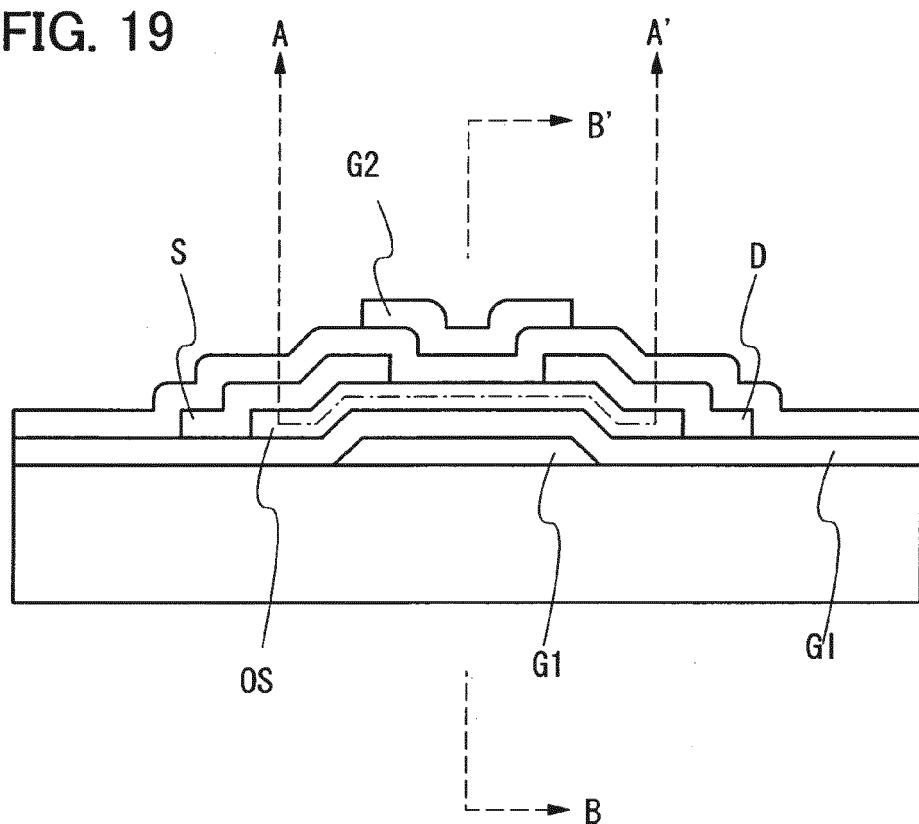


FIG. 20A

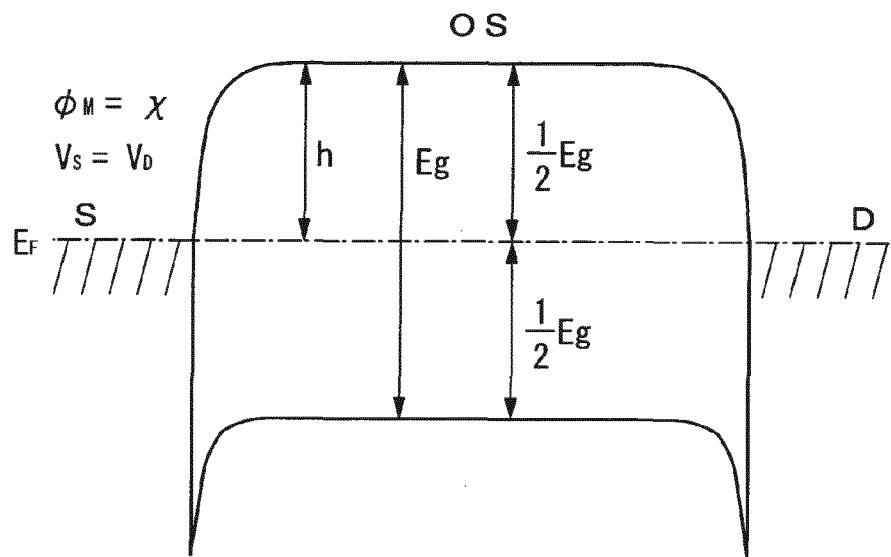


FIG. 20B

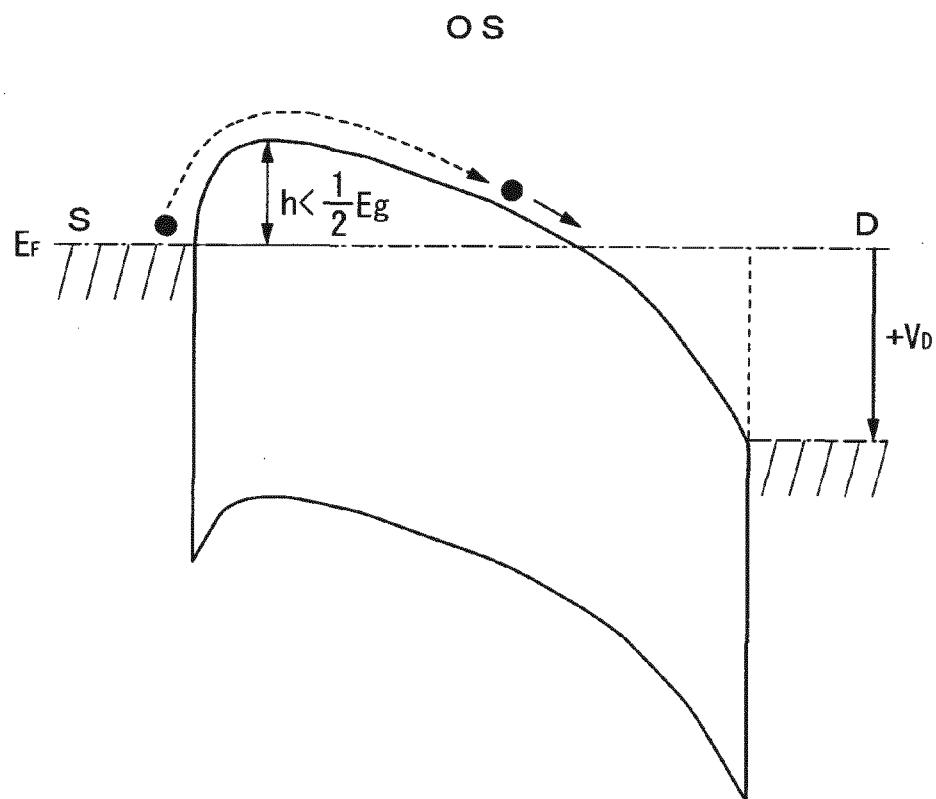


FIG. 21A

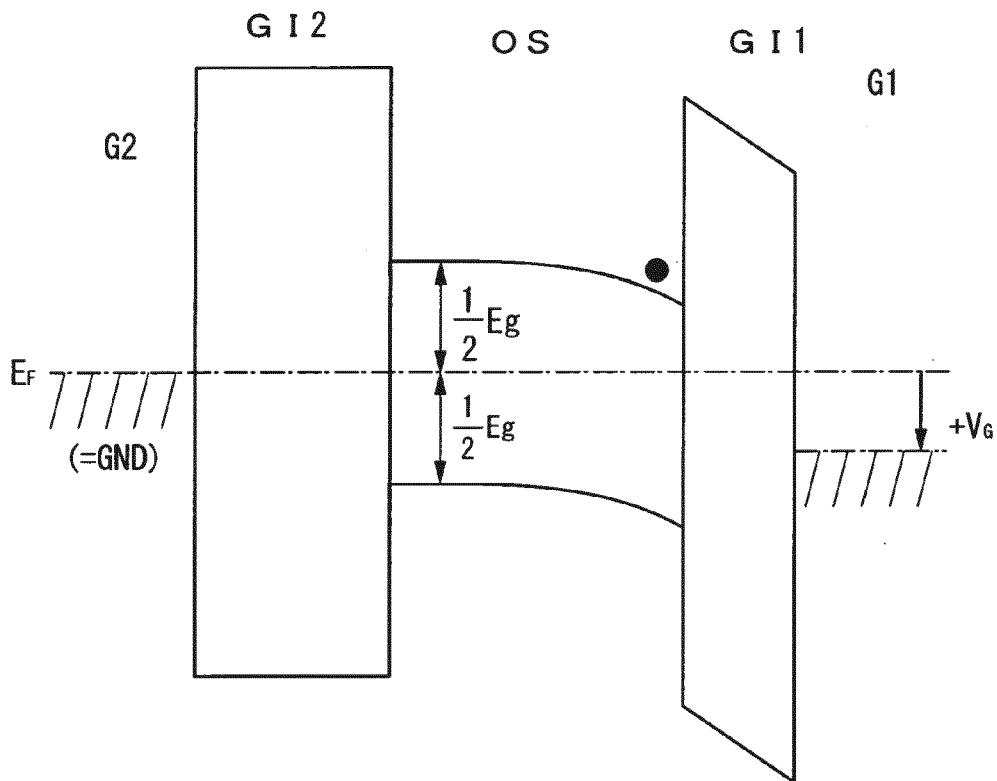


FIG. 21B

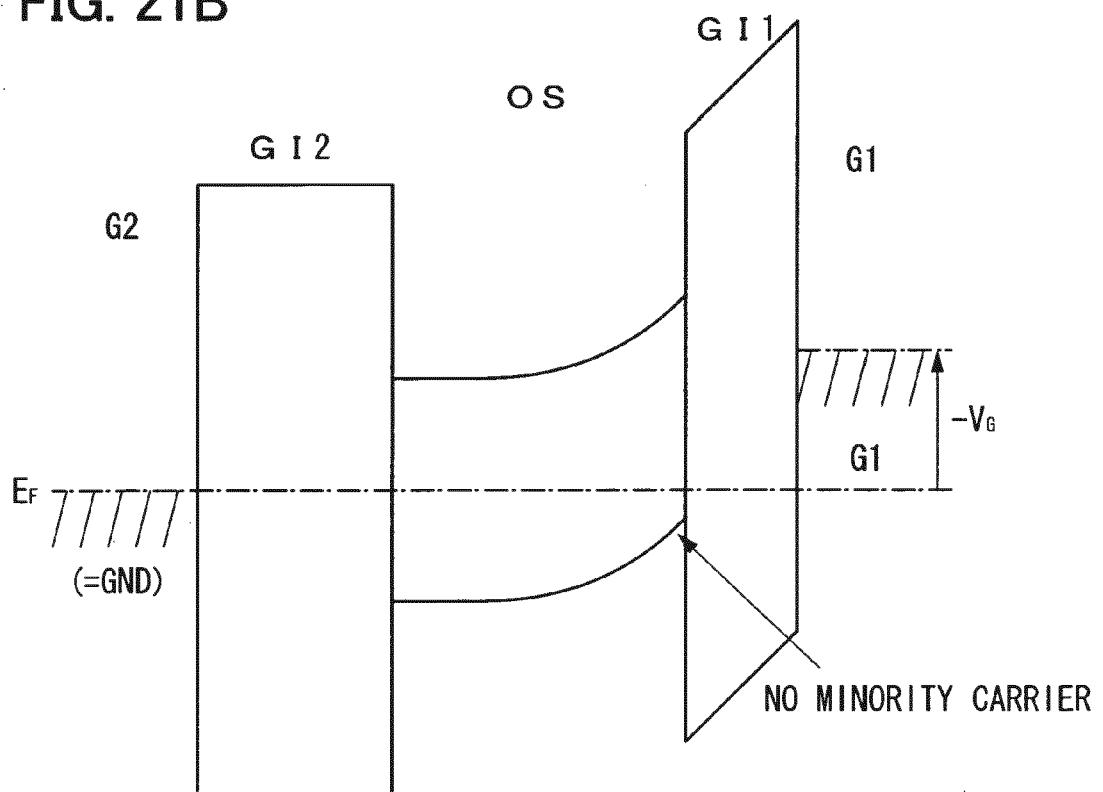


FIG. 22

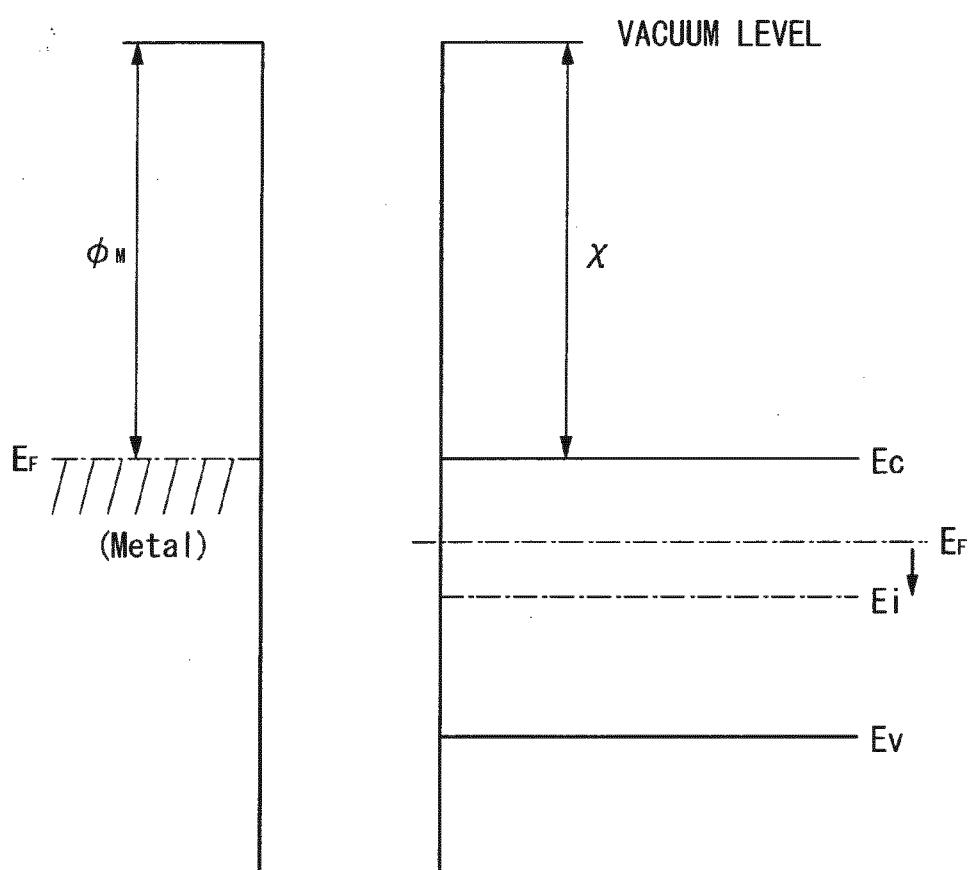


FIG. 23

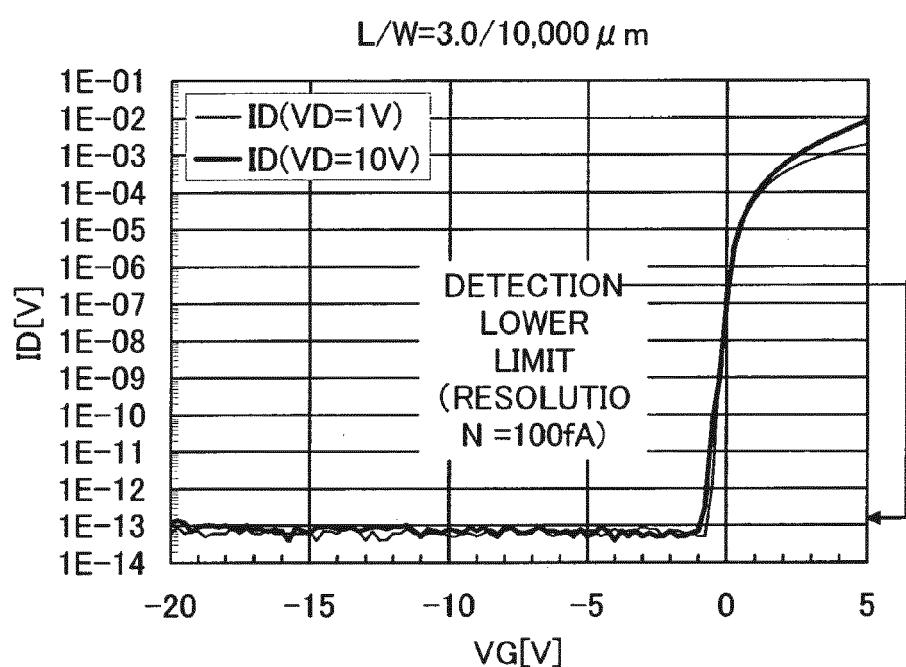


FIG. 24A

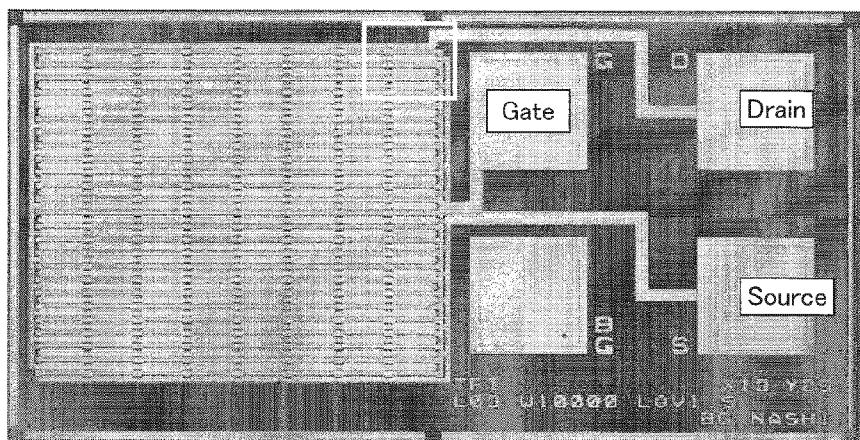


FIG. 24B

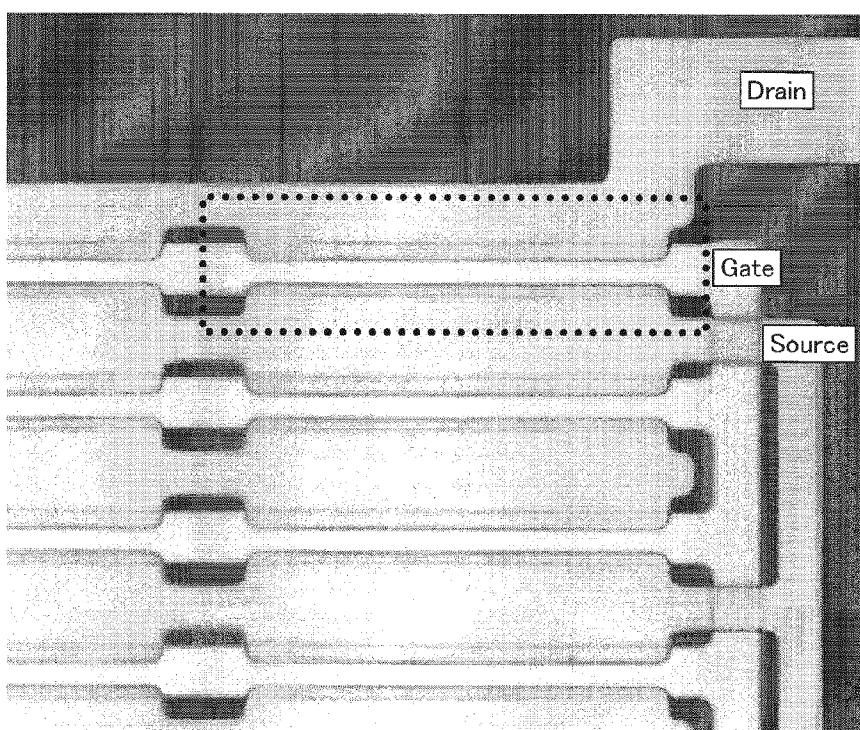


FIG. 25A

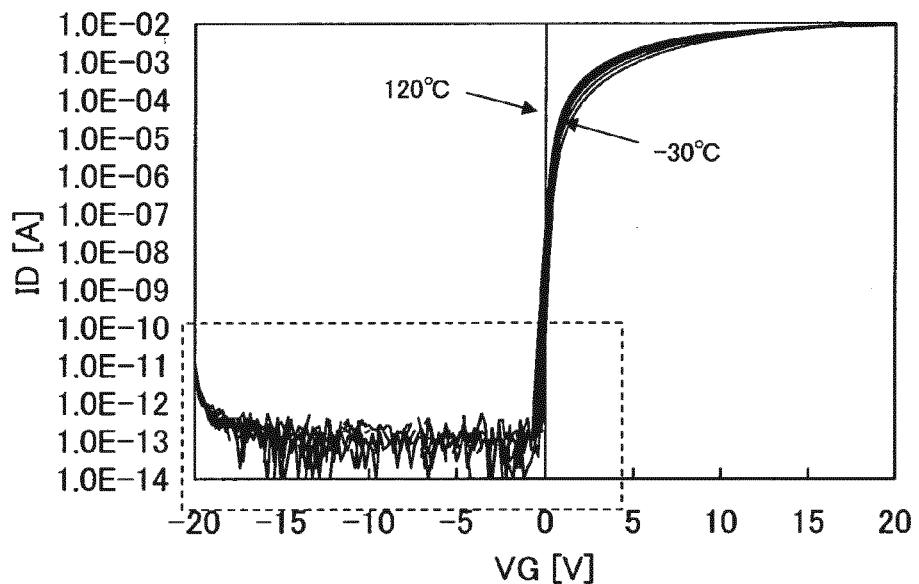
 $L/W=3.0/10,000 \mu m (V_d=6V)$ 

FIG. 25B

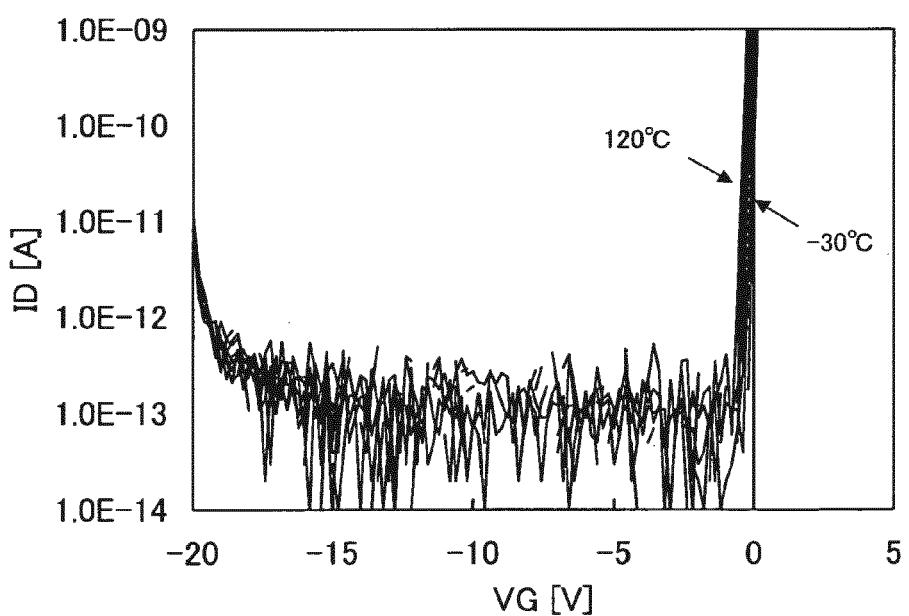
 $L/W=3.0/10,000 \mu m (V_d=6V)$ 

FIG. 26A




FIG. 26B




FIG. 26C

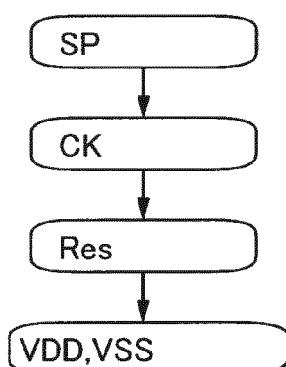


FIG. 26D

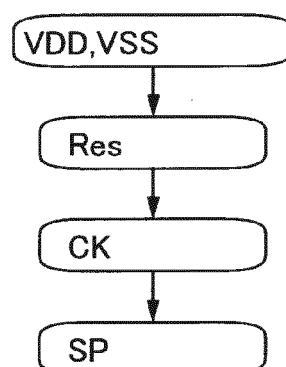


FIG. 27

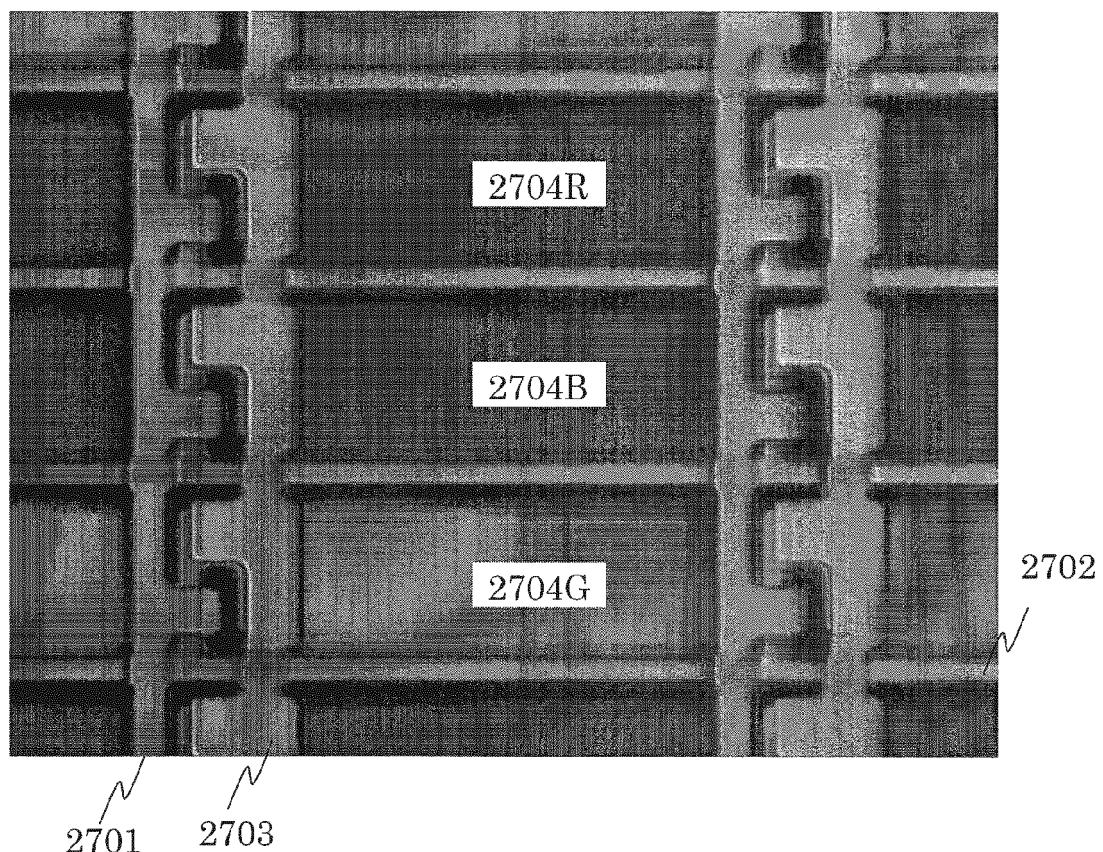


FIG. 28

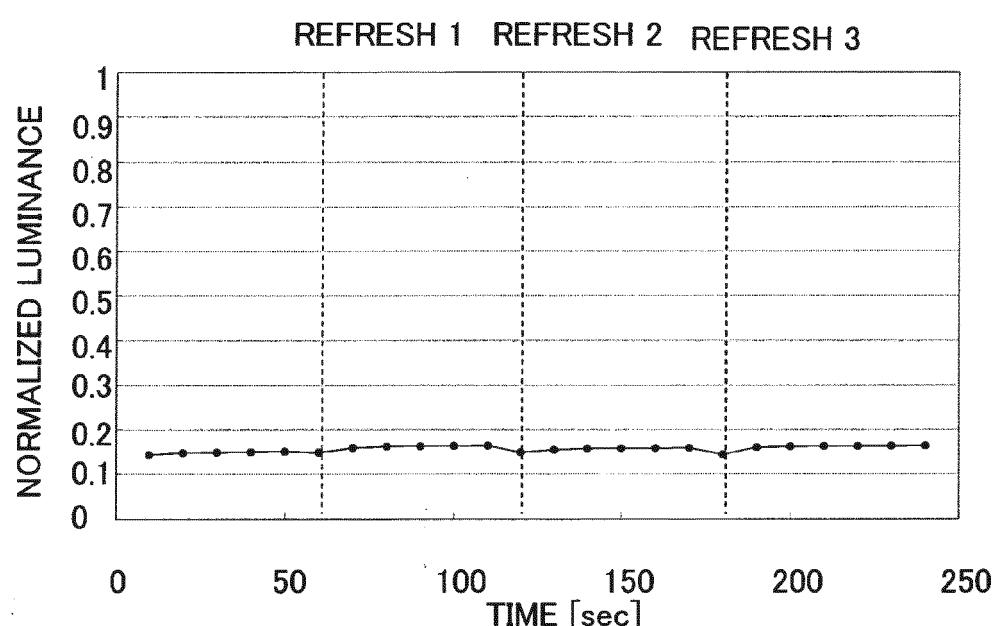


FIG. 29

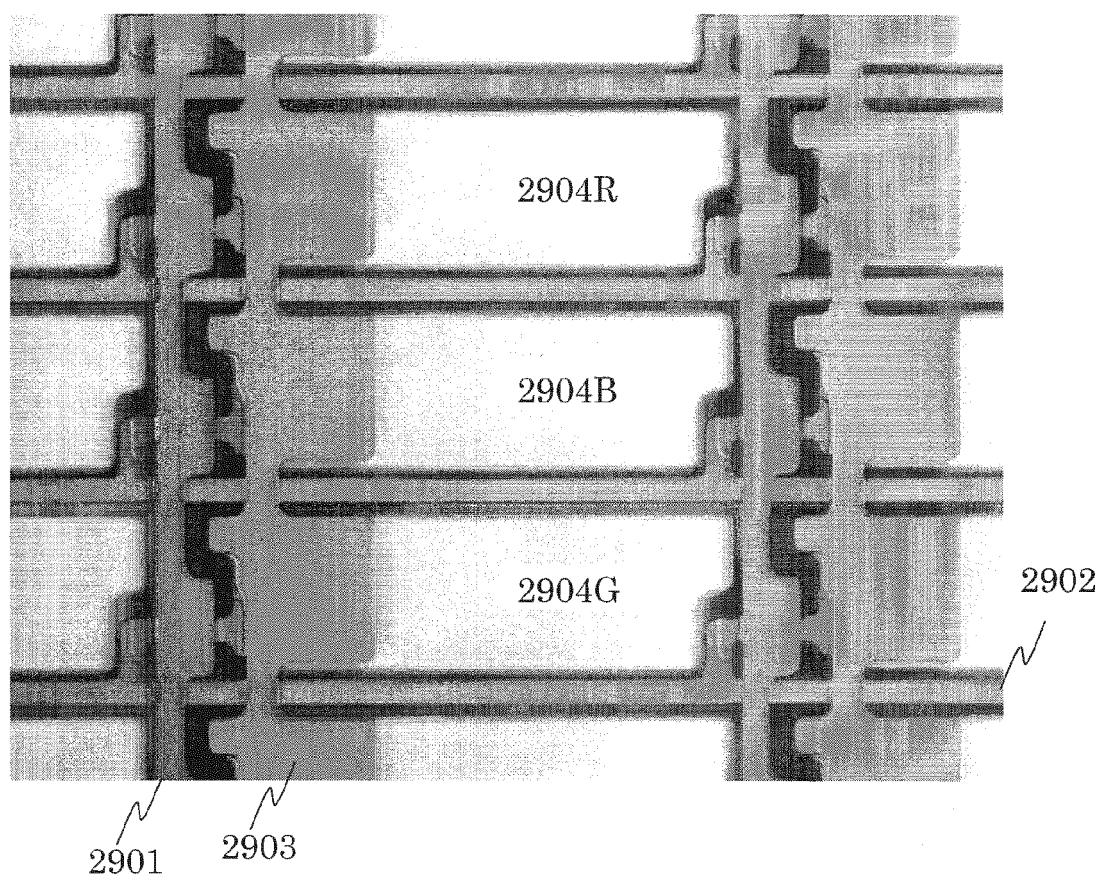


FIG. 30

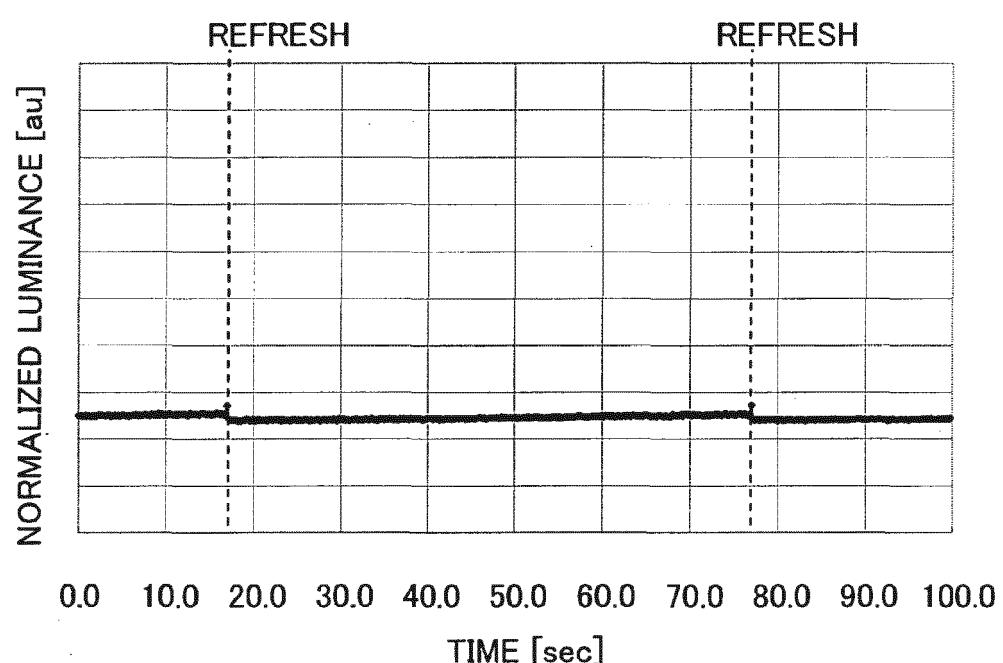


FIG. 31

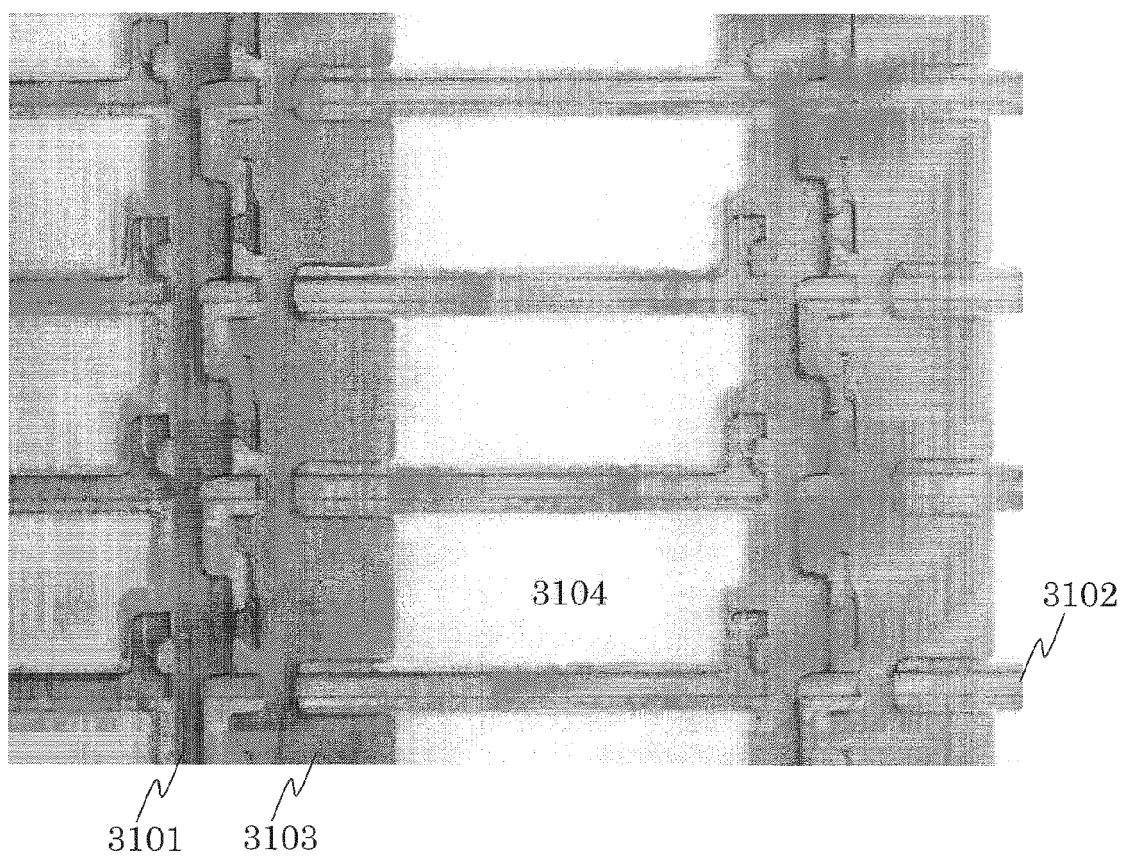


FIG. 32

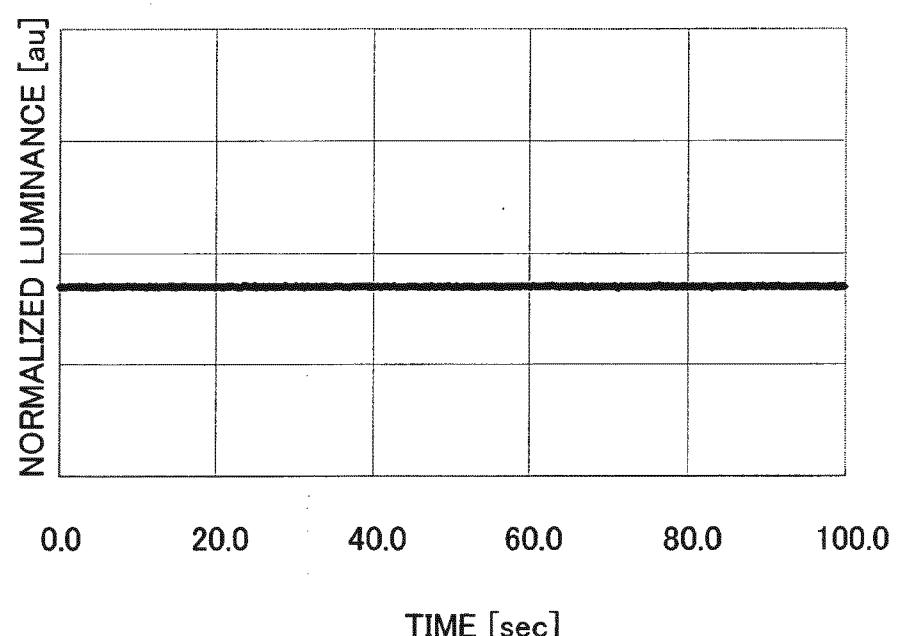


FIG. 33


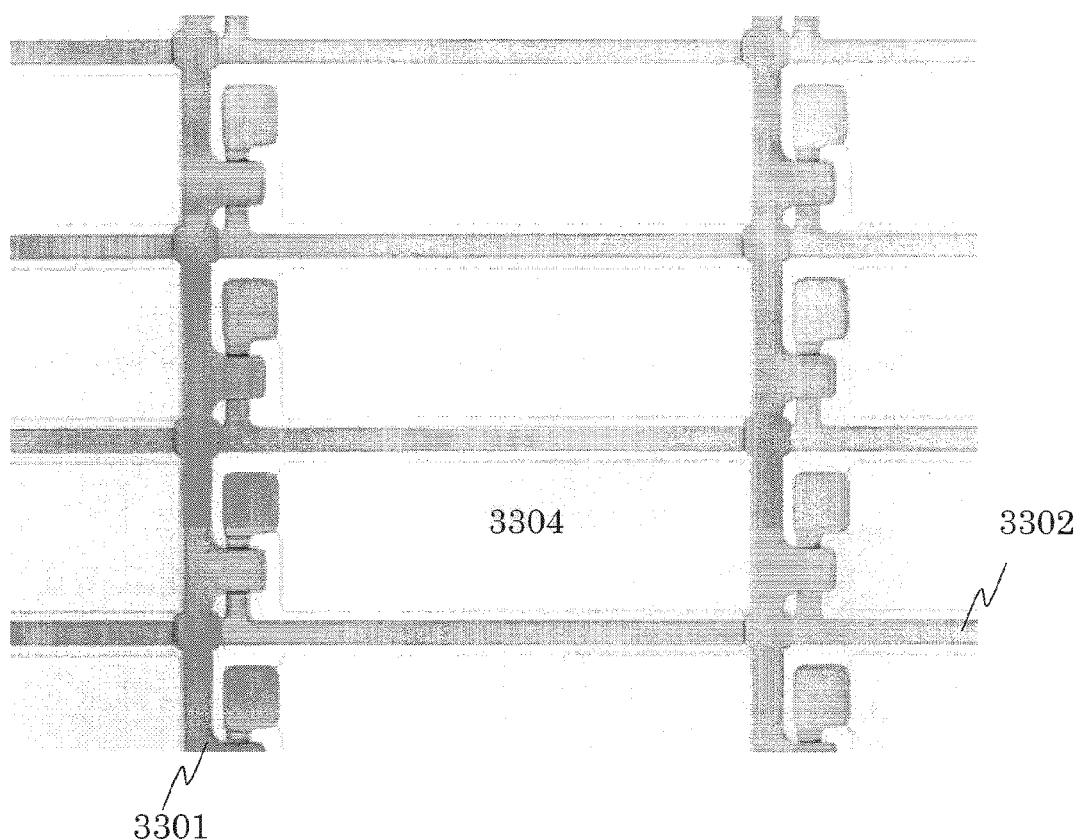


FIG. 34



EXPLANATION OF REFERENCE

1000: liquid crystal display device; 1001: display panel; 1002: signal generation circuit; 1003: memory circuit; 1004: comparison portion; 1005: selection circuit; 1006: display control circuit; 1007: driver circuit portion; 1008: pixel portion; 1010: frame memory; 1009A: gate line driver circuit; 1009B: signal line driver circuit

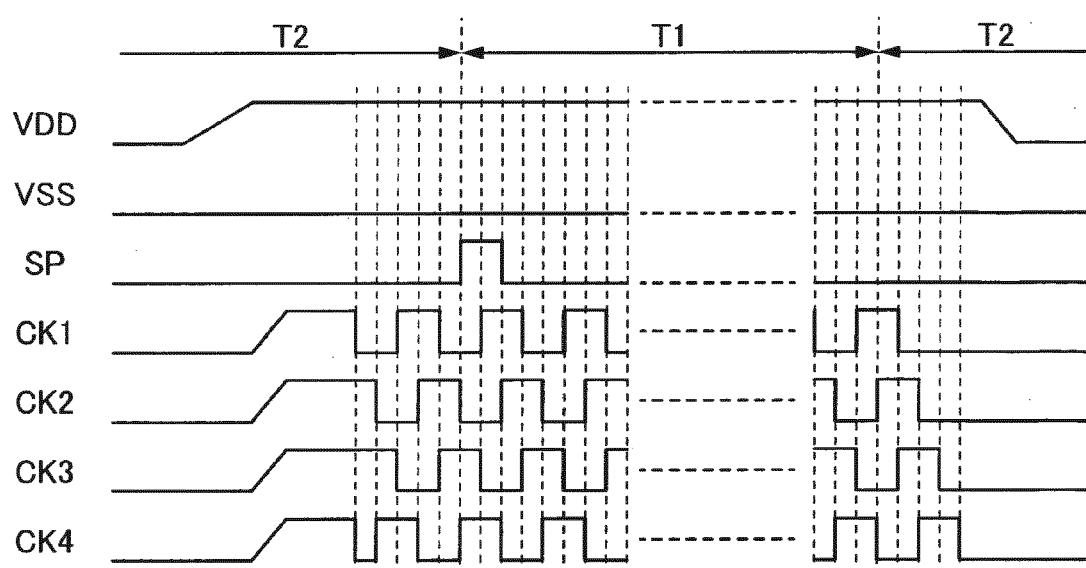

EUROPEAN SEARCH REPORT

Application Number

EP 17 17 3363

5

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	JP H10 10489 A (CASIO COMPUTER CO LTD) 16 January 1998 (1998-01-16) * abstract * * paragraphs [0011], [0013], [0027], [0053] - [0061]; figures 1,6 *	1,2	INV. G09G3/36 G02F1/1368 H01L29/786 H01L27/12
Y	----- A US 2002/093473 A1 (TANAKA KYOUSHI [JP] ET AL) 18 July 2002 (2002-07-18) * abstract * * paragraph [0074] - paragraph [0130]; figures 2-10 *	3-6	ADD. G09G5/18
A	----- US 2009/121998 A1 (OHKAWA HIROYUKI [JP] ET AL) 14 May 2009 (2009-05-14) * abstract * * paragraph [0045] - paragraph [0103]; figures 1-7 *	1-6	
Y	----- CHI-SUN HWANG SANG-HEE KO PARK WOO-SEOK CHEONG JAEHEON SHIN SHINHYUK YANG CHUNWON BYUN MIN KI RYU DOO-HEE CHO SUNG MIN YOON SUNG M: "P-8: Effects of Active Thickness in Oxide Semiconductor TFTs", SID 2009, 2009 SID INTERNATIONAL SYMPO, SOCIETY FOR INFORMATION DISPLAY, LOS ANGELES, USA, vol. XXXX, 31 May 2009 (2009-05-31), pages 1107-1109, XP007017442, ISSN: 0009-966X * abstract; figure 1 * * page 1107 - page 1108 *	3-6	TECHNICAL FIELDS SEARCHED (IPC)
	-----		G09G
The present search report has been drawn up for all claims			
1	Place of search Munich	Date of completion of the search 13 September 2017	Examiner Adarska, Veneta
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 17 3363

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-09-2017

10	Patent document cited in search report	Publication date	Patent family member(s)		Publication date
	JP H1010489 A	16-01-1998	NONE		
15	US 2002093473 A1	18-07-2002	JP 3730159 B2		21-12-2005
			JP 2002278523 A		27-09-2002
			KR 20020061121 A		22-07-2002
			TW 558707 B		21-10-2003
			US 2002093473 A1		18-07-2002
20	US 2009121998 A1	14-05-2009	CN 101336447 A		31-12-2008
			JP 4782191 B2		28-09-2011
			JP WO2007108177 A1		06-08-2009
			US 2009121998 A1		14-05-2009
			WO 2007108177 A1		27-09-2007
25					
30					
35					
40					
45					
50					
55					

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2006165528 A [0004]
- JP 2009238916 A [0541]
- JP 2009273913 A [0541]
- JP 2009278999 A [0541]

专利名称(译)	液晶显示装置和具有该液晶显示装置的电子设备		
公开(公告)号	EP3244394A1	公开(公告)日	2017-11-15
申请号	EP2017173363	申请日	2010-09-28
[标]申请(专利权)人(译)	株式会社半导体能源研究所		
申请(专利权)人(译)	半导体能源研究所有限公司.		
当前申请(专利权)人(译)	半导体能源研究所有限公司.		
[标]发明人	YAMAZAKI SHUNPEI KOYAMA JUN MIYAKE HIROYUKI TSUBUKU MASASHI NODA KOSEI		
发明人	YAMAZAKI, SHUNPEI KOYAMA, JUN MIYAKE, HIROYUKI TSUBUKU, MASASHI NODA, KOSEI		
IPC分类号	G09G3/36 G02F1/1368 H01L29/786 H01L27/12 G09G5/18		
CPC分类号	G02F1/1368 G09G3/3648 G09G3/3674 G09G2320/103 G09G2330/021 G09G2330/022 H01L27/1225 H01L29/7869 G09G3/3611 G09G3/3677 G09G5/18 G09G2310/0286 G09G2330/027 H01L29/06		
优先权	2009238916 2009-10-16 JP 2009273913 2009-12-01 JP 2009278999 2009-12-08 JP		
外部链接	Espacenet		

摘要(译)

一种液晶显示装置的驱动方法，包括驱动电路部分和像素部分，该驱动方法包括步骤：停止向驱动电路部分提供启动脉冲；在停止提供起始脉冲之后停止向驱动电路提供时钟信号；在停止提供时钟信号之后，向驱动电路提供复位信号；在停止提供时钟信号的同时显示图像。

FIG. 1

