



US 20180182303A1

(19) **United States**(12) **Patent Application Publication**
JUNG et al.(10) **Pub. No.: US 2018/0182303 A1**(43) **Pub. Date: Jun. 28, 2018**(54) **ELECTROLUMINESCENT DISPLAY AND
METHOD OF DRIVING THE SAME**(71) Applicant: **LG Display Co., Ltd.**, Seoul (KR)(72) Inventors: **Hwajun JUNG**, Incheon (KR);
Youngsun JANG, Paju-si (KR)(73) Assignee: **LG Display Co., Ltd.**, Seoul (KR)(21) Appl. No.: **15/853,757**(22) Filed: **Dec. 23, 2017**(30) **Foreign Application Priority Data**

Dec. 28, 2016 (KR) 10-2016-0181121

Publication Classification(51) **Int. Cl.**
G09G 3/3291 (2006.01)
G09G 3/3258 (2006.01)(52) **U.S. Cl.**CPC **G09G 3/3291** (2013.01); **G09G 3/3258**
(2013.01); **G09G 2320/043** (2013.01); **G09G**
2320/0233 (2013.01); **H01L 27/3276**
(2013.01); **G09G 2320/064** (2013.01); **G09G**
2310/08 (2013.01); **G09G 2310/027** (2013.01);
G09G 2320/041 (2013.01)(57) **ABSTRACT**

An electroluminescent display and a method of driving the same are disclosed. The electroluminescent display includes a display panel including a plurality of pixels electrically connected to a plurality of data lines and a plurality of gate lines. Each pixel includes a driving element adjusting a current of a light emitting element depending on a gate-to-source voltage, and a switching element supplying a second voltage to the driving element in response to a gate-on voltage of an emission control signal. The switching element is turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time. A source voltage of the driving element is changed during the real-time compensation time.

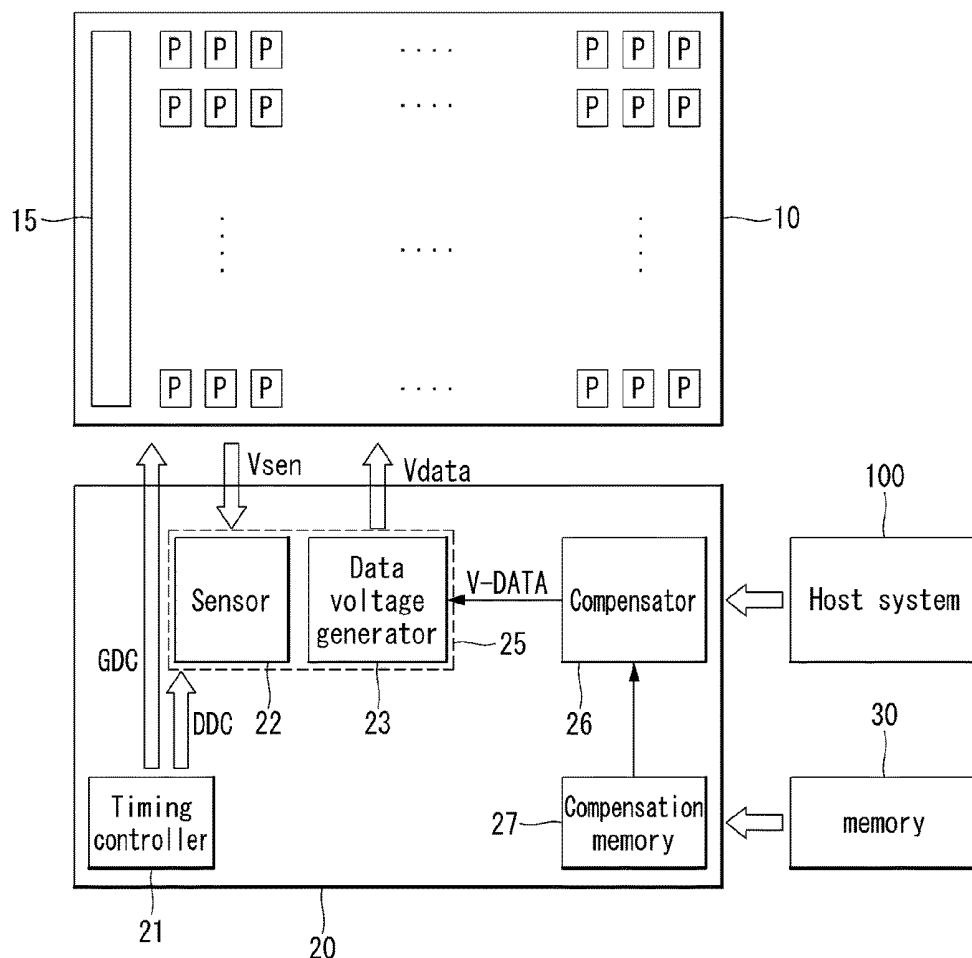


FIG. 1

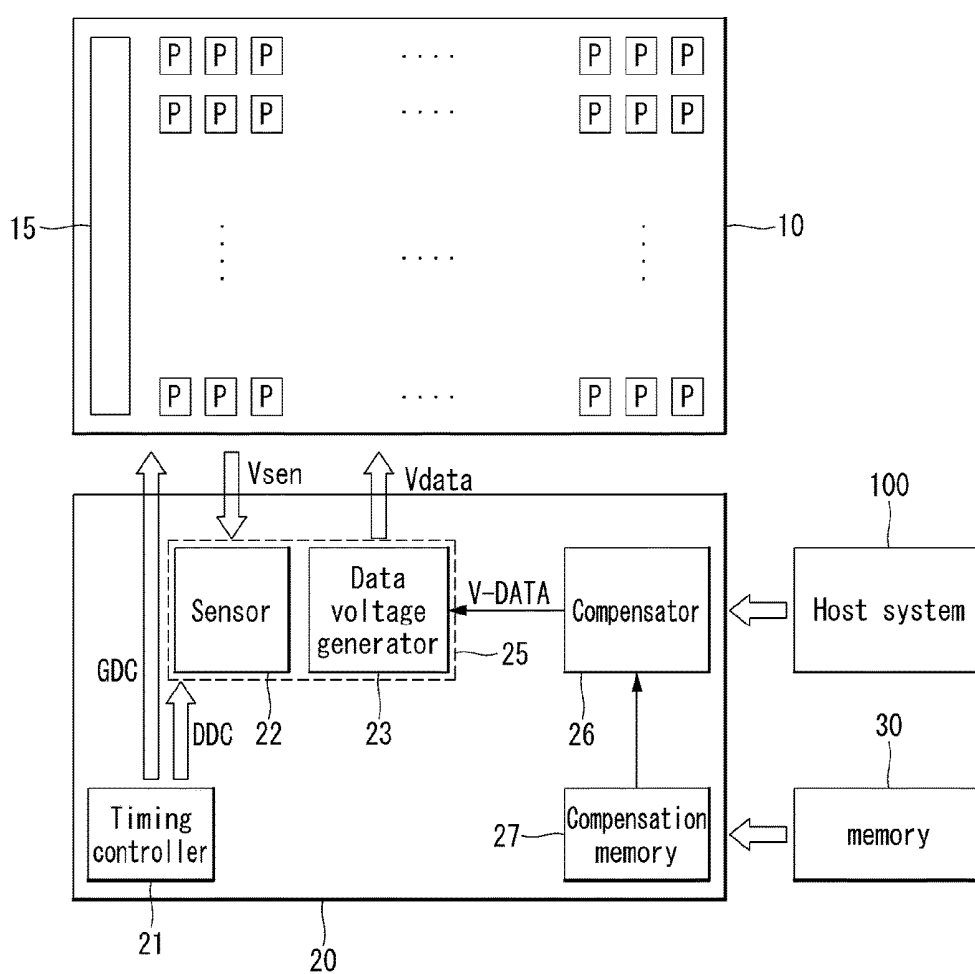


FIG. 2

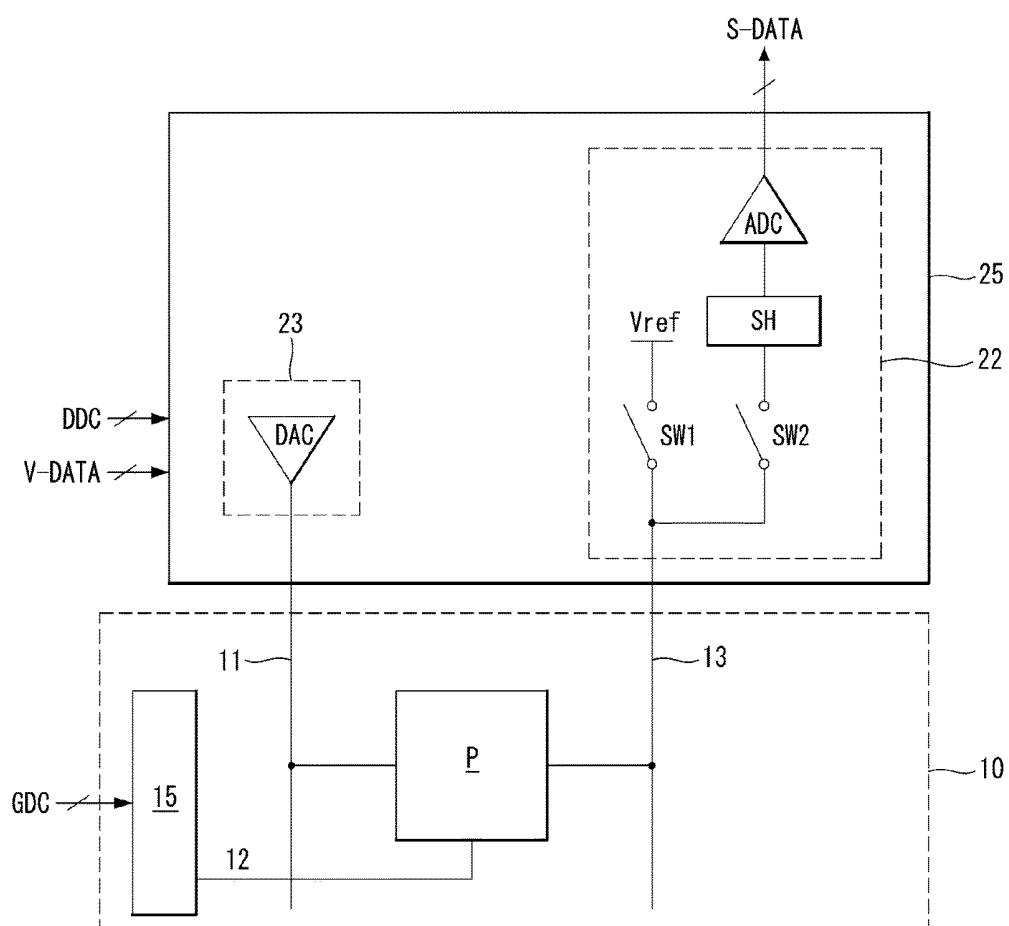


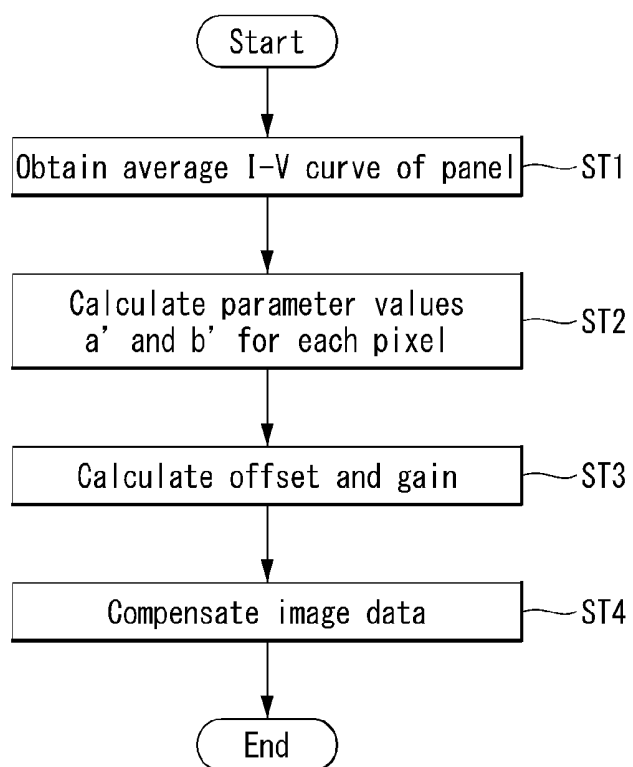
FIG. 3

FIG. 4A

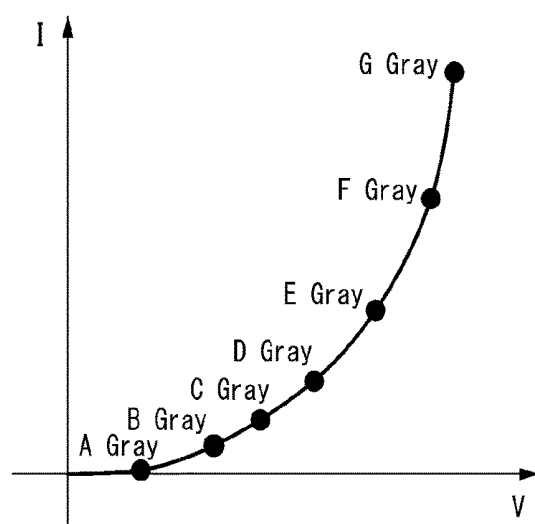


FIG. 4B

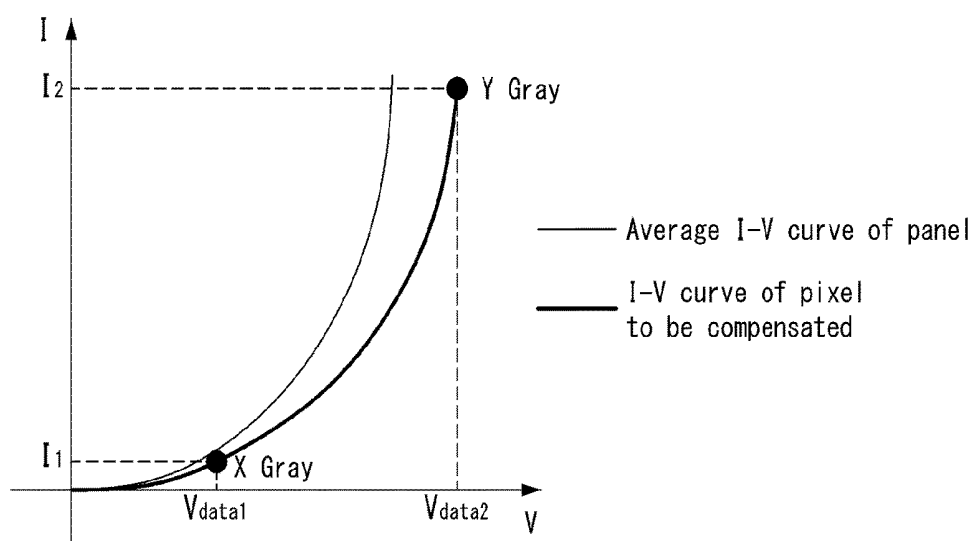


FIG. 4C

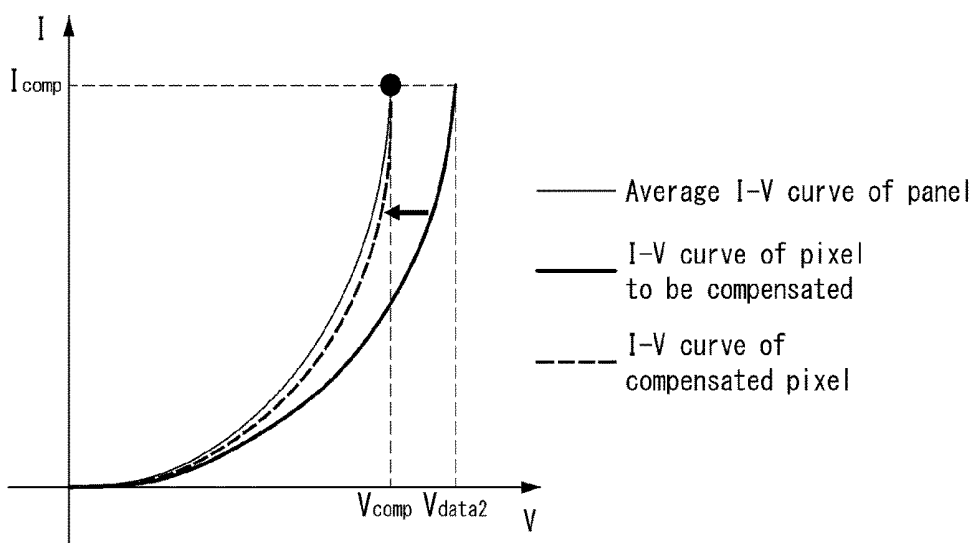


FIG. 5A

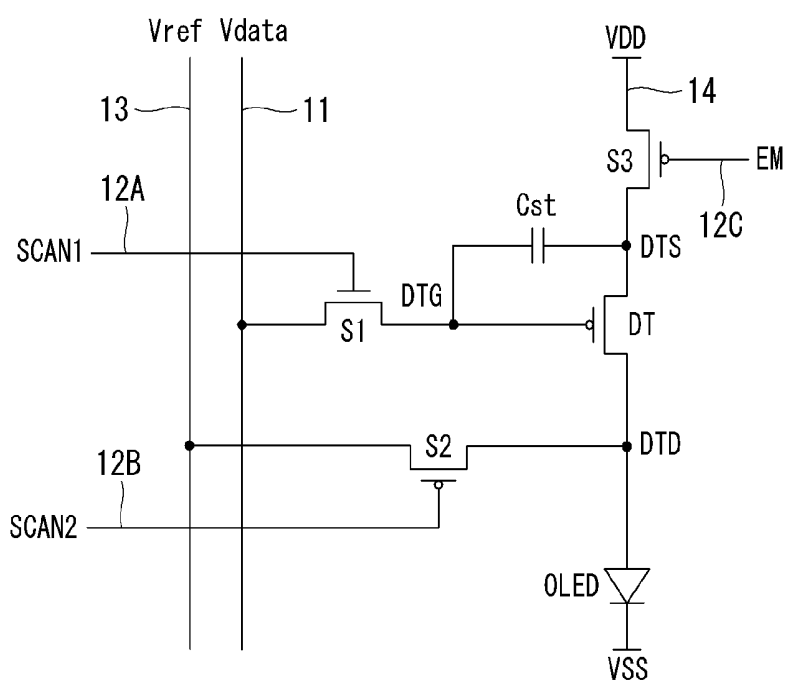


FIG. 5B

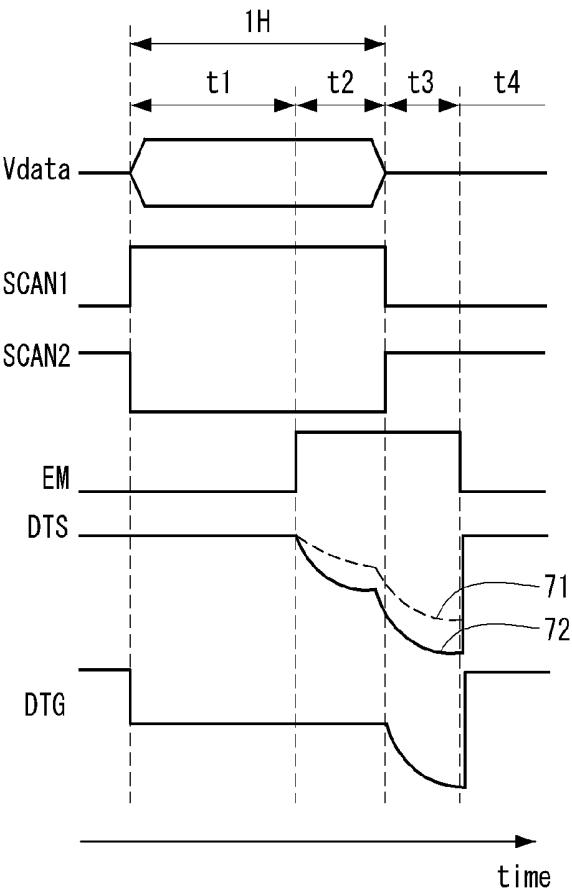


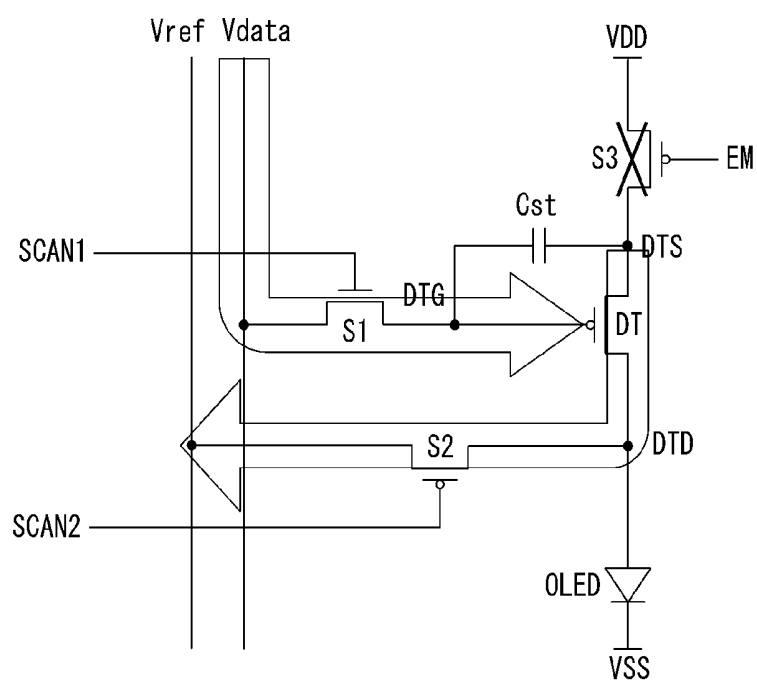
FIG. 6

FIG. 7

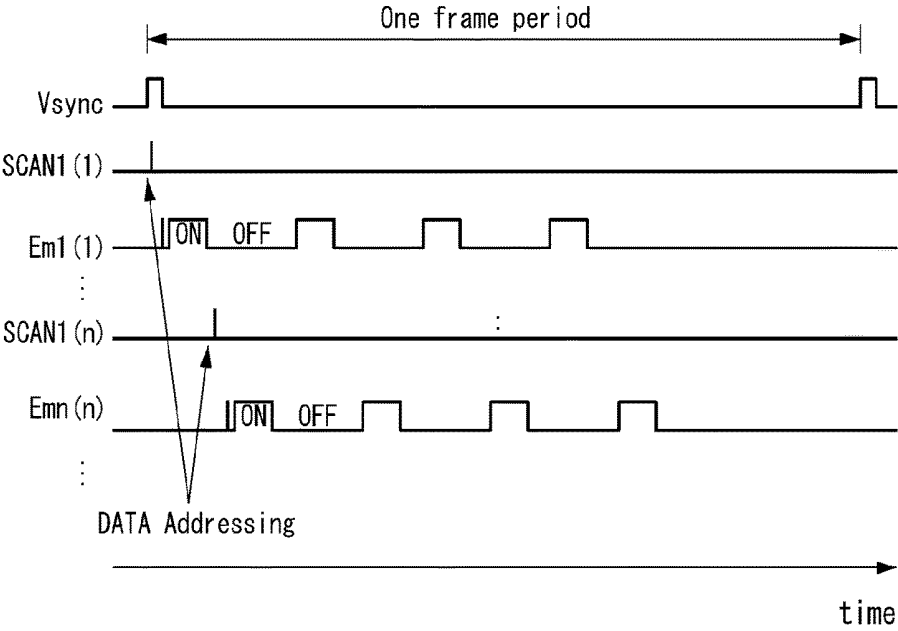


FIG. 8

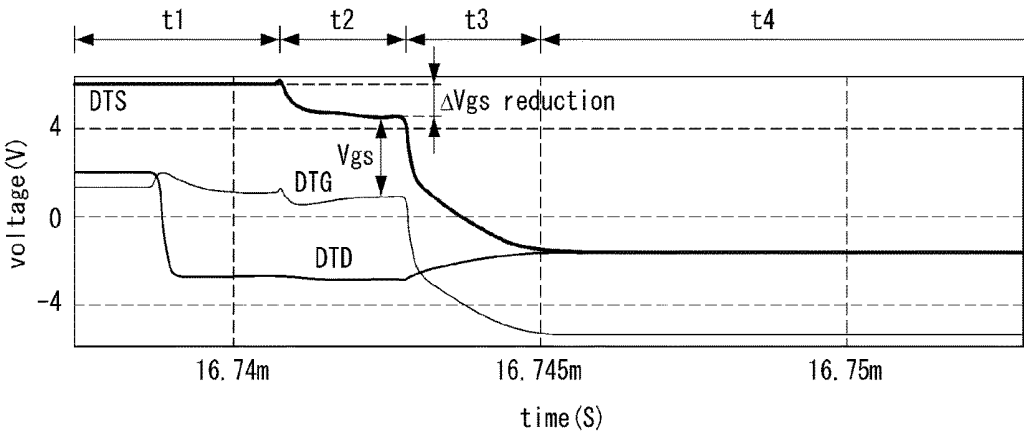


FIG. 9A

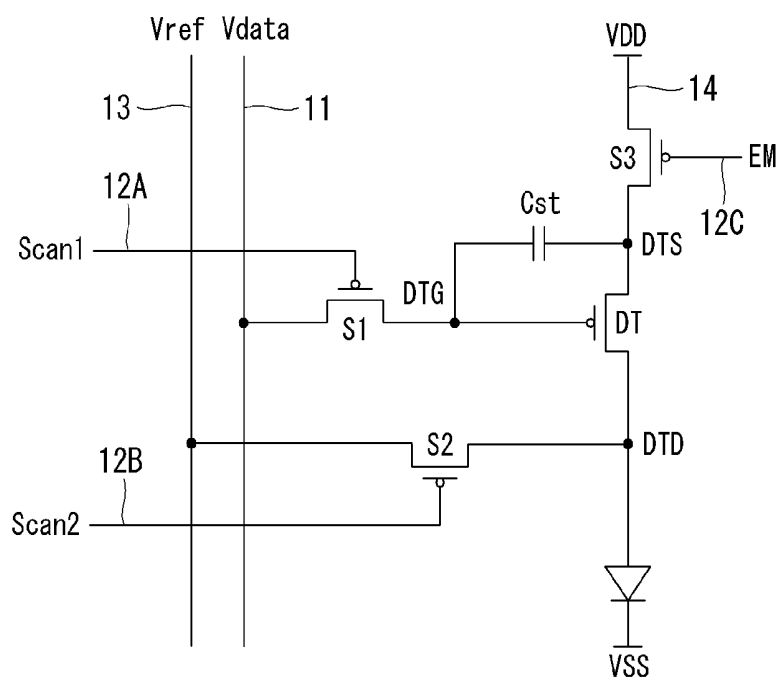


FIG. 9B

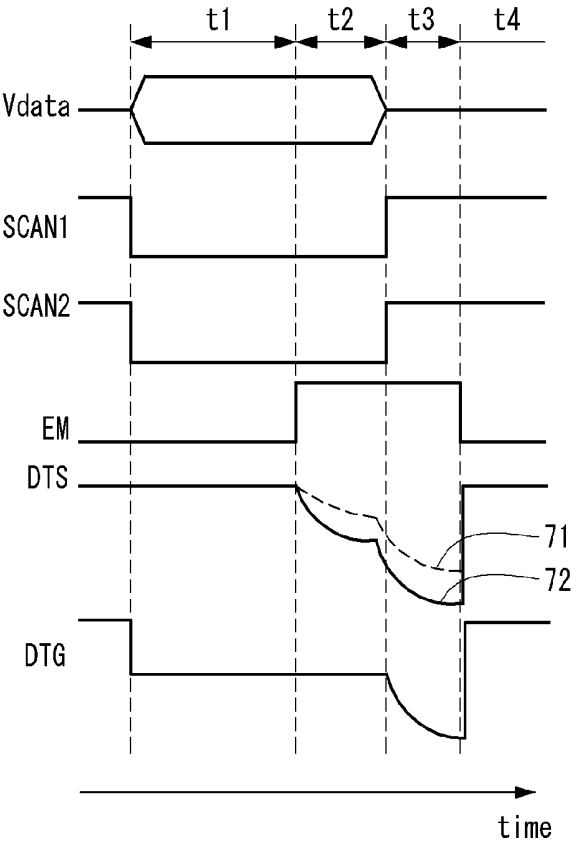
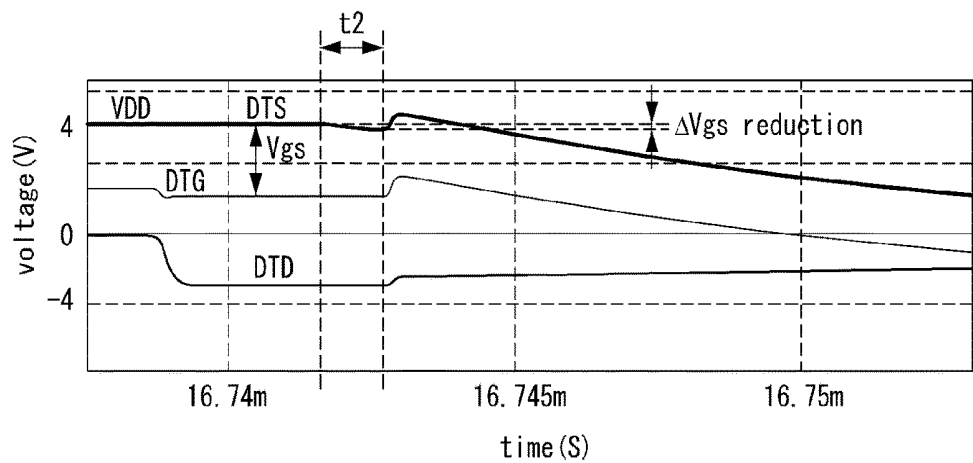


FIG. 10



ELECTROLUMINESCENT DISPLAY AND METHOD OF DRIVING THE SAME

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of Korean Patent Application No. 10-2016-0181121 filed on Dec. 28, 2016, the entire contents of which is incorporated herein by reference for all purposes as if fully set forth herein.

BACKGROUND

Field of the Disclosure

[0002] The present disclosure relates to a display device, and more particularly, to an electroluminescent display device and a method of driving the same.

Description of the Background

[0003] An electroluminescent display device is classified into an inorganic electroluminescent display device and an organic electroluminescent display device depending on a material of an emission layer. An active matrix organic light emitting diode (OLED) display includes a plurality of OLEDs capable of emitting light by themselves as a general electroluminescent diode and has many advantages, such as fast response time, high emission efficiency, high luminance, wide viewing angle, and the like.

[0004] An OLED serving as a self-emitting element includes an anode electrode, a cathode electrode, and an organic compound layer between the anode electrode and the cathode electrode. The organic compound layer generally includes a hole injection layer HIL, a hole transport layer HTL, an emission layer EML, an electron transport layer ETL, and an electron injection layer EIL. When a power voltage is applied to the anode electrode and the cathode electrode, holes passing through the hole transport layer HTL and electrons passing through the electron transport layer ETL move to the emission layer EML and combine, thereby forming excitons. As a result, the emission layer EML generates visible light by the excitons.

[0005] An OLED display includes a plurality of pixels, each including an OLED and a driving thin film transistor (TFT), in a matrix form and adjusts a luminance of an image implemented on the pixels based on a grayscale of image data. The driving TFT controls a driving current flowing in the OLED depending on a voltage (hereinafter, referred to as "a gate-to-source voltage") between a gate electrode and a source electrode of the driving TFT. An amount of light emitted by the OLED and a luminance of an image are determined depending on the driving current of the OLED.

[0006] In general, when a driving TFT operates in a saturation region, a driving current I_{ds} flowing between a drain electrode and a source electrode of the driving TFT is expressed as follows:

$$I_{ds} = (\frac{1}{2}) * (\mu * C * W / L) * (V_{gs} - V_{th})^2$$

[0007] In the above Equation, μ is electron mobility, "C" is a capacitance of a gate insulating layer, "W" is a channel width of the driving TFT, and "L" is a channel length of the driving TFT. And, V_{gs} is a gate-to-source voltage of the driving TFT, and V_{th} is a threshold voltage (or a critical voltage) of the driving TFT. The gate-to-source voltage V_{gs} of the driving TFT may be a voltage differential between a

data voltage and a reference voltage depending on a pixel structure. The data voltage is an analog voltage corresponding to a grayscale of image data, and the reference voltage is a fixed voltage. Therefore, the gate-to-source voltage V_{gs} of the driving TFT is programmed or set depending on the data voltage. Then, the driving current I_{ds} is determined based on the programmed gate-to-source voltage V_{gs} .

[0008] Electrical characteristics of the pixel, such as a threshold voltage V_{th} and an electron mobility μ of the driving TFT and a threshold voltage of the OLED, may be factors determining an amount of driving current I_{ds} of the driving TFT. Therefore, all pixels should have the same electrical characteristics. However, a variation in the electrical characteristics between the pixels may be generated due to various causes such as process variation and time-varying characteristics. The variation in the electrical characteristics between the pixels may lead to deterioration in image quality and reduction in lifespan.

[0009] An internal compensation method and an external compensation method may be applied to compensate for such a variation in electrical characteristics of the driving TFT. The internal compensation method automatically compensates for the variation in the electrical characteristics of the driving TFT between the pixels using the gate-to-source voltage of the driving TFT varying depending on the electrical characteristics of the driving TFT. The external compensation method senses a voltage of the pixel varying depending on the electrical characteristics of the driving TFT and modulates data of an input image based on the sensed voltage using an external circuit, thereby compensating for the variation in the electrical characteristics of the driving TFT between the pixels.

SUMMARY

[0010] The present disclosure provides an electroluminescent display device and a method of driving the same capable of compensating for change in electrical characteristics of pixels in real time.

[0011] An electroluminescent display device according to the present disclosure comprises a display panel including a plurality of pixels connected to a plurality of data lines and a plurality of gate lines. Each pixel includes a driving element adjusting a current of a light emitting element depending on a gate-to-source voltage, and a switching element supplying a first supply voltage to the driving element in response to a gate-on voltage of an emission control signal, the switching element being turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time. A source voltage of the driving element is changed for the real-time compensation time.

[0012] An electroluminescent display according to the present disclosure comprises a display panel including a plurality of data lines and a plurality of gate lines and a plurality of pixels, a data driver adding a compensation value to data of an input image, converting the data, to which the compensation value is added, into a data voltage, and outputting the data voltage to the data lines, and a gate driver generating a first scan signal, a second scan signal, and an emission control signal.

[0013] Each pixel includes a driving element adjusting a current of a light emitting element depending on a gate-to-source voltage, and a switching element supplying a first supply voltage to the driving element in response to a

gate-on voltage of the emission control signal, the switching element being turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time. A source voltage of the driving element is changed during the real-time compensation time, and mobility of the driving element and a temperature variation of the display panel are compensated. A variation in a threshold voltage of the driving element is compensated by the compensation value.

[0014] An electroluminescent display according to the present disclosure comprises a display panel including a plurality of data lines and a plurality of gate lines and a plurality of pixels. Each pixel includes an electroluminescent diode, a driving thin film transistor (TFT) adjusting a current of the electroluminescent diode depending on a gate-to-source voltage, a storage capacitor connected between a gate and a source of the driving TFT, a first switching TFT turned on in response to a gate-on voltage of a first scan signal and configured to connect the data line supplied with a data voltage to a first node of the pixel, a second switching TFT turned on in response to a gate-on voltage of a second scan signal and connected to a sensing line supplied with a reference voltage, and a third switching TFT turned on in response to a gate-on voltage of an emission control signal and configured to supply a first supply voltage to the source of the driving TFT. The third switching TFT is turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time, and a source voltage of the driving TFT is changed during the real-time compensation time.

[0015] A method of driving an electroluminescent display including a driving element adjusting a current of a light emitting element of each pixel to a gate-to-source voltage according to the present disclosure comprises supplying a first supply voltage to the driving element in response to a gate-on voltage of an emission control signal, and blocking a path between the driving element and the first supply voltage using a switching element, that is turned off in response to a gate-off voltage of the emission control signal for a real-time compensation time. A source voltage of the driving element is changed during the real-time compensation time to compensate for an electron mobility of the driving element and a temperature variation of the display panel.

[0016] A method of driving an electroluminescent display including a driving element adjusting a current of a light emitting element of each pixel depending on a gate-to-source voltage according to the present disclosure comprises adding a previously set compensation value to data of an input image, converting the data, to which the compensation value is added, into a data voltage, and applying the data voltage to the pixel to compensate for a threshold voltage of the driving element, supplying a first supply voltage to the driving element in response to a gate-on voltage of an emission control signal, and blocking a path between the driving element and the first supply voltage using a switching element, that is turned off in response to a gate-off voltage of the emission control signal for a real-time compensation time, to compensate for a variation in mobility of the driving element and a temperature variation in real time.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The accompanying drawings, which are included to provide a further understanding of the disclosure and are

incorporated in and constitute a part of this specification, illustrate aspects of the disclosure and together with the description serve to explain the principles of the disclosure.

[0018] In the drawings:

[0019] FIG. 1 is a block diagram of an electroluminescent display according to an aspect of the present disclosure;

[0020] FIG. 2 is a circuit diagram illustrating an example of a sensing circuit;

[0021] FIG. 3 is a flow chart illustrating an example of an external compensation method using a result of sensing driving characteristics of a pixel;

[0022] FIG. 4A illustrates an example of obtaining a reference curve;

[0023] FIG. 4B illustrates an average I-V curve of a display panel and an I-V curve of a pixel to be compensated;

[0024] FIG. 4C illustrates an average I-V curve of a display panel, an I-V curve of a pixel to be compensated, and an I-V curve of a compensated pixel;

[0025] FIGS. 5A and 5B respectively illustrate a pixel circuit and a method of driving the same according to an aspect;

[0026] FIG. 6 illustrates a flow of a current in a pixel circuit shown in FIG. 5 during a real-time mobility compensation time;

[0027] FIG. 7 is a waveform diagram illustrating an example where an EM signal is modulated at a PWM duty ratio equal to or less than 50% for an emission driving time of a pixel;

[0028] FIG. 8 illustrates a simulation result for verifying a real-time mobility compensation effect of a pixel circuit shown in FIG. 5A;

[0029] FIGS. 9A and 9B respectively illustrate a pixel circuit and a method of driving the same according to another aspect; and

[0030] FIG. 10 illustrates a simulation result for verifying a real-time mobility compensation effect of a pixel circuit shown in FIG. 9A.

DETAILED DESCRIPTION

[0031] Reference will now be made in detail to aspects of the present disclosure, examples of which are illustrated in the accompanying drawings. However, the present disclosure is not limited to aspects disclosed below, and may be implemented in various forms. These aspects are provided so that the present disclosure will be exhaustively and completely described, and will fully convey the scope of the present disclosure to those skilled in the art to which the present disclosure pertains. The present disclosure is only defined by the scope of the claims.

[0032] Shapes, sizes, ratios, angles, number, and the like illustrated in the drawings for describing aspects of the present disclosure are merely exemplary, and the present disclosure is not limited thereto. Like reference numerals designate like elements throughout. In the following description, when a detailed description of well-known functions or configurations related to this document is determined to unnecessarily cloud a gist of the disclosure, the detailed description thereof will be omitted.

[0033] In the present disclosure, when the terms “include”, “have”, “comprised of”, etc. are used, other components may be added unless “~ only” is used. A singular expression can include a plural expression as long as it does not have an apparently different meaning in context.

[0034] In the explanation of components, even if there is no separate description, it is interpreted as including an error range.

[0035] In the description of position relationship, when a structure is described as being positioned “on or above”, “under or below”, “next to” another structure, this description should be construed as including a case in which the structures contact each other as well as a case in which a third structure is disposed therebetween.

[0036] The terms “first”, “second”, etc. may be used to describe various components, but the components are not limited by such terms. The terms are used only for the purpose of distinguishing one component from other components. For example, a first component may be designated as a second component without departing from the scope of the present disclosure.

[0037] The features of various aspects of the present disclosure can be partially combined or entirely combined with each other, and can be technically interlocking-driven in various ways. The aspects can be independently implemented, or can be implemented in conjunction with each other.

[0038] In aspects disclosed herein, a pixel circuit and a gate driver disposed on a substrate of a display panel may be implemented as a thin film transistor (TFT) of n-type or p-type metal oxide semiconductor field effect transistor (MOSFET) structure. Aspects describe a p-type TFT (e.g., a p-type MOSFET (PMOS)) by way of example. However, aspects are not limited thereto, and other types of TFTs may be used. The TFT is a three-electrode element including a gate, a source, and a drain. The source is an electrode for supplying carriers to the TFT. The carriers inside the TFT begin to flow from the source. The drain is an electrode from which the carriers exit the TFT. For example, carriers in the MOSFET flow from a source to a drain. In case of an n-type TFT (e.g., an n-type MOSFET (NMOS)), because carriers are electrons, a source voltage is less than a drain voltage so that electrons can flow from a source to a drain. In the n-type TFT, because electrons flow from the source to the drain, a current flows from the drain to the source. In case of a p-type TFT (e.g., a p-type MOSFET (PMOS)), because carriers are holes, a source voltage is greater than a drain voltage so that holes can flow from a source to a drain. In the p-type TFT, because holes flow from the source to the drain, a current flows from the source to the drain. In aspects disclosed herein, the source and the drain of the MOSFET are not fixed. For example, the source and the drain of the MOSFET may be changed depending on an applied voltage.

[0039] In the following description, a gate-on voltage is a voltage of a gate signal capable of turning on a TFT, and a gate-off voltage is a voltage of the gate signal capable of turning off a TFT. In the PMOS, the gate-on voltage is a gate low voltage VGL, and the gate-off voltage is a gate high voltage VGH. In the NMOS, the gate-on voltage is a gate high voltage VGH, and the gate-off voltage is a gate low voltage VGL.

[0040] Various aspects of the present disclosure will be described in detail below with reference to the accompanying drawings. In the following aspects, an electroluminescent display will be described focusing on an organic light emitting diode (OLED) display including an organic light emitting material. However, it should be noted that aspects of the present disclosure are not limited to the OLED

display, and may be applied to an inorganic light emitting display including an inorganic light emitting material.

[0041] Referring to FIGS. 1 and 2, an electroluminescent display according to an aspect includes a display panel 10, a driver integrated circuit (IC) 20, a host system 100, and a memory 30.

[0042] A screen of the display panel 10 reproducing an input image includes a plurality of pixels P connected to signal lines. Each pixel P includes red (R), green (G), and blue (B) subpixels, in order to represent full color. Each pixel P may further include a white subpixel in addition to the red (R), green (G), and blue (B) subpixels. Each subpixel includes a pixel circuit shown in FIG. 5A.

[0043] The signal lines may include data lines 11 supplying an analog data voltage Vdata to the pixels P and gate lines 12 supplying a gate signal to the pixels P. The gate signal may include two or more signals depending on configuration of the pixel circuit. In the pixel circuit shown in FIG. 5A, the gate signal may include a first scan signal SCAN1, a second scan signal SCAN2, and an emission control signal (hereinafter referred to as “EM signal”) EM. The signal lines may further include sensing lines 13 to sense electrical characteristics of the pixels P.

[0044] The pixels P of the display panel 10 are disposed in a matrix to form a pixel array. Each pixel P may be connected to one of the data lines 11, one of the sensing lines 13, and at least one of the gate lines 12. Each pixel P is configured to receive a high potential power voltage VDD and a low potential power voltage VSS from a power generator. To this end, the power generator may supply the high potential power voltage VDD to the pixel P through a VDD line or a pad and may supply the low potential power voltage VSS to the pixel P through a VSS line or a pad. A high potential power voltage VDD may be referred to as a first supply voltage, and a low potential power voltage VSS may be referred to as a second supply voltage.

[0045] The driver IC 20 includes data driving circuits 22, 23, 26 and 27 and a timing controller 21. The data driving circuits 22, 23, 26 and 27 modulate data to a predetermined compensation value of the pixel P based on the result of sensing the electrical characteristics of the pixels P and generate a data voltage. The timing controller 21 controls operation timings of the data driving circuits 22, 23, 26 and 27 and a gate driver 15. The data driving circuits 22, 23, 26 and 27 add a predetermined compensation value to data of an input image to generate compensation data, convert the compensation data into the data voltage, and supply the data voltage to the data lines 11. The data driving circuits 22, 23, 26 and 27 may include a data driver 25, a compensator 26, and a compensation memory 27. The data driver 25 may include a sensor 22 and a data voltage generator 23. However, aspects are not limited thereto. In some aspects, the compensation memory 27 may be included in the memory 30. In some aspects, the compensator 26 may be configured to include the memory 30.

[0046] The timing controller 21 may generate a gate timing control signal GDC for controlling operation timing of the gate driver 15 and a data timing control signal DDC for controlling operation timing of the data driver 25 based on timing signals, for example, a vertical sync signal Vsync, a horizontal sync signal Hsync, a dot clock signal DCLK, and a data enable signal DE received from the host system 100.

[0047] The data timing control signal DDC may include a source start pulse, a source sampling clock, and a source output enable signal, and the like, but is not limited thereto. The source start pulse controls start timing of data sampling of the data voltage generator **23**. The source sampling clock is a clock signal that controls the sampling timing of data based on a rising edge or a falling edge thereof. The source output enable signal controls output timing of the data voltage generator **23**.

[0048] The gate timing control signal GDC may include a gate start pulse, a gate shift clock, and the like, but is not limited thereto. The gate start pulse is applied to a stage of the gate driver **15** for generating a first output and activates an operation of the stage. The gate shift clock is a clock signal that is commonly input to stages and shifts the gate start pulse.

[0049] The data voltage generator **23** generates a data voltage Vdata of an input image using a digital-to-analog converter (DAC) converting a digital signal into an analog signal in a normal driving mode, in which the input image is reproduced, and then supplies the data voltage Vdata to the pixels P through the data lines **11**.

[0050] In a sensing mode in which a variation in electrical characteristics between the pixels P is measured before shipping the products or during a drive of the product, the data voltage generator **23** converts test data received from a grayscale-luminance measuring system to generate a sensing data voltage and supplies the sensing data voltage to pixels P to be sensed in the display panel **10** through the data lines **11**. The grayscale-luminance measuring system senses electrical characteristics of each pixel P and obtains a compensation value (i.e., an offset) of the pixel P compensating for a variation in electrical characteristics between the pixels P (in particular, a variation in a threshold voltage of the driving TFT among the pixels P) based on a sensing result. The grayscale-luminance measuring system stores the compensation value of the pixel P in the memory **30** or updates a previously stored compensation value. The memory **30** may be a flash memory, but is not limited thereto.

[0051] The grayscale-luminance measuring system used in the sensing mode may be electrically connected to the memory **30** when the sensing mode operates.

[0052] In the normal driving mode, when power is applied to the electroluminescent display, the compensation value from the memory **30** is loaded to the internal compensation memory **27** of the driver IC **20**. The compensation memory **27** of the driver IC **20** may be a double data rate synchronous dynamic random access memory (DDR SDRAM) or SRAM, but is not limited thereto.

[0053] The sensor **22** may be configured to sense the electrical characteristics of each pixels P, for example, the threshold voltage of the driving TFT in an aging process before shipping the products and transmit the electrical characteristics of each pixels P to the grayscale-luminance measuring system. For example, in case of an application such as a television, the sensor **22** may sense the electrical characteristics of each pixels P in the normal driving mode after the shipment of the products and may update the compensation value in real time. However, aspects are not limited to the application.

[0054] As shown in FIG. 2, the sensor **22** includes a sample and hold circuit SH, an analog-to-digital converter (ADC), and first and second switches SW1 and SW2. The

sensor **22** may sample a source voltage of the driving TFT (i.e., a source voltage of the driving TFT stored in a capacitor connected to the sensing line **13**) depending on a current of the driving TFT and sense electrical characteristics of the driving TFT. The first switch SW1 supplies a reference voltage Vref to the sensing line **13**. The second switch SW2 is turned on at a sampling timing of an analog sensing voltage Vsen. The ADC converts the analog sensing voltages Vsen sampled by the sample and hold circuit SH into digital sensing data S-DATA. Aspects are not limited to the sensor **22** shown in FIG. 2. For example, the sensor **22** may be implemented as a known voltage sensing circuit or a known current sensing circuit.

[0055] The compensator **26** modulates data V-DATA of an input image to the compensation value read from the compensation memory **27** and transmits the compensation value to the data voltage generator **23**.

[0056] The host system **100** may be one of a television system, a set-top box, a navigation system, a personal computer (PC), a home theater system, a mobile system, a wearable system, a virtual reality system, and other systems that include or operate in conjunction with a display. FIG. 1 illustrates an example where the host system is implemented as the mobile system. Configuration of the driving circuits of the display panel **10** may vary depending on the host system **100**. The host system **100** may be implemented as an application processor in the mobile system, the wearable system, the virtual reality system, and the like.

[0057] A compensation value calculation algorithm for compensating for a variation in electrical characteristics between pixels is described below with reference to FIGS. 3 and 4A to 4C. In FIGS. 4A to 4C, the abscissa is voltage (V), and the ordinate is current (I).

[0058] Referring to FIGS. 3 and 4A, the compensation value calculation algorithm senses electrical characteristics of pixels at a plurality of gray levels (for example, a total of seven gray levels A to G) and then obtains an average current (I)-voltage (V) curve of the display panel **10** based on a least square method as indicated by the following Equation 1 in step ST1. However, the least square method disclosed in an aspect is an example, and an aspect is not limited thereto. For example, a regression analysis method, a polynomial approximation method, etc. may be used.

$$I = a(V_{data} - b)^c \quad \text{[Equation 1]}$$

[0059] where “a” is electron mobility of the driving TFT, “b” is a threshold voltage of the driving TFT, and “c” is a physical property value of the driving TFT.

[0060] Referring to FIGS. 3 and 4B, the compensation value calculation algorithm calculates parameter values a' and b' of a pixel to be sensed (or to be compensated) based on current values I1 and I2 and data voltage values Vdata1 and Vdata2 of digital level measured at two points of a low gray level X and a high gray level Y as indicated by the following Equation 2 in step ST2.

$$\begin{aligned} I_1 &= a'(V_{data1} - b')^c \\ I_2 &= a'(V_{data2} - b')^c \end{aligned} \quad \text{[Equation 2]}$$

[0061] In the above Equation 2, the parameter values a' and b' of a previously compensated pixel P can be calculated using a quadratic equation.

[0062] Referring to FIGS. 3 and 4C, the compensation value calculation algorithm calculates a pixel compensation value (i.e., an offset and a gain) for causing an I-V curve of

the pixel to be sensed (or to be compensated) to coincide with the average I-V curve of the display panel (or all the pixels) in step ST3. The offset and the gain are expressed by the following Equation 3. In Equation 3, “Vcomp” is a compensation voltage. The offset

$$b' - b\left(\frac{a}{a'}\right)^{\frac{1}{c}}$$

is a compensation value for compensating for a variation in a threshold voltage of the driving TFT. The gain

$$\left(\frac{a}{a'}\right)^{\frac{1}{c}}$$

is a compensation value for compensating for a variation in mobility of the driving TFT.

$$V_{comp} = \left(\frac{a}{a'}\right)^{\frac{1}{c}} \times V_{data} + \left[b' - b\left(\frac{a}{a'}\right)^{\frac{1}{c}}\right] \quad [\text{Equation 3}]$$

[0063] The compensator 26 adds the offset to data V-DATA of an input image to compensate for a variation in a threshold voltage of the driving TFT between the pixels. A variation in mobility of the driving TFT and a variation in temperature characteristic of the display panel are automatically compensated inside the pixel circuit of each pixel. Thus, an aspect of the present disclosure compensates for the variation in the threshold voltage of the driving TFT through an external compensation method and compensate for the mobility variation of the driving TFT and the temperature variation in real time using an internal compensation method in step ST4.

[0064] An aspect of the disclosure supplies the high potential power voltage VDD to the driving element using a switching element, that is turned on in response to a gate-on voltage of the EM signal EM and then blocks a path between the driving element and the high potential power voltage VDD using the switching element, that is turned off in response to a gate-off voltage of the EM signal EM for a predetermined real-time compensation time, in order to compensate for the mobility variation of the driving element (i.e., the driving TFT) and the temperature variation in real time. The mobility variation of the driving element and the temperature variation are compensated in real time every horizontal period by changing a source voltage of the driving element for the real-time compensation time.

[0065] The gate driver 15 generates a gate signal and sequentially supplies the gate signal to the gate lines 12. The gate driver 15 may be directly formed on a substrate of the display panel 10 together with the signal lines, the TFTs, etc. of the pixel array. The gate driver 15 includes a shift register that sequentially outputs the gate signal in response to the gate timing control signal GDC input through a level shifter. The gate timing control signal GDC includes a gate start pulse, N-phase gate shift clock, and the like, where N is an integer equal to or greater than 2. The level shifter converts a transistor-transistor logic (TTL) voltage level of the gate timing control signal GDC received from the timing con-

troller 21 into a voltage (i.e., a gate high voltage and a gate low voltage) capable of turning on and off the TFT. A gate high voltage is referred to as a first gate voltage, and a gate low voltage is referred to as a second gate voltage.

[0066] As shown in FIGS. 5A and 9A, each pixel in the electroluminescent display according to the aspect includes a driving element DT adjusting a current of a light emitting element (for example, an OLED) based on a gate-to-source voltage Vgs of the driving element DT and a switching element S3 supplying the high potential power voltage VDD to the driving element DT in response to the gate-on voltage of the EM signal. The timing controller 21 sets a real-time mobility compensation time t2, for which mobility of the driving element DT is compensated in real time in one horizontal period 1H, and turns off the switching element S3 by controlling the EM signal to the gate-off voltage for the real-time mobility compensation time t2, thereby inducing change in a source voltage of the driving element DT. This is described in detail below with reference to FIGS. 5A and 5B to 9A and 9B.

[0067] FIGS. 5A and 5B respectively illustrate a pixel circuit and a method of driving the same according to an aspect of the disclosure. In FIG. 5B, “1H” indicates one horizontal period in which data is addressed to the pixel. FIG. 6 illustrates a flow of a current in a pixel circuit shown in FIG. 5A during a real-time mobility compensation time.

[0068] Referring to FIGS. 5A, 5B and 6, a pixel circuit may include an OLED, a driving TFT DT, a storage capacitor Cst, a first switching TFT S1, a second switching TFT S2, and a third switching TFT S3. The driving TFT DT, the second switching TFT S2, and the third switching TFT S3 may be implemented as a low temperature polysilicon (LTPS) PMOS (hereinafter, referred to as “LTPS PMOS”) with high mobility. The first switching TFT S1 may be implemented as a LTPS PMOS or a NMOS (hereinafter, referred to as “oxide NMOS”) including oxide semiconductor. However, an aspect is not limited thereto.

[0069] The electroluminescent display according to an aspect may drive the pixels at a low speed by reducing a frame rate, so as to reduce power consumption in a still image. In this instance, because a data update cycle becomes longer, a flicker may be seen when a leakage current is generated in the pixel. When the first switching TFT S1 having a long turn-off period is implemented as an oxide NMOS having a low off-current, a flicker phenomenon can decrease by reducing the leakage current of the pixel in a low-speed drive. The driving TFT DT is implemented as a LTPS PMOS with high mobility.

[0070] The first and second scan signals SCAN1 and SCAN2 and the EM signal EM are applied to the pixel circuit. The signals SCAN1, SCAN2 and EM each swings between the gate high voltage VGH and the gate low voltage VGL, as shown in FIG. 5B. The first and second scan signals SCAN1 and SCAN2 are generated at the gate-on voltage for times t1 and t2 of one frame period and are generated at the gate-off voltage for a remaining time excluding the times t1 and t2 from the one frame period. Because the first switching TFT S1 is the NMOS and the second switching TFT S2 is the PMOS, the first and second scan signals SCAN1 and SCAN2 are in antiphase.

[0071] The EM signal EM is generated at the gate-on voltage for the time t1 and is generated at the gate-off voltage for times t2 and t3. As shown in FIG. 7, the EM signal EM switches between an on-state and an off-state of

the pixels at a predetermined pulse width modulation (PWM) duty ratio for a time t_4 . When the pixels are repeatedly turned on and off at a duty ratio of about 20% to 90% (for example, at a duty ratio of about 50%) by the EM signal EM for the emission driving time t_4 of the pixel, the flicker and the image sticking can be prevented or reduced. An aspect of the disclosure is not limited to a particular duty ratio.

[0072] The gate-on voltage of the first scan signal SCAN1 is the gate high voltage VGH, and the gate-off voltage of the first scan signal SCAN1 is the gate low voltage VGL less than the gate high voltage VGH. On the other hand, the gate-on voltage of the second scan signal SCAN2 and the gate-on voltage of the EM signal EM are the gate low voltage VGL, and the gate-off voltage of the second scan signal SCAN2 and the gate-off voltage of the EM signal EM are the gate high voltage VGH.

[0073] The OLED includes an organic compound layer between an anode and a cathode. The organic compound layer may include a hole injection layer HIL, a hole transport layer HTL, an emission layer EML, an electron transport layer ETL, and an electron injection layer EIL. However, an aspect of the disclosure is not limited thereto. The cathode of the OLED is connected to an input terminal of the low potential power voltage VSS, and the anode of the OLED is connected to a drain of the driving TFT DT through a third node DTD.

[0074] The driving TFT DT controls a current flowing in the OLED depending on a gate-to-source voltage Vgs. The driving TFT DT includes a gate connected to a first node DTG, a source connected to a second node DTS, and the drain connected to the third node DTD. The storage capacitor Cst is connected between the first node DTG and the second node DTS.

[0075] The first switching TFT S1 is turned on in response to the first scan signal SCAN1 from a first gate line 12A for the times t_1 and t_2 and supplies the data voltage Vdata to the first node DTG. The first switching TFT S1 includes a gate connected to the first gate line 12A, a source connected to the first node DTG, and a drain connected to the data line 11.

[0076] The second switching TFT S2 is turned on in response to the second scan signal SCAN2 from a second gate line 12B for the times t_1 and t_2 and forms a current path between the sensing line 13 and the third node DTD. The second switching TFT S2 includes a gate connected to the second gate line 12B, a source connected to the sensing line 13, and a drain connected to the third node DTD.

[0077] The third switching TFT S3 is turned on in response to the gate-on voltage of the EM signal EM from a third gate line 12C and supplies the high potential power voltage VDD on a VDD line 14 to the second node DTS for the ON-times t_1 and t_4 . The third switching TFT S3 is turned off in response to the gate-off voltage of the EM signal EM from the third gate line 12C and blocks a current path between the VDD line 14 and the second node DTS for the OFF-times t_2 and t_3 .

[0078] An operation of the pixel circuit is described in stages.

[0079] For an initialization time t_1 , all the switching TFTs S1, S2 and S3 are turned on in response to the gate-on voltages of the first and second scan signals SCAN1 and SCAN2 and the gate-on voltage of the EM signal EM. In this instance, the data voltage Vdata is applied to the first node DTG. For the initialization time t_1 , the second node DTS is

initialized to the high potential power voltage VDD, and the third node DTD is initialized to the reference voltage Vref. For the initialization time t_1 , the driving TFT DT is turned on because a source voltage of the driving TFT DT is greater than a gate voltage by a threshold voltage or more.

[0080] Subsequently, for a real-time mobility compensation time t_2 , the first and second switching TFTs S1 and S2 maintain an ON-state as the first and second scan signals SCAN1 and SCAN2 are held at the gate-on voltage. On the other hand, the third switching TFT S3 is turned off in response to the gate-off voltage of the EM signal EM. In this instance, a current path of the pixel circuit is as shown in FIG. 6. For the real-time mobility compensation time t_2 , the second node DTS connected to the source of the driving TFT DT is floated, and thus a discharge amount of the source voltage of the driving TFT DT varies depending on the mobility of the driving TFT DT.

[0081] When there is a variation in mobility of the driving TFT DT between the pixels, a pixel including a driving TFT DT of high mobility and a pixel including a driving TFT DT of low mobility may be respectively seen as a relatively bright pixel and a relatively dark pixel at the same gray level. And, when a temperature of the pixel is high, an I-V transfer curve of the driving TFT DT is shifted to the negative direction. In this case, a current of the driving TFT DT increases. For example, when the mobility of the driving TFT DT is high or the use temperature of the pixel is high, uniform image quality cannot be obtained because a luminance of the pixel increases.

[0082] Aspects change the source voltage of the driving TFT DT of each pixel P depending on the mobility of the driving TFT DT for the real-time mobility compensation time t_2 , thereby compensating for a variation in the mobility of the driving TFT DT and a variation in the temperature between the pixels P in real time. A source voltage of the driving TFT DT with high mobility is relatively more discharged due to a large amount of source-to-drain current for the real-time mobility compensation time t_2 , and thus a decrease of a change ΔV_{gs} in a gate-to-source voltage Vgs of the driving TFT DT of the high mobility is large. On the other hand, a source voltage of the driving TFT DT with low mobility is relatively less discharged due to a small amount of source-to-drain current for the real-time mobility compensation time t_2 , and thus a decrease of a change ΔV_{gs} in a gate-to-source voltage Vgs is small. A luminance of the pixel is determined depending on a current of the OLED proportional to the Vgs of the driving TFT DT. Thus, a luminance of a pixel including a driving TFT DT of high mobility decreases due to the large decrease of the change ΔV_{gs} in the Vgs of the driving TFT DT for the real-time mobility compensation time t_2 . On the other hand, a luminance of a pixel including a driving TFT DT of low mobility little decreases due to the small decrease of change ΔV_{gs} in the Vgs of the driving TFT DT for the real-time mobility compensation time t_2 . The variation in the mobility of the driving TFT DT can be uniformly compensated throughout the entire screen. In FIG. 5, "71" is a source discharge voltage of the second node DTS (i.e., the driving TFT DT) in the pixel including the driving TFT DT of the low mobility, and "72" is a source discharge voltage of the second node DTS (i.e., the driving TFT DT) in the pixel including the driving TFT DT of the high mobility.

[0083] A current of the driving TFT DT is proportional to a temperature of the pixel. For this reason, the decrease of

the change ΔV_{gs} in the V_{gs} of the driving TFT DT in a pixel having a high temperature is greater than that in a pixel having a low temperature for the real-time mobility compensation time t_2 . Hence, a luminance variation between the pixels resulting from a temperature difference can be compensated.

[0084] During a kickback time t_3 , the first scan signal SCAN1 changes from the VGH to the VGL. A voltage between the gate and the source of the driving TFT DT (i.e., a voltage between the first node DTG and the second node DTS) temporarily decreases due to a charge coupling effect resulting from a voltage change in the first scan signal SCAN1. Subsequently, for an emission driving time t_4 , the first scan signal SCAN1 is held at the VGL, and the source voltage of the driving TFT DT is restored to the VDD.

[0085] As shown in FIG. 7, for the emission driving time t_4 , the EM signal EM alternates between the gate-on voltage and the gate-off voltage at a predetermined PWM duty ratio (unit:%). The EM signal EM switches on and off the current of the OLED and repeatedly turns on and off the pixel at a PWM duty ratio of the EM signal EM for the emission driving time t_4 .

[0086] FIG. 7 is a waveform diagram illustrating an example where an EM signal is modulated at a PWM duty ratio equal to or less than 50% for an emission driving time of a pixel. In FIG. 7, "SCAN1(1)" and "Em1(1)" are the first scan signal and the EM signal applied to the pixels arranged on a first line of the display panel 10, respectively. "SCAN1(n)" and "Em1(n)" are the first scan signal and the EM signal applied to the pixels arranged on a nth line of the display panel 10, respectively.

[0087] FIG. 8 illustrates a simulation result for verifying a real-time mobility compensation effect of the pixel circuit shown in FIG. 5A. In the simulation result shown in FIG. 8, voltages applied to the pixel circuit were set as follows: VDD=6V, VSS=-4V, Vref=-3V, and Vdata=0 to 5.8V. The voltages of the pixel circuit may be changed in an actual product.

[0088] FIGS. 9A and 9B respectively illustrate a pixel circuit and a method of driving the same according to another aspect of the present disclosure. Configuration of the pixel circuit shown in FIG. 9A is substantially the same as the pixel circuit shown in FIG. 5A, except that a first switching TFT S1 is implemented as a LTPS PMOS, and as shown in FIG. 9B, a gate-on voltage and a gate-off voltage of a first scan signal SCAN1 controlling the first switching TFT S1 are opposite to the gate-on voltage and the gate-off voltage shown in FIG. 5B. And, since an operation of the pixel circuit illustrated in FIG. 9A is substantially the same as the operation of the pixel circuit illustrated in FIGS. 5A to 7, a further description may be briefly made or may be omitted.

[0089] FIG. 10 illustrates a simulation result for verifying a real-time mobility compensation effect of a pixel circuit shown in FIG. 9A. As can be seen from FIG. 10, when the first switching TFT S1 is implemented as the LTPS PMOS, an output voltage range of a data voltage generator 23 may decrease, compared to the first switching TFT S1 implemented as an oxide NMOS. Hence, a real-time mobility compensation time t_2 may be reduced. And, an aspect of the disclosure is not limited thereto.

[0090] As described above, aspects of the present disclosure control the floating of the driving element for a predetermined real-time compensation time and change the source

voltage of the driving element, thereby compensating for the mobility variation of the driving element and the temperature variation. Hence, the image quality of the electroluminescent display can be improved.

[0091] Aspects of the present disclosure add the compensation value of the pixel obtained based on the result of sensing electrical characteristics of the pixels to data of an input image and compensate for the threshold voltage of the driving element. Hence, the image quality of the electroluminescent display can be improved.

[0092] Aspects of the present disclosure modulate the emission control signal at the PWM duty ratio for the emission driving time, thereby preventing the flicker and the image sticking. Hence, the image quality of the electroluminescent display can be improved.

[0093] An electroluminescent display according to an aspect of the present disclosure may be described as follows.

[0094] An electroluminescent display device according to an aspect of the present disclosure comprises a display panel including a plurality of pixels connected to a plurality of data lines and a plurality of gate lines. Each pixel includes a driving element adjusting a current of a light emitting element depending on a gate-to-source voltage, and a switching element supplying a high potential power voltage to the driving element in response to a gate-on voltage of an emission control signal, the switching element being turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time. A source voltage of the driving element is changed during the real-time compensation time.

[0095] According to one or more aspects, the electroluminescent display device may further comprise a data driver adding a previously set compensation value to data of an input image, converting the data, to which the compensation value is added, into a data voltage, and outputting the data voltage to the data lines, the data driver including a sensing circuit sensing electrical characteristics of the pixels, and a gate driver generating a first scan signal, a second scan signal, and the emission control signal.

[0096] According to one or more aspects, each pixel may further include a first switching element supplying the data voltage of the input image to a gate of the driving element in response to a gate-on voltage of the first scan signal, a second switching element supplying a reference voltage to a drain of the driving element in response to a gate-on voltage of the second scan signal, and a storage capacitor connected between the gate and a source of the driving element. The light emitting element may include an anode connected to the drain of the driving element and a cathode supplied with a low potential power voltage.

[0097] According to one or more aspects, the first scan signal may be the gate-on voltage for first and second times of one horizontal period and then may be a gate-off voltage after a third time. The second scan signal may be the gate-on voltage for the first and second times and then may be a gate-off voltage after the third time. And the emission control signal may be the gate-on voltage for the first time and may be the gate-off voltage for the second and third times.

[0098] According to one or more aspects, the first switching element may be an n-type transistor. And switching elements other than the first switching element and the driving element may be p-type transistors.

[0099] According to one or more aspects, the gate-on voltage of the first scan signal is a gate high voltage, and the gate-off voltage of the first scan signal may be a gate low voltage less than the gate high voltage. And the gate-on voltages of the second scan signal and the emission control signal may be the gate low voltage, and the gate-off voltages of the second scan signal and the emission control signal may be the gate high voltage.

[0100] According to one or more aspects, all of the switching elements and the driving element may be p-type transistors.

[0101] According to one or more aspects, the gate-on voltages of the first scan signal, the second scan signal, and the emission control signal may be a gate low voltage, and the gate-off voltages of the first scan signal, the second scan signal, and the emission control signal may be a gate high voltage greater than the gate low voltage.

[0102] An electroluminescent display device according to an aspect of the present disclosure comprises a display panel including a plurality of data lines and a plurality of gate lines and a plurality of pixels, a data driver adding a compensation value to data of an input image, converting the data, to which the compensation value is added, into a data voltage, and outputting the data voltage to the data lines, and a gate driver generating a first scan signal, a second scan signal, and an emission control signal. Each pixel includes a driving element adjusting a current of a light emitting element depending on a gate-to-source voltage, and a switching element supplying a high potential power voltage to the driving element in response to a gate-on voltage of the emission control signal, the switching element being turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time. A source voltage of the driving element is changed during the real-time compensation time, and mobility of the driving element and a temperature variation of the display panel are compensated. A variation in a threshold voltage of the driving element is compensated by the compensation value.

[0103] According to one or more aspects, the data driver may include a sensing circuit sensing electrical characteristics of the pixels.

[0104] According to one or more aspects, each pixel may further include a first switching element supplying the data voltage of the input image to a gate of the driving element in response to a gate-on voltage of the first scan signal, a second switching element supplying a reference voltage to a drain of the driving element in response to a gate-on voltage of the second scan signal, and a storage capacitor connected between the gate and a source of the driving element. The light emitting element may include an anode connected to the drain of the driving element and a cathode supplied with a low potential power voltage.

[0105] According to one or more aspects, the electroluminescent display device may further comprise a storage capacitor connected between the gate and a source of the driving element. The light emitting element may include an anode connected to the drain of the driving element and a cathode supplied with a second supply voltage.

[0106] According to one or more aspects, the first scan signal may be the gate-on voltage for first and second times of one horizontal period and then may be a gate-off voltage after a third time. The second scan signal may be the gate-on voltage for the first and second times and then may be a gate-off voltage after the third time, and the emission control

signal may be the gate-on voltage for the first time and may be the gate-off voltage for the second and third times.

[0107] An electroluminescent display device according to the present disclosure comprises a display panel including a plurality of data lines and a plurality of gate lines and a plurality of pixels. Each pixel includes an electroluminescent diode, a driving thin film transistor (TFT) adjusting a current of the electroluminescent diode depending on a gate-to-source voltage, a storage capacitor connected between a gate and a source of the driving TFT, a first switching TFT turned on in response to a gate-on voltage of a first scan signal and configured to connect the data line supplied with a data voltage to a first node of the pixel, a second switching TFT turned on in response to a gate-on voltage of a second scan signal and connected to a sensing line supplied with a reference voltage, and a third switching TFT turned on in response to a gate-on voltage of an emission control signal and configured to supply a high potential power voltage to the source of the driving TFT. The third switching TFT is turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time, and a source voltage of the driving TFT is changed during the real-time compensation time.

[0108] According to one or more aspects, the first scan signal may be the gate-on voltage for first and second times of one horizontal period and then may be a gate-off voltage after a third time. The second scan signal may be generated at the gate-on voltage for the first and second times and then may be a gate-off voltage after the third time, and the emission control signal may be the gate-on voltage for the first time and may be the gate-off voltage for the second and third times.

[0109] According to one or more aspects, the first switching TFT may be an n-type transistor, and switching TFTs other than the first switching TFT and the driving TFT may be p-type transistors.

[0110] According to one or more aspects, all of the switching TFTs and the driving TFT may be p-type transistors.

[0111] According to one or more aspects, the electroluminescent display device may further comprise a data driver adding a previously set compensation value to data of an input image, converting the data, to which the compensation value is added, into a data voltage, and outputting the data voltage to the data lines, the data driver including a sensing circuit sensing electrical characteristics of the pixels, and a gate driver generating the first scan signal, the second scan signal, and the emission control signal.

[0112] A method of driving an electroluminescent display device including a driving element adjusting a current of a light emitting element of each pixel to a gate-to-source voltage according to the present disclosure comprises supplying a high potential power voltage to the driving element in response to a gate-on voltage of an emission control signal, and blocking a path between the driving element and the high potential power voltage using a switching element, that is turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time. A source voltage of the driving element is changed during the real-time compensation time to compensate for an electron mobility of the driving element and a temperature variation of the display panel.

[0113] A method of driving an electroluminescent display device including a driving element adjusting a current of a light emitting element of each pixel depending on a gate-

to-source voltage according to the present disclosure comprises adding a previously set compensation value to data of an input image, converting the data, to which the compensation value is added, into a data voltage, and applying the data voltage to the pixel to compensate for a threshold voltage of the driving element, supplying a high potential power voltage to the driving element in response to a gate-on voltage of an emission control signal, and blocking a path between the driving element and the high potential power voltage using a switching element, that is turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time, to compensate for a variation in mobility of the driving element and a temperature variation in real time.

[0114] Although aspects have been described with reference to a number of illustrative aspects thereof, it should be understood that numerous other modifications and aspects can be devised by those skilled in the art that will fall within the scope of the principles of this disclosure. More particularly, various variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

What is claimed is:

1. An electroluminescent display device having a display panel including a plurality of pixels connected to a plurality of data lines and a plurality of gate lines, each pixel comprising:

- a driving element adjusting a current of a light emitting element depending on a gate-to-source voltage; and
- a switching element supplying a first voltage to the driving element in response to a gate-on voltage of an emission control signal, the switching element being turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time,

wherein a source voltage of the driving element is changed during the real-time compensation time.

2. The electroluminescent display device of claim 1, further comprising:

- a data driver adding a preset compensation value into data of an input image, converting the data that is added the compensation value into a data voltage, and outputting the data voltage to the data lines, wherein the data driver includes a sensing circuit sensing electrical characteristics of the pixels; and
- a gate driver generating a first scan signal, a second scan signal, and the emission control signal.

3. The electroluminescent display device of claim 2, wherein the switching elements comprises:

- a first switching element supplying the data voltage of the input image to a gate of the driving element in response to a gate-on voltage of the first scan signal; and
- a second switching element supplying a reference voltage to a drain of the driving element in response to a gate-on voltage of the second scan signal.

4. The electroluminescent display device of claim 3, further comprising a storage capacitor connected between the gate and a source of the driving element, wherein the

light emitting element includes an anode connected to the drain of the driving element and a cathode supplied with a second voltage.

5. The electroluminescent display device of claim 3, wherein the first scan signal is the gate-on voltage during first and second times within one horizontal period and is a gate-off voltage after a third time.

6. The electroluminescent display device of claim 5, wherein the second scan signal is the gate-on voltage during the first and second times and is a gate-off voltage after the third time,

wherein the emission control signal is the gate-on voltage during the first time and is the gate-off voltage during the second and third times.

7. The electroluminescent display device of claim 3, wherein the first switching element includes an n-type transistor, and the second switching element and the driving element include a p-type transistor.

8. The electroluminescent display device of claim 5, wherein the gate-on voltage of the first scan signal is a first gate voltage, and the gate-off voltage of the first scan signal is a second gate voltage less than the first gate voltage,

wherein the gate-on voltages of the second scan signal and the emission control signal are the second gate voltage, and the gate-off voltages of the second scan signal and the emission control signal are the first gate voltage.

9. The electroluminescent display device of claim 3, wherein the first and second switching elements and the driving element include a p-type transistor.

10. The electroluminescent display device of claim 8, wherein the gate-on voltages of the first scan signal, the second scan signal, and the emission control signal are a second gate voltage, and the gate-off voltages of the first scan signal, the second scan signal, and the emission control signal are a first gate voltage greater than the second gate voltage.

11. An electroluminescent display device having a display panel including a plurality of data lines, a plurality of gate lines, and a plurality of pixels, a data driver adding a compensation value to data of an input image, converting the data that is added the preset compensation value into a data voltage, and outputting the data voltage to the data lines; and a gate driver generating a first scan signal, a second scan signal, and an emission control signal, each pixel comprising:

- a driving element adjusting a current of a light emitting element depending on a gate-to-source voltage; and
- a switching element supplying a second supply voltage to the driving element in response to a gate-on voltage of the emission control signal, the switching element being turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time,

wherein a source voltage of the driving element is changed during the real-time compensation time to compensate for an electron mobility of the driving element and a temperature variation of the display panel and

wherein a variation in a threshold voltage of the driving element is compensated by the compensation value.

12. The electroluminescent display device of claim 11, wherein the data driver includes a sensing circuit sensing electrical characteristics of the pixels.

13. The electroluminescent display device of claim 11, wherein the switching elements comprises:

- a first switching element supplying the data voltage of the input image to a gate of the driving element in response to a gate-on voltage of the first scan signal; and
- a second switching element supplying a reference voltage to a drain of the driving element in response to a gate-on voltage of the second scan signal.

14. The electroluminescent display device of claim 11, further comprising a storage capacitor connected between the gate and a source of the driving element, wherein the light emitting element includes an anode connected to the drain of the driving element and a cathode supplied with a second supply voltage.

15. The electroluminescent display device of claim 11, wherein the first scan signal is the gate-on voltage during first and second times within one horizontal period and is a gate-off voltage after a third time,

- wherein the second scan signal is the gate-on voltage during the first and second times and is a gate-off voltage after the third time, and

wherein the emission control signal is the gate-on voltage during the first time and is the gate-off voltage during the second and third times.

16. An electroluminescent display device having a display panel including a plurality of data lines, a plurality of gate lines, and a plurality of pixels, each pixel comprising:

- an electroluminescent diode;
- a driving thin film transistor (TFT) adjusting a current of the electroluminescent diode depending on a gate-to-source voltage;
- a storage capacitor connected between a gate and a source of the driving TFT;
- a first switching TFT turned on in response to a gate-on voltage of a first scan signal and connecting the data line supplied with a data voltage to a first node of the pixel;
- a second switching TFT turned on in response to a gate-on voltage of a second scan signal and connected to a sensing line supplied with a reference voltage; and
- a third switching TFT turned on in response to a gate-on voltage of an emission control signal and supplying a second supply voltage to the source of the driving TFT, wherein the third switching TFT is turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time, and a source voltage of the driving TFT is changed during the real-time compensation time.

17. The electroluminescent display device of claim 16, wherein the first scan signal is the gate-on voltage during first and second times within one horizontal period and is a gate-off voltage after a third time,

- wherein the second scan signal is the gate-on voltage during the first and second times and is a gate-off voltage after the third time, and

wherein the emission control signal is the gate-on voltage during the first time and is the gate-off voltage during the second and third times.

18. The electroluminescent display device of claim 17, wherein the first switching TFT includes an n-type transistor, and the second and third switching TFTs and the driving TFT include a p-type transistor.

19. The electroluminescent display device of claim 17, wherein the first, second and third switching TFTs and the driving TFT include a p-type transistor.

20. The electroluminescent display device of claim 17, further comprising:

- a data driver adding a preset compensation value to data of an input image, converting the data that is added the compensation value into a data voltage, and outputting the data voltage to the data lines, the data driver including a sensing circuit sensing electrical characteristics of the pixels; and

a gate driver generating the first scan signal, the second scan signal, and the emission control signal.

21. A method of driving an electroluminescent display device including a driving element adjusting a current of a light emitting element of each pixel by controlling a gate-to-source voltage, the method comprising:

- supplying a first supply voltage to the driving element in response to a gate-on voltage of an emission control signal; and

blocking a path between the driving element and the first supply voltage using a switching element, that is turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time, wherein a source voltage of the driving element is changed during the real-time compensation time to compensate for an electron mobility of the driving element and a temperature variation of the display panel.

22. A method of driving an electroluminescent display device including a driving element adjusting a current of a light emitting element of each pixel depending on a gate-to-source voltage, the method comprising:

- adding a preset compensation value to data of an input image, converting the data, to which the compensation value is added, into a data voltage, and applying the data voltage to the pixel to compensate for a threshold voltage of the driving element;

supplying a first supply voltage to the driving element in response to a gate-on voltage of an emission control signal; and

blocking a path between the driving element and the first supply voltage using a switching element that is turned off in response to a gate-off voltage of the emission control signal during a real-time compensation time, to compensate for a variation in electron mobility of the driving element and a temperature variation in real time.

* * * * *

专利名称(译)	电致发光显示器及其驱动方法		
公开(公告)号	US20180182303A1	公开(公告)日	2018-06-28
申请号	US15/853757	申请日	2017-12-23
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	JUNG HWAJUN JANG YOUNGSUN		
发明人	JUNG, HWAJUN JANG, YOUNGSUN		
IPC分类号	G09G3/3291 G09G3/3258		
CPC分类号	G09G3/3291 G09G3/3258 G09G2320/043 G09G2320/0233 G09G2320/041 G09G2320/064 G09G2310/08 G09G2310/027 H01L27/3276 G09G3/3233 G09G2300/0819 G09G2300/0842 G09G2300/0861 G09G2320/0247 G09G2320/0285 G09G2320/0295 G09G2320/045 G09G2360/16		
优先权	1020160181121 2016-12-28 KR		
其他公开文献	US10720110		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种电致发光显示器及其驱动方法。该电致发光显示器包括显示面板，该显示面板包括电连接到多条数据线和多条栅极线的多个像素。每个像素包括：驱动元件，根据栅极-源极电压调节发光元件的电流；以及开关元件，响应于发光控制信号的栅极导通电压，向驱动元件提供第二电压。在实时补偿时间期间，响应于发射控制信号的栅极截止电压，开关元件被关断。在实时补偿时间期间改变驱动元件的源电压。

