



US 20150049070A1

(19) **United States**(12) **Patent Application Publication**
Ren et al.(10) **Pub. No.: US 2015/0049070 A1**(43) **Pub. Date: Feb. 19, 2015**(54) **METHOD AND APPARATUS FOR ADJUSTING
DRIVING VOLTAGE FOR PIXEL CIRCUIT,
AND DISPLAY DEVICE**(30) **Foreign Application Priority Data**


Aug. 16, 2013 (CN) 201310358943.7

(71) Applicant: **BOE TECHNOLOGY GROUP CO.,
LTD.**, Beijing (CN)**Publication Classification**(72) Inventors: **Lijun Ren**, Beijing (CN); **Szuheng
Tseng**, Beijing (CN); **Chen Zhang**,
Beijing (CN)(51) **Int. Cl.**
G09G 3/36 (2006.01)(52) **U.S. Cl.**
CPC **G09G 3/3696** (2013.01)
USPC **345/211**(73) Assignee: **BOE TECHNOLOGY GROUP CO.,
LTD.**, Beijing (CN)(57) **ABSTRACT**(21) Appl. No.: **14/367,717**(22) PCT Filed: **Dec. 18, 2013**(86) PCT No.: **PCT/CN2013/089768**

§ 371 (c)(1),

(2) Date: **Jun. 20, 2014**

In the method provided by the present disclosure, the driving voltage for the pixel circuit is dynamically adjusted in accordance with data voltages in each pixel row. Accordingly, as compared with a traditional method where a constant voltage is applied to the pixel circuit, the method provided therein is able to greatly reduce a dynamic loss and a temperature rise of an OLED pixel circuit and prolong the life of the OLED while reducing the driving cost.

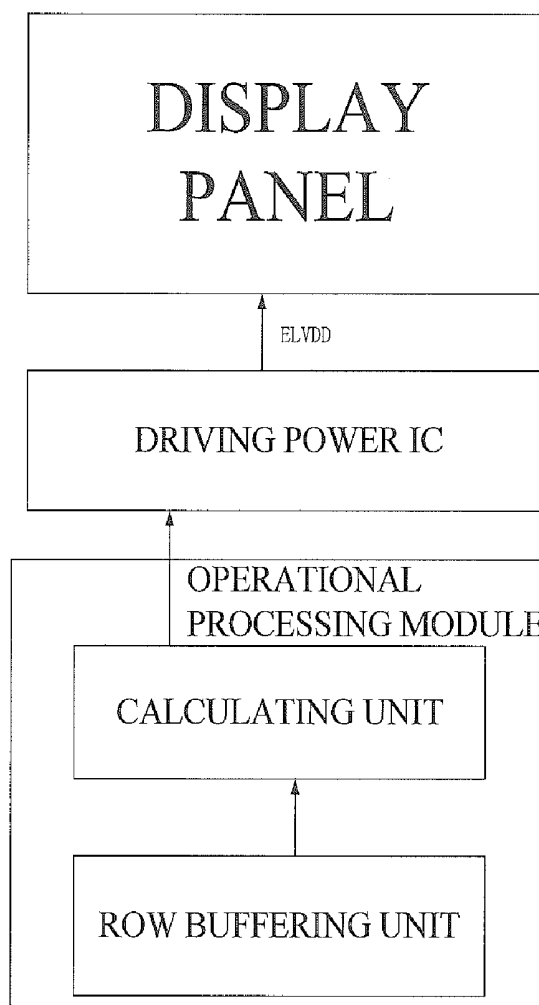

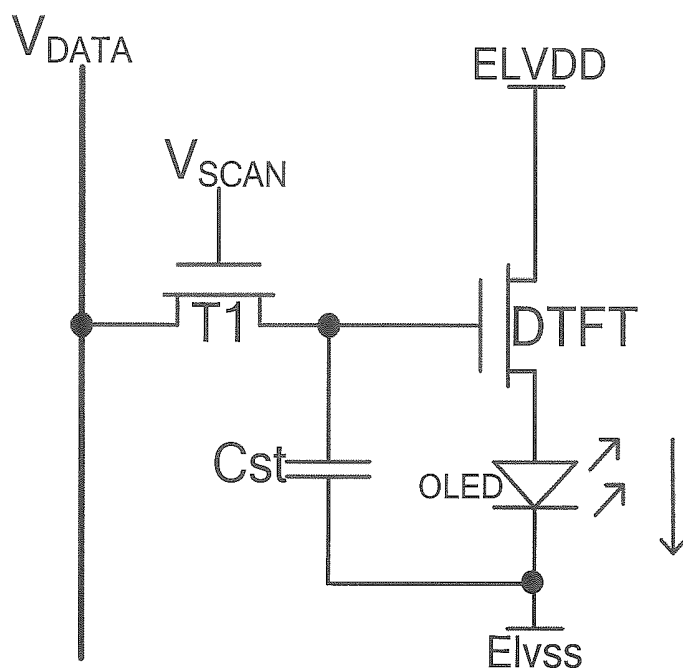


Fig. 1

-PRIOR ART-

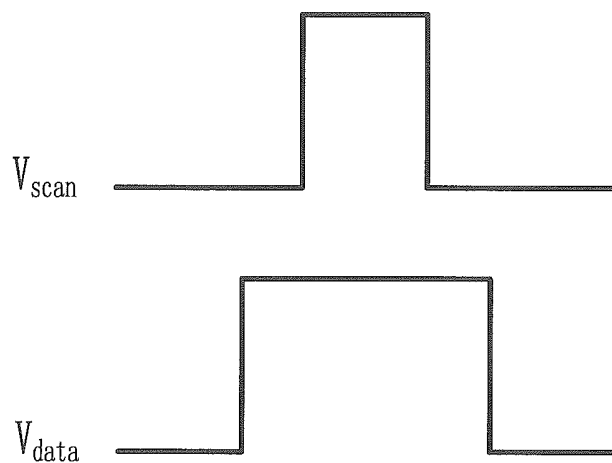


Fig. 2

-PRIOR ART-

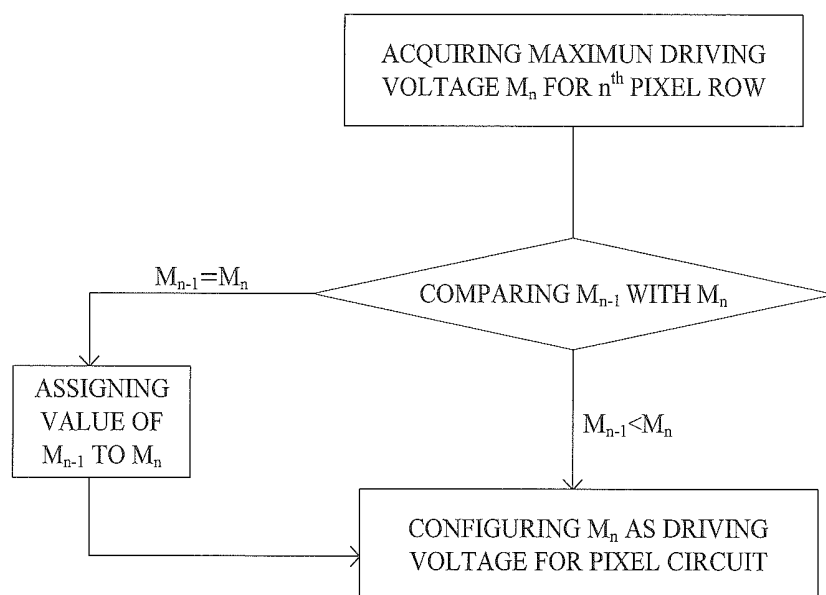


Fig. 3

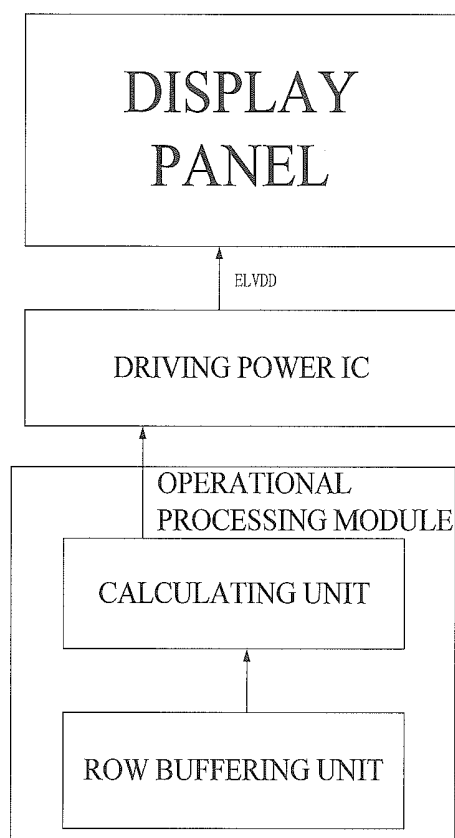


Fig. 4

METHOD AND APPARATUS FOR ADJUSTING DRIVING VOLTAGE FOR PIXEL CIRCUIT, AND DISPLAY DEVICE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is the U.S. national phase of PCT Application No. PCT/CN2013/089768 filed on Dec. 18, 2013, which claims priority to Chinese Patent Application No. 201310358943.7 filed on Aug. 16, 2013, the disclosures of which are incorporated in their entirety by reference herein.

TECHNICAL FIELD

[0002] The present disclosure relates to the field of display technology, in particular to a method and an apparatus for adjusting a driving voltage for a pixel circuit, and a display device comprising such an apparatus.

BACKGROUND

[0003] As compared with a traditional liquid crystal panel, an active matrix/organic light-emitting diode (AMOLED) panel has such features as rapid response, high contrast and wide viewing angle, so there is a growing concern about AMOLED for display technology developers.

[0004] The AMOLED is driven by a pixel circuit to emit light. An existing 2T1C pixel circuit consists of two thin film transistors (TFTs) and one capacitor (C), i.e., a driving TFT DTFT, a switch TFT T1 and a storage capacitor Cst as shown in FIG. 1. The switch TFT T1 is controlled by a scanning signal Vscan so as to control the input of a data voltage Vdata, the driving TFT DTFT is configured to control an OLED to emit light, and the storage capacitor C is configured to apply a maintaining voltage to a gate electrode of the driving TFT DTFT.

[0005] FIG. 2 is a driving sequence diagram of 2T1C pixel circuit in FIG. 1. A working procedure of the 2T1C pixel circuit may be described as follows. When the scanning signal Vscan is at a high level, the switch TFT T1 is switched on, and the storage capacitor Cst is charged by a gray scale voltage Vdata on a data line. Meanwhile, the data voltage Vdata is applied to the gate electrode of the driving TFT DTFT, and the driving TFT DTFT is driven by a driving voltage ELVDD for the pixel circuit so as to operate in a saturation state, thereby to drive the OLED to emit light. When the scanning signal Vscan is at a low level, the switch TFT T1 is switched off, the maintaining voltage is applied by the storage capacitor Cst to the gate electrode of the driving TFT DTFT, and the driving TFT DTFT is driven by the driving voltage ELVDD so as to still operate in the saturation state, thereby to enable the OLED to emit light continuously. In the prior art, in order to ensure the driving TFT DTFT to operate in a saturation region and emit light normally, usually a relatively high driving voltage ELVDD is applied to a source electrode of the driving TFT DTFT of the OLED pixel circuit, and a value of the driving voltage remains unchanged, i.e., the OLED is driven at a constant voltage. However, at certain timings, e.g., when the data voltage is very low and a high driving voltage is not required, a power loss will take place and a temperature of an element will increase if a high voltage is applied. Hence, an existing method for adjusting the driving voltage for the pixel circuit may cause a great dynamic loss and a large temperature rise.

SUMMARY

[0006] An object of the present disclosure is to provide a method and an apparatus for adjusting a driving voltage for a pixel circuit, so as to reduce a dynamic loss and a temperature rise of an OLED pixel circuit and prolong the life of the OLED while reducing the driving cost.

[0007] In one aspects the present disclosure provides a method for adjusting a driving voltage for a pixel circuit, so as to dynamically adjust the driving voltage, for the pixel circuit in accordance with data voltages in each pixel row. The pixel circuit comprises a plurality of sub-pixel circuits forming a plurality of pixel rows.

[0008] Alternatively, the method may comprise:

[0009] acquiring data voltages for each sub-pixel circuit in a pixel row to be scanned in the pixel circuit, the sub-pixel circuit comprising a driving TFT and a light-emitting element;

[0010] calculating, in accordance with the data voltages, a minimum driving voltage for each sub-pixel circuit in the pixel row to be scanned, the minimum driving voltage being a minimum voltage that ensures the driving TFT to operate in a saturation region and ensures the light-emitting element to emit light normally;

[0011] selecting a maximum value from among the minimum driving voltages for the sub-pixel circuits in the pixel row to be scanned, and configuring the maximum value as a maximum driving voltage for the pixel row to be scanned; and

[0012] configuring a maximum value from among the determined maximum driving voltage for the pixel row to be scanned and maximum driving voltages for all pixel rows before the pixel row to be scanned, as the driving voltage for the pixel circuit.

[0013] Alternatively, the method may comprise:

[0014] acquiring a maximum driving voltage M_1 for a first pixel row in the pixel circuit;

[0015] configuring M_1 as a driving voltage for the pixel circuit;

[0016] acquiring a maximum driving voltage M_2 for a second pixel row in the pixel circuit and comparing M_1 with M_2 ;

[0017] if $M_1 < M_2$, maintaining the value of M_2 , and if $M_1 \geq M_2$, assigning the value of M_1 to M_2 ;

[0018] configuring M_2 as the driving voltage for the pixel circuit;

[0019] ...;

[0020] acquiring a maximum driving voltage M_n for an n^{th} pixel row and comparing M_{n-1} with M_n ;

[0021] if $M_{n-1} < M_n$, maintaining the value of M_n , and if $M_{n-1} \geq M_n$, assigning the value of M_{n-1} to M_n ; and

[0022] configuring M_n as the driving voltage for the pixel circuit, wherein n is an integer greater than 2.

[0023] In another aspect, the present disclosure also provides an apparatus for adjusting a driving voltage for a pixel circuit, comprising a driving power IC coupled to the pixel circuit, and an operational processing module coupled to the driving power IC and configured to dynamically adjust a driving voltage applied by the driving power IC to the pixel circuit in accordance with data voltages for each pixel row in the pixel circuit.

[0024] The operational processing module may comprise:

[0025] a row buffering unit configured to acquire the data voltages for each sub-pixel circuit in a pixel row to be scanned in the pixel circuit; and

[0026] a calculating unit configured to calculate a minimum driving voltage for each sub-pixel circuit in the pixel

row to be scanned in accordance with the data voltages, select a maximum value from among the minimum driving voltages, configure the maximum value as a maximum driving voltage for the pixel row to be scanned, and transmit a maximum value selected from among the maximum driving voltages for the pixel row to be scanned and maximum driving voltages for all pixel rows before the pixel row to be scanned, as a value of the driving voltage for the pixel circuit, to the driving power IC.

[0027] The operational processing module may be integrated into the driving power IC.

[0028] In yet another aspect, the present disclosure also provides a display device comprising the above-mentioned apparatus for adjusting a driving voltage for a pixel circuit.

[0029] According to the method and apparatus for adjusting the driving voltage for the pixel circuit provided by the present disclosure, the driving voltage applied to the pixel circuit is dynamically adjusted in accordance with the data voltages for each pixel row in the pixel circuit. And as compared with a traditional method where a constant voltage is applied to the pixel circuit, it is able to greatly reduce the dynamic loss and the temperature rise of the OLED pixel circuit and prolong the life of the OLED while reducing the driving cost.

BRIEF DESCRIPTION OF THE DRAWINGS

[0030] FIG. 1 is a schematic view showing a conventional pixel circuit;

[0031] FIG. 2 is a driving sequence diagram of the pixel circuit in FIG. 1;

[0032] FIG. 3 is a flow chart of a method for adjusting a driving voltage for a pixel circuit according to the present disclosure; and

[0033] FIG. 4 is a schematic view showing an apparatus for adjusting a driving voltage for a pixel circuit according to the present disclosure.

DETAILED DESCRIPTION

[0034] The present disclosure will be described hereinafter in conjunction with the drawings and the embodiments. The following embodiments are merely for illustrative purposes, but shall not be used to limit the present invention.

[0035] According to a method and an apparatus for adjusting a driving voltage for a pixel circuit provided by the present disclosure, the pixel circuit driving voltage may be adjusted in accordance with a dynamic change of data voltages for each row of the pixel circuit, and as compared with a traditional method where a constant voltage is applied to the pixel circuit, it is able to greatly reduce a dynamic loss and a temperature rise of an OLED pixel circuit and prolong the life of the OLED while reducing the driving cost.

[0036] The present disclosure provides a method for adjusting a driving voltage for a pixel circuit, so as to dynamically adjust the driving voltage for the pixel circuit in accordance with data voltages for each pixel row. The pixel circuit includes a plurality of sub-pixel circuits, and the driving voltage for the pixel circuit means a driving voltage ELVDD for the whole pixel circuit, which is applied to each sub-pixel circuit.

[0037] One implementation mode of the method for adjusting the driving voltage for the pixel circuit may comprise the following steps:

[0038] acquiring data voltages for each sub-pixel circuit in a pixel row to be scanned in the pixel circuit;

[0039] calculating a minimum driving voltage for each sub-pixel circuit in the pixel row to be scanned in accordance with the acquired data voltages, the minimum driving voltage for the sub-pixel circuit being at least sufficient to ensure a driving TFT of the sub-pixel circuit to operate at a saturation region, thereby to ensure an OLED to emit light normally;

[0040] selecting a maximum value from among the calculated minimum driving voltages as a maximum driving voltage for the pixel row to be scanned, the maximum driving voltage being sufficient to ensure each sub-pixel circuit in the pixel row to be scanned to operate normally; and

[0041] comparing the maximum driving voltage for the pixel row to be scanned with a maximum driving voltage for all pixel rows before the pixel row to be scanned, which is also determined by the method, and configuring a maximum value as the driving voltage of the pixel circuit, the resultant driving voltage being sufficient to ensure the driving TFT of each sub-pixel circuit in the pixel row to be scanned to be in a saturation state, without affecting an operational state of each sub-pixel circuit in the pixel rows that have been scanned.

[0042] In this embodiment, a display panel with a resolution of 1024*768 is taken as an example. The display panel comprises an array substrate and a counterpart substrate arranged in alignment to each other. Gate scanning lines and data lines, which are arranged on the array substrate in an interweave manner, define a plurality of sub-pixel regions, each of which comprises a pixel circuit (hereinafter referred to as a sub-pixel circuit) as shown in FIG. 1. These sub-pixel circuits form the pixel circuit on the array substrate, and R, G and B sub-pixels form a pixel unit. Hence, the display panel with the resolution of 1024*768 comprises 768 gate scanning lines and 1024*3=3072 data lines. Each gate scanning line is coupled to a gate electrode of a switch TFT T1 in the sub-pixel circuit, and each data line is coupled to a source electrode of the switch TFT T1. As shown in FIG. 3, when the method is used to apply a driving voltage ELVDD to the source electrode of the driving TFT DTFT in the sub-pixel circuit, it mainly comprises the following steps.

[0043] At first, it is required to scan a first pixel row, and prior to the scanning, it is required to:

[0044] acquire data voltages for each sub-pixel circuit in the first pixel row, i.e., acquire data voltages for 3072 data lines in the first pixel row;

[0045] calculate a minimum driving voltage for each sub-pixel circuit in the first pixel row in accordance with the acquired 3072 data voltages to obtain 3072 minimum driving voltages, the minimum driving voltage for the sub-pixel circuit being at least sufficiently to ensure the driving TFT DTFT of the sub-pixel circuit to operate in a saturation region, thereby to ensure an OLED to emit light normally;

[0046] select a maximum value from among the obtained 3072 minimum driving voltages as a maximum driving voltage M_1 for the first pixel row, M_1 being sufficient to ensure all sub-pixel circuits in the first pixel row to operate normally; and

[0047] apply M_1 to the pixel circuit as the driving voltage ELVDD for the pixel circuit.

[0048] Then, the first pixel row starts to be scanned. The gate scanning line in a first row outputs a scanning signal so as to switch on the switch TFT T1 in each sub-pixel circuit in the

first pixel row, and the data line writes the data voltage into a storage capacitor Cst via the switch TFT T1 in the sub-pixel circuit.

[0049] After the data voltage is written into the storage capacitor Cst, the gate scanning line in the first row stops outputting the scanning signal, the switch TFT T1 in each sub-pixel circuit in the first pixel row is switched off, and the OLED in the first pixel row emits light normally.

[0050] Next, it is required to scan a second pixel row, and prior to the scanning, it is required to:

[0051] acquire data voltages for each sub-pixel circuit in the second pixel row, i.e., acquire data voltages for 3072 data lines in the second pixel row;

[0052] calculate a minimum driving voltage for each sub-pixel circuit in the second pixel row in accordance with the acquired 3072 data voltages, to obtain 3072 minimum driving voltages, the minimum driving voltage for the sub-pixel circuit being at least sufficient to ensure the driving TFT DTFT of the sub-pixel circuit to operate in the saturation region, thereby to ensure the OLED to emit light normally;

[0053] select a maximum value from among the obtained 3072 minimum driving voltages as a maximum driving voltage M_2 for the second pixel row, M_2 being sufficient to ensure all the sub-pixel circuits in the second pixel row to operate normally;

[0054] compare the maximum driving voltage M_1 for the first pixel row with the maximum driving voltage M_2 for the second pixel row, if $M_1 < M_2$, maintain the value of M_2 , and if $M_1 \geq M_2$, assign the value of M_1 to M_2 ; and

[0055] apply M_2 to the pixel circuit as the driving voltage ELVDD for the pixel circuit, so as to ensure the driving TFTs of all the sub-pixel circuits in the first and second rows to operate in the saturation region, thereby to ensure the OLEDs in the first and second rows to emit light normally.

[0056] Then, the second pixel row starts to be scanned. The gate scanning line in a second row outputs a scanning signal so as to switch on the switch TFT T1 in each sub-pixel circuit in the second pixel row, and the data line writes a data voltage into the storage capacitor Cst via the switch TFT T1 in the sub-pixel circuit.

[0057] After the data voltage is written into the storage capacitor Cst, the gate scanning line in the second row stops outputting the scanning signal, the switch TFT T1 in each sub-pixel circuit in the second pixel row is switched off, and the OLEDs in the first and second rows emit light normally.

[0058] The calculation and scanning will be performed on the subsequent pixel rows in the pixel circuit in a similar manner.

[0059] For the n^{th} pixel row, prior to the scanning, it is required to:

[0060] acquire data voltages for each sub-pixel circuit in the n^{th} pixel row, i.e., acquire data voltages for 3072 data lines in the n^{th} pixel row;

[0061] calculate a minimum driving voltage for each sub-pixel circuit in the n^{th} pixel row in accordance with the acquired 3072 data voltages, so as to obtain 3072 minimum driving voltages, the minimum driving voltage for the sub-pixel circuit being at least sufficient to ensure the driving TFTs of the sub-pixel circuit to operate in the saturation region, thereby to ensure the OLED to emit light normally;

[0062] select a maximum value from among the obtained 3072 minimum driving voltages as a maximum driving voltage M_n for the n^{th} pixel row, M_n being sufficient to ensure all the sub-pixel circuits in the n^{th} pixel row to operate normally;

[0063] compare a maximum driving voltage M_{n-1} for an $(n-1)^{th}$ pixel row with the maximum driving voltage M_n for the n^{th} pixel row, if $M_{n-1} < M_n$, maintain the value of M_n , and if $M_{n-1} \geq M_n$, assign the value of M_{n-1} to M_n ; and

[0064] apply M_n to the pixel circuit as the driving voltage ELVDD for the pixel circuit, so as to ensure the driving TFTs of all the sub-pixel circuits in the first to the n^{th} pixel rows to operate in the saturation region, thereby to ensure the OLEDs in the first to the n^{th} pixel rows to emit light normally.

[0065] Then, the n^{th} pixel row starts to be scanned. The gate scanning line in the n^{th} row outputs a scanning signal so as to switch on the switch TFT T1 in each sub-pixel circuit in the n^{th} pixel row, and the data line writes the data voltage into the storage capacitor Cst via the switch TFT T1 in the sub-pixel circuit.

[0066] After the data voltage is written into the storage capacitor Cst, the gate scanning line in the n^{th} row stops outputting the scanning signal the switch TFT T1 in each sub-pixel circuit in the n^{th} pixel row is switched off, and the OLEDs in the first to the n^{th} pixel rows emit light normally.

[0067] The scanning is performed as mentioned above until the 768th pixel row is scanned. Here, n represents a serial number of the pixel row in the pixel circuit, and it is an integer greater than 2 and not greater than 768.

[0068] The present disclosure further provides an apparatus for adjusting a driving voltage for a pixel circuit. And as shown in FIG. 4, the apparatus mainly comprises a driving power IC coupled to the pixel circuit and an operational processing module coupled to the driving power IC. The driving power IC is configured to apply a driving voltage to the pixel circuit, and the operational processing module is configured to dynamically adjust the driving voltage applied by the driving power IC to the pixel circuit in accordance with data voltages for each pixel row.

[0069] The operational processing module may comprise:

[0070] a row buffering unit configured to acquire a plurality of data voltages for a pixel row to be scanned, and store therein the data voltages from each data line in each pixel row; and

[0071] a calculating unit configured to read the data voltages in the row buffering unit, calculate a minimum driving voltage for each sub-pixel circuit in a pixel row to be scanned in accordance with the data voltages, select a maximum value from among the minimum driving voltages, configure the maximum value as a maximum driving voltage, determine a maximum value selected from the maximum driving voltage for the pixel row to be scanned and maximum driving voltages for all pixel rows before the pixel row to be scanned as a driving voltage ELVDD for the pixel circuit, and transmit it to a driving power IC that drives a display panel to display in accordance with the received driving voltage ELVDD.

[0072] In this embodiment, the operational processing module may be integrated into the driving power IC so as to miniaturize the apparatus and reduce the production cost.

[0073] The present disclosure further provides a display device comprising the above-mentioned apparatus for adjusting the driving voltage, for the pixel circuit. For example, the display device is an active matrix/organic, light-emitting diode (AMOLED) display device. According to the apparatus having the OLED pixel circuit, it is able to greatly reduce the dynamic loss and the temperature rise of the OLED pixel circuit and prolong the life of the OLED while reducing the driving cost. As a result, it is able to prolong the life of the display device and improve the reliability thereof.

[0074] The above are merely the preferred embodiments of the present invention, but shall not be used to limit the present invention. A person skilled in the art may further make improvements and modifications without departing from the principle of the present invention, and these improvements and modifications shall also fall within the scope of the present invention.

What is claimed is:

1. A method for adjusting a driving voltage for a pixel circuit, wherein the driving voltage for the pixel circuit is dynamically adjusted in accordance with data voltages in each pixel row.

2. The method according to claim 1, wherein the pixel circuit comprises a plurality of sub-pixel circuits forming a plurality of pixel rows.

3. The method according to claim 2, wherein the method comprises:

acquiring data voltages for each sub-pixel circuit in a pixel row to be scanned in the pixel circuit, the sub-pixel circuit comprising a driving thin film transistor (TFT) and a light-emitting element.

4. The method according to claim 3, wherein the method comprises:

calculating, in accordance with the data voltages, a minimum driving voltage for each sub-pixel circuit in the pixel row to be scanned, the minimum driving voltage being a minimum voltage that ensures the driving TFT to operate in a saturation region and ensures the light-emitting element to emit light normally, after the acquiring step.

5. The method according to claim 4, wherein the method comprises:

selecting a maximum value from among the minimum driving voltages for the sub-pixel circuits in the pixel row to be scanned, and configuring the maximum value as a maximum driving voltage for the pixel row to be scanned, after the calculating step.

6. The method according to claim 5, wherein the method comprises:

configuring a maximum value from among the determined maximum driving voltage for the pixel row to be scanned and maximum driving voltages for all pixel rows before the pixel row to be scanned, as the driving voltage for the pixel circuit, after the selecting step.

7. The method according to claim 2, comprising:

acquiring a maximum driving voltage M_1 for a first pixel row in the pixel circuit;

configuring M_1 as a driving voltage for the pixel circuit;

acquiring a maximum driving voltage M_2 for a second pixel row in the pixel circuit and comparing M_1 with M_2 , if $M_1 < M_2$, maintaining the value of M_2 , and if $M_1 \geq M_2$, assigning the value of M_1 to M_2 ;

configuring M_2 as the driving voltage for the pixel circuit;

...

acquiring a maximum driving voltage M_n for an n^{th} pixel row and comparing M_{n-1} with M_n , if $M_{n-1} < M_n$, maintaining the value of M_n , and if $M_{n-1} \geq M_n$, assigning the value of M_{n-1} to M_n ; and

configuring M_n as the driving voltage for the pixel circuit, wherein n is an integer greater than 2.

8. An apparatus for adjusting a driving voltage for a pixel circuit, wherein the driving voltage for the pixel circuit is dynamically adjusted in accordance with data voltages in each pixel row.

9. The apparatus according to claim 8, wherein the pixel circuit comprises a plurality of sub-pixel circuits that form a plurality of pixel rows.

10. The apparatus according to claim 9, comprising:

a driving power integrated circuit (IC) coupled to the pixel circuit, and

an operational processing module coupled to the driving power IC and configured to dynamically adjust a driving voltage applied by the driving power IC to the pixel circuit in accordance with data voltages for each pixel row.

11. The apparatus according to claim 10, wherein the operational processing module comprises:

a row buffering unit configured to acquire the data voltages for each sub-pixel circuit in a pixel row to be scanned; and

a calculating unit configured to calculate a minimum driving voltage for each sub-pixel circuit in the pixel row to be scanned in accordance with the data voltages, select a maximum value from among the minimum driving voltages, configure the maximum value as a maximum driving voltage for the pixel row to be scanned, and transmit a maximum value selected from among the maximum driving voltage for the pixel row to be scanned and maximum driving voltages for all pixel rows before the pixel row to be scanned, as a value of the driving voltage for the pixel circuit, to the driving power IC.

12. The apparatus according to claim 10, wherein the operational processing module is integrated into the driving power IC.

13. The apparatus according to claim 11, wherein the operational processing module is integrated into the driving power IC.

14. A display device, comprising an apparatus for adjusting a driving voltage for a pixel circuit, wherein the driving voltage for the pixel circuit is dynamically adjusted in accordance with data voltages in each pixel row.

15. The display device according to claim 14, wherein the pixel circuit comprises a plurality of sub-pixel circuits that form a plurality of pixel rows.

16. The display device according to claim 15, wherein the apparatus comprises:

a driving power integrated circuit (IC) coupled to the pixel circuit, and

an operational processing module coupled to the driving power IC and configured to dynamically adjust a driving voltage applied by the driving power IC to the pixel circuit in accordance with data voltages for each pixel row.

17. The display device according to claim 16, wherein the operational processing module comprises:

a row buffering unit configured to acquire the data voltages for each sub-pixel circuit in a pixel row to be scanned; and

a calculating unit configured to calculate a minimum driving voltage for each sub-pixel circuit in the pixel row to be scanned in accordance with the data voltages, select a maximum value from among the minimum driving voltages, configure the maximum value as a maximum driving voltage for the pixel row to be scanned, and transmit a maximum value selected from among the maximum driving voltage for the pixel row to be scanned and maximum driving voltages for all pixel rows before the

pixel row to be scanned, as a value of the driving voltage for the pixel circuit, to the driving power IC.

18. The display device according to claim **16**, wherein the operational processing module is integrated into the driving power IC.

19. The display device according to claim **17**, wherein the operational processing module is integrated into the driving power IC.

20. The display device according to claim **14**, wherein the display device is an active matrix/organic light-emitting diode (AMOLED) display device.

* * * * *

专利名称(译)	用于调整像素电路的驱动电压的方法和装置，以及显示装置		
公开(公告)号	US20150049070A1	公开(公告)日	2015-02-19
申请号	US14/367717	申请日	2013-12-18
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	REN LIJUN TSENG SZUHENG ZHANG CHEN		
发明人	REN, LIJUN TSENG, SZUHENG ZHANG, CHEN		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3696 G09G3/3233 G09G2300/0842 G09G2330/02 G09G2330/028		
优先权	201310358943.7 2013-08-16 CN		
其他公开文献	US9620057		
外部链接	Espacenet USPTO		

摘要(译)

在本发明提供的方法中，根据每个像素行中的数据电压动态调整像素电路的驱动电压。因此，与向像素电路施加恒定电压的传统方法相比，其中提供的方法能够极大地减少OLED像素电路的动态损耗和温度升高并且延长OLED的寿命，同时减少驾驶成本。

