



US 20160247450A1

(19) **United States**(12) **Patent Application Publication**
LIU et al.(10) **Pub. No.: US 2016/0247450 A1**(43) **Pub. Date: Aug. 25, 2016**(54) **DISPLAY APPARATUS AND OPERATION
METHOD THEREOF**(71) Applicant: **AU OPTRONICS CORP.**, Hsin-Chu
(TW)(72) Inventors: **LI-WEI LIU**, Hsin-Chu (TW);
YI-CHENG LIN, Hsin-Chu (TW)(21) Appl. No.: **14/691,665**(22) Filed: **Apr. 21, 2015**(30) **Foreign Application Priority Data**


Feb. 24, 2015 (TW) 104105852

Publication Classification(51) **Int. Cl.**
G09G 3/32 (2006.01)(52) **U.S. Cl.**CPC **G09G 3/3258** (2013.01); **G09G 2330/028**
(2013.01); **G09G 2320/0204** (2013.01); **G09G**
2330/10 (2013.01); **G09G 2300/0842**
(2013.01); **G09G 2310/0262** (2013.01); **G09G**
2320/043 (2013.01)

(57)

ABSTRACT

A display apparatus includes a display unit, a source driver, a gate driver and a compensation unit. The display unit includes at least a pixel unit. Each pixel unit includes a first transistor, a second transistor, a first capacitor, a second capacitor and an organic light emitting diode. When the pixel unit is operated in a display mode, the pixel unit outputs a sensing voltage including a first parameter having characteristics of the second transistor and a second parameter having characteristics of the organic light emitting diode. The source driver receives a compensation data and accordingly adjusts the next display data. The compensation unit is disposed between the second capacitor and the source driver and electrically coupled between the second end of the second capacitor and the source driver. The compensation unit receives the sensing voltage and outputs the compensation data according to the received sensing voltage.

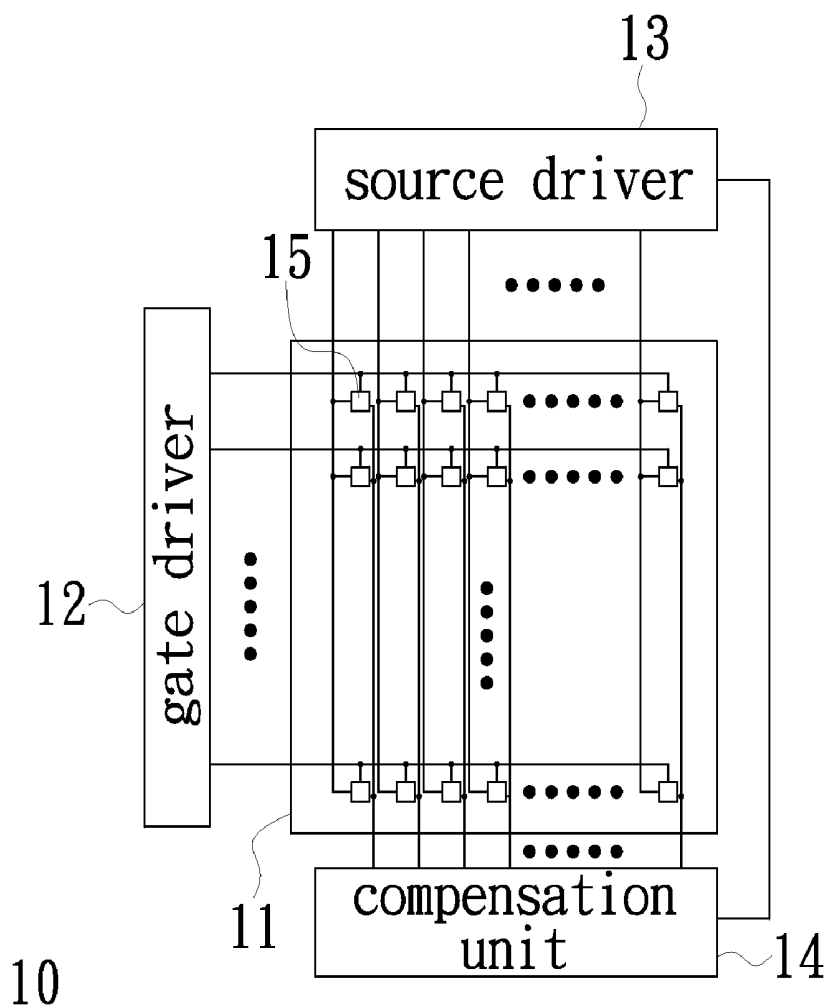

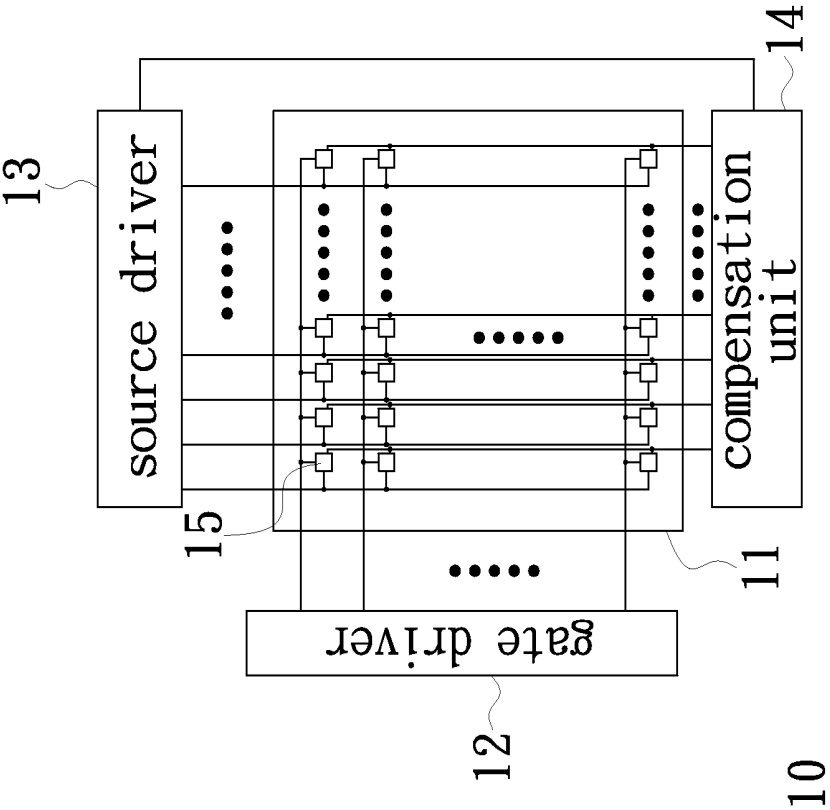


FIG. 1

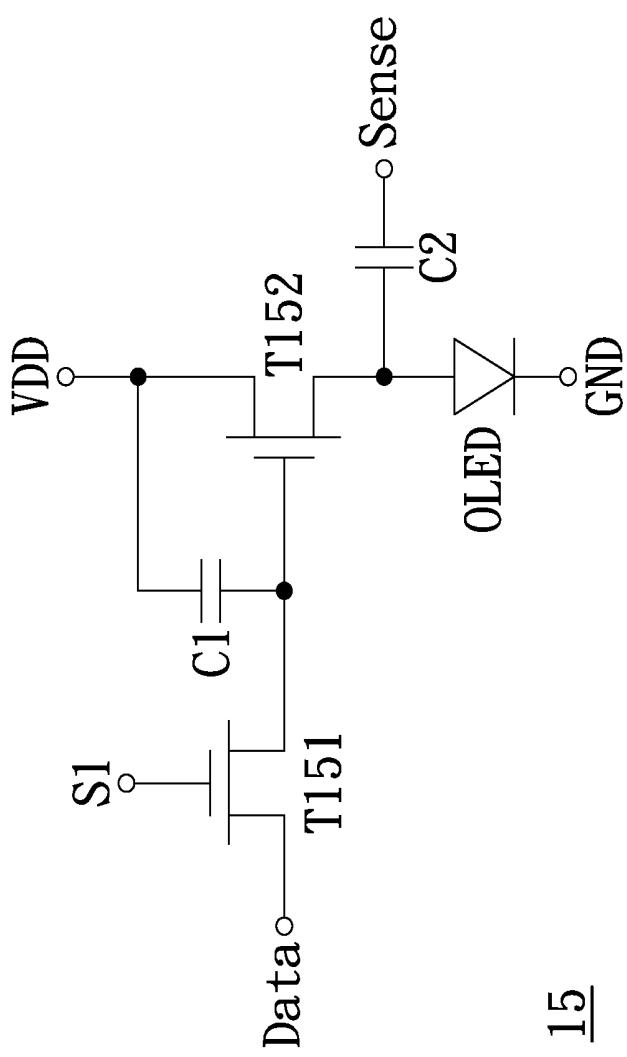


FIG. 2A

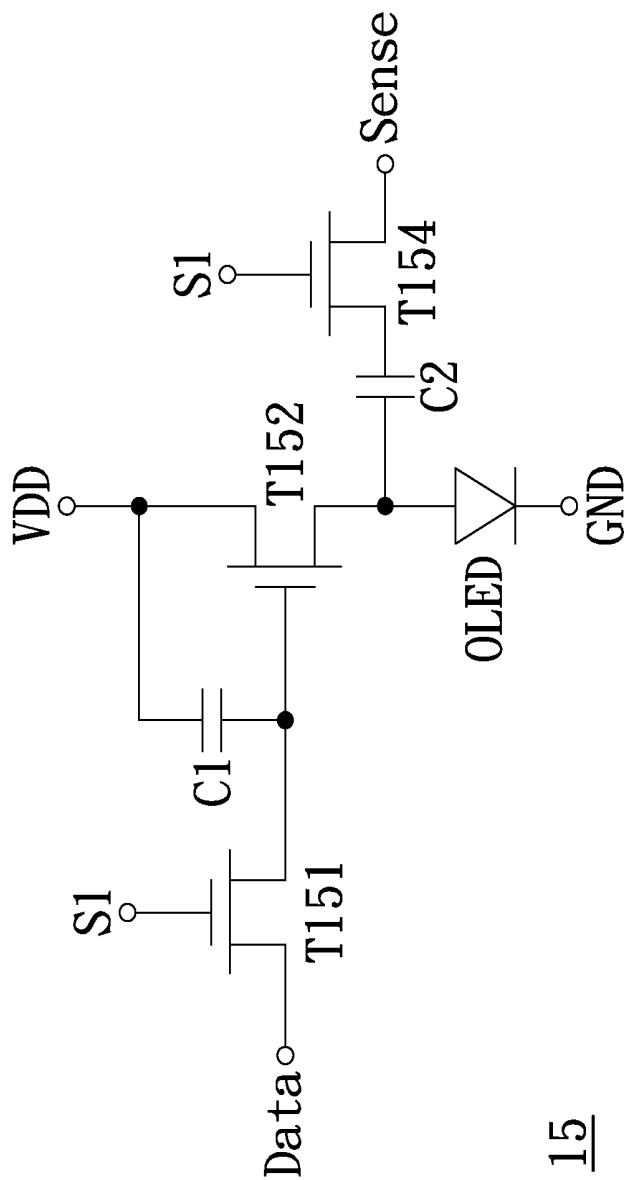


FIG. 2B

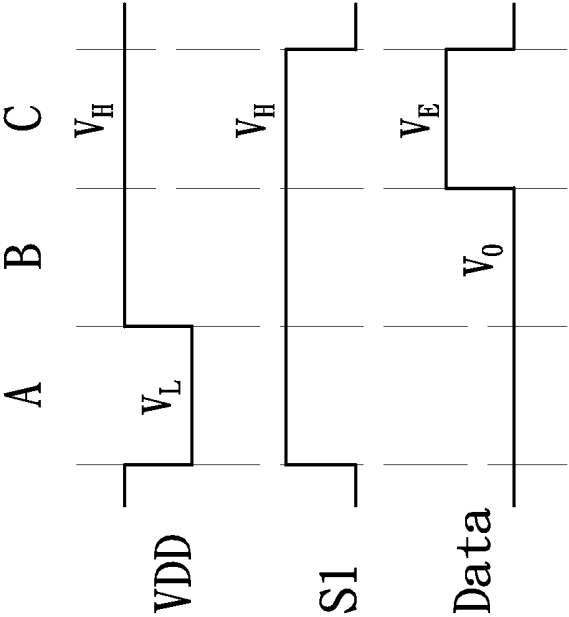


FIG. 3

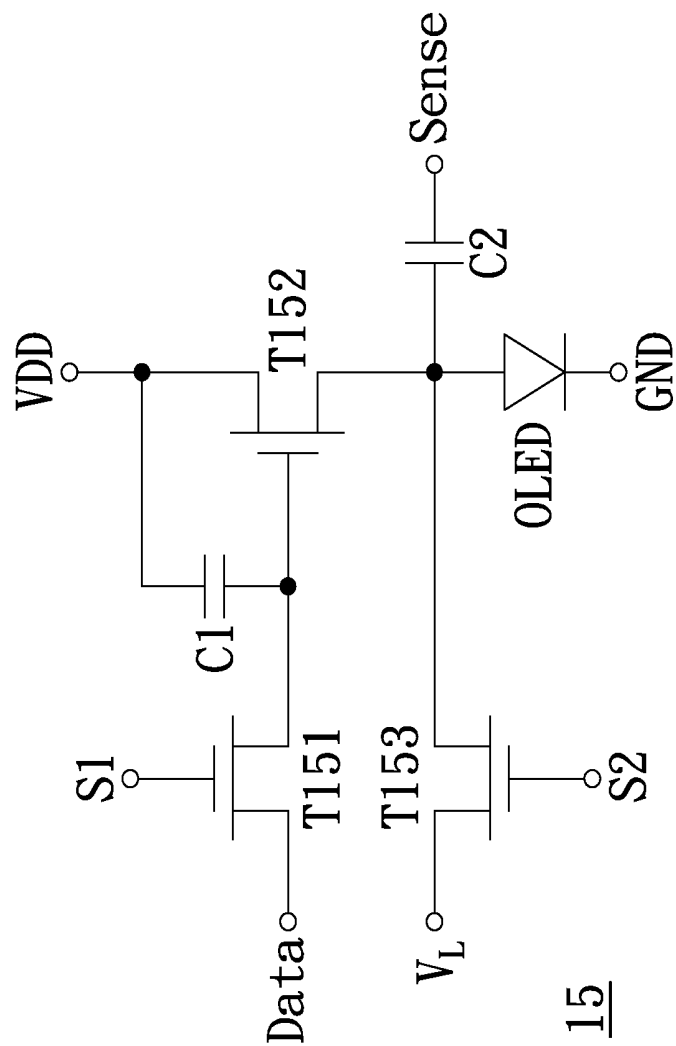


FIG. 4A

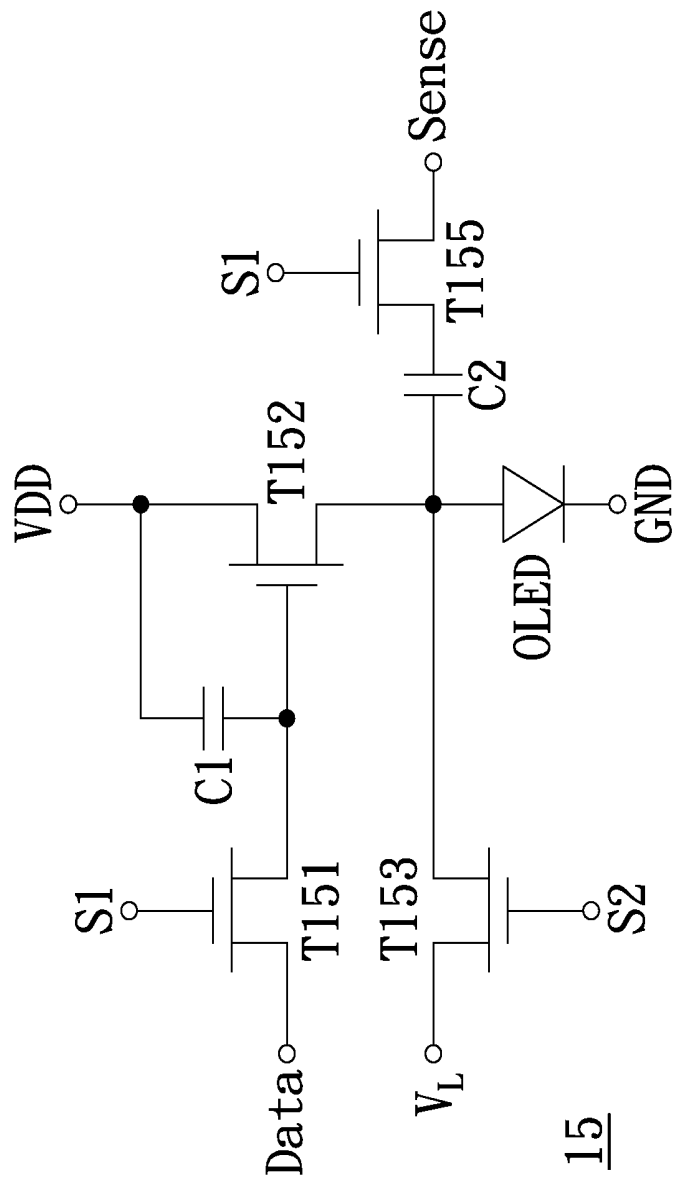


FIG. 4B

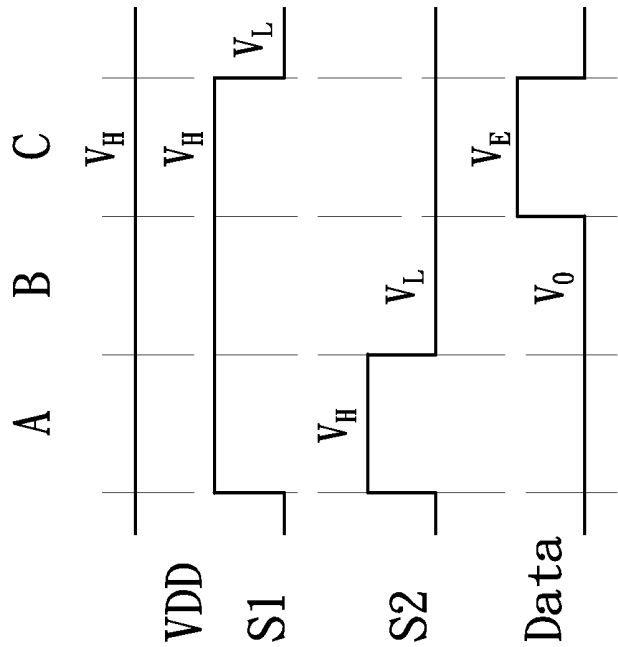


FIG. 5

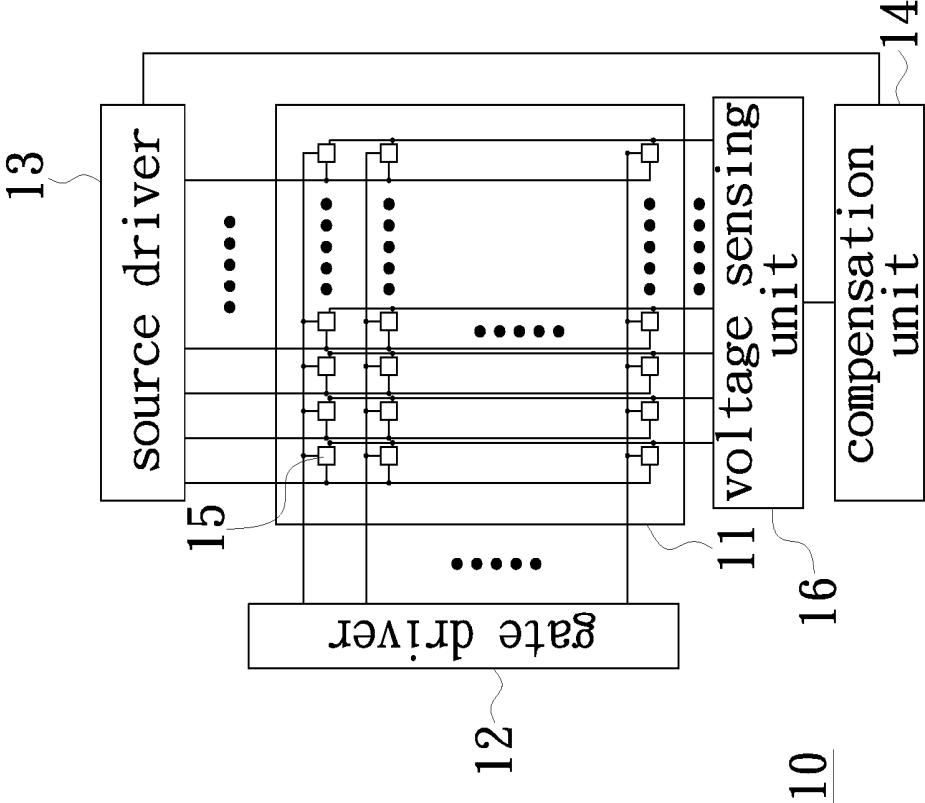


FIG. 6

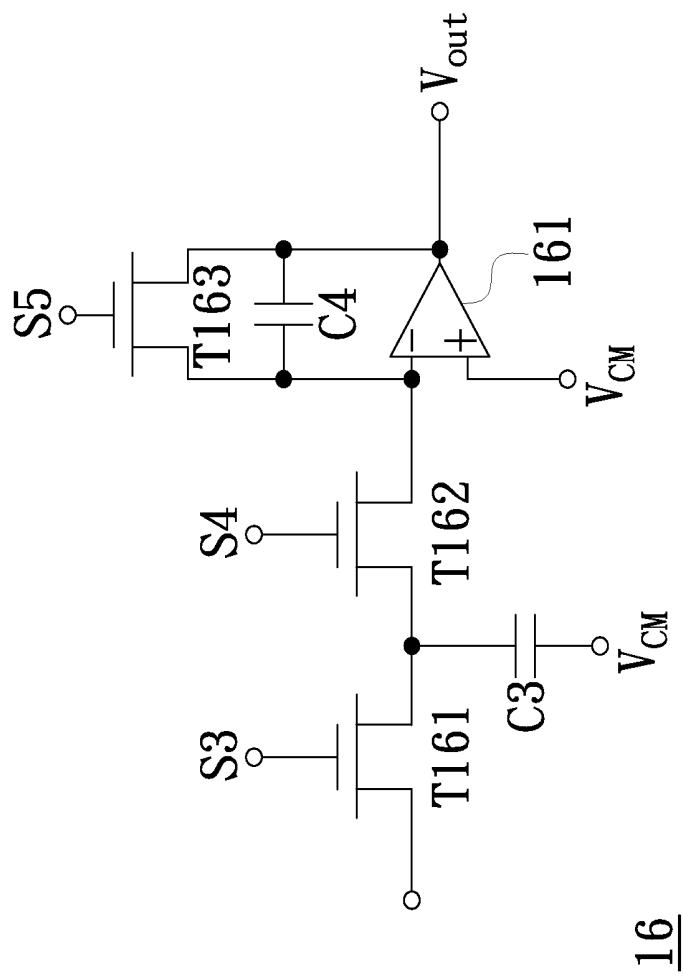


FIG. 7

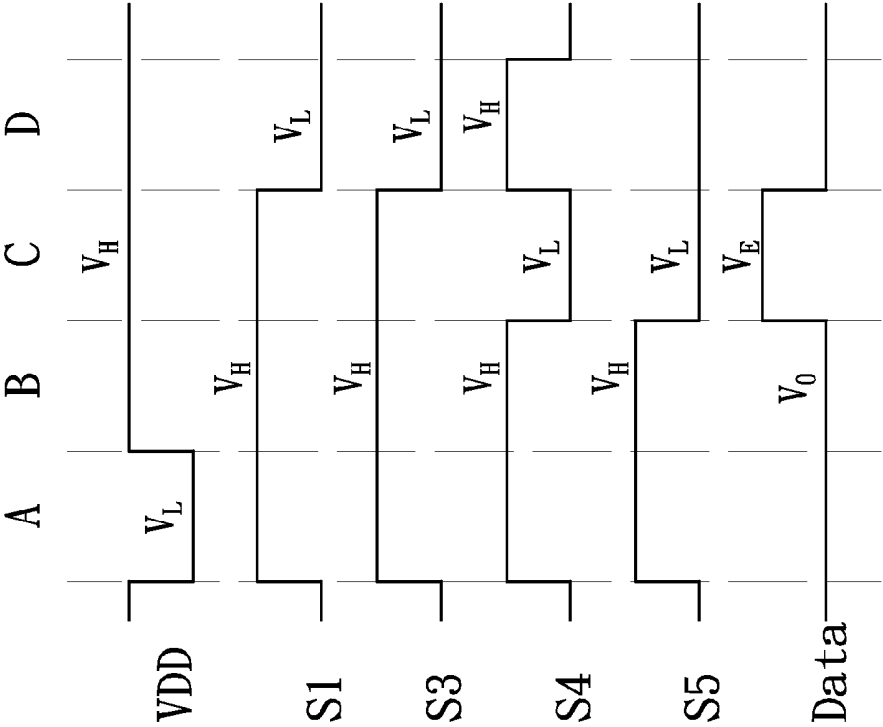


FIG. 8

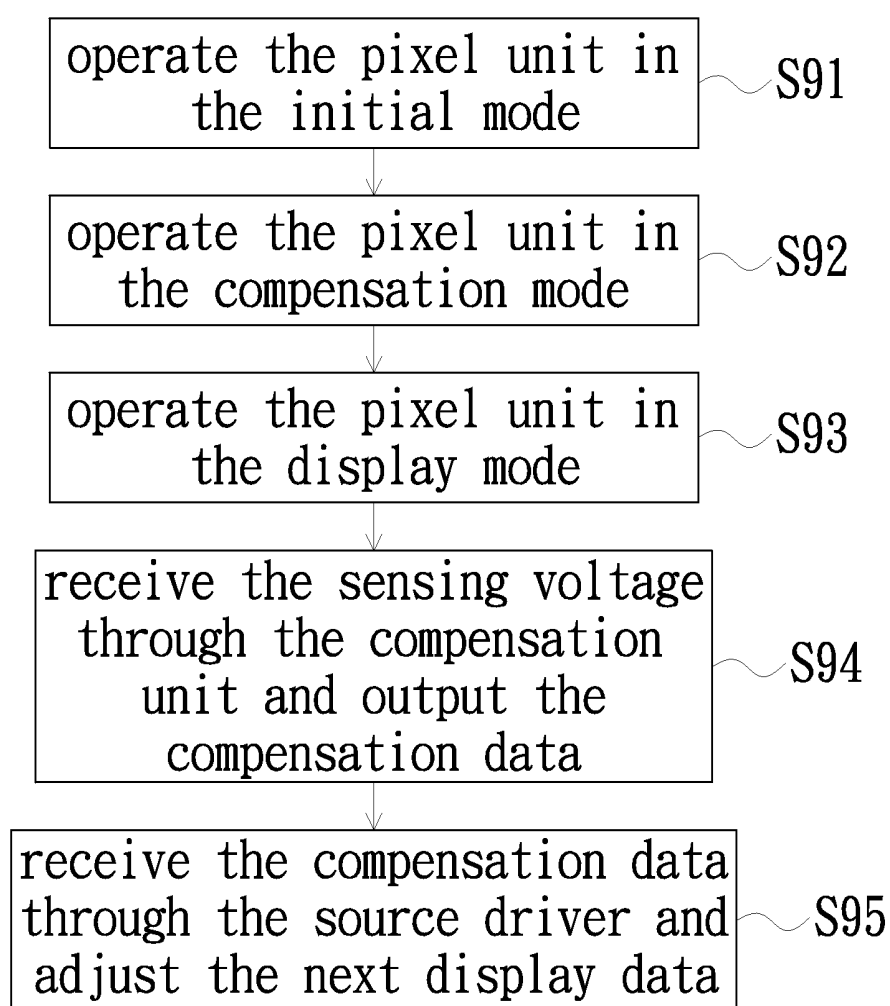


FIG. 9

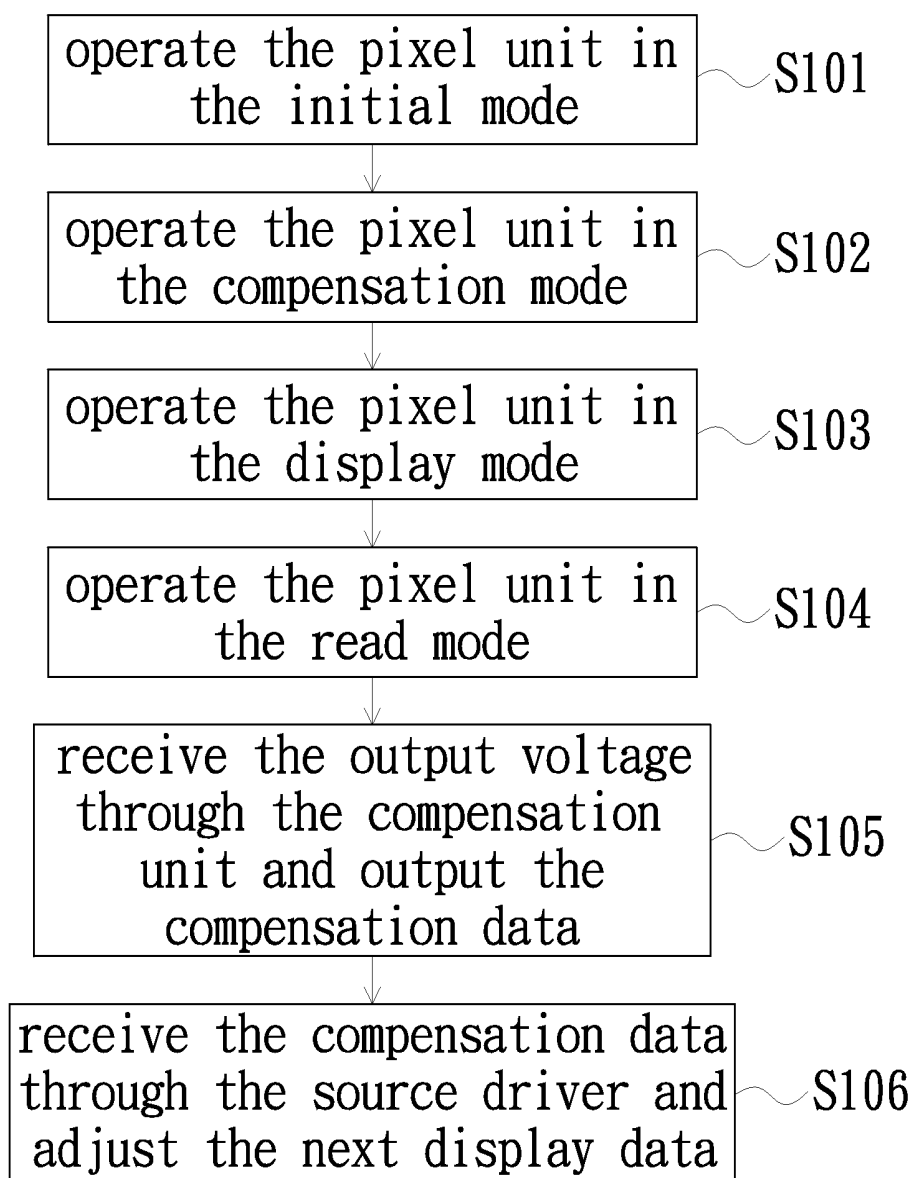


FIG. 10

DISPLAY APPARATUS AND OPERATION METHOD THEREOF

TECHNICAL FIELD

[0001] The present disclosure relates to a display apparatus, and more particularly to a display apparatus having a pixel unit compensation function.

BACKGROUND

[0002] Most of the current display apparatuses are implemented with liquid crystal displays (LCDs). Compared to the cathode ray tube (CRT) display, LCD has smaller size, high mobility, low power consumption, etc. However, in respond to the high demand of thin display apparatus and low power consumption, organic light emitting diode displays have been seen in market in recent years. The main difference between the organic light emitting diode displays and the conventional LCDs is that the organic light emitting diode displays have the self-luminance feature. Therefore, the organic light emitting diode displays have smaller size, lower manufacturing cost and less power consumption due to no backlight device is required. However, the pixel units in the organic light emitting diode display may have aging issue which is resulted by the repeating displaying operations, and consequentially the organic light emitting diode display may have incorrect display issues. Thus, it is quite important to develop a mechanism to effectively detect the aging of the pixel unit effectively and accurately compensate the aging in time.

SUMMARY

[0003] The present disclosure provides a display apparatus, which includes a display unit, a source driver, a gate driver and a compensation unit. The display unit includes at least a pixel unit. Each pixel unit includes a first transistor, a second transistor, a first capacitor, a second capacitor and an organic light emitting diode. The first transistor has a first end, a second end and a control end. The first transistor is configured to have its first end for receiving a display data and its control end for receiving a first control signal. The first transistor determines whether or not to output the display data to its second end according to the first control signal. The second transistor has a first end, a second end and a control end. The second transistor is configured to have its first end for receiving a power supply voltage and its control end electrically coupled to the second end of the first transistor. The first capacitor has a first end and a second end. The first capacitor is configured to have its first end electrically coupled to the second end of the first transistor and its second end electrically coupled to the first end of the second transistor. The second capacitor has a first end and a second end. The second capacitor is configured to have its first end electrically coupled to the second end of the second transistor and its second end for outputting a sensing voltage. The organic light emitting diode has a first end and a second end. The organic light emitting diode is configured to have its first end electrically coupled to the second end of the second transistor and its second end electrically coupled to a first low-level voltage. When the pixel unit is operated in a display mode, the organic light emitting diode is ON, and the sensing voltage includes a first parameter having characteristics of the second transistor and a second parameter having characteristics of the organic light emitting diode. The source driver is electrically coupled to the at least one pixel unit. The source driver is configured to

receive a compensation data and accordingly adjust the next display data. The compensation unit is disposed between the second capacitor and the source driver and electrically coupled between the second end of the second capacitor and the source driver. The compensation unit is configured to receive the sensing voltage and output the compensation data according to the received sensing voltage.

[0004] The present disclosure further provides an operation method of a display apparatus. The display apparatus includes a display unit, a source driver and a compensation unit. The display unit includes at least a pixel unit. Each pixel unit includes a first transistor, a second transistor, a first capacitor, a second capacitor and an organic light emitting diode. The first transistor has a first end, a second end and a control end. The first transistor is configured to have its first end for receiving a display data, its control end for receiving a first control signal, and its second end for outputting the display data. The second transistor has a first end, a second end and a control end. The second transistor is configured to have its first end for receiving a power supply voltage and its control end electrically coupled to the second end of the first transistor. The first capacitor has a first end and a second end. The first capacitor is configured to have its first end electrically coupled to the second end of the first transistor and its second end electrically coupled to the first end of the second transistor. The second capacitor has a first end and a second end. The second capacitor is configured to have its first end electrically coupled to the second end of the second transistor and its second end for outputting a sensing voltage. The organic light emitting diode has a first end and a second end. The organic light emitting diode is configured to have its first end electrically coupled to the second end of the second transistor and its second end electrically coupled to a first low-level voltage. The source driver is electrically coupled to the at least one pixel unit. The compensation unit is disposed between the second capacitor and the source driver and electrically coupled between the second end of the second capacitor and the source driver. The operation method includes steps of: operating the pixel unit in a display mode and turning on the organic light emitting diode; configuring the compensation unit to receive the sensing voltage and output a compensation data; and configuring the source driver to receive the compensation data and adjust the next display data, wherein the sensing voltage comprises a first parameter having characteristics of the second transistor and a second parameter having characteristics of the organic light emitting diode.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] The present disclosure will become more readily apparent to those ordinarily skilled in the art after reviewing the following detailed description and accompanying drawings, in which:

[0006] FIG. 1 is a schematic diagram of a display apparatus in accordance with the first embodiment of the present disclosure;

[0007] FIG. 2A is a schematic circuit diagram of a display unit in accordance with the first embodiment of the present disclosure;

[0008] FIG. 2B is a schematic circuit diagram of a display unit in accordance with the second embodiment of the present disclosure;

[0009] FIG. 3 is a timing chart of the related signals of the pixel units of FIGS. 2A and 2B in accordance with an embodiment of the present disclosure;

[0010] FIG. 4A is a schematic circuit diagram of a display unit in accordance with the third embodiment of the present disclosure;

[0011] FIG. 4B is a circuit schematic diagram of a display unit in accordance with the fourth embodiment of the present disclosure;

[0012] FIG. 5 is a timing chart of the signals related to the pixel units of FIGS. 4A and 4B in accordance with an embodiment of the present disclosure;

[0013] FIG. 6 is a schematic diagram of a display apparatus in accordance with the second embodiment of the present disclosure;

[0014] FIG. 7 is a schematic circuit diagram of a voltage sensing unit in accordance with an embodiment of the present disclosure;

[0015] FIG. 8 is a timing chart of the related signals of the display apparatus of FIG. 6 in accordance with an embodiment of the present disclosure;

[0016] FIG. 9 is a flowchart of an operation method of a display apparatus in accordance with the first embodiment of the present disclosure; and

[0017] FIG. 10 is a flowchart of an operation method of a display apparatus in accordance with the second embodiment of the present disclosure.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0018] The present disclosure will now be described more specifically with reference to the following embodiments. It is to be noted that the following descriptions of preferred embodiments of this disclosure are presented herein for purpose of illustration and description only. It is not intended to be exhaustive or to be limited to the precise form disclosed.

[0019] FIG. 1 is a schematic diagram of a display apparatus in accordance with the first embodiment of the present disclosure. As shown in FIG. 1, the display apparatus 10 in the present embodiment includes a display unit 11, a gate driver 12, a source driver 13 and a compensation unit 14. The display unit 11 includes at least one pixel unit 15, and each pixel unit 15 is electrically coupled to the gate driver 12, the source driver 13 and the compensation unit 14. The pixel unit 15 is configured to receive display data Data outputted from the source driver 13 and display the received display data Data according to a first control signal S1 outputted from the gate driver 12 to each pixel unit 15. Additionally, the pixel unit 15 is further configured to output a sensing voltage Sense to the compensation unit 14 while displaying the received display data Data. The compensation unit 14 is configured to output compensation data to the source driver 13 according to the received sensing voltage Sense. The source driver 13 is configured to adjust the next display data Data according to the current compensation data, so as to compensate the aging of the components in the pixel unit 15 according to the compensation data and prevent the pixel unit 15 from having the incorrect display issue.

[0020] FIG. 2A is a schematic circuit diagram of the display unit 15 in FIG. 1 in accordance with the first embodiment of the present disclosure. As shown in FIG. 2A, the pixel unit 15 in the present embodiment includes a transistor T151, a transistor T152, a capacitor C1, a capacitor C2 and an organic light emitting diode OLED. The transistor T151 has a first end, a second end and a control end. The transistor T151 is configured to have its first end electrically coupled to the source driver 13 and from which to receive the display data

Data; and its control end electrically coupled to the gate driver 12 and from which to receive the first control signal S1. The transistor T152 has a first end, a second end and a control end. The transistor T152 is configured to have its first end for receiving a power supply voltage VDD; and its control end electrically coupled to the second end of the transistor T151. The capacitor C1 has a first end and a second end. The capacitor C1 is configured to have its first end electrically coupled to the second end of the transistor T151; and its second end electrically coupled to the first end of the transistor T152. The organic light emitting diode OLED has a first end and a second end. The organic light emitting diode OLED is configured to have its first end electrically coupled to the second end of the transistor T152; and its second end electrically coupled to a first low-level voltage GND. The capacitor C2 has a first end and a second end. The capacitor C2 is configured to have its first end electrically coupled to the second end of the transistor T152; and its second end for outputting the sensing voltage Sense to the compensation unit 14.

[0021] FIG. 2B is a schematic circuit diagram of the display unit 15 in FIG. 1 in accordance with the second embodiment of the present disclosure. The display unit 15 of FIG. 2B in the present embodiment and the display unit 15 of FIG. 2A have similar technology features, no redundant detail is to be given herein. A difference lies in that the display unit 15 of FIG. 2B in the present embodiment further includes a transistor T154, besides the abovementioned transistor T151, transistor T152, capacitor C1, capacitor C2 and organic light emitting diode OLED. The transistor T154 has a first end, a second end and a control end. The transistor T154 is configured to have its first end electrically coupled to the second end of the capacitor C2; its control end for receiving the first control signal S1; and its second end for determining whether or not to output the sensing voltage Sense to the compensation unit 14 according to the received first control signal S1.

[0022] FIG. 3 is a timing chart of the related signals of the pixel units 15 of FIGS. 2A and 2B in accordance with an embodiment of the present disclosure. As shown in FIG. 3, the related signals include the power supply voltage VDD, the first control signal S1 and the display data Data. The following, in conjunction with FIGS. 2A and 3, describes an operation method of the pixel unit 15. First, the pixel unit 15 is operated in an initial mode (i.e. the period A in FIG. 3). The initial mode is for maintaining the first end of the organic light emitting diode OLED to have a low-level voltage. Specifically, in the initial mode, the display data Data has a second low-level voltage V_0 ; the power supply voltage VDD has a third low-level voltage V_L which is lower than the second low-level voltage V_0 ; and the first control signal S1 has a high-level voltage V_H . According to the abovementioned signal configuration, the transistor T151 is ON by the first control signal S1; and the second low-level voltage V_0 is transmitted to the second end of the transistor T151 and the first end of the capacitor C1 has the second low-level voltage V_0 . Additionally, because the effect of the power supply voltage VDD, the second end of the capacitor C1 has the third low-level voltage V_L ; the transistor T152 is ON by the second low-level voltage V_0 ; and the second end of the transistor T152 is maintained to have the third low-level voltage V_L due to the effect of the power supply voltage VDD. Moreover, because the difference between the first low-level voltage GND and the third low-level voltage V_L is smaller than the

driving voltage V_{OLED} of the organic light emitting diode OLED, the organic light emitting diode OLED is OFF.

[0023] Next, the pixel unit 15 is operated in a compensation mode (i.e. the period B in FIG. 3). The compensation mode is for obtaining a first parameter (that is, the V_{th} of the transistor T152). Specifically, in the compensation mode, the display data Data has the second low-level voltage V_0 ; the power supply voltage VDD has the high-level voltage V_H ; and the first control signal S1 has the high-level voltage V_H . According to the abovementioned signal configuration, the transistor T151 is ON by the first control signal S1; and the second low-level voltage V_0 is transmitted to the second end of the transistor T151 and the first end of the capacitor C1 has the second low-level voltage V_0 . Additionally, because the effect of the power supply voltage VDD, the second end of the capacitor C1 has the high-level voltage V_H ; the transistor T152 is ON by the second low-level voltage V_0 ; the second end of the transistor T152 is converted from having the third low-level voltage V_L to having the high-level voltage V_H and has increasing voltage until the transistor T152 is OFF; and the second end of the transistor T152 is maintained to have a voltage $V_0 - V_{th}$. Moreover, because the difference between the first low-level voltage GND and the voltage at the second end of the transistor T152 is smaller than the driving voltage V_{OLED} of the organic light emitting diode OLED, the organic light emitting diode OLED is OFF.

[0024] Then, the pixel unit 15 is operated in a display mode (i.e. the period C in FIG. 3). Specifically, in the display mode, the display data Data has a display voltage V_E ; the power supply voltage VDD has the high-level voltage V_H ; and the first control signal S1 has the high-level voltage V_H . According to the abovementioned signal configuration, the transistor T151 is ON by the first control signal S1; the display voltage V_E is transmitted to the second end of the transistor T151 and the first end of the capacitor C1 has the display voltage V_E . Additionally, because the effect of the power supply voltage VDD, the second end of the capacitor C1 has the high-level voltage V_H ; and the transistor T152 is ON by the display voltage V_E . Moreover, because the second end of the transistor T152 is maintained to have the driving voltage V_{OLED} due to that both of the power supply voltage VDD and the display voltage V_E are higher than the driving voltage V_{OLED} of the organic light emitting diode OLED, the organic light emitting diode OLED is ON. Because the voltage at the first end of the capacitor C2 increases from $V_0 - V_{th}$ in the compensation mode to the driving voltage V_{OLED} , correspondingly the voltage at the second end of the capacitor C2 increases to $V_{OLED} - (V_0 - V_{th})$ due to the capacitor coupling feature and consequently the second end of the capacitor C2 can output the first parameter (the V_{th} of the transistor T152) and the second parameter (that is, the driving voltage V_{OLED} of the organic light emitting diode OLED). Thus, the compensation unit 14 can output the compensation data, used for compensating the transistor T152 and the organic light emitting diode OLED, to the source driver 13 according to the voltage $V_{OLED} - (V_0 - V_{th})$ including the first and the second parameters. Accordingly, the source driver 13 can adjust the next display data Data so as to compensate the aging of the transistor T152 and the organic light emitting diode OLED in time and prevent the pixel unit 15 from having the incorrect display issue.

[0025] In another embodiment, the pixel unit 15 may further include a transistor T153. Please refer to FIG. 4A, which is a schematic circuit diagram of the display unit 15 in accordance with the third embodiment of the present disclosure.

The display unit 15 of FIG. 4A in the present embodiment and the display unit 15 of FIG. 2A have similar technology features, no redundant detail is to be given herein. A difference lies in that the display unit 15 of FIG. 4A in the present embodiment further includes a transistor T153. The transistor T153 has a first end, a second end and a control end. The transistor T153 is configured to have its first end for receiving the third low-level voltage V_L ; its control end for receiving a second control signal S2; and its second end electrically coupled to the second end of the transistor T152 and the first end of the organic light emitting diode OLED. According to the abovementioned circuit configuration, the transistor T153 can maintain both of the second end of the transistor T152 and the first end of the organic light emitting diode OLED to have the third low-level voltage V_L in the initial mode.

[0026] FIG. 4B is a circuit schematic diagram of the display unit 15 in accordance with the fourth embodiment of the present disclosure. The display unit 15 of FIG. 4B in the present embodiment and the display unit 15 of FIG. 4A have similar technology features, no redundant detail is to be given herein. A difference lies in that the display unit 15 of FIG. 4B in the present embodiment further includes a transistor T155. The transistor T155 has a first end, a second end and a control end. The transistor T155 is configured to have its first end electrically coupled to the second end of the capacitor C2; its control end for receiving the first control signal S1; and its second end for determining whether or not to output the sensing voltage Sense to the compensation unit 14 according to the first control signal S1.

[0027] FIG. 5 is a timing chart of the signals related to the pixel units 15 of FIGS. 4A and 4B in accordance with an embodiment of the present disclosure. As shown in FIG. 5, the related signals include the power supply voltage VDD, the first control signal S1, the display data Data and the second control signal S2. As shown in FIG. 5, the power supply voltage VDD is always maintained to the high-level voltage V_H . Specifically, in the initial mode (i.e. the period A in FIG. 3), the second control signal S2 has the high-level voltage V_H . According to the abovementioned signal configuration, because the transistor T153, the second end of the transistor T152 and the first end of the organic light emitting diode OLED are maintained to have the third low-level voltage V_L in the initial mode. In the compensation and display modes, the transistor T153 is OFF due to the second control signal S2 has third low-level voltage V_L ; thus, the operations of the pixel units 15 of FIGS. 4A and 4B are same as the operations of the pixel units 15 of FIGS. 2A and 2B, and no redundant detail is to be given herein.

[0028] FIG. 6 is a schematic diagram of a display apparatus in accordance with the second embodiment of the present disclosure. As shown in FIG. 1, the display apparatus 10 in the present embodiment includes the display unit 11, the gate driver 12, the source driver 13, the compensation unit 14 and a voltage sensing unit 16. The voltage sensing unit 16, electrically coupled between the pixel unit 15 and the compensation unit 14, is configured to receive the sensing voltage Sense outputted from the pixel unit 15 and accordingly output an output voltage V_{out} to the compensation unit 14. The compensation unit 14 is configured to output compensation data to the source driver 13 according to the received sensing voltage Sense. The source driver 13 is configured to adjust the next display data Data according to the current compensation data, so as to compensate the aging of the components in the

pixel unit **15** according to the compensation data and prevent the pixel unit **15** from having the incorrect display issue.

[0029] FIG. 7 is a schematic circuit diagram of the voltage sensing unit **16** in accordance with an embodiment of the present disclosure. As shown in FIG. 7, the voltage sensing unit **16** in the present embodiment includes a transistor **T161**, a transistor **T162**, a transistor **T163**, a capacitor **C3**, a capacitor **C4** and an operational amplifier **161**. The transistor **T161** has a first end, a second end and a control end. The transistor **T161** is configured to have its first end electrically coupled to the second end of the capacitor **C2**; and its control end for receiving a third control signal **S3**. The capacitor **C3** has a first end and a second end. The capacitor **C3** is configured to have its first end electrically coupled to the second end of the transistor **T161**; and its second end electrically coupled to a common-mode voltage V_{CM} . The transistor **T162** has a first end, a second end and a control end. The transistor **T162** is configured to have its first end electrically coupled to the first end of the capacitor **C3**; and its control end for receiving a fourth control signal **S4**. The operational amplifier **161** has a negative input end, a positive input end and an output end. The operational amplifier **161** is configured to have its negative input end electrically coupled to the second end of the transistor **T162**; its positive input end electrically coupled to the common-mode voltage V_{CM} ; and its output end for outputting the output voltage V_{out} . The capacitor **C4** has a first end and a second end. The capacitor **C4** is configured to have its first end electrically coupled to the negative input end of the operational amplifier **161**; and its second end electrically coupled to the output end of the operational amplifier **161**. The transistor **T163** has a first end, a second end and a control end. The transistor **T163** is configured to have its first end electrically coupled to the negative input end of the operational amplifier **161**; its second end electrically coupled to the output end of the operational amplifier **161**; and its control end for receiving a fifth control signal **S5**.

[0030] FIG. 8 is a timing chart of the related signals of the display apparatus **10** of FIG. 6 in accordance with an embodiment of the present disclosure. As shown in FIG. 8, the related signals include the power supply voltage **VDD**, the first control signal **S1**, the third control signal **S3**, the fourth control signal **S4**, the fifth control signal **S5** and the display data **Data**. The following, in conjunction with FIGS. 2A, 7 and 8, describes an operation method of the display apparatus **10**, but the present disclosure is not limited thereto.

[0031] First, the pixel unit **15** is operated the initial mode (i.e. the period A in FIG. 8). Specifically, in the initial mode, the display data **Data** has the second low-level voltage V_0 ; the power supply voltage **VDD** has the third low-level voltage V_L which is lower than the second low-level voltage V_0 ; and the first control signal **S1**, the third control signal **S3**, the fourth control signal **S4** and the fifth control signal **S5** have the high-level voltage V_H . According to the abovementioned signal configuration, the transistor **T151** is ON by the first control signal **S1**; and the second low-level voltage V_0 is transmitted to the second end of the transistor **T151** and the first end of the capacitor **C1** has the second low-level voltage V_0 . Additionally, because the effect of the power supply voltage **VDD**, the second end of the capacitor **C1** has the third low-level voltage V_L ; the transistor **T152** is ON by the second low-level voltage V_0 ; and the second end of the transistor **T152** is maintained to have the third low-level voltage V_L due to the effect of the power supply voltage **VDD**. Moreover, because the difference between the first low-level voltage

GND and the third low-level voltage V_L is smaller than the driving voltage V_{OLED} of the organic light emitting diode **OLED**, the organic light emitting diode **OLED** is OFF. Furthermore, because the transistor **T161**, the transistor **T162** and the transistor **T163** of the voltage sensing unit **16** are ON by the third control signal **S3**, the fourth control signal **S4** and the fifth control signal **S5** having the high-level voltage V_H respectively, the first end of the capacitor **C3**, the negative input end and the output end of the operational amplifier **161** have the common-mode voltage V_{CM} .

[0032] Next, the pixel unit **15** is operated in the compensation mode (i.e. the period B in FIG. 8). Specifically, in the compensation mode, the display data **Data** has the second low-level voltage V_0 ; the power supply voltage **VDD** has the high-level voltage V_H ; and the first control signal **S1**, the third control signal **S3**, the fourth control signal **S4** and the fifth control signal **S5** have the high-level voltage V_H . According to the abovementioned signal configuration, the transistor **T151** is ON by the first control signal **S1**; and the second low-level voltage V_0 is transmitted to the second end of the transistor **T151** and the first end of the capacitor **C1** has the second low-level voltage V_0 . Additionally, because the effect of the power supply voltage **VDD**, the second end of the capacitor **C1** has the high-level voltage V_H ; the transistor **T152** is ON by the second low-level voltage V_0 ; the second end of the transistor **T152** is converted from having the third low-level voltage V_L to having the high-level voltage V_H and has increasing voltage until the transistor **T152** is OFF; and the second end of the transistor **T152** is maintained to have a voltage $V_0 - V_{th}$. Moreover, because the difference between the first low-level voltage **GND** and the voltage at the second end of the transistor **T152** is smaller than the driving voltage V_{OLED} of the organic light emitting diode **OLED**, the organic light emitting diode **OLED** is OFF. Furthermore, because the transistor **T161**, the transistor **T162** and the transistor **T163** of the voltage sensing unit **16** are ON by the third control signal **S3**, the fourth control signal **S4** and the fifth control signal **S5** having the high-level voltage V_H respectively, the first end of the capacitor **C3**, the negative input end and the output end of the operational amplifier **161** have the common-mode voltage V_{CM} .

[0033] Then, the pixel unit **15** is operated in the display mode (i.e. the period C in FIG. 8). Specifically, in the display mode, the display data **Data** has the display voltage V_E ; the power supply voltage **VDD** has the high-level voltage V_H ; the first control signal **S1** and the third control signal **S3** have the high-level voltage V_H ; and the fourth control signal **S4** and the fifth control signal **S5** have the third low-level voltage V_L . According to the abovementioned signal configuration, the transistor **T151** is ON by the first control signal **S1**; the display voltage V_E is transmitted to the second end of the transistor **T151** and the first end of the capacitor **C1** has the display voltage V_E . Additionally, because the effect of the power supply voltage **VDD**, the second end of the capacitor **C1** has the high-level voltage V_H ; and the transistor **T152** is ON by the display voltage V_E . Moreover, because the second end of the transistor **T152** is maintained to have the driving voltage V_{OLED} due to that both of the power supply voltage **VDD** and the display voltage V_E are higher than the driving voltage V_{OLED} of the organic light emitting diode **OLED**, the organic light emitting diode **OLED** is ON. Because the voltage at the first end of the capacitor **C2** increases from $V_0 - V_{th}$ in the compensation mode to the driving voltage V_{OLED} , correspondingly the second end of the capacitor **C2** has a

voltage change $V_{OLED}-(V_0-V_{th})$ due to the capacitor coupling feature and consequentially the second end of the capacitor C2 can output the first parameter and the second parameter. Moreover, because the fourth control signal S4 and the fifth control signal S5 have the third low-level voltage V_L , the transistor T162 and the transistor T163 are OFF and therefore the capacitor C3 and the capacitor C2 form a loop; wherein the capacitor C3 has a voltage $(V_{OLED}-V_0+V_{th}) \times (C2/(C2+C3))$.

[0034] Then, the pixel unit 15 is operated in a read mode (i.e. the period D in FIG. 8). Specifically, in the read mode, the power supply voltage VDD has the high-level voltage V_H ; the first control signal S1, the third control signal S3 and the fifth control signal S5 have the third low-level voltage V_L ; and the fourth control signal S4 has the high-level voltage V_H . According to the abovementioned signal configuration, the transistor T151, the transistor T161 and the transistor T163 are OFF and the transistor T162 is ON by the fourth control signal S4 having the high-level voltage V_H and therefore the capacitor C3 and the capacitor C4 form a loop. Because the voltage difference between the two ends of the capacitor C3 is zero, the charge in the capacitor C3 is transferred to the capacitor C4 therefore the output voltage V_{out} is $(V_{OLED}-V_0+V_{th}) \times (C2/(C2+C3)) \times (-C3/C4)$, wherein it is understood that the various voltages $-(V_{OLED}-V_0+V_{th})$ can be obtained by adjusting the capacitances of the capacitors C2, C3 and C4. After the read mode, the compensation unit 14 can output compensation data, used to compensate the transistor T152 and the organic light emitting diode OLED, to the source driver 13 according to the output voltage V_{out} including the first parameter and the second parameter. The source driver 13 then adjusts the next display data Data according to the output voltage V_{out} . In other words, the source driver 13 can compensate the aging of the transistor T152 and the organic light emitting diode OLED according to the output voltage V_{out} including the first parameter and the second parameter and prevent the pixel unit 15 from having the incorrect display issue.

[0035] According to the abovementioned embodiments, an operation method of a display apparatus can be developed by those ordinarily skilled in the art. Please refer to FIG. 9, which is a flowchart of an operation method of a display apparatus in accordance with the first embodiment of the present disclosure. The following, in conjunction with the FIG. 9, FIGS. 2 and 3 or FIGS. 4 and 5, describes an operation method of a display apparatus. As shown in FIG. 9, the operation method of a display apparatus in the present embodiment includes steps of: operating the pixel unit 15 in the initial period (step S91) to maintain the voltage at the first end of the organic light emitting diode OLED to the third low-level voltage V_L ; next, operating the pixel unit 15 in the compensation mode (step S92) to make the first end of the organic light emitting diode OLED have a specified voltage having the first parameter; then, operating the pixel unit 15 in the display mode (step S93), wherein the organic light emitting diode OLED is ON and the capacitor C2 outputs the sensing voltage having a value $V_{OLED}-(V_0-V_{th})$; then, configuring the compensation unit 14 to receive the sensing voltage and output the compensation data (step S94); then, configuring the source driver 13 to receive the compensation data and adjust the next display data by using the compensation data (step S95), so as to compensate the aging of the transistor T152 and the organic light emitting diode OLED.

[0036] Please refer to FIG. 10, which is a flowchart of an operation method of a display apparatus in accordance with the second embodiment of the present disclosure. The following, in conjunction with the FIG. 3, FIG. 3, FIG. 7 and FIG. 10, describes an operation method of a display apparatus. As shown in FIG. 10, the operation method of a display apparatus in the present embodiment includes steps of: operating the pixel unit 15 in the initial period (step S101) to maintain the voltage at the first end of the organic light emitting diode OLED to the third low-level voltage V_L ; next, operating the pixel unit 15 in the compensation mode (step S102) to make the first end of the organic light emitting diode OLED have a specified voltage having the first parameter; then, operating the pixel unit 15 in the display mode (step S103), wherein the organic light emitting diode OLED is ON and the capacitor C3 has a voltage $(V_{OLED}-V_0+V_{th}) \times (C2/(C2+C3))$ divided from the sensing voltage; then, operating the pixel unit 15 in the read mode (step S104), wherein the capacitor C3 and the capacitor C4 form a loop, the charge in the capacitor C3 is transferred to the capacitor C4 due to the voltage difference between the two ends of the capacitor C3 is zero, therefore the output voltage V_{out} is $(V_{OLED}-V_0+V_{th}) \times (C2/(C2+C3)) \times (-C3/C4)$; then, configuring the compensation unit 14 to receive the output voltage V_{out} and output the compensation data (step S105); then, configuring the source driver 13 to receive the compensation data and adjust the next display data by using the compensation data (step S106), so as to compensate the aging of the transistor T152 and the organic light emitting diode OLED.

[0037] In summary, through output a specified voltage having the first and the second parameters when the pixel unit 15 is operated in the display mode and compensating the transistor T152 and the organic light emitting diode OLED according to the specified voltage having the first and the second parameters, the display apparatus 10 of the present disclosure can compensate the aging of the components by performing one sense operation only. In addition, the pixel unit can perform the sense operation while being operated in the display mode without affecting the display effect, the convenience of the sensing operation increases.

[0038] While the disclosure has been described in terms of what is presently considered to be the most practical and preferred embodiments, it is to be understood that the disclosure needs not be limited to the disclosed embodiment. On the contrary, it is intended to cover various modifications and similar arrangements included within the spirit and scope of the appended claims which are to be accorded with the broadest interpretation so as to encompass all such modifications and similar structures.

What is claimed is:

1. A display apparatus, comprising:

a display unit, comprising at least a pixel unit, each pixel unit comprising:

a first transistor, having a first end, a second end and a control end, the first transistor being configured to have its first end for receiving a display data and its control end for receiving a first control signal, wherein the first transistor determines whether or not to output the display data to its second end according to the first control signal;

a second transistor, having a first end, a second end and a control end, the second transistor being configured to have its first end for receiving a power supply

voltage and its control end electrically coupled to the second end of the first transistor;

- a first capacitor, having a first end and a second end, the first capacitor being configured to have its first end electrically coupled to the second end of the first transistor and its second end electrically coupled to the first end of the second transistor;
- a second capacitor, having a first end and a second end, the second capacitor being configured to have its first end electrically coupled to the second end of the second transistor and its second end for outputting a sensing voltage; and
- an organic light emitting diode, having a first end and a second end, the organic light emitting diode being configured to have its first end electrically coupled to the second end of the second transistor and its second end electrically coupled to a first low-level voltage,

wherein when the pixel unit is operated in a display mode, the organic light emitting diode is ON, and the sensing voltage comprises a first parameter having characteristics of the second transistor and a second parameter having characteristics of the organic light emitting diode;

- a source driver, electrically coupled to the at least one pixel unit and configured to receive a compensation data and accordingly adjust the next display data; and
- a compensation unit, disposed between the second capacitor and the source driver and electrically coupled between the second end of the second capacitor and the source driver, wherein the compensation unit receives the sensing voltage and outputs the compensation data according to the received sensing voltage.

2. The display apparatus according to claim 1, wherein when the pixel unit is operated in an initial mode, the display data has a second low-level voltage, the power supply voltage has a third low-level voltage which is lower than the second low-level voltage, the first and the second transistors are ON, and the organic light emitting diode is OFF; wherein when the pixel unit is operated in a compensation mode, the display data has the second low-level voltage, the power supply voltage has a high-level voltage which is higher than the second low-level voltage, the first and the second transistors are ON, and the organic light emitting diode is OFF.

3. The display apparatus according to claim 1, wherein the pixel unit further comprises:

- a third transistor, having a first end, a second end and a control end, the third transistor being configured to have its first end for receiving the third low-level voltage, its control end for receiving a second control signal, and its second end electrically coupled to the first end of the organic light emitting diode, wherein the third transistor determines whether or not to pull down a voltage at the first end of the organic light emitting diode to the third low-level voltage according to the second control signal.

4. The display apparatus according to claim 3, wherein when the pixel unit is operated in an initial mode, the display data has the second low-level voltage, the power supply voltage has the high-level voltage, the second low-level voltage is higher than the third low-level voltage, the first, the second and the third transistors are ON, and the organic light emitting diode is OFF.

5. The display apparatus according to claim 1, wherein the pixel unit is further electrically coupled to a voltage sensing unit, the voltage sensing unit is configured to read an output

voltage and transmit the output voltage to the compensation unit, the voltage sensing unit comprises:

- a third transistor, having a first end, a second end and a control end, the third transistor being configured to have its first end electrically coupled to the second end of the second capacitor and its control end for receiving a third control signal;
- a third capacitor, having a first end and a second end, the third capacitor being configured to have its first end electrically coupled to the second end of the third transistor and its second end electrically coupled to a common-mode voltage;
- a fourth transistor, having a first end, a second end and a control end, the fourth transistor being configured to have its first end electrically coupled to the first end of the third capacitor and its control end for receiving a fourth control signal;
- an operational amplifier, having a negative input end, a positive input end and an output end, the operational amplifier being configured to have its negative input end electrically coupled to the second end of the fourth transistor and its positive input end electrically coupled to the common-mode voltage;
- a fifth transistor, having a first end, a second end and a control end, the fifth transistor being configured to have its first end electrically coupled to the negative input end of the operational amplifier, its second end electrically coupled to the output end of the operational amplifier, and its control end for receiving a fifth control signal; and
- a fourth capacitor, having a first end and a second end, the fourth capacitor being configured to have its first end electrically coupled to the negative input end of the operational amplifier and its second end electrically coupled to the output end of the operational amplifier.

6. The display apparatus according to claim 5, wherein when the pixel unit is operated in the initial mode or the compensation mode, the third, the fourth and the fifth transistors are ON, and the third and the fourth capacitors have the first low-level voltage; wherein when the pixel unit is operated in the display mode, the third transistor is ON, the fourth and the fifth transistors are OFF, the third capacitor stores a dividing sensing voltage divided from the sensing voltage; wherein when the pixel unit is operated in a read mode, the first, the third and the fifth transistors are OFF, the fourth capacitor stores charges of the dividing sensing voltage of the third capacitor to obtain the output voltage, wherein the output voltage comprises the first parameter having the characteristics of the second transistor and the second parameter having the characteristics of the organic light emitting diode.

7. An operation method of a display apparatus, the display apparatus comprising a display unit, a source driver and a compensation unit, the display unit comprising at least a pixel unit, each pixel unit comprising a first transistor, a second transistor, a first capacitor, a second capacitor and an organic light emitting diode, the first transistor having a first end, a second end and a control end, the first transistor being configured to have its first end for receiving a display data, its control end for receiving a first control signal, and its second end for outputting the display data, the second transistor having a first end, a second end and a control end, the second transistor being configured to have its first end for receiving a power supply voltage and its control end electrically coupled to the second end of the first transistor, the first capacitor

having a first end and a second end, the first capacitor being configured to have its first end electrically coupled to the second end of the first transistor and its second end electrically coupled to the first end of the second transistor, the second capacitor having a first end and a second end, the second capacitor being configured to have its first end electrically coupled to the second end of the second transistor and its second end for outputting a sensing voltage, the organic light emitting diode having a first end and a second end, the organic light emitting diode being configured to have its first end electrically coupled to the second end of the second transistor and its second end electrically coupled to a first low-level voltage, the source driver being electrically coupled to the at least one pixel unit, the compensation unit being disposed between the second capacitor and the source driver and electrically coupled between the second end of the second capacitor and the source driver, the operation method comprising:

operating the pixel unit in a display mode and turning on the organic light emitting diode;

configuring the compensation unit to receive the sensing voltage and output a compensation data; and

configuring the source driver to receive the compensation data and adjust the next display data,

wherein the sensing voltage comprises a first parameter having characteristics of the second transistor and a second parameter having characteristics of the organic light emitting diode.

8. The operation method according to claim 7, further comprising:

operating the pixel unit in an initial mode; and

operating the pixel unit in a compensation mode.

9. The operation method according to claim 8, wherein when the pixel unit is operated in the initial mode, the display data has a second low-level voltage, the power supply voltage has a third low-level voltage which is lower than the second low-level voltage, the first and the second transistors are ON, and the organic light emitting diode is OFF; wherein when the pixel unit is operated in the compensation mode, the display data has the second low-level voltage, the power supply voltage has a high-level voltage which is higher than the second low-level voltage, the first and the second transistors are ON, and the organic light emitting diode is OFF.

10. The operation method according to claim 8, wherein the pixel unit further comprises:

a third transistor, having a first end, a second end and a control end, the third transistor being configured to have its first end for receiving the third low-level voltage, its control end for receiving a second control signal, and its second end electrically coupled to the first end of the organic light emitting diode, wherein the third transistor determines whether or not to pull down a voltage at the first end of the organic light emitting diode to the third low-level voltage according to the second control signal.

11. The operation method according to claim 10, wherein when the pixel unit is operated in the initial mode, the display data has the second low-level voltage, the power supply voltage has the high-level voltage, the second low-level voltage is higher than the third low-level voltage, the first, the second and the third transistors are ON, and the organic light emitting diode is OFF.

12. The operation method according to claim 8, wherein the display apparatus further comprises a voltage sensing unit disposed between the second capacitor and the compensation

unit and electrically coupled between the second end of the second capacitor and the compensation unit, the voltage sensing unit comprises a third transistor, a third capacitor, a fourth transistor, an operational amplifier, a fifth transistor and a fourth capacitor, the third transistor has a first end, a second end and a control end, the third transistor is configured to have its first end electrically coupled to the second end of the second capacitor and its control end for receiving a second control signal, the third capacitor has a first end and a second end, the third capacitor is configured to have its first end electrically coupled to the second end of the third transistor and its second end electrically coupled to a common-mode voltage, the fourth transistor has a first end, a second end and a control end, the fourth transistor is configured to have its first end electrically coupled to the first end of the third capacitor and its control end for receiving a third control signal, the operational amplifier has a negative input end, a positive input end and an output end, the operational amplifier is configured to have its negative input end electrically coupled to the second end of the fourth transistor and its positive input end electrically coupled to the common-mode voltage, the fifth transistor has a first end, a second end and a control end, the fifth transistor is configured to have its first end electrically coupled to the negative input end of the operational amplifier, its second end electrically coupled to the output end of the operational amplifier, and its control end for receiving a fourth control signal, and the fourth capacitor has a first end and a second end, the fourth capacitor is configured to have its first end electrically coupled to the negative input end of the operational amplifier and its second end electrically coupled to the output end of the operational amplifier, the operation method further comprises:

operating the pixel unit in a read mode;

configuring the voltage sensing unit to receive a dividing sensing voltage and outputting an output voltage;

configuring the compensation unit to receive the output voltage and output a compensation data; and

configuring the source driver to receive the compensation data and adjust the next display data,

wherein the output voltage comprises a first parameter having characteristics of the second transistor and a second parameter having characteristics of the organic light emitting diode.

13. The operation method according to claim 12, wherein when the pixel unit is operated in the initial mode or the compensation mode, the third, the fourth and the fifth transistors are ON, and the third and the fourth capacitors have the first low-level voltage; wherein when the pixel unit is operated in the display mode, the third transistor is ON, the fourth and the fifth transistors are OFF, the third capacitor stores the dividing sensing voltage divided from the sensing voltage; wherein when the pixel unit is operated in the read mode, the first, the third and the fifth transistors are OFF, the fourth capacitor stores charges of the dividing sensing voltage of the third capacitor to obtain the output voltage, wherein the output voltage comprises the first parameter having the characteristics of the second transistor and the second parameter having the characteristics of the organic light emitting diode.

14. A pixel unit, comprising:

a first transistor, having a first end, a second end and a control end, the first transistor being configured to have its first end for receiving a display data and its control end for receiving a first control signal, wherein the first

the second capacitor, its control end for receiving the first control signal, and its second end for outputting a sensing voltage according to the first control signal.

* * * * *

专利名称(译)	显示装置及其操作方法		
公开(公告)号	US20160247450A1	公开(公告)日	2016-08-25
申请号	US14/691665	申请日	2015-04-21
[标]申请(专利权)人(译)	友达光电股份有限公司		
申请(专利权)人(译)	友达光电.		
当前申请(专利权)人(译)	友达光电.		
[标]发明人	LIU LI WEI LIN YI CHENG		
发明人	LIU, LI-WEI LIN, YI-CHENG		
IPC分类号	G09G3/32		
CPC分类号	G09G3/3258 G09G2330/028 G09G2320/0204 G09G2320/043 G09G2300/0842 G09G2310/0262 G09G2330/10 G09G3/3233 G09G2300/0852 G09G2300/0866 G09G2320/0295 G09G2320/045		
优先权	104105852 2015-02-24 TW		
其他公开文献	US9812061		
外部链接	Espacenet USPTO		

摘要(译)

一种显示装置，包括显示单元，源极驱动器，栅极驱动器和补偿单元。显示单元至少包括像素单元。每个像素单元包括第一晶体管，第二晶体管，第一电容器，第二电容器和有机发光二极管。当像素单元在显示模式下操作时，像素单元输出包括具有第二晶体管的特性的第一参数和具有有机发光二极管的特性的第二参数的感测电压。源驱动器接收补偿数据并相应地调整下一显示数据。补偿单元设置在第二电容器和源极驱动器之间，并且电耦合在第二电容器的第二端和源极驱动器之间。补偿单元接收感测电压并根据接收的感测电压输出补偿数据。