

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/003642 A1

- (51) International Patent Classification⁷: **G02F 1/133**
 - (21) International Application Number: PCT/KR2002/002076
 - (22) International Filing Date: 8 November 2002 (08.11.2002)
 - (25) Filing Language: Korean
 - (26) Publication Language: English
 - (30) Priority Data: 2002-36980 28 June 2002 (28.06.2002) KR
 - (71) Applicant (for all designated States except US): **SAM-SUNG ELECTRONICS CO., LTD.** [KR/KR]; 416, Maetan-dong, Paldal-ku, 442-370 Suwon-city, Kyungki-do (KR).
 - (72) Inventor; and
 - (75) Inventor/Applicant (for US only): **LEE, Seung-Woo** [KR/KR]; Doksan Hyundai Apt. 102-1008, Doksan 1-dong, 293-10, Geumcheon-ku, 153-813 Seoul (KR).
 - (74) Agent: **YOUME PATENT & LAW FIRM**; Teheran Bldg., 825-33, Yoksam-dong, Kangnam-ku, 135-080 Seoul (KR).
 - (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
 - (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LIQUID CRYSTAL DISPLAY AND DRIVING METHOD THEREOF

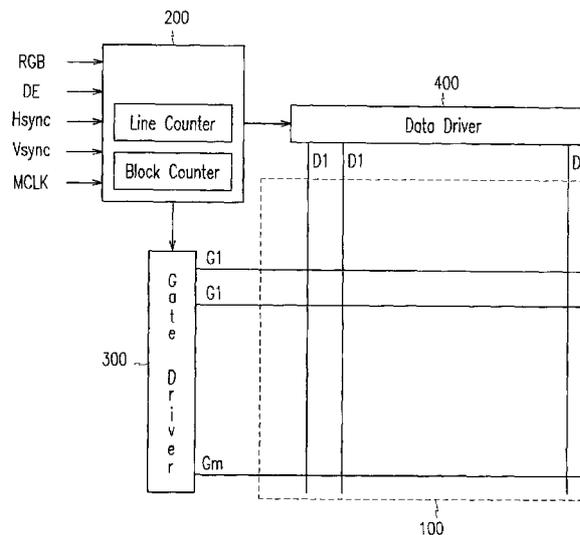

(57) Abstract: An LCD groups pixels in each row into a plurality of blocks, and calculates difference in gray between every two image data applied to a pair of adjacent odd and even pixels in each block including pixels in a row for each of first to third colors. It is determined that a block is first or second dot block depending on a sign of the gray difference when a magnitude of the gray difference between the odd pixel and the even pixel in each pair in the block for at least one color is equal to or larger than a critical value. A current block in a current row and in columns is determined to be a one-dot block when the current block is the first dot block and a previous block in a previous row and in the columns is the second dot block. When the number of the one-dot blocks is a predetermined percentage of the number of the total blocks, it is determined that a one-dot pattern is generated and one-dot inversion of the LCD is changed into another inversion. In this way, a pattern generating flicker is determined and the inversion type is changed for reducing the flicker.

WO 2004/003642 A1

LIQUID CRYSTAL DISPLAY AND DRIVING METHOD THEREOF**BACKGROUND OF THE INVENTION****(a) Field of the Invention**

The present invention relates to a liquid crystal display and a driving
5 method thereof.

(b) Description of Related Art

A liquid crystal display (LCD) includes an upper panel including a
common electrode and a plurality of color filters and covered with an alignment
layer, a lower panel including a plurality of thin film transistors and a plurality
10 of pixel electrodes and covered with an alignment layer, and a liquid crystal layer
interposed between the upper panel and the lower panel. Data voltages and a
common voltage are respectively applied to the pixel electrodes and the common
electrode to generate electric fields, which determine orientations of liquid crystal
molecules in the liquid crystal layer. The orientations of the liquid crystal
15 molecules in turn determine transmittance of light passing through the liquid
crystal layer and a desired image is displayed by controlling the voltages applied
to the electrodes.

A polarity of a data voltage applied to a pixel is reversed between
adjacent two frames. In addition, the data voltages in a frame for the different
20 pixels do not have the same polarity. This technique of differentiating the
polarity of the data voltages for the pixels is called inversion, and the types of the
inversion include column inversion, one-dot inversion, double-dot inversion and
so on.

The column inversion reverses the polarity of the data voltages for
25 adjacent pixel columns. The one-dot inversion and the double-dot inversion
perform a line inversion as well as the column inversion. The one-dot inversion
reverses the polarity of the data voltages for the pixels connected to a current
gate line with respect to that for the pixels connected to a previous gate line.
The two-dot inversion reverses the polarity of the data voltages for the pixels
30 connected to the current two gate lines with respect to that for the pixels
connected to the previous two gate lines.

When an image displayed on a screen has a pattern like the one-dot inversion and the column inversion, flicker is generated on the screen. The flicker is resulted from the difference in luminance of the pixels supplied with the data voltages with opposite polarities.

5

SUMMARY OF THE INVENTION

A motivation of the present invention is to provide a method of changing inversion type when a pattern generating flicker is determined.

The present invention changes the inversion type when a pattern generating flicker is determined.

10

A liquid crystal display according to an embodiment of the present invention includes a liquid crystal panel including a plurality of the data lines, a plurality of the gate lines, and a plurality of pixels arranged in a matrix, and the pixels include first to third color pixels. A data driver applies data voltages required for image display to the data lines. A signal controller receives a plurality of first to third color image data, supplies the received image data to the data driver, and generates control signals for driving the liquid crystal panel. The signal controller changes an inversion type when dot blocks are repeated in a predetermined pattern, each dot block includes a predetermined number of successive pairs of adjacent two pixels included in at least one color pixels among the first to third color pixels, and a magnitude of difference in gray between two pixels in each pair is equal to or larger than a critical value.

15

20

The dot blocks may include first and second dot blocks with the gray differences of opposite signs, and the predetermined pattern may include a first dot block in a first row and a second dot block located in the same columns as the first dot block and in a second row adjacent to the first row.

25

Alternatively, the predetermined pattern includes a first dot block in a first row and a second dot block located in the same columns as the first dot block and in a second row adjacent to the first row, and the first and second blocks have the gray differences of an equal opposite sign.

30

Preferably, the pixels in each row are grouped into a plurality of blocks, each block including even number of pixels, and the signal controller determines

whether each block is one of the dot blocks. The signal controller may include a block counter for counting ordinal of each block among the blocks in a row and a line counter for counting ordinal of a row including each block in the row.

It is preferably that the block counter counts the blocks by counting
5 clock cycles after a data enable signal indicating sections for inputting the image data becomes a high level, and the line counter counts the rows based on timing of a data enable signal indicating sections for inputting the image data for a row or on timing of a horizontal synchronization signal.

A method of driving a liquid crystal display according to an
10 embodiment of the present invention calculates difference in gray between every two image data applied to a pair of adjacent odd and even pixels in each block including pixels in a row for each of first to third colors. It is determined that a block is first or second dot block depending on a sign of the gray difference when a magnitude of the gray difference between the odd pixel and the even pixel in
15 each pair in the block for at least one color is equal to or larger than a critical value. It is determined a pattern formed by first and second dot blocks located in adjacent row and the same columns. An inversion type of the liquid crystal display is changed when the pattern is repeated in the entire pixels.

When determining the pattern, it is preferably determined whether a
20 previous block in a previous row and in columns is the first or second dot block when a current block in a current row and the columns is the first or second dot block.

Preferably, the current block is determined to be a one-dot block when
the current block is the first dot block and the previous block is the second dot
25 block, and the number of the one-dot blocks is compared with the number of total blocks.

When both the current block and the previous block are the first dot
blocks or the second dot blocks, it is preferable that the current block is
determined to be a double-dot block, and the number of the double-dot blocks is
30 compared with the number of the total blocks. The number of the double-dot blocks may be preferably compared with the total number of the first and second

dot blocks when the total number of the first and second dot blocks is equal to or larger than a predetermined number of the total number of the blocks.

The current block is determined to be a first double-dot block when both the current block and the previous block are the first dot blocks. Likewise, the current block is determined to be a second double-dot block when both the current block and the previous block are the second dot blocks. The inversion type is preferably changed when the number of the first dot blocks is larger than a first critical value and the number of the first double-dot blocks is equal to a predetermined percentage of the number the first dot blocks, or the number of the second dot blocks is larger than a second critical value and the number of the second double-dot blocks is equal to a predetermined number of the second dot blocks.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic block diagram of an LCD according to an embodiment of the present invention.

Figs. 2 and 3 show images that generate flicker in an LCD subject in one-dot inversion and column inversion, respectively.

Figs. 4, 6 and 8 are flow charts illustrating methods of changing the inversion type according to embodiments of the present invention.

Figs. 5A and 5B show one dot block.

Figs. 7a and 7b show double-dot blocks.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. The present invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein.

Now, liquid crystal displays and driving methods thereof according to an embodiment of the present invention will be described in detail with reference to the accompanying drawings.

First, a schematic configuration of an LCD according to an embodiment of the present invention and flicker generated in an LCD are described with reference to Figs. 1-3.

Fig. 1 is a block diagram of an LCD according to an embodiment of the present invention, and Figs. 2 and 3 show images that generate flicker in an LCD subject in one-dot inversion and column inversion, respectively.

Referring to Fig. 1, an LCD according to an embodiment of the present invention includes a liquid crystal panel 100, a signal controller 200, a gate driver 300, and a data driver 400.

The liquid crystal panel 100 includes a plurality of a plurality of gate lines G1-G_m extending in a transverse direction and a plurality of the data lines D1-D_n extending in a longitudinal direction. Two gate lines and two data lines define a pixel area, which is occupied by a pixel.

The signal controller 200 receives a plurality of red (R), green (G) and blue (B) image data from an external graphics controller (not shown), a vertical synchronization signal Vsync for distinguishing frames, a horizontal synchronization signal Hsync for distinguishing rows, a data enable signal DE having a high level during the output of the image data for indicating valid image data, and a main clock MCLK. The signal controller 200 processes and provides the RGB image data for the data driver 400, and generates a plurality of control signals for controlling the gate driver 300 and the data driver 400.

The gate driver 300 generates scanning signals from a gate-on voltage and a gate-off voltage supplied from a driving voltage generator (not shown) and it applies the scanning signals to the gate lines in synchronization with the control signals supplied from the signal controller 200.

The data driver 400 selects data voltages from a plurality of gray voltages supplied from a gray voltage generator (not shown) based on the image data supplied from the signal controller 200, and it applies the selected data voltages to appropriate data lines in response to the control signals supplied from the signal controller 200.

When the LCD subject to inversion such as one-dot inversion displays an image (referred to as one-dot pattern hereinafter) shown in Fig. 2 or the LCD subject to column inversion display an image (referred to as column pattern hereinafter) shown in Fig. 3, flicker may be generated.

5 This embodiment groups the pixels into a plurality of blocks, each block including a predetermined number of successive pixels in a row, and analyzes a pattern of each block for determining the one-dot pattern or the column pattern. A multiple of the number of the pixels in a block is preferably equal to a horizontal resolution.

10 It is assumed that the number of the pixels in each block is N, and the number of the blocks is M. For example, an SXGA LCD with a resolution of 1280×1024 includes 81,920 blocks when $N=16$.

The signal controller 200 analyzes a pattern to be displayed by the image data for each block and determines whether the pattern generates the flicker. The signal controller 200 changes the inversion type if the pattern is
15 determined to generate the flicker. The signal controller 200 includes a line counter 210 and a block counter 220 for calculating the ordinals of each block, i.e., for determining which line (row) the block belongs to and how the block stands in the line. The line counter 210 and the block counter 220 count based on the
20 data enable signal DE or the synchronization signals Hsync and Vsync.

For example, the line counter 210 counts the lines by counting high level sections of the data enable signal DE when RGB image data for a line is inputted during a high level section of the data enable signal after a pulse of the vertical synchronization signal Vsync. Alternatively, the line counter 210 counts the
25 lines by counting high level sections of the horizontal synchronization signal Hsync.

The block counter 220 counts the blocks by raising one for every predetermined number of the periods of the main clock MCLK during a high level section of the data enable signal DE since the image data for a pixel or a
30 plurality of pixels are transmitted in synchronization with the main clock MCLK. Accordingly, the block counter 220 counts one for N periods of the main clock

MCLK when the RGB image data for one pixel are transmitted for a clock. Alternatively, the block counter 220 starts counting after a predetermined number of clocks from the input of a pulse of the horizontal synchronization signal Hsync when the data enable signal DE becomes high after the
5 predetermined number of clocks after the pulse of the horizontal synchronization signal Hsync.

A method of changing the inversion type of an LCD according to an embodiment of the present invention after the determination of the pattern causing the flicker is described in detail with reference to Figs. 4-8.

10 This embodiment calculates the difference in gray of the RGB image data between two adjacent pixels in a block, and increases the value of a positive dot pixel value BP or a negative dot pixel value BN when any one of the gray differences of the respective RGB image data is larger than a critical value. Then, this embodiment determines a type of the block from the positive dot pixel value
15 BP or the negative dot pixel value BN and thus the pattern to be formed by the block to determine the generation of the flicker.

First, a method of changing the inversion type of an LCD subject to the one-dot inversion upon the determination of the generation of the flicker is described in detail with reference to Figs. 4, 5A and 5B.

20 Fig. 4 is a flow chart illustrating a method of changing the inversion type according to an embodiment of the present invention, and Figs. 5A and 5B show one dot blocks.

As shown in Fig. 4, the value of a register representing the number NB1 of one-dot blocks is initialized when a frame starts (S401), and a pair of registers representing a positive dot pixel values BP and a negative dot pixel values BN
25 (S402).

The positive dot pixel value BP is defined as the number of pairs of adjacent odd and even pixels satisfying Relation 1, where the gray of the odd pixel is larger than that of the even pixel. Likewise, the negative dot pixel value
30 BN is defined as the number of pairs of adjacent odd and even pixels such that the gray of the odd pixel is smaller than that of the even pixel.

$$|P_{2n-1} - P_{2n}| > P_{th}, \quad (1)$$

where P_{2n-1} and P_{2n} indicate the grays of the odd pixel and the even pixel, respectively, P_{th} indicates the critical value, and n is a natural number from 1 to $N/2$.

5 The gray difference ($P_{2n-1}-P_{2n}$) between an odd pixel and an even pixel adjacent to each other in a block is calculated (S403), and it is determined whether the absolute value of the gray difference ($P_{2n-1}-P_{2n}$) is larger than the critical value P_{th} as shown in Relation 1 (S404). The signal controller 200 determines the grays P_{2n-1} and P_{2n} of the pixels from image data received from a
10 graphics controller. The gray differences for the RGB are independently determined, and the critical values P_{th} may be different for the RGB. In particular, since a dot pattern for the green color G is easily perceived compared with the red color R and the blue color B even though the gray difference ($P_{2n-1}-P_{2n}$) is small, the critical value P_{th} for the green color G is set to be smaller
15 than those for the red and blue colors R and B. For example, the critical values P_{th} for the red, green and blue colors R, G and B are 16, 8 and 16, respectively.

When any of the RGB image data for the pair of the odd and even pixels satisfies Relation 1, the positive dot pixel value BP is increased by one if the gray difference ($P_{2n-1}-P_{2n}$) calculated in the step S 403 is positive, while the negative dot
20 pixel value BN is increased by one if the gray difference ($P_{2n-1}-P_{2n}$) is negative (S405). When Relation 1 is not satisfied in the step S404 or after the step S405 is completed for those satisfying Relation 1, it is determined whether the pixel pair is the last pair of the block (S406). If it is determined that the pixel pair is not the last pair of the block, the procedure returns to the step (S404) such that the gray
25 difference of a next pair of adjacent two pixels is calculated. However, if it is determined that the pixel pair is the last pair, it is determined whether the block corresponds to a one-dot block since the gray differences for all pairs of the adjacent two pixels in the block are calculated.

In detail, if the positive dot pixel value BP is equal to half of the number
30 N of the pixels in the block, it is written into a memory that the current block is a positive dot block (S411), it is determined from block information of a previous

line stored in the memory whether a block in the previous line located at an equivalent position as the current block is a negative dot block (S412). The line counter 210 and the block counter 220 confirm which block belongs to the previous line and stands at the equivalent position in the previous line as the current block. The memory may be incorporated in the signal controller 200 or external to the signal controller. If it is determined that the current block is a positive dot block and the equivalent block in the previous line is a negative dot block as shown in Fig. 5A, the number NB1 of the one-dot blocks are increased by one (S413).

Likewise, if the negative dot pixel value BN is equal to $N/2$, it is written into the memory that the current block is a negative dot block (S421), it is determined from the block information of the previous line stored in the memory whether the equivalent block in the previous line is a positive dot block (S422). If it is determined that the current block is a negative dot block and the equivalent block in the previous line is a positive dot block as shown in Fig. 5B, the number NB1 of the one-dot blocks are increased by one (S413).

If both the positive dot pixel value BP and the negative dot pixel value BN are not equal to $N/2$, it is written into the memory that the current block is not a dot block (S431).

After it is determined that the current block is a one-dot block, it is determined whether the current block is the last block in the line (S441). For example, when a block includes 16 pixels, the block counter 220 counts the blocks by considering the image data for 16 pixels based on internal or external clock of the signal controller 200. Since an SXGA LCD includes 80 blocks in a line, it is determined that the current block is the last block when the count value of the block counter 220 is equal to 80. If the count value of the block counter 220 is not equal to 80, it is determined whether a next block is a one-dot block through the steps S402 to S441.

If the current block is determined to be the last block of the block, it is determined whether the line including the block is the last line, i.e., located at an end of a frame through the line counter 210 (S442). The line counter 210, as

described above, counts the lines whenever the data enable signal DE or the horizontal synchronization signal Hsync becomes an enable state, and it is determined to be the end of the frame if the count number of the line counter 210 reaches the vertical resolution of the LCD. If the current line is not the end of the frame, the count value of the block counter 220 is initialized and the determination for blocks of a next line is performed through the steps S402 to S442.

After the determination for all blocks in a frame through the steps S401 to S442 is finished, it is determined whether the number NB1 of the one-dot blocks is equal to a value that results in the determination that the current frame displays a one-dot pattern (S443). For example, it is assumed that the current frame displays a one-dot pattern if the one-dot blocks in a frame occupy 60% of the total blocks in a frame. Then, it is determined whether the number NB1 of the one-dot blocks is equal to or larger than 49,152 ($=81,920 \times 0.6$) for an SXGA panel when each block includes 16 pixels.

If the current frame is determined to display a one-dot pattern, the signal controller 200 changes the one-dot inversion into another inversion type (S444). For example, column inversion is adapted for a dual-source panel.

The above-described embodiment of the present invention reduces the flicker by changing the one-dot inversion generating the flicker into another inversion type.

Although the above-described embodiment illustrates the change of the one-dot inversion generating the flicker into another inversion type, the column inversion may generate flicker, which will be described with reference to Figs. 6, 7a and 7b.

Fig. 6 is a flow chart illustrating a method of changing the inversion type according to another embodiment of the present invention, and Figs. 7a and 7b show double-dot blocks.

A method for changing the column inversion into another inversion, when a column pattern is determined, is similar to that shown in Fig. 4 except

that a double-dot block is determined when both of two equi-positional blocks in two adjacent lines are positive dot blocks or negative dot blocks.

In detail, the values of registers indicating the number NB of dot blocks and the number NB2 of double-dot blocks are initialized as shown in Fig. 6 (S601),
5 and the values of registers indicating a positive dot pixel value BP and a negative dot pixel value BN for a block is initialized (S602). Next, the positive dot pixel value BP and the negative dot pixel value BN of a current block are calculated by the gray comparison shown in Relation 1 like the steps S403 to S406 shown in Fig. 4 (S603~S606).

10 . When the positive dot pixel value BP for the block is equal to $N/2$, it is written into a memory that the current block is a positive dot block (S611) and the number NB of the dot blocks is increased by one (S612). In addition, it is determined from block information of a previous line stored in the memory whether an equi-positional block in the previous line is a positive dot block
15 (S613). If both the two blocks are positive dot blocks as shown in Fig. 7a, the number NB2 of the double-dot blocks is increased by one (S614).

Likewise, the negative dot pixel value BN is equal to $N/2$, it is written into a memory that the current block is a negative dot block (S621), the number NB of the dot blocks is increased by one (S622). In addition, it is determined
20 from block information of the previous line stored in the memory whether an equi-positional block in the previous line is a negative dot block (S623). If both the two blocks are negative dot blocks as shown in Fig. 7B, the number NB2 of the double-dot blocks is increased by one (S614).

If both the positive dot pixel value BP and the negative dot pixel value
25 BN are not equal to $N/2$, it is written in the memory that the current block is not a dot block (S631).

After it is determined whether the current block is a dot block or a double-dot block, it is determined whether the current block is the last block in the line as illustrated in the step S441 shown in Fig. 4 (S641). If it is determined
30 that the current block is not the last block of the line, it is determined whether a next block is a one-dot block or a double-dot block through the steps S602 to S641.

If the current block is determined to be the last block of the block, it is determined whether the line including the block is located at an end of a frame as shown in the step S442 shown in Fig. 4 (S642). If the current line is not the end of the frame, the count value of the block counter 220 is initialized and the determination for blocks of a next line is performed through the steps S602 to S642.

After the determination for all blocks in a frame through the steps S601 to S642 is finished, it is determined whether the number NB2 of the double-dot blocks is equal to a value that results in the determination that the current frame displays a column pattern (S643). For example, a current frame is determined to display a column pattern when the number NB of the dot blocks is equal to 60% of the number M of the total blocks and the number NB2 of the double-dot blocks is equal to 90% of the number NB of the dot blocks. Alternatively, a current frame is determined to display a column pattern when the number NB2 of the double-dot blocks is equal to a predetermined percentage of the number M of the total blocks. If the current frame is determined to display a column pattern, the signal controller 200 changes the column inversion into another inversion (S644).

The above-described embodiment of the present invention reduces the flicker by changing the column inversion into another inversion upon the generation of a column pattern.

Although the embodiment shown in Fig. 6 determines the generation of the flicker based on successive positive and negative dot blocks, they may be separately determined, which will be described hereinafter with reference to Fig. 8.

Fig. 8 is a flow chart illustrating a method of changing the inversion type according to another embodiment of the present invention.

A method for changing the inversion type according to the embodiment of the present invention shown in Fig. 8 is similar to that shown in Fig. 6 except that positive double-dot blocks and negative double-dot block are stored in different manner.

In detail, the values of registers indicating the number NBP of the positive dot blocks, the number NBN of the negative dot blocks, the number NBP2 of the positive double-dot blocks, and the number NBN2 of the negative double-dot blocks are initialized (S801), and the values of registers indicating a positive dot pixel value BP and a negative dot pixel value BN for a block is initialized are initialized (S802). Next, the positive dot pixel value BP and the negative dot pixel value BN of a current block are calculated by the gray comparison shown in Relation 1 like the steps S603 to S606 shown in Fig. 6 (S803 ~ S806).

When the current block is a positive dot block, it is written that the current block is a positive dot block (S811) and the number NBP of the positive dot blocks is increased by one like the steps S611 to S613 shown in Fig. 6 (S812). It is determined whether a dot block of a previous line is a positive dot block (S813), and the number NBP2 of the positive double-dot blocks is increased by one if the dot blocks of both the current line and the previous line are positive dot blocks (S814).

Likewise, when the current block is a negative dot block, it is written that the current block is a negative dot block (S821), the number NBN of the negative dot blocks is increased by one (S822). It is determined whether a dot block of a previous line is a negative dot block (S823), the number NBN2 of the negative double-dot blocks is increased by one if the dot blocks of both the current line and the previous line are negative dot blocks (S824).

If both the positive dot pixel value BP and the negative dot pixel value BN are not equal to $N/2$, it is written that the current block is not a dot block (S831).

Next, it is determined whether each block in a frame is positive or negative dot block or positive or negative double-dot block like the steps S641 and S642 shown in Fig. 6 (S841 and S842). After the determination for all blocks in a frame through the steps S801 to S842, it is determined whether a current frame displays a column pattern. The current frame is determined to display a (positive) column pattern and the inversion type is changed when the number

NBP of the positive dot blocks is equal to or larger than a critical value of the number M of the total blocks and the number NBP2 of the positive double-dot blocks is equal to or larger than a critical value of the number NBP of the positive dot blocks (S843). When the condition illustrated in the step S843 is not satisfied,
5 it is determined whether the number NBN of the negative dot blocks is equal to or larger than a critical value of the number M of the total blocks and the number NBN2 of the negative double-dot blocks is equal to or larger than a critical value of the number NBN of the negative dot blocks. If the condition is satisfied (i.e., a negative column pattern is generated), the inversion type is changed (S844).
10 The sequence of the steps S843 and S844 may be exchanged.

The present invention reduces flicker by determining patterns causing flicker from the image data for the pixels and changing the inversion type upon the determination of the patterns resulting in the flicker.

While the present invention has been described in detail with reference
15 to the preferred embodiments, those skilled in the art will appreciate that various modifications and substitutions can be made thereto without departing from the spirit and scope of the present invention as set forth in the appended claims.

WHAT IS CLAIMED IS:

1. A liquid crystal display comprising:
a liquid crystal panel including a plurality of the data lines extending in a column direction, a plurality of the gate lines in a row direction, and a plurality of first to third color pixels displaying image based on signals received from the data lines and the gate lines and arranged in a matrix;
a data driver applying data voltages required for image display to the data lines; and
a signal controller receives a plurality of first to third color image data for the first to third color pixels, supplying the received image data to the data driver, and generates control signals required for driving the liquid crystal panel, wherein the signal controller changes an inversion type when dot blocks are repeated in a predetermined pattern, each dot block includes a predetermined number of successive pairs of adjacent two pixels included in at least one color pixels among the first to third color pixels, and a magnitude of difference in gray between two pixels in each pair is equal to or larger than a critical value.
2. The liquid crystal display of claim 1, wherein the critical value has the first to third values for the first to third colors, and the first to third values are equal or different.
3. The liquid crystal display of claim 2, wherein the first to third colors are red, green and blue colors, respectively, and the second value is smaller than the first and third values.
4. The liquid crystal display of claim 1, wherein the dot blocks include first and second dot blocks with the gray differences of opposite signs, and the predetermined pattern includes a first dot block in a first row and a second dot block located in the same columns as the first dot block and in a second row adjacent to the first row.
5. The liquid crystal display of claim 1, wherein the predetermined pattern includes a first dot block in a first row and a second dot block located in the same columns as the first dot block and in a second row adjacent to the first

row, and the first and second blocks have the gray differences of an equal opposite sign.

6. The liquid crystal display of claim 4 or 5, wherein the pixels in each row are grouped into a plurality of blocks, each block including even number of pixels, and the signal controller determines whether each block is one of the dot blocks.

7. The liquid crystal display of claim 6, wherein the signal controller comprises:

a block counter for counting ordinal of each block among the blocks in a row; and

a line counter for counting ordinal of a row including the blocks.

8. The liquid crystal display of claim 7, wherein the block counter counts the blocks by counting clock cycles after a data enable signal indicating sections for inputting the image data becomes a high level.

9. The liquid crystal display of claim 7, wherein the block counter counts the blocks by counting clock cycles after a predetermined number of clocks from raise of a horizontal synchronization signal to be input to the signal controller to a high level.

10. The liquid crystal display of claim 7, wherein the line counter counts the rows based on timing of a data enable signal indicating sections for inputting the image data for a row or on timing of a horizontal synchronization signal.

11. A method of driving a liquid crystal display including a liquid crystal panel including a plurality of the data lines extending in a column direction, a plurality of the gate lines in a row direction, and a plurality of pixels arranged in a matrix, and a signal controller receiving a plurality of the RGB image data and generating control signals for driving the liquid crystal panel, the method comprising:

calculating difference in gray between every two image data applied to a pair of adjacent odd and even pixels in each block including pixels in a row for each of first to third colors;

determining that a block is first or second dot block depending on a sign of the gray difference when a magnitude of the gray difference between the odd pixel and the even pixel in each pair in the block for at least one color is equal to or larger than a critical value;

5 determining a pattern formed by first and second dot blocks located in adjacent row and the same columns; and

changing an inversion type of the liquid crystal display when the pattern is repeated in the entire pixels.

12. The method of claim 11, wherein the critical value has the first to third values for the first to third colors, and the first to third values are equal or different.

13. The method of claim 12, wherein the first to third colors are red, green and blue colors, respectively, and the second value is smaller than the first and third values.

15 14. The method of claim 11, wherein the determination of a pattern determines whether a previous block in a previous row and in columns is the first or second dot block when a current block in a current row and the columns is the first or second dot block.

20 15. The method of claim 14, wherein the rows including the blocks are counted based on timing of a data enable signal indicating sections for inputting the image data for a row or on timing of a horizontal synchronization signal.

25 16. The method of claim 14, wherein the blocks are counted by counting clock cycles after a horizontal synchronization signal to be input to the signal controller becomes in a high level.

30 17. The method of claim 14, wherein the current block is determined to be a one-dot block when the current block is the first dot block and the previous block is the second dot block, and the change of an inversion type comprises comparison of the number of the one-dot blocks with the number of total blocks.

18. The method of claim 14, wherein the current block is determined to be a double-dot block when both the current block and the previous block are the first dot blocks or the second dot blocks, and the change of an inversion type comprises comparison of the number of the double-dot blocks with the number
5 of total blocks.

19. The method of claim 18, wherein the change of an inversion type further comprises comparison of the number of the double-dot blocks with the total number of the first and second dot blocks when the total number of the first and second dot blocks is equal to or larger than a predetermined number of the
10 total number of the blocks.

20. The method of claim 14, wherein the current block is determined to be a first double-dot block when both the current block and the previous block are the first dot blocks, or the current block is determined to be a second double-dot block when both the current block and the previous block are the
15 second dot blocks, and the inversion type is changed when the number of the first dot blocks is larger than a first critical value and the number of the first double-dot blocks is equal to a predetermined percentage of the number the first dot blocks, or the number of the second dot blocks is larger than a second critical value and the number of the second double-dot blocks is equal to a
20 predetermined number of the second dot blocks.

FIG.1

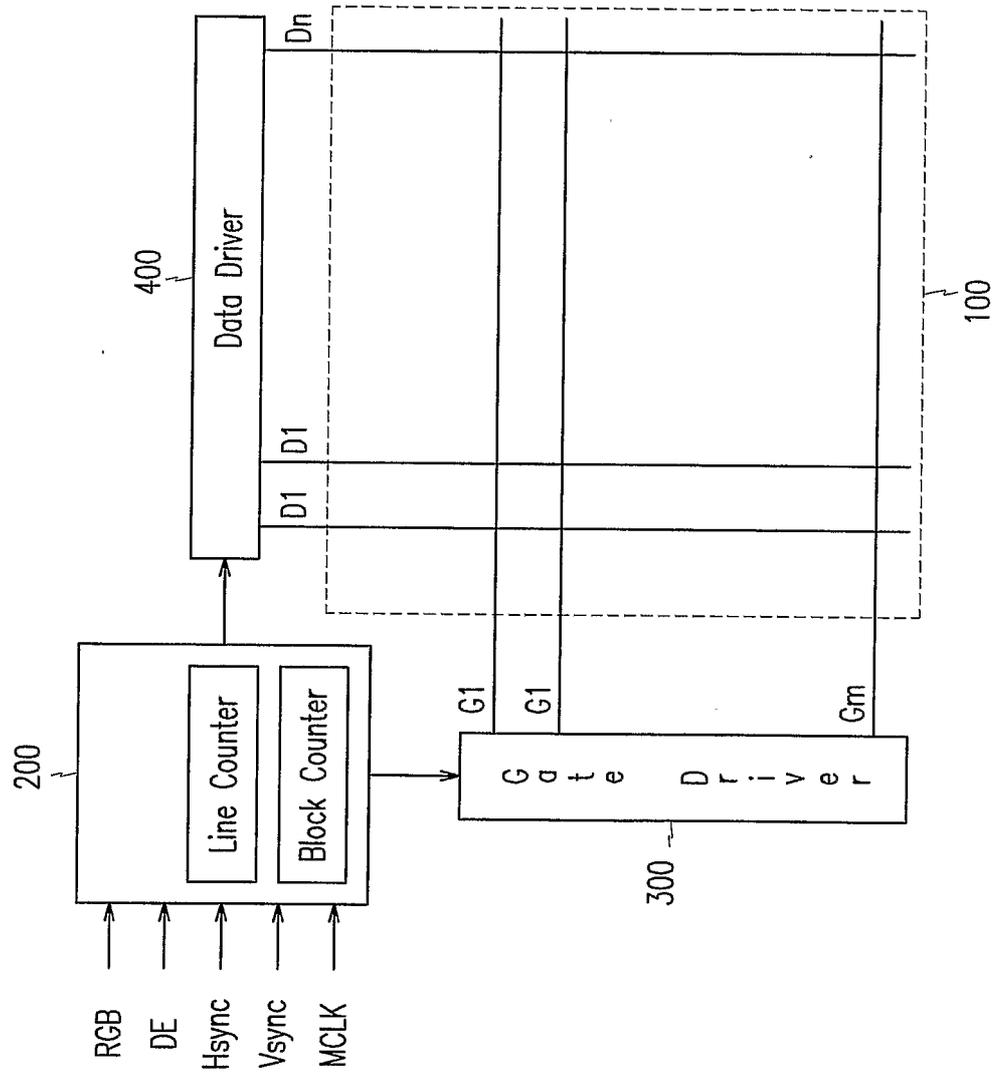


FIG.2

2/7

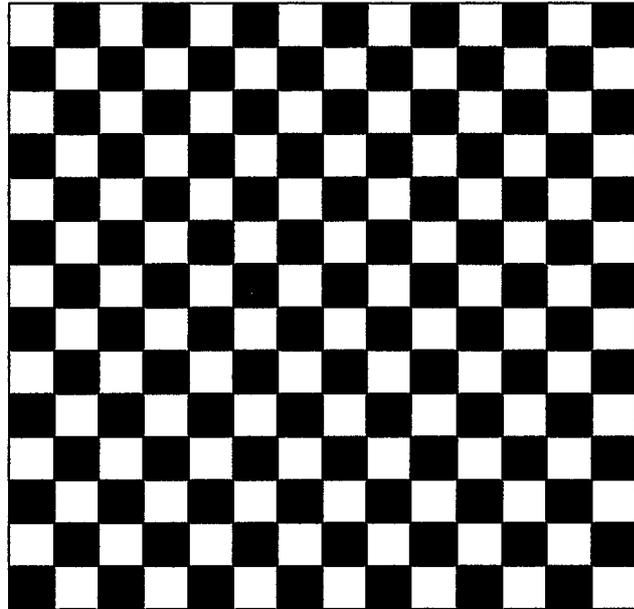


FIG.3

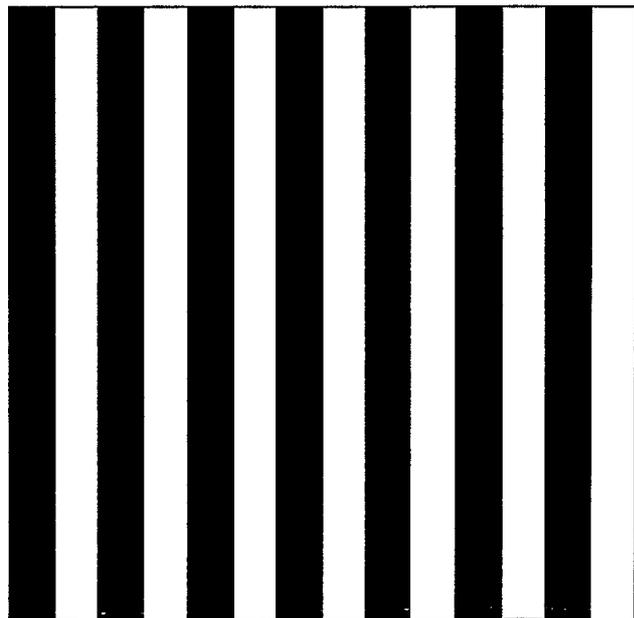


FIG. 4

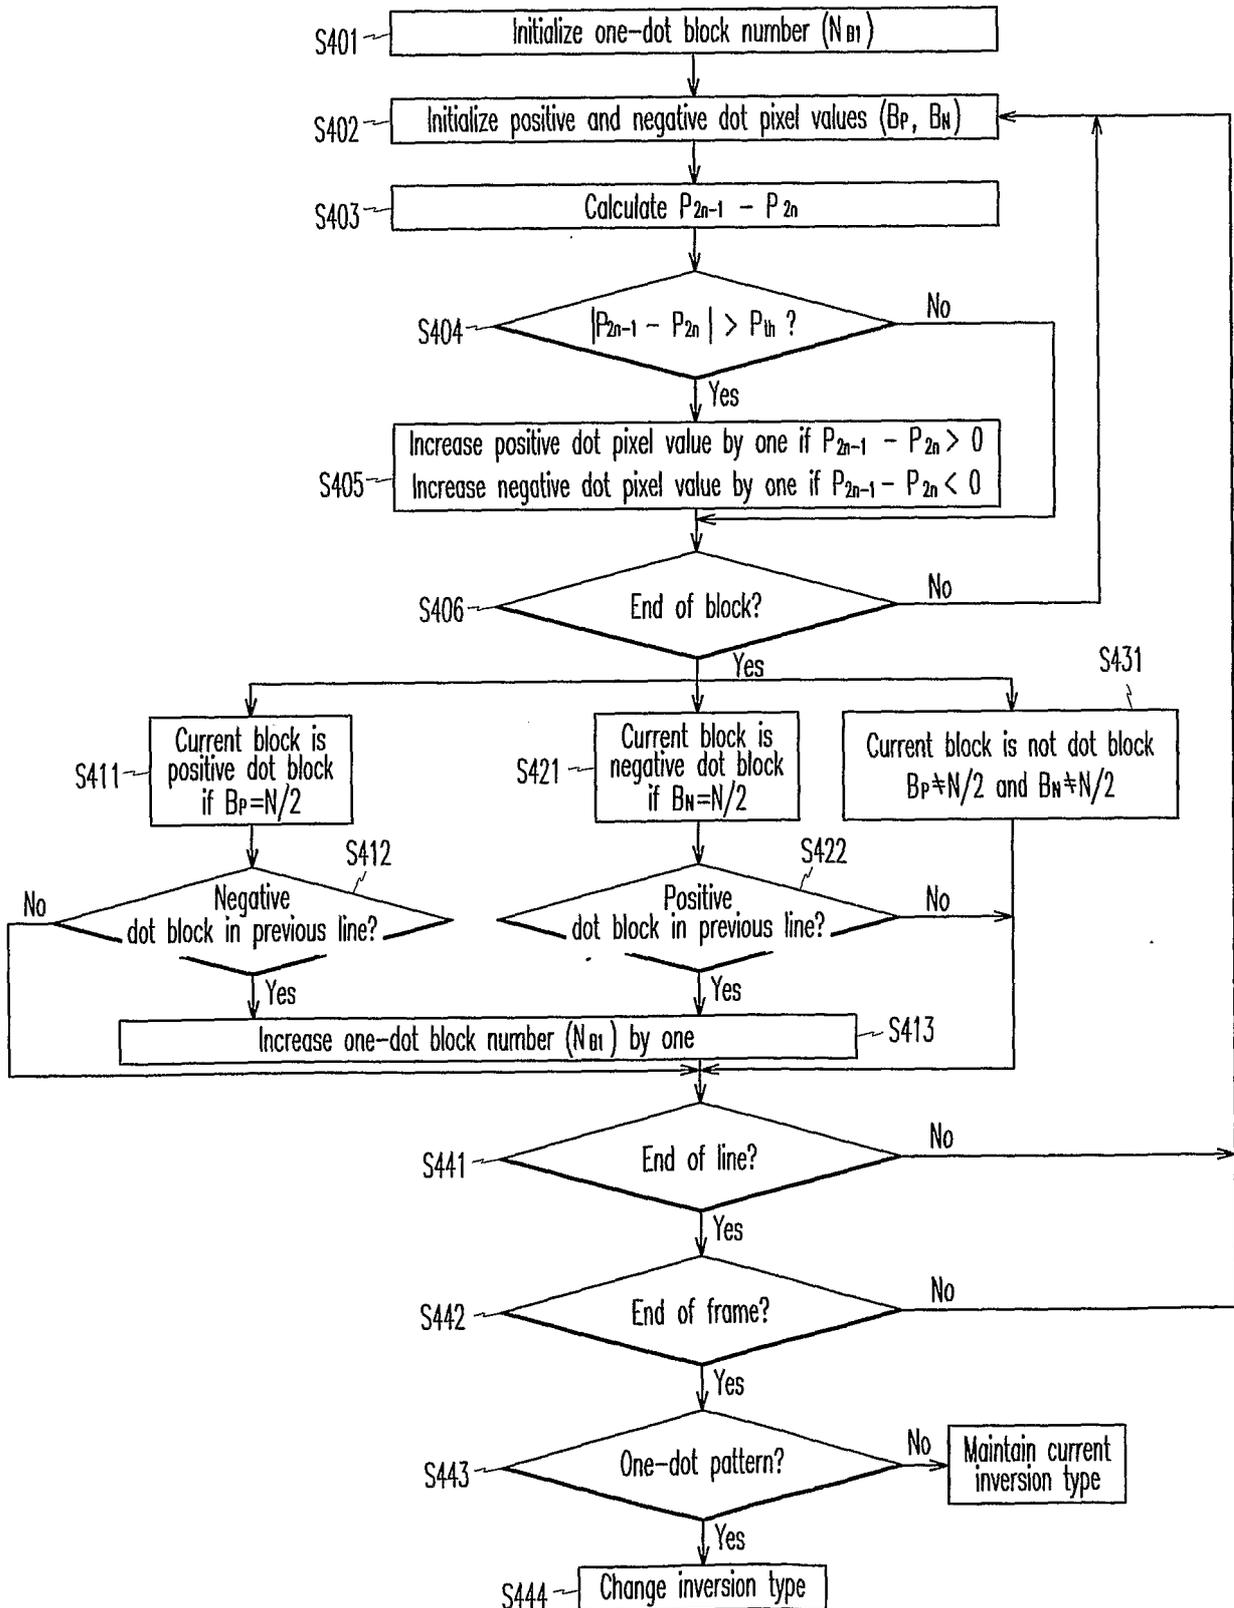


FIG.5A

4/7



FIG.5B



FIG. 6

5/7

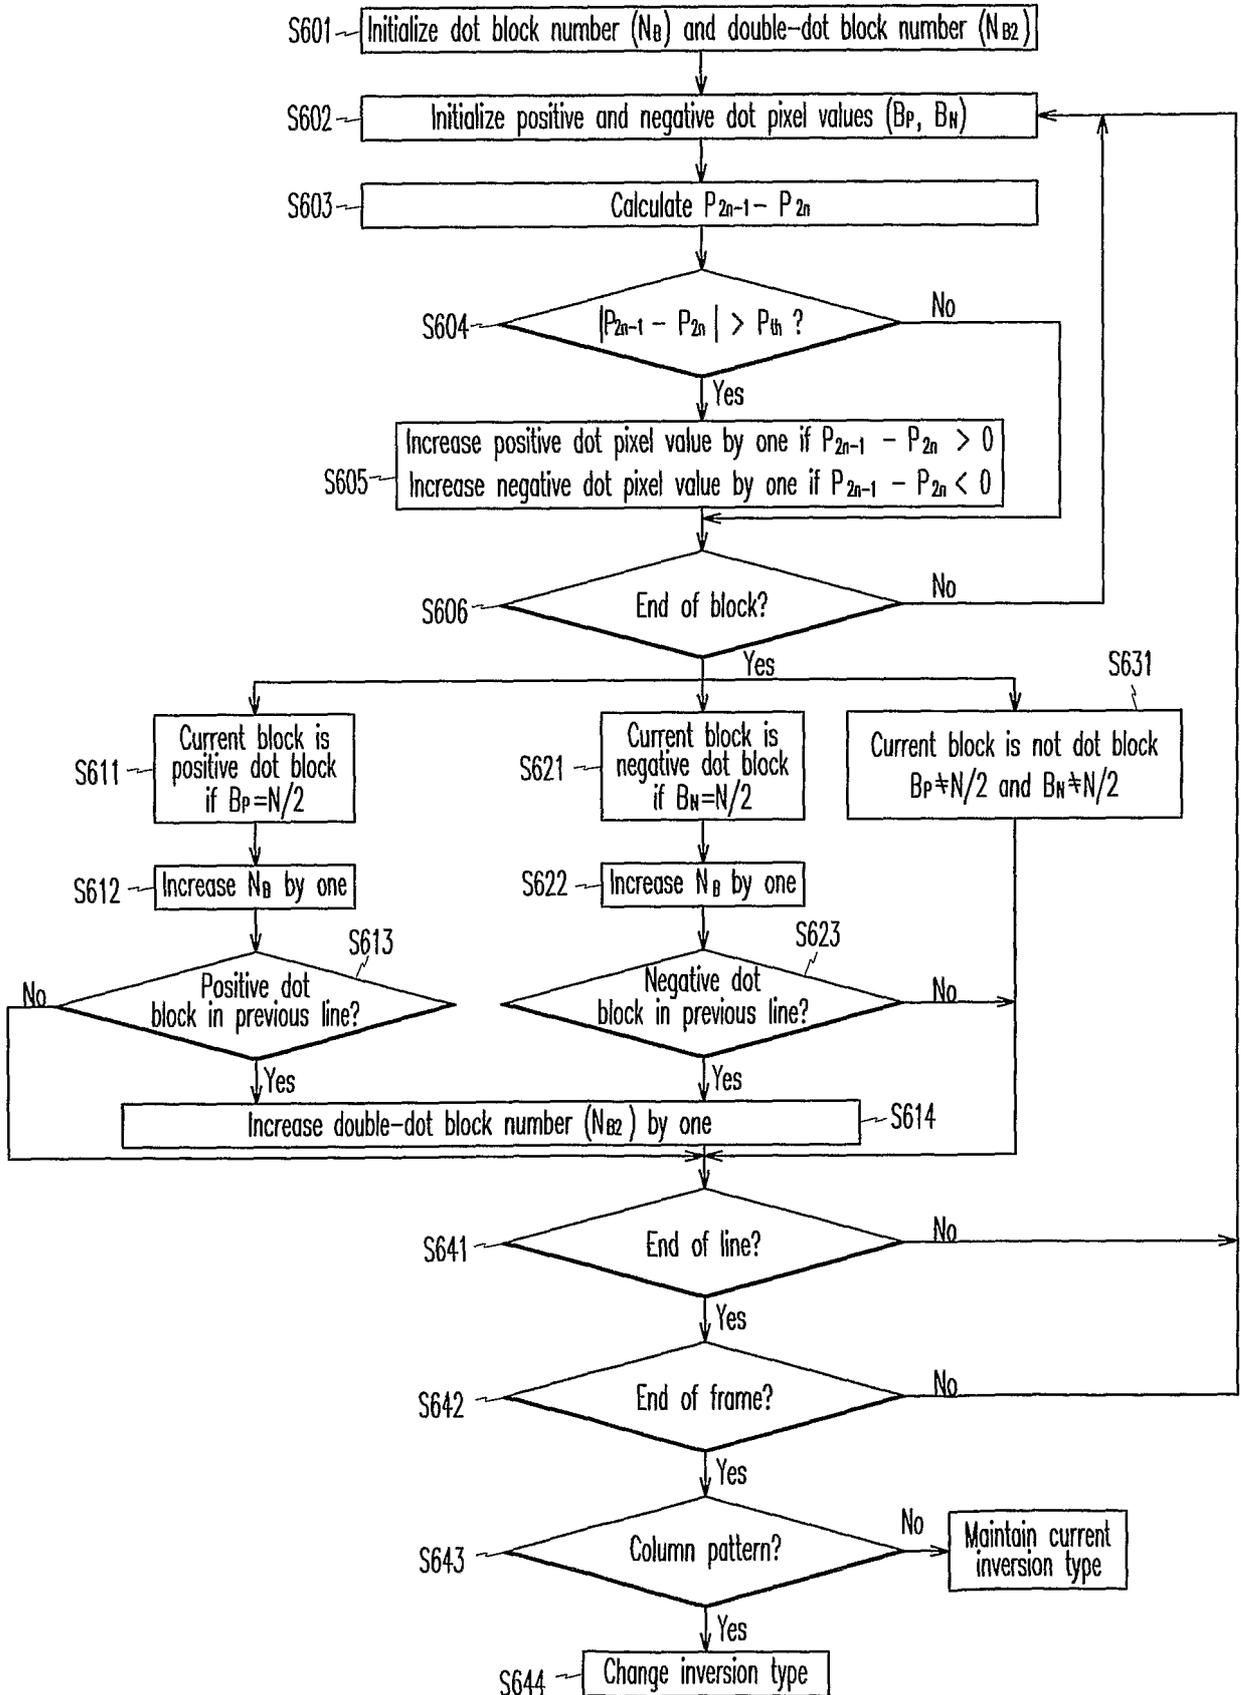


FIG. 7A

6/7





FIG. 7B



FIG. 8

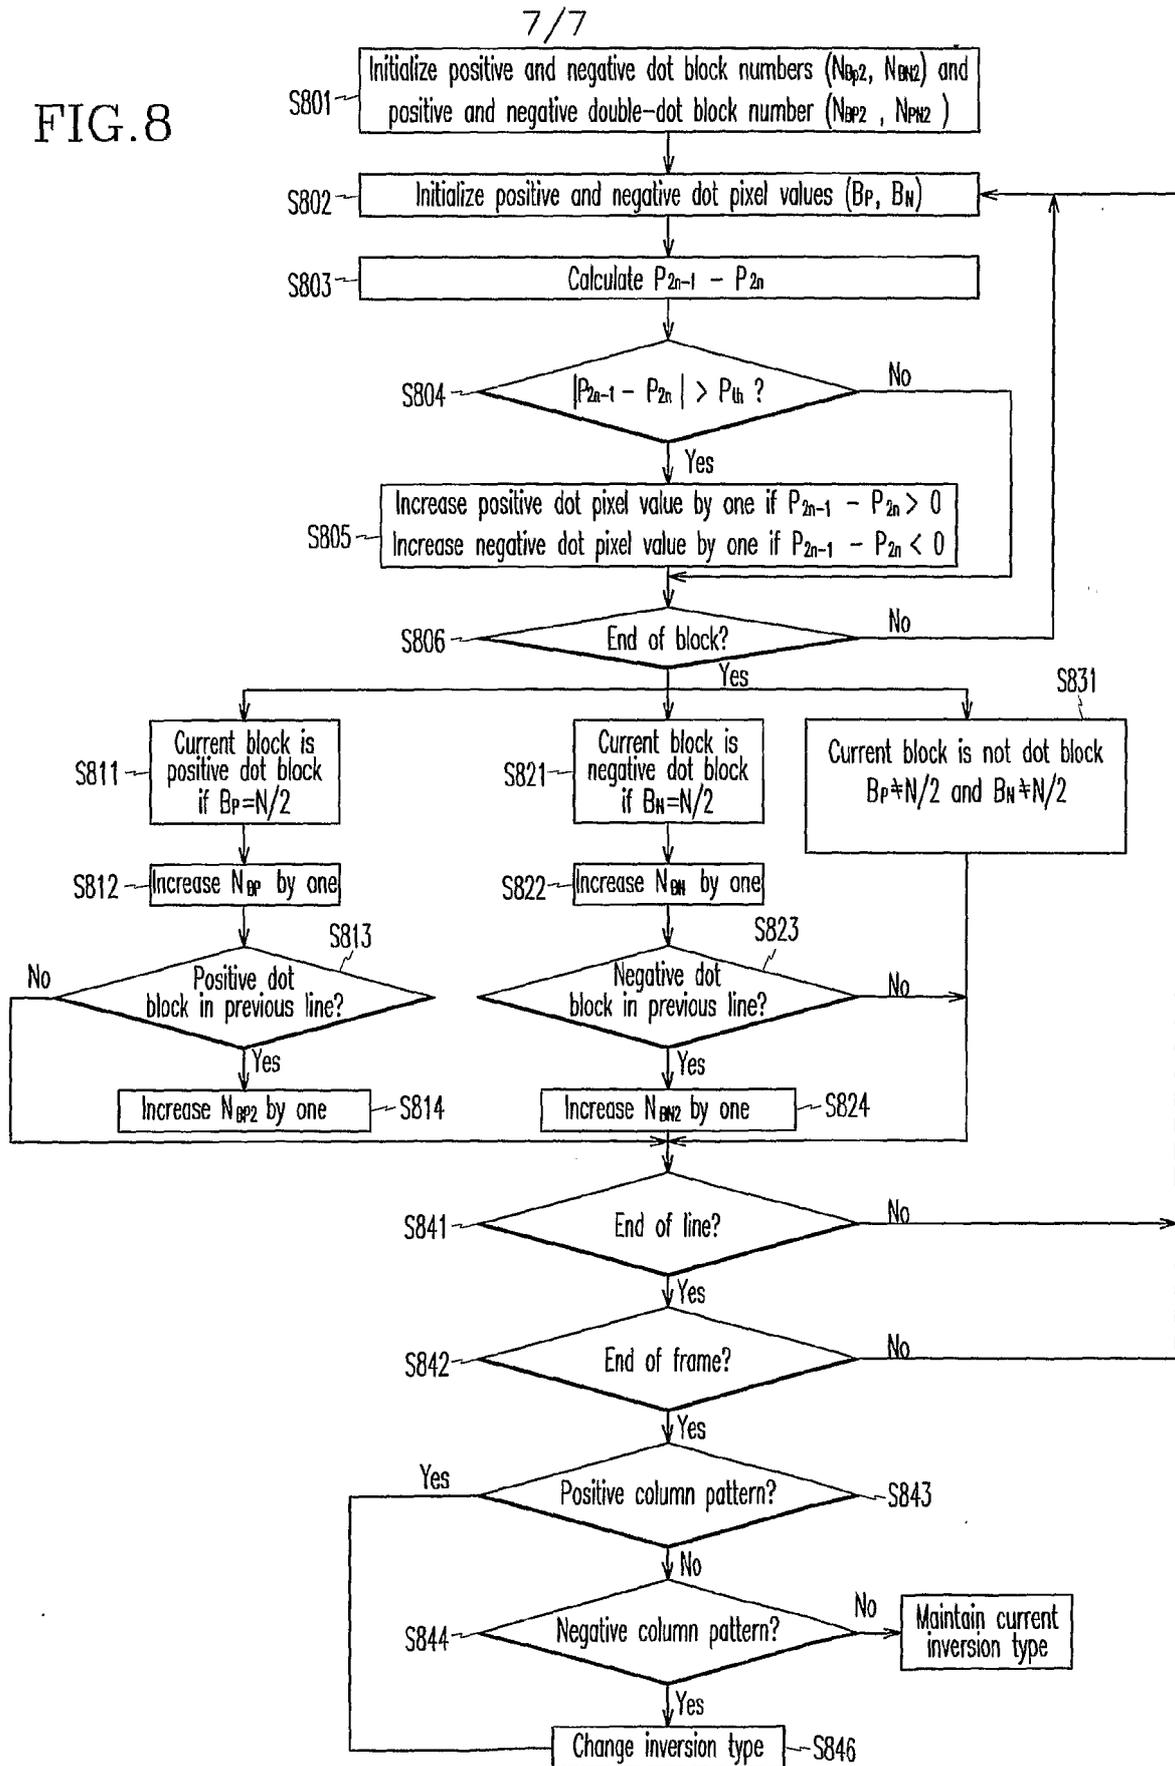

INTERNATIONAL SEARCH REPORT

ional application No.
PCT/KR02/02076

A. CLASSIFICATION OF SUBJECT MATTER <p style="text-align: center;">IPC7 G02F 1/133</p> <p>According to International Patent Classification (IPC) or to both national classification and IPC</p>				
B. FIELDS SEARCHED <p>Minimum documentation searched (classification system followed by classification symbols) IPC7 G02F, G09G</p> <p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Korean Patents and applications for inventions since 1975</p> <p>Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) NPS: "inversion"</p>				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
A	JP 2001-42287 A (Sony corp.) 16 February 2001 *the whole document*	1		
A	JP 2002-91400 A (Matsushita electric Ind. Co. Ltd.) 27 March 2002 *the whole document*	1		
A	JP 2000-20033 A (Matsushita electric Ind. Co. Ltd) 21 January 2000 *the whole document*	1		
A	US 6160535 A (Samsung electronics Co.,Ltd.) 12 December 2000 *the whole document*	1		
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> * Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family </td> </tr> </table>			* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family			
Date of the actual completion of the international search 27 FEBRUARY 2003 (27.02.2003)		Date of mailing of the international search report 27 FEBRUARY 2003 (27.02.2003)		
Name and mailing address of the ISA/KR Korean Intellectual Property Office 920 Dunsan-dong, Seo-gu, Daejeon 302-701, Republic of Korea Facsimile No. 82-42-472-7140		Authorized officer <p style="text-align: center;">KOH, Jong Wook</p> <p>Telephone No. 82-42-481-5989</p>		

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR02/02076

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2001-42287 A	16-02-2001	None	
JP 2002-91400 A	27-03-2002	None	
JP 2000-20033 A	21-01-2000	None	
US 6160535 A	12-12-2000	KR 24244 B1	02-01-2000

专利名称(译)	液晶显示器及其驱动方法		
公开(公告)号	EP1525509A1	公开(公告)日	2005-04-27
申请号	EP2002788925	申请日	2002-11-08
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	LEE SEUNG WOO		
发明人	LEE, SEUNG-WOO		
IPC分类号	G02F1/133 G09G3/20 G09G3/36		
CPC分类号	G09G3/3614 G09G3/3648 G09G2320/0247		
优先权	1020020036980 2002-06-28 KR		
其他公开文献	EP1525509B1 EP1525509A4		
外部链接	Espacenet		

摘要(译)

LCD将每行中的像素分组为多个块，并计算每个块中的一对相邻奇数和偶数像素的每两个图像数据之间的灰度差，包括第一到第三颜色中的每一个的行中的像素。当至少一种颜色的块中每对中的奇数像素和偶数像素之间的灰度差的大小等于或时，确定块是第一或第二点块，取决于灰度差的符号。大于临界值。当前块是第一个点块并且前一行中的前一个块和列中的第二个点块时，当前行和列中的当前块被确定为单点块。当一个点块的数量是总块数的预定百分比时，确定产生一点图案并且LCD的一点反转变为另一个反转。以这种方式，确定产生闪烁的图案并且改变反转类型以减少闪烁。