

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 109 053 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

21.09.2005 Bulletin 2005/38

(51) Int Cl.⁷: **G02F 1/1335**

(21) Application number: **00403497.1**

(22) Date of filing: **13.12.2000**

(54) **Display apparatus with colour filter and method of manufacturing the same**

Anzeigegerät mit Farbfilter und Verfahren zur dessen Herstellung

Dispositif d'affichage avec filtre coloré et son procédé de fabrication

(84) Designated Contracting States:
DE FI GB SE

(30) Priority: **13.12.1999 JP 35321799**

(43) Date of publication of application:
20.06.2001 Bulletin 2001/25

(73) Proprietor: **SONY CORPORATION**
Tokyo (JP)

(72) Inventors:

- **Tetsuo, Urabe, c/o Sony Corporation**
Shinagawa-ku, Tokyo (JP)
- **Nobuyuki, Shigeno, c/o Sony Corporation**
Shinagawa-ku, Tokyo (JP)

• **Takayuki, Fujioka, c/o Sony Corporation**
Shinagawa-ku, Tokyo (JP)

(74) Representative: **Thévenet, Jean-Bruno et al**
Cabinet Beau de Loménie
158, rue de l'Université
75340 Paris Cédex 07 (FR)

(56) References cited:

- **PATENT ABSTRACTS OF JAPAN vol. 1999, no.**
05, 31 May 1999 (1999-05-31) & JP 11 052366 A
(TOPPAN PRINTING CO LTD), 26 February 1999
(1999-02-26)
- **PATENT ABSTRACTS OF JAPAN vol. 1999, no.**
12, 29 October 1999 (1999-10-29) & JP 11 183892
A (CASIO COMPUT CO LTD), 9 July 1999
(1999-07-09)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 109 053 B1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to a so-called hybrid type display apparatus (hereinafter referred to as a semi-transmission reflection layer) provided with a reflection layer having a hole in part on its rear side (hereinafter referred to as a semi-transmission reflection layer).

2. Description of the Related Art

[0002] A hybrid type display apparatus is disclosed, for example, in Japanese Patent Application Publication Laid-Open Nos. 11-052366 and 11-183892. A hybrid type liquid crystal display apparatus, when an external light (natural rays of light, indoor illumination or the like) that ensures a sufficient brightness to be obtained, performs a transmission mode display that utilizes the external light by reflecting its external incident light entering from a front side on a semi-transmission reflection layer on the rear side, and when any external light ensuring a sufficient brightness is not obtainable, performs a transmission mode display that utilizes rays of light from a back-light disposed on the rear side of the liquid crystal display apparatus. This hybrid type liquid crystal display apparatus is comprised of: a pair of substrates disposed in opposite directions on the front and rear sides; an electrode provided on an internal surface of one of the pair of substrates; an electrode provided on an internal surface of the other one of the pair of substrates; a liquid crystal layer interposed between said pair of the substrates; and a semi-transmission reflection layer provided on the rear side thereof.

[0003] As a liquid crystal display apparatus, there are many types of them, which includes an active matrix type, a simple matrix type and the like. For example, a liquid crystal display apparatus of the active matrix type is comprised of: a plurality of pixel electrodes arranged in a matrix form on an internal surface of a first substrate; a plurality of active elements, connected with these pixel electrodes respectively; and a signal line for supplying a signal to said plurality of active elements; counter electrodes provided on an internal surface of a second substrate, as disposed opposite to said plurality of pixel electrodes; and a region of a pixel in which said plurality of pixel electrodes and said counter electrodes are opposed to each other.

[0004] Further, as other types of the liquid crystal display apparatus, there are one that displays white and black pictures and another that displays color pictures. In a liquid crystal display apparatus that displays a multi-color picture such as a full color image or the like, there are provided colored films of a plurality of colors each having a different transmission wavelength band provid-

ed on an internal surface of its front side (first) substrate, each corresponding to a plurality of pixels having a pixel electrode and a counter electrode disposed in opposite directions. Normally, these colored films are color filters of red, green and blue, and each color filter is formed to have a same area as that of its pixel in order to ensure for the whole light passing through the pixel to be emitted as a colored light having good color purity.

[0005] However, the hybrid type liquid crystal display apparatus having prior art filters has such a problem that its display according to its reflection display mode using an external light source is very dark. This is mainly due to light absorption in the color filter. Because a color filter allows to pass rays of light in a wavelength band corresponding to a color of its color filter among visible rays of bands, and absorbs rays of light in the other wavelength bands, an intensity of colored light having passed the color filter is decreased substantially in comparison with an intensity of incident light.

[0006] Further, in the case of the hybrid type liquid crystal display apparatus, although a drop in brightness of display at the time of performing a transmission mode display utilizing a light from a back-light can be compensated by increasing the brightness of the back-light, however, when performing a reflection mode display utilizing an external light, such a high brightness incident light that can compensate for the absorption of light in the color filter cannot be obtained. Further, because the incident light entering the liquid crystal display apparatus from its front side passes through the color filter twice before it is reflected on the semi-transmission reflection layer on the rear side and emitted toward the front side, its absorption of light increases further, thereby darkening the display substantially.

[0007] Therefore, there has been proposed to decrease the absorption of light in the color filter and improve the brightness of display by reducing a film thickness of the color filter. However, because this reduction in film thickness of the color filter causes transmission of light in its absorption wavelength band to increase as well, a colored light having a good color purity becomes impossible to obtain, thereby resulting in a narrowed color range of color pictures to be displayed.

[0008] A hybrid type display apparatus that improves lightness of color (reflectance) availed in the case of reflection display while on the other hand maintaining the color purity availed in the case of transmission display has been proposed. FIGs 5A and 5B show schematic diagrams of such a hybrid type display apparatus. FIG. 5A shows a planer pattern thereof corresponding to one pixel. As shown in the drawing, a pixel PXL is divided on its plane into a transmission portion T that corresponds to a hole of a semi-transmission reflection layer and a reflection portion R that is outside the hole. Although a color filter CF is provided to cover the whole area of the transmission portion T, it covers only partially the reflection portion R. Namely, in contrast to the pixel PXL that is patterned into a rectangle, the color filter CF

is patterned into a hexagon as shown in the drawing, with the color filter CF removed partly from each corner of the reflection portion R. Thereby, while ensuring for the transmission portion T to be able to obtain sufficient color purity, it is arranged for the reflection portion R to have a mixture of colored light passing through the color filter CF and a non-colored light without passing there-through so as to be able to improve the lightness of color.

[0009] FIG. 5B is a cross-sectional diagram of a related art cut out along a line VB-VB shown in FIG. 5A. On an internal surface of a front side substrate 1, there is formed the color filter CF patterned into a hexagon. On an internal surface of a rear side substrate 2, there is formed a reflection layer 8 of semi-transmission type having a hole H. Between both the substrates 1 and 2, there is retained a liquid crystal layer 3 as an electro-optical layer. A portion corresponding to the hole H of the semi-transmission reflection layer 8 becomes the transmission portion T of the pixel and the other portions become the reflection portion R. As to the transmission portion T, an incident light from the back light and through the rear side substrate 2 passes the color filter CF once and arrives at an observer positioned in front of the front side substrate 1. As to the reflection portion R, an incident light entering from the observer side is reflected on the reflection layer 8 to be directed toward the observer again. At this time, a part of the incident light passes a cutout portion devoid of the color filter CF, is reflected on the reflection layer 8, and then passes a portion where the color filter CF is positioned. At this time, because its external light is caused to pass through the color filter CF only once in the same manner as in the case of the backlight, the absorption is weakened, thereby improving the lightness of color and ensuring a preferred reflectance to be obtained.

[0010] However, there is such a problem associated with the prior art that when patterning the color filter CF into a hexagon as shown in the drawing, because of a difference from a rectangular boundary of the pixel PXL, a cutout portion of the color filter CF may be identified sometimes as a pixel defect. Further, an irregular patterning of the color filter CF such as into a hexagon also involves a problem to increase a proportion of defective patterning.

[0011] The entry in "Patent Abstracts of Japan", vol. 1999, no.5, 31 May 1999, for JP-A-11 052366 describes a display apparatus in accordance with the precharacterizing portions of the independent claims of the present application.

SUMMARY OF THE INVENTION

[0012] It is therefore an object of the present invention to solve the problems associated with the prior art and to provide an improved hybrid display apparatus.

[0013] In order to solve the above-mentioned problem associated with the prior art, the following measures have been taken. Namely, the present invention pro-

vides a display apparatus comprising: a pair of substrates comprising a first substrate on a front side and a second substrate on a rear side, disposed so as to oppose each other; a first electrode provided in an internal surface of said first substrate; a second electrode provided in an internal surface of said second substrate; a color filter provided on said first substrate, and aligned with a pixel formed in a portion in which said first and said second electrodes oppose each other, said color filter comprising a colored layer; an electro-optical layer disposed between said pair of substrates; and a reflection layer provided on an internal surface of said second substrate, wherein said reflection layer includes a hole provided for each pixel, thereby dividing each pixel in its plane into a light transmission portion which is within the hole and a light reflection portion which is outside the hole; wherein said colored layer is formed thinner in said reflection portion than in said transmission portion; characterized in that: said color filter is provided on said first substrate; said color filter comprises a lamination of a colored layer and a transparent layer, and said transparent layer is formed so as to compensate for the difference in thickness of said colored layer between the transmission portion and the reflection portion.

[0014] Preferably, a thickness of the above-mentioned transparent layer is set at an optimum value such that an optical density of the colored layer is adjusted between the transmission portion and the reflection portion. According to a preferred embodiment of the present invention, the above-mentioned transparent layer is comprised of a transparent resin film that is formed in an internal surface of the first substrate on the front side, and the colored layer is comprised of a colored film that is formed so as to overlap the transparent resin film. According to another preferred embodiment of the present invention, the above-mentioned transparent layer is formed by selectively etching the internal surface of the front side substrate, which is transparent, and the colored layer is provided by a colored film that is formed on the internal surface that is etched as described above. Preferably, the above-mentioned electro-optical layer is comprised of a liquid crystal layer having a birefringence property, and its thickness is set two-fold in the transmission portion than in the reflection portion. Preferably, the above-mentioned first electrode is a common electrode formed in common across pixels, and the above-mentioned second electrode is a pixel electrode that is isolated for each pixel, and on the second substrate there is formed an active element for driving its pixel electrode.

[0015] In the hybrid type display apparatus according to the present invention, in the process of forming the color filter, its transparent layer is formed only in its reflection portion, and then its colored layer is formed thereon. Thereby, it can reduce the thickness of the colored layer in the reflection portion than in the transmission portion by a thickness of the transparent layer that is included therein. Therefore, absorption in the color filter

in the reflection portion is reduced, and lightness of color is substantially improved and its reflectance is increased. On the other hand, as for the transmission portion, because its colored layer is ensured to have a sufficient thickness, it enables a preferred color purity (optical density) to be obtained. By optimization of a film thickness of the transparent layer, it becomes possible, without impairing the color purity of the transmission type, to specify a reflectance and color purity of the reflection type at a preferred value. The colored layer itself of the color filter can be patterned in alignment with its pixel thereby causing no deformation, no pixel defect or the like to occur.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] Other features and advantages of the invention will be apparent from the following description taken in connection with the accompanying drawings, wherein:

FIGs. 1A and 1B are schematic diagrams in cross-section and plan views indicative of a fundamental construction of a display apparatus according to the present invention;

FIG. 2 is a schematic diagram in cross-section of a preferred embodiment of a color filter according to the present invention;

FIG. 3 is a schematic diagram in cross-section in a part of a preferred embodiment of the display apparatus according to the present invention;

FIG. 4 is a schematic diagram illustrative of operation of the display apparatus of the present invention as shown in FIG. 3; and

FIGs. 5A and 5B are schematic diagrams indicative of an example of related art display apparatus.

PREFERRED EMBODIMENT OF THE INVENTION

[0017] With reference to the accompanying drawings, a preferred embodiment of the present invention will be described in detail in the following. FIGs. 1A and 1B are schematic diagrams showing an example of a fundamental construction of a hybrid type display apparatus according to the present invention. FIG. 1A shows a cross-sectional construction corresponding to one pixel. As shown in the figure, this display apparatus is comprised of a pair of substrates, a first substrate 1 and a second substrate 2, which are made of glass, for example, and disposed in opposite directions from each. On an internal surface of the first substrate 1 there is formed a first electrode 10, which is made of ITO, for example, also on an internal surface of the second substrate 2 there is formed a second electrode 11, which is, for example, made of Ag and ITO. In a portion in which the first electrode 10 and the second electrode 11 are opposed from each other, there is formed a pixel. In alignment with this pixel, there is provided a color filter CF,

which is comprised of a photoresist dispersed, for example, with pigment, on the first substrate 1 on the front side. Between the pair of the first substrate 1 and the second substrate 2, there is interposed, for example, a liquid crystal layer 3 as an electro-optical layer. This liquid crystal layer 3 is comprised, for example, of a guest-host liquid crystal, which interrupts an incident light to pass or allows it to pass therethrough for every pixel, in response to a voltage applied across the electrodes 10 and 11. By way of example, the present invention is not limited to using of the liquid crystal, but any other electro-optical materials may be used as well within the scope of the invention. Further, the present invention is not limited to using of the guest-host liquid crystal, but any other modes of liquid crystals may be used as well. On the second substrate 2, there is provided a reflection layer 8. This reflection layer 8 has a hole that is provided for each pixel, which divides a plane of each pixel into a transmission portion T which is within the hole and a reflection portion R which is outside the hole.

[0018] According to this embodiment, the reflection layer 8 is comprised of a metal film made of Ag, for example, which is formed on an irregular surface of the second substrate 2, and serves also as the above-mentioned second electrode 11. Further, a transparent electric conductive film such as ITO is formed in the transmission portion T, which constitutes the above-mentioned hole and also serves as the second electrode 11. As clearly understood from the above description, the electrode 11 according to the present invention is comprised of a hybrid construction of the metal film provided in the reflection portion R and the transparent electric conductive film provided in the transmission portion T.

[0019] According to features of the present invention, the color filter CF is comprised of a lamination of a colored layer 50 and a transparent layer 51. The colored layer 50 is formed so as to be thinner in the reflection portion R than in the transmission portion T. In particular, in this embodiment, a thickness of the colored layer 50 in the transmission portion T is 3 μm , and a thickness of the colored layer 50 in the reflection portion R is 1 μm . In view of a difference in an optical path therebetween, thereby, a ratio of their film thicknesses is preferably more than 2. Further, the transparent layer 51 is formed so as to cover a difference in level of the colored layer 50 caused between the transmission portion T and the reflection portion R. More specifically, the transparent layer 51 is comprised of a transparent resin film formed on an internal surface of the first substrate 1, and the colored layer 50 is comprised of a colored film which is formed so as to overlap the transparent resin film. A thickness of the transparent layer 51 is set at an optimum value such that an optical density of the colored layer 50 is adjusted between the transmission portion T and the reflection portion R. For example, a thickness of the transparent layer 51 in this embodiment is 2 μm . As described above, in the hybrid type display apparatus according to the present invention, the transparent

resin film such as an acrylic resin is selectively formed only in the reflection portion R by means of photolithography or the like, then the colored layer 50 is laminated thereon also by photolithography or the like. In the transmission portion T, because an incident light (from back light) is allowed to pass once through the color filter CF that has a sufficient normal thickness, a preferred color reproduction capability is realized. In the reflection portion R, because an incident light (external light) is allowed to pass twice back-and-forth through the color filter CF, the optical density of which is reduced by inclusion of the transparent resin film, a preferred color reproduction capability is also realized. In this instance, because of a reduced thickness of the colored layer 50 in the reflection portion R, the external light, even when it passes the color filter CF twice, is not subjected to an excessive absorption, and can maintain a high reflectance, thereby ensuring a brightness of display to be maintained at a level suitable for actual application. Through adjustment of the film thickness of the transparent layer 51, because it becomes possible that its reflectance, color purity and lightness of color are freely adjusted as for the reflection type display without impairing the color purity as for the transmission type display, it is enabled for each of the transmission portion T and the reflection portion R freely to design its optical density appropriately. In this embodiment, after forming the transparent layer 51, the colored layer 50 is deposited thereon. However, this order of film forming may be reversed with the same effect.

[0020] FIG. 1B is a schematic diagram indicating a planar pattern of the display apparatus according to the present invention. As shown in the figure, each pixel PXL is partitioned by a black matrix BM, which is made of Ti, for example, into a lattice pattern. Each pixel PXL, which is divided on its plane into the transmission portion T in a center area and the reflection portion R in a peripheral area, has a so-called hybrid construction. The color filter is patterned approximately corresponding to the pixel PXL that is partitioned by the black matrix BM. Because there is no need of patterning of the color filter into the irregular shape as in the conventional art, such a defect as de-coloring can be avoided from being recognized by the observer. Further, in patterning of the color filter by means of photolithography and etching, deformation or defect is not likely to occur. Further, in this embodiment, a ratio of areas between the transmission portion T and the reflection portion R is approximately one to four. However, this ratio may vary depending on a film thickness of the colored layer 51 in each portion.

[0021] FIG. 2 is a schematic cross-sectional diagram of a modification of the color filter indicated in FIG. 1. The color filter CF, which is colored in a different color for each pixel, is formed on the substrate 1. In its plane within each pixel, the color filter CF is divided into a light transmission region t through which light passes once and a light reflection region r through which the light

passes twice as it is reflected therein. The color filter CF has a lamination structure in which the colored layer 50 and the transparent layer 51 are laminated. According to this embodiment, the transparent layer 51 is formed by selectively etching a transparent surface of the substrate 1, and the colored layer 50 is formed as a colored film on the etched surface of the substrate 1. For example, the substrate 1 is made of glass, and by selectively etching the light transmission region t using hydrofluoric acid, the transparent layer 51 can be provided in the light reflection region r.

[0022] FIG. 3 is a partial cross-sectional view schematically showing a preferred embodiment of the display apparatus according to the present invention, and shows only one pixel portion. This preferred embodiment is an active matrix type, and utilizes a liquid crystal panel of electrically controlled birefringence (ECB) mode. Namely, this is a system for controlling transmission and interruption of an incident light by making use of the birefringence property of the liquid crystal. By way of example, a thin film transistor (TFT) is used as an active element for driving the pixel of active matrix type.

[0023] As shown in FIG. 3, on an external surface of a front side substrate 1, there are laminated a polarizing plate 40 and a quarter wave plate 9. On an internal surface of the substrate 1, there is formed a color filter CF by lamination of a colored layer 50 and a transparent layer 51 according to the present invention. A black matrix BM is formed by sputtering or the like also on the internal surface of the substrate 1 so as to partition the color filter CF with regard to each pixel. On surfaces of the color filter CF and the black matrix BM, there is formed, by sputtering or the like, a common electrode 10, which is made of ITO, for example, and disposed across the pixels. Upon the common electrode 10, there is formed, by off-set printing or the like, an orientation film 107, which is made of polyimide, for example. Further, a liquid crystal layer 3 having a birefringence property is interposed, and then beneath the same there is disposed a rear side substrate 2. A surface of the substrate 2 is covered by an orientation film 115 made of polyimide, for example, which in collaboration with an orientation film 107 on the front side substrate 1, causes the liquid crystal layer 3 to be orientated, for example, in a horizontal direction. As indicated in FIG. 3, a thickness Td of the liquid crystal layer 3 in the transmission portion is set twofold of a thickness Rd thereof in the reflection portion. More specifically, the thickness Td corresponds to one half of a wavelength of incident light, and the thickness Rd corresponds to a quarter of the wavelength of the incident light. Beneath the orientation film 115, there is formed a pixel electrode 11 by sputtering or the like. This pixel electrode 11 is comprised of a transparent conductive film such as ITO, and forms a hole in the transmission portion. Overlapping this transparent pixel electrode 11 in part and via an insulation film 114, a reflection layer 8 is formed by sputtering. The reflection layer 8 is comprised of a metal film such as

Ag formed on an irregular surface of the insulation film 114, which is comprised of an organic resin film, for example, and is connected to the same potential as that of the above-mentioned pixel electrode 11. Therefore, the reflection layer 8 also constitutes a part of the pixel electrode 11. In the lower direction of the pixel electrode 11, a thin film transistor 108 is formed. This thin film transistor 108 has a bottom gate arrangement, and has a lamination structure of: sequentially from the bottom to the upper directions, a gate electrode 116 made of Mo-Ta, for example; a gate isolation film 117 made of SiO₂, for example; and a semiconductor thin film 118. The semiconductor thin film 118 is made of, for example, polycrystalline silicon, which is subjected to laser-recrystallization, and its channel region, which is aligned with the gate electrode 116, is protected by a stopper 119, which is made of SiO₂, for example, in the upper direction. The thin film transistor 108 having a bottom gate structure as described above is covered by an interlayer isolation film 120 which is made of SiO₂, for example. The interlayer isolation film 120 has a pair of contact holes, through which a source electrode 121 and a drain electrode 122 are electrically connected with the thin film transistor 108. These electrodes 121 and 122 are made by patterning aluminum, for example. The drain electrode 122 is connected with the above-mentioned pixel electrode 11. Further, through the contact hole 112 formed in the isolation film 114, the reflection layer 8 is also electrically connected to the drain electrode 122.

[0024] On the other hand, a signal voltage is supplied to the source electrode 121. Finally, on a rear surface of the rear side substrate 2, a quarter wave plate 19 and a polarizing plate 41 are laminated.

[0025] FIG. 4 is a schematic diagram illustrative of operation of the display apparatus of the invention shown in FIG. 3, and, in particular, it illustrates the structure of the reflection portion thereof. The right-hand side depicts an off-state of applied voltage, in which light transmits. On the other hand, the left-hand side depicts an on-state of applied voltage, in which light is interrupted. This reflection type display apparatus is made up, in the order from the above, by lamination of: a polarizing plate 40; a quarter wave plate 9; a front side substrate 1; a color filter CF; a common electrode 10; a liquid crystal layer 3 having birefringence; a reflection layer 8 that also serves as a pixel electrode; and a rear side substrate 2. In the off-state, liquid crystal molecules 4 are orientated in a horizontal direction, and thus the liquid crystal layer 3 functions as a quarter wave plate. In the on-state, the liquid crystal molecules 4 shift to a vertical orientation, and thus the liquid crystal layer 3 loses the function as the quarter wave plate. In other words, in the off-state, because the liquid crystal layer 3 that functions as a quarter wave plate and a quarter wave plate 9 are overlapped, they function in combination as a half wave plate. In the case of the reflection type, because an incident light makes a round trip in the panel before it is

emitted as a light of reflection, the panel functions in effect as full wave plate. Because full wave plate transmits incident light and emits as it is, consequently, a linearly polarized incident light passing through the polarizing plate 40 reaches the observer as a linearly polarized emergent light as it is, thereby ensuring a light transmission state to be realized. On the other hand, in the on-state, because the liquid crystal layer 3 loses the function as a quarter wave plate, only the quarter wave plate 9 remains to function. In the reflection type, because an incident light makes a round trip through a quarter wave plate 9, the panel functions in effect as a half wave plate. A half wave plate rotates a linearly polarized incident light by 90° to make it a linearly polarized emergent light. Therefore, the linearly polarized incident light when passing through the polarizing plate 40 is rotated by 90° to become a linearly polarized emergent light and thus to be absorbed by the polarizing plate 40. Thereby, a light cut-off state is obtained. By way of example, operation in the transmission portion is substantially the same as in the reflection portion described above. The transmission portion has a structure in its bottom portion which is as if in a mirror relation with its upper portion with respect to a boundary of the reflection layer 8, virtually drawn extending along the reflection layer 8. Namely, in the structure thereof, a thickness of the liquid crystal layer 3 becomes twofold of a thickness of the reflection portion, and on a rear surface of the rear side substrate 2, there are added a quarter wave plate 19 and a polarizing plate 41 (see FIG. 3). Further, a thickness of the color filter CF therein becomes approximately twofold in comparison with that in the reflection portion (see FIG. 3). Further, each color filter CF of each color of RGB used in this embodiment of the invention has the same thickness. However, it is not limited thereto, and each film thickness of the colored layer 50 and the transparent layer 51 may be varied optimally for each of RGB.

[0026] As described heretofore, in the hybrid mode display apparatus according to the invention, it becomes possible to provide for the transmission portion having high color purity and the reflection portion having a high reflectance at the same time with full compatibility ensured therebetween. Further, because of no need of patterning its color filter into irregular shapes within the pixel, defects such as de-coloring associated with the prior art will not be recognized by the observer. In addition, when patterning its color filter by photolithography, deformation or defect in patterns is not likely to occur. Although the invention has been described in its preferred form with a certain degree of particularity, obviously many changes and variations are possible therein. It is therefore to be understood that the present invention may be practiced otherwise than as specifically described herein.

Claims

1. A display apparatus comprising:

a pair of substrates comprising a first substrate (1) on a front side and a second substrate (2) on a rear side, disposed so as to oppose each other;
 a first electrode (10) provided in an internal surface of said first substrate (1);
 a second electrode (11) provided in an internal surface of said second substrate (2);
 a color filter (CF) provided on said first substrate (1), and aligned with a pixel formed in a portion in which said first and said second electrodes oppose each other, said color filter (CF) comprising a colored layer (50);
 an electro-optical layer (3) disposed between said pair of substrates; and
 a reflection layer (8) provided on an internal surface of said second substrate, wherein said reflection layer (8) includes a hole provided for each pixel, thereby dividing each pixel in its plane into a light transmission portion (T) which is within the hole and a light reflection portion (R) which is outside the hole;

wherein said colored layer (50) is formed thinner in said reflection portion (R) than in said transmission portion (T);

characterized in that:

said color filter (CF) is provided on said first substrate (1);
 said color filter (CF) comprises a lamination of a colored layer (50) and a transparent layer (51), and
 said transparent layer (51) is formed so as to compensate for the difference in thickness of said colored layer between the transmission portion (T) and the reflection portion (R).

2. The display apparatus according to claim 1, wherein a thickness of said transparent layer (51) is set optimal so that an optical density of said colored layer is adjusted between the transmission portion (T) and the reflection portion (R).

3. The display apparatus according to claim 1, wherein said transparent layer (51) comprises a transparent resin film formed in an internal surface of said first substrate (1), and said colored layer (50) comprises a colored film formed so as to overlap said transparent resin film.

4. The display apparatus according to claim 1, wherein said transparent layer (51) is formed by a selective etching of a transparent internal surface of said

first substrate (1), and said colored layer (50) comprises a colored film that is formed on the internal surface thereof that is etched.

5. The display apparatus according to claim 1, wherein said electro-optical layer (3) comprises a liquid crystal layer that has a birefringence property, and a thickness of which is set twofold in the transmission portion (T) than in the reflection portion.

6. A display apparatus according to claim 1, wherein:

said first electrode (10) is a common electrode that is formed in common across pixels,
 said second electrode (11) is a pixel electrode that is isolated for each pixel, and
 an active element is formed on said second substrate for driving the pixel electrode.

7. A method of manufacturing a display apparatus which comprises: a pair of substrates comprising a first substrate (1) on a front side and a second substrate (2) on a rear side, disposed so as to oppose each other; a first electrode (10) provided in an internal surface of said first substrate; a second electrode (11) provided in an internal surface of said second substrate (2); a color filter (CF) aligned with a pixel formed in a portion in which said first and said second electrodes oppose each other, said color filter (CF) comprising a colored layer (50); an electro-optical layer (3) disposed between said first and said second substrates; and a reflection layer (8) provided on the second substrate (2), said reflection layer (8) including a hole provided for each pixel, thereby dividing each pixel in its plane into a light transmission portion (T) which is within the hole and a light reflection portion (R) which is outside the hole, said method comprising the step of:

forming the colored layer (50) to be thinner in a reflection portion (R) than in a transmission portion (T);

the method being **characterized by** comprising the steps of:

forming the color filter (CF) as a lamination of the colored layer (50) and a transparent layer (51);

forming the transparent layer (51) so as to compensate for the difference in thickness of the colored layer (50) between the transmission portion (T) and the reflection portion (R); and

forming said color filter (CF) on said first substrate.

8. The method of manufacturing the display apparatus according to claim 7, comprising the step of:

setting a thickness of said transparent layer (51) at an optimal value such that an optical density of said colored layer (50) is adjusted between the transmission portion (T) and the reflection portion (R).

9. The method of manufacturing the display apparatus according to claim 7, comprising the steps of:

using for said transparent layer (51) a transparent resin film formed on an internal surface of said first substrate (1); and
using for said colored layer (50) a colored film that is formed so as to overlap said transparent resin film.

10. The method of manufacturing the display apparatus according to claim 7, comprising the steps of:

forming said transparent layer (51) by a selective etching of a transparent internal surface of said first substrate (1); and
providing said colored layer (50) by forming a colored film on said transparent internal surface that is etched.

11. The method of manufacturing the display apparatus according to claim 7, comprising the steps of:

using for said electro-optical layer (3) a liquid crystal layer having a birefringence property; and
setting a thickness of said liquid crystal layer to be twofold in the transmission portion (T) of a thickness thereof in the reflection portion (R).

12. The method of manufacturing the display apparatus according to claim 7, comprising the steps of:

providing said first electrode (10) as a common electrode which is formed in common across pixels;
providing said second electrode (11) as a pixel electrode which is isolated for each pixel; and
forming an active element on said second substrate for driving said pixel electrode.

13. A color filter (CF) which is formed on a substrate (1), as colored differently for each pixel, said each pixel being divided, in its plane, into a light transmission region (t) through which a light passes once and a light reflection region (r) through which a light passes twice as an incident light once then as a reflected light, wherein the color filter (CF) comprises a colored layer (50) formed to be thinner in said light reflection region (r) than in said light transmission region (t);

characterized in that said color filter has a

lamination structure of said colored layer (50) and a transparent layer (51), said transparent layer (51) being formed so as to compensate for the difference in thickness of said colored layer (50) between the light transmission portion (t) and the light reflection portion (r).

14. The color filter according to claim 13, wherein a thickness of said transparent layer (51) is set optimally so that an optical density of said colored layer (50) is adjusted between the light transmission region (t) and the light reflection region (r).

15. The color filter according to claim 13, wherein said transparent layer (51) comprises a transparent resin film formed on a surface of said substrate, and said colored layer (50) comprises a colored film formed so as to overlap said transparent film.

16. The color filter according to claim 13, wherein said transparent layer (51) is formed by selectively etching a surface of said substrate (1), which is transparent, and said colored layer (50) is a colored film formed on the surface of said substrate (1) which is etched.

Patentansprüche

1. Anzeigevorrichtung, die Folgendes umfasst:

ein Substratpaar, das ein erstes Substrat (1) auf einer Vorderseite und ein zweites Substrat (2) auf einer Rückseite umfasst, die so angeordnet sind, dass sie sich gegenüberliegen;
eine erste Elektrode (10), die an einer Innenfläche des genannten ersten Substrats (1) vorgesehen ist;
eine zweite Elektrode (11), die an einer Innenfläche des genannten zweiten Substrats (2) vorgesehen ist;
ein Farbfilter (CF), der auf dem genannten ersten Substrat (1) vorgesehen ist und der an einem Pixel, das in einem Bereich, in dem sich die genannte erste und zweite Elektrode gegenüberliegen, ausgebildet ist, ausgerichtet ist, wobei der genannte Farbfilter (CF) eine gefärbte Schicht (50) umfasst;
eine elektro-optische Schicht (3), die zwischen dem Substratpaar angeordnet ist; und
eine Reflexionsschicht (8), die auf einer Innenfläche des genannten zweiten Substrats vorgesehen ist; wobei die genannte Reflexionsschicht (8) ein für jedes Pixel vorgesehenes Loch beinhaltet, und dabei jedes Pixel in dessen Ebene in einen Lichttransmissionsbereich (T), der innerhalb des Loches liegt und einen Lichtreflexionsbereich (R), der außerhalb des

Loches liegt, aufgeteilt wird;

wobei die gefärbte Schicht (50) im genannten Reflexionsbereich (R) dünner als im genannten Transmissionsbereich (T) ausgebildet ist;

dadurch gekennzeichnet, dass:

der genannte Farbfilter (CF) auf dem genannten ersten Substrat (1) vorgesehen ist;

der genannte Farbfilter (CF) eine Schichtung aus einer gefärbten Schicht (50) und einer transparenten Schicht (51) umfasst, und

die genannte transparente Schicht (51) so ausgebildet ist, dass sie den Dickenunterschied zwischen dem Transmissionsbereich (T) und dem Reflexionsbereich (R) der genannten gefärbten Schicht ausgleicht.

2. Anzeigevorrichtung gemäß Anspruch 1, wobei eine Dicke der genannten transparenten Schicht (51) derart optimiert ist, dass eine optische Dichte der genannten gefärbten Schicht zwischen dem Transmissionsbereich (T) und dem Reflexionsbereich (R) angeglichen ist.

3. Anzeigevorrichtung gemäß Anspruch 1, wobei die genannte transparente Schicht (51) eine transparente Harzfolie umfasst, die in einer Innenfläche des genannten ersten Substrats (1) ausgebildet ist, und wobei die genannte gefärbte Schicht (50) eine gefärbte Folie umfasst, die so ausgebildet ist, dass sie die genannte transparente Harzfolie überlappt.

4. Anzeigevorrichtung gemäß Anspruch 1, wobei die genannte transparente Schicht (51) durch selektives Ätzen einer transparenten Innenfläche des genannten ersten Substrats (1) gebildet ist, und wobei die genannte gefärbte Schicht (50) eine gefärbte Folie umfasst, die auf dessen geätzter Innenfläche ausgebildet ist.

5. Anzeigevorrichtung gemäß Anspruch 1, wobei die genannte elektro-optische Schicht (3) eine Flüssigkristallschicht umfasst, die eine doppelbrechende Eigenschaft aufweist und deren Dicke im Transmissionsbereich (T) gegenüber dem Reflexionsbereich verdoppelt ist.

6. Anzeigevorrichtung gemäß Anspruch 1, wobei:

die genannte erste Elektrode (10) eine gemeinsame Elektrode ist, die über die Pixel gemeinsam ausgebildet ist,

die genannte zweite Elektrode (11) ein Pixel-elektrode ist, die bezüglich jedes Pixels isoliert

ist, und

ein aktives Element zur Ansteuerung der Pixel-elektrode auf dem genannten zweiten Substrat ausgebildet ist.

7. Verfahren zur Herstellung einer Anzeigevorrichtung, die Folgendes umfasst: ein Substratpaar, das ein erstes Substrat (1) auf einer Vorderseite und ein zweites Substrat (2) auf einer Rückseite umfasst, die so angeordnet sind, dass sie sich gegenüberliegen; eine erste Elektrode (10), die an einer Innenfläche des genannten ersten Substrats vorgesehen ist; eine zweite Elektrode (11), die an einer Innenfläche des genannten zweiten Substrats (2) vorgesehen ist; ein Farbfilter (CF), der an einem Pixel, das in einem Bereich, in dem sich die genannte erste und zweite Elektrode gegenüberliegen, ausgebildet ist, ausgerichtet ist, wobei der genannte Farbfilter (CF) eine gefärbte Schicht (50) umfasst; eine elektro-optische Schicht (3), die zwischen dem genannten ersten und dem genannten zweiten Substrat angeordnet ist; und eine Reflexionsschicht (8), die auf dem genannten zweiten Substrats (2) vorgesehen ist, wobei die genannte Reflexionsschicht (8) ein für jedes Pixel vorgesehenes Loch beinhaltet, und dabei jedes Pixel in dessen Ebene in einen Lichttransmissionsbereich (T), der innerhalb des Loches liegt und einen Lichtreflexionsbereich (R), der außerhalb des Loches liegt, aufgeteilt wird, wobei das genannte Verfahren den folgenden Schritt aufweist:

Ausbildung der gefärbten Schicht (50), dass diese in einem Reflexionsbereich (R) dünner als in einem Transmissionsbereich (T) ist;

wobei das Verfahren durch das Vorsehen der folgenden Schritte gekennzeichnet ist:

Ausbildung des Farbfilters (CF) als Schichtung aus der gefärbten Schicht (50) und einer transparenten Schicht (51);

Ausbildung der transparenten Schicht (51) derart, dass der Dickenunterschied zwischen dem Transmissionsbereich (T) und dem Reflexionsbereich (R) der gefärbten Schicht (50) ausgeglichen wird; und
Ausbildung des genannten Farbfilters (CF) auf dem genannten ersten Substrat.

8. Verfahren zur Herstellung der Anzeigevorrichtung gemäß Anspruch 7, das den folgenden Schritt umfasst:

Einstellen einer Dicke der genannten transparenten Schicht (51) auf einen derart optimierten Wert, dass eine optische Dichte der genannten gefärbten Schicht (50) zwischen dem Transmissionsbereich (T) und dem Reflexionsbe-

reich (R) angeglichen ist.

9. Verfahren zur Herstellung der Anzeigevorrichtung gemäß Anspruch 7, das den folgenden Schritt umfasst:

Verwendung einer transparenten Harzfolie, die auf einer Innenfläche des genannten ersten Substrats (1) ausgebildet ist, für die transparente Schicht (51); und
Verwendung einer gefärbten Folie, die so ausgebildet ist, dass sie die genannte transparente Harzfolie überlappt, für die genannte gefärbte Schicht (50).

10. Verfahren zur Herstellung der Anzeigevorrichtung gemäß Anspruch 7, das die folgenden Schritte umfasst:

Ausbilden der genannten transparenten Schicht (51) durch selektives Ätzen einer transparenten Innenfläche des genannten ersten Substrats (1); und
Vorsehen der genannten gefärbten Schicht (50) durch Ausbilden einer gefärbten Folie auf der genannten transparenten Innenfläche, die geätzt wurde.

11. Verfahren zur Herstellung der Anzeigevorrichtung gemäß Anspruch 7, das die folgenden Schritte umfasst:

Verwendung einer Flüssigkristallschicht mit doppelbrechender Eigenschaft für die genannte elektro-optische Schicht (3)
Festlegen einer Dicke der genannten Flüssigkristallschicht, so dass diese im Transmissionsbereich (T) gegenüber deren Dicke im Reflexionsbereich (R) verdoppelt ist.

12. Verfahren zur Herstellung der Anzeigevorrichtung gemäß Anspruch 7, das die folgenden Schritte umfasst:

Vorsehen der genannten ersten Elektrode (10) als eine gemeinsame Elektrode, die über die Pixel gemeinsam ausgebildet ist;
Vorsehen der genannten zweiten Elektrode (11) als eine Pixelelektrode, die bezüglich jedes Pixels isoliert ist; und
Ausbilden eines aktiven Elements auf dem genannten zweiten Substrat zur Ansteuerung der Pixelelektrode.

13. Farbfilter (CF), der auf einem Substrat (1) ausgebildet ist, wobei er für jedes Pixel unterschiedlich gefärbt ist, und wobei jedes, genanntes Pixel in seiner Ebene in einen Lichttransmissionsbereich (t), den

Licht einmal durchläuft und einen Lichtreflexionsbereich (r), den Licht zweimal, einmal als einfallendes Licht und dann als reflektiertes Licht, durchläuft, aufgeteilt ist, wobei der genannte Farbfilter (CF) eine gefärbte Schicht (50) umfasst, die so ausgestaltet ist, dass sie im genannten Lichtreflexionsbereich (r) dünner als im genannten Lichttransmissionsbereich (t) ist;

der **dadurch gekennzeichnet ist, dass** der genannte Farbfilter eine Schichtstruktur aus der genannten gefärbten Schicht (50) und einer transparenten Schicht (51) aufweist, dass die genannte transparente Schicht (51) so ausgebildet ist, dass sie den Dickenunterschied zwischen dem Lichttransmissionsbereich (t) und dem Lichtreflexionsbereich (r) der genannten gefärbten Schicht (50) ausgleicht.

14. Farbfilter gemäß Anspruch 13, wobei eine Dicke der genannten transparenten Schicht (51) derart optimiert ist, dass eine optische Dichte der genannten gefärbten Schicht zwischen dem Lichttransmissionsbereich (t) und dem Lichtreflexionsbereich (r) angeglichen ist.

15. Farbfilter gemäß Anspruch 13, wobei die genannte transparente Schicht (51) eine transparente Harzfolie umfasst, die auf einer Fläche des genannten Substrats ausgebildet ist, und wobei die genannte gefärbte Schicht (50) eine gefärbte Folie umfasst, die so ausgebildet ist, dass sie die genannte transparente Folie überlappt.

16. Farbfilter gemäß Anspruch 13, wobei die genannte transparente Schicht (51) durch selektives Ätzen einer Fläche des genannten Substrats (1), die transparent ist, gebildet ist, und wobei die genannte gefärbte Schicht (50) eine gefärbte Folie ist, die auf der geätzten Fläche des genannten Substrats (1) ausgebildet ist.

Revendications

1. Dispositif d'affichage comprenant :

une paire de substrats comprenant un premier substrat (1) sur une face avant et un second substrat (2) sur une face arrière, disposés de façon à être opposés l'un à l'autre,
une première électrode (10) disposée dans une surface interne dudit premier substrat (1),
une seconde électrode (11) disposée dans une surface interne dudit second substrat (2),
un filtre de couleur (CF) disposé sur ledit premier substrat (1), et aligné avec un pixel, formé dans une partie dans laquelle lesdites première et seconde électrodes sont opposées l'une à

l'autre, ledit filtre de couleur (CF) comprenant une couche colorée (50), une couche électro-optique (3) disposée entre ladite paire de substrats, et une couche de réflexion (8) disposée sur une surface interne dudit second substrat, où ladite couche de réflexion (8) comprend un trou prévu pour chaque pixel, en divisant ainsi chaque pixel dans son plan en une partie de transmission de lumière (T) qui est à l'intérieur du trou et une partie de réflexion de lumière (R) qui est à l'extérieur du trou,

où ladite couche colorée (50) est formée en étant plus mince dans ladite partie de réflexion (R) que dans ladite partie de transmission (T),

caractérisé en ce que :

ledit filtre de couleur (CF) est disposé sur ledit premier substrat (1), ledit filtre de couleur (CF) comprend une stratification constituée d'une couche colorée (50) et d'une couche transparente (51), et ladite couche transparente (51) est formée de façon à compenser la différence d'épaisseur de ladite couche colorée entre la partie de transmission T et la partie de réflexion (R).

2. Dispositif d'affichage selon la revendication 1, dans lequel l'épaisseur de ladite couche transparente (51) est établie de manière optimale de sorte qu'une densité optique de ladite couche colorée soit réglée entre la partie de transmission (T) et la partie de réflexion (R).
3. Dispositif d'affichage selon la revendication 1, dans lequel ladite couche transparente (51) comprend un film de résine transparent formé dans une surface interne dudit premier substrat (1), et ladite couche colorée (50) comprend un film coloré formé de façon à se chevaucher ledit film de résine transparent.
4. Dispositif d'affichage selon la revendication 1, dans lequel ladite couche transparente (51) est formée par une gravure sélective d'une surface interne transparente dudit premier substrat (1) et ladite couche colorée (50) comprend un film coloré qui est formée sur sa surface interne qui est gravée.
5. Dispositif d'affichage selon la revendication 1, dans lequel ladite couche électro-optique (3) comprend une couche à cristaux liquides qui présente une propriété de biréfringence, et dont l'épaisseur dans la partie de transmission (T) est établie au double de celle dans la partie de réflexion.
6. Dispositif d'affichage selon la revendication 1, dans

lequel :

ladite première électrode (10) est une électrode commune qui est formée en commun sur des pixels, ladite seconde électrode (11) est une électrode de pixel qui est isolée, pour chaque pixel, et un élément actif est formé sur ledit second substrat pour commander l'électrode de pixel.

7. Procédé de fabrication d'un dispositif d'affichage qui comprend : une paire de substrats comprenant un premier substrat (1) sur une face avant et un second substrat (2) sur une face arrière, disposés de façon à être opposés l'un à l'autre, une première électrode (10) disposée dans une surface interne dudit premier substrat, une seconde électrode (11) disposée dans une surface interne dudit second substrat (2), un filtre de couleur (CF) aligné avec un pixel, formé dans une partie dans laquelle lesdites première et seconde électrodes sont opposées l'une à l'autre, ledit filtre de couleur (CF) comprenant une couche colorée (50), une couche électro-optique (3) disposée entre lesdits premier et second substrats, et une couche de réflexion (8) disposée sur le second substrat (2), ladite couche de réflexion (8) comprenant un trou prévu pour chaque pixel, en divisant ainsi chaque pixel dans son plan en une partie de transmission de lumière (T) qui est à l'intérieur du trou et une partie de réflexion de lumière (R) qui est à l'extérieur du trou, ledit procédé comprenant l'étape consistant à :

former la couche colorée (50) pour qu'elle soit plus mince dans une partie de réflexion (R) que dans une partie de transmission (T), le procédé étant **caractérisé en ce qu'il** comprend les étapes consistant à :

former le filtre de couleur (CF) sous la forme d'une stratification constituée de la couche colorée (50) et d'une couche transparente (51), former la couche transparente (51) de façon à compenser la différence d'épaisseur de la couche colorée (50) entre la partie de transmission (T) et la partie de réflexion (R), et former ledit filtre de couleur (CF) sur ledit premier substrat.

8. Procédé de fabrication du dispositif d'affichage selon la revendication 7, comprenant l'étape consistant à :

établir une épaisseur de ladite couche transparente (51) à une valeur optimale de sorte qu'une densité optique de ladite couche colo-

rée (50) soit réglée entre la partie de transmission (T) et la partie de réflexion (R).

9. Procédé de fabrication du dispositif d'affichage selon la revendication 7, comprenant les étapes consistant à :

utiliser pour ladite couche transparente (51), un film de résine transparent formé sur une surface interne dudit premier substrat (1), et
utiliser pour ladite couche colorée (50), un film coloré qui est formé de façon à se chevaucher ledit film de résine transparent.

10. Procédé de fabrication du dispositif d'affichage selon la revendication 7, comprenant les étapes consistant à :

former ladite couche transparente (51) par une gravure sélective d'une surface interne transparente dudit substrat (1), et
fournir ladite couche colorée (50) en formant un film coloré sur ladite surface interne transparente qui est gravée.

11. Procédé de fabrication du dispositif d'affichage selon la revendication 7, comprenant les étapes consistant à :

utiliser pour ladite couche électro-optique (3), une couche à cristaux liquides présentant une propriété de biréfringence, et
établir une épaisseur de ladite couche à cristaux liquides dans la partie de transmission (T) pour qu'elle soit égale au double de son épaisseur dans la partie de réflexion (R).

12. Procédé de fabrication du dispositif d'affichage selon la revendication 7, comprenant les étapes consistant à :

fournir ladite première électrode (10) en tant qu'électrode commune qui est formée en commun sur des pixels,
fournir ladite seconde électrode (11) en tant qu'électrode de pixel qui est isolée, pour chaque pixel, et
former un élément actif sur ledit second substrat pour commander ladite électrode de pixel.

13. Filtre de couleur (CF) qui est formé sur un substrat (1), en étant coloré différemment pour chaque pixel, chaque dit pixel étant divisé, dans son plan, en une région de transmission de lumière (t) à travers laquelle passe une fois la lumière et une région de réflexion de lumière (r) à travers laquelle passe deux fois la lumière, une première fois en tant que lumière incidente puis en tant que lumière réfléchie,

où le filtre de couleur (CF) comprend une couche colorée (50) formée pour être plus mince dans ladite région de réflexion de lumière (r) que dans ladite région de transmission de lumière (t),

caractérisé en ce que ledit filtre de couleur présente une structure de stratification constituée de ladite couche colorée (50) et d'une couche transparente (51), ladite couche transparente (51) étant formée de façon à compenser la différence d'épaisseur de ladite couche colorée (50) entre la partie de transmission de lumière (t) et la partie de réflexion de lumière (r).

14. Filtre de couleur selon la revendication 13, dans lequel l'épaisseur de ladite couche transparente (51) est établie de manière optimale de sorte que la densité optique de ladite couche colorée (50) soit réglée entre la région de transmission de lumière (t) et la région de réflexion de lumière (r).

15. Filtre de couleur selon la revendication 13, dans lequel ladite couche transparente (51) comprend un film de résine transparent formé sur une surface dudit substrat, et ladite couche colorée (50) comprend un film coloré formé de façon à se chevaucher ledit film transparent.

16. Filtre de couleur selon la revendication 13, dans lequel ladite couche transparente (51) est formée en gravant sélectivement une surface dudit substrat (1), qui est transparent, et ladite couche colorée (50) est un film coloré formé sur la surface dudit substrat (1) qui est gravée.

FIG. 1A

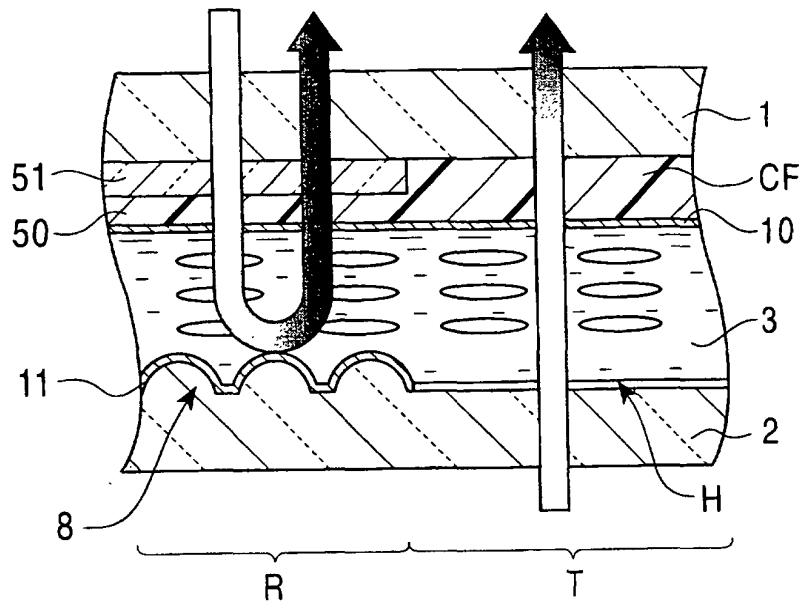


FIG. 1B

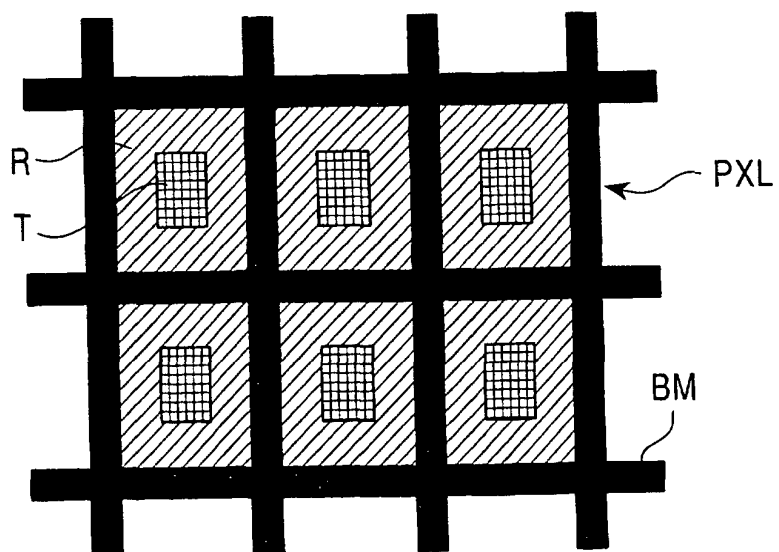


FIG. 2

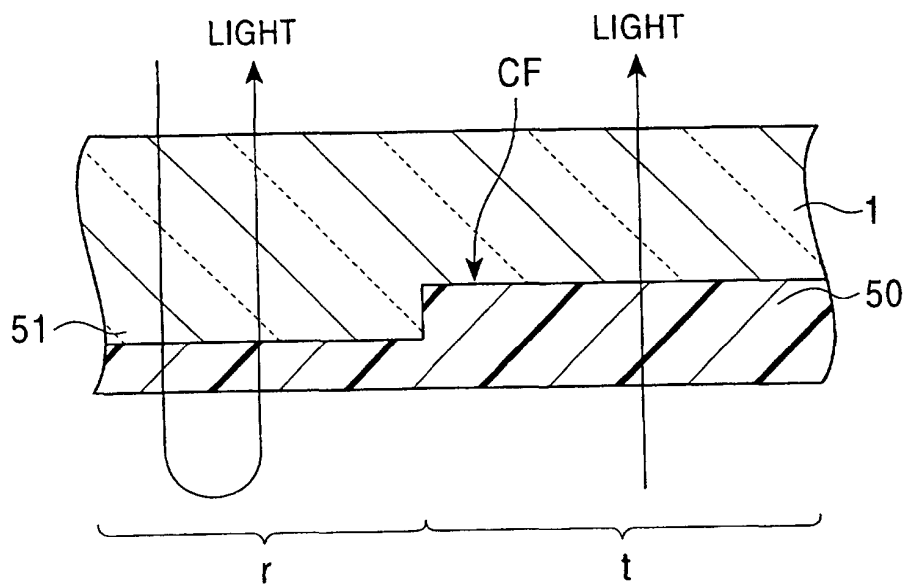


FIG. 3

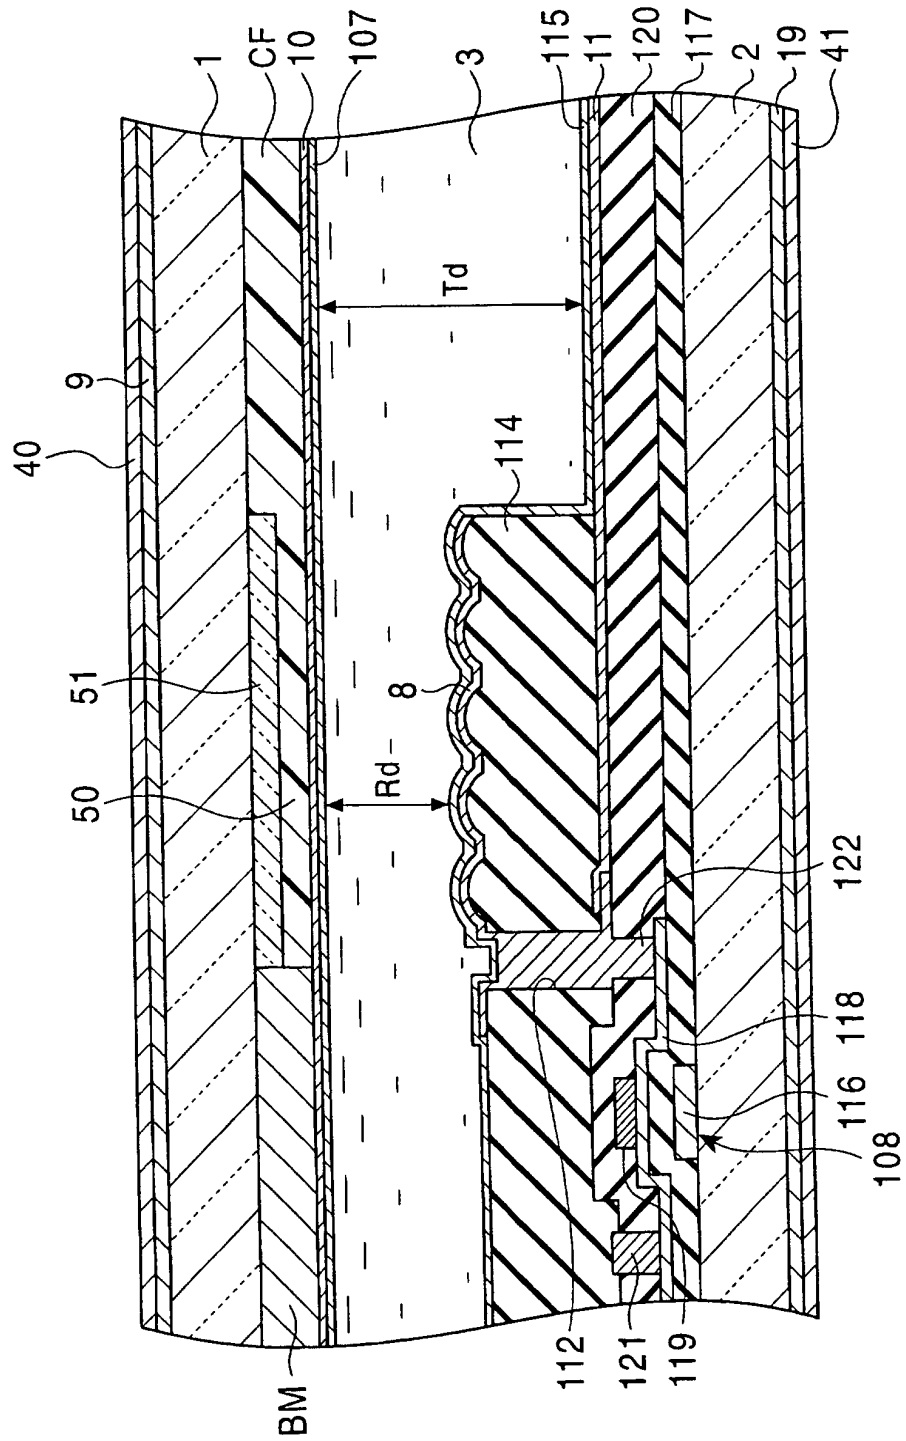


FIG. 4

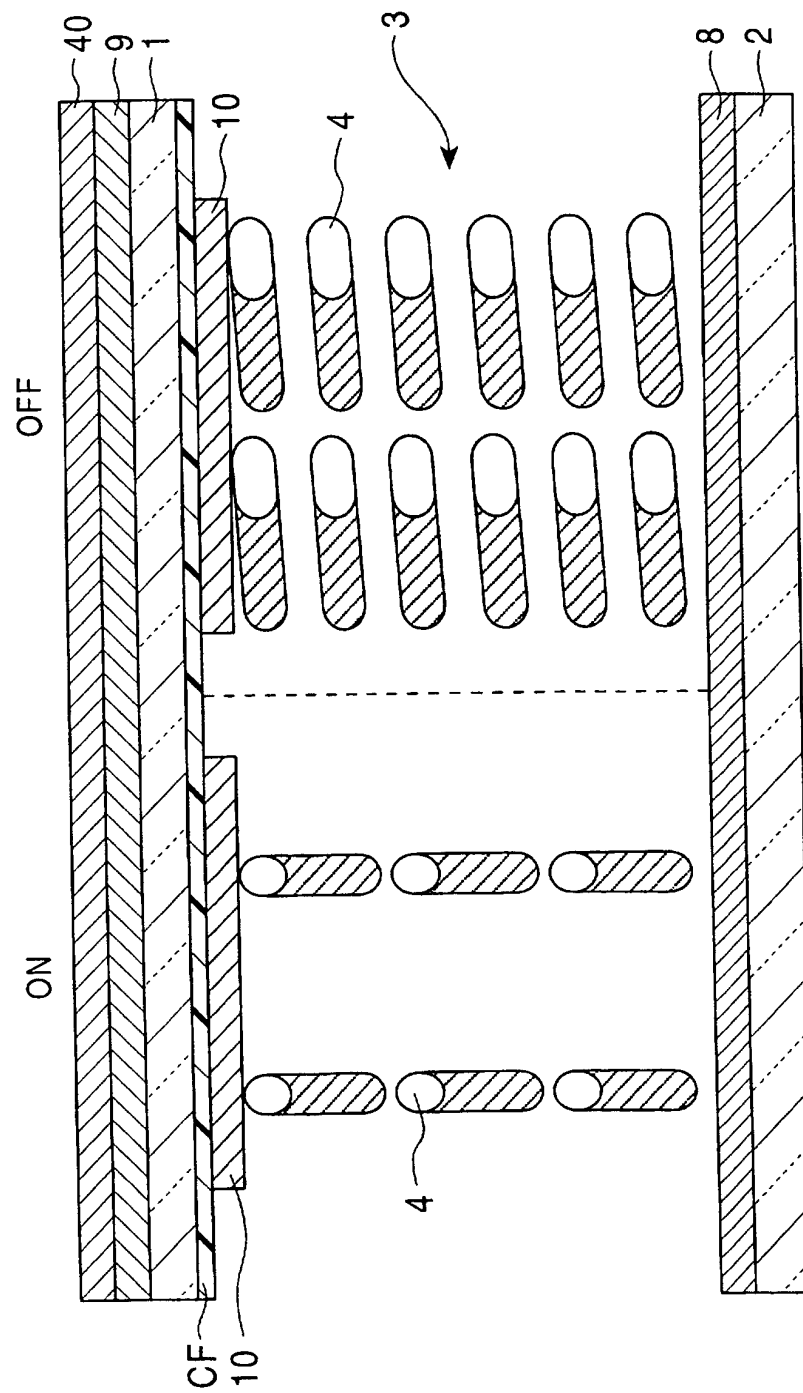


FIG. 5A
RELATED ART


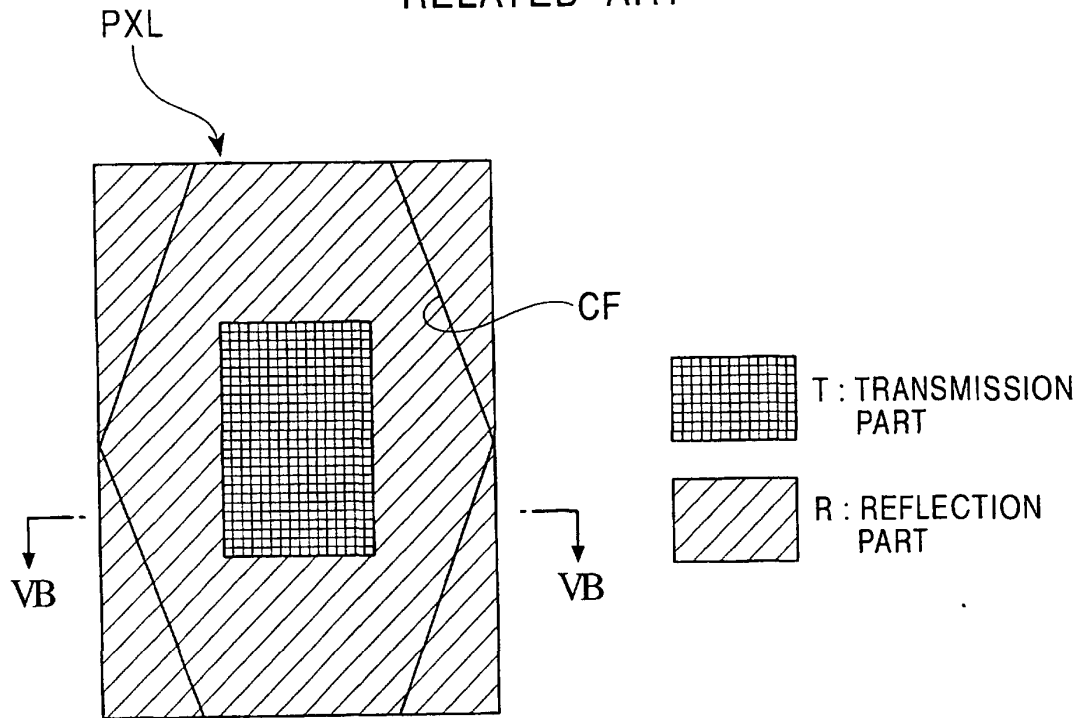


FIG. 5B
RELATED ART

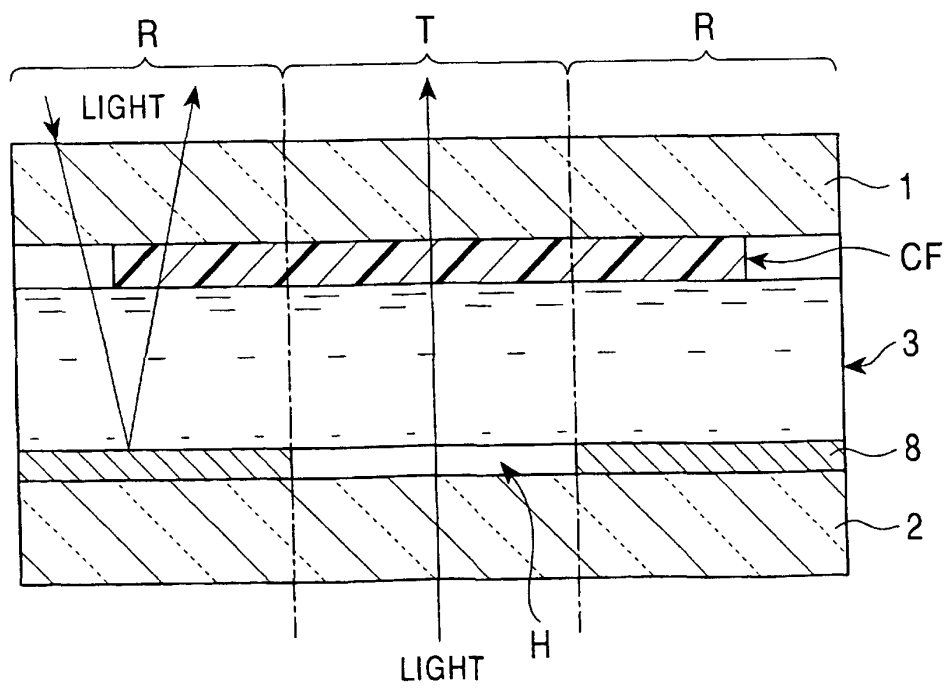

专利名称(译)	具有滤色器的显示装置及其制造方法		
公开(公告)号	EP1109053B1	公开(公告)日	2005-09-21
申请号	EP2000403497	申请日	2000-12-13
[标]申请(专利权)人(译)	索尼公司		
申请(专利权)人(译)	索尼公司		
当前申请(专利权)人(译)	索尼公司		
发明人	TETSUO, URABE, C/O SONY CORPORATION NOBUYUKI, SHIGENO, C/O SONY CORPORATION TAKAYUKI, FUJIOKA, C/O SONY CORPORATION		
IPC分类号	G09F9/00 G02B5/08 G02B5/20 G02F1/1335 G02F1/13363		
CPC分类号	G02F1/133555 G02B5/201 G02F1/133514 G02F2001/133519 G02F2001/133638		
优先权	1999353217 1999-12-13 JP		
其他公开文献	EP1109053A3 EP1109053A2		
外部链接	Espacenet		

摘要(译)

提供一种混合型显示装置,其能够在透射模式显示的情况下保持色纯度,并且在反射模式显示的情况下改善颜色的亮度。该混合型显示装置包括:一对第一和第二基板(1,2);第一电极(10)设置在第一基板(1)的内表面上;第二电极(11)设置在第二基板(2)的内表面上;滤色器(CF)设置在第一基板(1)上,与第一电极和第二电极之间的部分中的像素对准;液晶层(3)介于一对基板之间;和设置在第二基板上的反射层(8)。反射层(8)具有为每个像素设置的孔,其将每个像素的平面划分为孔内的透射部分(T)和孔外的反射部分(R)。滤色器包括着色层(50)和透明层(51)的叠层。

