



(11)

EP 1 300 720 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
16.03.2016 Bulletin 2016/11

(51) Int Cl.:
G02F 1/1337 ^(2006.01) **G02F 1/1343** ^(2006.01)
G02F 1/139 ^(2006.01)

(21) Application number: **01947920.3**

(86) International application number:
PCT/JP2001/005930

(22) Date of filing: **09.07.2001**

(87) International publication number:
WO 2002/006887 (24.01.2002 Gazette 2002/04)

(54) **Nematic liquid crystal display having a memory effect**

Nematische Flüssigkristallanzeige mit einem Gedächtniseffekt

Système d'affichage à cristaux liquides de type nématique ayant un effet mémoire

(84) Designated Contracting States:
DE FR GB NL

(30) Priority: **13.07.2000 JP 2000213040**
09.03.2001 JP 2001066435

(43) Date of publication of application:
09.04.2003 Bulletin 2003/15

(73) Proprietor: **Japan Science and Technology
Agency
Kawaguchi-shi
Saitama (JP)**

(72) Inventors:
• **YONEYA, Makoto**
Hitachinaka-shi,
Ibaraki 312-0025 (JP)
• **KIM, Jong-Hyun**
Tsukuba-shi,
Ibaraki 305-0035 (JP)
• **YOKOYAMA, Hiroshi**
Tsukuba-shi,
Ibaraki 305-0031 (JP)
• **YAMAMOTO, Jun**
Nishi-Tokyo-shi,
Tokyo 188-0002 (JP)

(74) Representative: **Hoarton, Lloyd Douglas Charles
et al**
Forresters
Skygarden
Erika-Mann-Strasse 11
80636 München (DE)

(56) References cited:
WO-A-98/50821 GB-A- 2 330 214
JP-A- 8 262 445 JP-A- 10 307 295
JP-A- 10 307 295 JP-A- 11 352 486

• **DURAND G: "Field induced surface anchoring
transitions and nematic bistable displays"**
PROCEEDINGS OF THE SPIE - THE
INTERNATIONAL SOCIETY FOR OPTICAL
ENGINEERING SPIE-INT. SOC. OPT. ENG USA,
vol. 2949, 1997, pages 2-10, XP002366931 ISSN:
0277-786X

• **KIM JONG-HYUN ET AL: "Surface alignment**
bistability of nematic liquid crystals by
orientationally frustrated surface patterns"
APPLIED PHYSICS LETTERS, AIP, AMERICAN
INSTITUTE OF PHYSICS, MELVILLE, NY, US, vol.
78, no. 20, 14 May 2001 (2001-05-14), pages
3055-3057, XP012028033 ISSN: 0003-6951

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 300 720 B1

Description

TECHNICAL FIELD

- 5 **[0001]** The present invention relates to a liquid crystal device, and more particularly to a liquid crystal device of low power consumption and high resolution.

BACKGROUND ART

- 10 **[0002]** Conventionally, as display devices used in portable information terminals such as cellular phones, liquid crystal display devices making use of nematic liquid crystal have mainly been used, by virtue of their low drive voltage and low power consumption characteristics. In association with the recent rapid increase in the use of portable information terminals, the number of such liquid crystal display devices being produced has increased accordingly. At the same time, there has arisen demand for higher display performance, such as an increased number of pixels (characters).
- 15 **[0003]** In addition, in view of a desire to lengthen the period of time over which battery-based portable apparatus can be continuously operated, technologies that attain not only the aforementioned higher display functions, including higher resolution, but also lower electric power consumption are being pursued.
- 20 **[0004]** In one such pursuit, there have been proposed a variety of techniques involving use of a liquid crystal display device having a so-called display memory effect, which enables display to be maintained even after power supply to the liquid display device is cut.
- 25 **[0005]** By the employment of the memory effect, when no changes occur in the contents being displayed, in principle, power consumption can be reduced to zero. Also, power consumption can be reduced by applying voltage on a pixel-by-pixel basis to only those pixels that correspond to portions of the display to be changed.
- 30 **[0006]** Incidentally, as is well known in the art, when passive matrix drive is employed in conventional Twisted Nematic (TN) mode or Super-Twisted Nematic (STN) mode, an upper limit is imposed on the number of pixels which can be displayed, due to limitation imposed on the duty ratio. However, use of the memory effect eliminates the restriction imposed on the number of pixels.
- 35 **[0007]** Specific examples of conventional techniques which employ the aforementioned display memory effect include, among others, a technique in which ferroelectric liquid crystal is used [Applied Physics Letters, 36, 899 (1980); Japanese Patent Application Laid-Open (kokai) No. 107216/1981] and a technique in which nematic liquid crystal is combined with alignment layers which have undergone fine grating treatment (Japanese kohyo (PCT) Patent Publication No. 513809/1999).
- 40 **[0008]** International Publication No. WO 98/50821 discloses a liquid crystal display device which comprises a liquid crystal material which is sandwiched between two substrates. One of the substrates is treated so as to degenerate the anchoring of liquid crystal molecules to that substrate to define an anchorage without orientation memory.
- 45 **[0009]** GB-A-2330214 discloses a nematic liquid crystal device which comprises liquid crystal material sandwiched between two substrates. One or both of the substrates is treated to provide two stable alignment directions into which the liquid crystal molecules may switch under the influence of an applied electric field.
- 50 **[0010]** In Durand, G. "Field induced surface anchoring transitions and nematic bistable displays", Proceedings of the SPIE, Vol.2949, pp.2-10, 1997, a bistable nematic display of the vertical field type is disclosed.
- 55 **[0011]** JP 10 307 295 discloses an IPS-type LCD in which each pixel is divided into two regions defined by a set of interdigitated electrodes. One set in one region is arranged orthogonal to the other set in the other region. In addition, the alignment direction in one region is arranged to be orthogonal to that in the other region. The alignment directions correspond to their respective electrode sets. This design is used for reducing discolouration effects.
- 60 **[0012]** The present invention seeks to provide an improved liquid crystal display device.
- 65 **[0013]** According to one aspect of the present invention, there is provided a liquid crystal display device as defined in claim 1 hereinafter.
- 70 **[0014]** According to another aspect of the present invention, there is provided a liquid crystal display device as defined in claim 3 hereinafter.
- 75 **[0015]** According to a further aspect of the present invention, there is provided a liquid crystal display device as defined in claim 5 hereinafter.
- 80 **[0016]** However, of the aforementioned conventional techniques, notwithstanding its advantages of quick response attributed to ferroelectricity and wide viewing angle attained by use of in-plane switching between two homogeneous alignment states, the former technique in which ferroelectric (chiral smectic C) liquid crystal is used has not yet found wide utility in practice, because of the following problem: the ferroelectric liquid crystal has a layer structure unique to smectic liquid-crystal and thus entails difficulty in alignment control as compared to the case of ordinary liquid crystal display devices making use of nematic liquid crystal; and the layer structure, once broken under mechanical impact, is difficult to restore.

[0017] Meanwhile, the latter technique in which nematic liquid crystal is combined with alignment layers which have undergone fine grating treatment involves the following problem. That is, because this technique is based on switching between the two states of homeotropic (vertical) alignment state and hybrid alignment state while making use of flexoelectric effect, unsatisfactory viewing angle of the display arises in a specific direction, because of the hybrid alignment.

[0018] Moreover, in a liquid crystal device of this type, reduction in drive voltage requires the liquid crystal material to have a sufficiently high flexoelectric coefficient. However, since liquid crystal material of such high flexoelectric coefficient generally remains unknown, successful reduction in drive voltage and power consumption has not yet been attained. Thus, this technique also has not yet achieved widespread practical use.

[0019] As described above, according to the art known hitherto, liquid crystal displays including nematic liquid crystal, which do not have a layer structure and in which alignment control is easy, encounter difficulty in attaining both low power consumption by virtue of the memory effect and wide viewing angle of the display.

Disclosure of the Invention

[0020] In view of the forgoing, embodiments of the present invention provide a high resolution, wide viewing angle, low power consumption liquid crystal display device which utilizes nematic liquid crystal and which can attain both the memory effect and wide-viewing-angle display characteristic.

[0021] The wide-viewing-angle display characteristic can be attained when a liquid crystal display device has a configuration such that switching among a plurality of liquid crystal alignment states mainly occurs in the parallel direction to the surfaces of substrates that sandwich a liquid crystal layer. Further, in order to enable the liquid crystal display device to memorize the alignment states, the liquid crystal display device is configured in such a manner that these states remain energetically stable even after removal of applied voltage.

[0022] When no voltage is applied to the display device and thus no electric field is applied to the liquid crystal layer, the energy of a liquid crystal alignment state is represented by the sum of the elastic deformation energy of the liquid crystal layer itself and the energy of interface interaction between the liquid crystal layer and alignment layers provided on the surfaces of the substrates. Therefore, through utilization of an interface interaction which secures a sufficiently stable energy state in plural alignment directions in the substrate surface, the plurality of alignment states among which the state of liquid crystal is switched in the plane parallel to the substrate surface can be rendered stable.

[0023] Further, the energetic stability attained by means of the interface interaction is desirably equivalent in the plural alignment directions, in order to enable stable holding of the plurality of alignment states and stable switching among the alignment states.

[0024] Specific means for obtaining a liquid crystal interface alignment which renders liquid crystal equivalently energetically stable in the plural alignment directions in the substrate surface is employment of an alignment layer having undergone anchoring treatment in plural directions whose form equal angles relative to one another in the substrate surface, wherein the anchoring treatment in each of the plural directions is performed in such a manner that the rising (pre-tilt) angle of liquid crystal molecules in the corresponding anchoring direction with respect to the substrate surface becomes substantially zero.

[0025] The action of such an alignment layer will be described with reference to an example case in which the number of anchoring directions in the substrate surface is two.

[0026] The alignment layer provides the same action even when the number of anchoring directions is greater than two, except for the condition of rising (pre-tilt) angles, which will be described later.

[0027] As shown in FIG. 1, when liquid crystal anchoring force of an alignment layer does not differ greatly between two anchoring directions, the alignment layer typically has a liquid crystal easy axis in a composite direction of the two directions, because of competition between the anchoring forces in the two directions.

[0028] When, as shown in Fig. 1(a), all the angles formed between the two anchoring directions are other than 90° , due to this breaking of symmetry, an easy axis which bisects a smaller relative angle becomes stable energetically, and equivalency between two liquid crystal easy axes for realizing a bistable state is lost.

[0029] Therefore, in order to equalize the alignment stabilities of the two easy axes, the alignment layer must be configured in such a manner that, as shown in FIG. 1(b), all the angles formed by the two anchoring directions, which serve as a source of the easy axes, become substantially equal; i.e., about 90° in this specific case.

[0030] Further, even in the above-described case in which the two anchoring directions in the substrate surface form about 90° , when anchoring force is provided to the alignment layer through rubbing treatment, which is generally used as a treatment for providing anchoring force, the liquid crystal alignment direction has a rising angle with respect to the substrate surface (pre-tilt angle of at least 1° , typically in the range of several to several tens of degrees in the case of ordinary rubbing treatment) which is generated naturally, and therefore, breaking of symmetry due to the rising angle must be considered as well.

[0031] As shown in FIG. 1(c), each liquid crystal anchoring direction having a pre-tilt angle can be represented as a directed vector which has an arrow in the direction in which liquid crystal molecules rise from the substrate surface.

[0032] Therefore, in the case shown in FIG. 1(c) in which two anchoring directions having pre-tilt angles intersect each other perpendicularly, of two generated easy axes, the axis (indicated by a thick dotted line) whose arrowhead falls between the arrowheads of the two anchoring directions becomes energetically stable. In this case as well, equivalency between two liquid crystal easy axes for realizing a bistable state is lost.

[0033] Considering breaking of symmetry stemming from the pre-tilt, it is understood that equivalency between the two easy axes can be attained when at least one of the pre-tilt angles of the two anchoring directions is substantially zero, as shown in FIG. 1(d).

[0034] By contrast, in the case in which the number of the anchoring directions is greater than two all the pre-tilt angles of the anchoring directions must be reduced to about 0 degrees in order to attain equivalency among the plurality of resultant easy axes.

[0035] Various methods may be used to provide liquid crystal anchoring, while reducing pre-tilt angle to substantially 0° to thereby secure equivalency among a plurality of easy axes. Examples of such a method include a so-called photo alignment method in which ultraviolet light having undergone linear polarization is irradiated onto a substrate surface which has been previously coated with a photosensitive material sensitive to the light; a method in which an apparatus having a basic structure similar to that of a so-called atomic force microscope (AFM) is caused to scan a substrate surface by use of a probe to thereby enforce stresses to the surface; and a method in which the substrate surface which has been previously coated with a photosensitive material is scanned in an arbitrary pattern by use of light in the form of a beam which causes chemical reaction, such as laser light in the ultraviolet range.

[0036] An alignment layer having a plurality of liquid-crystal anchoring directions can be obtained, for example, by repeating a plurality of times an optical alignment treatment of uniformly radiating linearly-polarized ultraviolet light over the entirety of a target region, while changing the direction of linear polarization.

[0037] In order to render sufficiently stable a plurality of liquid-crystal alignment easy axes obtained in the above-described manner, the relative strengths of anchoring forces of the plurality of competing anchoring directions, which serve as a source of the easy axes, must be controlled precisely.

[0038] This is apparent from failure of the above-described competing to occur when their relative strengths differ greatly from each other.

[0039] In an example case in which anchoring forces are produced in two directions, precise control of the ratio between the relative anchoring forces can be easily performed through employment of a method in which the first regions having one liquid-crystal anchoring direction and the second regions having another liquid-crystal anchoring direction, and these are arranged in a substrate surface in a pattern of, for example, a checkerboard, while the ratio between the total area of the first regions and the total area of the second regions is controlled.

[0040] In-plane switching of nematic liquid crystal for attaining above-described characteristic of wide viewing angle can be realized through provision of a group of electrodes for applying to the liquid crystal layer an electric field having a component substantially parallel to the substrate surface.

[0041] The in-plane switching may be effected by a method in which the above-described alignment layer which renders liquid crystal energetically stable in a plurality of alignment directions is disposed on each of two substrates in order to cause in-plane switching at both substrate interfaces; or a method in which the above-described alignment layer is disposed on one of the substrates, and alignment capability is imparted to the other substrate by means of ordinary rubbing treatment. In either case, the characteristic of wide viewing angle due to in-plane switching can be realized.

[0042] In embodiments of the present invention, the following display methods can be employed. In the former cases, display is effected by the birefringence optical mode between homogeneous states in different in-plane orientations. In latter case, display is effected by the optical rotatory mode between homogeneous and twisted planar states.

[0043] In the latter case which utilizes switching between the homogeneous and twisted planar states, a large energy difference is produced between the bistable switching states due to twist deformation of the liquid crystal layer, with possible generation of characteristics which are unfavorable from the viewpoint of drive, such as a large degree of asymmetry in switching threshold voltage.

[0044] Such unfavorable characteristics can be mitigated through employment of a liquid crystal material which contains a proper amount of chiral molecules as a chiral dopant in order to stabilize the twisted planar states.

[0045] The liquid crystal display device of the present invention can use a liquid material which has a positive or negative dielectric anisotropy ($\Delta\epsilon$).

[0046] Further, a liquid crystal material which has a positive or negative dielectric anisotropy ($\Delta\epsilon$) depending on the frequency of an alternating electric field applied thereto is used; and switching between the bistable states in one direction is effected by use of an alternating electric field of a frequency at which $\Delta\epsilon$ becomes positive, and switching between the bistable states in the opposite direction is effected by use of an alternating electric field of a frequency at which $\Delta\epsilon$ becomes negative. In this case, bidirectional switching between the two states can be carried out by use of merely a pair of interdigitated electrodes. Thus, the structure of the electrodes and their production process can be simplified.

[0047] As in the case of ordinary Twisted Nematic (TN) scheme, the above-described twisted planar state can be changed to a homeotropic (vertical alignment) state by means of a pair of surface electrodes which are provided on two

substrate surfaces in order to apply an electric field to the liquid crystal layer substantially perpendicular to the substrate surface. However, when the electric field is removed in this state, the liquid crystal transforms to the homogeneous state. Therefore, switching between states can be effected by use of such means for applying a vertical electric field, which is particularly effective for refreshing all pixels of the display.

BRIEF DESCRIPTION OF THE DRAWINGS

[0048]

FIG. 1 is a diagram showing the configuration of a liquid crystal display device according to a first embodiment of the present invention.

FIG. 2 is a view showing the configuration of a liquid crystal display device according to the first embodiment of the present invention.

FIG. 3 is a perspective view showing a scanning pattern of a probe used in fabrication of the liquid crystal display device according to the first embodiment of the present invention.

FIG. 4 is a set of time charts showing the switching characteristics of the liquid crystal display device according to the first embodiment of the present invention.

FIG. 5 is a set of views schematically showing alignment states of liquid crystal in dark and light states, respectively, in the first embodiment of the present invention.

FIG. 6 is a set of time charts corresponding to FIG. 4 and showing an electro-optic property of a liquid crystal display device according to a second embodiment of the present invention.

FIG. 7 is a view showing the configuration of a liquid crystal display device according to a third embodiment of the present invention.

FIG. 8 is a set of time charts showing a drive waveform and an electro-optic property of the liquid crystal display device according to the third embodiment of the present invention.

FIG. 9 is a view showing the configuration of a liquid crystal display device according to a fourth embodiment of the present invention.

FIG. 10 is a view showing the configuration of a liquid crystal display device according to a fifth embodiment of the present invention.

FIG. 11 is a set of diagrams showing mask patterns according to a ninth embodiment of the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

[0049] Embodiments of the present invention will next be described in detail.

[0050] FIG. 2 is a view showing the configuration of a liquid crystal display device according to a first embodiment of the present invention.

[0051] Two transparent glass substrates each having a thickness of 1.1 mm and polished surfaces were used for substrates SUB1 and SUB2 shown in FIG. 2.

[0052] A pair of interdigitated electrodes EL2A and EL2B were formed on the substrate SUB1 through a process of forming a transparent conductive layer of ITO (indium tin oxide) on the substrate and patterning the conductive layer. Subsequently, an insulating protective film IL1 of silicon nitride having a thickness of 600 nm was formed on the electrodes EL2A and EL2B.

[0053] Similarly, another pair of interdigitated electrodes EL1A and EL1B were formed on the insulating film IL1 perpendicular to the electrodes EL2 through a process of forming a transparent conductive layer of ITO on the insulating film IL1 and patterning the conductive layer. Subsequently, an insulating protective film IL2 of silicon nitride having a thickness of 200 nm was formed on the electrodes EL1A and EL1B.

[0054] LCL denotes a liquid crystal layer.

[0055] The longitudinal directions of the interdigitated electrodes EL1 and EL2 correspond to an x-axis direction and a y-axis direction, respectively, of a coordinate system shown in FIG. 2.

[0056] The interdigitated electrodes EL1 and EL2 each have a width of 6 μm and have an inter-electrode distance of 4 μm . In the drawing, only three inter-electrode gaps are shown in order to facilitate understanding. However, a device that was actually fabricated has eight inter-electrode gaps.

[0057] Next, after a solution of SE7210 (product of Nissan Chemical Industries, Ltd.), which is solvent-soluble polyimide precursor, was applied to the insulating film IL2, the substrate SUB1 was heated to 200° and then allowed to stand for 30 minutes to thereby obtain a dense polyimide film.

[0058] Subsequently, a stress generation line pattern was formed on the surface of the thus-obtained polyimide film by use of an apparatus having a basic structure similar to that of an AFM. Specifically, a stress generation line pattern was formed on the surface of the polyimide film by use of a probe made of Si_3N_4 or Si and having a tip end sharpened

to an atomic level, the probe having been adjusted to impart stress of 20 to 30 nN to the film surface.

[0059] Next, the scanning pattern of the probe will be described with reference to FIG. 3.

[0060] The scanning was controlled in such a manner that, in small square regions arranged in a checkerboard pattern, linear scanning was performed alternately in directions SCN1A and SCN1B, which are substantially perpendicular to each other.

[0061] The small square regions each had a size of about $1\mu\text{m}$ square; and a plurality of line patterns for generation of stress were formed in each region through an operation of linearly scanning each region by use of the probe, at a density of 35 lines/ μm .

[0062] The scanning operation was performed in order to reduce pre-tilt angle involved in liquid crystal alignment to about 0° ; i.e., the scanning directions in adjacent positions become opposite as in the case of a picture drawn with a single stroke of a brush.

[0063] The above-described pattern shape and pattern density are a mere example and may be adjusted in accordance with the properties of a liquid crystal material to be used.

[0064] The direction of the grid pattern and the linear scanning directions SCN1A and SCN1B are set to form an angle of about 45° with the x-axis and y-axis directions in the coordinate system of FIG. 2.

[0065] In the thus-formed alignment layer AL1, a plurality of regions having a plurality of liquid-crystal easy alignment axes are disposed on the substrate surface. As a result, the alignment layer AL1 serves as an alignment layer which has two easy alignment axes in ALD1A and ALD1B directions, which correspond to the x-axis and y-axis directions of the coordinate system shown in the drawing.

[0066] After a dense polyimide film was formed on the other substrate SUB2 in a manner similar to that described above, the surface of the alignment film was rubbed by use of buff cloth attached to a rubbing roller, in order to provide liquid-crystal alignment capability to the alignment film such that a single easy alignment axis was provided in an ALD2 direction, which corresponds to the x-axis direction of the coordinate system shown in the drawing.

[0067] Subsequently, the two substrates were assembled in such a manner that their surfaces having liquid-crystal alignment capability faced each other via spacers formed of dispersed spherical polymer beads and a seal member provided at the peripheral portions of the substrates. Thus, a liquid crystal cell was completed.

[0068] Subsequently, a nematic liquid crystal composition ZLI-4535 (product of Merck & Co., Inc.; dielectric anisotropy $\Delta\epsilon$: positive, 14.8; refraction index anisotropy Δn : 0.0865) was introduced into the space between the substrates of the liquid crystal cell under vacuum. Subsequently, the liquid crystal cell was sealed with a seal material formed of ultraviolet ray curing resin, to thereby complete a liquid crystal panel.

[0069] By means of the above-described spacers, the thickness of the liquid crystal layer was adjusted to $6.4\mu\text{m}$ as measured after filling of liquid crystal. Accordingly, the liquid crystal display device of the present embodiment has a retardation (And) of $0.5\mu\text{m}$.

[0070] Subsequently, the panel was sandwiched between two polarization plates POL1 and POL2 (G1220DU, product of Nitto Denko Corporation), which were disposed in such a manner that the polarization/transmission axis POL2 of one polarization plate became substantially parallel to the rubbing direction ALD2, and the polarization/transmission axis POL1 of the other polarization plate became perpendicular thereto.

[0071] Subsequently, a drive circuit, a back light, etc. were connected to the liquid crystal display device.

[0072] The switching characteristics of the liquid crystal display device according to the first embodiment will be described with reference to FIG. 4.

[0073] In FIG. 4, V1 represents the waveform of voltage applied between the first interdigitated electrodes EL1A and EL1B; V2 represents the waveform of voltage applied between the second interdigitated electrodes EL2A and EL2B; and Tr represents variation in transmission coefficient of the liquid crystal device.

[0074] As is shown in FIG. 4, the liquid crystal device of the present embodiment can perform switching between two memory states; i.e., bright and dark states, through selective application of AC voltages V1 and V2.

[0075] In the present embodiment, the switching AC voltage V1 was 8 Vpp, and the switching AC voltage V2 was 6 Vpp. That is, a slight degree of drive voltage asymmetry was observed.

[0076] FIG. 5 schematically shows alignment states of the liquid crystal layer which correspond to a dark state (see FIG. 5(a)) and a bright state (see FIG. 5(b)).

[0077] As shown in FIG. 5, the switching between the two states is carried out by means of substantially in-plane switching of molecular alignment of the liquid crystal.

[0078] Subsequently, the viewing angle of the liquid crystal display device of the present embodiment was measured by use of a liquid-crystal view angle measurement apparatus, model CV-1000 (product of Minolta Co., Ltd.). The measurement results reveal that the liquid crystal display device has a wide viewing angle; specifically, the display device has a contrast ratio not less than 10:1 and has no tone reversal, over an entire range including an upper 140° range, a lower 140° range, a left 140° range, and a right 140° range.

[0079] Visual inspection of image quality reveals that no great change in displayed color is observed even when the display device is viewed obliquely, and the display device provides highly uniform display.

[0080] Next, a second embodiment of the present invention will be described.


[0081] A liquid crystal display device according to the second embodiment was fabricated in a manner similar to that of the first embodiment, except that a film of a photosensitive materials was formed on one substrate as an alignment layer, and the surface of the film was scanned by use of ultraviolet light; and a liquid crystal composition contained CB-15 of Merck as a chiral dopant and was composed such that the composition had a helical pitch of about 15 μm .

[0082] Specifically, a mixture of diamine compounds containing equimolar amounts of 4,4'-diaminodiphenylmethane and a compound of Formula 1 having a diazobenzen group was treated with an acid anhydride of pyromellitic dianhydride and/or 1,2,3,4-cyclobutanetetracarboxylic acid, to thereby form a mixture of polyamic acids. After being applied to the substrate surface, the mixture of polyamic acids was fired at 200°C for 30 minutes to thereby be imidized. By use of GaN a laser light (wavelength: 420 nm), the same pattern as that used in the first embodiment was formed on the surface to thereby complete an alignment layer.


[0083] Although a GaN laser was used, an HeCd laser whose oscillation wavelength is close to that of the GaN laser may be used.

[0084] Further, in place of the compound of Formula 1, compounds represented by Formula 2 and Formula 3 may be used as a photosensitive material.


Formula 1

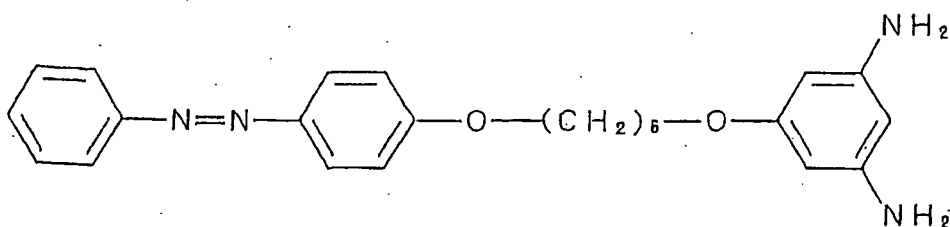

Formula 2



Formula 3

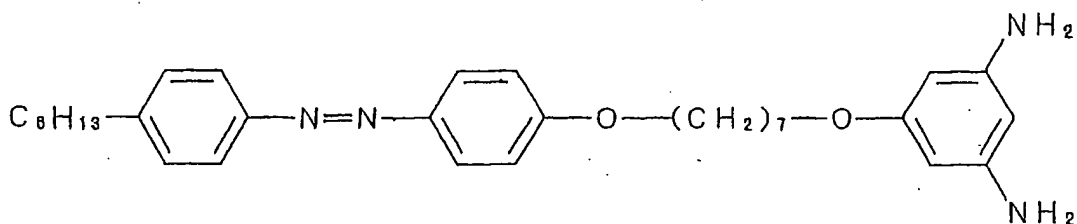

[0085] FIG. 6 is a set of time charts corresponding to FIG. 4 and showing an electro-optic property of the liquid crystal display device according to the present embodiment. In the case of the present embodiment, the switching AC voltage V1 was 5 Vpp, and the switching AC voltage V2 was 4.8 Vpp. That is, the asymmetry between the drive voltages V1 and V2 could be eliminated, because addition of the chiral dopant stabilized the energy state of the twisted planar state.

[0086] Results of a viewing angle measurement similar to that employed in the first embodiment show that the liquid crystal display device of the present embodiment provides a highly uniform display and a wide viewing angle as in the case of the first embodiment.

[0087] Next, a third embodiment of the present invention will be described.

[0088] A liquid crystal display device according to the third embodiment was fabricated in a manner similar to that of the first embodiment, except that TX2A of Merck was used as a liquid crystal material; as shown in FIG. 7, a single pair of interdigitated electrodes were provided; and a two-frequency drive circuit was used.

[0089] The liquid crystal composition TX2A is a nematic composition whose dielectric anisotropy ($\Delta\epsilon$) becomes positive at low frequency and negative at high frequency and which is therefore suitable for two-frequency drive. The crossover frequency of the liquid crystal composition is 6 kHz.

[0090] FIG. 8 shows a drive waveform and an electro-optic property of the liquid crystal display device according to the present embodiment. As shown in FIG. 8, switching between two states by use of the single pair of interdigitated electrodes could be effected by use of AC voltage V1 which had an amplitude of 8 vpp and a frequency of 4 kHz (at which $\Delta\epsilon$ of TX2A becomes positive) for switching from a dark (homogeneous) state to a bright (twisted planar) state and an amplitude of 10 vpp and a frequency of 8 kHz (at which $\Delta\epsilon$ of TX2A becomes negative) for switching in the reverse direction.

[0091] Results of a viewing angle measurement similar to that employed in the first embodiment show that the liquid crystal display device of the present embodiment provides a highly uniform display and a wide viewing angle as in the case of the first embodiment.

[0092] Next, a fourth embodiment of the present invention will be described.

[0093] A liquid crystal display device according to the fourth embodiment was fabricated in a manner similar to that of the third embodiment, except that a pair of parallel plate electrodes were added to the substrates SUB1 and SUB2, as shown in FIG. 9.

[0094] Each of the parallel plate electrodes is formed of an ITO transparent electrode and is connected to a drive circuit which applies AC voltage V2 to the parallel plate electrodes.

[0095] The liquid crystal display device of the present embodiment has an electro-optic property and viewing angle substantially identical with those of the third embodiment. However, refreshing display for simultaneously bringing the plurality of pixels from a bright state to a dark state could be effected through application of AC voltage (4 kHz, 20 Vpp) to the added parallel plate electrodes.

[0096] Next, a fifth embodiment of the present invention will be described.

[0097] A liquid crystal display device according to the fifth embodiment was fabricated in a manner similar to that of the third embodiment, except that a light reflection plate REF was disposed on a lower surface of the substrate SUB1, and a $\lambda/4$ plate QP was disposed on an upper surface of the substrate SUB1, as shown in FIG. 10, and the cell gap was halved to 3.2 μm ; and that stress which a probe applied to the alignment layer AL1 during scanning in the two scanning directions SCN1A and SCN1B was adjusted in order to provide two liquid-crystal easy alignment axes ALD1A and ALD2A which form an angle of 45° therebetween.

[0098] In the present embodiment, the direction of the delay axis of the $\lambda/4$ plate QP is set to form an angle of about 45° with the transmission axis of the polarization plate POL2, so that the easy alignment axis ALD1A of the alignment layer AL1 becomes parallel to ALD2, and the easy alignment axis ALD1B of the alignment layer AL1 rotates by 45° from ALD2.

[0099] By virtue of the above-described configuration of the alignment layer AL1, two stable alignment states of the liquid crystal layer in the present embodiment become equivalent to those obtained by twisting the state shown in FIG. 5(b) by 45°. As in the case of the transmission type configuration of FIG. 5, the liquid crystal layer becomes dark when uniformly aligned and bright when brought into a twisted planar state (45°).

[0100] The liquid crystal display device of the present embodiment has an electro-optic property and viewing angle substantially identical with those of the third embodiment. However, the optical property is obtained as a reflection coefficient, not a transmission coefficient.

[0101] Next, a sixth embodiment of the present invention will be described.

[0102] A liquid crystal display device according to the sixth embodiment was fabricated in a manner similar to that of the first embodiment, except that as in the case of the substrate SUB2 side, the surface of the polyimide film formed on the substrate SUB1 was rubbed by use of buff cloth attached to a rubbing roller along a direction of 45° with respect to the x-axis direction of the coordinate system of FIG. 1, to thereby impart liquid-crystal alignment capability to the alignment film to have a single easy alignment axis.

[0103] Subsequently, the entirety of the rubbed area was uniformly scanned by use of an apparatus having a basic structure similar to that of an AFM, as in the case of the first embodiment. Specifically, by use of a probe made of Si_3N_4 or Si and having a tip end sharpened to an atomic level, which has been adjusted to impart stress of 20 to 30 nN to the film surface, a stress generation line pattern was formed on the film surface along a direction of 45° with respect to the y-axis of the coordinate system of FIG. 1.

[0104] Over the entirety of the thus treated area, rubbing treatment and AFM scanning treatment were performed successively, while changing the rubbing direction and the scanning direction by 90°, to thereby obtain the alignment layer AL1. The thus-formed alignment layer AL1 had two easy alignment axes in the ALD1A and ALD1B directions, which correspond to the x-axis and y-axis directions in the coordinate system of FIG. 1, as in the case of the first

embodiment. The liquid crystal display device of the present embodiment has an electro-optic property and viewing angle substantially identical with those of the first embodiment.

[0105] Next, a seventh embodiment of the present invention will be described.

[0106] A liquid crystal display device according to the seventh embodiment was fabricated in a manner similar to that of the second embodiment in which the surface of the photosensitive film formed on the surface of one substrate as an alignment film was scanned by use of ultraviolet rays. However, in the present embodiment, light from the ultraviolet source was converted to linearly polarized ultraviolet light by use of a polarization device utilizing a Brewster angle; and the polarized ultraviolet light was irradiated onto the alignment layer twice via two photomasks having the same square checkerboard pattern as that used in the first and second embodiments.

[0107] Specifically, as in the second embodiment, a mixture of diamine compounds containing equimolar amounts of 4,4'-diaminodiphenylmethane and a compound of Formula 1 having a diazobenzen group was treated with an acid anhydride of pyromellitic dianhydride and/or 1,2,3,4-cyclobutanetetracarboxylic acid, to thereby form a mixture of polyamic acids. After being applied to the substrate surface, the mixture of polyamic acids was fired at 200°C for 30 minutes to thereby be imidized. Subsequently, the polarized ultraviolet light was radiated twice, the direction of linear polarization having been rotated 90°, in such a manner that portions corresponding to the black areas of the checkerboard pattern of the photo masks were irradiated with the polarized ultraviolet light in the first stage, and portions corresponding to the white areas of the checkerboard pattern of the photo masks were irradiated with the polarized ultraviolet light in the second stage.

[0108] The polarized ultraviolet light was radiated onto the alignment layer perpendicular to the substrate surface, whereby the pre-tilt angle of the given liquid crystal alignment was made substantially zero. In place of the compound of Formula 1, compounds represented by Formula 2 and Formula 3 may be used as a photosensitive material. The liquid crystal display device of the present embodiment has an electro-optic property and viewing angle substantially identical with those of the second embodiment.

[0109] Next, an eighth embodiment of the present invention will be described.

[0110] A liquid crystal display device according to the present embodiment was fabricated in a manner similar to that of the seventh embodiment, except that polarized ultraviolet light was radiated twice onto each of the photosensitive films (alignment layers) formed on the two substrates sandwiching the liquid crystal via two photomasks having the same square checkerboard pattern as that used in the seventh embodiment, while the intensity of the polarized ultraviolet light was changed between the first and second irradiation operations, whereby resultant two easy alignment axes of the alignment layer formed an angle of 45° as in the case of the fifth embodiment, and that no chiral dopant material was added.

[0111] Switching of the liquid crystal display device of the present embodiment is performed in the following manner. Since an alignment layer which realizes an energetically stable state in two alignment directions is disposed on both the substrates, in-plane switching (switching angle: 45°) occurs in each of the two substrate interfaces. The alignment layers and the two polarization plates disposed in a crossed Nicol relation with the alignment layers enable display by the birefringence optical mode between homogeneous states in different in-plane orientations.

[0112] The liquid crystal display device of the present embodiment has an electrooptic property and viewing angle substantially identical with those of the seventh embodiment. However, the liquid crystal display device of the present embodiment differs from that of the seventh embodiment in that the optical property is obtained as a coefficient of transmission by the birefringence optical mode.

[0113] Next, a ninth embodiment of the present invention will be described.

[0114] A liquid crystal display device according to the present embodiment was fabricated in a manner similar to that of the seventh embodiment, except for the following. When linearly polarized ultraviolet light was radiated onto the surface of the photosensitive film formed on the surface of one substrate as an alignment film was scanned by use of ultraviolet rays, three photomasks having a honeycomb pattern as shown in FIG. 11 were used, and the polarized ultraviolet light was radiated onto the alignment layer three times, while the direction of linear polarization was rotated by 60° each time. Further, three pairs of comb-like electrodes were formed on the substrate SUB1 to form an angle of 60° therebetween, and a drive circuit was provided for each pair. Moreover, a phase plate having properly adjusted optical properties was disposed immediately before the polarization plate on the outgoing side.

[0115] FIGS. 11(b), 11(c), and 11(d) show the three photomasks of the honeycomb pattern and polarization directions of the linearly polarized ultraviolet light corresponding thereto.

[0116] Switching of the liquid crystal display device of the present embodiment is performed in the following manner. An alignment layer which realizes an energetically stable state in three alignment directions having an inter-direction angle of 60° is disposed on one substrate. Therefore, in-plane switching (switching angle: 60°, 120°) occurs when proper drive voltages are applied to the three pairs of interdigitated electrodes.

[0117] Accordingly, as the entire liquid cell, three states; i.e., a homogeneous state (twist angle: 0°), a 60°-twisted state, and a 120°-twisted state, can be memorized.

[0118] Further, when the optical properties of the phase plate were adjusted in order to cause the display to become black in the homogeneous state and white in the 120°-twisted state, three gradations, including an intermediate gradation

in the 60°-twisted state, were obtained.

[0119] As described in detail, embodiments of the present invention can provide a liquid crystal display device which utilizes nematic liquid crystal and which can attain both wide viewing angle and low power consumption by virtue of the memory effect.

INDUSTRIAL APPLICABILITY

[0120] The liquid crystal display device of embodiments of the present invention can be applied to electronic devices having display units, and is particularly suitable for portable information terminals, because of wide viewing angle and low power consumption by virtue of the memory effect.

Claims

1. A liquid crystal display device comprising:

a pair of substrates (SUB1,SUB2), at least one of which (SUB1,SUB2) is transparent;
a group of electrodes (EL1,EL2) arranged on one of or both of the substrates (SUB1,SUB2) and adapted to apply an electric field to a nematic type liquid crystal layer (LCL) disposed between the substrates (SUB1,SUB2) when a drive voltage (V1,V2) is applied to the electrodes (EL1,EL2), to allow in-plane switching of the liquid crystal layer (LCL), the electric field having a component substantially parallel to the surfaces of the substrates (SUB1 ,SUB2); and
an alignment layer (AL1) disposed between the liquid crystal layer (LCL) and the same one of or both substrates (SUB1,SUB2)

characterised in that

the alignment layer (AL1) has been subjected to alignment layer treatment in two directions to create two liquid crystal anchoring directions, between which the liquid crystal anchoring force does not differ greatly and in at least one of which the pre-tilt angle with respect to the corresponding substrate surface is substantially zero, wherein the liquid crystal anchoring directions form substantially equal angles relative to one another on the corresponding substrate surface (SUB1,SUB2), so that the liquid crystal layer (LCL) is provided with a memory effect in which liquid crystal alignment remains energetically stable in a first and a second alignment state after the drive voltage (V1,V2) has been removed from the electrodes (EL1,EL2); wherein
the group of electrodes (EL1,EL2) comprises a first and a second pair of electrodes (EL1A,EL1B,EL2A,EL2B) and the drive voltage comprises a first and second drive voltage (V1,V2), wherein the first pair of electrodes (EL1A,EL1B) is arranged to provide a different electric field orientation to that provided by the second pair of electrodes (EL2A,EL2B), such that on applying the first drive voltage (V1) to the first pair of electrodes (EL1 A,EL1 B) a first electric field is produced which causes the liquid crystal layer (LCL) to align with the first alignment state and on applying the second drive voltage (V2) to the second pair of electrodes (EL2A,EL2B) a second electric field is produced which causes the liquid crystal layer (LCL) to align with the second alignment state.

2. A liquid crystal display device according to claim 1, wherein the two liquid crystal anchoring directions are at an angle of substantially 90° relative to one another.

3. A liquid crystal display device comprising:

a pair of substrates (SUB1,SUB2), at least one of which (SUB1,SUB2) is transparent;
a group of electrodes arranged on one of or both of the substrates (SUB1,SUB2) and adapted to apply an electric field to a nematic type liquid crystal layer (LCL) disposed between the substrates (SUB1,SUB2) when a drive voltage is applied to the electrodes, to allow in-plane switching of the liquid crystal layer (LCL), the electric field having a component substantially parallel to the surfaces of the substrates (SUB1 ,SUB2); and
an alignment layer (AL1) disposed between the liquid crystal layer (LCL) and the same one of or both substrates (SUB1, SUB2)

characterised in that

the alignment layer (AL1) has been subjected to alignment layer treatment in three directions to create three liquid crystal anchoring directions, between which the liquid crystal anchoring force does not differ greatly and in all of which the pre-tilt angle with respect to the corresponding substrate surface is substantially zero, wherein the liquid crystal anchoring directions form substantially equal angles relative to one another on the corresponding substrate surface (SUB1,SUB2), so that the liquid crystal layer (LCL) is provided with a memory effect in which

liquid crystal alignment remains energetically stable in a first, a second and a third alignment state after the drive voltage has been removed from the electrodes; wherein the group of electrodes comprises a first, a second and a third pair of electrodes and the drive voltage comprises a first, a second and a third drive voltage, wherein the first, second and third pairs of electrodes are arranged to provide different electric field orientations to one another, such that on applying the first drive voltage to the first pair of electrodes a first electric field is produced which causes the liquid crystal layer (LCL) to align with the first alignment state, on applying the second drive voltage to the second pair of electrodes a second electric field is produced which causes the liquid crystal layer (LCL) to align with the second alignment state, and on applying the third drive voltage to the third pair of electrodes a third electric field is produced which causes the liquid crystal layer (LCL) to align with the third alignment state.

4. A liquid crystal display device according to any one of the preceding claims, wherein in addition to the group of electrodes (EL1,EL2) formed on one of the pair of substrates (SUB1) for applying to the liquid crystal layer (LCL) an electric field having a component substantially parallel to the surfaces of the substrates (SUB1,SUB2), an additional electrode (E2LB) is disposed on each of the substrates in such a manner that these additional electrodes form an electrode pair.

5. A liquid crystal display device comprising:

a pair of substrates (SUB1,SUB2), at least one of which (SUB1,SUB2) is transparent;
a group of electrodes arranged on one of or both of the substrates (SUB1,SUB2) and adapted to apply an electric field to a nematic type liquid crystal layer (LCL) disposed between the substrates (SUB1,SUB2) when a drive voltage (V1) is applied to the electrode, to allow in-plane switching of the liquid crystal layer (LCL), the electric field having a component substantially parallel to the surfaces of the substrates (SUB1 ,SUB2); and
an alignment layer (AL1) disposed between the liquid crystal layer (LCL) and the same one of or both substrates (SUB1,SUB2)

characterised in that

the alignment layer (AL1) has been subjected to alignment layer treatment in two directions to create two liquid crystal anchoring directions, between which the liquid crystal anchoring force does not differ greatly and in at least one of which the pre-tilt angle with respect to the corresponding substrate surface is substantially zero, wherein the liquid crystal anchoring directions form substantially equal angles relative to one another on the corresponding substrate surface (SUB1,SUB2), so that the liquid crystal layer (LCL) is provided with a memory effect in which liquid crystal alignment remains energetically stable in a first and a second alignment state after the drive voltage (V1) has been removed from the electrode; wherein the group of electrodes comprises a pair of electrodes (EL1A,EL1 B), the drive voltage (V1) is a two-frequency drive voltage, and the liquid crystal layer (LCL) is formed of a liquid crystal material whose dielectric anisotropy ($\Delta\epsilon$) becomes positive or negative depending on the frequency of an applied AC electric field, such that on applying the drive voltage (V1) at a first frequency to the electrodes (EL1A,EL1B) a first electric field is produced which causes the liquid crystal layer (LCL) to align with the first alignment state and on applying the drive voltage (V1) at the second frequency to the electrodes (EL1A,EL1B) a second electric field is produced which causes the liquid crystal layer (LCL) to align with the second alignment state.

6. A liquid crystal display device according to any one of the preceding claims, wherein the alignment layer has been treated such that an entire target area of the alignment layer has been divided into plural sub-areas corresponding to the two or three alignment treatment directions, such that in each sub-area an alignment treatment has been performed in the corresponding alignment treatment direction.
7. A liquid crystal display device according to any one of the preceding claims, wherein the alignment layer has been treated with at least one of the alignment layer treatments in the two or three directions which was a process for irradiating the alignment layer (AL1) with linearly polarized light that caused a chemical reaction on the surface of the corresponding substrate (SUB1,SUB2).
8. A liquid crystal display device according to any one of claims 1 to 6, wherein the alignment layer has been treated with at least one of the alignment layer treatments in the two or three directions which was a process for scanning the alignment layer (AL1) with a probe that imparted stress to the surface of the corresponding substrate (SUB1 ,SUB2).

9. A liquid crystal display device according to any one of claims 1 to 6, wherein the alignment layer has been treated with at least one of the alignment layer treatments in the two or three directions which was a process for scanning the alignment layer (AL1) with light that caused a chemical reaction on the surface of the corresponding substrate (SUB1, SUB2).
10. A liquid crystal display device according to any one of the preceding claims, wherein the liquid crystal layer (LCL) comprises a liquid crystal material which contains chiral molecules as a component.
11. A liquid crystal display device according to any one of the preceding claims, wherein a light reflection plate (REF) is disposed on one of the pair of substrates (SUB1).

Patentansprüche

1. Flüssigkristallanzeige umfassend:

ein Paar von Substraten (SUB1, SUB2), von welchen mindestens eines (SUB1, SUB2) transparent ist;
 eine Gruppe von Elektroden (EL1, EL2), die auf einem oder beiden der Substrate (SUB1, SUB2) angeordnet und ausgelegt sind, um ein elektrisches Feld an eine zwischen den Substraten (SUB1, SUB2) befindliche nematische Flüssigkristallschicht (LCL) anzulegen, wenn eine Steuerspannung (V1, V2) an die Elektroden (EL1, EL2) angelegt ist, um das Schalten der Flüssigkristallschicht (LCL) in der Ebene zu erlauben, wobei das elektrische Feld eine Komponente aufweist, die im Wesentlichen parallel zu den Oberflächen des Substrats (SUB1, SUB2) ist; und
 eine Ausrichtungsschicht (AL1), die sich zwischen der Flüssigkristallschicht (LCL) und demselben einen oder beiden der Substrate (SUB1, SUB2) befindet, **dadurch gekennzeichnet, dass** die Ausrichtungsschicht (AL1) einer Ausrichtungsschichtbehandlung in zwei Richtungen unterzogen worden ist, um zwei Flüssigkristallverankerungsrichtungen zu erzeugen, zwischen welchen die Flüssigkristallverankerungskraft nicht wesentlich differiert und in mindestens einer von welchen der Vorneigungswinkel mit Bezug auf die korrespondierende Substratoberfläche im Wesentlichen null ist, worin die Flüssigkristallverankerungsrichtungen im Wesentlichen gleiche Winkel relativ zueinander auf der korrespondierenden Substratoberfläche (SUB1, SUB2) bilden, sodass die Flüssigkristallschicht (LCL) mit einem Gedächtniseffekt ausgestattet ist, wobei die Flüssigkristallausrichtung in einem ersten und einem zweiten Ausrichtungszustand, nachdem die Steuerspannung (V1, V2) von den Elektroden (EL1, EL2) weggenommen worden ist, energetisch stabil bleibt; worin
 die Gruppe von Elektroden (EL1, EL2) ein erstes und ein zweites Paar von Elektroden (EL1A, EL1 B, EL2A, EL2B) umfasst und die Steuerspannung eine erste und zweite Steuerspannung (V1, V2) umfasst, worin das erste Paar von Elektroden (EL1A, EL1 B) angeordnet ist, um eine andere elektrische Feldorientierung als die vom zweiten Paar von Elektroden (EL2A, EL2B) bereitgestellte so bereitzustellen, dass beim Anlegen der ersten Steuerspannung (V1) an das erste Paar von Elektroden (EL1A, EL1 B) ein erstes elektrisches Feld erzeugt wird, welches das Ausrichten der Flüssigkristallschicht (LCL) mit dem ersten Ausrichtungszustand bewirkt, und beim Anlegen der zweiten Steuerspannung (V2) an das zweite Paar von Elektroden (EL2A, EL2B) ein zweites elektrisches Feld erzeugt wird, welches das Ausrichten der Flüssigkristallschicht (LCL) mit dem zweiten Ausrichtungszustand bewirkt.

2. Flüssigkristallanzeige nach Anspruch 1, worin die zwei Flüssigkristallverankerungsrichtungen unter einem Winkel von im Wesentlichen 90 ° relativ zueinander sind.

3. Flüssigkristallanzeige umfassend:

ein Paar von Substraten (SUB1, SUB2), von welchen mindestens eines (SUB1, SUB2) transparent ist;
 eine Gruppe von Elektroden, die auf einem oder beiden der Substrate (SUB1, SUB2) angeordnet und ausgelegt sind, um ein elektrisches Feld an eine zwischen den Substraten (SUB1, SUB2) befindliche nematische Flüssigkristallschicht (LCL) anzulegen, wenn eine Steuerspannung an die Elektroden angelegt ist, um das Schalten der Flüssigkristallschicht (LCL) in der Ebene zu erlauben, wobei das elektrische Feld eine Komponente aufweist, die im Wesentlichen parallel zu den Oberflächen des Substrats (SUB1, SUB2) ist; und
 eine Ausrichtungsschicht (AL1), die sich zwischen der Flüssigkristallschicht (LCL) und demselben einen oder beiden der Substrate (SUB1, SUB2) befindet, **dadurch gekennzeichnet, dass** die Ausrichtungsschicht (AL1) einer Ausrichtungsschichtbehandlung in drei Richtungen unterzogen worden ist, um drei Flüssigkristallverankerungsrichtungen zu erzeugen, zwischen welchen die Flüssigkristallverankerungskraft nicht wesentlich diffe-

riert und in allen von welchen der Vorneigungswinkel mit Bezug auf die korrespondierende Substratoberfläche im Wesentlichen null ist, worin die Flüssigkristallverankerungsrichtungen im Wesentlichen gleiche Winkel relativ zueinander auf der korrespondierenden Substratoberfläche (SUB1, SUB2) bilden, sodass die Flüssigkristallschicht (LCL) mit einem Gedächtniseffekt ausgestattet ist, wobei die Flüssigkristallausrichtung in einem ersten, einem zweiten und einem dritten Ausrichtungszustand, nachdem die Steuerspannung von den Elektroden

weggenommen worden ist, energetisch stabil bleibt; worin die Gruppe von Elektroden ein erstes, ein zweites und ein drittes Paar von Elektroden umfasst und die Steuerspannung eine erste, eine zweite und eine dritte Steuerspannung umfasst, worin das erste, das zweite und das dritte Paar von Elektroden angeordnet sind, um verschiedene elektrische Feldorientierungen zueinander so bereitzustellen, dass beim Anlegen der ersten Steuerspannung an das erste Paar von Elektroden ein erstes elektrisches Feld erzeugt wird, welches das Ausrichten der Flüssigkristallschicht (LCL) mit dem ersten Ausrichtungszustand bewirkt, beim Anlegen der zweiten Steuerspannung an das zweite Paar von Elektroden ein zweites elektrisches Feld erzeugt wird, welches das Ausrichten der Flüssigkristallschicht (LCL) mit dem zweiten Ausrichtungszustand bewirkt, und beim Anlegen der dritten Steuerspannung an das dritte Paar von Elektroden ein drittes elektrisches Feld erzeugt wird, welches das Ausrichten der Flüssigkristallschicht (LCL) mit dem dritten Ausrichtungszustand bewirkt.

4. Flüssigkristallanzeige nach irgendeinem vorhergehenden Anspruch, worin, zusätzlich zu der Gruppe von Elektroden (EL1, EL2), die auf einem des Paares von Substraten (SUB1) zum Anlegen an die Flüssigkristallschicht (LCL) eines elektrischen Felds aufweisend eine Komponente im Wesentlichen parallel zu den Oberflächen der Substrate (SUB1, SUB2) gebildet sind, eine zusätzliche Elektrode (E2LB) auf jedem der Substrate derart befindlich ist, dass diese zusätzlichen Elektroden ein Elektrodenpaar bilden.

5. Flüssigkristallanzeige umfassend:

ein Paar von Substraten (SUB1, SUB2), von welchen mindestens eines (SUB1, SUB2) transparent ist; eine Gruppe von Elektroden, die auf einem oder beiden der Substrate (SUB1, SUB2) angeordnet und ausgelegt sind, um ein elektrisches Feld an eine zwischen den Substraten (SUB1, SUB2) befindliche nematische Flüssigkristallschicht (LCL) anzulegen, wenn eine Steuerspannung (V1) an die Elektrode angelegt ist, um das Schalten der Flüssigkristallschicht (LCL) in der Ebene zu erlauben, wobei das elektrische Feld eine Komponente aufweist, die im Wesentlichen parallel zu den Oberflächen des Substrats (SUB1, SUB2) ist; und

eine Ausrichtungsschicht (AL1), die sich zwischen der Flüssigkristallschicht (LCL) und demselben einen oder beiden der Substrate (SUB1, SUB2) befindet, **dadurch gekennzeichnet, dass** die Ausrichtungsschicht (AL1) einer Ausrichtungsschichtbehandlung in zwei Richtungen unterzogen worden ist, um zwei Flüssigkristallverankerungsrichtungen zu erzeugen, zwischen welchen die Flüssigkristallverankerungskraft nicht wesentlich differiert und in mindestens einer von welchen der Vorneigungswinkel mit Bezug auf die korrespondierende Substratoberfläche im Wesentlichen null ist, worin die Flüssigkristallverankerungsrichtungen im Wesentlichen gleiche Winkel relativ zueinander auf der korrespondierenden Substratoberfläche (SUB1, SUB2) bilden, sodass die Flüssigkristallschicht (LCL) mit einem Gedächtniseffekt ausgestattet ist, wobei die Flüssigkristallausrichtung in einem ersten und einem zweiten Ausrichtungszustand, nachdem die Steuerspannung (V1) von der Elektrode weggenommen worden ist, energetisch stabil bleibt; worin

die Gruppe von Elektroden ein Paar von Elektroden (EL1A, EL1 B) umfasst, die Steuerspannung (V1) eine Zwei-Frequenz-Steuerspannung ist, und die Flüssigkristallschicht (LCL) aus einem Flüssigkristallmaterial gebildet ist, dessen dielektrische Anisotropie (AE) je nach der Frequenz eines angelegten elektrischen Wechselstromfelds positiv oder negativ wird, sodass beim Anlegen der Steuerspannung (V1) mit einer ersten Frequenz an die Elektroden (EL1A, EL1 B) ein erstes elektrisches Feld erzeugt wird, welches das Ausrichten der Flüssigkristallschicht (LCL) mit dem ersten Ausrichtungszustand bewirkt, und beim Anlegen der Steuerspannung (V1) mit der zweiten Frequenz an die Elektroden (EL1A, EL1 B) ein zweites elektrisches Feld erzeugt wird, welches das Ausrichten der Flüssigkristallschicht (LCL) mit dem zweiten Ausrichtungszustand bewirkt.

6. Flüssigkristallanzeige nach irgendeinem vorhergehenden Anspruch, worin die Ausrichtungsschicht so behandelt worden ist, dass ein gesamter Zielbereich der Ausrichtungsschicht in mehrere Unterbereiche entsprechend den zwei oder drei Ausrichtungsbehandlungsrichtungen aufgeteilt worden ist, sodass in jedem Unterbereich eine Ausrichtungsbehandlung in der korrespondierenden Ausrichtungsbehandlungsrichtung durchgeführt worden ist.

7. Flüssigkristallanzeige nach irgendeinem vorhergehenden Anspruch, worin die Ausrichtungsschicht mit mindestens einer der Ausrichtungsschichtbehandlungen in den zwei oder drei Richtungen behandelt worden ist, wobei es sich

um ein Verfahren zum Bestrahlen der Ausrichtungsschicht (AL1) mit linear polarisiertem Licht handelte, das eine chemische Reaktion auf der Oberfläche des korrespondierenden Substrats (SUB1, SUB2) verursachte.

8. Flüssigkristallanzeige nach irgendeinem Anspruch 1 bis 6, worin die Ausrichtungsschicht mit mindestens einer der Ausrichtungsschichtbehandlungen in den zwei oder drei Richtungen behandelt worden ist, wobei es sich um ein Verfahren zum Abtasten der Ausrichtungsschicht (AL1) mit einer Sonde handelte, das die Oberfläche des korrespondierenden Substrats (SUB1, SUB2) einer Beanspruchung aussetzte.
9. Flüssigkristallanzeige nach irgendeinem Anspruch 1 bis 6, worin die Ausrichtungsschicht mit mindestens einer der Ausrichtungsschichtbehandlungen in den zwei oder drei Richtungen behandelt worden ist, wobei es sich um ein Verfahren zum Abtasten der Ausrichtungsschicht (AL1) mit Licht handelte, das eine chemische Reaktion auf der Oberfläche des korrespondierenden Substrats (SUB1, SUB2) verursachte.
10. Flüssigkristallanzeige nach irgendeinem vorhergehenden Anspruch, worin die Flüssigkristallschicht (LCL) ein Flüssigkristallmaterial umfasst, welches chirale Moleküle als Komponente enthält.
11. Flüssigkristallanzeige nach irgendeinem vorhergehenden Anspruch, worin eine Lichtreflexionsplatte (REF) auf einem der Paare von Substraten (SUB1) befindlich ist.

Revendications

1. Dispositif d'affichage à cristaux liquides, comprenant :

une paire de substrats (SUB1, SUB2), dont au moins un des deux (SUB1, SUB2) est transparent ;
 un groupe d'électrodes (EL1, EL2) sur l'un des deux ou sur les deux substrats (SUB1, SUB2), et conçu pour appliquer un champ électrique à une couche de cristaux liquides (LCL) de type nématique disposée entre les substrats (SUB1, SUB2) quand une tension de commande (V1, V2) est appliquée aux électrodes (EL1, EL2) pour permettre la commutation dans le plan de la couche de cristaux liquides (LCL), le champ électrique ayant une composante essentiellement parallèle aux surfaces des substrats (SUB1, SUB2) ; et
 une couche d'alignement (AL1) disposée entre la couche de cristaux liquides (LCL) et l'un identique des deux ou les deux substrats (SUB1, SUB2), la couche d'alignement (AL1) étant **caractérisée en ce qu'elle** a été soumise à un traitement de couche d'alignement dans deux directions afin de créer deux directions d'ancrage des cristaux liquides, entre lesquelles la force d'ancrage des cristaux liquides ne diffère pas beaucoup, et dans au moins l'une desquelles l'angle de pré-basculement par rapport à la surface de substrat correspondante est essentiellement égal à zéro, les directions d'ancrage des cristaux liquides formant des angles pratiquement égaux l'un par rapport à l'autre sur la surface de substrat correspondante (SUB1, SUB2), de sorte que la couche de cristaux liquides (LCL) bénéficie d'un effet de mémoire dans lequel l'alignement des cristaux liquides reste énergétiquement stable dans un premier et un deuxième état d'alignement après la suppression de la tension de commande (V1, V2) des électrodes (EL1, EL2) ; dans lequel
 le groupe d'électrodes (EL1, EL2) comprend une première et une deuxième paire d'électrodes (EL1A, EL1 B, EL2A, EL2B), et la tension de commande comprend une première et une deuxième tension de commande (V1, V2), la première paire d'électrodes (EL1 A, EL1 B) étant disposée de manière à fournir une orientation de champ électrique différente de celle fournie par la deuxième paire d'électrodes (EL2A, EL2B), de sorte qu'à l'application de la première tension de commande (V1) à la première paire d'électrodes (EL1A, EL1 B), un premier champ électrique soit produit et provoque l'alignement de la couche de cristaux liquides (LCL) avec le premier état d'alignement, et de sorte qu'à l'application de la deuxième tension de commande (V2) à la deuxième paire d'électrodes (EL2A, EL2B), un deuxième champ électrique soit produit et provoque l'alignement de la couche de cristaux liquides (LCL) avec le deuxième état d'alignement.

2. Dispositif d'affichage à cristaux liquides selon la revendication 1, dans lequel les deux directions d'ancrage des cristaux liquides sont à un angle de pratiquement 90° l'une par rapport à l'autre.

3. Dispositif d'affichage à cristaux liquides, comprenant :

une paire de substrats (SUB1, SUB2), dont au moins un des deux (SUB1, SUB2) est transparent ;
 un groupe d'électrodes sur l'un des deux ou sur les deux substrats (SUB1, SUB2), et conçu pour appliquer un champ électrique à une couche de cristaux liquides (LCL) de type nématique disposée entre les substrats

(SUB1, SUB2) quand une tension de commande est appliquée aux électrodes pour permettre la commutation dans le plan de la couche de cristaux liquides (LCL), le champ électrique ayant une composante essentiellement parallèle aux surfaces des substrats (SUB1, SUB2) ; et

une couche d'alignement (AL1) disposée entre la couche de cristaux liquides (LCL) et l'un identique des deux ou les deux substrats (SUB1, SUB2), la couche d'alignement (AL1) étant **caractérisée en ce qu'elle** a été soumise à un traitement de couche d'alignement dans trois directions afin de créer trois directions d'ancrage des cristaux liquides, entre lesquelles la force d'ancrage des cristaux liquides ne diffère pas beaucoup, et dans toutes lesquelles l'angle de pré-basculement par rapport à la surface de substrat correspondante est essentiellement égal à zéro, les directions d'ancrage des cristaux liquides formant des angles pratiquement égaux l'un par rapport à l'autre sur la surface de substrat correspondante (SUB1, SUB2), de sorte que la couche de cristaux liquides (LCL) bénéficie d'un effet de mémoire dans lequel l'alignement des cristaux liquides reste énergétiquement stable dans un premier, un deuxième et un troisième état d'alignement après la suppression de la tension de commande des électrodes ; dans lequel

le groupe d'électrodes comprend une première, une deuxième et une troisième paire d'électrodes, et la tension de commande comprend une première, une deuxième et une troisième tension de commande, la première, la deuxième et la troisième paire d'électrodes étant disposées de manière à fournir des orientations de champ électrique différentes les unes des autres, de sorte qu'à l'application de la première tension de commande à la première paire d'électrodes, un premier champ électrique soit produit et provoque l'alignement de la couche de cristaux liquides (LCL) avec le premier état d'alignement, de sorte qu'à l'application de la deuxième tension de commande à la deuxième paire d'électrodes, un deuxième champ électrique soit produit et provoque l'alignement de la couche de cristaux liquides (LCL) avec le deuxième état d'alignement, et de sorte qu'à l'application de la troisième tension de commande à la troisième paire d'électrodes, un troisième champ électrique soit produit et provoque l'alignement de la couche de cristaux liquides (LCL) avec le troisième état d'alignement.

4. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications précédentes, dans lequel en plus du groupe d'électrodes (EL1, EL2) formé sur l'un des deux substrats (SUB1) pour appliquer à la couche de cristaux liquides (LCL) un champ électrique ayant une composante essentiellement parallèle aux surfaces des substrats (SUB1, SUB2), une électrode supplémentaire (E2LB) est disposée sur chacun des substrats de sorte que ces électrodes supplémentaires forment une paire d'électrodes.

5. Dispositif d'affichage à cristaux liquides, comprenant :

une paire de substrats (SUB1, SUB2), dont au moins un des deux (SUB1, SUB2) est transparent ;

un groupe d'électrodes sur l'un des deux ou sur les deux substrats (SUB1, SUB2), et conçu pour appliquer un champ électrique à une couche de cristaux liquides (LCL) de type nématique disposée entre les substrats (SUB1, SUB2) quand une tension de commande (V1) est appliquée à l'électrode pour permettre la commutation dans le plan de la couche de cristaux liquides (LCL), le champ électrique ayant une composante essentiellement parallèle aux surfaces des substrats (SUB1, SUB2) ; et

une couche d'alignement (AL1) disposée entre la couche de cristaux liquides (LCL) et l'un identique des deux ou les deux substrats (SUB1, SUB2), la couche d'alignement (AL1) étant **caractérisée en ce qu'elle** a été soumise à un traitement de couche d'alignement dans deux directions afin de créer deux directions d'ancrage des cristaux liquides, entre lesquelles la force d'ancrage des cristaux liquides ne diffère pas beaucoup, et dans au moins l'une desquelles l'angle de pré-basculement par rapport à la surface de substrat correspondante est essentiellement égal à zéro, les directions d'ancrage des cristaux liquides formant des angles pratiquement égaux l'un par rapport à l'autre sur la surface de substrat correspondante (SUB1, SUB2), de sorte que la couche de cristaux liquides (LCL) bénéficie d'un effet de mémoire dans lequel l'alignement des cristaux liquides reste énergétiquement stable dans un premier et un deuxième état d'alignement après la suppression de la tension de commande (V1) de l'électrode ; dans lequel


le groupe d'électrodes comprend une paire d'électrodes (EL1A, EL1 B), la tension de commande (V1) est une tension de commande à deux fréquences, et la couche de cristaux liquides (LCL) est constituée d'un matériau à cristaux liquides dont l'anisotropie diélectrique (Ae) devient positive ou négative selon la fréquence d'un champ électrique CA appliqué, de sorte qu'à l'application de la tension de commande (V1) à une première fréquence aux électrodes (EL1A, EL1 B), un premier champ électrique soit produit et provoque l'alignement de la couche de cristaux liquides (LCL) avec le premier état d'alignement, et de sorte qu'à l'application de la tension de commande (V1) à la deuxième fréquence aux électrodes (EL1A, EL1 B), un deuxième champ électrique soit produit et provoque l'alignement de la couche de cristaux liquides (LCL) avec le deuxième état d'alignement.

6. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications précédentes, dans lequel la


couche d'alignement a été traitée de sorte qu'une zone cible entière de la couche d'alignement ait été divisée en plusieurs sous-zones correspondant aux deux ou trois directions de traitement d'alignement, de sorte que dans chaque sous-zone, un traitement d'alignement ait été réalisé dans la direction de traitement d'alignement correspondante.

- 5
7. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications précédentes, dans lequel la couche d'alignement a été traitée avec au moins l'un des traitements de couche d'alignement dans les deux ou trois directions, consistant en un procédé d'irradiation de la couche d'alignement (AL1) avec une lumière polarisée linéairement qui provoquait une réaction chimique sur la surface du substrat correspondant (SUB1, SUB2).
- 10
8. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 6, dans lequel la couche d'alignement a été traitée avec au moins l'un des traitements de couche d'alignement dans les deux ou trois directions, consistant en un procédé d'analyse de la couche d'alignement (AL1) avec une sonde qui appliquait une contrainte à la surface du substrat correspondant (SUB1, SUB2).
- 15
9. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 6, dans lequel la couche d'alignement a été traitée avec au moins l'un des traitements de couche d'alignement dans les deux ou trois directions, consistant en un procédé d'analyse de la couche d'alignement (AL1) avec une lumière qui provoquait une réaction chimique sur la surface du substrat correspondant (SUB1, SUB2).
- 20
10. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications précédentes, dans lequel la couche de cristaux liquides (LCL) comprend un matériau à cristaux liquides contenant des molécules chirales sous forme d'un composant.
- 25
11. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications précédentes, dans lequel une plaque de réflexion de lumière (REF) est disposée sur l'une des paires de substrats (SUB1).
- 30
- 35
- 40
- 45
- 50
- 55


FIG. 1

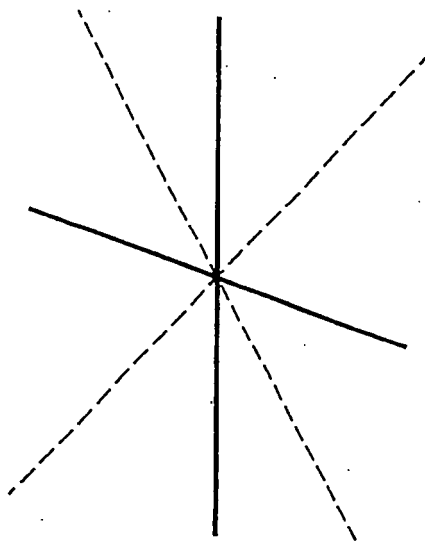


(a)

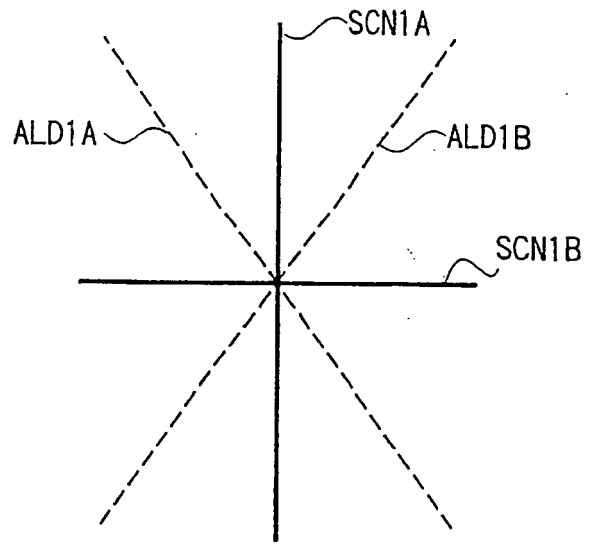

(b)

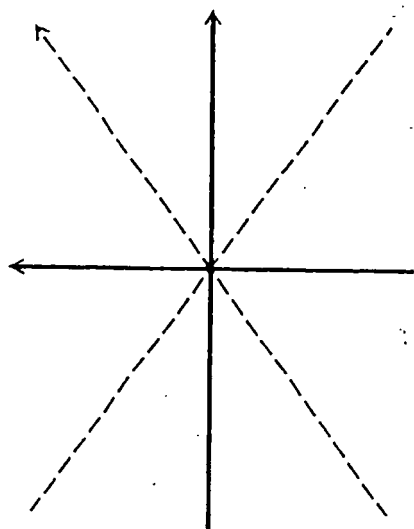

(c)

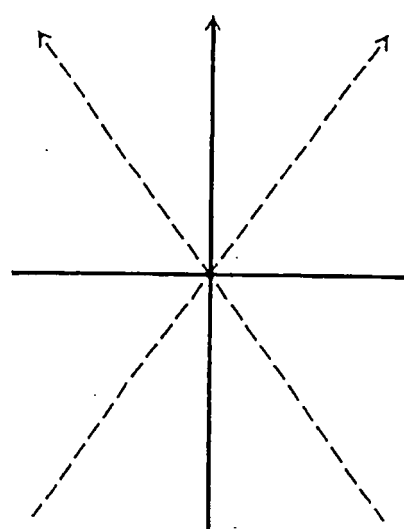

(d)

FIG. 2

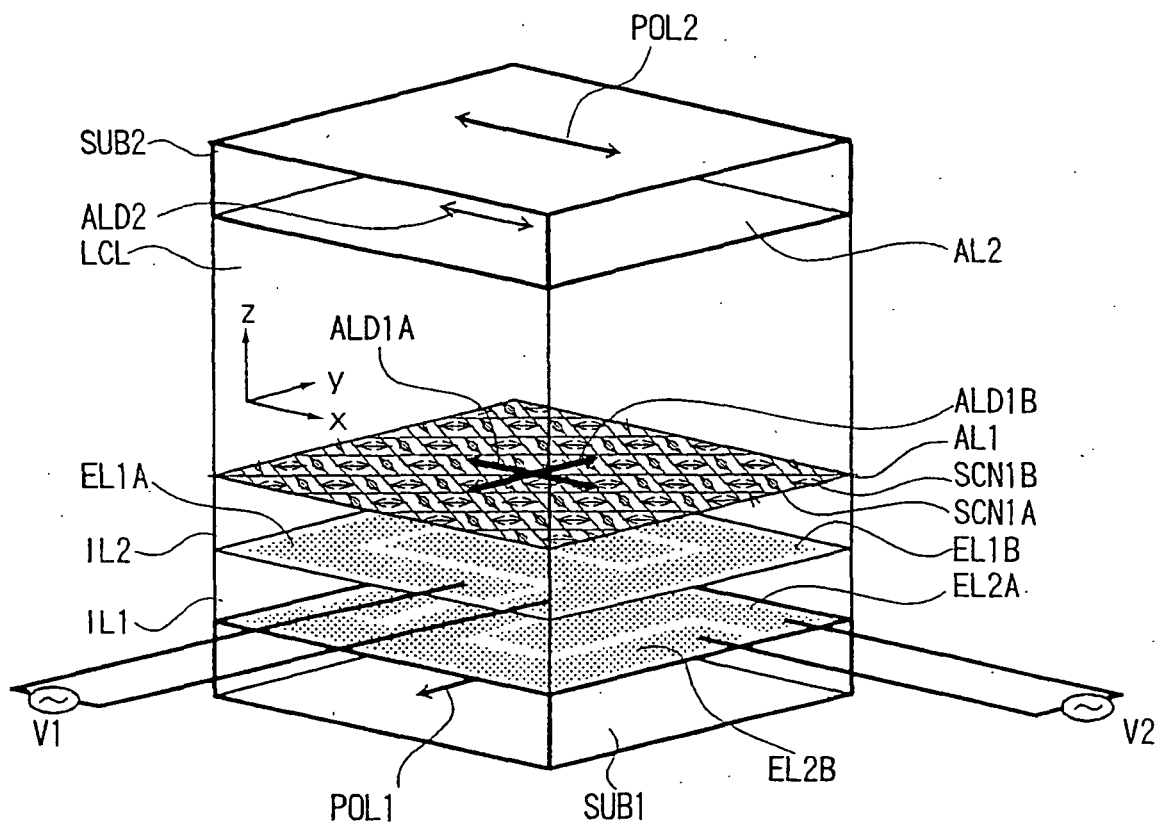


FIG. 3

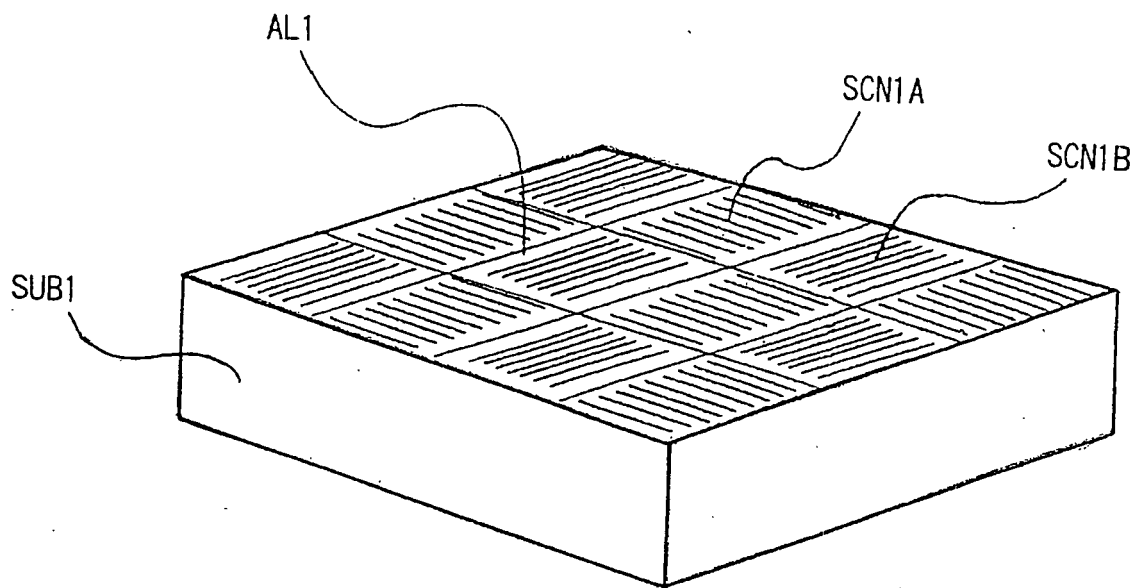


FIG. 4


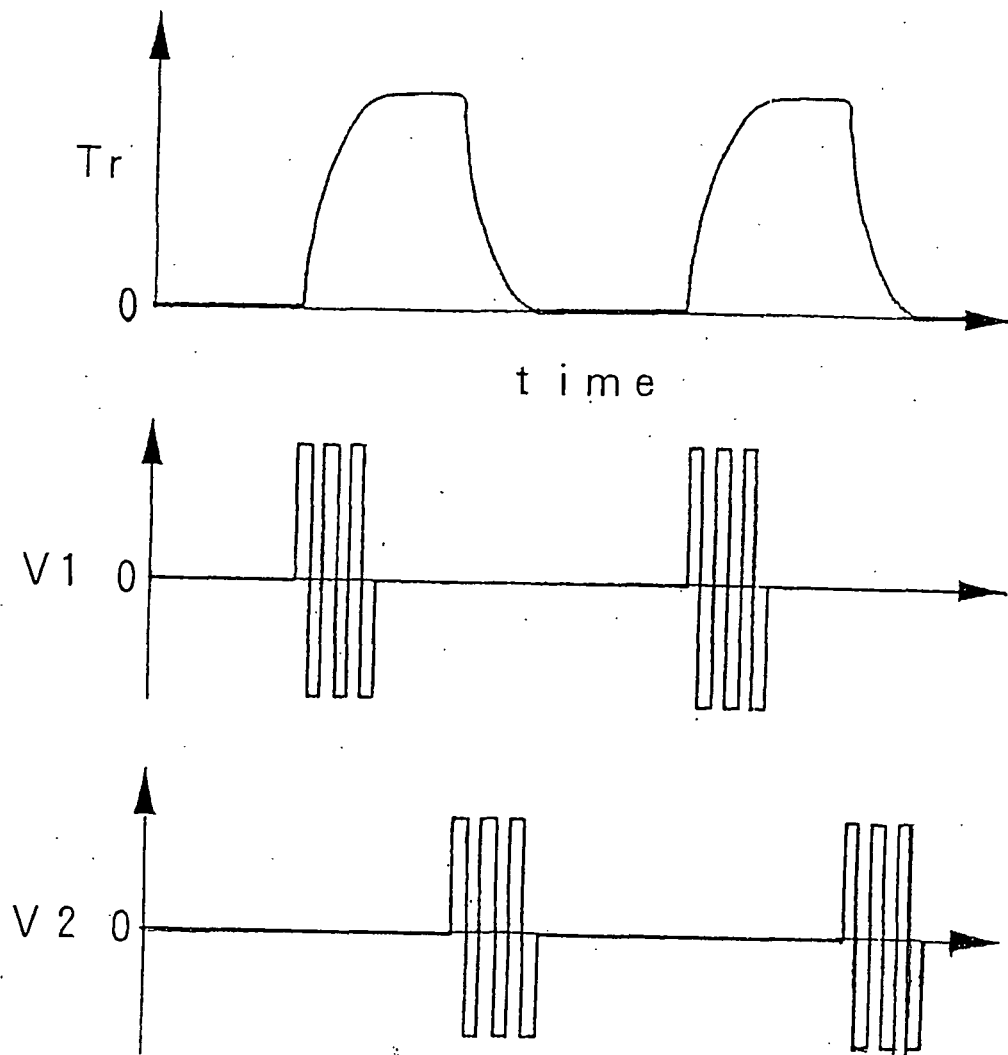


FIG. 5

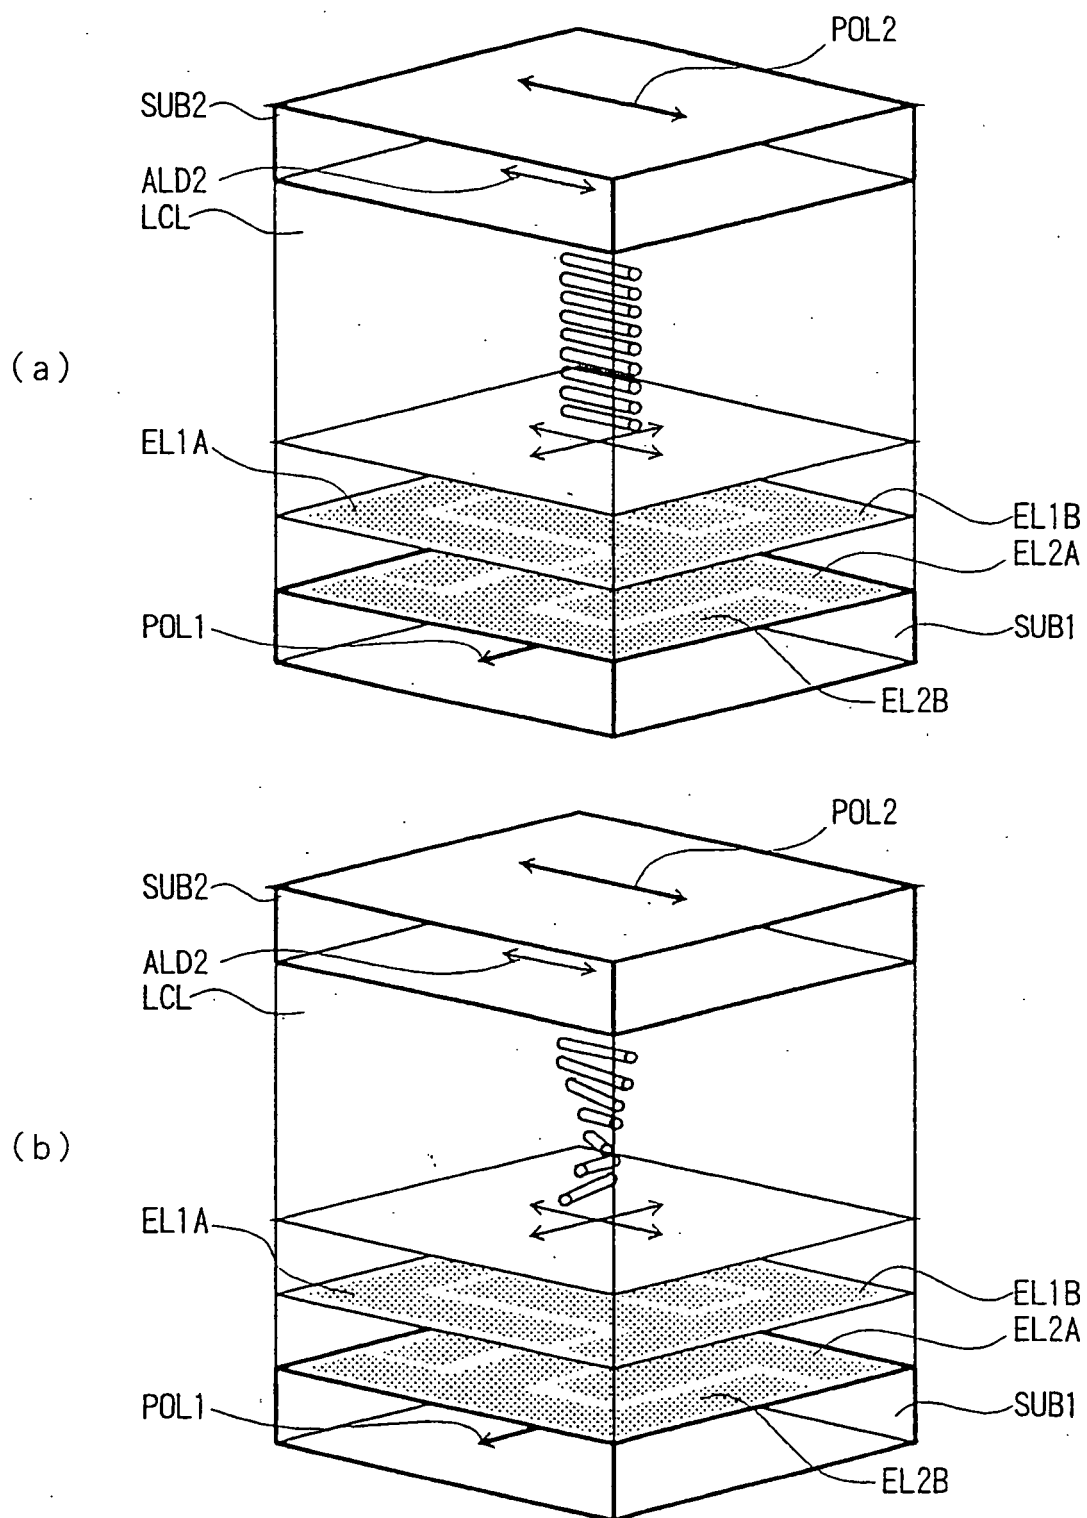

F I G. 6


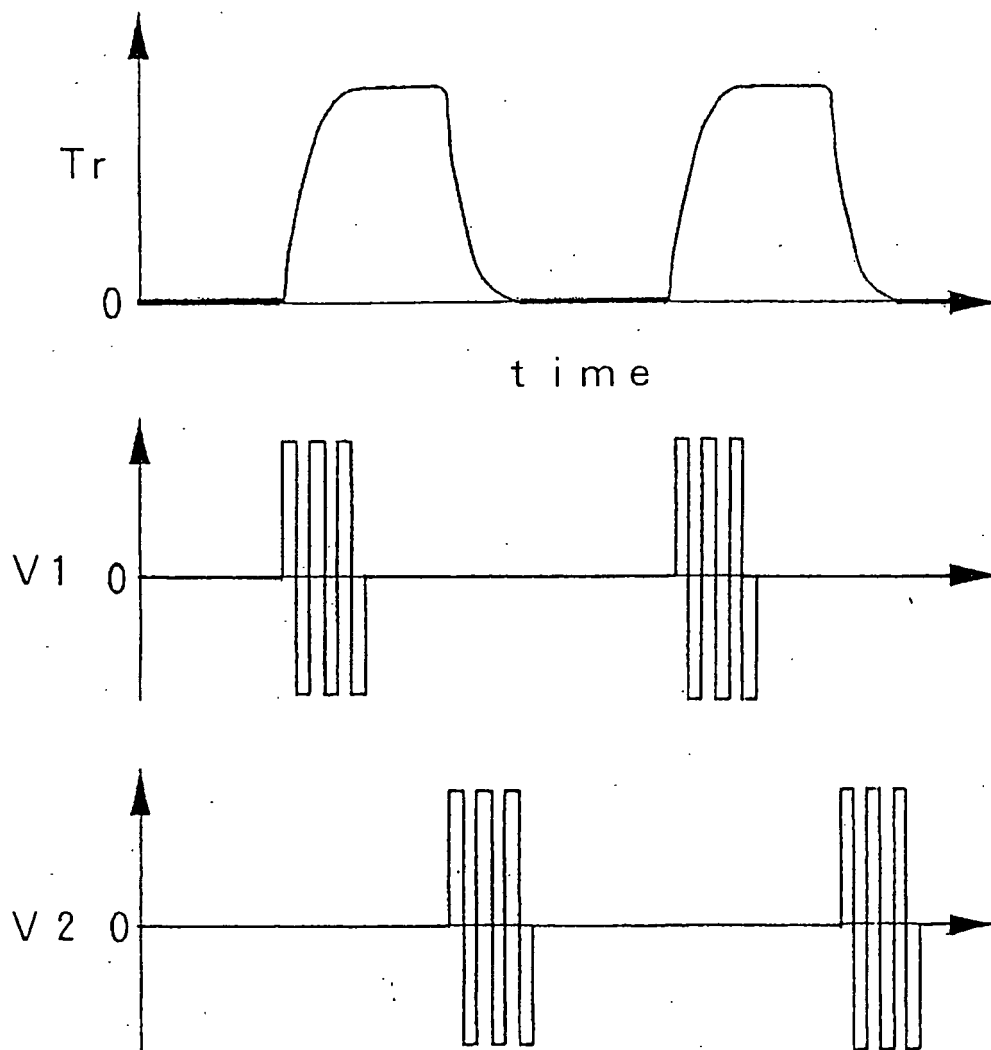


FIG. 7

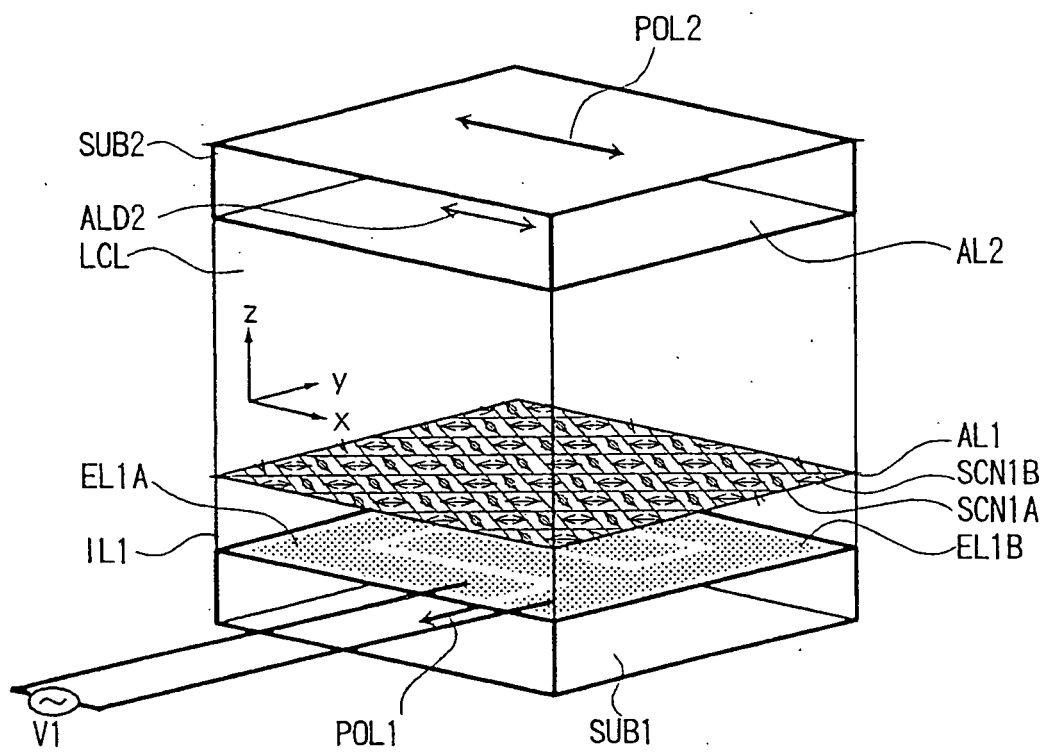

F I G. 8

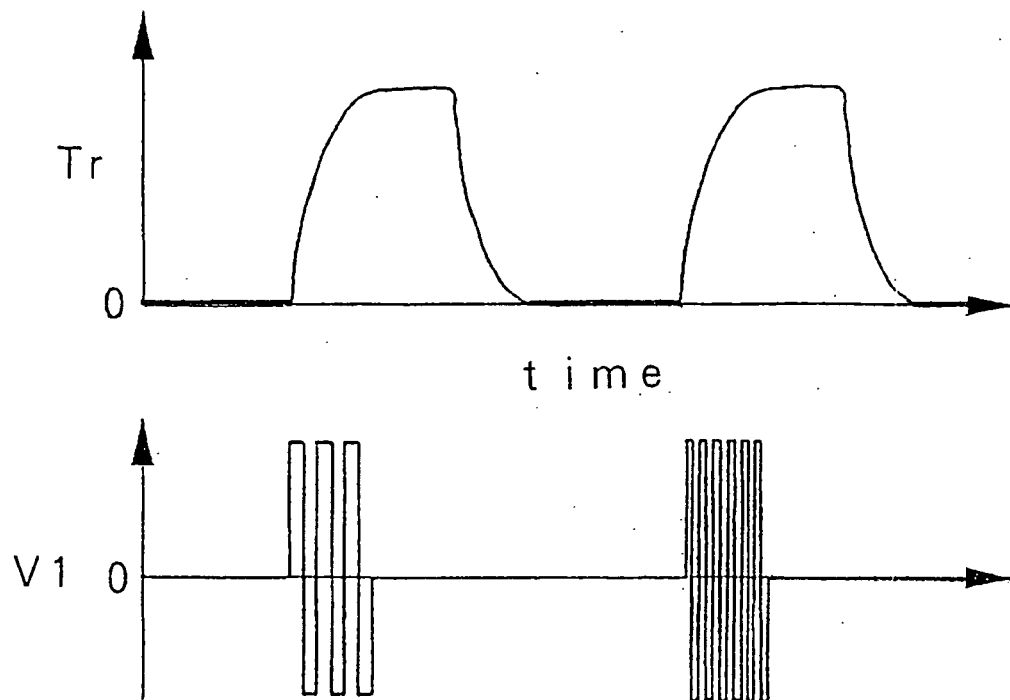


FIG. 9

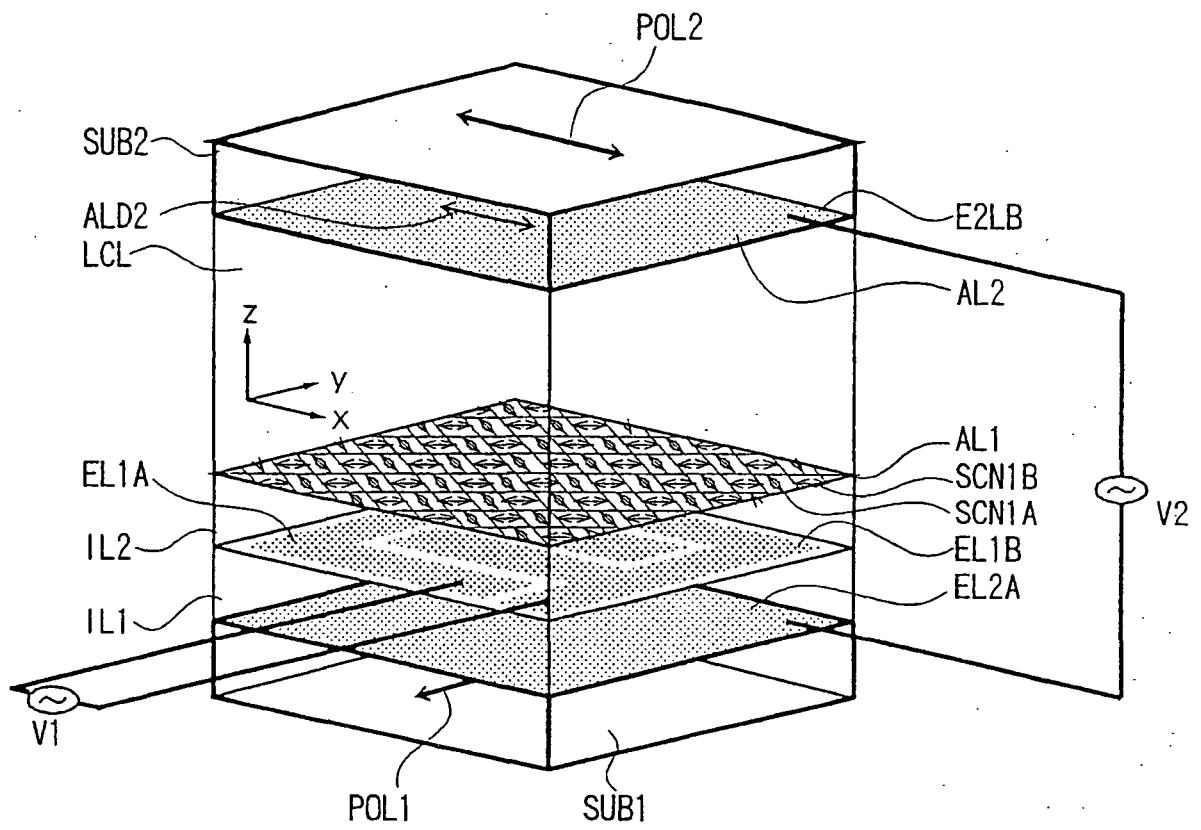


FIG. 10



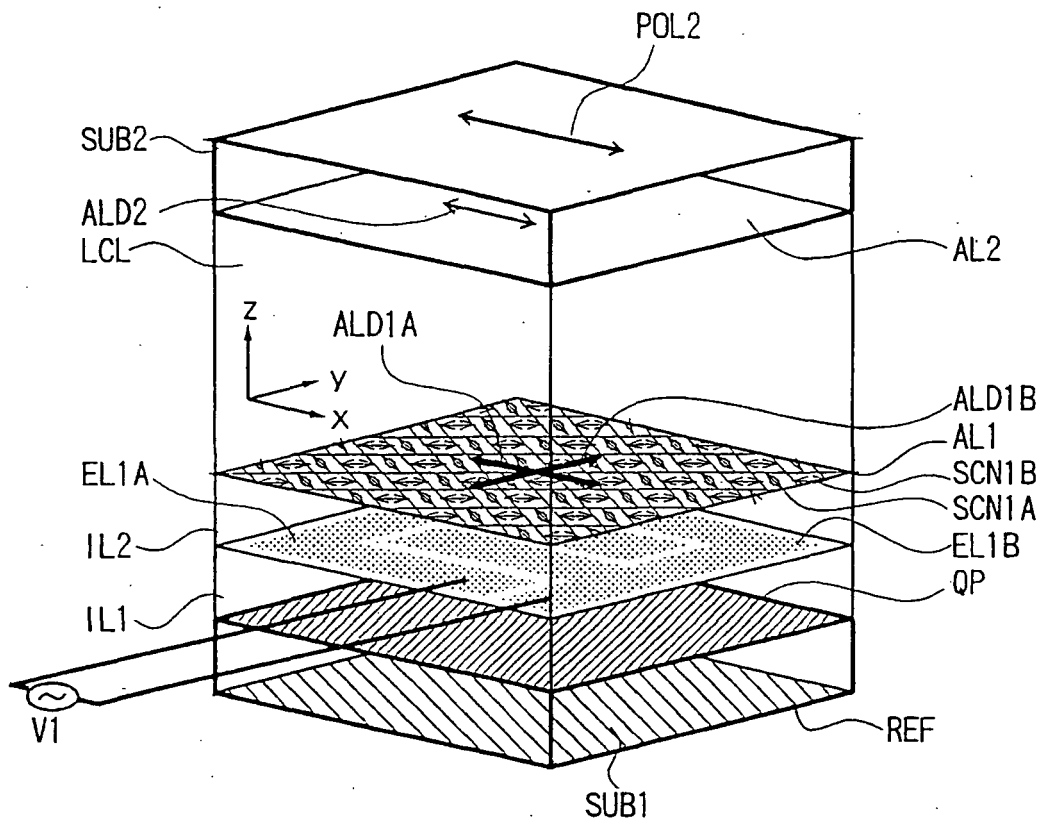


FIG. 11


(a)

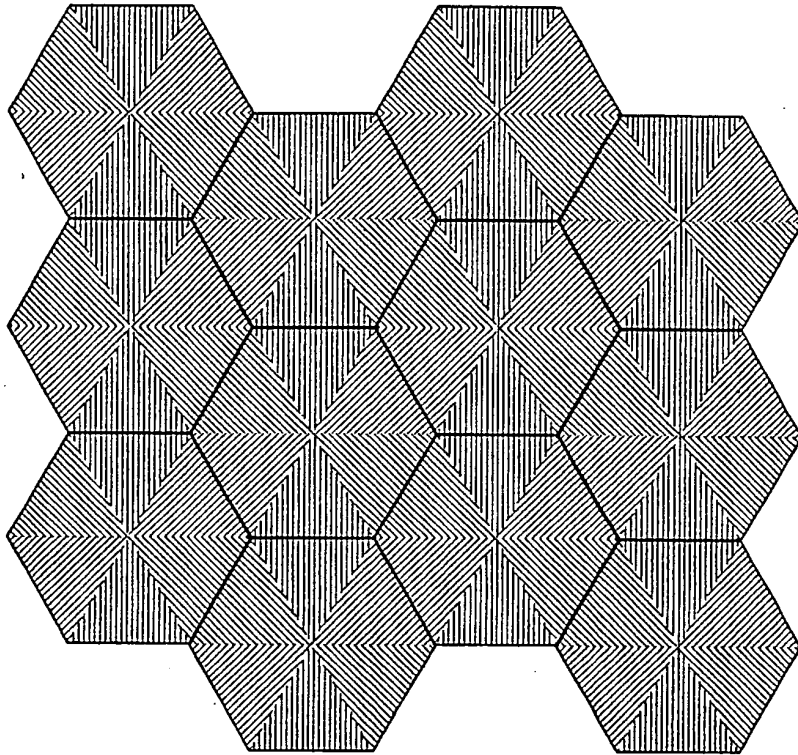


(b)

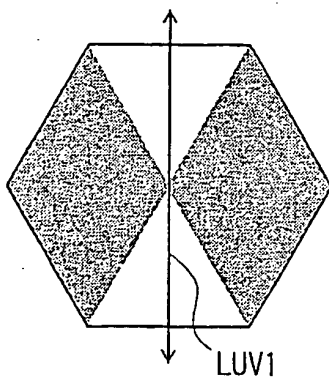

(c)

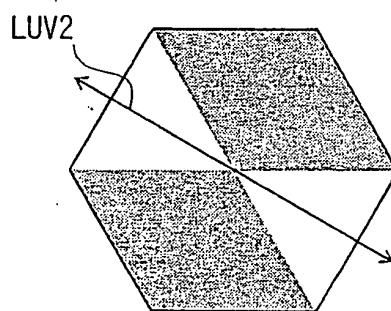

(d)

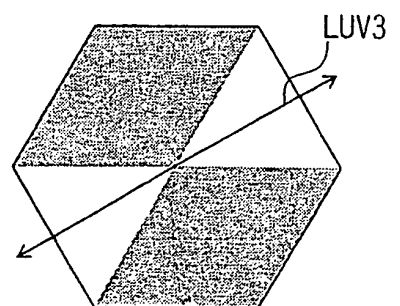

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 56107216 A [0007]
- JP 5138091999 W [0007]
- WO 9850821 A [0008]
- GB 2330214 A [0009]
- JP 10307295 B [0011]

Non-patent literature cited in the description

- *Applied Physics Letters*, 1980, vol. 36, 899 [0007]
- **DURAND, G.** Field induced surface anchoring transitions and nematic bistable displays. *Proceedings of the SPIE*, 1997, vol. 2949, 2-10 [0010]

专利名称(译)	具有记忆效应的向列型液晶显示器		
公开(公告)号	EP1300720B1	公开(公告)日	2016-03-16
申请号	EP2001947920	申请日	2001-07-09
[标]申请(专利权)人(译)	独立行政法人科学技术振兴机构		
申请(专利权)人(译)	日本科学技术振兴事业团		
当前申请(专利权)人(译)	日本科学技术振兴机构		
[标]发明人	YONEYA MAKOTO KIM JONG HYUN YOKOYAMA HIROSHI YAMAMOTO JUN		
发明人	YONEYA, MAKOTO KIM, JONG-HYUN YOKOYAMA, HIROSHI YAMAMOTO, JUN		
IPC分类号	G02F1/1337 G02F1/1343 G02F1/139		
CPC分类号	G02F1/133753 G02F1/134363 G02F1/1391 G02F1/1392 G02F2001/133749 G02F2001/133757		
代理机构(译)	HOARTON , LLOYD DOUGLAS CHARLES		
优先权	2000213040 2000-07-13 JP 2001066435 2001-03-09 JP		
其他公开文献	EP1300720A4 EP1300720A1		
外部链接	Espacenet		

摘要(译)

本发明的目的在于提供一种利用向列液晶的高分辨率，宽视野角，低功耗的液晶显示装置，能够兼顾记忆效应和广视野角显示特性。液晶显示装置使用向列液晶，并且包括一对透明基板（SUB1，SUB2）；用于向设置在所述一对基板（SUB1，SUB2）之间的液晶层（LCL）施加具有基本上平行于所述基板的表面的分量的电场的一组电极；以及配向层，设置在所述液晶层（LCL）和所述一对基板（SUB1，SUB2）中的至少一个之间，并且已经在多个方向上进行了液晶锚定处理。取向层的多个液晶捕获方向相对于彼此形成大致相等的角度，并且每个液晶捕获方向相对于对应的基板表面的升起角度基本上为零。

Formula 1

