

(19)



(11)

EP 1 729 631 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
07.01.2015 Bulletin 2015/02

(51) Int Cl.:
A61B 5/00 (2006.01)

(21) Application number: **05724861.9**

(86) International application number:
PCT/US2005/007406

(22) Date of filing: **07.03.2005**

(87) International publication number:
WO 2005/087095 (22.09.2005 Gazette 2005/38)

(54) SELECTION OF ENSEMBLE AVERAGING WEIGHTS FOR A PULSE OXIMETER BASED ON SIGNAL QUALITY METRICS

WAHL VON ENSEMBLE-DURCHSCHNITTSGEWICHTEN FÜR EINEN PULSOXIMETER AUF BASIS VON SIGNALQUALITÄTSMETRIK

SELECTION DE PONDERATIONS DE MOYENNAGE D'ENSEMBLES POUR SPHYGMO-OXYMETRE SUR LA BASE DES MESURES DE LA QUALITE DES SIGNAUX

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR

(74) Representative: **Gibbs, Richard et al**
Marks & Clerk LLP
Atholl Exchange
6 Canning Street
Edinburgh EH3 8EG (GB)

(30) Priority: **08.03.2004 US 796559**

(43) Date of publication of application:
13.12.2006 Bulletin 2006/50

(56) References cited:
US-A- 4 960 126 US-A- 5 743 263
US-A1- 2002 137 994 US-A1- 2003 009 091

(60) Divisional application:
10012712.5 / 2 260 758

(73) Proprietor: **Covidien LP**
Mansfield, MA 02048 (US)

- [Online] Retrieved from the Internet: <URL:http://web.archive.org/web/20070308234_554/http://www.stanford.edu/~rsasaki/EEAP24_8/slide1.pdf> [retrieved on 2008-09-25]
- [Online] Retrieved from the Internet: <URL:http://web.archive.org/web/20070108094_155/http://www.stanford.edu/~rsasaki/EEAP24_8/outline.html> [retrieved on 2008-09-25]
- "ISBN 0-87779-201-2", 1986, MERRIAM-WEBSTER INC, SPRINGFIELD MA USA

(72) Inventor: **BAKER JR, Clark, R.**
Castro Valley, CA 94546 (US)

EP 1 729 631 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a method and device for ensemble averaging signals in a pulse oximeter, in particular to the selection of ensemble averaging weights used for ensemble averaging of signals that include detected waveforms from a pulse oximeter.

[0002] A pulse oximeter is typically used to measure various blood characteristics including the blood oxygen saturation of hemoglobin in arterial blood and the pulse rate of the patient. Measurement of these characteristics has been accomplished by use of a non-invasive sensor that passes light through a portion of a patient's blood perfused tissue and photo-electrically senses the absorption and scattering of light in such tissue. The amount of light absorbed and scattered is then used to estimate the amount of blood constituent in the tissue using various algorithms known in the art. The "pulse" in pulse oximetry comes from the time varying amount of arterial blood in the tissue during a cardiac cycle. The signal processed from the sensed optical measurement is the familiar plethysmographic waveform, which corresponds with the cyclic attenuation of optical energy through a portion of a patient's blood perfused tissue.

[0003] Ensemble averaging, which is a temporal averaging scheme, involves the use of weighting factors. In a pulse oximeter, ensemble averaging is used to calculate a weighted average of new samples and previous ensemble-averaged samples from one pulse-period earlier. Weights selected and/or used for ensemble averaging have a significant effect on the ensemble averaging process. Such weights may be uniformly selected, or they may be based on the characteristics of the signals that are being ensemble averaged. For example, the Conlon U.S. Patent No. 4,690,126 discloses ensemble averaging where different weights are assigned to different pulses and a composite, averaged pulse waveform is used to calculate oxygen saturation. Conlon's signal metrics for adjusting ensemble-averaging weights are based on a measure of the degree of motion artifact, a measure of the degree of low perfusion (*e.g.*, pulse amplitude below a threshold), and pulse rate.

[0004] US 2002/137994 A1 discloses a method for reducing the effects of noise on a system for measuring physiological parameters taking into account the physical limitations on various physiological parameters being monitored when weighting and averaging a series of measurements.

[0005] US2003/0009091 A1 discloses weight averaging of saturated oxygen values and pulse rate data.

[0006] US 5,473,263 discloses ensemble averaging of photoplethysmographic signals.

[0007] It is desirable to provide a more flexible and more robust methodology for the selection of ensemble averaging weights used for ensemble averaging of signals that include detected waveforms from a pulse oximeter.

[0008] The present invention relates to a method and device according to claims 1 and 10, respectively. It is an object of the present invention to provide for a method of ensemble averaging signals for a pulse oximeter and a respective pulse oximeter. This object can be achieved by the features as defined in the independent claims. Further enhancements are characterized in the dependent claims. The present invention is directed to the selection of ensemble averaging weights used for ensemble averaging of signals that correspond with detected waveforms from a pulse oximeter. The selection of ensemble averaging weights are based on one or more or a combination of various signal quality metrics or indicators.

[0009] In one aspect, the selection of ensemble averaging weights involves an assessment and use of various signal quality indicators, where the selecting of weights includes forming a combination of one or more of the following signal quality parameters, namely: a measure of the degree of arrhythmia of the signals; a measure of the degree of similarity or correlation between the first and second electromagnetic radiation signals; a measure of the degree of motion artifact by obtaining a ratio of a current pulse amplitude to the long-term average pulse amplitude of the signals; a ratio of a current pulse amplitude to the previous pulse amplitude of the signal; and a ratio of a current pulse period to that of an average pulse period of the signals.

[0010] For a fuller understanding of the nature and advantages of the embodiments of the present invention, reference should be made to the following detailed description taken in conjunction with the accompanying drawings.

Fig. 1 is a block diagram of an exemplary oximeter.

Fig. 2 is a block diagram of the signal processing architecture of a pulse oximeter in accordance with one embodiment of the present invention.

[0011] The methods and systems in accordance with the embodiments of the present invention are directed towards the selection of ensemble averaging weights used for ensemble averaging of signals that correspond with detected waveforms from a pulse oximeter. The selection of ensemble averaging weights are based on one or more or a combination of various signal quality metrics or indicators. The embodiments of the present invention are particularly applicable to and will be explained by reference to measurements of oxygen saturation of hemoglobin in arterial blood and pulse or heart rate, as in pulse oximeter monitors and pulse oximetry sensors. However, it should be realized that the embodiments of the present invention are equally applicable to any generalized patient monitor and associated patient sensor, such as ECG, blood pressure, etc., and are thus also applicable to non oximetry or pulse oximetry devices.

[0012] A typical pulse oximeter measures two physiological parameters, percent oxygen saturation of arterial blood hemoglobin (SpO_2 or sat) and pulse rate. Oxygen saturation can be estimated using various techniques. In one common technique, the photocurrent generated by the photo-detector is conditioned and processed to determine the ratio of modulation ratios (ratio of ratios) of the red to infrared (IR) signals. This modulation ratio has been observed to correlate well to arterial oxygen saturation. Pulse oximeters and sensors may be empirically calibrated by measuring the modulation ratio over a range of in vivo measured arterial oxygen saturations (SaO_2) on a set of patients, healthy volunteers, or animals. The observed correlation is used in an inverse manner to estimate blood oxygen saturation (SpO_2) based on the measured value of modulation ratios of a patient. The estimation of oxygen saturation using modulation ratios is described in U.S. Patent No. 5,853,364, entitled "METHOD AND APPARATUS FOR ESTIMATING PHYSIOLOGICAL PARAMETERS USING MODEL-BASED ADAPTIVE FILTERING," issued December 29, 1998, and U.S. Patent No. 4,911,167, entitled "METHOD AND APPARATUS FOR DETECTING OPTICAL PULSES," issued March 27, 1990. The relationship between oxygen saturation and modulation ratio is described, for example, in U.S. Patent No. 5,645,059, entitled "MEDICAL SENSOR WITH MODULATED ENCODING SCHEME," issued July 8, 1997. Most pulse oximeters extract the plethysmographic signal having first determined saturation or pulse rate, both of which are susceptible to interference.

[0013] Fig. 1 is a block diagram of one embodiment of a pulse oximeter that may be configured to implement the embodiments of the present invention. The embodiments of the present invention may be implemented as a data processing algorithm that is executed by the microprocessor 122, described below. Light from light source 110 passes into a blood perfused tissue 112, and is scattered and detected by photodetector 114. A sensor 100 containing the light source and photodetector may also contain an encoder 116 which provides signals indicative of the wavelength of light source 110 to allow the oximeter to select appropriate calibration coefficients for calculating oxygen saturation. Encoder 116 may, for instance, be a resistor.

[0014] Sensor 100 is connected to a pulse oximeter 120. The oximeter includes a microprocessor 122 connected to an internal bus 124. Also connected to the bus is a RAM memory 126 and a display 128. A time processing unit (TPU) 130 provides timing control signals to light drive circuitry 132 which controls when light source 110 is illuminated, and if multiple light sources are used, the multiplexed timing for the different light sources. TPU 130 also controls the gating-in of signals from photodetector 114 through an amplifier 133 and a switching circuit 134. These signals are sampled at the proper time, depending upon which of multiple light sources is illuminated, if multiple light sources are used. The received signal is passed through an amplifier 136, a low pass filter 138, and an analog-to-digital converter 140. The digital data is then stored in a queued serial module (QSM) 142, for later downloading to RAM 126 as QSM 142 fills up. There may be multiple parallel paths of separate amplifier, filter and A/D converters for multiple light wavelengths or spectra received.

[0015] Based on the value of the received signals corresponding to the light received by photodetector 114, microprocessor 122 will calculate the oxygen saturation using various algorithms. These algorithms require coefficients, which may be empirically determined, corresponding to, for example, the wavelengths of light used. These are stored in a ROM 146. In a two-wavelength system, the particular set of coefficients chosen for any pair of wavelength spectra is determined by the value indicated by encoder 116 corresponding to a particular light source in a particular sensor 100. Multiply resistor values may be assigned to select different sets of coefficients. Alternatively, the same resistors are used to select from among the coefficients appropriate for an infrared source paired with either a near red source or far red source. The selection between whether the near red or far red set will be chosen can be selected with a control input from control inputs 154. Control inputs 154 may be, for instance, a switch on the pulse oximeter, a keyboard, or a port providing instructions from a remote host computer. Furthermore, any number of methods or algorithms may be used to determine a patient's pulse rate, oxygen saturation or any other desired physiological parameter.

[0016] The brief description of an exemplary pulse oximeter set forth above, serves as a basis for describing the methods for adjusting ensemble averaging weights for an ensemble averager, which are described below, in conjunction with Fig. 2.

[0017] The embodiments of the present invention may be implemented as a part of a larger signal processing system used to process optical signals for the purposes of operating a pulse oximeter. Such a signal processing system is shown in Fig. 2, which is a block diagram 200 of a signal processing architecture of a pulse oximeter in accordance with one embodiment of the present invention. The signal processing architecture 200 in accordance with the embodiments of the present invention may be implemented as a software algorithm that is executed by a processor of a pulse oximeter. In addition to calculating oxygen saturation and pulse rate, the system 200 measures various signal metrics that are used to determine filter weighting coefficients. Signal metrics are things that indicate if a pulse is likely a plethysmograph or noise. Signal metrics may be related to, for example, frequency (is it in the range of a human heart rate), shape (is it shaped like a cardiac pulse), rise time, etc. The system shown in Fig. 2 calculates both the oxygen saturation, and the pulse rate. The system 200 is also used for detecting venous pulsation and sensor off and lost pulse conditions, which are described separately below.

I. Oxygen Saturation Calculation

[0018] Block 202 represents the operation of the Signal Conditioning block. The digitized red and IR signals or waveforms are received and are conditioned in this block by: (1) taking the 1st derivative to get rid of baseline shift, (2) low pass filtering with fixed coefficients, and (3) dividing by a DC value to preserve the ratio. The function of the Signal Conditioning subsystem is to emphasize the higher frequencies that occur in the human plethysmograph and to attenuate low frequencies in which motion artifact is usually concentrated. The Signal Conditioning subsystem selects its filter coefficients (wide or narrow band) based on hardware characteristics identified during initialization. Inputs to block 202 are digitized red and IR signals, and its outputs are pre-processed red and IR signals.

[0019] Block 204 represents the operation of the Pulse Identification and Qualification block. The low pass filtered digitized red and IR signals are provided to this block to identify pulses, and qualify them as likely arterial pulses. This is done using a pre-trained neural net, and is primarily done on the IR signal. The pulse is identified by examining its amplitude, shape and frequency. An input to this block is the average pulse period from block 208. This function changes the upfront qualification using the pulse rate. The output of block 204 indicates the degree of arrhythmia and individual pulse quality. Inputs to block 204 are: (1) pre-processed red and IR signals, (2) Average pulse period, and (3) lowpass waveforms from the low pass filter. Outputs from block 204 include: (1) degree of arrhythmia, (2) pulse amplitude variations, (3) individual pulse quality, (4) pulse beep notification, and (5) qualified pulse periods and age.

[0020] Block 206 is used to compute signal quality metrics. This block (block 206) determines the pulse shape (e.g., derivative skew), period variability, pulse amplitude and variability, Ratio of Ratios variability, and frequency content relative to pulse rate. Inputs to block 206 include: (1) raw digitized red and IR signals, (2) degree of arrhythmia, individual pulse quality, pulse amplitude variation, (3) pre-processed red and IR signals, and (4) average pulse period. Outputs from block 206 include: (1) lowpass and ensemble averaging filter weights, (2) metrics for sensor off detector, (3) normalized pre-processed waveforms, and (4) percent modulation.

[0021] Block 208 computes average pulse periods. This block (block 208) calculates the average pulse period from the pulses received. Inputs to-block 208 include: qualified pulse periods and age. An output from block 208 includes the average pulse period.

[0022] Block 210 represents the functioning of the lowpass filter and ensemble averaging subsystem. Block 210 low pass filters and ensemble averages normalized and preprocessed waveforms processed by block 206. The weights for the low pass filter are determined by the Signal Metrics block 206. The signal is also ensemble averaged (*i.e.*, frequencies other than those of interest near the pulse rate and its harmonics are attenuated), with the ensemble averaging filter weights also determined by Signal Metrics block 206. Less weight is assigned if the signal is flagged as degraded. More weight is assigned if the signal is flagged as arrhythmic because ensemble-averaging is not appropriate during arrhythmia. Red and IR waveforms are processed separately, but with the same filtering weights. The filtering is delayed (*e.g.*, approximately one second) to allow the signal metrics to be calculated first.

[0023] The filters use continuously variable weights. If samples are not to be ensemble-averaged, then the weighting for the previous filtered samples is set to zero in the weighted average, and the new samples are still processed through the algorithm. This block tracks the age of the signal and/or the accumulated amount of filtering (*e.g.*, sum of response times and delays in processing). Too old a result will be flagged, if good pulses haven't been detected for a while. The inputs to block 210 include: (1) normalized pre-processed red and IR signals, (2) average pulse period, (3) low pass filter weights and ensemble averaging filter weights, (4) ECG triggers, if available, and (5) IR fundamental, for zero-crossing triggers. Outputs from block 210 include: (1) filtered red and IR signals, and (2) age.

[0024] Block 212 represents operations that estimate the ratio-of-ratios variance for the filtered waveforms and calculate averaging weights. The variable weighting for the filter is controlled by the ratio-of-ratios variance. The effect of this variable-weight filtering is that the ratio-of-ratios changes slowly as artifact increases and changes quickly as artifact decreases. The subsystem has two response modes, including fast and normal modes. For example, filtering in the fast mode targets an age metric of 3 seconds, and the target age may be 5 seconds in the normal mode. In the fast mode, the minimum weighting of the current value is clipped at a higher level. In other words, a low weight is assigned to the newest ratio-of-ratios calculation if there is noise present, and a high weight if no noise is present. The inputs to block 212 include: (1) filtered red and IR signals and age, (2) calibration coefficients, and (3) response mode (*e.g.*, user speed settings). Outputs from block 212 include an averaging weight for ratio-of-ratios calculation. The averaging weight is used as an input to block 214 along with filtered IR and Red waveforms to calculate averaged ratio of ratios and age.

[0025] Block 216 represents operations that calculate oxygen saturation. Saturation is calculated using an algorithm with the calibration coefficients and averaged ratio of ratios. Inputs to block 116 include: (1) Averaged Ratio-of-Ratios, and (2) calibration coefficients. An output from block 216 is the oxygen saturation value.

II. Pulse Rate Calculation

[0026] Block 218 low pass filters and ensemble averages the signal(s) conditioned by block 202, for the pulse rate

identification. The weights for the low pass filter are determined by the Signal Metrics block 206. The signal is also ensemble averaged (*i.e.*, frequencies other than those of interest near the pulse rate and its harmonics are attenuated), with the ensemble averaging filter weights also determined by Signal Metrics block 206. Less weight is assigned if the signal is flagged as degraded. More weight is assigned if the signal is flagged as arrhythmic because ensemble-averaging is not appropriate during arrhythmia. Red and IR are processed separately. The filtering is delayed (*e.g.*, approximately one second) to allow the signal metrics to be calculated first.

[0027] The filters use continuously variable weights. If samples are not to be ensemble-averaged, then the weighting for the previous filtered samples is set to zero in the weighted average, and the new samples are still processed through the algorithm. This block (block 218) tracks the age of the signal and/or the accumulated amount of filtering (sum of response times and delays in processing). Too old a result will be flagged (if good pulses haven't been detected for awhile). Inputs to block 218 include: (1) pre-processed red and IR signals, (2) average pulse period, (3) lowpass filter weights and ensemble averaging filter weights, (4) ECG triggers, if available, and (5) IR fundamental, for zero-crossing triggers. Outputs from block 218 include: (1) filtered red and IR signals and (2) age.

[0028] Block 220, or the Filtered Pulse Identification and Qualification block, calculates the pulse periods from the filtered waveforms, and its results are used only when a pulse is disqualified by block 204. Inputs to block 220 include: (1) filtered red and IR signals and age, (2) average pulse period, (3) hardware ID or noise floor, (4) and the kind or type of sensor that is used to detect the IR and Red energies. Output from block 220 includes qualified pulse periods and age.

[0029] Block 222, or the Average Pulse Periods and Calculate Pulse Rate block, calculates the pulse rate and average pulse period. This block (block 222) receives qualified pulse periods and age as inputs and provides: (1) average pulse period and (2) pulse rate as outputs.

III. Venous Pulsation

[0030] Block 224, or the Detect Venous Pulsation block receives as inputs the pre-processed red and IR signals and age from Block 202, and pulse rate and provides an indication of venous pulsation as an output. Block 224 also provides an IR fundamental waveform in the time domain using a single-tooth comb filter which is output to the Ensemble Averaging filters (*e.g.*, block 210 and 218). Inputs to block 224 include: (1) filtered red and IR signals and age and (2) pulse rate. Outputs from block 224 include: an indication of venous pulsation and IR fundamental. Block 224 measures the "openness" of an IR-Red Lissajous plot to determine the whether a flag (*e.g.*, Venous_Pulsation) should be set. The output flag (*e.g.*, Venous_Pulsation) is updated periodically (*e.g.*, every second). In addition, the IR fundamental waveform is output to the Ensemble Averaging filters.

IV. Sensor Off

[0031] Block 226, or the Detect Sensor-Off and Loss of Pulse Amplitude block, uses a pre-trained neural net to determine whether the sensor is off the surface of the blood-perfused tissue, for example, of a patient. The inputs to the neural net are metrics that quantify several aspects of the behavior of the IR and Red values over the last several seconds. Samples are ignored by many of the system 200's subsystems while the signal state is either not indicative of a pulse being present, or indicative that a sensor is not on a monitoring site (*e.g.*, Pulse Present, Disconnect, Pulse Lost, Sensor May be Off, and Sensor Off). Inputs to block 226 include: (1) signal quality metrics, and (2) the oximeter's LED brightness, amplifier gain, and (3) an ID indicating the oximeter's hardware configuration. Outputs from block 226 include a signal state including sensor-off indication.

[0032] In the architecture 200 described above, the function of block 226, Pulse lost and Pulse Search indications, may be derived using information from several parts of the signal processing architecture. In addition, the signal processing architecture will not use the received IR and red waveforms to compute oxygen saturation or pulse rate if a valid sensor is not connected, or if the Sensor-Off or Loss of Pulse Amplitude are detected by the signal processing architecture.

[0033] The brief description of an embodiment of a pulse oximeter signal processing architecture in accordance with the present invention, set forth above, serves as a basis for describing the methods and devices that are directed towards the selection of ensemble averaging weights used for ensemble averaging of signals that correspond with detected waveforms from a pulse oximeter, as is generally indicated by blocks 210 and 218 above.

ENSEMBLE AVERAGING WEIGHTS

[0034] As set forth above, the selection of ensemble averaging weights are based on one or more or a combination of various signal quality metrics or indicators. In particular, in a preferred embodiment, the metrics that are used to adjust ensemble-averaging weight, includes a measure of the degree of arrhythmia. This metric is used to reduce the degree of ensemble-averaging when the patient appears to be arrhythmic, as ensemble-averaging works less well for signals having highly variable frequency content. Another metric used to adjust ensemble-averaging weight includes a measure

of the degree of variability of ratio-of-ratios (e.g., lack of similarity or correlation between IR and Red waveforms). This metric is sensitive to the presence of motion or other noise sources. This metric is different from that of other known techniques such as Conlon's, in that Conlon teaches a metric that compares the similarity between current and previous-pulse waveforms, presumably from the same wavelength, but not the similarity between two simultaneous waveforms at different wavelengths. Another metric used to adjust ensemble-averaging weight includes a ratio of a current pulse amplitude to the long-term average pulse amplitude. A long-term average pulse amplitude refers to an average that has a response time of perhaps a minute when all pulses are qualified, and several times longer if most pulses are being disqualified. This metric is designed to capture the degree of motion artifact, similar to Conlon's, however, this metric is an analog metric, whereas Conlon's metric has just a few discrete states (e.g., no artifact, low artifact, high artifact). Another metric used to adjust ensemble-averaging weight includes a ratio of a current pulse amplitude to the previous pulse amplitude. This metric is used to quickly change the ensemble-averaging weight when large motion artifact start or stop. Another metric used to adjust ensemble-averaging weight includes a measure of the overall signal quality metric for a single pulse, which metric is itself a combination of several other metrics, including the metrics described above. This metric is used to quickly reduce the ensemble filtering when motion artifact subsides and the input waveform is presumed to be of better quality than a heavily ensemble-averaged waveform. Another metric used to adjust ensemble-averaging weight includes a ratio of a current pulse period to the average pulse period. This metric is used to reduce the ensemble filtering in the event that the heart skips a beat, which can happen occasionally on many people.

[0035] When the subsystem (210 and/or 218) is notified that the Pulse Identification and Qualification subsystem (204) has just completed evaluation of a potential pulse, the subsystem updates ensemble-averaging weights, used by the instances of the Ensemble Averaging subsystem. Separate weights are computed for the two Ensemble Averaging instances whose outputs are used in computing saturation and pulse rate. These weights are based in part on metrics provided by the instance of the Pulse Identification and Qualification subsystem whose input waveforms have not been ensemble averaged.

[0036] The equations for *Sat_Ensemble_Averaging_Filter_Weight* are as follows:

$$x = \max(\text{Short_RoR_Variance}, \text{Pulse_Qual_RoR_Variance} / 1.5) * \max(\text{Long_Term_Pulse_Amp_Ratio}, 1.0)$$

$$\text{RoR_Variance_Based_Filt_Wt} = 0.5 * 0.05 / \max(0.05, x)$$

$$\text{Arr_Prob} = (\text{Period_Var} - 0.1 * \text{Short_RoR_Variance} - 0.09) / (0.25 - 0.09);$$

$$\text{Arr_Min_Filt_Wt_For_Sat} = 0.05 + 0.5 * \text{bound}(\text{Arr_Prob}, 0, 1.0)$$

$$\text{Sat_Ensemble_Averaging_Filter_Weight} = \max(\text{RoR_Variance_Based_Filt_Wt}, \text{Arr_Min_Filt_Wt_For_Sat}) * (1.0 + \text{Pulse_Qual_Score})$$

$$\text{Sat_Ensemble_Averaging_Filter_Weight} = \min(\text{Sat_Ensemble_Averaging_Filter_Weight}, 1.0),$$

where $\text{bound}(a,b,c)$ denotes $\min(\max(a,b),c)$

[0037] The above equations result in a default weight of 0.5 for low values of the Ratio-of-Ratios variances. *Short_RoR_Variance* and *Pulse_Qual_RoR_Variance* are both computed -over a time interval (e.g., a three-second interval). The interval for *Pulse_Qual_RoR_Variance* ends with the qualification or rejection of the most recent pulse, which would usually include the most recent samples. The weight is reduced by high Ratio-of-Ratios variances, and by high values of *Long_Term_Pulse_Amp_Ratio* that would typically indicate motion artifact. *Arr_Min_Filt_Wt_For_Sat* imposes a minimum value on the ensemble-averaging weight (range 0.05 - 0.55) based primarily on *Period Var*, which quantifies the degree of arrhythmia. This is done because ensemble-averaging is less effective for pulses having dissimilar periods. If the most recent pulse received a good *Pulse_Qual_Score*, this can increase the maximum value of

EP 1 729 631 B1

Sat_Ensemble_Averaging_Filter_Weight from 0.5 to 1.0.

[0038] The equations for *Rate_Ensemble_Averaging_Filter_Weight* are as follows:

$$Arr_Prob = (Period_Var - 0.07) / (0.20 - 0.07)$$

$$Arr_Min_Filt_Wt_For_Rate = 0.05 + 0.5 * bound(Arr_Prob, 0, 1.0)$$

$$x = \max(RoR_Variance_Based_Filt_Wt, Arr_Min_Filt_Wt_For_Rate) * (1.0 + Pulse_Qual_Score)$$

if *Short_Term_Pulse_Amp_Ratio* * *Long_Term_Pulse_Amp_Ratio* < 1.0

$$x = x / Short_Term_Pulse_Amp_Ratio$$

if *Avg_Period* > 0

$$x = x * bound(Pulse_Qual_Score * Qualified_Pulse_Period / Avg_Period, 1.0, 3.0)$$

$$Rate_Ensemble_Averaging_Filter_Weight = \min(x, 1.0)$$

[0039] These equations differ from the ones for *Sat_Ensemble_Averaging_Filter_Weight* as follows:

a) The thresholds used to compute *Arr_Prob* are somewhat lower, because it is desirable that arrhythmic pulses not be obscured by ensemble averaging prior to pulse qualification.

b) Small values of *Short_Term_Pulse_Amp_Ratio* typically indicate that motion artifact has just subsided, which means that the ensemble-averaging weight may be quickly increased. This has been found empirically to be beneficial for pulse qualification, but not for ratio-of-ratios filtering and saturation computation.

c) If the heart skips a beat, with or without prior arrhythmia, the longer-than-average *Qualified_Pulse_Period* that results will increase the ensemble-averaging weight, so as not to obscure the skipped beat from subsequent pulse qualification.

[0040] In one aspect, the ensemble averaging weights that have been determined as described above, are used for two separate ensemble averagers for processing a detected waveform for use in calculating oxygen saturation and a pulse rate. The ensemble averager used for calculating oxygen saturation operates on a signal which has been normalized, while the ensemble averager for the pulse rate calculation operates on a signal which has not been normalized. A pulse oximeter with separate ensemble averaging for oxygen saturation and heart rate is described in a co-pending patent application assigned to the assignee herein, and titled: Pulse Oximeter with Separate Ensemble Averaging for Oxygen Saturation and Heart Rate, Attorney Docket: TTC-009103-022700US. In that patent application, the metrics chosen for the two paths through the two ensemble averagers can be varied to optimize the ensemble averaging for oxygen saturation or pulse rate calculations. For example, a lower threshold is used for a metric to detect arrhythmic pulses when used to calculate pulse rate, as compared to calculating oxygen saturation. Also, a metric for a short term pulse amplitude ratio will be small when motion artifact has just subsided, and this is given more weight in the pulse rate calculation than in the oxygen saturation calculation.

Definitions:

Data Inputs

[0041]

Avg_Period - Average pulse period reported by Pulse Rate Calculation subsystem.

Long_Term_Pulse_Amp_Ratio - Quantifies last pulse amplitude compared to historic pulse amplitude. Provided by

the Pulse Identification and Qualification subsystem. Values substantially larger than 1.0 are typically indicative of motion artifact, and result in lower

Ensemble_Averaging_filter_Weights.

Period_Var - Period-variability metric from the Pulse Identification and Qualification subsystem. Used to gauge the extent of arrhythmia. For instance, a value of 0.10 would indicate that the average difference between consecutive pulse periods is 10% of *Avg_Period*. *Pulse_Qal_RoR_Variance* - *RoR_Variance* metric from the Pulse Identification and Qualification subsystem.

Pulse_Qual_Score - Score computed by the pulse qualification neural net in the Pulse Identification and Qualification subsystem. Zero is extremely poor and 1.0 is excellent. *Qualified_Pulse_Period* - Most recent pulse period qualified by the Pulse Identification and Qualification subsystem.

Short_Term_Pulse_Amp_Ratio - Quantifies last pulse amplitude compared to previous pulse amplitude.

Outputs

[0042]

Frequency_Ratio - Ratio of *Mean_IR_Frequency_Content* to pulse rate.

LPF_RoR_Variance - Quantifies variability of ratio-of-ratios. Computed over a 9-second window from *LPF_Scaled_Waveforms*.

Rate_LPF_Weight - Lowpass filter weight to be used by the instance of the Ensemble Averaging subsystem that preprocesses waveforms used for pulse qualification and pulse rate calculation.

RoR_Variance - Quantifies variability of ratio-of-ratios. Computed over a 9-second window from *Scaled_Waveforms*. For example, a value of 0.10 would indicate that sample-to-sample ratio-of-ratios values differ from the mean ratio-of-ratios value by an average of 10% of the mean ratio-of-ratios value.

Sat_Ensemble_Averaging_Filter_Weight - Ensemble-averaging weight to be used by the instance of the Ensemble Averaging subsystem that preprocesses waveforms used for pulse qualification and pulse rate calculation.

Sat_LPF_Weight - Lowpass filter weight to be used by the instance of the Ensemble Averaging subsystem that preprocesses waveforms used for pulse qualification and pulse rate calculation.

Scaled_Waveforms - Scaled versions of IR and Red Pre_Processed_Waveforms.

Short_RoR_Variance - Quantifies variability of ratio-of-ratios. Computed over a 3-second window from *Scaled_Waveforms*.

Internal Variables

[0043]

Arr_Prob - Likelihood of arrhythmia that would limit the amount of ensemble averaging. Based on *Period_Var*, with threshold that are specific to each of the two *Ensemble_Averaging_Filter_Weights*.

Arr_Min_Filt_Wt_For_Rate, *Arr_Min_Filt_Wt_For_Sat* - Minimum values for the two *Ensemble_Averaging_Filter_Weights*, based on their respective *Arr_Prob* values.

LPF_Scaled_Waveforms - Lowpass-filtered version of *Scaled_Waveforms*, used to compute *LPF_RoR_Variance*.

Mean_IR_Frequency_Content - Estimate of mean frequency content of the IR input waveform. Used to compute *Frequency_Ratio* metric.

RoR_Variance_Based_Filt_Wt - Component for *Ensemble_Averaging_Filter_Weights* based on *RoR_Variance* metrics and *Long_Term_Pulse_Amp_Ratio*.

[0044] Accordingly, as will be understood by those of skill in the art, the present invention which is related to the selection of ensemble averaging weights, may be embodied in other specific forms. For example, while the present embodiments have been described in the time-domain, frequency-based methods are equally relevant. Accordingly, the foregoing disclosure is intended to be illustrative, but not limiting, of the scope of the invention, which is set forth in the following claims.

Claims

1. A method of ensemble averaging signals in a pulse oximeter, comprising:

receiving first and second electromagnetic radiation signals from a blood perfused tissue portion corresponding

to two different wavelengths of light; normalising said electromagnetic signals to provide normalised electromagnetic signals; obtaining an assessment of the signal quality of said first and second electromagnetic signals; selecting weights for two ensemble averagers using said assessment of signal quality; ensemble averaging said first and second electromagnetic signals using one of said ensemble averagers and using the ensemble averaged first and second electromagnetic signals to determine a pulse rate, and ensemble averaging said normalised electromagnetic signals using the other one of said two ensemble averagers and using the ensemble averaged normalised signals to determine oxygen saturation.

5

10

2. The method of claim 1 wherein said obtaining an assessment of said signal quality comprises obtaining a measure of the degree of arrhythmia of said signals.

3. The method of claim 2 wherein said obtaining an assessment of said signal quality further comprises obtaining a measure of the degree of similarity or correlation between said first and second electromagnetic radiation signals.

15

4. The method of claim 1 wherein said obtaining an assessment of said signal quality comprises obtaining a measure of the degree of motion artifact present in said signals.

5. The method of claim 4 wherein said obtaining a measure of the degree of motion artifact comprises obtaining a ratio of a current pulse amplitude to the long-term average pulse amplitude of said signals.

20

6. The method of claim 1 wherein said obtaining an assessment of said signal quality comprises obtaining a ratio of a current pulse amplitude to the previous pulse amplitude of said signal.

7. The method of claim 1 wherein said obtaining an assessment of said signal quality comprises obtaining a measure of the degree of the overall signal quality metric for a single pulse, which metric is itself a combination of several other metrics.

25

8. The method of claim 1 wherein said obtaining an assessment of said signal quality comprises obtaining a ratio of a current pulse period to that of an average pulse period of said signals.

30

9. The method of claim 1 wherein said selecting weights comprises forming a combination of one or more parameters selected from the group consisting of a measure of the degree of arrhythmia of said signals, a measure of the degree of similarity or correlation between said first and second electromagnetic radiation signals, a measure of the degree of motion artifact by obtaining a ratio of a current pulse amplitude to the long-term average pulse amplitude of said signals, a ratio of a current pulse amplitude to the previous pulse amplitude of said signal, and a ratio of a current pulse period to that of an average pulse period of said signals.

35

10. A device for ensemble averaging signals in a pulse oximeter, comprising:

means (100) or receiving first and second electromagnetic radiation signals from a blood perfused tissue portion corresponding to two different wavelengths of light; means (206) for normalizing said electromagnetic signals to provide normalised electromagnetic signals, means (206) for obtaining an assessment of the signal quality of said first and second electromagnetic signals; means (206) for selecting weights for two ensemble averagers (210, 218) using said assessment of signal quality; one after two ensemble averagers being provided for ensemble averaging said first and second electromagnetic signals using said weights; means (222) for using the ensemble averaged signals from the said one of the two ensemble averagers to determine a pulse rate; the other one of the two ensemble averages being provided for ensemble averaging said normalised electromagnetic signals, and means (216) for using the ensemble averaged normalised signals from the said other of the ensemble averagers to determine oxygen saturation.

50

11. The device of claim 10 wherein said means (206) for obtaining an assessment of said signal quality are configured for obtaining a measure of the degree of arrhythmia of said signals.

12. The device of claim 11 wherein said means (206) for obtaining an assessment of said signal quality are further configured for obtaining a measure of the degree of similarity or correlation between said first and second electromagnetic radiation signals.

55

13. The device of claim 10 wherein said means (206) for obtaining an assessment of said signal quality are configured

for obtaining a measure of the degree of motion artifact present in said signals.

5 14. The device of claim 10 wherein said means (206) for obtaining an assessment of said signal quality are configured for obtaining a ratio of a current pulse amplitude to the long-term average pulse amplitude of said signals.

15. The device of claim 10 wherein said means (206) for obtaining an assessment of said signal quality are configured for obtaining a ratio of a current pulse amplitude to the previous pulse amplitude of said signal.

10 16. The device of claim 10 wherein said means (206) for obtaining an assessment of said signal quality are configured for obtaining a measure of the degree of the overall signal quality metric for a single pulse, which metric is itself a combination of several other metrics.

15 17. The device of claim 10 wherein said means (206) for obtaining an assessment of said signal quality are configured for obtaining a ratio of a current pulse period to that of an average pulse period of said signals.

20 18. The device of claim 10 wherein said means (206) for selecting weights are configured for forming a combination of one or more parameters selected from the group consisting of a measure of the degree of arrhythmia of said signals, a measure of the degree of similarity or correlation between said first and second electromagnetic radiation signals, a measure of the degree of motion artifact by obtaining a ratio of a current pulse amplitude to the long-term average pulse amplitude of said signals, a ratio of a current pulse amplitude to the previous pulse amplitude of said signal, and a ratio of a current pulse period to that of an average pulse period of said signals.

25 Patentansprüche

1. Verfahren zum Bilden des kollektiven Mittelwerts von Signalen in einem Puls-Oximeter, umfassend:

Empfangen erster und zweiter elektromagnetischer Strahlungssignale, die zwei unterschiedlichen Wellenlängen entsprechen, von einem durchbluteten Gewebeabschnitt;

30 Normieren der elektromagnetischen Signale, um normierte elektromagnetische Signale bereitzustellen;

Erlangen einer Bewertung der Signalqualität der ersten und zweiten elektromagnetischen Signale;

Auswählen von Wichtungsfaktoren für zwei Kollektiv-Mittelwertbildner unter Verwendung der Bewertung der Signalqualität;

35 Bilden des kollektiven Mittelwerts der elektromagnetischen Signale unter Verwendung eines der Kollektiv-Mittelwertbildner und unter Verwendung der kollektiv gemittelten ersten und zweiten elektromagnetischen Signale, um eine Pulsrate zu bestimmen; und

Bilden des kollektiven Mittelwerts der normierten elektromagnetischen Signale unter Verwendung des anderen der beiden Kollektiv-Mittelwertbildner und Verwenden der kollektiv gemittelten normierten Signale, um die Sauerstoffsättigung zu bestimmen.

40 2. Verfahren nach Anspruch 1, worin das Erlangen einer Bewertung der Signalqualität umfasst: Erlangen eines Maßes für den Grad der Arrhythmie der Signale.

45 3. Verfahren nach Anspruch 2, worin das Erlangen einer Bewertung der Signalqualität ferner umfasst: Erlangen eines Maßes für den Grad der Ähnlichkeit oder Korrelation zwischen den ersten und zweiten elektromagnetischen Strahlungssignalen.

50 4. Verfahren nach Anspruch 1, worin das Erlangen einer Bewertung der Signalqualität umfasst: Erlangen eines Maßes für den Grad des in den Signalen vorliegenden Bewegungsartefakts.

5. Verfahren nach Anspruch 4, worin das Erlangen eines Maßes für den Grad des in den Signalen vorliegenden Bewegungsartefakts umfasst: Erlangen eines Verhältnisses einer aktuellen Impulsamplitude zur langzeitgemittelten Impulsamplitude der Signale.

55 6. Verfahren nach Anspruch 1, worin das Erlangen einer Bewertung der Signalqualität umfasst: Erlangen eines Verhältnisses einer aktuellen Impulsamplitude zur vorigen Impulsamplitude des Signals.

7. Verfahren nach Anspruch 1, worin das Erlangen einer Bewertung der Signalqualität umfasst: Erlangen eines Maßes

für den Grad der Gesamtsignalqualitätsmetrik für einen einzelnen Impuls, wobei diese Metrik ihrerseits eine Kombination mehrerer anderer Metriken ist.

- 5 8. Verfahren nach Anspruch 1, worin das Erlangen einer Bewertung der Signalqualität umfasst: Erlangen eines Verhältnisses einer aktuellen Impulsperiode zu jener einer gemittelten Impulsperiode des Signals.
- 10 9. Verfahren nach Anspruch 1, worin das Auswählen von Wichtungsfaktoren umfasst: Bilden einer Kombination aus einem oder mehreren Parametern, die aus der Gruppe ausgewählt werden, die aus Folgendem besteht: ein Maß für den Grad der Arrhythmie der Signale, ein Maß für den Grad der Ähnlichkeit oder Korrelation zwischen den ersten und zweiten elektromagnetischen Strahlungssignalen, ein Maß für den Grad des Bewegungsartefakts durch Erlangen eines Verhältnisses einer aktuellen Impulsamplitude zur langzeitgemittelten Impulsamplitude des Signals, ein Verhältnis einer aktuellen Impulsamplitude zur vorigen Impulsamplitude des Signals und ein Verhältnis einer aktuellen Impulsperiode zu jener einer gemittelten Impulsperiode des Signals.
- 15 10. Vorrichtung zum Bilden des kollektiven Mittelwerts von Signalen in einem Puls-Oximeter, umfassend:
- Mittel (100) zum Empfangen erster und zweiter elektromagnetischer Strahlungssignale, die zwei unterschiedlichen Wellenlängen entsprechen, von einem durchbluteten Gewebeabschnitt;
- 20 Mittel (206) zum Normieren der elektromagnetischen Signale, um normierte elektromagnetische Signale bereitzustellen;
- Mittel (206) zum Erlangen einer Bewertung der Signalqualität der ersten und zweiten elektromagnetischen Signale;
- Mittel (206) zum Auswählen von Wichtungsfaktoren für zwei Kollektiv-Mittelwertbildner (210, 218) unter Verwendung der Bewertung der Signalqualität;
- 25 wobei einer der beiden Kollektiv-Mittelwertbildner (222) zum Bilden des kollektiven Mittelwerts der elektromagnetischen Signale unter Verwendung der Wichtungsfaktoren vorgesehen ist;
- Mittel zum Verwenden der kollektiv gemittelten Signale von dem einen der beiden Kollektiv-Mittelwertbildner, um eine Pulsrate zu bestimmen;
- wobei der andere der beiden Kollektiv-Mittelwertbildner zum Bilden des kollektiven Mittelwerts der normierten elektromagnetischen Signale vorgesehen ist; und
- 30 Mittel (216) zum Verwenden der kollektiv gemittelten normierten Signale von dem anderen der beiden Kollektiv-Mittelwertbildner, um die Sauerstoffsättigung zu bestimmen.
- 35 11. Vorrichtung nach Anspruch 10, worin die Mittel (206) zum Erlangen einer Bewertung der Signalqualität zum Erlangen eines Maßes für den Grad der Arrhythmie der Signale konfiguriert sind.
- 40 12. Vorrichtung nach Anspruch 11, worin die Mittel (206) zum Erlangen einer Bewertung der Signalqualität ferner zum Erlangen eines Maßes für den Grad der Ähnlichkeit oder Korrelation zwischen den ersten und zweiten elektromagnetischen Strahlungssignalen konfiguriert sind.
- 45 13. Vorrichtung nach Anspruch 10, worin die Mittel (206) zum Erlangen einer Bewertung der Signalqualität zum Erlangen eines Maßes für den Grad des in den Signalen vorliegenden Bewegungsartefakts konfiguriert sind.
- 50 14. Vorrichtung nach Anspruch 10, worin die Mittel (206) zum Erlangen einer Bewertung der Signalqualität zum Erlangen eines Verhältnisses einer aktuellen Impulsamplitude zur langzeitgemittelten Impulsamplitude der Signale konfiguriert sind.
- 55 15. Vorrichtung nach Anspruch 10, worin die Mittel (206) zum Erlangen einer Bewertung der Signalqualität zum Erlangen eines Verhältnisses einer aktuellen Impulsamplitude zur vorigen Impulsamplitude des Signals konfiguriert sind.
16. Vorrichtung nach Anspruch 10, worin die Mittel (206) zum Erlangen einer Bewertung der Signalqualität zum Erlangen eines Maßes für den Grad der Gesamtsignalqualitätsmetrik für einen einzelnen Impuls konfiguriert sind, wobei diese Metrik ihrerseits eine Kombination mehrerer anderer Metriken ist.
17. Vorrichtung nach Anspruch 10, worin die Mittel (206) zum Erlangen einer Bewertung der Signalqualität zum Erlangen eines Verhältnisses einer aktuellen Impulsperiode zu jener einer gemittelten Impulsperiode des Signals konfiguriert sind.

18. Vorrichtung nach Anspruch 10, worin die Mittel (206) zum Auswählen von Wichtungsfaktoren konfiguriert sind zum Bilden einer Kombination aus einem oder mehreren Parametern, die aus der Gruppe ausgewählt werden, die aus Folgendem besteht: ein Maß für den Grad der Arrhythmie der Signale, ein Maß für den Grad der Ähnlichkeit oder Korrelation zwischen den ersten und zweiten elektromagnetischen Strahlungssignalen, ein Maß für den Grad des Bewegungsartefakts durch Erlangen eines Verhältnisses einer aktuellen Impulsamplitude zur langzeitgemittelten Impulsamplitude des Signals, ein Verhältnis einer aktuellen Impulsamplitude zur vorigen Impulsamplitude des Signals und ein Verhältnis einer aktuellen Impulsperiode zu jener einer gemittelten Impulsperiode des Signals.

Revendications

1. Procédé de moyennage d'ensemble de signaux dans un oxymètre de pouls, comprenant les étapes consistant à :

recevoir des premier et second signaux de rayonnement électromagnétique correspondant à deux longueurs d'onde de lumière différentes, à partir d'une partie tissu sous perfusion sanguine ;
normaliser lesdits signaux électromagnétiques afin de fournir des signaux électromagnétiques normalisés ;
obtenir une évaluation de la qualité de signal desdits premier et second signaux électromagnétiques ;
sélectionner des pondérations pour deux moyenneurs d'ensemble en utilisant ladite évaluation de qualité de signal ;
mettre en oeuvre un moyennage d'ensemble desdits premier et second signaux électromagnétiques en utilisant un desdits moyenneurs d'ensemble et en utilisant les premier et second signaux électromagnétiques ayant subi un moyennage d'ensemble afin de déterminer un pouls, et
mettre en oeuvre un moyennage d'ensemble desdits signaux électromagnétiques normalisés en utilisant l'autre desdits deux moyenneurs d'ensemble et en utilisant les signaux normalisés ayant subi un moyennage d'ensemble afin de déterminer une saturation en oxygène.

2. Procédé selon la revendication 1, dans lequel ladite étape consistant à obtenir une évaluation de ladite qualité de signal comprend une étape consistant à obtenir une mesure du degré d'arythmie desdits signaux.

3. Procédé selon la revendication 2, dans lequel ladite étape consistant à obtenir une évaluation de ladite qualité de signal comprend en outre une étape consistant à obtenir une mesure du degré de similarité ou de corrélation entre lesdits premier et second signaux de rayonnement électromagnétique.

4. Procédé selon la revendication 1, dans lequel l'étape consistant à obtenir une évaluation de ladite qualité de signal comprend une étape consistant à obtenir une mesure du degré d'artefact de mouvement présent dans lesdits signaux.

5. Procédé selon la revendication 4, dans lequel ladite étape consistant à obtenir une mesure du degré d'artefact de mouvement comprend une étape consistant à obtenir un rapport d'une amplitude de pouls actuelle sur l'amplitude de pouls moyenne à long terme desdits signaux.

6. Procédé selon la revendication 1, dans lequel l'étape consistant à obtenir une évaluation de ladite qualité de signal comprend une étape consistant à obtenir un rapport d'une amplitude de pouls actuelle sur l'amplitude de pouls précédente dudit signal.

7. Procédé selon la revendication 1, dans lequel l'étape consistant à obtenir une évaluation de ladite qualité de signal comprend une étape consistant à obtenir une mesure du degré de la métrique de la qualité de signal générale pour un pouls unique, ladite métrique étant elle-même une combinaison de plusieurs autres métriques.

8. Procédé selon la revendication 1, dans lequel l'étape consistant à obtenir une évaluation de ladite qualité de signal comprend une étape consistant à obtenir un rapport d'une période de pouls actuelle sur une période de pouls moyenne desdits signaux.

9. Procédé selon la revendication 1, dans lequel ladite étape consistant à sélectionner des pondérations comprend une étape consistant à former une combinaison d'un ou plusieurs paramètres sélectionnés parmi le groupe constitué d'une mesure du degré d'arythmie desdits signaux, une mesure du degré de similarité ou de corrélation entre lesdits premier et second signaux de rayonnement électromagnétique, une mesure du degré d'artefact de mouvement par obtention d'un rapport d'une amplitude de pouls actuelle sur l'amplitude de pouls moyenne à long terme desdits signaux, un rapport d'une amplitude de pouls actuelle sur l'amplitude de pouls précédente dudit signal, et un rapport

d'une période de pouls actuelle sur une période de pouls moyenne desdits signaux.

10. Dispositif pour un moyennage d'ensemble de signaux dans un oxymètre de pouls, comprenant :

5 un moyen (100) permettant de recevoir des premier et second signaux de rayonnement électromagnétique correspondant à deux longueurs d'onde de lumière différentes, en provenance d'une partie tissu sous perfusion sanguine ;
un moyen (206) permettant de normaliser desdits signaux électromagnétiques afin de fournir des signaux électromagnétiques normalisés ;
10 un moyen (206) permettant d'obtenir une évaluation de la qualité de signal desdits premier et second signaux électromagnétiques ;
un moyen (206) permettant de sélectionner de pondérations pour deux moyennes d'ensemble (210, 218) en utilisant ladite évaluation de qualité de signal ;
un des deux moyennes d'ensemble (222) étant fourni pour un moyennage d'ensemble desdits premier et second signaux électromagnétiques en utilisant lesdites pondérations ;
15 un moyen permettant d'utiliser des signaux ayant subi un moyennage d'ensemble et provenant dudit un des deux moyennes d'ensemble afin de déterminer un pouls ;
l'autre des deux moyennes d'ensemble étant fourni pour un moyennage d'ensemble desdits signaux électromagnétiques normalisés, et
20 un moyen (216) permettant d'utiliser des signaux normalisés ayant subi un moyennage d'ensemble et provenant dudit autre des deux moyennes d'ensemble afin de déterminer une saturation en oxygène.

11. Dispositif selon la revendication 10, dans lequel ledit moyen (206) permettant d'obtenir une évaluation de ladite qualité de signal est configuré pour obtenir une mesure du degré d'arythmie desdits signaux.

25 12. Dispositif selon la revendication 11, dans lequel ledit moyen (206) permettant d'obtenir une évaluation de ladite qualité de signal est en outre configuré pour obtenir une mesure du degré de similarité ou de corrélation entre lesdits premier et second signaux de rayonnement électromagnétique.

30 13. Dispositif selon la revendication 10, dans lequel ledit moyen (206) permettant d'obtenir une évaluation de ladite qualité de signal est configuré pour obtenir une mesure du degré d'artefact de mouvement présent dans lesdits signaux.

35 14. Dispositif selon la revendication 10, dans lequel ledit moyen (206) permettant d'obtenir une évaluation de ladite qualité de signal est configuré pour obtenir un rapport d'une amplitude de pouls actuelle sur l'amplitude de pouls moyenne à long terme desdits signaux.

40 15. Dispositif selon la revendication 10, dans lequel ledit moyen (206) permettant d'obtenir une évaluation de ladite qualité de signal est configuré pour obtenir un rapport d'une amplitude de pouls actuelle sur l'amplitude de pouls précédente dudit signal.

45 16. Dispositif selon la revendication 10, dans lequel ledit moyen (206) permettant d'obtenir une évaluation de ladite qualité de signal est configuré pour obtenir une mesure du degré de la métrique de qualité générale de signal pour un pouls unique, laquelle métrique étant elle-même une combinaison de plusieurs autres métriques.

17. Dispositif selon la revendication 10, dans lequel ledit moyen (206) permettant d'obtenir une évaluation de ladite qualité de signal est configuré pour obtenir un rapport d'une période de pouls actuelle sur une période de pouls moyenne desdits signaux.

50 18. Dispositif selon la revendication 10, dans lequel ledit moyen (206) permettant de sélectionner des pondérations est configuré pour former une combinaison d'un ou plusieurs paramètres sélectionnés parmi le groupe constitué d'une mesure du degré d'arythmie desdits signaux, une mesure du degré de similarité ou de corrélation entre lesdits premier et second signaux de rayonnement électromagnétique, une mesure du degré d'artefact de mouvement par obtention d'un rapport d'une amplitude de pouls actuelle sur l'amplitude de pouls moyenne à long terme desdits signaux, un rapport d'une amplitude de pouls actuelle sur l'amplitude de pouls précédente dudit signal, et un rapport
55 d'une période de pouls actuelle sur celle d'une période de pouls moyenne desdits signaux.

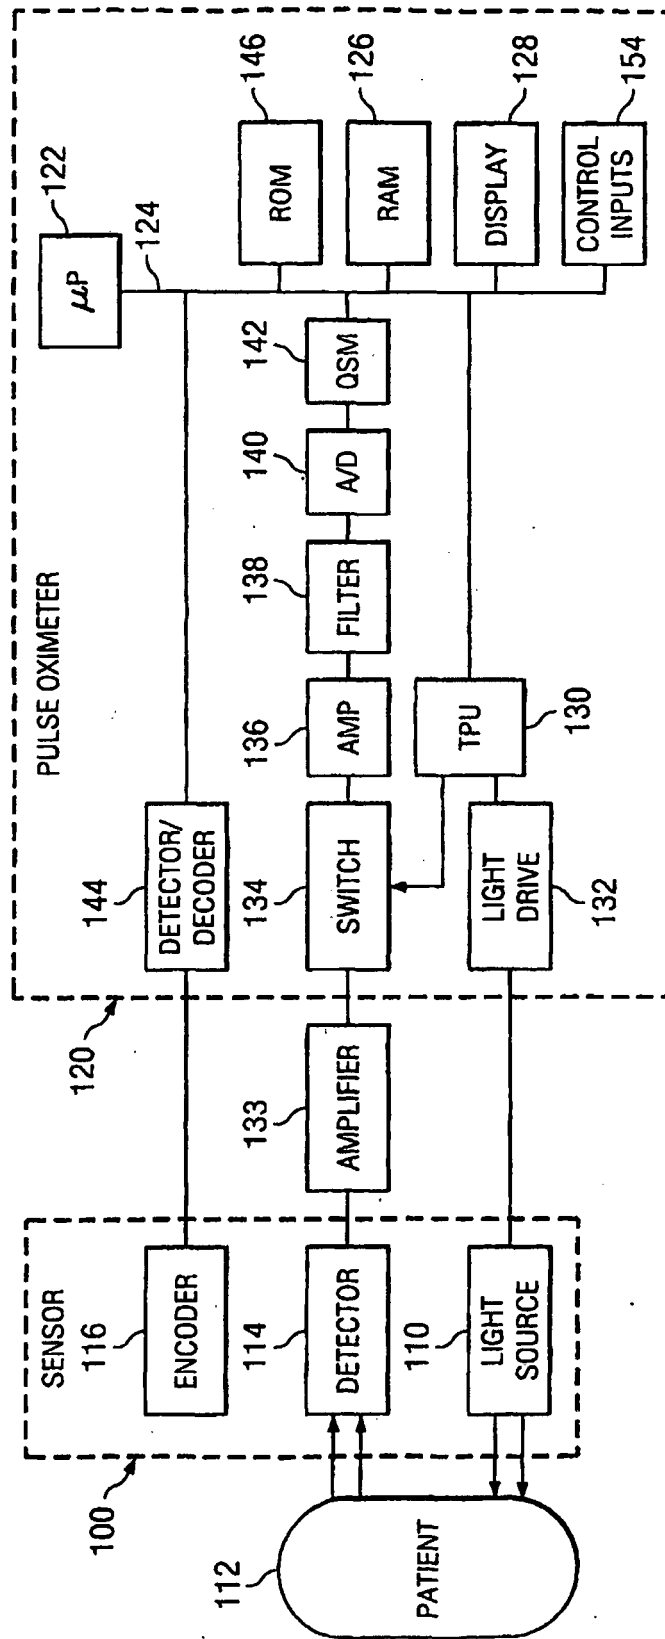


FIG. 1

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4690126 A, Conlon [0003]
- US 2002137994 A1 [0004]
- US 20030009091 A1 [0005]
- US 5473263 A [0006]
- US 5853364 A [0012]
- US 4911167 A [0012]
- US 5645059 A [0012]

专利名称(译)	基于信号质量度量选择脉冲血氧计的整体平均权重		
公开(公告)号	EP1729631B1	公开(公告)日	2015-01-07
申请号	EP2005724861	申请日	2005-03-07
[标]申请(专利权)人(译)	内尔科尔普里坦贝内特公司		
申请(专利权)人(译)	NELLCOR PURITAN BENNETT INCORPORATED		
当前申请(专利权)人(译)	COVIDIEN LP		
[标]发明人	BAKER JR CLARK R		
发明人	BAKER JR, CLARK, R.		
IPC分类号	A61B5/00		
CPC分类号	A61B5/14552 A61B5/7203 A61B5/7221		
代理机构(译)	吉布斯, RICHARD		
优先权	10/796559 2004-03-08 US		
其他公开文献	EP1729631A1		
外部链接	Espacenet		

摘要(译)

一种用于对脉冲血氧计中的信号进行整体平均的方法和系统，包括从对应于两个不同波长的光的血液灌注组织部分接收第一和第二电磁辐射信号，获得对电磁信号的信号质量的评估，选择权重对于使用信号质量评估的整体平均器，并使用整体平均器对电磁信号进行整体平均。

$$w = \frac{\max(\text{Short Term Variance, Pulse Qval, RR Variance})}{1.5}$$

$$\max(\text{Long Term Pulse Amp Ratio}, 1.0)$$