

(19)



(11)

EP 1 290 658 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
30.01.2008 Bulletin 2008/05

(51) Int Cl.:
A61B 5/00 (2006.01) A61B 5/0408 (2006.01)

(21) Application number: **01930556.4**

(86) International application number:
PCT/US2001/012562

(22) Date of filing: **17.04.2001**

(87) International publication number:
WO 2001/078831 (25.10.2001 Gazette 2001/43)

(54) WIRELESS SYSTEM PROTOCOL FOR TELEMETRY MONITORING

DRAHTLOSES SYSTEMPROTOKOLL ZUR TELEMETRIE BERWACHUNG

PROTOCOLE DE SYSTEME SANS FIL UTILISE EN TELESURVEILLANCE

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

- **GHAEM, Sanjar**
Chesapeake, VA 23321 (US)
- **OLSON, William, L.**
Lake Villa, IL 60046 (US)

(30) Priority: **18.04.2000 US 551719**

(43) Date of publication of application:
12.03.2003 Bulletin 2003/11

(74) Representative: **McLeish, Nicholas Alistair**
Maxwell et al
Boult Wade Tennant
Verulam Gardens
70 Gray's Inn Road
London WC1X 8BT (GB)

(73) Proprietor: **MOTOROLA, INC.**
Schaumburg, IL 60196 (US)

(72) Inventors:

- **KHAIR, Mohammad**
Hoffman Estates, IL 60195 (US)
- **NG, Richard**
Cary, IL 60013 (US)
- **LOPEZ, Salvador**
Dundee,
IL 60118 (US)

(56) References cited:
US-A- 4 531 526 US-A- 4 608 994
US-A- 4 981 141 US-A- 5 153 584
US-A- 5 168 874 US-A- 5 307 818
US-A- 5 458 122 US-A- 5 511 553
US-A- 5 862 803 US-A- 5 907 291
US-A- 5 929 782 US-A- 6 163 276

EP 1 290 658 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**A. Field of the Invention**

[0001] This invention relates generally to the field of devices used to measure electrical bio-potential signals generated by a human body, such as electrocardiogram (ECG), electroencephalogram (EEG) and electromyography (EMG) signals. More particularly, the invention relates to a wireless signal acquisition system and over the air communications protocol that is used between a plurality of wireless, remotely programmable transceivers, each coupled to a conventional patch electrode, and an associated base unit. The base unit obtains a patient's ECG, EEG or EMG signal from the wireless transceivers and supplies the signal to monitor unit for display. The wireless communications protocol allows the base unit to remotely configure and manage the wireless transceivers, prior to and during data acquisition and transmission.

B. Statement of Related Art

[0002] Conventional ECG monitoring typically requires direct wired electrical connections between electrodes that are attached to the body of the patient at one end and to an ECG monitor on the other end. Electric bio-potentials are measured at the electrodes and signals are transformed via bipolar and unipolar leads into an electrocardiogram.

[0003] Conventional ECG apparatus for hospital bedside monitoring typically requires up to ten wired electrodes. Each electrode is attached to the body of the patient, and has a wire, several feet or more in length, leading to an ECG monitor. The lengthy wired electrodes of conventional ECG apparatus obstruct the patient and limit the patient's freedom of movement. They are also cumbersome for the physician or assisting nurse.

[0004] Telemetry systems for wireless ECG monitoring for patients in hospitals currently exist. These systems are more expensive, intended for greater range (higher power), and do not totally eliminate the physical electrode wires attached to the patient. Instead of being connected to the monitor, the electrodes are each wired to a single transmitter box that is worn by the patient. Some telemetry systems also may not handle a 12 lead ECG (10 wires) because of the wiring that is required between the electrodes and the transmitter box. For example, the Spacelabs Ultraview Modular Digital Telemetry system can only handle a maximum of four leads (5 wires).

[0005] Wireless medical monitoring and diagnosis systems have been proposed in the prior art. U.S. Patent 5,862,803 to Besson et al. describes a wireless electrode/sensor patch system with sensor, controller and transceiver electronics contained in an electrode patch assembly. U.S. Patents 5,307,818, 5,168,814 and 4,981,141, all issued to Segalowitz, describe a wireless electrode system for ECG monitoring. The Besson et al. and Segalowitz patents are incorporated by reference herein. The Segalowitz patents describe a single piece electrode patch with built-in microchips for wireless one way communication, and a snap on electronic-assembly that fastens to a disposable electrode patch. However, the electrode patch is a special two-conductor type that is not conventional. The electrode assemblies are either transmit only or receive only (not both). A reference signal (generated from a Wilson network) is transmitted from the base unit to only the Right Leg electrode patch, which is receive only. Electrodes can only be programmed via manual switches on the electrode casing, not over-the-air from the base unit. For the multiple electrode embodiment, the base unit contains multiple receivers and antennas which imply multiple transmit frequencies are required for the system and over-the-air signaling (thus making the base unit more costly to implement). There is no mention of error correction or detection capability in the electrodes or base unit.

[0006] In another embodiment of the Segalowitz '818 patent, there is discussion of a single strip assembly which contains all of the electrodes required for 12-lead ECG monitoring with microchip circuitry contained in the strip assembly (not in the individual electrode patches). In this configuration, the ECG signals from each electrode are multiplexed and transmitted from a single transmitter (contained in the strip assembly) via time multiplexing on a single digitally encoded frequency channel. However, no time multiplexing on a single frequency channel is discussed for their multiple transmit electrode embodiment.

[0007] The purpose of the invention is to define a communication protocol, i.e., set of command procedures, for a wireless (leadless) electrode system that replaces the physical wires between the electrodes attached to the patient and the monitoring system base unit. The definition of communication protocols or procedures for programming the electrodes over-the air is necessary to provide flexibility in configuring the wireless electrode system to the variable environmental conditions that exist across a wide scope of patient population, as well as different application area or needs. The wireless system allows the patient a greater degree of mobility within the neighboring area without worry about accidentally disconnecting the electrodes or being disconnected from the monitoring equipment. A wireless monitoring system also provides better patient safety since the patient is electrically isolated from the monitor. This monitoring system is also more immune to noise artifacts since the digitization process of the data occurs right at the electrode measurement point and not through extended wires. The protocol defined herein describes initialization, configuration, and management of the wireless electrode network. It also describes data acquisition and transfer to the base unit that synchronizes and coordinates electrode functions.

SUMMARY OF THE INVENTION

[0008] An improvement to a wireless system for medical monitoring is provided. The wireless system has a base unit and a plurality of wireless sensors for attachment to a patient's body. The invention is defined in claims 1, 12 and 23. In

[0009] The base unit is provided with a wireless transceiver for transmitting and receiving wireless communications with the sensors. The wireless communications include, among other things, commands for the transceiver assemblies. Further, a set of instructions is provided in the base unit, such as in a memory for a base unit microcontroller, wherein the base unit issues the commands to the transceiver assemblies in response to the execution of the instructions. The commands from the base unit and the responses to those commands from the transceiver assemblies comprise a procedure or protocol by which the base unit may remotely, and automatically, manage and configure the transceiver assemblies during real time as the transceiver assemblies acquire and transmit physiologic signal data to the base unit.

[0010] The wireless communications procedures described herein are particularly well suited for use in a system acquiring EEG, ECG or EMG signals from a human patient. The programmable wireless transceivers are associated with a sensor in the form of a conventional patch electrode, and acquire bio-potential signals between conductors in the electrode. The patch electrodes are of conventional design and adapted to be placed on the surface of the patient's body for measuring electrical bio-potentials.

[0011] A robust wireless monitoring system needs to allow ease of configuration and calibration due to the variability of physiology across patient populations. The present invention describes wireless programming procedures that allow flexibility in configuration of telemetry based electrode system to adapt to changing requirements of different applications. This invention provides for procedures that are not only specific to ECG, but can equivalently be applied in other application areas such as EEG, EMG, EOG, Respiratory, Tonometric Blood Pressure, Temperature and other wireless medical monitoring systems. Furthermore, the programming procedures are dynamic, responsive to real time conditions as data is being acquired and transmitted to the base unit.

[0012] The protocol provides for transmission of a variety of configuration commands. Examples of such commands include registration information, data acquisition control commands (such as start and stop messages), transmission frequency commands, time slot commands, amplifier gain commands, transmitter control commands, power saving mode commands, initialization commands, and so forth.

[0013] The ability to remotely program the wireless transceivers gives considerable flexibility over how the electrodes are configured and positioned on the patient's body. The programmable wireless transceivers could be designed to be installed on particular locations of the patient's body, such as left arm, right arm, left leg, etc. In a more preferred embodiment, the remotely programmable electrode transceivers are generic with respect to particular placement locations on the surface of a patient's body. The base unit transmits programming data to the individual wireless transceivers. The programming data includes electrode position location data associated with a unique placement position to be assigned to the individual wireless transceivers, as well as electrode identification data. When the data is acquired from each of the wireless transceivers, the electrode identification data, electrode position location data and the acquired electrode signal are sent from the wireless transceivers to the base unit.

[0014] The base unit and the wireless transceivers may use time division multiplexing as a communications format for transfer of the acquired signals to the base unit. In this case, the base unit transmits a global time base signal to the plurality of individual wireless transceivers. The global time base signal is used for synchronizing the timing of transmission of signals acquired by the individual wireless transceivers to the base unit in discrete time slots in a single frequency channel. This time division multiplexing provides that each wireless transceiver transmits its signals to the base unit in discrete time slots, with the wireless transceivers sharing a common frequency channel.

[0015] These and still other aspects and features of the invention will be more apparent from the following detailed description of a presently preferred embodiment.

[0016] In this specification, the terms "wireless transceiver" and "programmable wireless transceiver" are meant to refer to the wireless electrode transceiver assembly as a unit, as distinguished from the actual transceiver module within the assembly, unless the context clearly indicates otherwise. Further, the use of the term "electrode" is meant to be interpreted broadly to cover bio-sensors generally.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] A presently preferred embodiment of the invention is described below in conjunction with the appended drawing figures, wherein like reference numerals refer to like elements in the various views, and in which:

FIG. 1 is a schematic representation of the system of the present invention in use with a patient to acquire ECG signals from the patient and supply them to a ECG monitor;

FIG. 2 is a detailed perspective view of one of the patch electrodes and associated remotely programmable wireless transceiver of FIG. 1, it being understood that all of such patch electrodes and wireless transceivers of FIG. 1 are of a construction similar to that shown in FIG. 2;

FIG. 3 is a block diagram of the wireless transceiver assembly of FIG. 2;

FIG. 4 is a block diagram of the base unit of FIG. 1;

FIG. 5 is a diagram illustrating the time division multiplexing of transmission format for the plurality of wireless transceivers of FIG. 1 in the uplink direction (the direction of wireless transmission from the wireless transceivers to the base unit), and the transmission of synchronization, reference and control data from the base unit to the wireless transceivers in a common channel in the downlink direction;

FIG. 6 is a flow diagram illustrating a base unit initialization routine;

FIG. 7 is a flow diagram illustrating a wireless transceiver initialization routine;

FIG. 8 is a flow diagram of a programming procedure for programming the wireless transceivers of FIG. 1 when initializing the ECG system of FIG. 1;

FIG. 9 is a perspective view of a base unit of FIG. 4 and a group of wireless transceivers being initialized according to the procedure of FIG. 8; and

FIG. 10 is a perspective view of three wireless transmitters after the procedure of FIG. 8 has been completed;

FIGs. 11-26 are illustration of the message flow between the base unit and the electrode assemblies during various different programming procedures according to a preferred embodiment of the invention;

FIG. 27 is an illustration of a registration procedure by which the base unit is registered with the electrode assemblies;

FIG. 28 is an illustration of a signal loss and error recovery procedure implemented by the base unit in the event of a loss of signal from one of the electrode assemblies of FIG. 1;

FIG. 29 is an illustration of a monitoring configuration procedure;

FIG. 30 is an illustration of a monitoring start procedure;

FIG. 31 is a logic diagram representing a state machine and software modules in the wireless electrode transceiver assemblies;

FIG. 32 is a logic diagram representing a state machine and software modules in the base unit;

FIG. 33 is a diagram of a electrode initialization with reset connection routine shown in FIG. 32;

FIG. 34 is a diagram of an electrode activation routine shown in FIG. 32; and

FIG. 35 is a diagram of electrode data acquisition and transmission control routines of Fig. 32.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0018] The present invention can be used in a system consisting of multiple smart wireless transceiver devices sized to snap onto conventional disposable patch wireless sensors or electrodes for wireless patient monitoring, and a base unit communicating with the wireless transceivers that is also capable of interfacing to existing conventional bedside monitoring equipment, such as a standard ECG or EEG monitor. The wireless transceivers receive commands from the base unit such as registration information, transmission frequency commands, amplifier gain commands, transmitter control commands, power saving mode, etc. and include hardware and software or firmware for processing these commands and responsively configuring the wireless transceiver accordingly. These commands are the result of execution of program instructions in a computing platform, such as a microcontroller, in the base unit and a set of response instructions in a computing platform in the wireless transceivers.

[0019] A global time base signal is transmitted from the base unit to the electrodes to serve in synchronizing the timing of acquisition of sample points for all electrodes used in measuring input body surface potentials (e.g., ECG signal). In the ECG example, the base unit receives the transmitted ECG signal from each electrode (at predetermined time intervals if time division multiplexing is the embodiment of the communication protocol), demodulates, decodes (with error correction), digitally processes the data, applies any needed signal conditioning (amplification, filtering), and converts back to analog form for outputting the ECG signals to the standard ECG equipment for display. The base unit also has a universal interface to existing standard ECG equipment so that the wireless link between the electrodes and base unit appears transparent to the ECG equipment. The ECG equipment will accept the individual electrode signals for developing any required lead configuration.

[0020] The wireless transceivers and base unit use a unique over-the-air communication protocol between the base unit and the electrodes which allows wireless programming (configuration), identification, auditing, data acquisition control, and transmitter control of each electrode used in the system during real time. For frequency bandwidth efficiency of the invention, the system could be designed such that transmission of multi-channel signals is on a single digitally encoded frequency channel between the base unit transceiver and multiple electrode devices by using time division multiplexing. For example, each electrode will receive synchronization data from the base unit on the same receive

frequency, and instruction on which time slot to transmit its digitally encoded data. This makes it possible for multiple patients each on a separate frequency channel to use the wireless system in the same hospital room if there is limited bandwidth.

[0021] Referring now to FIG. 1, a system 10 according to a presently preferred embodiment is shown schematically for use with a patient 12. The system 10 acquires ECG, EMG, EEG or other types of signals from the patient 12 and supplies them to a monitor 14. The present example will be discussed in terms of an ECG system, but the invention is directly applicable to other types of medical monitoring.

[0022] The system 10 is a wireless system, in that a plurality of electrode assemblies 16 receive commands (e.g., synchronization and control commands) from a base unit 18 using wireless transmission methods, and supply the ECG signals to the base unit 18 using wireless transmission methods as well. Thus, cumbersome wires for the electrode assemblies 16 are eliminated in the illustrated embodiment.

[0023] The electrode assemblies 16 of FIG. 1 consist of a plurality of individual, remotely programmable wireless transceiver assemblies 20, each transceiver assembly designed to snap onto a conventional patch electrode 22 (such as the 3M Red dot electrode) used in ECG monitoring. The wireless transceivers 20 are described in further detail in conjunction with Figure 2 and 3. The base unit 18 includes a wireless transceiver for sending and receiving messages to the plurality of individual wireless transceivers, and is described in further detail in conjunction with Figures 4, 6, 8 and 9. The base unit further has an interface for providing analog ECG signals received from the wireless transceivers 20 to a conventional ECG display monitor 14.

[0024] A preferred communications format for wireless communication between the base unit 18 and the wireless transceivers 20 is time division multiplexing in a common frequency channel in the uplink direction, that is between the transceivers and the base unit. Each wireless transceiver 20 transmits ECG signals in a particular time slot in the channel, as indicated in FIG. 5. In the downlink direction, the base unit transmits control commands and other information in a common channel that all the wireless transceivers are tuned to. The time slot assignment, frequency assignment, and other transmission control information is managed and controlled by the base unit 18, as described in further detail below. An alternative embodiment is to use code division multiple access (CDMA) communication format for wireless communication between the base unit 18 and the wireless transceivers 20.

[0025] The messages transmitted by the base unit 18 also include configuration commands for the wireless transceivers 20. These configuration commands can be, for example, change or set the data acquisition sampling rate, amplifier gain setting, and channel carrier settings, and can also consist of a timing signal for synchronization of the transmission time slot. Preferably, the base unit 18 transmits a global time base signal to all of the wireless transceivers. The global time base signal synchronizes the timing of transmission of the ECG signals acquired by all of the wireless transceivers 20, such that the transmissions are in discrete time slots in a single frequency channel, as shown in FIG. 5.

[0026] The details of the over-the-air programming protocol to exchange messages and information between the base unit and the transceivers may be arrived at in many ways within the scope of the present invention, and is considered within the ability of a person skilled in the pertinent art from the present disclosure. In one possible embodiment, packets of data are transmitted between the base unit and the wireless transceivers. Particular fields in the packets (bytes of data) are reserved for control data, payload data, CRC or error correction data, etc. in accordance with known wireless transmission protocols, conventional data transmission techniques such as IP or Ethernet, or similar techniques. A presently preferred protocol and message structure is described later in this document in conjunction with FIGs. 11-30.

[0027] FIG. 2 is a detailed perspective view of one of the patch electrodes 22 or sensors and associated remotely programmable wireless transceiver 20 assembly 16 of FIG. 1, it being understood that all of such patch electrodes and wireless transceivers of FIG. 1 are of a construction similar to that shown in FIG. 2. The patch electrode 22 is adhered to the surface of the patient's body 12 in conventional fashion. The patch electrode 22 includes a conductor 24 supplying ECG or other signals to a pin 26. The pin 26 is received in complementary pin receiving structure 28 in the wireless transceiver 20 so as to engage (as in a snap fit) the two parts 20 and 22.

[0028] The pin receiving structure 28 conducts electrical impulses with respect to a local ground reference to electronic circuitry in the wireless transceiver 20. The local ground reference consists of a flexible strip 21 connected to the transceiver 20 having a tip or skin contact 21A, made from a conductive material, which is placed underneath the patch electrode 22 in contact with the skin. The purpose is to allow the transceiver to measure the bio-potential difference between the signal contact point 26 and the local ground reference 21/21A. The material used for the strip 21 could be a thin flexible material such as plastic with an internal conductive trace or lead wire from the transceiver 20 to the skin contact point 21A. The skin contact point 21A is preferably coated with conductive silver chloride (AgCl) material 21B on one side thereof.

[0029] FIG. 3 is a block diagram of the wireless transceiver of FIGs. 1 and 2. The transceiver assembly 20 snaps onto the post pin 26 of a disposable conventional patch electrode. Electrical signals provided from the electrode 22 are supplied to a low noise, variable gain amplifier 30 in the wireless transceiver 20. The amplifier 30 may include a pre-amp stage. The analog signal is filtered, sampled and converted to digital signals in the A/D converter 32. The digital signals are supplied to a computing platform, illustrated as a microcontroller/Digital Signal Processor 34. The microcon-

troller performs signal processing of the digital signal supplied by the A/D converter 32. The signal processing functions include noise filtering and gain control of the digital ECG signal. In an alternative but less-preferred embodiment, gain control in the transceiver assembly could be performed by adjustment of the amplifier 30 gain in the analog signal path. The microcontroller also processes commands and messages received from the base unit, and executes firmware instructions stored in a memory 36. The memory further stores a unique electrode identifier as described in further detail below. The memory may also store a position location identifier or data associated with a position the electrode is attached to the patient. The position location identifier or data is dynamically programmable from the base unit.

[0030] The processed digital ECG signals are buffered in a buffer 38, supplied to an encoder/decoder 40 and fed to a RF transceiver module 42 for transmission to the base unit via a low power built-in RF antenna 44. The transceiver 42 includes a modulator/demodulator, transmitter, power amp, receiver, filters and an antenna switch. A frequency generator 46 generates a carrier frequency for the RF transmission. The frequency is adjustable by the microcontroller 34. A battery 45 with a negative terminal connected to a local ground reference provides DC power to the components. The microcontroller/DSP 34 controls the frequency generator 46 so as to select a frequency for wireless transmission of data and control messages to the base unit. The microcontroller in the computing platform 34 also executes an initialization routine wherein the receiver scans a default receive channel for commands from the base unit, and if the commands are received the transmitter transmits identification information in an assigned frequency and time slot to the base unit.

[0031] All or some of the individual blocks shown in FIG. 3 could be combined in a microchip or microchips to miniaturize the size of the snap-on wireless transceiver assembly 20.

[0032] Referring now to FIG. 4, the base unit 18 is shown also in block diagram form. The base unit 18 transmits commands to all of the wireless transceivers and instructs each transceiver to transmit its ECG data individually (such as in time division multiplexing). The base unit receives the transmitted ECG signals from the electrodes (up to 10) in sequence and then demodulates, decodes, error corrects, de-multiplexes, buffers, signal conditions, and reconverts each electrode's data back to an analog signal for interfacing to the standard ECG monitor 14. The base unit also transmits programming information to the electrodes for frequency selection, power control, etc.

[0033] The base unit 18 includes a low power RF antenna 50, a frequency generator 52 for generating a carrier frequency and an RF transceiver 54. The transceiver 54 includes a modulator/demodulator, transmitter, power amp, receiver, filters and an antenna switch. The base unit further includes a encoder/decoder 56, a computing platform such as a microcontroller/Digital Signal Processor (DSP) 58, and a memory 60 storing code for execution by the microcontroller/DSP, and I/O interface 59 for connection to a personal computer which is used as a test port for running system diagnostics, base unit software upgrades, etc., and a user interface 61. The user interface 61 may consist of the following: a display for indicating electrode programming information or error/alarm conditions, a keypad or buttons for user requested inputs, an alarm unit for audibly indicating error/alarm conditions (for example a detached, low battery or failed electrode), and LEDs for visually indicating error, alarm or programming status.

[0034] The time slot ECG data received from the wireless transceivers is demultiplexed in demultiplexer 62 and supplied to a buffer 64. A digital to analog filter bank 66 converts the multiple channels of digital data from the wireless transceivers to analog form. The analog signals are amplified by amplifiers 68 and supplied to an OEM (original equipment manufacturer) standard ECG monitor interface 70. The interface 70 could be either part of the base unit 18 assembly so that it can directly plug into the ECG display equipment 14 via a standard connector, or it could be part of a cable connection to the display equipment. The idea with the OEM interface 70 is to supply multiple analog ECG signals to the conventional ECG display equipment already used in the hospital environment, in a compatible and transparent manner, such that the display equipment would treat the signals as if they were generated from conventional wired electrodes. Familiarity with the analog signal acquisition hardware or electronics for the ECG display equipment 14 will be required obviously, and the OEM interface circuitry may vary depending on the manufacturer of the display equipment. The OEM monitor interface detailed design is considered within the ability of a person skilled in the art.

[0035] Referring to FIG. 5, a possible transmission scheme between the wireless transceivers 20 and the base unit 18 is time division multiplexing. This allows a single transmit frequency to be used by all the electrodes in the ECG system. All electrodes receive commands and synchronization data (time base signal, reference signal and control data 76) from the base unit 18 on an assigned receive frequency (downlink) channel. The electrode receive channel may or may not be slotted (time multiplexed). Electrode 1 20/22A transmits it's data on time slot 1 72 (Electrode 2 20/22B on time slot 2 74, etc.) at the assigned transmit frequency (uplink) channel. The base unit 18 receives the transmission from the electrodes 20/22 and demultiplexes, buffers, and reconstructs the individual electrode data.

[0036] The system 10 of FIG. 1 utilizes an over the air programming mechanism to exchange messaging and information between the base unit 18 and the wireless transceivers 20. Various types of information could be exchanged. For example, the base unit 18 transmits a data acquisition control message to the wireless transceivers, which tells the microcontroller in the wireless transceivers to start and stop data acquisition. Another command would be a frequency selection command message(s) sent to the wireless transceivers, in which the wireless transceivers responsively select a common frequency channel for transmission of acquired ECG signals to the base unit in discrete time slots.

[0037] The following is a list of some of the possible programming commands and messages that could be sent between the base unit and the wireless transceivers:

- a. Registration of electrodes 20/22 with the base unit 18. This would include the detection of the electrode type and an associated unique electrode identifier by the base unit. This could also include transmission of a unique base unit identifier to the electrodes (for example where multiple base units are within RF range of the electrodes) and detection of the base unit identifier by the electrode. Also, a patient reference number could also be stored in each electrode so it only receives commands from a specific patient-assigned base unit. Each electrode reference number is also stored in the base unit, so that data coming only from these electrodes is accepted. An additional registration feature would be assignment of a specific electrode function (i.e., position on the patient's body). This is discussed in more detail below. With each of the above commands and messages, the receiving unit would typically transmit back a response message indicating the receipt of the command and sending back any required information to the transmitting unit.
- b. Configuration of data acquisition sampling rate.
- c. Configuration of amplifier 30 gain setting.
- d. Configuration of preamplifier filter band settings.
- e. Configuration of carrier channel settings, namely the frequency of the carrier signal generated by the frequency generator 46 in the transceivers.
- f. Configuration of timing signal for transmission time slot. This needs to be synchronized with the data acquisition rate.
- g. Battery 45 utilization sleep/activation mode.
- h. Battery 45 low voltage level detection.
- i. Data acquisition start/stop scenario.
- j. Data transmit procedure.
- k. Error sample data recover/retransmit scenario.
- l. System test diagnostic procedure
- m. Scan of electrode current channel setting procedure
- n. Electrode detection procedure.
- o. Electrode status audit.
- p. Base unit status audit.
- q. Data acquisition subsystem audit.

Identifier:

[0038] The system 10 of FIG. 1 provides a registration mechanism for every wireless transceiver and electrode assembly whereby an electrode identifier is programmed into the base unit, as well as the electrode functional position on the patient (i.e., LA, RA, LL, V1, V2, V3, V4, V5, or V6 in an ECG embodiment). An Electrode Serial Identifier (ESI) will encode the wireless transceiver's unique serial number. Each wireless transceiver is assigned an Electrode Temporary Identifier (ETI) after each registration scenario (on power up or reconfiguration). The temporary identifier can be composed of electrode number and random number for example. The ESI will be included in each message or data transaction from each electrode to the base unit. The electrode identifier will serve to ensure that only registered electrodes input signaling will be accepted by the associated base unit, in the event that two monitoring systems are transmitting on the same frequency channel, or in the case of interference detection.

Base unit unique identifier

[0039] The system will provide a registration mechanism whereby a base unit identifier is programmed into the wireless transceiver assemblies being used. The Base Unit Serial Identifier (BUSI) will encode the base unit serial number. During power-up or reconfiguration, a Base Unit Temporary Identifier (BUTI) is assigned and registered with the wireless transceiver assemblies. The base unit identifier will be included in each message or data transaction from the base unit to each wireless transceiver assembly. The base unit identifier will serve to ensure that only the registered base unit input signaling (commands) will be accepted by the assemblies, in the event that two monitoring systems are transmitting on the same frequency channel, or in the case of interference detection.

Electrode System Initialization

[0040] Figure 6 shows a flow diagram of a possible initialization procedure (for both the base unit 18 and electrodes 20/22) for use where the transmission scheme between the base unit and the wireless transceivers 20 is time division multiplexing. This procedure assumes that each electrode in the ECG system contains a unique identifier and a unique

functional position ID (i.e., LA, RA, LL, V1, V2, V3, V4, V5, or V6). The procedure of FIG. 6 is reduced to a set of instructions stored in the base unit's memory 60 for execution by the microcontroller 58, as shown in FIG. 4, and in a set of response instructions stored in the wireless transceiver 22's memory and microcontroller of FIG. 3.

[0041] At step 80, the base unit is powered up. The base unit is configured for the number of leads used in the ECG system, such as 3, 5 or 12. The configuration could be facilitated by means of any suitable user interface on the base unit 18, such as a display and buttons as shown in FIG. 9 and described subsequently. At step 82, the base unit scans its receive channels, a list of which is programmed into the base unit. At step 84, the base unit determines whether any other ECG base unit transmissions are detected. If so, at step 86 the base unit selects the next unused frequency from the list of predetermined frequency channels as a transmit channel. If not, at step 88 the base unit selects the first frequency from the list of predetermined frequency channels as the transmission channel. The process then proceeds to step 90.

[0042] At step 90, the base unit starts transmitting electrode registration data and messages on the default programming channel determined in steps 86 or 88. The registration data and messages include a base unit identification code or serial number. The registration data and messages were described earlier. This insures that the wireless transceivers to be associated with this particular base unit being initialized respond to commands from this base unit and no other base unit. At step 92, the base unit instructs all required electrodes to transmit on a predetermined frequency channel, and assigns time slots to each electrode. The base unit then communicates with electrodes to complete registration. If a particular electrode or electrodes did not complete registration, the base unit indicates via its user interface which electrode is not registered at step 96. If registration is completed for all the electrodes, the base units instruct all electrodes to receive commands on a new predetermined frequency channel at step 98. At step 100, the base unit instructs all electrodes to begin ECG data acquisition and to transmit at the assigned frequency and in the assigned time slot. Step 100 may be started in response to a user prompt via the base unit user interface. During data acquisition, at step 102 the base unit continuously monitors for interference on the receive data channel (uplink direction). If excessive interference occurs (such as from a high bit error rate detected in the base unit microcontroller), the base unit selects a new channel from the list of available frequencies for the electrodes to transmit on and commands a change in transmit frequency.

[0043] FIG. 7 is a flow diagram of an electrode initialization procedure that may be employed. When the electrodes are initially powered up at step 110, the electrodes will be in a receive only mode. At step 112, the electrodes automatically scan the default receive channel to see if any commands and synchronization signals are being transmitted by the base unit. If no commands and synchronization commands are received at step 114, the electrode goes back to step 112 and selects another receive frequency from its list of default frequencies. If commands and synchronization data have been received, at step 116 the electrode sends its unique identification data (containing information on the position on the patient's body) on the assigned frequency and in the assigned time slot back to the base unit, indicating to the base unit that it is ready to acquire ECG signals and is in an operating condition.

[0044] In an alternative embodiment of the invention, the plurality of individual, remotely programmable wireless transceivers 20 are initially generic with respect to particular placement locations on the surface of a patient's body. Furthermore, the electrodes could be manufactured without preprogrammed functional position identifiers. This is advantageous since it would not be necessary to have the hospital or user maintain an inventory of individual electrodes based on functional position (i.e., LA, RA, LL, V1, V2, etc.). All the electrode assemblies are considered generic and could be programmed with unique identifiers indicating the position on the body by the base unit when the user sets up the ECG system. The procedure of FIG. 8 could be used for programming of each electrode when initializing the ECG system. After first time programming of the electrode assemblies, the system only needs to go through the initialization program of FIG. 6 when it is powered up again.

[0045] FIG. 8 shows the initialization procedure in the alternative embodiment. FIG. 9 shows the base unit 18 having a user interface 61 comprising a display 132 and a plurality of buttons or keys 133 for assisting the user to interact with the base unit. A group of generic wireless transceivers 20 are shown ready for initialization. The user has a set of pre-printed labels 135, which are removed from a plastic backing and placed on the wireless transceivers as shown in FIG. 10.

[0046] Referring now to FIG. 8 and 9, at step 140 the user sets up the base unit into an electrode programming mode, such as by responding to prompts on the display 132 and selecting the mode with one of the buttons or keys 133. The base unit programming mode could be done at lower power transmissions, requiring the wireless transceiver 20 to be programmed to be adjacent to the base unit (thereby avoiding programming more than one transceiver at a time). Alternatively, as shown in FIG. 9, the base unit has a programming initialization interface 136 which makes contact with a socket or other feature in the transceiver for purposes of programming the transceiver during initialization. When the transceiver is placed into contact with the programming initialization interface 136, the base unit could automatically go into programming mode, or it could simply go into programming mode upon power up.

[0047] In any event, at step 142 the first electrode assembly 20/22 is powered up and placed near the base unit or positioned in contact with the programming initialization interface 136. The initialization of the electrodes could be done by mechanical means, such as plugging the electrode transceiver 20 into the base unit programming initialization interface 136.

[0048] At step 144, the electrode scans the default programming channel. At step 146, the base unit sends a low power programming command on the default transmit channel or some other channel that has the least RF interference. At step 148, the electrode determines whether it has received the programming command. If not, the electrode scans the list of default channels and selects a new channel to listen on. If so, the electrode transmits a response message on its assigned transmit channel at step 150. At step 152, the base unit determines whether it has received the response from the electrode. If not, the base unit goes back to step 146 and transmits the low power programming command on a new transmit channel. If so, the base unit transmits programming data to the electrode at step 153. At step 153, the programming data includes the electrode unique identifier, including the electrode position (LA, RL, or V3, etc.), the base unit unique identifier, and other registration commands as described above. At step 154, the electrode determines whether a programming error was detected, and if so at step 156 sends a retransmit program message to base unit causing it to repeat the programming data at step 152. If no error occurred, the process proceeds to step 158, at which the electrode completes programming with the base unit. At step 160, the base unit instructs the electrode to wait for additional commands. At this point, since the unique base unit ID has been programmed in the wireless transceiver, it can scan ECG system control channels and receive and operate on commands only from the base unit that programmed the transceiver. At step 162, the base unit displays the electrode placement position on the user interface display and prompts the user to place the next electrode for programming into the initialization interface 136.

[0049] After all the electrodes have been programmed, the base unit will automatically be configured for the proper number of electrodes used in the ECG system. As each electrode is programmed the user removes a label 135 from the stock of labels 137 indicating the position programmed on the electrode and applies the label to the electrode (e.g., to the top or upper surface of the wireless transceiver 20), as shown in FIG. 10.

[0050] From the foregoing description, it will be appreciated that we have described a dynamically programmable, wireless electrocardiograph (ECG) acquisition system, comprising: a plurality of individual, remotely programmable wireless transceivers 20, each transceiver associated with a patch electrode 22 for use in ECG monitoring, and a base unit 18 comprising a wireless transceiver 54 (FIG. 4) for sending and receiving messages to the plurality of individual transceivers 20. The base unit and wireless transceivers 22 implement a wireless programming protocol by which messages and information are exchanged between base unit 18 and wireless transceivers 20 (such as shown in FIG. 6 and 8) whereby registration, configuration, and data transmission control properties of the wireless transceivers may be managed by the base unit.

[0051] Preferably, the base unit transmits a global time base signal to the wireless transceivers, the global time base signal synchronizing the timing of transmission of ECG signals acquired by the wireless transceivers in discrete time slots in a single frequency channel. As shown in FIG. 1 and 4, the base unit further comprises an interface 70 to a conventional ECG monitoring equipment such as a display, whereby acquired ECG signals may be transmitted to the ECG monitoring equipment for display. The system of base unit 18 and wireless remotely programmable transceivers 20 is particularly well adapted for use with standard conventional patch electrodes and existing ECG monitoring equipment, and thus presents a flexible, low cost and convenient approach to acquiring ECG signals and presenting them to a display unit for display.

Over the air programming procedures:

[0052] The system 10 of FIG. 1 utilizes over the air (OTA) programming procedures to exchange messaging and information between the base unit and electrodes (that is, the wireless transceivers 20). Various types of information could be transacted for the general purposes of registration, initialization, configuration, calibration, data acquisition control, transmission synchronization, error correction or recovery, power mode control, and auditing status.

[0053] The programming procedures described herein are based on a set of instructions that are stored in a memory in the base unit (such as memory 64 of FIG. 4), and executed by a computing platform such as the microcontroller 58 to generate commands that are transmitted via wireless communication to the plurality of wireless electrodes. Similarly, the wireless transceivers in the electrodes receive the commands from the base unit, and execute instructions stored in a memory in order to respond to the commands and transmit response messages (such as audit response messages etc.) back to the base unit. The following is a description of these instructions. Preferred embodiments of such procedures (i.e., sets of instructions) are described below in conjunction with FIGs. 11-30:

a. Configuration of data acquisition sampling rate procedure. Variable sampling data rates could be set to accommodate varying physiologic signals (ECG, EMG, EEG, etc.). The sampling rates will differ according to the nature of frequencies evoked in such physiologic events. Also, certain application needs for specialized tests within a specific area may require faster sampling rates.

The programming procedure of FIG. 11 is employed to configure the data acquisition sampling rate. The base unit 18 sends a data acquisition configuration message 200 to the electrode assembly 16 (i.e., wireless transceiver 20). The message contains data identifying a sampling rate for the wireless transceiver's A/D converter. When the

message 200 is received by the wireless transceiver and processed in the microcontroller, the sampling rate for the A/D converter is changed. The wireless transceiver sends back a data acquisition configuration complete message 202 indicating that the change in data sampling rate was accomplished.

b. Configuration of amplifier gain setting procedure. Variable signal preamplification gain (prior to digitization) could be set to accommodate and correct for weak bio-potential signal strength at the skin surface, or a bad surface connection, as well as changes in skin resistance due to dry or humid environmental conditions and temperature changes. The signal amplification gain factor could be adjusted dynamically until a reasonable signal strength is obtained. Typically, ECG signals are in the 1-5 mV range, while EEG signals are in the 1-100 μ V range. Different gain selection is desirable to obtain the sensitivity that is needed for the specific application.

When the base unit determines that the amplifier gain needs to be adjusted, the procedure of FIG. 12 is used. The base unit sends an amplifier gain configuration message 204 to the electrode 16's wireless transceiver 20 (FIG. 3). The microcontroller 32 processes the message and adjusts the gain setting to the amplifier 30 providing an analog signal to the A/D converter 32 of FIG. 3. When the gain has been adjusted, the transceiver sends a gain configuration complete message 206 back to the base unit.

c. Configuration of pre-amplifier (anti-aliasing) filter band settings procedure. Flexibility of adaptation of the monitoring system 10 to variable application needs may require a dynamic re-selection of an anti-aliasing filter band in the preamplifier of the wireless transceiver. An optimal filter can be selected from a bank of filters pre-set at different frequency bands to filter out noise or unwanted artifacts. The programming procedure of FIG. 13 is employed. The base unit sends a set filter band message 208 identifying the frequency band (or filter) for the anti-aliasing filter (not shown) in the analog signal path in the wireless transceiver.

d. Configuration of carrier channel setting procedure. In order to allow multiple users of monitoring systems to co-exist in same physical area, and at the same time reduce the possibility of interference, a multi-frequency channel system is implemented to eliminate the possibility of interference in communications between the base unit 18 and the wireless transceivers of any given system 10. The base unit 18 dynamically detects interference by listening to a specific frequency channel during configuration, such as a default frequency channel, and determines the suitability of use for the monitoring system based on noise levels in that frequency channel. The base unit 18 can also apply this procedure if too many errors were encountered during the decoding of signaling received on a specific channel due to increasing noise, or during system reset and reconfiguration procedures.

The procedure of FIG. 14 is employed for carrier channel setting changes. The base unit sends a set carrier channel message 212 to the electrode. The message 212 identifies the new carrier channel. The wireless transceiver's frequency generator is responsively adjusted to generate a carrier signal at the new frequency. When the configuration is complete, the electrode sends a carrier configuration complete message 214 back to the base unit.

e. Configuration of timing signal for transmission time slot procedure. The procedure of FIG. 15 sets the assignment of a specific time slot for each wireless transceiver (in a time division multiple access (TDMA)-based system) for transmitting and/or receiving data between the electrode's wireless transceiver 20 and the base unit 18. Such synchronization is necessary in a TDMA-based system to allow multiple electrodes transmitting on the same frequency channel to relay their information to the base unit without interfering with one another. The procedure consists of the base unit sending a set time slot message 216 to the electrode, identifying a particular time slot for each electrode. When the electrode has set the time slot, it sends back a time slot set complete message 218.

f. Battery utilization sleep/activation mode procedure. The battery utilization sleep mode procedure of FIG. 16 will be used during shut-down process for conservation of battery power. This can also be initiated if signal communication is lost between the electrodes and the base unit, or on command from the base unit. Battery utilization activation mode will be initiated as soon as communication with the electrodes is resumed or during initialization of registration of new electrodes. The procedure involves the base unit sending a battery audit request message 220 to the electrode. The message 220 basically asks the electrode to provide battery life and current battery mode information. This information is provided back to the base unit in a battery audit response message 222.

g. Battery low voltage level detection procedure. A battery status audit procedure shown in FIG. 17 is for a condition of low battery voltage in the wireless transceiver 20 to be detected by the base unit. The procedure allows the base unit to warn the user for replacing or recharging that electrode battery. When the voltage of battery 46 of FIG. 3 goes below a threshold level (as monitored by the microcontroller), the electrode sends a low battery detected message 224 to the base unit.

h. Power Saving Mode Setting. The procedure shown in FIG. 18 allows the base unit to change the power saving mode of the wireless transceivers to conserve battery life and be more economical. Different levels of power saving modes can be selected based on the needs of the operation. A memory retention sleep mode can also be implemented in the wireless transceiver. The system can also have a wake up timer or change to active mode at the command of the base unit. The base unit sends a power saving mode set command 226. The electrode responsively changes the state of the battery 46 to a sleep or power saving mode, and when that is accomplished sends back a power saving mode complete message 228 back to the base unit.

i. Acquisition start/stop procedure. The procedure of FIG. 19 allows the base unit to command the electrodes to start the data acquisition and transmit the data to the base unit, or stop the data acquisition process. Multiple start/stop messages of the type shown in FIG. 19 may be needed continuous data streaming of information to the base unit in the event of reconfiguration, a frequency channel re-selection is needed due to interference, or when power saving (sleep) mode is requested. Other situations are possible. The procedure begins by the base unit sending a start data acquisition message 230 to the electrodes. The electrodes acknowledge the start of data acquisition with a acquisition started message 232. The base unit then commands the electrode to start transmission of data by message 234. The data is sent from the electrodes as indicated by data transfer messages 236. In this illustrated embodiment, this is by time division multiplexing on a single carrier frequency in time slots and by frequency as provided in FIGs. 14 and 15.

j. Data transmit procedure. Once data acquisition is started, data is transmitted from each of the electrodes to the base unit in either a synchronous or an asynchronous manner. This is shown in FIG. 19. At the base unit, data is decoded, collected, buffered, and checked for error occurrence during transmission. Base unit 18 also controls the stoppage of data transmission, as shown in FIG. 20. This procedure involves the base unit sending a stop acquisition message 238. The electrode ceases data acquisition and transmission and sends an acquisition stopped message 240 back to the base unit.

k. Error sample data recover/retransmit procedure. In the event of an error occurring during transmission of the data from the electrodes to the base unit, the data can be requested for re-transmission. This procedure is shown in FIG. 21. The base unit sends a retransmit data message 242 to the electrode. In response, the electrode retransmits stored data stored in the memory 36, as indicated at 244. The electrode should have a minimal buffer storage of the previous data collected in buffer 38 in the event error recovery is needed due to a noisy or bad signal transmission.

l. System test diagnostic procedure. The procedure of FIG. 22 instructs the electrodes to transmit a diagnostic test data pattern in order to analyze the system for optimal performance. Also, it may be used to resolve issues in local ground referencing across all electrodes for calibration purposes. A diagnostic test initiate message 246 is sent from the base unit to the electrode. Receipt of the message 246 causes the microcontroller to initiate certain tests or transmit a diagnostic test pattern according to a set of instructions or code stored in the memory 68 designed to respond to the message 246. A test initiated message 248 is sent back to the base unit, acknowledging the message 246. After the test is performed, test data is transmitted to the base unit as indicated at 250. When all of the test data has been received, the base unit sends a test complete message 252 to the electrode, and the message is acknowledged by a test completed message 254.

m. Scan of electrode current channel setting procedure. A procedure may be implemented to allow the base unit to scan for an electrode that is transmitting on an unknown frequency channel. Using a signal strength indicator, the specific transmission channel can be determined. The electrode can be reconfigured to transmit on a new channel using the procedure of FIG. 14.

n. Electrode detection procedure. The procedure of FIG. 23 is initiated periodically, as a means of providing a continuous search and "keep-alive" signal. The electrode detection procedure involves a connection message 256 that is transmitted from the base unit to the electrodes. The electrodes respond with a connection confirm message 258 which tells the base unit that the electrode is "alive". If this electrode detection message 256 is not received periodically by the electrodes, then they stop data acquisition and move into a power saving mode. The signaling can be done on an interval basis (e.g., every 30 seconds) and on the last previously selected traffic channel.

o. Electrode Status Audit: A procedure shown in FIG. 24 allow the electrode status to be audited by the base unit when needed to ensure proper operating conditions and configuration parameters. The procedure involves the base unit sending an electrode audit request message 260. The electrode responds to the audit message with an audit response message 262 indicating current operating conditions and configuration parameters, e.g., gain setting, preamplification filter band, reference signal, time slot, carrier frequency, data acquisition rate, serial number, etc.

p. Base Unit Audit. Referring to FIG. 25, a base unit's status can be audited by the electrodes when needed to ensure proper operating conditions and configuration parameters. The electrodes send a base unit audit request message 264 to the base unit and it responds with an audit message 266 indicating its current configuration parameters, such as channel frequency.

q. Data acquisition subsystem audit. Referring to FIG. 26, the data acquisition subsystem in the wireless transceivers, consisting of the preamplifier, amplifier and D/A converter, can be individually audited for proper operation status and configuration settings. The base unit sends a data acquisition (DAQ) audit request message 268 to the electrode and the information is provided in a DAQ audit response message 250.

System Operation Procedures:

[0054]

a. Registration of electrodes with the base unit. A preferred registration procedure includes (but is not limited to) detection of electrode type and identifier. The patient reference number and/or demographics can also be stored in each electrode so they are associated uniquely with a specific patient. Assignment of electrode function (anatomical or functional position) in this monitoring system is also performed. Assignment of any temporary identifiers to the electrodes can also be performed. The registration procedure can be initiated on a dedicated frequency control channel(s) for initialization. The registration procedures of FIG.s 6 and 8 are one possible embodiment of the registration procedure. Another possible embodiment is shown in FIG. 27. The base unit sends a connection request message 272 to the electrodes. The electrodes reply with a connection confirm message 274. This is the procedure of FIG. 23 described previously. Then electrode audit messages 276 and 278 are exchanged, the procedure of FIG. 25. The base unit sends a n ID/Function allocation message 280 that assigns the electrode with a temporary ID and body position or function. The electrode sends an allocation complete message 282 in response to the allocation message 280. A base unit registration message 284 is sent to the electrode, registering the electrode with the base and conveying the base unit identification to the electrode. A base unit registration complete message 286 is sent in response. Messages 288, 300, 302 and 304 assign the time slot and carrier channel for the electrode, implementing the procedures of FIGs. 14 and 15.

b. Registration of the base unit with the electrodes. A registration procedure may be implemented by which the base unit registers with the electrodes is also performed. The procedure is shown in messages 284 and 286 of FIG. 27. The procedure includes the detection of a base unit type and an identifier associated with the base unit. The messages 284 and 286 of FIG. 27 serves to restrict electrodes to accept communication from only a single base unit. The registration procedure can be initiated on a dedicated frequency channel(s) for initialization.

c. Total signal loss recovery scenario. A procedure shown in FIG. 28 is provided which recovers from a total loss of signal from one or more of the electrodes. The procedure is initiated in the event of weakening transmission signal strength due to fading channels, or low available transmission power, or large physical distance between the electrodes and the base unit. A continuous search and "keep-alive" signal is transmitted from the base unit to the electrodes. Once an electrode is detected, communication is re-established, and the base unit resumes collection of the data. The procedure begins with the connection request and confirm messages 306 and 308 (the procedure of FIG. 23 described previously), the electrode audit messages 310 and 312 (the procedure of FIG. 24), and the data acquisition subsystem audit messages 314 and 314 (the procedure of FIG. 26). Depending on the response to the audit messages, the base unit may initiate any number of configuration commands to restore the electrode to a proper operating condition, such as the DAQ configure message 316 which configures the data acquisition subsystem in the wireless transceiver. The electrode sends the complete message 318 when the subsystem has been reconfigured in accordance with the settings contained in the message 316. As another alternative, the set carrier channel messages 320 and 322 can be exchanged (the procedure of FIG. 14). As another alternative, a diagnostic test can be initiated as indicated by messages 324, 326, 328, 330, 332 and 334, implementing the procedure of FIG. 22 described above. Additionally, amplifier gain can be configured by messages 338 and 334 (the procedure of FIG. 12). Any or all of the messages shown in dashed lines could be implemented. After a successful reconfiguration of the electrode, data acquisition and transmission is reestablished by messages 340, 342, 344 and 346, namely the procedure of FIG. 19 described above.

d. Monitoring system configuration scenario: A procedure shown in FIG. 29 is provided for the overall monitoring system configuration. The system 10 will set up and configure multiple subsystems including: data acquisition, filtering and signal conditioning, amplifier gain setting, and run diagnostic tests to ensure quality of transmitted data. The configuration begins by a connection request message and response connection confirm message 350 (the procedure of FIG. 23), the data acquisition subsystem audit messages 352 and 354 (the procedure of FIG. 26), the data acquisition subsystem configuration messages 356 and 358, and the setting of the preamplifier filter band by messages 360 and 362 (the procedure of FIG. 13). Then a diagnostic test procedure consisting of messages 362, 364, 366, 368, 370, 372, and 374 are exchanged, implementing the procedure of FIG. 22. An optional amplifier configuration command can be send as message 376 depending on the results of the diagnostic test just performed. When the amplifier gain is successfully changed the gain configuration complete message 378 is sent back to the base unit.

e. Monitoring system data acquisition start scenario: The system will start the data acquisition and transmission through the traffic channel to the base unit once system configuration is complete. The procedure of FIG. 30 shows one possible embodiment. A configuration request message 380 is sent, generating the configuration confirm message 382 from the electrode (procedure of FIG. 23). Data acquisition start messages 384 and 386 are exchanged (procedure of FIG. 19). Acquired data is transmitted via messages 388 and 390. Depending on the signal strength and error detection, the gain of the amplifier 30 in the wireless transceiver can be adjusted via amplifier gain configuration message 392 and when the change is made a gain configuration complete message 394 is sent back to the base unit.

Wireless Electrode State Machine

[0055] Fig. 31 is a logic diagram for a state machine running in the microcontroller/DSP computing platform in the wireless electrode transceiver assembly 20 of FIG. 2 and 3. When the device is powered up and running (and acquiring bio-potential signals), the state machine is in an active mode 400. The state machine reacts to conditions that may be present, and responds to those conditions as shown in the figure. If the user plugs the transceiver assembly into the programming pin or interface on the base unit, the state machine goes into a reset mode connection state 402. This event prompts initiation of a set of routines that request registration with the base unit, as shown in 404. After registration procedures are accomplished (described elsewhere in this document), a sensor initialization routine 406 is entered. The routine 406 is shown in FIG. 33 and described subsequently. Then, a sensor activation routine 408 is entered, shown in FIG. 34. Finally a sensor data acquisition subsystem (DAQ) control routine 410 is entered, shown in FIG. 35.

[0056] Another event that triggers exit of the active mode state is when the base unit's "keep alive" or connection request signal is lost, as indicated at 412. This may occur for example when the patient moves out of range of the base unit temporarily or a problem occurs with the base unit. When this occurs, the microcontroller enters the sensor DAQ control routine 410 and stops the acquisition of data. (This assumes that the memory size of the memory in the transceiver assembly 20 is too small to store significant amounts of data while contact with the base unit is interrupted; if sufficient memory capacity is present, the data could continued to be acquired and stored locally in the memory). The battery 45 is then switched to a power saving mode as indicated by routine 416.

[0057] Another event that can occur is the base unit's signal is regained as indicated by condition 418. When this occurs, the state machine returns to active mode 400, as indicated by routine 420. The wireless transceiver assembly enters a base unit registration procedure 422, wherein the transceiver assembly re-registers with the base unit. If the base unit it is attempting to register with is not its original base unit (for example where the base unit's ID is different from the original base unit ID), then a routine 424 is entered in which the battery is switched to power savings mode. If the base unit is the original base unit, the sensor activation and data acquisition subsystem routines 408 and 410 of FIG. 33 and FIG. 34 are entered.

[0058] While the electrode is in the active mode 400 state, it will normally be receiving the periodic connection request "keep alive" messages from the base unit. It will issue responses to those connection request messages periodically, as indicated by a connection request response routine 426.

[0059] FIG. 32 is a logic diagram of a base unit state machine. The state machine for the base unit also includes an active mode 450. The base machine will respond to conditions including a sensor registration request condition 452. This condition may be entered during data acquisition or during initialization. The base unit responds to this condition by entering the sensor initialization, activation and sensor DAQ control routines 406, 408 and 410. After the registration is complete, the base unit sends a connection request message to all registered wireless transceiver assemblies to insure that they are still operational and within RF range of the base unit, as indicated at 454.

[0060] If the signal from one of the wireless transceiver assemblies is lost, as indicated by condition 453, then the sensor is deactivated from the system as indicated by 454. This step may be accompanied by an alarm or message on the user interface of the base unit.

[0061] If the signal is regained, as indicated by condition 456, a sensor registered routine 458 is entered to insure that the signal that is received originates from a registered transmitter assembly. Then, the sensor activation and DAQ control routines 408 and 410 are entered.

[0062] Another condition that can occur is a noisy uplink or downlink channel, represented by 460. When this occurs, the base unit enters a routine 462 in which available uplink or downlink channels are scanned and a low-noise channel is selected. Then, a routine 464 is entered in which the new channel is assigned to all the registered and active wireless transceiver assemblies.

[0063] Another event that can occur is a base unit configuration 466, which can occur in response to a prompt from a user. When this condition occurs, the state machine enters a routine 467 that prompts the user to enter the configuration information for the next wireless transceiver assembly. The sensor registration request routine 452 is transmitted to the wireless transceiver assembly on the control channel or via the programming interface. Sensor initialization and activation routines 406 and 410 are then entered. If more transceiver assemblies are to be programmed, the process returns to step 468. If all of the assemblies have been programmed and registered, as indicated by routine 470, then the system will enter a sensor DAQ control routine 410 to start data acquisition and transmission, either automatically or in response to input from the user at the base unit user interface.

[0064] FIG. 33 is a illustration of the sensor initialization routine 406 of FIG. 31. The routine consists of a subroutine 500 that assigns a patient ID to the transceiver assembly. Next, a subroutine 502 is entered in which the functional position of the transceiver assembly is assigned by the base unit in response to user prompts. A sensor data acquisition rate assignment subroutine 504 is then entered. The anti-aliasing filter band is assigned by subroutine 506. Then the transceiver assemblies are synchronized by a global time base signal that is broadcast on the downlink channel in subroutine 508. Then, the base unit ID is assigned to the transceiver assemblies by subroutine 510 and the electrode

ID values are registered with the base unit in subroutine 512. The order of execution of modules 500, 502, 504, 506, 508, 510 and 512 is not critical.

[0065] FIG. 34 illustrates the sensor activation routine 408 of FIG. 31 and 32. This routine includes a subroutine 514 that assigns the current data channel to the wireless transceiver assemblies. A subroutine 516 assigns a sensor-base unit group/transmission ID for each of the wireless transceivers. Transceiver amplification gain is assigned in subroutine 518. Then, a subroutine 520 is entered that runs diagnostic tests on the wireless transceiver assemblies and calibrates the units accordingly.

[0066] The sensor data acquisition control routine 410 is shown in FIG. 35. This routine consists of two parts, a start data acquisition subroutine and a stop data acquisition subroutine. The start data acquisition subroutine includes a first module 522 that sends a command to the registered wireless transceiver assemblies to start data acquisition, and a second module 524 that commands the assemblies to start data transmission. The stop transmit of data subroutine includes a first module 526 that commands the wireless transceiver to stop transmission of data, and a second module 528 that commands the data acquisition subsystem to stop acquiring data.

Electrode system initialization/Operations Management

[0067] The following is a pseudocode listing of system initialization and operations management routines for the base unit and the electrodes, as an alternative embodiment to the procedures of FIGs. 6 and 8.

Electrode power up / reactivation (battery attachment)

[0068]

```

        If no pre-stored channels is selected (first-time power up) or connection is in
reset mode
        Electrodes scan pre-set dedicated channel(s) for input signaling from
base unit.
        Else
        Start using pre-stored temporary transmit and receive channels for
messaging.
        End
    
```

Base Unit power up - reactivation

[0069]

```

        If no pre-stored channels are selected, or reset mode connection is requested,
or current traffic
        Channel interference is high
        Base Unit scans and selects a low-noise temporary transmit traffic
channel for all
        electrodes to transmit signaling on.
        Base Unit scans and selects a low-noise temporary receive traffic
channel for all
        electrodes to receive signaling on.
        Else
        Use previously stored transmit and receive channels
        End

        Base Unit periodically transmits signaling on pre-set dedicated channel(s) if electrode
is not registered or disconnected, and listens (scans) for electrode response. All other
transmission occurs on temporary traffic channels.
        Send "keep-alive" signaling and scan for response from an electrode, then
        For each electrode required for current configuration settings, once
detected (connection
        established)
        Electrode is assigned a temporary identifier.
        Electrode is associated with patient demographics info.
        Electrode is assigned a functional or anatomic position in the
monitoring
    
```

system.
 Electrode is requested to move to a new temporary transmit
 traffic frequency
 channel and time slot.
 Electrode is requested to move to a new temporary receive
 traffic frequency
 channel (and time slot if any).
 End
 End
 If all required electrodes are registered and connected
 Electrodes are assigned a (default/selected) data acquisition rate.
 Electrodes are assigned a (default/selected) amplification gain setting.
 Electrodes are assigned a (default/selected) filter band setting.
 Run diagnostic system test to ensure quality of recordings
 Adjust amplification gain on electrodes until suitable signal strength is
 obtained.
 Adjust filter selection until good signal/noise ratio is obtained.
 Run synchronization tests to ensure system is properly synchronized
 for transfer
 of data test patterns.
 End
 Start data acquisition and monitoring.
 End

Base Unit may do any of the following during operation monitoring

[0070]

Monitors and tracks for interference and bit error rate on current channel
 setting, if too many
 errors
 request retransmission of data in error due to interference, or if too
 many errors then
 select and move to new temporary transmit and/or receive channels,
 Stops / restarts data acquisition for measured signals.
 Senses signal strength and re-adjust signal amplification gain dynamically to
 enable good
 resolution on the A/D channels.
 Interrupts data acquisition for reconfiguration or re-initialization procedures.
 Switches electrode(s) into power saving mode or reactivates electrode(s)
 operation.

[0071] Persons skilled in the art will appreciate that the details of the presently preferred embodiment described herein can be changed and modified without departure from the scope of the invention. The system 10 is readily adapted to acquiring other types of physiologic, chemical, physical or electrical processes, such as temperature, blood pressure, glucose, respiratory parameters, etc. The wireless sensors could be either placed on the patient's body or implanted. In this case, the wireless transceiver may connect to a different type of physiologic sensor which converts a measured parameter to a voltage (or this functionality could be incorporated in the wireless transceiver assembly) and transmits the signal to a base unit. This true scope is to be determined by reference to the appended claims.

Claims

1. A method for medical monitoring in a wireless system, the wireless system having a base unit (18) and at least one wireless sensor for connection to a patient's (12) body, the method comprising:

providing said wireless sensor with a transceiver assembly (20) for transmitting and receiving wireless communications with said base unit (18);
 providing the base unit (18) with a wireless transceiver (54) for transmitting and receiving wireless communications with said sensors, said wireless communications including commands; and

providing a set of instructions executable in said base unit (18) wherein said base unit (18) may issue said commands to said transceiver assembly (20) in response to the execution of said instructions, said transceiver assembly (20) responding to said commands in accordance with instructions stored in said transceiver;

wherein said commands from said base unit (18) and responses to said commands from said transceiver assembly allow said base unit (18) to remotely manage and configure said transceiver assembly (20) in real time either prior to or during a period of time in which said transceiver assembly (20) is acquiring physiologic signals from said patient (12) and transmitting data corresponding to said physiologic signals to said base unit (18); wherein said commands include an assignment of an identification number of said wireless transceiver and an assignment of a functional position of said wireless sensors on said patient (12).

2. The method of claim 1, wherein said commands comprise a data acquisition sampling rate command, and wherein said transceiver assembly (20) configures circuitry in said transceiver assembly sampling data acquired from said wireless sensor in response to said data acquisition sampling rate command.

3. The method of claim 1, wherein said command comprises a filter band selection command, and wherein said transceiver assembly (20) selects an anti-aliasing filter in said transceiver assembly (20) in response to said filter band selection command.

4. The method of claim 1, wherein said transceiver assembly (20) further comprises a battery (45) and wherein said transceiver assembly (20) sends a low battery detection message to said base unit (18) when the level in said battery (45) falls below a predetermined threshold.

5. The method of claim 1, wherein said command comprises a power saving mode command, and wherein said transceiver assembly (20) changes a state of battery (45) consumption in said transceiver assembly (20) to a power saving mode in response to said power saving mode command.

6. The method of claim 1, wherein said command comprises a start data transmission command, and wherein said transceiver assembly (20) commences transmission of said data to said base unit (18) in response to said start data transmit command.

7. The method of claim 6, wherein said data is transmitted to said base unit (18) in time slots and in a frequency channel assigned to said transceiver assembly (20) from said base unit (18).

8. The method of claim 1, wherein said command comprises a diagnostic test initiation command, said transceiver assembly (20) commencing a predetermined diagnostic test routine and sending diagnostic test data to said base unit (18) in response to said diagnostic test initiation command.

9. The method of claim 1, wherein said command comprises a data acquisition subsystem audit command, said transceiver assembly (20) transmitting an audit of current data acquisition subsystem configuration parameters in response to said data acquisition subsystem audit command.

10. The method of claim 1, wherein said commands comprise a set of commands establishing a registration of said transceiver assembly (20) with said base unit (18), said set of commands including an assignment of an identification number of said wireless transceiver (54), an assignment of functional position of said wireless electrode on said patient (12) and an assignment of a base unit (18) identification to said transceiver assembly (20).

11. The method of claim 1, wherein said wireless sensors comprise a plurality of individual wireless electrodes, each associated with one of said transceiver assemblies (20), and wherein said plurality of wireless electrodes, transceiver assemblies (20) and said base unit (18) comprise a wireless electrocardiogram data acquisition system.

12. A wireless electrocardiogram data acquisition system, comprising:

a set of wireless sensors for attachment to a patient's (12) body, each of said wireless sensors coupled to a transceiver assembly (20) for transmitting and receiving wireless communications;
a base unit (18) comprising a wireless transceiver (54) for transmitting and receiving wireless communications with said transceiver assemblies (20), said wireless communications including a set of commands for said transceiver assemblies (20);

said base unit (18) further comprising a memory (60) and computing platform executing a set of instructions wherein said base unit (18) may issue said commands to individual ones of said transceiver assemblies (20) in response to the execution of said instructions;

each of said transceiver assemblies (20) further comprising a memory (36) and a computing platform for responding to said commands in accordance with instructions stored in said memory (36) in said transceiver assembly(20);

wherein said commands from said base unit (18) and responses to said commands from said transceiver assemblies (20) allow said base unit (18) to remotely and individually manage and configure each of said transceiver assemblies (20) in real time either prior to or during a period of time in which said transceiver assemblies (20) are acquiring physiologic electrocardiogram signals from said patient (12) and transmitting data corresponding to said physiologic electrocardiogram signals to said base unit (18);

wherein said commands include an assignment of an identification number of said wireless transceiver and an assignment of a functional position of said wireless sensors on said patient (12).

13. The system of claim 12, wherein said commands comprise a data acquisition sampling rate command, and wherein said transceiver assemblies (20) configure circuitry in said transceiver assembly (20) sampling data acquired from said wireless electrode in response to said data acquisition sampling rate command.

14. The system of claim 12, wherein said command comprises a filter band selection command, and wherein each of said transceiver assemblies (20) selects an anti-aliasing filter in said transceiver assembly (20) in response to said filter band selection command.

15. The system of claim 12, wherein said transceiver assembly (20) further comprises a battery (35) and wherein each of said transceiver assemblies (20) sends a low battery detection message to said base unit (18) when the level in said battery falls to a predetermined threshold.

16. The system of claim 12, wherein said command comprises a power saving mode command, and wherein said transceiver assemblies (20) change a state of battery consumption in said transceiver assembly (20) to a power saving mode in response to said power saving mode command.

17. The system of claim 12, wherein said command comprises a start data transmission command, and wherein said transceiver assemblies (20) commences transmission of said data to said base unit (18) in response to said start data transmission command.

18. The system of claim 12, wherein said data is transmitted to said base unit (18) in time slots and in a frequency channel assigned to said transceiver assembly (20) from said base unit (18).

19. The system of claim 12, wherein said command comprises a diagnostic test initiation command, said transceiver assemblies commencing a predetermined diagnostic test routine and sending diagnostic test data to said base unit (18) in response to said diagnostic test initiation command.

20. The system of claim 12, wherein said commands comprise a data acquisition subsystem audit command, said transceiver assemblies (20) transmitting an audit of current data acquisition subsystem configuration parameters in response to said data acquisition subsystem audit command.

21. The system of claim 12, wherein said commands comprise a set of commands establishing a registration of said transceiver assemblies (20) with said base unit (18), said set of commands include an assignment of an identification number of said transceiver assemblies (20), an assignment of a functional position of said wireless electrode on said patient (12) and the assignment of a base unit (18) identification to said transceiver assembly (20).

22. The system of claim 12, wherein said commands comprise a set of commands establishing a signal loss recovery procedure by which said base unit (18) may reestablish communication with one of said transceiver assemblies (20) in the event of a total signal loss from said transceiver assembly (20).

23. A machine-readable storage medium containing a set of instructions executable in a base unit (18) for over-the air programming of a plurality of wireless transceivers (20), each of the said wireless transceivers (20) adapted to couple to a sensor for connection to a patient's (12) body;

said set of instructions generating commands for remotely configuring and managing the acquisition of physiologic signals from said patient's (12) body and transmission of said physiologic signals from said wireless transceivers (20) to said base unit (18) in real time either prior to or during a period in which said physiologic signals are being acquired;

wherein said commands include an assignment of an identification number of said wireless transceiver and an assignment of a functional position of said wireless sensors on said patient (12).

24. The machine-readable storage medium of claim 23, wherein said wireless transceivers (20) comprise a machine-readable storage medium containing a set of instructions for responding to the commands.

25. The machine-readable storage medium of claim 23, wherein said set of instructions prompt said base unit (18) to generate a set of registration commands and wherein said wireless transceivers (20) comprise a machine-readable storage medium containing a set of instructions for responding to said set of registration instructions.

26. The machine-readable storage medium of claim 23, wherein said set of instructions prompt said base unit (18) to generate a set of signal loss recovery commands and wherein said wireless transceivers (20) comprise a machine-readable storage medium containing a set of instructions for responding to said set of signal loss recovery commands.

27. The machine-readable storage medium of claim 23, wherein said set of instructions prompt said base unit (18) to configure the data transmission properties of said wireless transceivers (20).

28. The machine-readable storage medium of claim 23, wherein said set of instructions include a base unit (18) configuration routine wherein said base unit (18) programs patient (12) identification and position location information into said wireless transceiver assembly (20).

Patentansprüche

1. Verfahren zur medizinischen Überwachung in einem drahtlosen System, wobei das drahtlose System eine Basiseinheit (18) und mindestens einen drahtlosen Sensor zur Verbindung mit dem Körper eines Patienten (12) aufweist, wobei das Verfahren Folgendes umfasst:

Ausstatten des drahtlosen Sensors mit einer Transceiveranordnung (20) zur Übertragung und zum Empfang von drahtlosen Kommunikationen mit der Basiseinheit (18);

Ausstatten der Basiseinheit (18) mit einem drahtlosen Transceiver (54) zur Übertragung und zum Empfang von drahtlosen Kommunikationen mit den Sensoren, wobei die drahtlosen Kommunikationen Befehle umfassen; und Bereitstellen eines Satzes von Anweisungen, die in der Basiseinheit (18) ausführbar sind, wobei die Basiseinheit (18) die Befehle ansprechend auf die Ausführung der Anweisungen an die Transceiveranordnung (18) ausgeben kann, wobei die Transceiveranordnung (20) gemäß von dem Transceiver gespeicherten Anweisungen auf die Befehle antwortet;

wobei die Befehle von der Basiseinheit (18) und die Antworten auf die Befehle von der Transceiveranordnung der Basiseinheit (18) ermöglichen, die Transceiveranordnung in Echtzeit entweder vor oder während einer Zeitdauer, in der die Transceiveranordnung (20) physiologische Signale von dem Patienten (12) empfängt und die den physiologischen Signalen entsprechenden Daten an die Basiseinheit (18) überträgt, fern zu verwalten und zu konfigurieren;

wobei die Befehle eine Zuweisung einer Kennnummer des drahtlosen Transceivers und eine Zuweisung einer Kennnummer einer funktionalen Position der drahtlosen Sensoren auf dem Patienten (12) umfassen.

2. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** die Befehle einen Datenerfassungs-Abstraten-Befehl aufweisen, und

wobei die Transceiveranordnung (20) Schaltungen in der Transceiveranordnung, die von dem drahtlosen Sensor erfasste Daten abtasten, ansprechend auf den Datenerfassungs-Abstraten-Befehl konfiguriert.

3. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** der Befehl einen Filterbandauswahlbefehl umfasst, und wobei die Transceiveranordnung (20) einen Kantenglättungs- bzw. Anti-Aliasing-Filter in der Transceiveranordnung (20) ansprechend auf den Filterband-Auswahlbefehl auswählt.

4. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** die Transceiveranordnung (20) des Weiteren eine Batterie (45) aufweist, und wobei die Transceiveranordnung (20) eine schwache-Batterie-Erfassungs-Nachricht an die Basiseinheit (18) sendet, wenn der Pegel der Batterie (45) unter einen vorher festgelegten Schwellenwert fällt.
5. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** der Befehl einen Stromsparmodusbefehl aufweist, und wobei die Transceiveranordnung (20) eine Batterie (45) verbrauchsstatus in der Transceiveranordnung (20) ansprechend auf den Stromsparmodusbefehl in einen Stromsparmodus ändert.
6. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** der Befehl einen Beginne-Datenübertragungs-Befehl aufweist, und
wobei die Transceiveranordnung (20) die Übertragung der Daten an die Basiseinheit (18) ansprechend auf den Beginne-Datenübertragungs-Befehl einleitet.
7. Verfahren nach Anspruch 6, **dadurch gekennzeichnet, dass** die Daten in Zeitschlitzten sowie in einem Frequenzkanal, die der Transceiveranordnung von der Basiseinheit (18) zugewiesen werden, an die Basiseinheit (18) übertragen werden.
8. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** der Befehl einen Diagnoseuntersuchungseinleitungsbefehl umfasst, wobei die Transceiveranordnung (20) eine vorher festgelegte Diagnoseuntersuchungsroutine einleitet und Diagnoseuntersuchungsdaten ansprechend auf den Diagnoseuntersuchungseinleitungsbefehl an die Basiseinheit (18) sendet.
9. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** der Befehl einen Datenerfassungs-Untersystemprüfungsbefehl aufweist, wobei die Transceiveranordnung (20) eine Prüfung von gegenwärtigen Datenerfassungs-Untersystemkonfigurationsparametern ansprechend auf den Datenerfassungs-Untersystemprüfungsbefehl überträgt.
10. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** die Befehle eine Reihe von Befehlen aufweisen, die eine Registrierung der Transceiveranordnung (20) an der Basiseinheit (18) durchführen, wobei die Reihe von Befehlen eine Zuweisung einer Kennnummer des drahtlosen Transceivers (54), eine Zuweisung der funktionalen Position der drahtlosen Elektrode auf dem Patienten (12) und eine Zuweisung einer Basiseinheiten (18) kennung zu der Transceiveranordnung (20) umfasst.
11. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** die drahtlosen Sensoren eine Vielzahl von einzelnen drahtlosen Elektroden umfassen, von denen jede einer der Transceiveranordnungen (20) zugehörig ist, und wobei die Vielzahl der drahtlosen Elektroden, die Transceiveranordnungen (20) und die Basiseinheit (18) ein drahtloses Elektrokardiogramm-Datenerfassungssystem umfassen.
12. Drahtloses Elektrokardiogramm-Datenerfassungssystem, welches Folgendes umfasst:

eine Reihe von drahtlosen Sensoren zur Befestigung an dem Körper eines Patienten (12), wobei jeder der drahtlosen Sensoren zum Übertragen und Empfangen von drahtlosen Kommunikationen mit einer Transceiveranordnung (20) gekoppelt ist;
eine Basiseinheit (18), die einen drahtlosen Transceiver (54) zum Übertragen und Empfangen von drahtlosen Kommunikationen mit den Transceiveranordnungen (20) aufweist, wobei die drahtlosen Kommunikationen eine Reihe von Befehlen für die Transceiveranordnungen (20) umfassen;

wobei die Basiseinheit (18) des Weiteren einen Speicher (60) und eine Berechnungsplattform zum Ausführen einer Reihe von Anweisungen aufweist, wobei die Basiseinheit (18) ansprechend auf die Ausführung der Anweisungen Befehle an einzelne der Transceiveranordnungen (20) ausgeben kann;
wobei jede der Transceiveranordnungen (20) des Weiteren einen Speicher (36) und eine Berechnungsplattform zum Antworten auf die Befehle gemäß von in dem Speicher (36) in der Transceiveranordnung (20) gespeicherten Anordnungen aufweist;
wobei die Befehle von der Basiseinheit (18) und die Antworten auf die Befehle von den Transceiveranordnungen (20) der Basiseinheit (18) ermöglichen, jede der Transceiveranordnungen (20) in Echtzeit vor oder während einer Zeitdauer, in der die Transceiveranordnungen (20) physiologische Elektrokardiogrammsignale von dem Patienten (12) erfassen und den physiologischen Elektrokardiogrammsignalen entsprechende Daten an die Basiseinheit (18) übertragen, fern- und einzeln zu verwalten und zu konfigurieren;

wobei die Befehle eine Zuweisung einer Kennnummer des drahtlosen Transceivers und eine Zuweisung einer funktionalen Position der drahtlosen Sensoren auf dem Patienten (12) umfassen.

- 5 13. System nach Anspruch 12, **dadurch gekennzeichnet, dass** die Befehle einen Datenerfassungs-Abstratenbefehl umfassen, und wobei die Transceiveranordnungen (20) Schaltungen in den Transceiveranordnungen (20), die von der drahtlosen Elektrode erfasste Daten abtasten, ansprechend auf den Datenerfassungs-Abstratenbefehl konfigurieren.
- 10 14. System nach Anspruch 12, **dadurch gekennzeichnet, dass** der Befehl einen Filterbandauswahlbefehl umfasst, und wobei jede der Transceiveranordnungen (20) ansprechend auf den Filterbandauswahlbefehl einen Kantenglättungs- bzw. Anti-Aliasing-Filter in der Transceiveranordnung (20) auswählt.
- 15 15. System nach Anspruch 12, **dadurch gekennzeichnet, dass** die Transceiveranordnung (20) des weiteren eine Batterie (35) aufweist, und wobei jede der Transceiveranordnungen (20) eine schwache-Batterie-Erfassungs-Nachricht an die Basiseinheit (18) sendet, wenn der Pegel der Batterie auf einen vorher festgelegten Schwellenwert fällt.
- 20 16. System nach Anspruch 12, **dadurch gekennzeichnet, dass** der Befehl einen Stromsparmodesbefehl aufweist, und wobei die Transceiveranordnungen (20) einen Batterieverbrauchszustand in der Transceiveranordnung (20) ansprechend auf den Stromsparmodesbefehl in einen Stromsparmodes ändern.
- 25 17. System nach Anspruch 12, **dadurch gekennzeichnet, dass** der Befehl einen Beginne-Datenübertragungs-Befehl aufweist, und wobei die Transceiveranordnungen (20) die Übertragung der Daten an die Basiseinheit (18) ansprechend auf den Beginne-Datenübertragungs-Befehl einleiten.
- 30 18. System nach Anspruch 12, **dadurch gekennzeichnet, dass** die Daten in Zeitschlitzten und in einem Frequenzkanal, die der Transceiveranordnung (20) von der Basiseinheit (19) zugeordnet werden, an die Basiseinheit (12) übertragen werden.
- 35 19. System nach Anspruch 12, **dadurch gekennzeichnet, dass** der Befehl einen Diagnoseuntersuchungseinleitungsbefehl aufweist, wobei die Transceiveranordnungen (20) eine vorher festgelegte Diagnoseuntersuchungsroutine einleiten und Diagnoseuntersuchungsdaten ansprechend auf den Diagnoseuntersuchungseinleitungsbefehl an die Basiseinheit (18) übertragen.
- 40 20. System nach Anspruch 12, **dadurch gekennzeichnet, dass** die Befehle einen Datenerfassungs-Untersystemprüfungsbefehl umfassen, wobei die Transceiveranordnungen (20) eine Prüfung gegenwärtiger Datenerfassungs-Untersystemkonfigurationsparameter ansprechend auf den Datenerfassungs-Untersystemprüfungsbefehl übertragen.
- 45 21. System nach Anspruch 12, **dadurch gekennzeichnet, dass** die Befehle eine Reihe von Befehlen aufweisen, die eine Registrierung der Transceiveranordnungen (20) an der Basiseinheit (18) durchführen, wobei die Reihe von Befehlen eine Zuweisung einer Kennnummer der Transceiveranordnungen (20), eine Zuweisung einer funktionalen Position der drahtlosen Elektrode auf dem Patienten (12) und der Zuweisung einer Basiseinheiten(18)kennung an die Transceiveranordnung (20) umfasst.
- 50 22. System nach Anspruch 12, **dadurch gekennzeichnet, dass** die Befehle eine Reihe von Befehlen umfassen, die ein Signalausfall-Wiederherstellungsverfahren einrichten, durch welches die Basiseinheit (18) die Kommunikation mit einer der Transceiveranordnungen (20) in dem Fall eines vollständigen Signalausfalls von der Transceiveranordnung (20) wiederherstellen kann.
- 55 23. Maschinenlesbares Speichermedium, welches eine Reihe von Anweisungen aufweist, die in einer Basiseinheit (18) zum over-the-air bzw. durch-die-Luft-Programmieren einer Vielzahl von drahtlosen Transceivern (18) ausführbar sind, wobei jeder der drahtlosen Transceiver (20) zum Koppeln an einen Sensor zur Verbindung mit dem Körper eines Patienten (12) angeordnet ist;
wobei die Reihe von Anweisungen Befehle zur Fernkonfigurierung und -verwaltung der Erfassung von physiologischen Signalen von dem Körper des Patienten (12) und der Übertragung der physiologischen Signale von den drahtlosen Transceivern (20) an die Basiseinheit (18) in Echtzeit entweder vor oder während einer Zeitdauer, in der die physiologischen Signale erfasst werden, erzeugen;
wobei die Befehle eine Zuweisung einer Kennnummer des drahtlosen Transceivers und eine Zuweisung einer

funktionalen Position der drahtlosen Sensoren auf dem Patienten (12) umfassen.

24. Maschinenlesbares Speichermedium nach Anspruch 23, **dadurch gekennzeichnet, dass** die drahtlosen Transceiver (20) ein maschinenlesbares Speichermedium, das einen Satz von Anweisungen zum Antworten auf die Befehle enthält, aufweisen.
25. Maschinenlesbares Speichermedium nach Anspruch 23, **dadurch gekennzeichnet, dass** der Satz von Anweisungen die Basiseinheit (18) veranlasst, eine Reihe von Registrierungsbefehlen zu erzeugen, und wobei die drahtlosen Transceiver (20) ein maschinenlesbares Speichermedium, das einen Satz von Anweisungen zum Antworten auf den Satz von Registrierungsanweisungen enthält, aufweisen.
26. Maschinenlesbares Speichermedium nach Anspruch 23, **dadurch gekennzeichnet, dass** der Satz von Anweisungen die Basiseinheit (18) veranlasst, eine Reihe von Signalausfall-Wiederherstellungsbefehlen zu erzeugen, und wobei die drahtlosen Transceiver (20) ein maschinenlesbares Speichermedium aufweisen, das eine Reihe von Anweisungen zum Antworten auf den Satz von Signalausfall-Wiederherstellungsbefehlen enthält.
27. Maschinenlesbares Speichermedium nach Anspruch 23, **dadurch gekennzeichnet, dass** die Reihe von Anweisungen die Basiseinheit (18) veranlasst, die Datenübertragungseigenschaften der drahtlosen Transceiver (20) zu konfigurieren.
28. Maschinenlesbares Speichermedium nach Anspruch 23, **dadurch gekennzeichnet, dass** die Reihe von Anweisungen eine Basiseinheit (18) konfigurationsroutine umfasst, wobei die Basiseinheit (18) die Kennung des Patienten (12) und Positionsstandortsinformationen in die drahtlose Transceiveranordnung (20) programmiert.

Revendications

1. Procédé de surveillance médicale dans un système sans fil, le système sans fil ayant une unité de base (18) et au moins un capteur sans fil pour une connexion au corps d'un patient (12), le procédé comprenant les étapes consistant à:
 - équiper ledit capteur sans fil d'un ensemble émetteur-récepteur (20) pour transmettre et recevoir des communications sans fil avec ladite unité de base (18);
 - équiper l'unité de base (18) d'un émetteur-récepteur sans fil (54) pour transmettre et recevoir des communications sans fil avec lesdits capteurs, lesdites communications sans fil comprenant des commandes; et
 - fournir un jeu d'instructions exécutables dans ladite unité de base (18), où ladite unité de base (18) peut émettre lesdites commandes vers ledit ensemble émetteur-récepteur (20) en réponse à l'exécution desdites instructions, ledit ensemble émetteur-récepteur (20) répondant auxdites commandes selon des instructions stockées dans ledit émetteur-récepteur;
 - dans lequel lesdites commandes de ladite unité de base (18) et réponses auxdites commandes dudit ensemble émetteur-récepteur permettent à ladite unité de base (18) de gérer et de configurer à distance ledit ensemble émetteur-récepteur (20) en temps réel soit avant soit pendant une période pendant laquelle ledit ensemble émetteur-récepteur (20) acquiert des signaux physiologiques dudit patient (12) et transmet des données correspondant auxdits signaux physiologiques à ladite unité de base (18);
 - dans lequel lesdites commandes comprennent une attribution d'un numéro d'identification dudit émetteur-récepteur sans fil et une attribution d'une position fonctionnelle desdits capteurs sans fil sur ledit patient (12).
2. Procédé selon la revendication 1, dans lequel lesdites commandes comprennent une commande de taux d'échantillonnage d'acquisition de données et dans lequel ledit ensemble émetteur-récepteur (20) configure des circuits dans ledit ensemble émetteur-récepteur échantillonnant des données acquises à partir du capteur sans fil en réponse à ladite commande de taux d'échantillonnage d'acquisition de données.
3. Procédé selon la revendication 1, dans lequel ladite commande comprend une commande de sélection de bande de filtre et dans lequel ledit ensemble émetteur-récepteur (20) sélectionne un filtre anti-repliement dans ledit ensemble émetteur-récepteur (20) en réponse à ladite commande de sélection de bande de filtre.
4. Procédé selon la revendication 1, dans lequel ledit ensemble émetteur-récepteur (20) comprend en outre une

batterie (45) et dans lequel ledit ensemble émetteur-récepteur (20) envoie un message de détection de batterie faible à ladite unité de base (18) lorsque le niveau de ladite batterie (45) chute en dessous d'un seuil prédéterminé.

5 5. Procédé selon la revendication 1, dans lequel ladite commande comprend une commande de mode d'économie de puissance et dans lequel ledit ensemble émetteur-récepteur (20) modifie un état de consommation de batterie (45) dans ledit ensemble émetteur-récepteur (20) en un mode d'économie de puissance en réponse à ladite commande de mode d'économie de puissance.

10 6. Procédé selon la revendication 1, dans lequel ladite commande comprend une commande de transmission de données de départ et dans lequel ledit ensemble émetteur-récepteur (20) commence la transmission desdites données à ladite unité de base (18) en réponse à ladite commande de transmission de données de départ.

15 7. Procédé selon la revendication 6, dans lequel lesdites données sont transmises à ladite unité de base (18) par tranche de temps et dans un canal de fréquence attribué audit ensemble émetteur-récepteur (20) à partir de ladite unité de base (18).

20 8. Procédé selon la revendication 1, dans lequel ladite commande comprend une commande d'initiation d'essai de diagnostic, ledit ensemble émetteur-récepteur (20) commençant un programme d'essai de diagnostic prédéterminé et envoyant des données d'essai de diagnostic à ladite unité de base (18) en réponse à ladite commande d'initiation d'essai de diagnostic.

25 9. Procédé selon la revendication 1, dans lequel ladite commande comprend une commande d'audit de sous-système d'acquisition de données, ledit ensemble émetteur-récepteur (20) transmettant un audit de paramètres de configuration de sous-système d'acquisition de données actuelles en réponse à ladite commande d'audit de sous-système d'acquisition de données.

30 10. Procédé selon la revendication 1, dans lequel lesdites commandes comprennent un jeu de commandes établissant un enregistrement dudit ensemble émetteur-récepteur (20) avec ladite unité de base (18), ledit jeu de commandes comprenant en tant qu'attribution d'un numéro d'identification dudit émetteur-récepteur sans fil (54), une attribution d'une position fonctionnelle de ladite électrode sans fil sur ledit patient (12) et une attribution d'une identification d'unité de base (18) audit ensemble émetteur-récepteur (20).

35 11. Procédé selon la revendication 1, dans lequel lesdits capteurs sans fil comprennent une pluralité d'électrodes sans fil individuelles, chacune associée à l'un desdits ensembles émetteurs-récepteurs (20), dans lequel ladite pluralité d'électrodes sans fil, les ensembles émetteurs-récepteurs (20) et ladite unité de base (18) comprennent un système d'acquisition de données d'électrocardiogramme sans fil.

12. Système d'acquisition de données d'électrocardiogramme sans fil, comprenant:

40 un jeu de capteurs sans fil pour une fixation au corps d'un patient (12), chacun desdits capteurs sans fil étant couplé à un ensemble émetteur-récepteur (20) pour transmettre et recevoir des communications sans fil;
une unité de base (18) comprenant un émetteur-récepteur sans fil (54) pour transmettre et recevoir des communications sans fil avec lesdits ensembles émetteurs-récepteurs (20), lesdites communications sans fil comprenant un jeu de commandes pour lesdits ensembles émetteurs-récepteurs (20);
45 ladite unité de base (18) comprenant en outre une mémoire (60) et une plateforme informatique exécutant un jeu d'instructions où ladite unité de base (18) peut émettre lesdites commandes vers lesdits ensembles émetteurs-récepteurs individuels (20) en réponse à l'exécution desdites instructions;
chacun desdits ensembles émetteurs-récepteurs (20) comprenant en outre une mémoire (36) et une plateforme informatique pour répondre auxdites commandes selon des instructions stockées dans ladite mémoire (36)
50 dans ledit ensemble émetteur-récepteur (20);

dans lequel lesdites commandes de ladite unité de base (18) et réponses auxdites commandes desdits ensembles émetteurs-récepteurs (20) permettent à ladite unité de base (18) de gérer et de configurer à distance et de manière individuelle chacun desdits ensembles émetteurs-récepteurs (20) en temps réel soit avant soit pendant une période pendant laquelle lesdits ensembles émetteurs-récepteurs (20) acquièrent des signaux d'électrocardiogramme physiologiques dudit patient (12) et transmettent des données correspondant auxdits signaux d'électrocardiogramme physiologiques à ladite unité de base (18);

dans lequel lesdites commandes comprennent une attribution d'un numéro d'identification dudit émetteur-récepteur

sans fil et une attribution d'une position fonctionnelle desdits capteurs sans fil sur ledit patient (12).

- 5 13. Système selon la revendication 12, dans lequel lesdites commandes comprennent une commande de taux d'échantillonnage d'acquisition de données et dans lequel lesdits ensembles émetteurs-récepteurs (20) configurent des circuits dans ledit ensemble émetteur-récepteur (20) échantillonnant des données acquises à partir de ladite électrode sans fil en réponse à ladite commande de taux d'échantillonnage d'acquisition de données.
- 10 14. Système selon la revendication 12, dans lequel ladite commande comprend une commande de sélection de bande de filtre et dans lequel chacun desdits ensembles émetteurs-récepteurs (20) sélectionne un filtre anti-repliement dans ledit ensemble émetteur-récepteur (20) en réponse à ladite commande de sélection de bande de filtre.
- 15 15. Système selon la revendication 12, dans lequel ledit ensemble émetteur-récepteur (20) comprend en outre une batterie (35) et dans lequel chacun desdits ensembles émetteurs-récepteurs (20) envoie un message de détection de batterie faible à ladite unité de base (18) lorsque le niveau de ladite batterie chute à un seuil prédéterminé.
- 20 16. Système selon la revendication 12, dans lequel ladite commande comprend une commande de mode d'économie de puissance et dans lequel lesdits ensembles émetteurs-récepteurs (20) modifient un état de consommation de batterie dans ledit ensemble émetteur-récepteur (20) en un mode d'économie de puissance en réponse à ladite commande de mode d'économie de puissance.
- 25 17. Système selon la revendication 12, dans lequel ladite commande comprend une commande de transmission de données de départ et dans lequel lesdits ensembles émetteurs-récepteurs (20) commencent la transmission desdites données à ladite unité de base (18) en réponse à ladite commande de transmission de données de départ.
- 30 18. Système selon la revendication 12, dans lequel lesdites données sont transmises à ladite unité de base (18) par tranche de temps et dans un canal de fréquence attribué audit ensemble émetteur-récepteur (20) à partir de ladite unité de base (18).
- 35 19. Système selon la revendication 12, dans lequel ladite commande comprend une commande d'initiation d'essai de diagnostic, lesdits ensembles émetteurs-récepteurs commençant un programme d'essai de diagnostic prédéterminé et envoyant des données d'essai de diagnostic à ladite unité de base (18) en réponse à ladite commande d'initiation d'essai de diagnostic.
- 40 20. Système selon la revendication 12, dans lequel lesdites commandes comprennent une commande d'audit de sous-système d'acquisition de données, lesdits ensembles émetteurs-récepteurs (20) transmettant un audit de paramètres de configuration de sous-système d'acquisition de données actuelles en réponse à ladite commande d'audit de sous-système d'acquisition de données.
- 45 21. Système selon la revendication 12, dans lequel lesdites commandes comprennent un jeu de commandes établissant un enregistrement desdits ensembles émetteurs-récepteurs (20) avec ladite unité de base (18), ledit jeu de commandes comprend une attribution d'un numéro d'identification desdits ensembles émetteurs-récepteurs (20), une attribution d'une position fonctionnelle de ladite électrode sans fil sur ledit patient (12) et l'attribution d'une identification d'unité de base (18) audit ensemble émetteur-récepteur (20).
- 50 22. Système selon la revendication 12, dans lequel lesdites commandes comprennent un jeu de commandes établissant une procédure de récupération de perte de signal par laquelle ladite unité de base (18) peut rétablir la communication avec l'un desdits ensembles émetteurs-récepteurs (20) dans le cas d'une perte de signal totale dudit ensemble émetteur-récepteur (20).
- 55 23. Support de stockage lisible par machine contenant un jeu d'instructions exécutables dans une unité de base (18) pour la programmation en liaison radio d'une pluralité d'émetteurs-récepteurs sans fil (20), chacun desdits émetteurs-récepteurs sans fil (20) étant adapté pour se coupler à un capteur pour une connexion au corps d'un patient (12); ledit jeu d'instructions générant des commandes pour configurer et gérer à distance l'acquisition de signaux physiologiques dudit corps de patient (12) et la transmission desdits signaux physiologiques desdits émetteurs-récepteurs sans fil (20) à ladite unité de base (18) en temps réel soit avant soit pendant une période pendant laquelle lesdits signaux physiologiques sont acquis; dans lequel lesdites commandes comprennent une attribution d'un numéro d'identification dudit émetteur-récepteur sans fil et une attribution d'une position fonctionnelle desdits capteurs sans fil sur ledit patient (12).

24. Support de stockage lisible par machine selon la revendication 23, dans lequel lesdits émetteurs-récepteurs sans fil (20) comprennent un support de stockage lisible par machine contenant un jeu d'instructions pour répondre aux commandes.

5 **25.** Support de stockage lisible par machine selon la revendication 23, dans lequel ledit jeu d'instructions incite ladite unité de base (18) à générer un jeu de commandes d'enregistrement et dans lequel lesdits émetteurs-récepteurs sans fil (20) comprennent un support de stockage lisible par machine contenant un jeu d'instructions pour répondre audit jeu d'instructions d'enregistrement.

10 **26.** Support de stockage lisible par machine selon la revendication 23, dans lequel ledit jeu d'instructions incite ladite unité de base (18) à générer un jeu de commandes de récupération de perte de signal et dans lequel lesdits émetteurs-récepteurs sans fil (20) comprennent un support de stockage lisible par machine contenant un jeu d'instructions pour répondre audit jeu de commandes de récupération de perte de signal.

15 **27.** Support de stockage lisible par machine selon la revendication 23, dans lequel ledit jeu d'instructions incite ladite unité de base (18) à configurer les propriétés de transmission de données desdits émetteurs-récepteurs sans fil (20).

28. Support de stockage lisible par machine selon la revendication 23, dans lequel ledit jeu d'instructions comprend un programme de configuration d'unité de base (18) dans lequel ladite unité de base (18) programme des informations d'emplacement de position et d'identification de patient (12) dans ledit ensemble émetteur-récepteur sans fil (20).

25

30

35

40

45

50

55

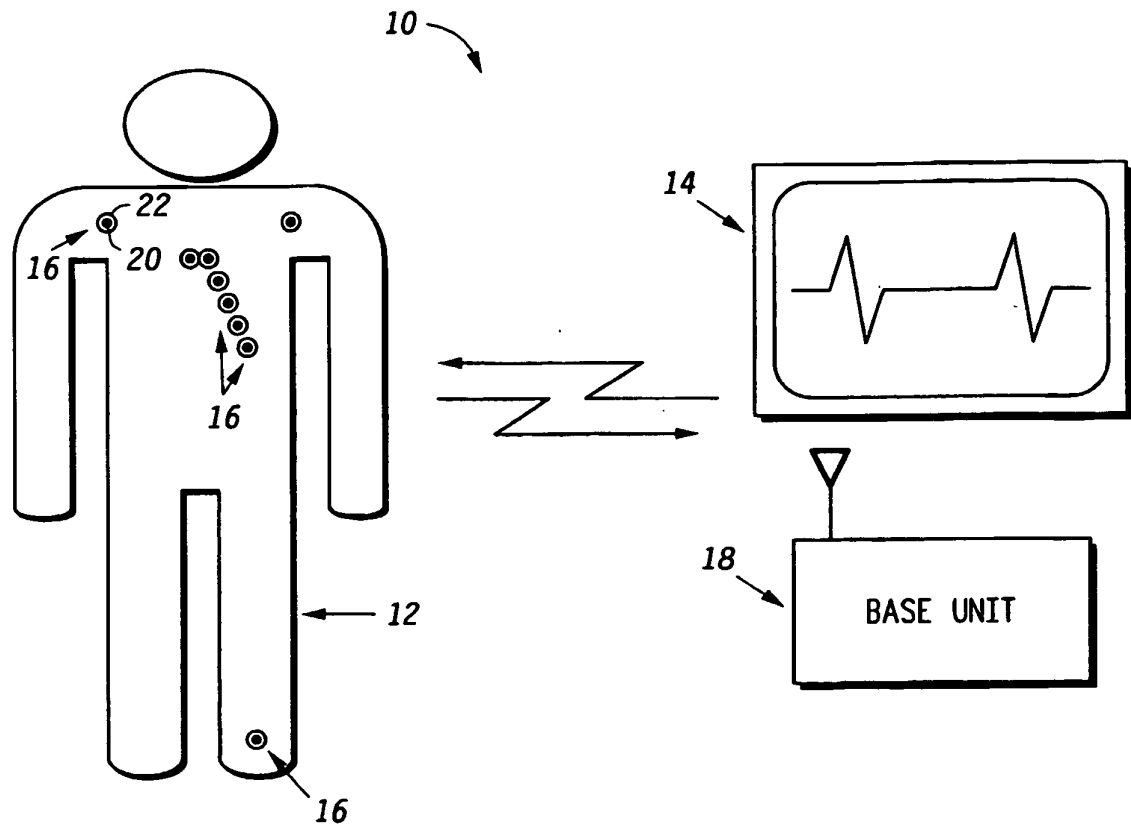


FIG. 1

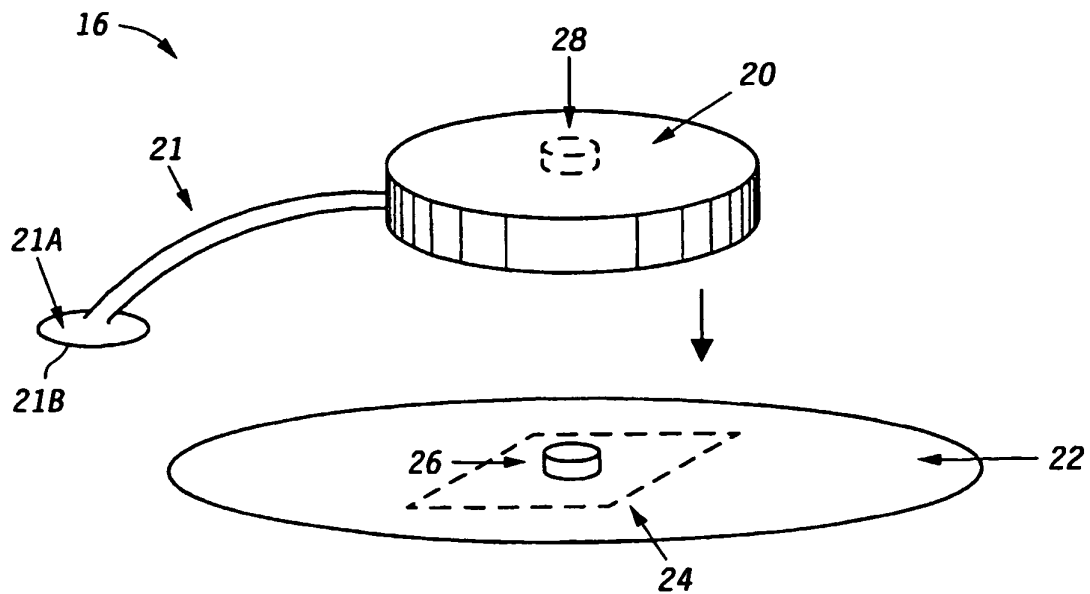


FIG. 2

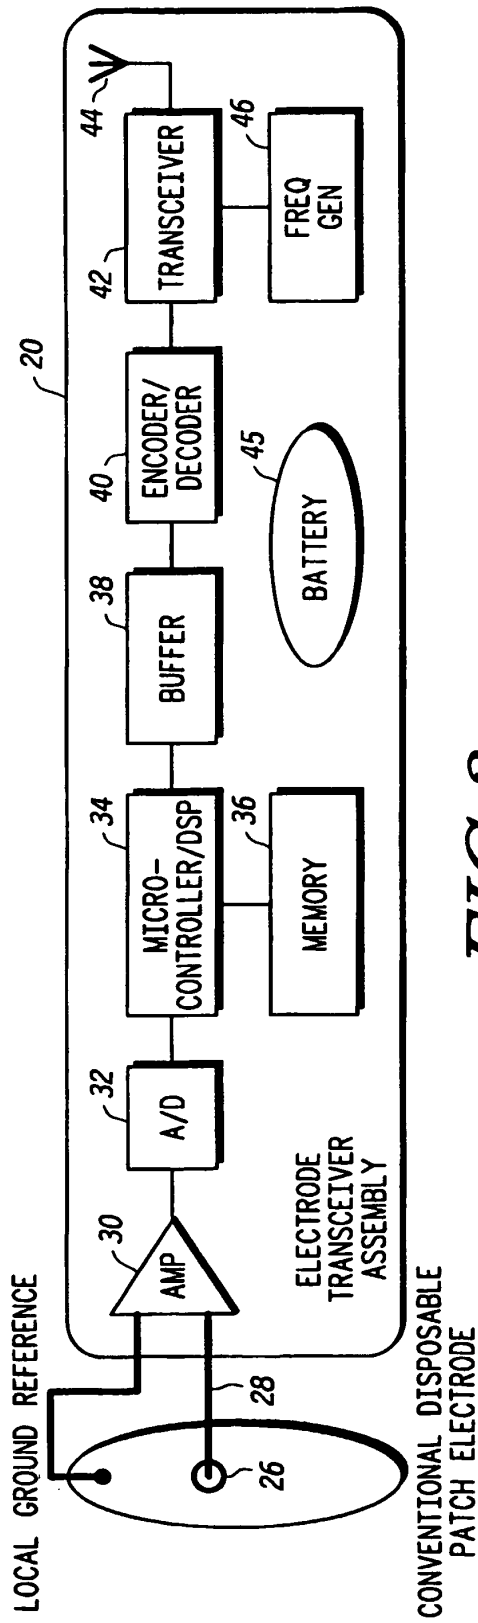


FIG. 3

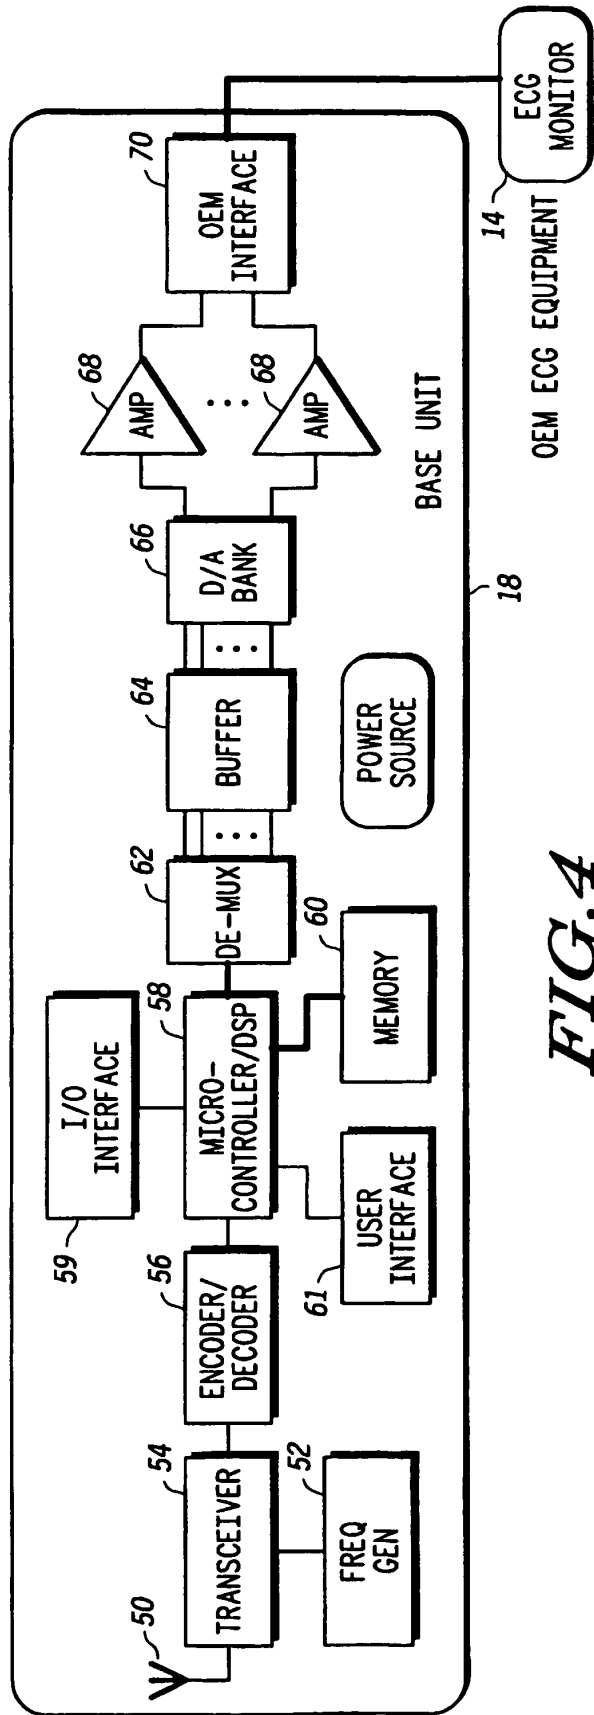


FIG. 4

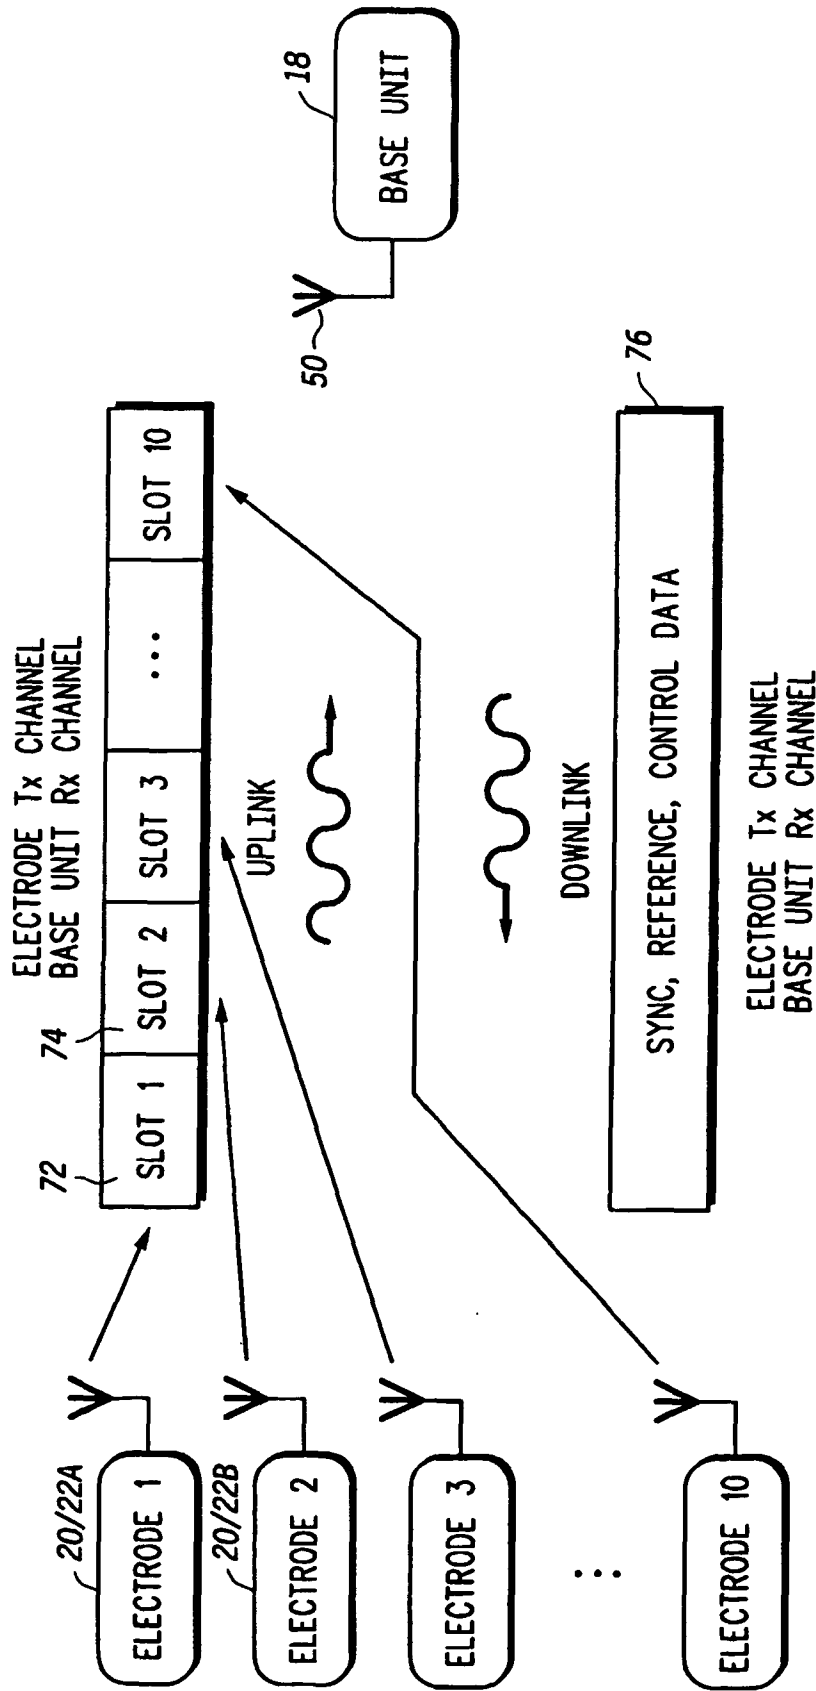
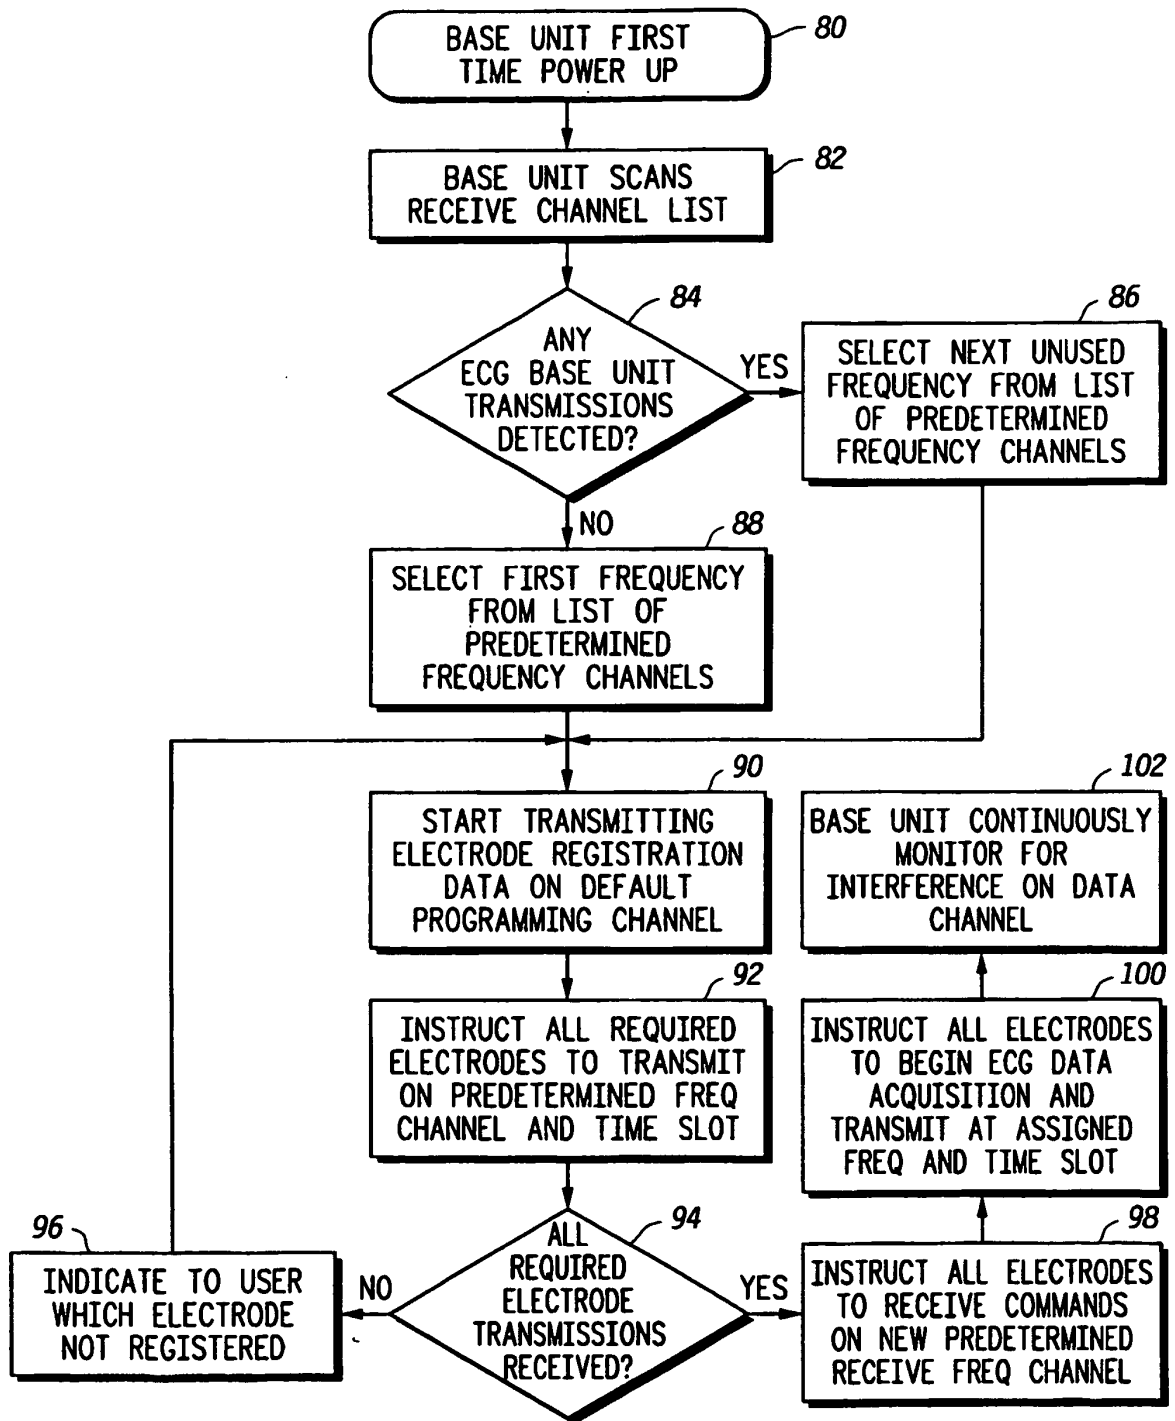


FIG.5

**FIG. 6**

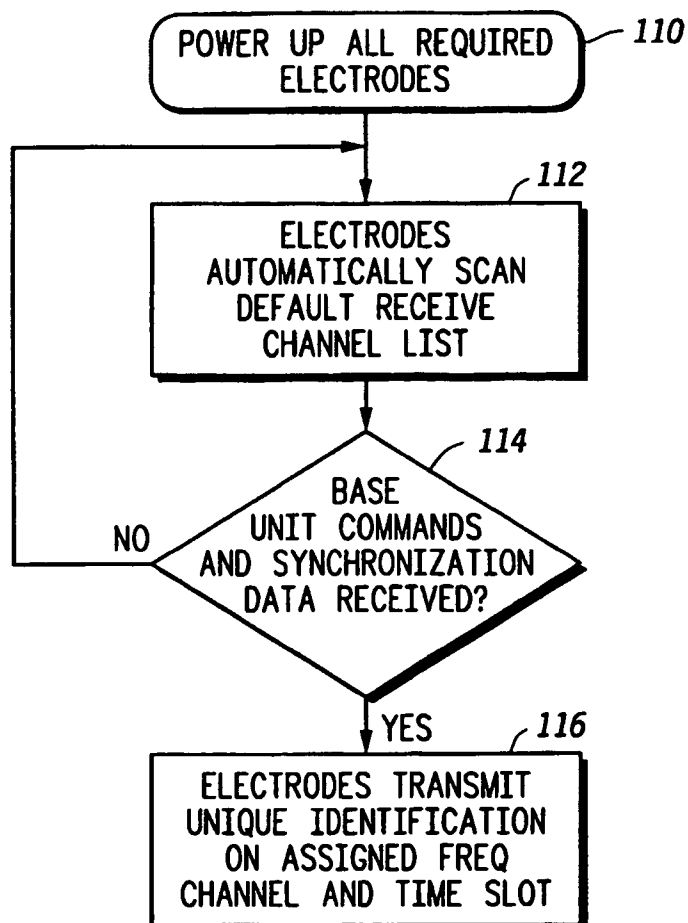
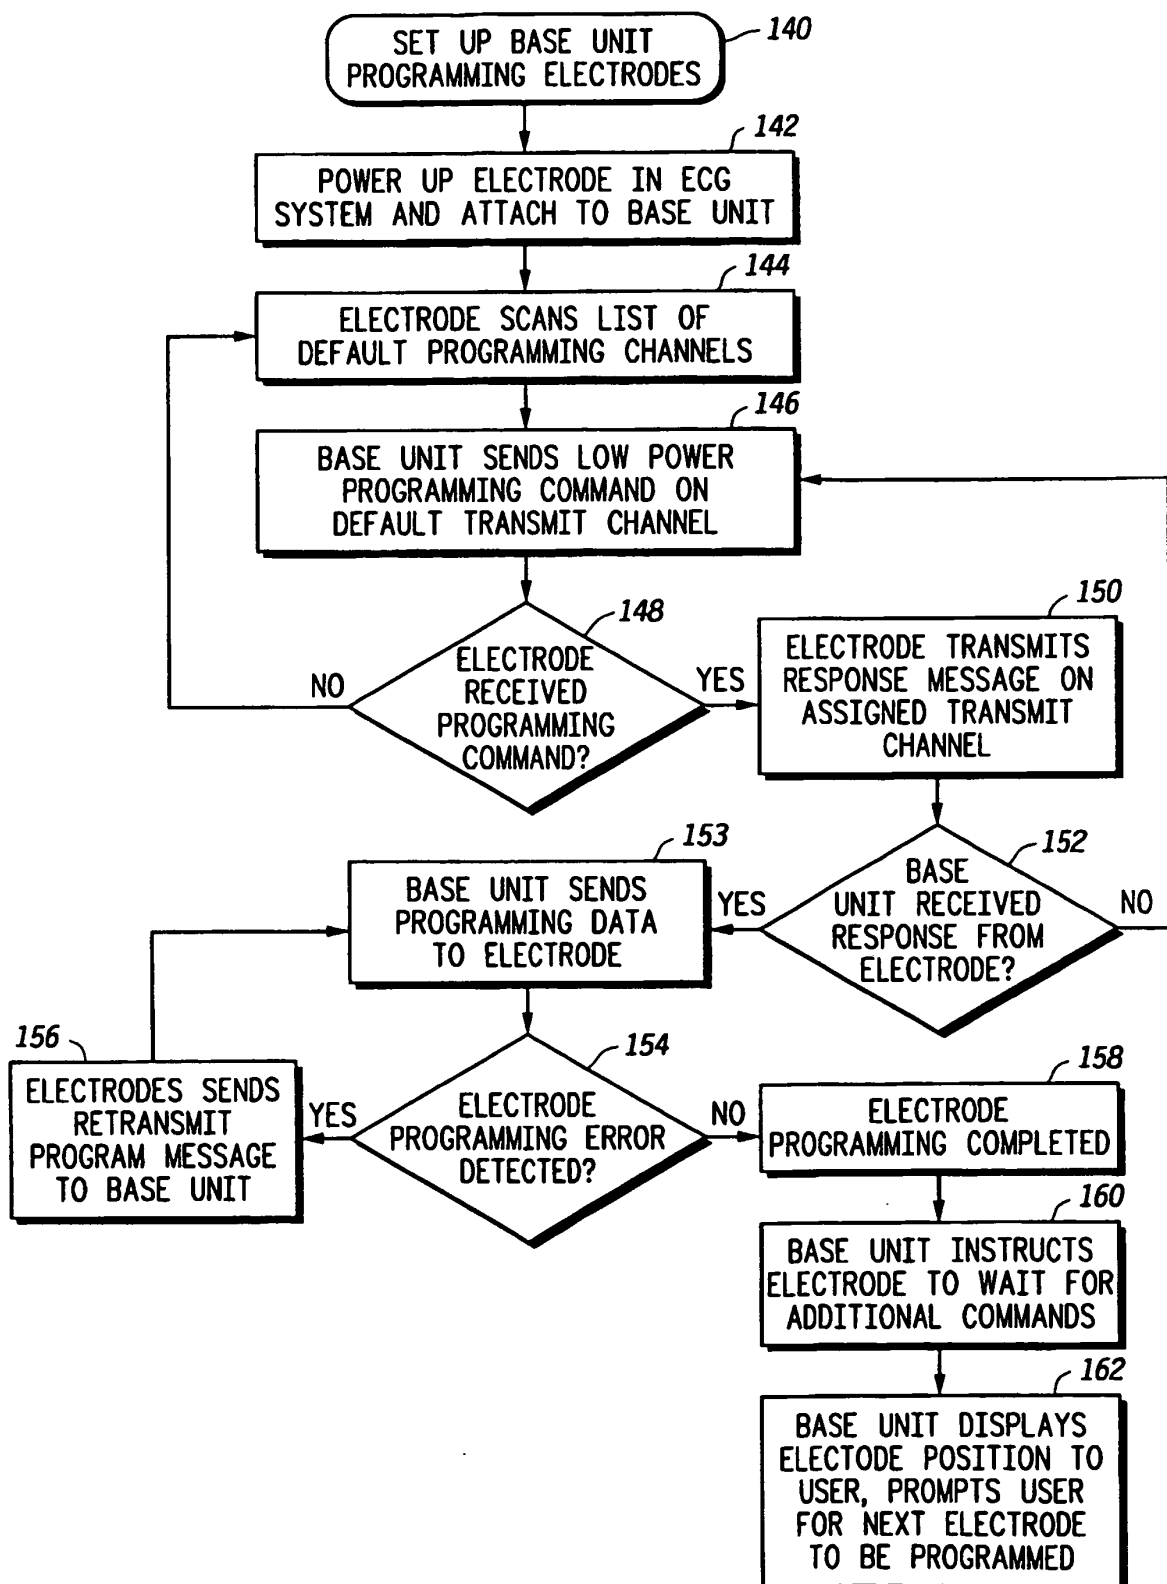


FIG. 7

*FIG. 8*

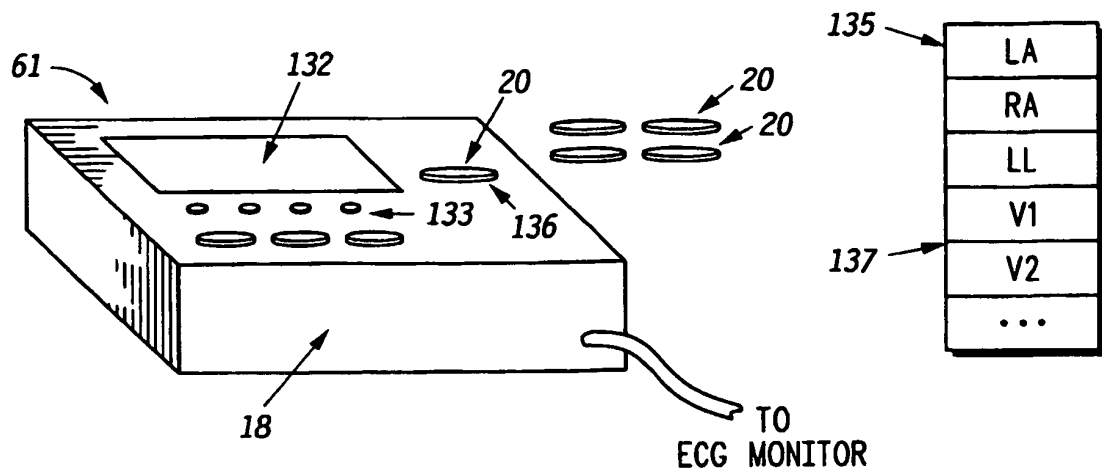


FIG. 9

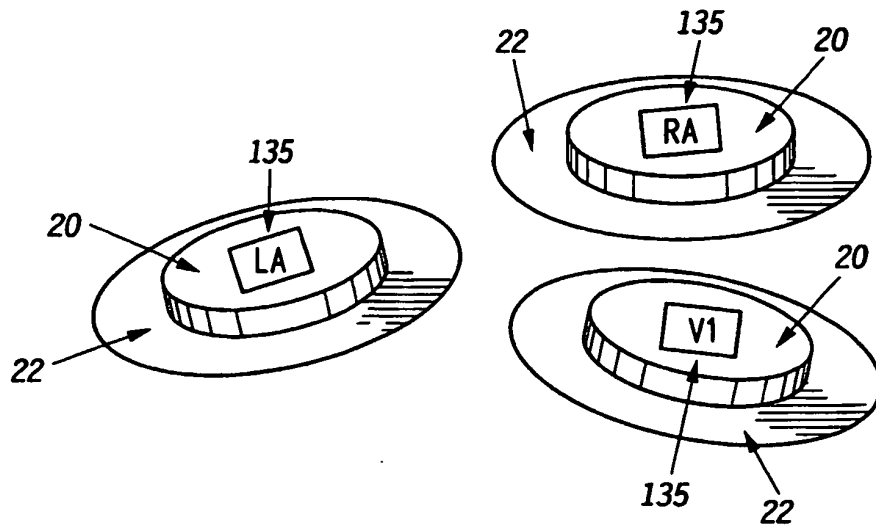


FIG. 10

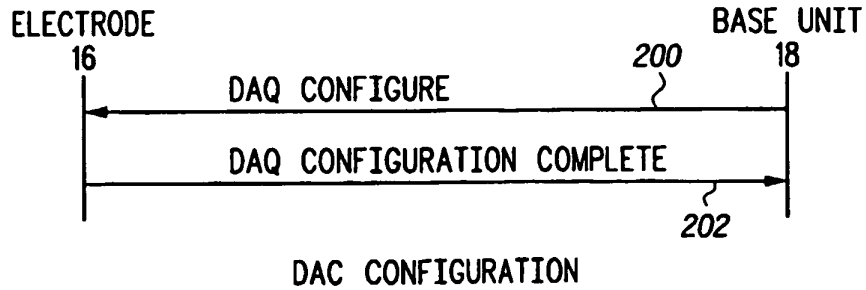


FIG.11

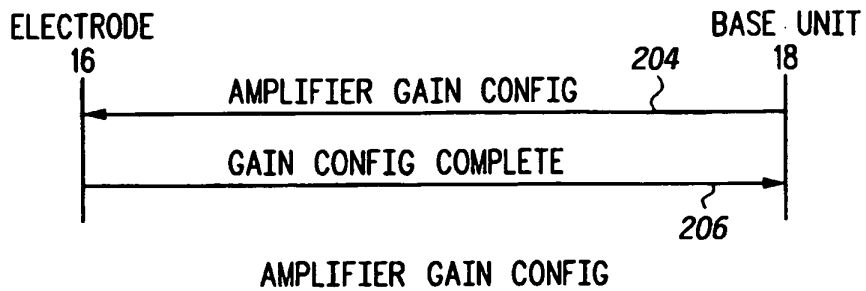


FIG.12

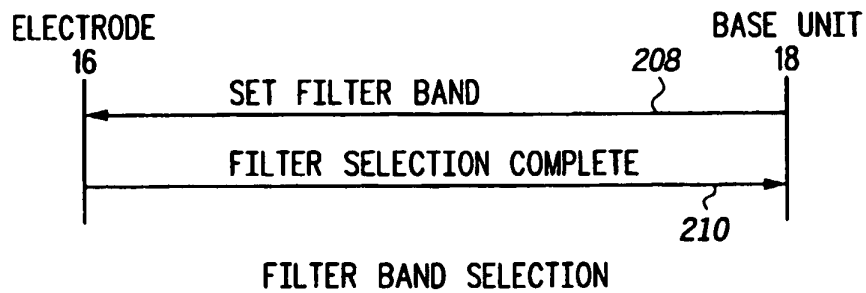


FIG.13

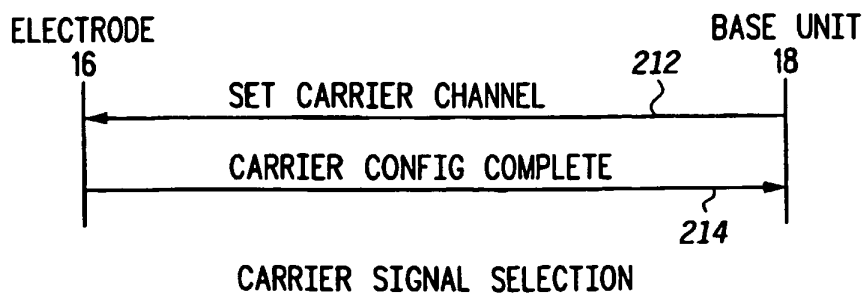


FIG.14

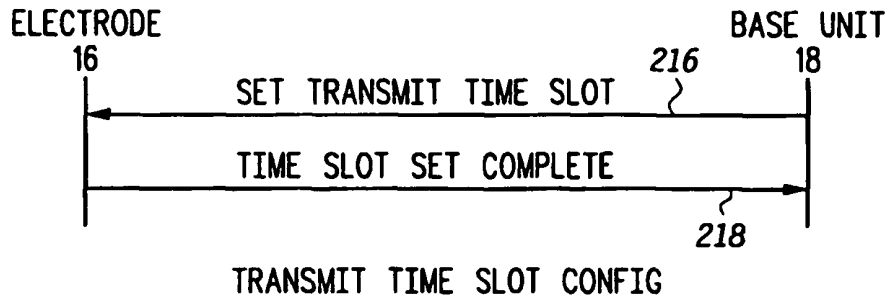


FIG.15

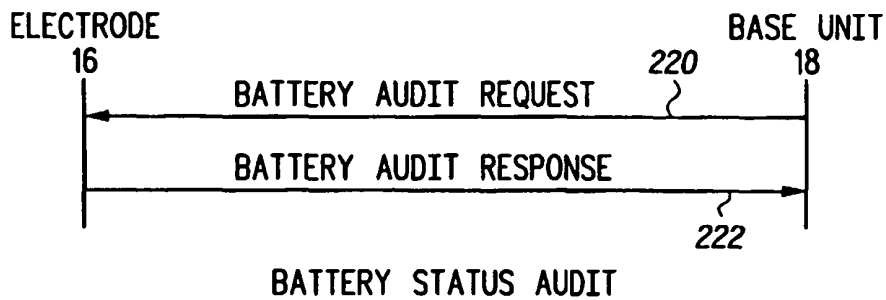


FIG.16

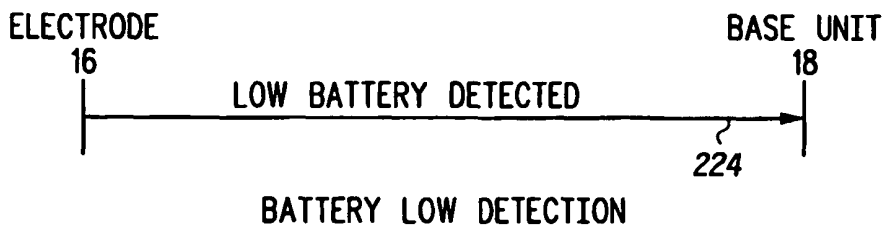


FIG.17

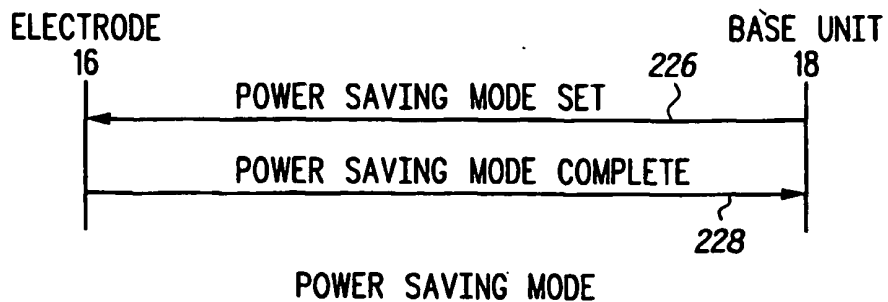


FIG.18

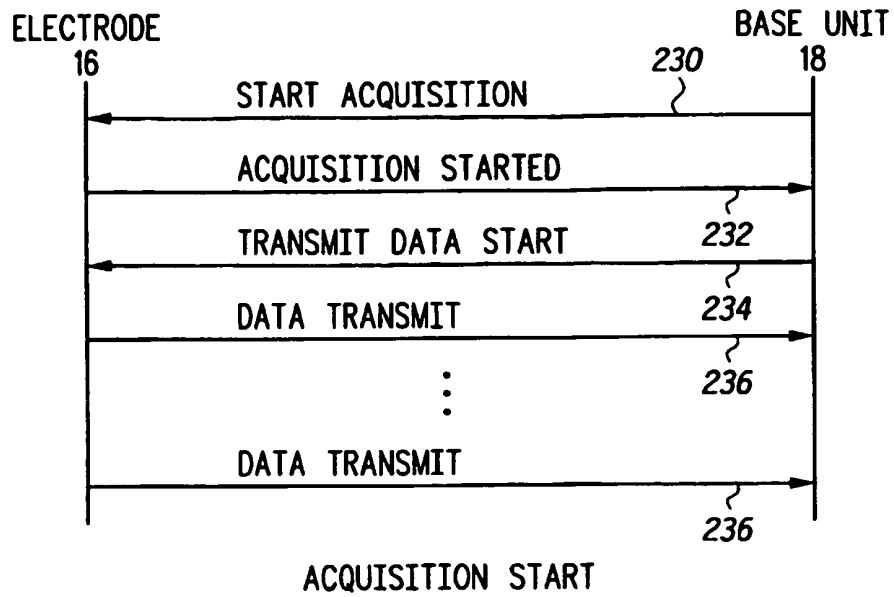


FIG.19

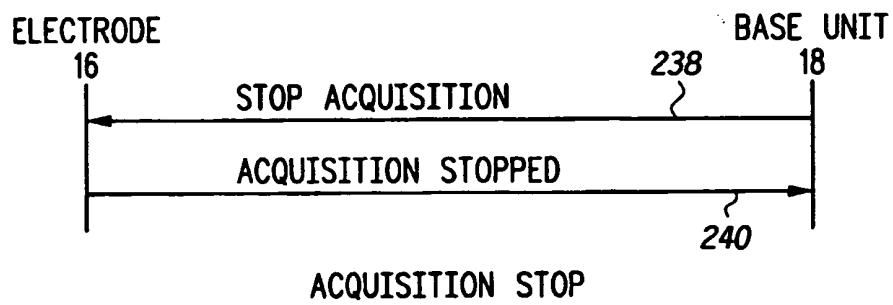


FIG.20

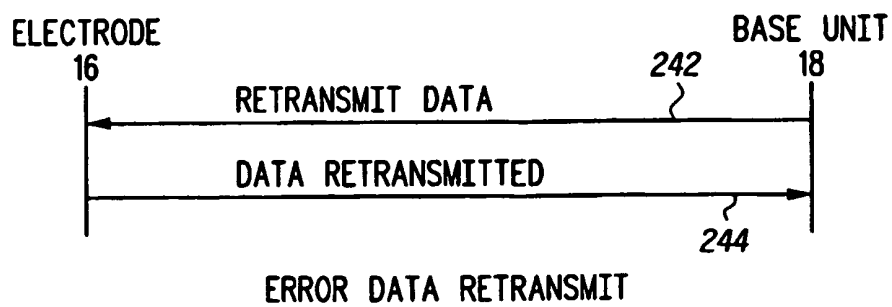


FIG.21

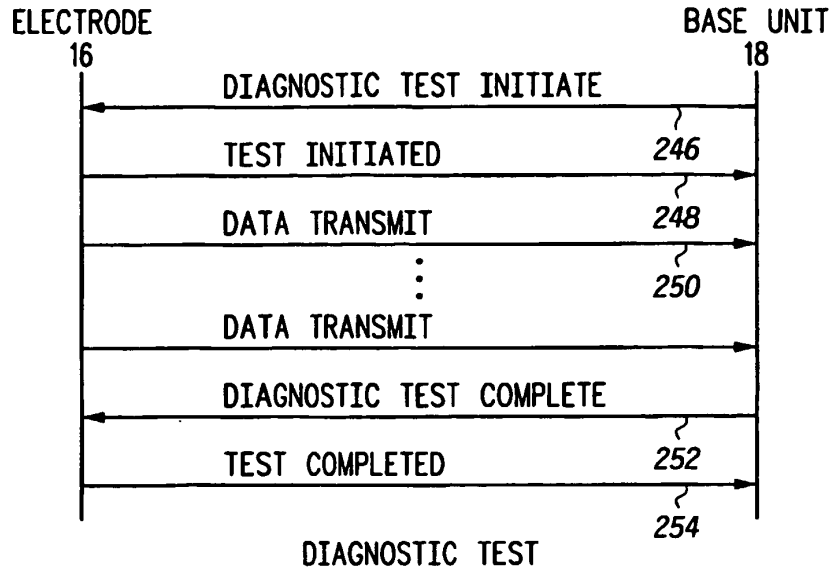


FIG.22

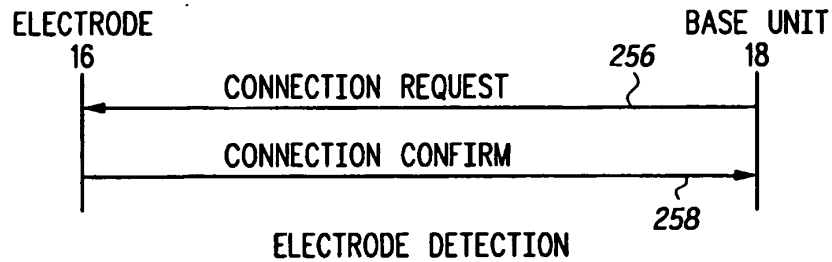


FIG.23

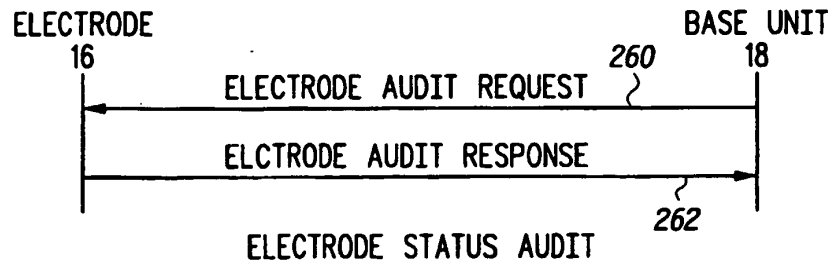


FIG.24

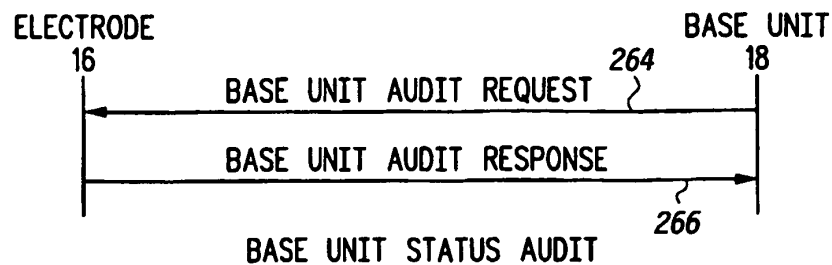


FIG.25


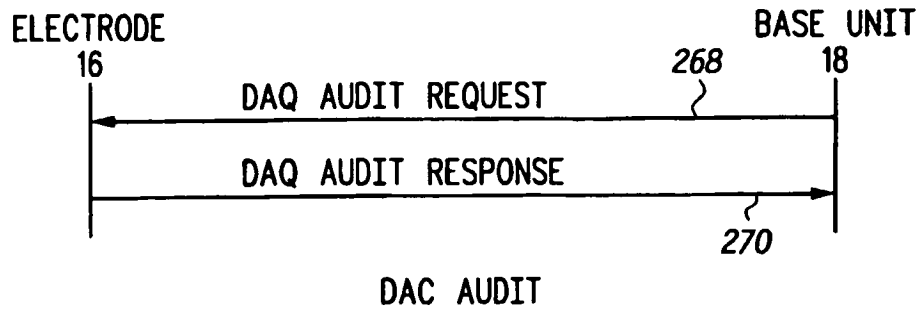


FIG.26

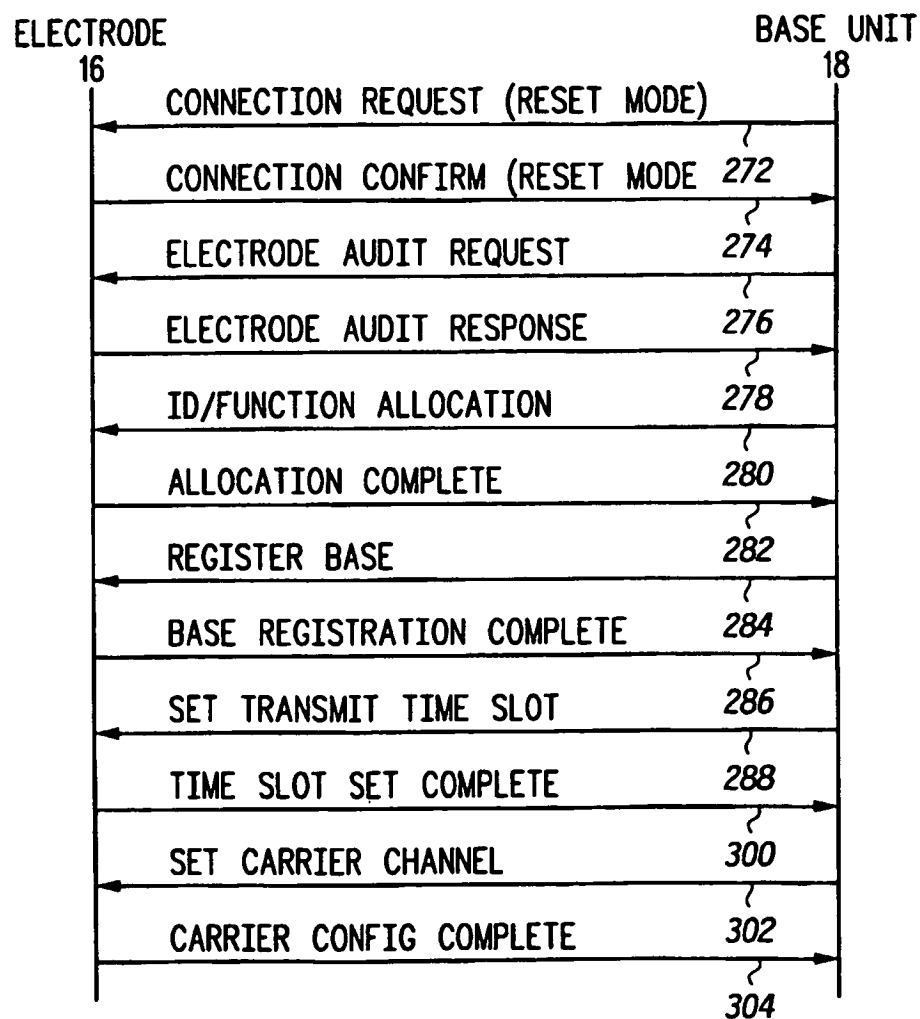

REGISTRATION SCENARIO (ON A DEDICATED CHANNEL)

FIG.27

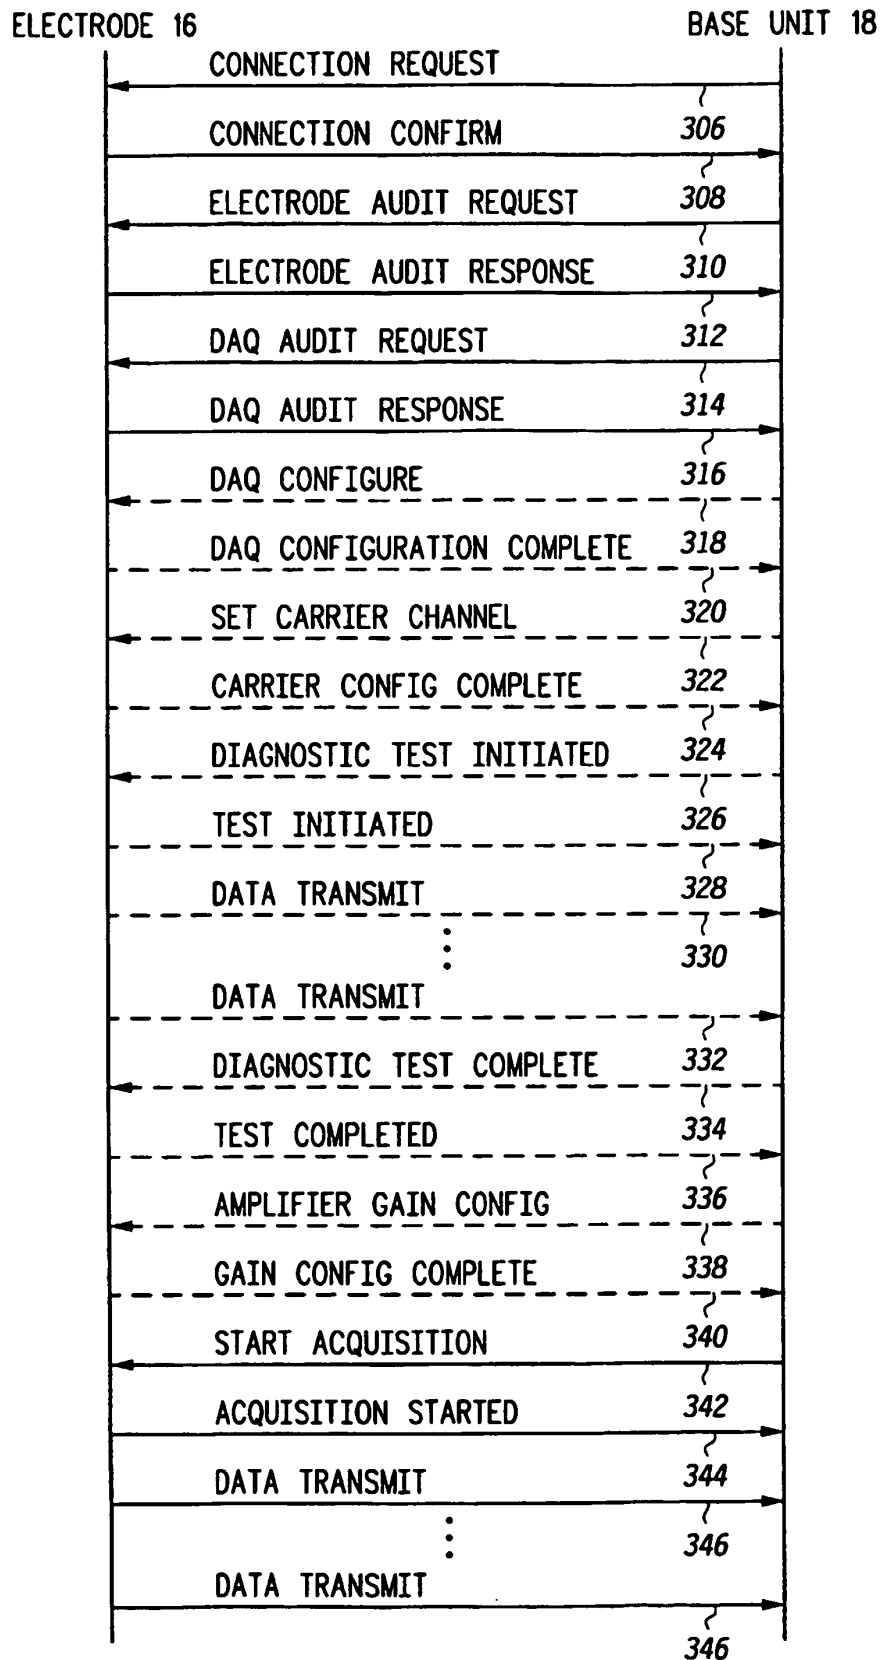


FIG.28 SIGNAL LOSS/CHANNEL ERROR RECOVERY SCENARIO

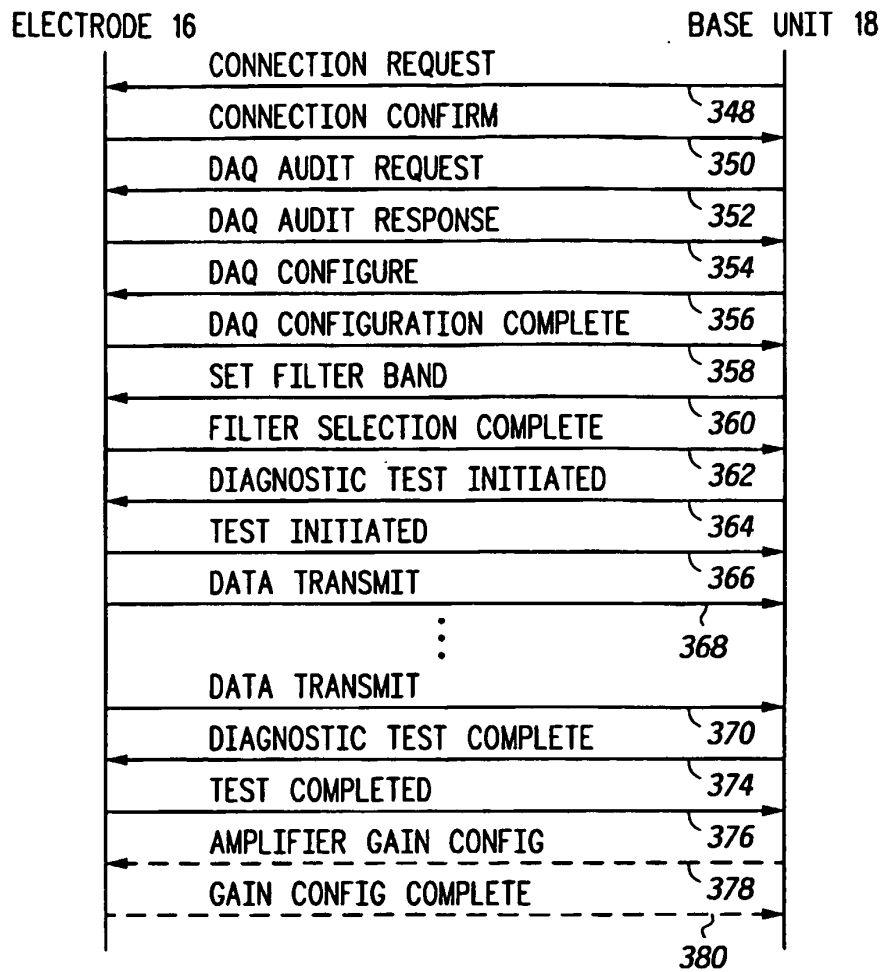


FIG.29 MONITORING CONFIGURE SCENARIO



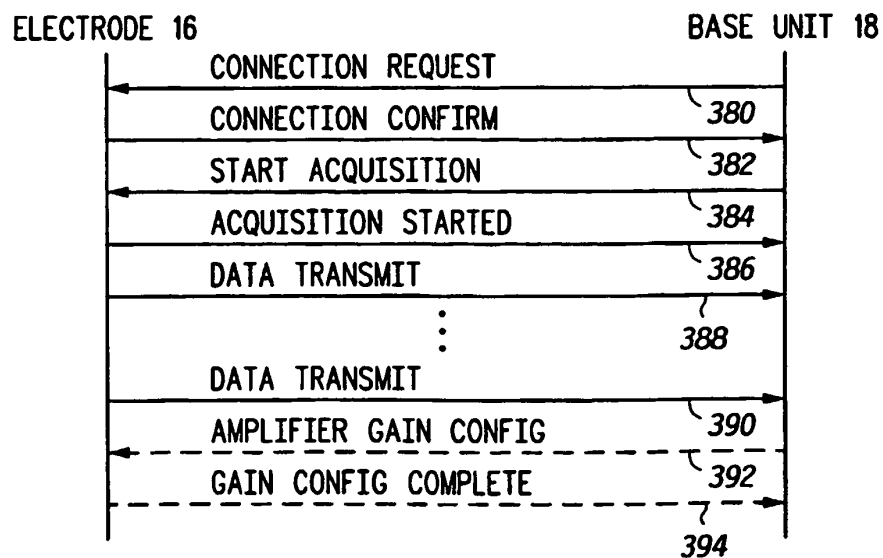


FIG.30 MONITORING START SCENARIO

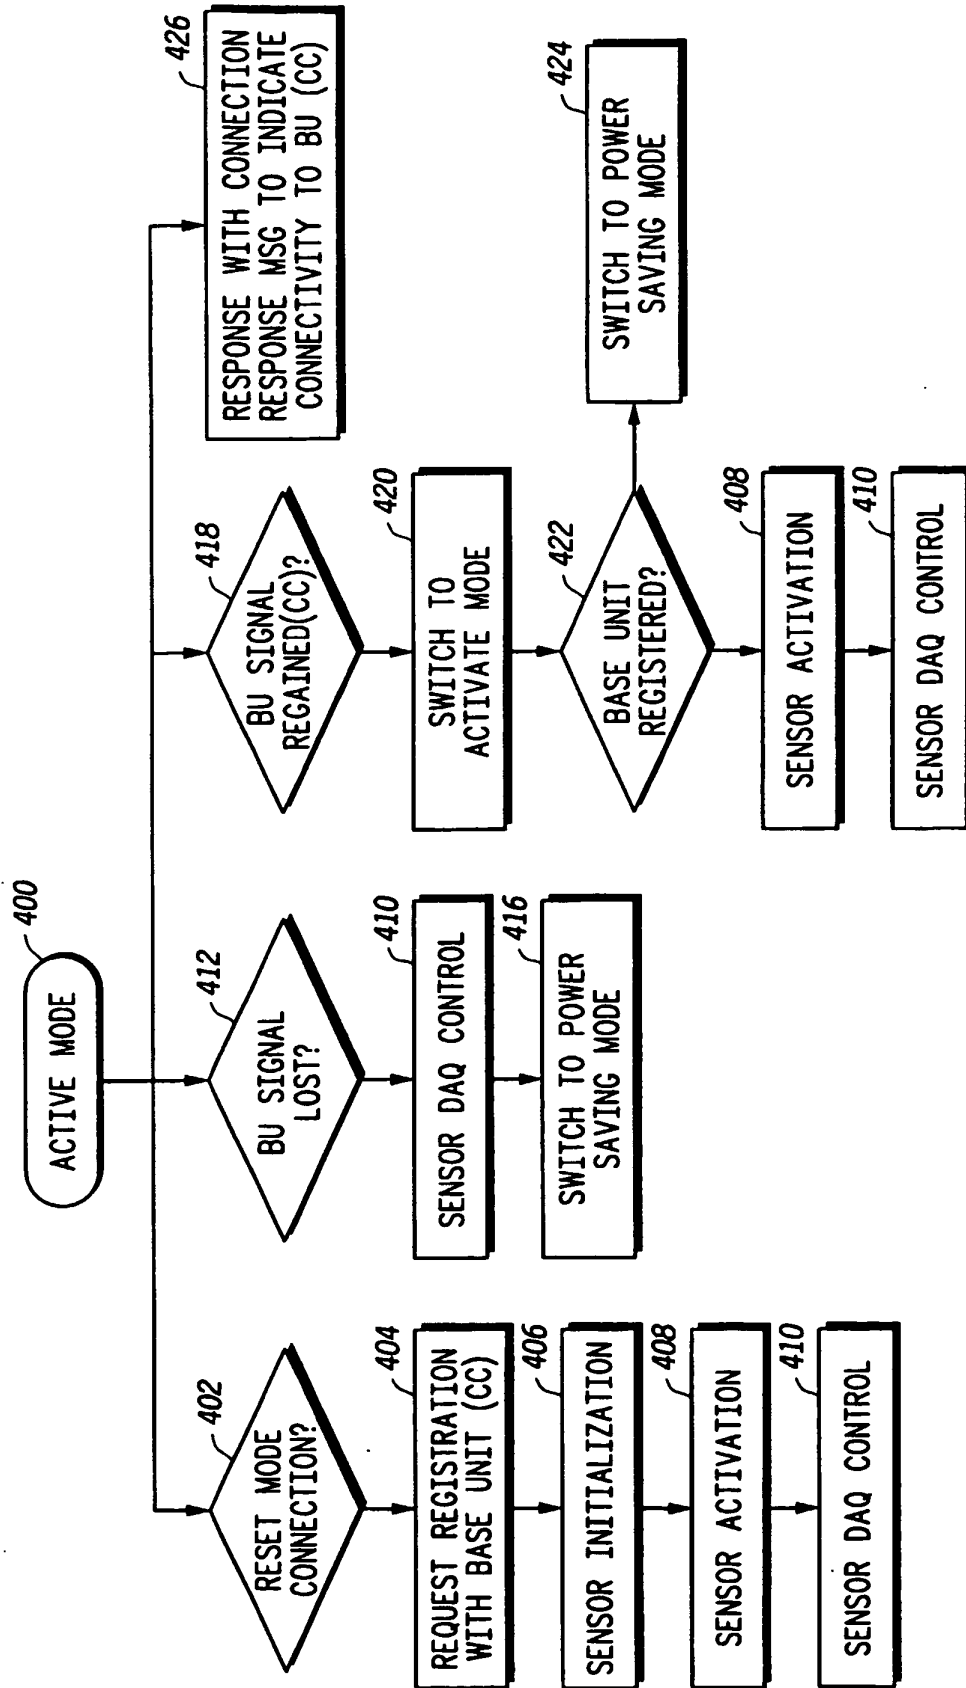


WIRELESS E-TRADE LOGIC DIAGRAM

FIG. 31

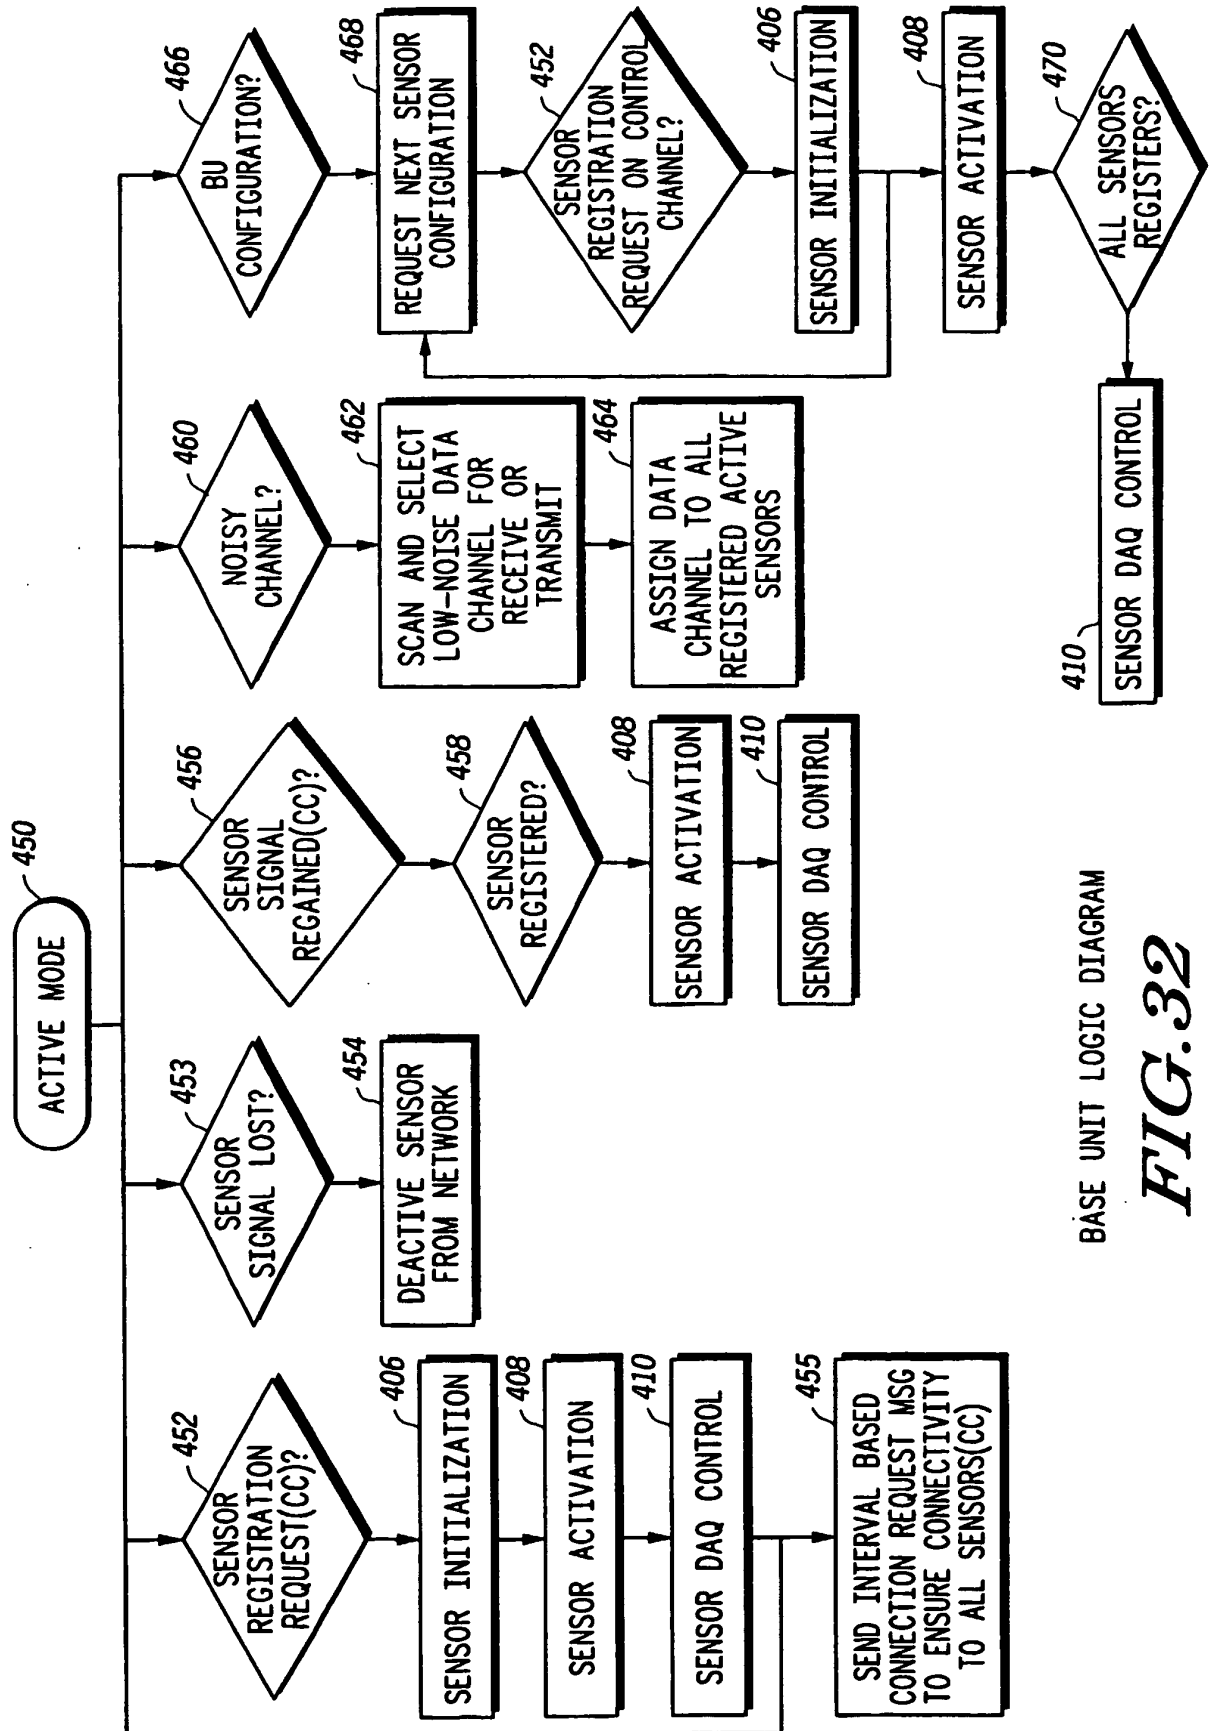


BASE UNIT LOGIC DIAGRAM

FIG. 32

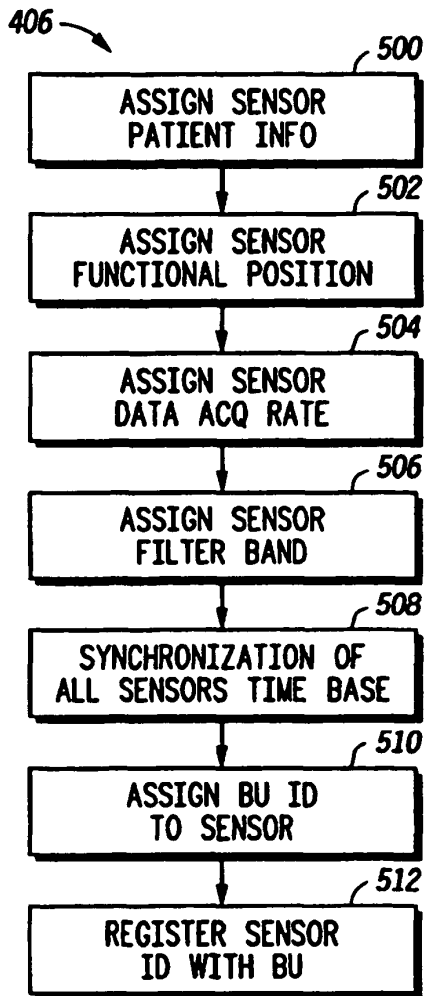


SENSOR INITIALIZATION
WITH RESET CONNECTION

FIG.33

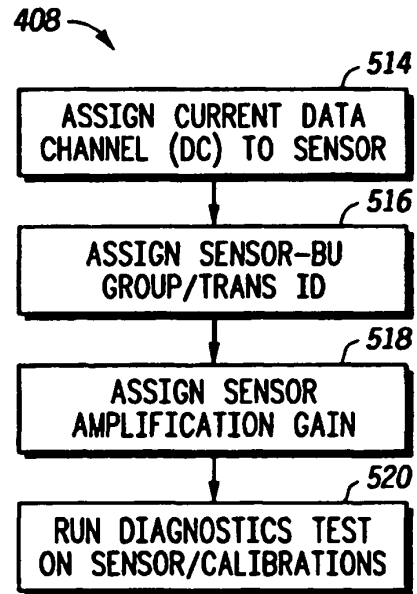

SENSOR ACTIVATION

FIG.34

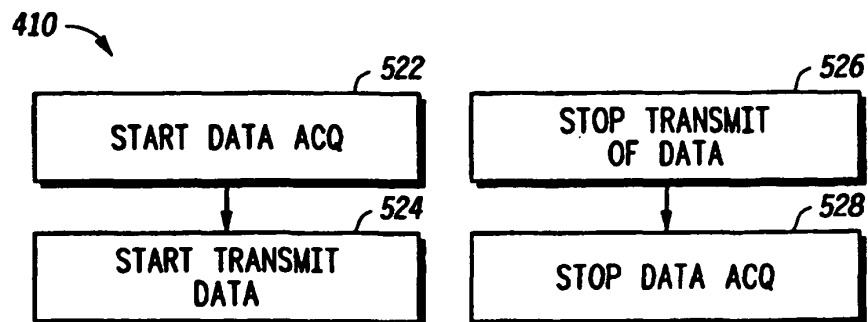

SENSOR DATA ACQ CONTROL

FIG.35

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5862803 A, Besson [0005]
- US 5307818 A [0005]
- US 5168814 A [0005]
- US 4981141 A [0005]

专利名称(译)	用于遥测监测的无线系统协议		
公开(公告)号	EP1290658B1	公开(公告)日	2008-01-30
申请号	EP2001930556	申请日	2001-04-17
[标]申请(专利权)人(译)	摩托罗拉公司		
申请(专利权)人(译)	MOTOROLA , INC.		
当前申请(专利权)人(译)	MOTOROLA , INC.		
[标]发明人	KHAIR MOHAMMAD NG RICHARD LOPEZ SALVADOR GHAEM SANJAR OLSON WILLIAM L		
发明人	KHAIR, MOHAMMAD NG, RICHARD LOPEZ, SALVADOR GHAEM, SANJAR OLSON, WILLIAM, L.		
IPC分类号	A61B5/00 A61B5/0408 A61B5/04 A61B5/0476 A61B5/0488 A61N1/08 H04B7/26		
CPC分类号	A61B5/0006 A61B5/0476 A61B5/0488 A61B5/061 A61B2560/0209 A61B2560/0412 Y10S128/903		
优先权	09/551719 2000-04-18 US		
其他公开文献	EP1290658A4 EP1290658A2		
外部链接	Espacenet		

摘要(译)

用于医疗监测的无线可编程系统包括基本单元和多个单独的无线远程可编程生物传感器收发器。基本单元通过使用无线技术发出注册，配置，数据获取和传输命令来管理收发器。来自无线收发器的生理数据被多路分解并通过标准接口提供给传统的监视器以供显示。还描述了无线收发器和基本单元的初始化，配置，注册和管理例程。

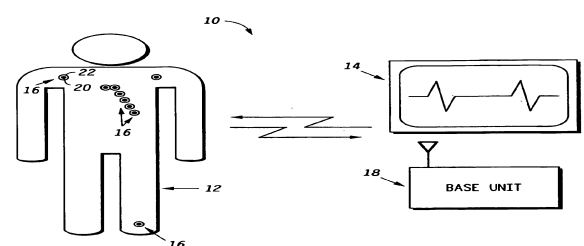


FIG. 1

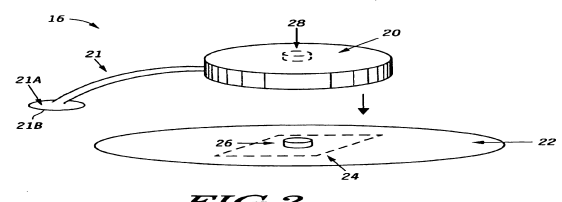


FIG. 2