



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
22.04.2009 Bulletin 2009/17

(51) Int Cl.:
G02F 1/1368 ^(2006.01) **G02F 1/133** ^(2006.01)
G02F 1/1343 ^(2006.01) **G09G 3/20** ^(2006.01)
G09G 3/36 ^(2006.01)

(21) Application number: **07792285.4**

(22) Date of filing: **09.08.2007**

(86) International application number:
PCT/JP2007/065635

(87) International publication number:
WO 2008/018552 (14.02.2008 Gazette 2008/07)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK RS

- **IRIE, Kentaroh**
Tsu-shi, Mie 514-0112 (JP)
- **TAKEUCHI, Masanori**
Tsu-shi, Mie 514-0101 (JP)
- **NAGASHIMA, Nobuyoshi**
Matsusaka-shi, Mie 515-0071 (JP)
- **TSUBATA, Toshihide**
Tsu-shi, Mie 514-0003 (JP)

(30) Priority: **10.08.2006 JP 2006218926**
09.03.2007 JP 2007060426

(71) Applicant: **Sharp Kabushiki Kaisha**
Osaka-shi, Osaka 545-8522 (JP)


(74) Representative: **Müller - Hoffmann & Partner**
Patentanwälte
Innere Wiener Strasse 17
81667 München (DE)

(72) Inventors:
• **SHIMOSHIKIRYOH, Fumikazu**
Matsusaka-shi, Mie 515-0043 (JP)

(54) **LIQUID CRYSTAL DISPLAY**

(57) Each picture element includes first and second sub-picture elements, each of which includes a liquid crystal capacitor and at least one storage capacitor. After a display voltage representing a certain grayscale level has been applied to the respective sub-picture element electrodes of the first and second sub-picture elements, a voltage difference $\Delta V\alpha$ is produced between voltages

to be applied to the respective liquid crystal capacitors of the first and second sub-picture elements by way of their associated storage capacitor(s). By setting the voltage difference $\Delta V\alpha$ value of the blue and/or cyan picture element(s) to be smaller than that of the other color picture elements, shift toward the yellow range at an oblique viewing angle can be minimized.

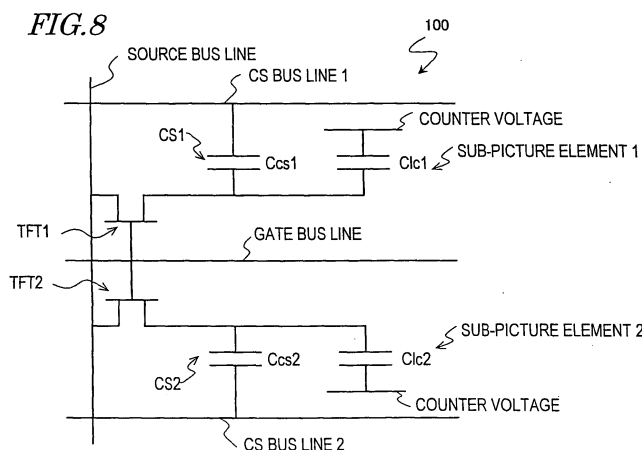

Description**TECHNICAL FIELD**

[0001] The present invention relates to a liquid crystal display device and more particularly relates to a liquid crystal display device with an excellent viewing angle characteristic.

BACKGROUND ART

[0002] Recently, liquid crystal displays (LCDs) have become immensely popular as a big monitor screen for a TV receiver (which will be simply referred to herein as a "TV").

[0003] Those LCDs for use as a big monitor screen for a TV include a so-called "VA mode LCD" that uses a vertical alignment liquid crystal layer (see Patent Document No. 1, for example).

[0004] A conventional VA mode LCD has different gamma curves, representing a grayscale-luminance characteristic, when viewed from a frontal viewing angle (i.e., when viewed along a normal to the monitor screen) and when viewed from an oblique viewing angle (i.e., when the polar angle is greater than zero degrees). And as the transmittance at an oblique viewing angle becomes higher than at the frontal viewing angle, the image may look whitish or excessively bright (which is sometimes called a "whitening phenomenon") at the oblique viewing angle. A "multi-picture element" technique is one of various means for suppressing such a whitening phenomenon at an oblique viewing angle. According to the multi-picture element technique, one picture element is divided into two or more sub-picture elements that have mutually different luminances and a grayscale is represented by those two or more sub-picture elements. The multi-picture element technique is also called a "picture element division" technique or an "area grayscale" technique. The multi-picture element technique is disclosed in Patent Documents Nos. 2 and 3, for example, the entire disclosure of which are hereby incorporated by reference.

Patent Document No. 1: Japanese Patent Application Laid-Open Publication No. 11-242225

Patent Document No. 2: Japanese Patent Application Laid-Open Publication No. 2004-062146 (corresponding to United States Patent No. 6,958,791)

Patent Document No. 3: Japanese Patent Application Laid-Open Publication No. 2005-55896

Patent Document No. 4: Japanese Patent Application Laid-Open Publication No. 2003-270614

DISCLOSURE OF INVENTION**PROBLEMS TO BE SOLVED BY THE INVENTION**

[0005] However, the present inventors discovered via experiments that the LCDs having the multi-picture element structures disclosed in Patent Documents Nos. 2 and 3 have the following problems.

[0006] Specifically, when the present inventors fabricated a sample LCD with the multi-picture element structure and analyzed its viewing angle characteristic in detail, the color balance was lost and shifted toward the yellow range at around an intermediate grayscale (e.g., around 145/255 grayscale) at an oblique viewing angle. This is a problem that occurs to various degrees not just in the VA mode but also in any other display mode as well.

[0007] Meanwhile, according to the multi-picture element technique disclosed in Patent Document No. 3, the liquid crystal capacitors **C_{1ca}** and **C_{1cb}** of a sub-picture element are capacitively coupled together with a coupling capacitance **C_{cp}** as show in FIG. 5 of Patent Document No. 3. However, the magnitude of the coupling capacitance **C_{cp}** is affected by some variation that inevitably occurs during the manufacturing process. That is to say, even if varied on a color-by-color basis, the magnitude of the coupling capacitance **C_{cp}** is still affected by a variation occurring during the manufacturing process. Consequently, it is difficult to fabricate an LCD with a good color balance at a high production yield.

[0008] It should be noted that Patent Document No. 4 discloses a method for controlling a backlight and a method for performing signal processing and correction in response to an input video signal in order to compensate for the loss of the white balance when an iodine polarizer is used. However, Patent Document No. 4 neither discloses nor suggests the problems mentioned above.

[0009] In order to overcome the problems described above, the present invention has an object of providing, first and foremost, a liquid crystal display device that can minimize such a loss of the color balance at an oblique viewing angle and that can be manufactured at a high production yield.

MEANS FOR SOLVING THE PROBLEMS

[0010] A liquid crystal display device according to the present invention includes a plurality of picture elements that

are arranged in columns and rows so as to form a matrix pattern. Each of those picture elements includes a liquid crystal layer and a plurality of electrodes for applying a voltage to the liquid crystal layer. Each of those picture elements includes a first sub-picture element and a second sub-picture element having the ability to apply mutually different voltages to their liquid crystal layer. At a grayscale level, the first sub-picture element has a higher luminance than the second sub-picture element. Each of the first and second sub-picture elements includes: a liquid crystal capacitor formed by a counter electrode and a sub-picture element electrode that faces the counter electrode through the liquid crystal layer; and at least one storage capacitor, each being formed by a storage capacitor electrode that is electrically connected to the sub-picture element electrode, an insulating layer, and a storage capacitor counter electrode that is opposed to the storage capacitor electrode with the insulating layer interposed between them. After a display voltage representing a certain grayscale level has been applied to the respective sub-picture element electrodes of the first and second sub-picture elements, a voltage difference $\Delta V\alpha$ is produced between voltages to be applied to the respective liquid crystal capacitors of the first and second sub-picture elements by way of their associated storage capacitor(s). In some of the picture elements, the voltage difference $\Delta V\alpha$ changes from one picture element to another.

[0011] In one preferred embodiment, the picture elements include a plurality of color picture elements that represent mutually different colors and that include a blue picture element and/or a cyan picture element. Among those color picture elements, the $\Delta V\alpha$ value of the blue and/or cyan picture element(s) is the smallest.

[0012] In another preferred embodiment, the at least one storage capacitor includes only one storage capacitor. The counter electrode is a single electrode that is provided in common for the first and second sub-picture elements. The storage capacitor counter electrodes of the first and second sub-picture elements are electrically independent of each other. And the waveforms of storage capacitor counter voltages to be supplied through storage capacitor lines that are associated with the storage capacitor counter electrodes are different between the first and second sub-picture elements. In some of the picture elements, the storage capacitors have different capacitance values. As used herein, if "the storage capacitors of a picture element have different capacitance values", then it means that at least one of the storage capacitors of the first and second sub-picture elements has a different storage capacitance value from the other(s). Normally, the capacitance values of two or more storage capacitors in a single picture element are defined to be equal to each other.

[0013] In this particular preferred embodiment, the picture elements include a plurality of color picture elements that represent mutually different colors and that include a blue picture element and/or a cyan picture element. Among those color picture elements, the capacitance value of the storage capacitor of the blue and/or cyan picture element(s) is the smallest.

[0014] In a specific preferred embodiment, the color picture elements further include a red picture element and a green picture element. Supposing the capacitance values of the storage capacitors of the blue and/or cyan picture element(s), the green picture element, and the red picture element are identified by C_{CS-B} , C_{CS-C} , C_{CS-G} and C_{CS-R} , respectively, the inequality $C_{CS-B} \leq C_{CS-C} < C_{CS-G} \leq C_{CS-R}$ is satisfied.

[0015] In another preferred embodiment, the at least one storage capacitor includes only one storage capacitor. The counter electrode is a single electrode that is provided in common for the first and second sub-picture elements. The storage capacitor counter electrodes of the first and second sub-picture elements are electrically independent of each other. And the waveforms of storage capacitor counter voltages to be supplied through storage capacitor lines that are associated with the storage capacitor counter electrodes are different between the first and second sub-picture elements. In some of the picture elements, the liquid crystal capacitors have different capacitance values.

[0016] In still another preferred embodiment, the liquid crystal display device further includes gate bus lines, source bus lines and TFTs. Each of the first and second sub-picture elements includes a TFT that is connected to the sub-picture element electrode thereof. One of the picture elements that has the smallest voltage difference $\Delta V\alpha$ further includes a storage capacitor that has been formed between the picture element's row and the gate bus line of its adjacent row.

[0017] In yet another preferred embodiment, the liquid crystal display device further includes gate bus lines, source bus lines and TFTs. Each of the first and second sub-picture elements includes a TFT that is connected to the sub-picture element electrode thereof. The gate-drain capacitance C_{gd} of the TFT of one of the picture elements that has the smallest voltage difference $\Delta V\alpha$ is smaller than that of the TFT of any other picture element.

[0018] In yet another preferred embodiment, the liquid crystal layer is a vertical alignment liquid crystal layer and contributes to conducting a display operation in normally black mode.

[0019] In yet another preferred embodiment, the at least one storage capacitor includes two storage capacitors. The counter electrode is a single electrode that is provided in common for the first and second sub-picture elements. The storage capacitor counter electrodes of the two storage capacitors of the first sub-picture element are electrically independent of each other. And the storage capacitor counter electrodes of the two storage capacitors of the second sub-picture element are also electrically independent of each other.

[0020] In this particular preferred embodiment, if the two storage capacitors of the first sub-picture element are identified by CS1A and CS1B and if the two storage capacitors of the second sub-picture element are identified by CS2A and CS2B, the storage capacitor counter electrodes of the storage capacitors CS1A and CS2B are electrically connected

to the same first storage capacitor line. The storage capacitor counter electrodes of the storage capacitors CS1B and CS2A are electrically connected to the same second storage capacitor line. And the first and second storage capacitor lines are electrically independent of each other.

[0021] In a specific preferred embodiment, if the capacitance values of the storage capacitors CS1A, CS1B, CS2A and CS2B are identified by C_{cs1A} , C_{cs1B} , C_{cs2A} and C_{cs2B} , respectively, and if $C_{cs1\alpha} = C_{cs1A} - C_{cs1B}$ and $C_{cs2\alpha} = C_{cs2A} - C_{cs2B}$, some of the picture elements have different $C_{cs1\alpha}$ or $C_{cs2\alpha}$.

[0022] In a more specific preferred embodiment, the picture elements include a plurality of color picture elements that represent mutually different colors and that include a blue picture element and/or a cyan picture element. Among those color picture elements, the $C_{cs1\alpha}$ and $C_{cs2\alpha}$ values of the blue and/or cyan picture element(s) are the smallest.

[0023] In another preferred embodiment, if $C_{cs1\beta} = C_{cs1A} + C_{cs1B}$ and $C_{cs2\beta} = C_{cs2A} + C_{cs2B}$, the $C_{cs1\beta}$ and $C_{cs2\beta}$ values remain the same in every picture element.

[0024] Another liquid crystal display device according to the present invention includes a plurality of picture elements that are arranged in columns and rows so as to form a matrix pattern. Each of those picture elements includes a liquid crystal layer and a plurality of electrodes for applying a voltage to the liquid crystal layer. Each of those picture elements includes a first sub-picture element and a second sub-picture element having the ability to apply mutually different voltages to their liquid crystal layer. At a grayscale level, the first sub-picture element has a higher luminance than the second sub-picture element. Each of the first and second sub-picture elements includes: a liquid crystal capacitor formed by a counter electrode and a sub-picture element electrode that faces the counter electrode through the liquid crystal layer; and at least two storage capacitors, each being formed by a storage capacitor electrode that is electrically connected to the sub-picture element electrode, an insulating layer, and a storage capacitor counter electrode that is opposed to the storage capacitor electrode with the insulating layer interposed between them. The counter electrode is a single electrode that is provided in common for the first and second sub-picture elements. The storage capacitor counter electrodes of the at least two storage capacitors of the first sub-picture element are electrically independent of each other. And the storage capacitor counter electrodes of the at least two storage capacitors of the second sub-picture element are also electrically independent of each other.

[0025] In one preferred embodiment, if two storage capacitors of the first sub-picture element are identified by CS1A and CS1B and if two storage capacitors of the second sub-picture element are identified by CS2A and CS2B, the storage capacitor counter electrodes of the storage capacitors CS1A and CS2B are electrically connected to the same first storage capacitor line. The storage capacitor counter electrodes of the storage capacitors CS1B and CS2A are electrically connected to the same second storage capacitor line. And the first and second storage capacitor lines are electrically independent of each other.

EFFECTS OF THE INVENTION

[0026] The present invention provides a liquid crystal display device that can minimize such a loss of the color balance (particularly, a shift toward the yellow range) at an oblique viewing angle and that can be manufactured at a high production yield. The present invention also provides a liquid crystal display device with a novel structure that contributes greatly to achieving such an object.

BRIEF DESCRIPTION OF DRAWINGS

[0027]

FIG. 1 is a schematic representation illustrating an exemplary multi-picture element structure.

FIGS. 2(a) and 2(b) show how the chromaticity changes with the viewing angle in a liquid crystal display device having the multi-picture element structure shown in FIG. 1. Specifically, FIGS. 2(a) and 2(b) are graphs showing the chromaticity variations in u' and v' chromaticity coordinates with the grayscales at a frontal viewing angle and at an oblique viewing angle (of which the orientation was nine o'clock direction and the polar angle was 45 degrees). FIGS. 3(a) and 3(b) are graphs showing how the transmittances with respect to incoming color light rays in blue, green and red with wavelengths of 450 nm, 550 nm and 650 nm, respectively, changed with the voltage applied to the liquid crystal layer of a VA mode LCD. Specifically, FIGS. 3(a) and 3(b) are graphs showing the voltage-transmittance characteristics at the frontal viewing angle and at an oblique viewing angle (of which the orientation was nine o'clock direction and the polar angle was 45 degrees), respectively.

FIG. 4 shows the grayscale-transmittance characteristics of a liquid crystal display device with the multi-picture element structure at the frontal viewing angle.

FIG. 5 is a graph showing the grayscale-transmittance characteristics of the three primary colors of red (R), green (G) and blue (B) in a situation where a picture element of a liquid crystal display device with the multi-picture element structure is viewed from an oblique viewing angle (of which the orientation is nine o'clock direction and the polar

angle is 45 degrees).

FIG. 6 is a graph showing the voltage-transmittance (V-T) curves of bright and dark sub-picture elements in a liquid crystal display device with the multi-picture element structure.

FIG. 7 is a schematic representation illustrating another exemplary multi-picture element structure.

FIG. 8 is an equivalent circuit diagram of a picture element with the multi-picture element structure.

Portions (a) through (f) of FIG. 9 schematically show the waveforms of voltages to be applied and timings to drive a liquid crystal display device with the multi-picture element structure shown in FIG. 8.

FIG. 10 shows graphs showing the chromaticity variations in u' and v' chromaticity coordinates with the grayscales at a frontal viewing angle and at an oblique viewing angle (of which the orientation was nine o'clock direction and the polar angle was 45 degrees) in a liquid crystal display device as a preferred embodiment of the present invention.

FIG. 11 is an equivalent circuit diagram of a picture element with another multi-picture element structure.

FIG. 12 is a schematic representation illustrating the picture element structure of a liquid crystal display device 200A as another preferred embodiment of the present invention.

FIG. 13 is an equivalent circuit diagram of one of two sub-picture elements in a liquid crystal display device 300 as still another preferred embodiment of the present invention.

FIG. 14 is a schematic representation illustrating the picture element structure of a liquid crystal display device 300A as yet another preferred embodiment of the present invention.

FIG. 15 is a schematic representation illustrating the picture element structure of a liquid crystal display device 400A as yet another preferred embodiment of the present invention.

FIG. 16 is a schematic representation illustrating the picture element structure of a liquid crystal display device 500A as yet another preferred embodiment of the present invention.

FIG. 17 is a schematic representation illustrating the picture element structure of a liquid crystal display device 600A as yet another preferred embodiment of the present invention.

FIG. 18A is a schematic cross-sectional view of the liquid crystal display device 600A as viewed on the plane 18A-18A' shown in FIG. 17.

FIG. 18B is a schematic cross-sectional view of the liquid crystal display device 600A as viewed on the plane 18B-18B' shown in FIG. 17.

FIG. 18C illustrates, for reference purposes, how the device shown in FIG. 18B looks if the SOG film removed portion is omitted.

FIGS. 19(a) through 19(g) are plan views illustrating the structures of alternative TFT sections that may be used in a liquid crystal display device according to any of the preferred embodiments of the present invention described above.

FIG. 20 is a schematic representation illustrating the picture element structure of a liquid crystal display device 700A as yet another preferred embodiment of the present invention.

FIG. 21 is a graph showing the grayscale dependences of ΔV_d of respective color picture elements in a liquid crystal display device according to a preferred embodiment of the present invention.

DESCRIPTION OF REFERENCE NUMERALS

[0028]

TFT1, TFT2 thin-film transistor

CS1, CS2 storage capacitor

C1c1, C1c2 liquid crystal capacitor

111-1, 111-2, 111-2a, 111-2b sub-picture element electrode

112 gate bus line

113 CS bus line

114 source bus line

116-1, 116-2 TFT

117-1, 117-2 drain extension line

119-1, 119-2, 119-2a, 119-2b contact portion

BEST MODE FOR CARRYING OUT THE INVENTION

[0029] Hereinafter, the configuration and operation of a liquid crystal display device as a preferred embodiment of the present invention will be described with reference to the accompanying drawings. In the following description, the present invention is supposed to be implemented as a vertical alignment liquid crystal display device (i.e., a VA mode LCD) that uses a liquid crystal material with negative dielectric anisotropy because significant effects are achieved by the present invention in that case. However, the present invention is in no way limited to that specific preferred embodiment but is

also applicable to a TN mode LCD, for example.

[0030] Also, in the following description of preferred embodiments, the LCD disclosed in Patent Document No. 2 is cited as a typical VA mode LCD with the multi-picture element structure. However, the present invention does not have to be applied to that type of LCD but may also be applied to any other LCD with the multi-picture element structure.

[0031] First of all, it will be described what the present inventors thought are the problems with an LCD having the multi-picture element structure disclosed in Patent Document No. 2.

[0032] As described above, when the present inventors fabricated a sample LCD with the multi-picture element structure and analyzed its viewing angle characteristic in detail, the color balance shifted toward the yellow range at around an intermediate grayscale (e.g., around 145/255 grayscale) at an oblique viewing angle.

[0033] In the following description, a single picture element is supposed to be divided into two portions with an equal area (one to one division) as shown in FIG. 1 and a result of chromaticity variation in a multi-picture element structure, in which the bright and dark sub-picture elements have an equal area, will be described as an example. FIGS. 2(a) and 2(b) show the chromaticity variations in u' and v' chromaticity coordinates with the grayscales at the frontal viewing angle and at an oblique viewing angle (of which the orientation was nine o'clock direction and the polar angle was 45 degrees), where u' and v' are chromaticity coordinates compliant with the CIE 1976 USC standard.

[0034] As can be seen from FIGS. 2(a) and 2(b), u' and v' did not change so much with the grayscale at the frontal viewing angle but increased significantly at around 145th grayscale at the oblique viewing angle. As a result, at around the 145th grayscale, the image looked more yellowish than at any other grayscale.

[0035] As a result of researches, the present inventors understand the reason why the image that should have had an intermediate grayscale became yellowish at the oblique viewing angle as follows. It should be noted that in this example, a single color display pixel is supposed to consist of red, green and blue picture elements (i.e., picture elements in the three primary colors). Naturally, however, the present invention is in no way limited to this example. But even if a single color display pixel consisted of four or more color picture elements (multi-primary color picture elements), the same statement would apply as long as the picture elements include a blue picture element. Also, if a cyan picture element is included along with, or instead of, the blue picture element, the cyan picture element may be treated just as the blue picture element.

[0036] FIGS. 3(a) and 3(b) are graphs showing how the transmittances with respect to incoming color light rays in blue, green and red with wavelengths of 450 nm, 550 nm and 650 nm, respectively, changed with the voltage applied to the liquid crystal layer of a normally black mode, VA mode LCD. Specifically, FIGS. 3(a) and 3(b) show the voltage-transmittance characteristics at the frontal viewing angle and at an oblique viewing angle (of which the orientation was nine o'clock direction and the polar angle was 45 degrees), respectively.

[0037] A VA mode LCD utilizes the birefringence effect of its liquid crystal layer, of which the retardation has wavelength dispersion property. That is why in a VA mode LCD, the transmittance changes differently according to the wavelength of the incoming light. Also, in the normally black mode, the greater the voltage applied to the liquid crystal layer, the higher the transmittance with respect to each color light ray as can be seen from FIG. 3(a). It can also be seen that the applied voltage that maximized the transmittance to the blue ray was smaller than the applied voltage that maximized the transmittance to any other color ray. And even after the transmittance to the blue ray reached its maximum value, the transmittances to the other color rays increased as the applied voltage was raised. That is why considering normalized transmittances, which are obtained by normalizing the transmittances to the respective color rays with their maximum transmittances, it can be said that only the normalized transmittance to the blue ray decreases once the applied voltage increasing exceeds a certain value. In white display, if the transmittance to the blue ray becomes lower than the transmittance to any other color ray, then the color white will shift toward the yellow range. Also, since the retardation of the liquid crystal layer is apparently larger at an oblique viewing angle than at the frontal viewing angle, the transmittance to the blue ray decreased more significantly at the oblique viewing angle than at the frontal viewing angle as can be seen easily by comparing the results of FIGS. 3(a) and 3(b) to each other. For that reason, at the oblique viewing angle, the image becomes yellowish much more sensibly than at the frontal viewing angle.

[0038] Next, look at FIG. 4, which shows the grayscale-transmittance characteristics of a liquid crystal display device with the multi-picture element structure described above at the frontal viewing angle. In FIG. 4, not only the characteristic of the entire picture element but also those of its bright and dark sub-picture elements are shown. Nevertheless, the characteristics of those sub-picture elements are normalized with the transmittance of the entire picture element. In other words, the transmittance of the entire picture element is represented as the sum of the transmittances of the bright and dark sub-picture elements.

[0039] As shown in FIG. 4, in a liquid crystal display device with the multi-picture element structure described above, a voltage is applied to the liquid crystal layers of the respective sub-picture elements such that substantially only the bright sub-picture element is lit at low grayscales and that the transmittance of the dark sub-picture element starts to rise at a certain intermediate grayscale.

[0040] If this picture element is viewed from the oblique viewing angle (of which the orientation is nine o'clock direction and the polar angle is 45 degrees), the grayscale-transmittance characteristics of the three primary colors of red (R),

green (G) and blue (B) will be represented by the curves shown in FIG. 5. The intermediate grayscale pointed to by the arrow in FIG. 5 indicates a point at which the transmittance of the bright sub-picture element of a B picture element (which will be simply referred to herein as a "bright sub-picture element B") gets saturated with the increase in grayscale. The transmittance of this bright sub-picture element B gets saturated because the retardation of the liquid crystal layer increases at the oblique viewing angle as described above. In this manner, at the oblique viewing angle, the transmittance of the B picture element decreases at the intermediate grayscale indicated by the arrow unlike the other R and G picture elements and the image (that should look gray) around that intermediate grayscale gets yellowish.

[0041] As can be seen easily from the foregoing description, in order to overcome the coloring problem, this phenomenon that the transmittance to the blue ray gets saturated earlier than any other color ray due to the increase in retardation (see FIG. 3(a)) needs to be suppressed. That is to say, to obtain a structure in which the difference between the voltages (which will be identified herein by ΔV) applied at a certain grayscale to the respective liquid crystal layers of the bright and dark sub-picture elements of a particular picture element is distinct from the voltage difference of the other picture elements, that voltage difference may be the smallest in the blue picture element among multiple color picture elements.

[0042] In a liquid crystal display device with the multi-picture element structure of this preferred embodiment, the ΔV value of the blue picture element may be made smaller than that of the other color picture elements by setting the storage capacitance value of the blue picture element to be smaller than that of the green and red picture elements. That is to say, among the multiple color picture elements (i.e., primary color picture elements) that form a single color display pixel, the blue picture element may have a smaller storage capacitance value than any other picture element. If a single color display pixel consists of blue, green and red picture elements as in this example, the capacitance values C_{CS-B} , C_{CS-G} and C_{CS-R} of the respective storage capacitors of the blue, green and red picture elements need to satisfy the inequality $C_{CS-B} < C_{CS-G} \leq C_{CS-R}$. Optionally, if a structure in which $C_{CS-G} = C_{CS-R}$ is adopted, the liquid crystal display device can have a simplified structure. In the example to be described below, the two storage capacitors of the sub-picture elements of a single picture element are supposed to have an equal capacitance value. However, at least one of the storage capacitance values should satisfy the inequality.

[0043] Next, it will be described why the saturation of the transmittance to the blue ray is prevented by satisfying the inequality $C_{CS-B} < C_{CS-G} \leq C_{CS-R}$.

[0044] According to the multi-picture element technique disclosed in Patent Document No. 2 (each picture element of which is represented by the equivalent circuit diagram of FIG. 8 and all picture elements of which have the same capacitance value), a voltage ($V+V_m$), which is higher by V_m than the voltage V to be applied to the liquid crystal layer of a conventional picture element with no multi-picture element structure, is applied to the liquid crystal layer of one sub-picture element, and a voltage ($V-V_m$), which is lower than the voltage V by V_m , is applied to the liquid crystal layer of the other sub-picture element, thereby producing bright and dark sub-picture elements.

[0045] In this case, supposing V_{ad} is the peak-to-peak amplitude of the oscillating waveform of a storage capacitor voltage (CS voltage) to be applied through a storage capacitor line to a storage capacitor counter electrode, C_{cs} is the capacitance value of the storage capacitor of each sub-picture element, and C_{lc} is the capacitance value of the liquid crystal capacitor of each sub-picture element, V_m is represented by the following equation:

$$V_m = (1/2) \cdot V_{ad} \cdot C_{cs} / (C_{lc} + C_{cs})$$

This V_{ad} is twice as high as V_{ad} disclosed in Patent Document No. 2.

[0046] That is why the voltage-transmittance (V-T) curves of the bright and dark sub-picture elements become as schematically shown in FIG. 6. Specifically, with respect to the V-T curve of a conventional picture element with no multi-picture element structure (as indicated by the central dotted curve), the V-T curve of the bright sub-picture element shifts by V_m toward the lower voltage range and that of the dark sub-picture element shifts by V_m toward the higher voltage range.

[0047] For that reason, if the capacitance values of the respective storage capacitors of the blue, green and red picture elements are identified by C_{CS-B} , C_{CS-G} and C_{CS-R} , respectively, the inequality $C_{CS-B} < C_{CS-G} \leq C_{CS-R}$ is preferably satisfied. In that case, V_m of the blue picture element becomes smaller than any other color picture element, and therefore, the saturation and decrease in the transmittance of the bright sub-picture element of the blue picture element can be prevented. As a result, the unwanted phenomenon that the image around the intermediate grayscale gets yellowish at the oblique viewing angle can be suppressed.

[0048] It should be noted that if each pixel further includes a cyan picture element, then the inequality $C_{CS-B} \leq C_{CS-C} < C_{CS-G} \leq C_{CS-R}$ is preferably satisfied, where C_{CS-C} is the capacitance value of the storage capacitor of the cyan picture element. Also, if each pixel includes a cyan picture element with no blue picture element, then the capacitance value C_{CS-C} of the storage capacitor of the cyan picture element needs to be smaller than that of the storage capacitor of any

other color picture element (which may be not just a green or red picture element but also a magenta or yellow picture element). In that case, the capacitance values of the storage capacitors of all color picture elements but the cyan picture element may be equal to each other. That is to say, among multiple color picture elements, just the blue or cyan picture element needs to have a smaller storage capacitance value than the other color picture elements (which may be not just red and green picture elements). And if blue and cyan picture elements are both included, settings need to be done so as to satisfy the inequality $C_{CS-B} \leq C_{CS-C}$.

[0049] Hereinafter, preferred embodiments of a liquid crystal display device according to the present invention will be described by way of specific examples. In the following example, each picture element is supposed to be equally split into a bright sub-picture element and a dark sub-picture element such that these two sub-picture elements have an equal area. The pattern of the multi-picture element structure of the liquid crystal display device of this preferred embodiment is shown in FIG. 1, but may also be the one shown in FIG. 7. The picture element shown in FIG. 1 includes sub-picture elements #1 and #2 as upper and lower halves of the picture element. On the other hand, the picture element shown in FIG. 7 includes sub-picture element #1 arranged at the center and sub-picture element #2 that has been split into two halves arranged over and under the sub-picture element #1. However, those two halves of the sub-picture element #2 are electrically equivalent to each other and form a single sub-picture element, too. That is why both of the two types of multi-picture element structures shown in FIGS. 1 and 7 are represented by the equivalent circuit shown in FIG. 8. And the liquid crystal display device 100 having the multi-picture element structure represented by the equivalent circuit shown in FIG. 8 is driven with the application of various voltages shown in FIG. 9. As the details are already disclosed in Patent Document No. 2, only the gist will be given below.

[0050] A single picture element of the liquid crystal display device 100 shown in FIG. 8 includes sub-picture elements #1 and #2. These sub-picture elements #1 and #2 include liquid crystal capacitors **Clc1** and **Clc2**, respectively, each of which is formed by a liquid crystal layer, a counter electrode to apply a voltage to the liquid crystal layer, and a sub-picture element electrode. A counter electrode is a single electrode that is provided in common for sub-picture elements #1 and #2, and is typically shared by every picture element. A storage capacitor **CS1** with a capacitance value **Ccs1** and a storage capacitor **CS2** with a capacitance value **Ccs2** are electrically connected in parallel to the liquid crystal capacitors **Clc1** and **Clc2**, respectively. Each of the storage capacitors **CS1** and **CS2** is formed by an insulating layer (such as a gate insulating layer) and a storage capacitor counter electrode that faces the storage capacitor electrode with the insulating layer interposed between them. The storage capacitor electrode is connected to the drain electrode of the same TFT as the sub-picture element electrode, while the storage capacitor counter electrode is connected to a storage capacitor line (CS bus line). In this case, CS bus line #1 connected to the storage capacitor of sub-picture element #1 and CS bus line #2 connected to the storage capacitor of sub-picture element #2 are electrically independent of each other. Also, CS bus lines #1 and #2 may be provided for each picture element so as to be electrically independent of the other CS bus lines. Alternatively, as disclosed in Patent Document No. 2, the number of electrically independent CS bus lines may be reduced by combining a number of CS bus lines that supply oscillating voltages with a certain phase relation into a single CS trunk line. In either case, the CS bus line voltages (which are also called "CS voltages" or "storage capacitor counter voltages") to be supplied to the storage capacitors of two or more sub-picture elements in a single picture element have mutually different waveforms.

[0051] The sub-picture element electrode of each liquid crystal capacitor **Clc1**, **Clc2** and the storage capacitor electrode of each storage capacitor are connected to the drain electrode of its associated TFT #1 or #2. The respective gate electrodes of the TFTs #1 and #2 are connected in common to the same gate bus line, while the respective source electrodes of the TFTs #1 and #2 are connected in common to the same source bus line.

[0052] By supplying the storage capacitor counter voltages to be described later through electrically independent CS bus lines to the storage capacitors of the sub-picture elements with such a relatively simple multi-picture element structure, the effective voltages applied to the liquid crystal capacitors **Clc1** and **Clc2** of the respective sub-picture elements can be either raised or lowered by V_m .

[0053] Portions (a) through (f) of FIG. 9 schematically show the waveforms and timings of respective voltages that are applied to drive the liquid crystal display device with the multi-picture element structure shown in FIG. 8.

[0054] Specifically, portion (a) of FIG. 9 shows the voltage waveform **Vs** of the signal voltage supplied through the source bus line (signal line); portion (b) of FIG. 9 shows the voltage waveform **Vcs1** of the storage capacitor voltage supplied through the CS bus line #1; portion (c) of FIG. 9 shows the voltage waveform **Vcs2** of the CS bus line #2; portion (d) of FIG. 9 shows the voltage waveform **Vg** of the gate bus line; portion (e) of FIG. 9 shows the voltage waveform **Vlc1** of the sub-picture element electrode of the sub-picture element #1; and portion (f) of FIG. 9 shows the voltage waveform **Vlc2** of the sub-picture element electrode of the sub-picture element #2. In FIG. 9, the dashed line indicates the voltage waveform **COMMON** (V_{com}) of the counter electrode.

[0055] Hereinafter, it will be described with reference to portions (a) through (f) of FIG. 9 how the equivalent circuit shown in FIG. 8 operates.

[0056] First, at a time **T1**, the voltage **Vg** rises from V_{gL} (low) to V_{gH} (high) to turn TFT1 and TFT2 ON simultaneously. As a result, the voltage **Vs** on the source bus line is transmitted to the sub-picture element electrodes of the sub-picture

elements #1 and #2 to charge the sub-picture elements #1 and #2 with the voltage **V_s**. In the same way, the storage capacitors **CS1** and **CS2** of the respective sub-picture elements are also charged with the voltage on the source bus line. The voltage **V_s** on the source bus line is a display voltage representing the grayscale to be displayed by that picture element and is written on an associated picture element during a period in which the TFT is ON (and which will be sometimes referred to herein as a "selected period").

[0057] Next, at a time **T₂**, the voltage **V_g** on the gate bus line falls from **V_{gH}** to **V_{gL}** to turn TFT1 and TFT2 OFF simultaneously and electrically isolate the sub-picture elements #1 and #2 and the storage capacitors **CS1** and **CS2** from the source bus line (a period in such a state will sometimes be referred to herein as a "non-selected period"). It should be noted that immediately after the TFTs in ON state have been turned OFF, due to the feedthrough phenomenon caused by a parasitic capacitance of the TFT1 and TFT2, for example, the voltages **V_{lc1}** and **V_{lc2}** applied to the respective sub-picture element electrodes decrease by approximately the same voltage **V_d** to:

$$V_{lc1} = V_s - V_d$$

$$V_{lc2} = V_s - V_d$$

respectively. Also, in this case, the voltages **V_{cs1}** and **V_{cs2}** on the CS bus lines are:

$$V_{cs1} = V_{com} - (1/2) V_d$$

$$V_{cs2} = V_{com} + (1/2) V_d$$

respectively. That is to say, the waveforms of these exemplary voltages **V_{cs1}** and **V_{cs2}** on the CS bus lines are square waves, of which the (full) amplitude is **V_d**, of which the phases are opposite to each other (i.e., different from each other by 180 degrees) and which have a duty ratio of one to one.

[0058] Next, at a time **T₃**, the voltage **V_{cs1}** on the CS bus line #1 connected to the storage capacitor **CS1** rises from **V_{com} - (1/2)V_d** to **V_{com} + (1/2)V_d** and the voltage **V_{cs2}** on the CS bus line #2 connected to the storage capacitor **CS2** falls from **V_{com} + (1/2)V_d** to **V_{com} - (1/2)V_d**. That is to say, these voltages **V_{cs1}** and **V_{cs2}** both change by **V_d**. As the voltages on the CS bus lines #1 and #2 change in this manner, the voltages **V_{lc1}** and **V_{lc2}** applied to the respective sub-picture element electrodes change into:

$$V_{lc1} = V_s - V_d + K \times V_d$$

$$V_{lc2} = V_s - V_d - K \times V_d$$

respectively, where $K = C_{cs} / (C_{lc(V)} + C_{cs2})$.

[0059] Next, at a time **T₄**, **V_{cs1}** falls from **V_{com} + (1/2)V_d** to **V_{com} - (1/2)V_d** and **V_{cs2}** rises from **V_{com} - (1/2)V_d** to **V_{com} + (1/2)V_d**. That is to say, these voltages **V_{cs1}** and **V_{cs2}** both change by **V_d** again. In this case, **V_{lc1}** and **V_{lc2}** also change from

$$V_{lc1} = V_s - V_d + K \times V_{ad}$$

5

$$V_{lc2} = V_s - V_d - K \times V_{ad}$$

10

into

15

$$V_{lc1} = V_s - V_d$$

20

$$V_{lc2} = V_s - V_d$$

respectively.

25

[0060] Next, at a time **T5**, **Vcs1** rises from $V_{com} - (1/2)V_{ad}$ to $V_{com} + (1/2)V_{ad}$ and **Vcs2** falls from $V_{com} + (1/2)V_{ad}$ to $V_{com} - (1/2)V_{ad}$. That is to say, these voltages **Vcs1** and **Vcs2** both change by V_{ad} again. In this case, **Vlc1** and **Vlc2** also change from

30

$$V_{lc1} = V_s - V_d$$

$$V_{lc2} = V_s - V_d$$

35

into

$$V_{lc1} = V_s - V_d + K \times V_{ad}$$

40

$$V_{lc2} = V_s - V_d - K \times V_{ad}$$

45

respectively.

50

[0061] After that, every time a period of time that is an integral number of times as long as one horizontal write period 1H has passed, the voltages **Vcs1**, **Vcs2**, **Vlc1** and **Vlc2** alternate their levels at the times **T4** and **T5**. The intervals between the repeated changes at T4 and T5 may be appropriately determined to be one, two, three or more times as long as 1H in view of the method for driving the liquid crystal display device (such as the method of inverting the polarity) and the display status (such as the degree of flicker or roughness of the image on the screen). Such alternate level changes are continued until the picture element is rewritten next time (i.e., until a point in time equivalent to T1 arrives). Consequently, the effective values of the voltages **Vlc1** and **Vlc2** applied to the sub-picture element electrodes become:

55

$$V_{lc1} = V_s - V_d + K \times (1/2) V_{ad}$$

$$V_{lc2} = V_s - V_d - K \times (1/2) V_{ad}$$

5 respectively.

[0062] Therefore, the effective voltages **V1** and **V2** applied to the liquid crystal layers of the sub-picture elements #1 and #2 become:

10

$$V_1 = V_{lc1} - V_{com}$$

15

$$V_2 = V_{lc2} - V_{com}$$

That is to say,

20

$$V_1 = V_s - V_d + K \times (1/2) V_{ad} - V_{com}$$

25

$$V_2 = V_s - V_d - K \times (1/2) V_{ad} - V_{com}$$

30 respectively.

[0063] As a result, the difference ΔV_{12} ($=V_1-V_2$, which will be sometimes referred to herein as " ΔV_{α} ") between the effective voltages applied to the liquid crystal layers of the sub-picture element #1 and #2 becomes

35

$$\Delta V_{12} = K \times V_{ad}$$

(where $K = C_{cs}/(C_{lc} + C_{cs})$). It should be noted that the voltage dependence of C_{lc} is not taken into consideration in this example.

40 **[0064]** Hereinafter, a specific example of a liquid crystal display device according to this preferred embodiment, in which C_{cs}/C_{lc} is set to be 0.85 and V_{ad} is defined to be 2.5 V, will be described.

[0065] Suppose the respective storage capacitors of red, green and blue picture elements have capacitance values C_{CS-R} , C_{CS-G} , and C_{CS-B} , respectively. In this case, $C_{CS-R} = C_{CS-G}$ is supposed to be satisfied and the parameter **X** representing the ratio of the capacitance value of the storage capacitor of the blue picture element to that of the storage capacitors of the other color picture elements is supposed to be given by $X = C_{CS-B}/C_{CS-G} = C_{CS-B}/C_{CS-R}$.

45 **[0066]** The variations in the chromaticity represented by u' and v' chromaticity coordinates with the grayscale at the frontal viewing angle and at an oblique viewing angle (of which the orientation was nine o'clock direction and the polar angle was 45 degrees) in a situation where X was set to be 1.00, 0.68, 0.56 or 0.45 are shown in FIGS. **10(a)** through **10(d)**. Specifically, FIGS. **10(a)** and **10(b)** are graphs showing the grayscale dependences of u' and v' at the frontal viewing angle, while FIGS. **10(c)** and **10(d)** are graphs showing the grayscale dependences of u' and v' at the oblique viewing angle.

50 **[0067]** As can be seen from FIGS. **10(a)** and **10(b)**, at the frontal viewing angle, the grayscale dependence remained the same in both u' and v' no matter how much the X value changed. On the other hand, as can be seen from FIGS. **10(c)** and **10(d)**, at the oblique viewing angle, the smaller the X value, the more significantly u' and v' decreased in the vicinity of 140/255 grayscale. Among other things, v' changed particularly steeply and the shift toward the yellow range at the oblique viewing angle could be reduced effectively by decreasing the X value (i.e., $X < 1$). The best X value for the liquid crystal display device of this example would be 0.56 according to the results shown in FIG. **10**.

55 **[0068]** In the liquid crystal display device of this example, the best X value was 0.56. However, if the CS oscillating

voltage **V_{ad}**, the storage capacitance **C_{cs}**, and/or the liquid crystal capacitance **C_{lc}** change(s), then the best X value will also change. That is why the best X value may be defined appropriately in that case. Also, in this example, $C_{CS-G}=C_{CS-R}$ is supposed to be satisfied. However, if $C_{CS-G}<C_{CS-R}$, the color shift caused by the earlier saturation of the green ray than the red ray in the voltage-transmittance curves shown in FIGS. 3(a) and 3(b) can be minimized.

[0069] Also, if the multi-picture element structure disclosed in Patent Document No. 2 is adopted, a predetermined effective voltage difference can be produced between sub-picture elements by adjusting the **V_{ad}** value irrespective of the variation that should occur between respective liquid crystal display devices being manufactured and unlike the multi-picture element structure disclosed in Patent Document No. 4. In the example described above, the amplitudes of the two CS bus line voltages **V_{cs1}** and **V_{cs2}** are both supposed to be **V_{ad}**. However, those amplitudes may also be defined independently of each other.

[0070] In a liquid crystal display device that uses TFTs, the voltage at a sub-picture element electrode should decrease by ΔV_d by nature when the gate voltage **V_g** falls from **V_{gH}** to **V_{gL}** as shown in FIG. 9. In this case, the ΔV_d value depends on the ratio of the parasitic capacitance **C_{gd}** between the gate electrode and drain electrode of a TFT to the sum of the capacitances of all capacitors that are connected to the drain electrode (namely, the liquid crystal capacitor **C_{lc}**, storage capacitor **C_{cs}** and other parasitic capacitors). Normally, **C_{gd}**, **C_{lc}** and **C_{cs}** are dominant capacitances and the ΔV_d value can be given by $\Delta V_d = C_{gd} / (C_{lc} + C_{cs})$. That is why if only the **C_{cs}** values are simply changed as described above to obtain a desired ΔV_α on a color picture element basis, then the ΔV_d value should also be different from one color picture element to another. If the ΔV_d values are different between respective color picture elements, the average of the voltages to be applied to the respective liquid crystal layers of the color picture elements (i.e., the DC level) will also vary. In that case, in a typical configuration in which a counter electrode is provided in common for all picture elements, the DC voltage components applied to the liquid crystal layers of all picture elements could not be reduced sufficiently even if the counter voltage was regulated. And if the DC voltage components applied to the liquid crystal layers were high, then the display quality or reliability would be affected. That is a problem.

[0071] Such a problem could be avoided by providing a counter electrode for each group of color picture elements of the same color and by regulating the counter voltage applied to the counter electrode associated with each group of color picture elements. Naturally, if the electrical configuration of only blue picture elements (and/or cyan picture elements) should be different from that of the other color picture elements, then a first counter electrode associated with a group of blue picture elements (and/or cyan picture elements) and a second counter electrode associated with groups of picture elements of the other colors should be provided and the counter voltages should be regulated so as to compensate for ΔV_d for the first and second counter electrodes independently of each other.

[0072] If such a measure was taken, however, the counter electrode should be split into at least two sections and respectively predetermined voltages (i.e., counter voltages) should be applied to those two sections of the counter electrode independently of each other, thus complicating the configuration of the liquid crystal display device and increasing its cost.

[0073] Thus, to overcome such a problem, a liquid crystal display device that can sufficiently reduce the DC voltage components applied to the liquid crystal layer of every color picture element without complicating the structure too much to avoid that increase in cost will be described as another preferred embodiment of the present invention.

[0074] FIG. 11 is an equivalent circuit diagram representing a picture element with a multi-picture element structure of a liquid crystal display device 200 as another preferred embodiment of the present invention. Unlike the picture element shown in FIG. 8, each of the sub-picture elements #1 and #2 of the picture element shown in FIG. 11 has two storage capacitors. The respective storage capacitor counter electrodes of the two storage capacitors of sub-picture element #1 are electrically independent of each other, and those of the two storage capacitors of sub-picture element #2 are also electrically independent of each other.

[0075] As shown in FIG. 11, sub-picture element #1 includes storage capacitors **CS1A** and **CS1B** and sub-picture element #2 includes storage capacitors **CS2A** and **CS2B**. The storage capacitor counter electrodes of the storage capacitors **CS1A** and **CS2B** are electrically connected to the same CS bus line #1, the storage capacitor counter electrodes of the storage capacitors **CS1B** and **CS2A** are electrically connected to the same CS bus line #2, and those CS bus lines #1 and #2 are electrically independent of each other. In this example, square waves, of which the phases are different from each other by 180 degrees and of which the amplitude is **V_{ad}** as shown in FIG. 9, are used as the CS voltages.

[0076] Suppose the capacitance values of these storage capacitors **CS1A**, **CS1B**, **CS2A** and **CS2B** are identified by **C_{cs1A}**, **C_{cs1B}**, **C_{cs2A}** and **C_{cs2B}**, respectively. In that case, as the CS voltages supplied through the CS bus lines #1 and #2 have mutually opposite phases, the effective storage capacitance value **C_{cs1α}** of sub-picture element #1 is given by **C_{cs1A}**-**C_{cs1B}** and the effective storage capacitance value **C_{cs2α}** of sub-picture element #2 is given by **C_{cs2A}**-**C_{cs2B}**. As a result, by setting **C_{cs1α}** or **C_{cs2α}** of blue and/or cyan picture element(s) among multiple color picture elements (i.e., primary color picture elements) that form a single color display pixel to be smaller than that of the other color picture elements as described above, the ΔV_α value of the blue and/or cyan picture element(s) can be smaller than that of the other color picture elements.

[0077] In this case, supposing $Ccs1\beta = Ccs1A + Ccs1B$ and $Ccs2\beta = Ccs2A + Ccs2B$, if the $Ccs1\beta$ and $Ccs2\beta$ values remain almost the same in every picture element, then the problem that would be caused if ΔV_d is different from one color picture element to another can be avoided. That is to say, by making the $Ccs1\beta$ and $Ccs2\beta$ values substantially the same in every picture element, TFTs #1 and #2 of every picture element can have the same design, and therefore, the ΔV_d values can also be substantially the same in every picture element. With such a configuration, there is no need to perform the additional process step of patterning the counter electrode or to generate a plurality of counter voltages. And such a configuration is realized just by changing the patterns of a photomask for use in the manufacturing process of TFTs. As a result, the increase in cost can be minimized, too.

[0078] As described above, normally, ΔV_d is calculated by $C_{gd}/(C_{lc} + C_{cs})$ but (since the dielectric constant of the liquid crystal layer varies as liquid crystal molecules with dielectric anisotropy change their orientations) C_{lc} changes with the voltage applied to the liquid crystal layer. That is why to make ΔV_d substantially the same in every picture element and at every grayscale, the ratio of C_{cs} to C_{lc} (which will be sometimes simply referred to herein as a "Ccs ratio") is preferably substantially constant in every picture element.

[0079] On top of that, the liquid crystal display device **200** shown in FIG. **11** can be designed more flexibly than the liquid crystal display device **100** shown in FIG. **8**.

[0080] In the configuration shown in FIG. **8**, the ΔV_α value changes proportionally to the C_{cs1} value. That is why to reduce the ΔV_α value to one-tenth, the C_{cs1} value also needs to be reduced to one-tenth in the liquid crystal display device **100** shown in FIG. **8**. As the capacitance value of a storage capacitor depends on the area of the electrode, the electrode's area should also be reduced to one-tenth if the C_{cs1} value should be reduced to one-tenth. This is not beneficial considering the electrode patterning precision currently available and the eventual production yield. That is to say, the magnitude of the variation in a situation where the ΔV_α value of a blue picture element should be reduced in the liquid crystal display device **100** shown in FIG. **8** (i.e., the difference from the ΔV_α value of the other color picture elements) would be restricted by the patterning precision or the production yield. In other words, the flexibility of design would decrease. It is naturally possible to increase the ΔV_α value of the other color picture elements to relax such a restriction. However, since the ΔV_α value is essentially determined from the viewpoint of the viewing angle characteristic, such a measure should not be adopted. On the other hand, in the liquid crystal display device **200** shown in FIG. **11**, the ΔV_α value is determined based on the difference between the capacitance values of the storage capacitors **CS1A** and **CS1B**. That is to say, the ΔV_α value does not directly depend on the capacitance values of the storage capacitors **CS1A** and **CS1B** themselves, and therefore, is free from the restriction on the patterning precision or production yield. For example, to reduce the ΔV_α value of the blue picture element to one-tenth, the color picture elements other than the blue picture element may have capacitance values of 100 pF and 50 pF in their respective storage capacitors **CS1A** and **CS1B** (i.e., $CS1A - CS1B = 50$ pF) and the blue picture element may have capacitance values of 55 pF and 50 pF in their respective storage capacitors **CS1A** and **CS1B** (i.e., $CS1A - CS1B = 5$ pF). That is to say, the capacitance values of the storage capacitors **CS1A** and **CS1B** of the blue picture element can be close to those of the other color picture elements, and the ΔV_α value can be set flexibly on a color-by-color basis. Furthermore, as described above, $C_{cs1\beta}$ and $C_{cs2\beta}$ are more preferably substantially the same in every picture element. Specifically, the blue picture element more preferably satisfies $CS1A = 77.5$ pF and $CS1B = 72.5$ pF, of which the sum is equal to the sum of the capacitance values of the storage capacitors **CS1A** and **CS1B** (=150 pF) in every picture element.

[0081] The liquid crystal display device **200** shown in FIG. **11** can be used to not only minimize the shift in color balance at an oblique viewing angle as described above but also increase the precision of setting the ΔV_α value as well.

[0082] The ΔV_α value depends on the product of the capacitance value of a storage capacitor and the amplitude of the CS voltage supplied from an external circuit. In the liquid crystal display device **100** shown in FIG. **8**, to increase the precision of setting the storage capacitance value, the storage capacitance value needs to be a relatively large value. In that case, the CS voltage supplied from an external circuit will have decreased amplitude and the precision of setting the amplitude of the CS voltage will decrease. Conversely, to increase the precision of setting the amplitude of the CS voltage by increasing the amplitude of the CS voltage supplied from the external circuit, the storage capacitance value should be reduced to a smaller value, and therefore, the precision of setting the storage capacitance value will decrease. In contrast, with the configuration shown in FIG. **11**, the storage capacitance value can be set to be a relatively large value with the amplitude of the voltage supplied from an external circuit kept sufficient large. As a result, the precision of setting the ΔV_α value can be increased.

[0083] Furthermore, by electrically connecting the storage capacitor counter electrodes of the storage capacitors **CS1A** and **CS2B** to the same CS bus line #1 and the storage capacitor counter electrodes of the storage capacitors **CS1B** and **CS2A** to the same CS bus line #2 (which is electrically independent of CS bus line #1), respectively, as shown in FIG. **11**, the number of electrically independent CS bus lines can be cut down, which is also beneficial.

[0084] FIG. **12** illustrates a picture element structure for a liquid crystal display device **200A** as a preferred embodiment of the present invention. The equivalent circuit of the liquid crystal display device **200A** is the same as that of the liquid crystal display device **200** shown in FIG. **11**. In FIG. **12**, illustrated schematically are the structure of two picture elements that are located at the intersection between the m^{th} row and n^{th} column and at the intersection between the m^{th} row and

(n+1)th column on the TFT substrate, among multiple picture elements that are arranged in column and rows. The picture element at the intersection between the mth row and nth column is either a red picture element or a green picture element, while the picture element at the intersection between the mth row and (n+1)th column is a blue picture element. In the following description, any pair of components shown in multiple drawings and having substantially the same function will be identified by the same reference numeral. And once a component has been described, the description of its counterpart will be omitted herein to avoid redundancies.

[0085] In this liquid crystal display device **200A**, each picture element **P** includes a first sub-picture element **SP1** and a second sub-picture element **SP2a** and **SP2b**, of which the liquid crystal layers can be supplied with mutually different voltages, and at a certain grayscale, the first sub-picture element has a higher luminance than the second sub-picture element. The second sub-picture element includes second sub-picture element portions **SP2a** and **SP2b**, which are arranged so as to interpose the first sub-picture element **SP1** between them. That is to say, this liquid crystal display device **200A** has the multi-picture element structure shown in FIG. 7. However, the area of the second sub-picture element (i.e., the combined area of the second sub-picture element portions **SP2a** and **SP2b**) is approximately three times as large as that of the first sub-picture element **SP1**. In this case, the second sub-picture element portions **SP2a** and **SP2b** are located spatially apart from each other, but are electrically equivalent to each other, have the same voltage applied to their liquid crystal layers, and also exhibit the same electro-optical characteristic (i.e., V-T characteristic). That is why from the viewpoint of V-T characteristic, these second sub-picture element portions **SP2a** and **SP2b** form a single sub-picture element (i.e., the second sub-picture element). That is to say, the picture element **P** exhibits two different types of V-T characteristics and can also be regarded as having a structure in which a single picture element has been split into first and second sub-picture elements **SP1** and **SP2**. In the following description, these second sub-picture element portions **SP2a** and **SP2b** will be collectively referred to herein as the "second sub-picture element **SP2**" for the sake of simplicity.

[0086] As shown in FIG. 12, the first sub-picture element **SP1** is arranged in the area defined by a first sub-picture element electrode **111-1**, while the second sub-picture element portions **SP2a** and **SP2b** are arranged in the areas defined by second sub-picture element electrode halves **111-2a** and **111-2b**.

[0087] Now look at the picture element **P** located at the intersection between the mth row and nth column (which will be simply referred to herein as an (m, n) picture element). The (m, n) picture element is driven by TFTs **116-1** and **116-2** that are connected to a gate bus line **112(m)** and a source bus line **114(n)**. The drain of the TFT **116-1** is connected to the first sub-picture element electrode **111-1** at a contact portion **119-1** by way of a drain extension line **117-1**. On the other hand, the drain of the TFT **116-2** is connected to the second sub-picture element electrode half **111-2a** at a contact portion **119-2a** by way of a drain extension line **117-2** and is also connected to the second sub-picture element electrode half **111-2b** at a contact portion **119-2b** by way of the drain extension line **117-2**. The sub-picture element electrodes **111-1**, **111-2a** and **111-2b**, along with the liquid crystal layer (not shown) and the counter electrode (not shown, either) opposed to the electrodes through the liquid crystal layer, form liquid crystal capacitors. Specifically, the sub-picture element electrode **111-1** forms Clc1 shown in FIG. 11 and the sub-picture element electrodes **111-2a** and **111-2b** form Clc2 shown in FIG. 11.

[0088] In this example, the source bus line **114(n)** includes two main lines that run in the column direction and a bridge portion that connects those two main lines together. One of the two main lines of the source bus line **114(n)** overlaps with the sub-picture element electrodes **111-1**, **111-2a** and **111-2b** on the nth column, while the other main line overlaps with the sub-picture element electrodes on the (n-1)th column. In this case, to reduce the parasitic capacitance **Csd** between the source bus line **114(n)** and the sub-picture element electrodes sufficiently, an interlayer dielectric film of a resin is provided between them. In other words, by providing such an interlayer dielectric film, the sub-picture element electrodes can be arranged so as to overlap with the source bus line **114(n)** and the aperture ratio of the pixel can be increased as a result.

[0089] The TFTs **116-1** and **116-2** have a bottom-gate structure and each include: a gate electrode, which is provided as an extended portion of the gate bus line **112(m)**; a semiconductor layer (not shown), which is arranged over the gate electrode; and source/drain electrodes, which are arranged in the source region of the semiconductor layer. The source electrode is provided as an extended portion of the source bus line **114(n)**. The drain electrodes of the TFTs **116-1** and **116-2** form an integral part of the drain extension lines **117-1** and **117-2**, respectively. Furthermore, the interlayer dielectric film is provided so as to cover all of these members. And the sub-picture element electrodes **111-1**, **111-2a** and **111-2b** are arranged on the interlayer dielectric film. At the contact portions **119-1**, **119-2a** and **119-2b** that are arranged to fill the contact holes that have been cut through the interlayer dielectric film, the drain extension lines **117-1** and **117-2** are connected to the sub-picture element electrodes **111-1**, **111-2a** and **111-2b**.

[0090] Next, the configuration of the storage capacitors of the (m, n) picture element will be described. In this example, the (m, n) picture element may be either a red picture element or a green picture element.

[0091] Through the picture elements on the mth row, two CS bus lines (i.e., storage capacitor lines) **113-1** and **113-2** run. The CS bus lines **113-1** and **113-2** respectively correspond to CS bus lines #1 and #2 shown in FIG. 11.

[0092] The sub-picture element **SP1** includes two storage capacitors **CS1A** and **CS1B**. The storage capacitor **CS1A**

is arranged at an intersection between the drain extension line **117-1** and the CS bus line **113-1**. On the other hand, the storage capacitor **CS1B** is arranged in an area where an extended portion **117-1E** of the drain extension line **117-1** and a broadened portion of the CS bus line **113-1** overlap with each other. Both of the CS bus lines **113-1** and **113-2** are made of the same conductive layer as the gate bus line **112(m)** and are covered with the gate insulating film (not shown).
 The dielectric layers of the storage capacitors **CS1A** and **CS1B** are both gate insulating films and the capacitance values thereof are both proportional to the areas of the electrodes. In this example, the capacitance value of the storage capacitor **CS1A** is smaller than that of the storage capacitor **CS1B** as shown in FIG. 12.

[0093] The sub-picture element **SP2** includes two storage capacitors **CS2A** and **CS2B**. The storage capacitor **CS2A** is arranged at an intersection between the drain extension line **117-2** and the CS bus line **113-2**. On the other hand, the storage capacitor **CS2B** is arranged in an area where an extended portion **117-2E** of the drain extension line **117-2** and a broadened portion of the CS bus line **113-1** overlap with each other. The dielectric layers of the storage capacitors **CS2A** and **CS2B** are both gate insulating films and the capacitance values thereof are both proportional to the areas of the electrodes. In this example, the capacitance value of the storage capacitor **CS2A** is smaller than that of the storage capacitor **CS2B** as shown in FIG. 12.

[0094] Next, the configuration of the storage capacitors of the (m, n+1) picture element (i.e., a blue picture element) will be described.

[0095] The sub-picture element **SP1** of the blue picture element includes two storage capacitors **CS1A** and **CS1B**. The storage capacitor **CS1A** is arranged in an area where a first extended portion **117-1E1** of the drain extension line **117-1** and a broadened portion of the CS bus line **113-1** overlap with each other. On the other hand, the storage capacitor **CS1B** is arranged in an area where a second extended portion **117-1E2** of the drain extension line **117-1** and a broadened portion of the CS bus line **113-2** overlap with each other and at an intersection between the drain extension line **117-1** and the CS bus line **113-2**. In this example, the capacitance value of the storage capacitor **CS1A** is larger than that of the storage capacitor **CS1B** as shown in FIG. 12.

[0096] The sub-picture element **SP2** of the blue picture element includes two storage capacitors **CS2A** and **CS2B**. The storage capacitor **CS2A** is arranged in an area where an extended portion **117-2E1** of the drain extension line **117-2** and a broadened portion of the CS bus line **113-2** overlap with each other. On the other hand, the storage capacitor **CS2B** is arranged in an area where a second extended portion **117-2E2** of the drain extension line **117-2** and a broadened portion of the CS bus line **113-1** overlap with each other and at an intersection between the drain extension line **117-2** and the CS bus line **113-1**. In this example, the capacitance value of the storage capacitor **CS2A** is larger than that of the storage capacitor **CS2B** as shown in FIG. 12.

[0097] In this manner, the connectivity between the storage capacitors **CS1A** and **CS1B** and their associated CS bus lines and the magnitudes of the capacitance values of the storage capacitors **CS1A** and **CS1B** in the (m, n) picture element turn over in the (m, n+1) picture element. This arrangement is adopted to cope with a drive mode in which the polarities of write voltages (i.e., the polarities of the voltages supplied through the source bus line **114** with reference to the counter voltage (that is called a "display signal voltage")) invert between the (m, n) and (m, n+1) picture elements. Such a drive mode is sometimes called a "dot inversion drive".

[0098] In each of the (m, n) and (m, n+1) picture elements, the storage capacitor counter electrodes of the storage capacitors **CS1A** and **CS2B** are electrically connected to the same CS bus line **113-1**, while the storage capacitor counter electrodes of the storage capacitors **CS1B** and **CS2A** are electrically connected to the same CS bus line **113-2**. Suppose the square waves, of which the phases are different from each other by 180 degrees and which have amplitude **V_{ad}** as shown in FIG. 9, are supplied as the CS voltages through the CS bus lines **113-1** and **113-2** as in the example described above and the capacitance values of the storage capacitors **CS1A**, **CS1B**, **CS2A** and **CS2B** are identified by **C_{cs1A}**, **C_{cs1B}**, **C_{cs2A}** and **C_{cs2B}**, respectively. In that case, since the phases of the CS voltages supplied through the CS bus lines **113-1** and **113-2** are opposite to each other, the effective storage capacitance value **C_{cs1α}** for the sub-picture element **SP1** becomes **C_{cs1A}-C_{cs1B}** and the effective storage capacitance value **C_{cs2α}** for the sub-picture element **SP2** becomes **C_{cs2A}-C_{cs2B}**. That is why as already described with reference to FIG. 11, by setting the **C_{cs1α}** or **C_{cs2α}** value of the blue picture element among multiple color picture elements that form a single color display pixel (i.e., picture elements in the three primary colors of R, G and B in this example) to be smaller than that of the other color picture elements, the Δv_{α} value of the blue picture element can be smaller than that of the other color picture elements. In the example illustrated in FIG. 12, by increasing the capacitance values of the blue picture element, i.e., **C_{cs1B}** and **C_{cs2B}** of the (m, n+1) picture element, **C_{cs1α}** and **C_{cs2α}** are decreased.

[0099] In this case, supposing **C_{cs1β}**=**C_{cs1A}+C_{cs1B}** and **C_{cs2β}**=**C_{cs2A}+C_{cs2B}**, the **C_{cs1β}** and **C_{cs2β}** values remain almost the same in every picture element as shown in FIG. 12. That is why the problem that would occur if ΔV_d were different from one color picture element to another can be avoided. Specifically, both of the (m, n) and (m, n+1) picture elements have the same **C_{cs1β}** and **C_{cs2β}** values.

[0100] Furthermore, in the example illustrated in FIG. 12, the ratio of the capacitance of the liquid crystal capacitor **Clc1** to the storage capacitance **C_{csβ1}** in the sub-picture element **SP1** and the ratio of the capacitance of the liquid crystal capacitor **Clc2** to the storage capacitance **C_{csβ2}** in the sub-picture element **SP2** are substantially equal to each

other. Since the liquid crystal layers of the sub-picture elements **SP1** and **SP2** have the same thickness, the liquid crystal capacitance of each sub-picture element is proportional to the area of its associated sub-picture element electrode. And since the area of the sub-picture element **SP2** is roughly three times as large as that of the sub-picture element **SP1**, the liquid crystal capacitance of the sub-picture element **SP2** will also be approximately three times as large as that of the sub-picture element **SP1**. That is why by setting the capacitance value $C_{cs2\beta}$ of the storage capacitor of the sub-picture element **SP2** to be approximately three times as large as the capacitance value $C_{cs\beta1}$ of the storage capacitor of the sub-picture element **SP1**, the ratio of the capacitance value of the liquid crystal capacitor **Clc1** to the storage capacitance $C_{cs\beta1}$ in the sub-picture element **SP1** is made approximately equal to the ratio of the capacitance value of the liquid crystal capacitor **Clc2** to the storage capacitance $C_{cs\beta2}$ in the sub-picture element **SP2**.

[0101] Furthermore, in the example illustrated in FIG. 12, the drain extension lines **117-1** and **117-2** and the drain extension lines' extended portions **117-1E**, **117-2E**, **117-1E1**, **117-1E2**, **117-2E1** and **117-2E2** are arranged such that the blue picture element (i.e., (m, n+1) picture element in this example) and the other picture elements (i.e., (m, n) picture element in this example) have apertures (i.e., openings to pass the incoming light) of the same shape. By making the shapes of the apertures of all picture elements substantially the same in this manner, the uniformity of display can be increased.

[0102] Hereinafter, a liquid crystal display device as still another preferred embodiment of the present invention will be described with reference to FIGS. 13 and 14.

[0103] FIG. 13 is an equivalent circuit diagram of one of the two sub-picture elements of a single picture element in a liquid crystal display device **300** having a dual picture element structure.

[0104] As already described with reference to FIG. 8, if the capacitance value of the storage capacitor of the blue picture element is reduced such that the blue picture element has the smallest $\Delta V\alpha$ value, then the blue picture element will have different ΔVd from the other color picture elements. Thus, in this liquid crystal display device **300**, to compensate for the decrease in the capacitance value of the storage capacitor of the blue picture element, a gate-drain capacitor **CGD-1** is formed using the gate bus line on an adjacent row. In this example, as to a blue picture element belonging to the mth row, CGD-1 is formed with the gate bus line on the (m-1)th row. However, the present invention is in no way limited to this specific example. Alternatively, CGD-1 may also be formed using the gate bus line on the (m+1)th row. If such a compensating gate-drain capacitor **CGD-1** (of which the capacitance value is identified by C_{CGD-1}) is formed with a gate bus line at an OFF-state potential in this manner, then $\Delta Vd = Cgd / (Clc + Ccs + C_{CGD-1})$ will be satisfied. Thus, by regulating C_{CGD-1} (i.e., by ironing out the difference in capacitance value between the storage capacitor of the blue picture element and those of the other color picture elements), every color picture element can have the same ΔVd value.

[0105] FIG. 14 illustrates a picture element structure for a liquid crystal display device **300A** as a preferred embodiment of the present invention. The equivalent circuit of the liquid crystal display device **300A** is the same as that of the liquid crystal display device **300** shown in FIG. 13. In FIG. 14, illustrated schematically are the structure of two picture elements that are located at the intersection between the mth row and nth column and at the intersection between the mth row and (n+1)th column on the TFT substrate, among multiple picture elements that are arranged in column and rows. The picture element at the intersection between the mth row and nth column is either a red picture element or a green picture element, while the picture element at the intersection between the mth row and (n+1)th column is a blue picture element. In this liquid crystal display device **300A**, each picture element **P** includes a first sub-picture element **SP1** and a second sub-picture element **SP2**. That is to say, this liquid crystal display device **300A** has the multi-picture element structure shown in FIG. 1 and the ratio in the area of the first sub-picture element **SP1** to the second sub-picture element **SP2** is one to one.

[0106] Unlike the liquid crystal display device **200A** shown in FIG. 12, each sub-picture element of the liquid crystal display device **300A** has only one storage capacitor. Specifically, the sub-picture element **SP1** includes only a storage capacitor **CS1A** between the CS bus line **113-1** and the extended portion **117-1E** of the drain extension line **117-1** but has no storage capacitors with the CS bus line **113-2**. On the other hand, the sub-picture element **SP2** includes only a storage capacitor **CS2A** between the CS bus line **113-2** and the extended portion **117-2E** of the drain extension line **117-2** but has no storage capacitors with the CS bus line **113-1**. In this respect, the liquid crystal display device **300A** has a simpler configuration than the liquid crystal display device **200A**.

[0107] In the liquid crystal display device **300A**, by setting the capacitance values (or the areas) of the storage capacitors **CS1A** and **CS2A** of the blue picture element (i.e., the (m, n+1) picture element) to be smaller than those of the storage capacitors **CS1A** and **CS2A** of the other color picture element (i.e., the (m, n) picture element) as described above, the $\Delta V\alpha$ value of the blue picture element can be smaller than that of the other color picture element.

[0108] Look at the blue picture element (i.e., the (m, n+1) picture element) now. The drain extension line **117-1** includes a first extended portion **117-1E1** that forms the storage capacitor **CS1A** of the sub-picture element **SP1** and a second extended portion **117-1E2** that overlaps with a gate bus line **112(m-1)**. A compensating gate-drain capacitor **CGD-1a** is formed in an area where the second extended portion **117-1E2** overlaps with the gate bus line **112(m-1)**. On the other hand, the drain extension line **117-2** includes a first extended portion **117-2E1** that forms the storage capacitor **CS2A** of the sub-picture element **SP2** and a second extended portion **117-2E2** that overlaps with a gate bus line **112(m+1)**. A compensating gate-drain capacitor **CGD-2a** is formed in an area where the second extended portion **117-2E2** overlaps

with the gate bus line **112 (m+1)**.

[0109] Comparing the blue picture element (i.e., the (m, n+1) picture element) to the other picture element (i.e., the (m, n) picture element), it can be seen that the capacitance value (or the area shown in FIG. 14) of the storage capacitor **CS1A** is greater in the (m, n) picture element than in the (m, n+1) picture element. It can also be seen that the compensating gate-drain capacitors **CGD-1a** and **CGD-2a** are provided only for the (m, n+1) picture element. That is to say, the compensating gate-drain capacitors **CGD-1a** and **CGD-2a** are provided to compensate for the deficit in the capacitance value of the storage capacitor **CS1A** of the (m, n+1) picture element with the (m, n) picture element.

[0110] It should be noted that both of the (m, n) and (m, n+1) picture elements have the gate-drain capacitors **CGD-1b** and **CGD-2b**. These are capacitors formed between the extended portion of the gate bus line (m) to drive the (m, n) picture element and the drain extension line **117-1** or **117-2**. That is why their capacitance value is included in Cgd in the numerator of the equation that defines ΔV_d and these capacitors are provided to adjust the Cgd value.

[0111] Thus, by adopting the configuration of the liquid crystal display device **300A**, the ΔV_d values can be equalized in every color picture element with a simpler configuration than that of the liquid crystal display device **200A**.

[0112] Furthermore, in the example illustrated in FIG. 14, the drain extension lines **117-1** and **117-2** and the extended portion of the gate bus line **112(m)** are arranged such that the blue picture element (i.e., (m, n+1) picture element in this example) and the other picture element (i.e., (m, n) picture element in this example) have apertures (i.e., openings to pass the incoming light) of substantially the same shape. By making the shapes of the apertures of all picture elements substantially the same in this manner, the uniformity of display can be increased. Just like the liquid crystal display device **200A**, the liquid crystal display device **300A** also has a structure in which the aperture ratio of a pixel is increased by making the sub-picture element electrodes **111-1** and **111-2** overlap with the source bus line **114(n)** with an interlevel dielectric film interposed between them.

[0113] FIG. 15 illustrates a picture element structure for a liquid crystal display device **400A** as another preferred embodiment of the present invention. The equivalent circuit of the liquid crystal display device **400A** is the same as that of the liquid crystal display device **100** shown in FIG. 8. In FIG. 15, illustrated schematically are the structure of two picture elements that are located at the intersection between the mth row and nth column and at the intersection between the mth row and (n+1)th column on the TFT substrate, among multiple picture elements that are arranged in column and rows. The picture element at the intersection between the mth row and nth column is either a red picture element or a green picture element, while the picture element at the intersection between the mth row and (n+1)th column is a blue picture element. In this liquid crystal display device **400A**, each picture element **P** includes a first sub-picture element **SP1** and a second sub-picture element **SP2**. That is to say, this liquid crystal display device **400A** has the multi-picture element structure shown in FIG. 1 and the ratio in the area of the first sub-picture element **SP1** to the second sub-picture element **SP2** is one to one.

[0114] In the liquid crystal display device **400A**, by setting the capacitance values (or the areas) of the storage capacitors **CS1** and **CS2** of the blue picture element (i.e., the (m, n+1) picture element) to be smaller than those of the storage capacitors **CS1** and **CS2** of the other color picture element (i.e., the (m, n) picture element), the ΔV_α value of the blue picture element can be smaller than that of the other color picture element.

[0115] ΔV_d can be regulated by adjusting Cgd (i.e., the numerator of the equation that gives ΔV_d) of the TFT.

[0116] As shown in FIG. 15, in the TFT **116-1**, the areas of overlap of the drain electrodes **116-1Da** and **116-1Db** with the gate electrode **116-1G** are greater in the (m, n) picture element than in the (m, n+1) picture element. In the same way, in the TFT **116-2**, the areas of overlap of the drain electrodes **116-2Da** and **116-2Db** with the gate electrode **116-2G** are greater in the (m, n) picture element than in the (m, n+1) picture element. That is why the Cgd capacitance value of the TFT **166-1** of the (m, n) picture element is greater than that of the TFT **166-1** of the (m, n+1) picture element by those extra areas of overlap of the drain electrodes (corresponding to CGD-1a and CGD-1b) with the gate electrode. In the same way, the Cgd capacitance value of the TFT **166-2** of the (m, n) picture element is greater than that of the TFT **166-2** of the (m, n+1) picture element by those extra areas of overlap of the drain electrodes (corresponding to CGD-2a and CGD-2b) with the gate electrode. And by ironing out such a difference in Cgd capacitance value, the difference in the capacitance value of the storage capacitor can be compensated for.

[0117] By adopting such a configuration, every picture element will have the same structure except the TFT section thereof, and therefore, every picture element will have an aperture of the same shape and a high degree of uniformity of display will be achieved. Just like the liquid crystal display devices **200A** and **300A** described above, the liquid crystal display device **400A** also has a structure in which the aperture ratio of a pixel is increased by making the sub-picture element electrodes **111-1** and **111-2** overlap with the source bus line **114(n)** with an interlevel dielectric film interposed between them.

[0118] FIG. 16 illustrates a picture element structure for a liquid crystal display device **500A** as another preferred embodiment of the present invention. The equivalent circuit of the liquid crystal display device **500A** is the same as that of the liquid crystal display device **100** shown in FIG. 8. In FIG. 16, illustrated schematically are not only the structure of two picture elements that are located at the intersection between the mth row and nth column and at the intersection between the mth row and (n+1)th column on the TFT substrate, among multiple picture elements that are arranged in

column and rows, but also the arrangement of ribs on the counter substrate. The picture element at the intersection between the m^{th} row and n^{th} column is either a red picture element or a green picture element, while the picture element at the intersection between the m^{th} row and $(n+1)^{\text{th}}$ column is a blue picture element. In this liquid crystal display device **500A**, each picture element **P** includes a first sub-picture element **SP1** and a second sub-picture element **SP2**. That is to say, this liquid crystal display device **500A** has the multi-picture element structure shown in FIG. 1 and the ratio in the area of the first sub-picture element **SP1** to the second sub-picture element **SP2** is one to one.

[0119] The liquid crystal display device **500A** is an MVA mode LCD, in which each of the sub-picture element electrodes **111-1** and **111-2** has slits as shown in FIG. 16 and in which liquid crystal molecules are aligned in a predetermined direction by an oblique electric field generated near the slits and an anchoring force produced by the ribs that have been formed on the surface of the counter substrate in contact with the liquid crystal layer. Specifically, those slits and ribs are arranged so as to form four liquid crystal domains, where liquid crystal molecules have four tilt angles that are different from each other by 90 degrees upon the application of a voltage, in each of the sub-picture elements **SP1** and **SP2**. Although the slits and ribs do not have to be aligned in such a pattern, each sub-picture element preferably has four liquid crystal domains to improve the viewing angle characteristic.

[0120] In the liquid crystal display device **500A**, by setting the areas of the sub-picture element electrodes **111-1** and **111-2** of the blue picture element (i.e., the $(m, n+1)$ picture element) to be smaller than those of the sub-picture element electrodes **111-1** and **111-2** of the other color picture element (i.e., the (m, n) picture element), the capacitance values of the liquid crystal capacitors **C1c1** and **C1c2** and the storage capacitors **Cs1** and **Cs2** (see FIG. 8) of the blue picture element can be smaller than those of the other color picture element.

[0121] This is a structure to be adopted in a situation where the interlevel dielectric film is relatively thin. In this structure, the sub-picture element electrodes **111-1** and **111-2** are arranged so as not to overlap with the source bus line **114(n)**. Also, most of the storage capacitors **CS1** and **CS2** is defined by providing extended portions **113-1E** and **113-2E**, which run parallel to the source bus line **114(n)**, for the CS bus lines **113-1** and **113-2** and by making the CS bus lines **113-1** and **113-2**, including parts of the extended portions **113-1E** and **113-2E**, overlap with the sub-picture element electrodes **111-1** and **111-2** with an interlevel dielectric film (not shown) interposed between them. In this example, each of the CS bus lines **113-1** and **113-2** includes a pair of extended portions **113-1E**, **113-2E** that overlaps with both edges of its associated sub-picture element electrode **111-1** or **111-2**. However, the present invention is in no way limited to this specific preferred embodiment. Also, the thickness of the interlevel dielectric film may be appropriately adjusted according to its dielectric constant and area. It should be noted that overlapping portions between the extended portions **117-1E** and **117-2E** of the drain extension lines **117-1** and **117-2** and the CS bus lines **113-1** and **113-2** also contribute to forming the storage capacitors.

[0122] In the liquid crystal display device **200A**, etc. described above, only the capacitance value of the storage capacitor **CS** is adjusted to make the ΔV_{α} value of the blue picture element different from the others. In this liquid crystal display device **500A**, however, the capacitance values of the liquid crystal capacitor **C1c** and the storage capacitor **CS** are adjusted. If the area of the sub-picture element electrode is reduced, the capacitance values of the liquid crystal capacitor **C1c** and storage capacitor **CS** will both decrease. But as the capacitance value of the storage capacitor **CS** decreases significantly, the ΔV_{α} value can be reduced eventually.

[0123] In the liquid crystal display device **500A**, ΔV_d is regulated by adjusting C_{gd} (i.e., the numerator of the equation that gives ΔV_d) of the TFT, as in the liquid crystal display device **400A** described above. As shown in FIG. 16, in this liquid crystal display device **500A**, the areas of the drain electrodes **116-1D** and **116-2D** of the TFTs **116-1** and **116-2** are increased in the (m, n) picture element compared to the $(m, n+1)$ picture element, and the areas of the source electrodes **116S** are increased, too. By adopting such a configuration, the C_{gd} capacitance value of the (m, n) picture element can be increased and the channel width of the TFT can also be increased effectively.

[0124] FIG. 17 illustrates a picture element structure for a liquid crystal display device **600A** as another preferred embodiment of the present invention. The equivalent circuit of the liquid crystal display device **600A** is the same as that of the liquid crystal display device **100** shown in FIG. 8. In FIG. 17, illustrated schematically are not only the structure of two picture elements that are located at the intersection between the m^{th} row and n^{th} column and at the intersection between the m^{th} row and $(n+1)^{\text{th}}$ column on the TFT substrate, among multiple picture elements that are arranged in column and rows, but also the arrangement of ribs on the counter substrate. FIG. 18A is a cross-sectional view of the device as viewed on the plane **18A-18A'** shown in FIG. 17, and FIG. 18B is a cross-sectional view of the device as viewed on the plane **18B-18B'** shown in FIG. 17.

[0125] The liquid crystal display device **600A** is an MVA mode LCD having the same alignment division structure as the liquid crystal display device **500A**. The picture element at the intersection between the m^{th} row and n^{th} column is either a red picture element or a green picture element, while the picture element at the intersection between the m^{th} row and $(n+1)^{\text{th}}$ column is a blue picture element. In this liquid crystal display device **600A**, each picture element **P** includes a first sub-picture element **SP1** and a second sub-picture element **SP2**. That is to say, this liquid crystal display device **600A** has the multi-picture element structure shown in FIG. 1 and the ratio in the area of the first sub-picture element **SP1** to the second sub-picture element **SP2** is one to one.

[0126] Just like the liquid crystal display device 500A, the liquid crystal display device 600A also includes a relatively thin interlevel dielectric film 126 between the source bus line 114(n) and the sub-picture element electrodes 111-1 and 111-2 (see FIGS. 18A and 18B). That is why the sub-picture element electrodes 111-1 and 111-2 are arranged so as not to overlap with the source bus line 114(n). Furthermore, the liquid crystal display device 600A includes not just the gate insulating film 122 of the liquid crystal display device 200A and other devices described above but also a spin-on-glass (SOG) film 121 on the gate insulating film 122. As the material of the SOG film, a spin-on-glass material including an organic component (i.e., a so-called "organic SOG material") is preferably used. Among other things, a SOG material with a Si-O-C bond as its skeleton or a SOG material with a Si-C bond as its skeleton can be used particularly effectively. As used herein, the SOG material is a material that can form a glass film (i.e., a silica-based coating) by a spin coating or any other suitable coating process.

[0127] The SOG film 121 is relatively thick. For that reason, if the SOG film 121 were interposed between the semiconductor layer 123 of the TFT (see FIG. 18A) and the gate electrode 112(m), then the TFT would not operate normally. To avoid such a situation, the SOG film 121 is not provided in a region of the TFT 116-1 or 116-2 where the gate insulating film 122 should function as such. In FIGS. 17 and 18A, that region is shown as a SOG film removed region 118T.

[0128] Also, the SOG film 121 has a relatively low dielectric constant of four or less, for example. That is why if the SOG film 121 is arranged between the electrodes, then the capacitance value of the capacitor to be formed will be small. For example, in the arrangement shown in FIG. 18C, the SOG film 121 is interposed between the CS bus line 113-1 and the sub-picture element electrodes 111-1 and 111-2. That is why the capacitor to be formed between those electrodes will have a small capacitance value and will contribute a little to forming a storage capacitor.

[0129] In the liquid crystal display device 600A, the SOG film removed regions 118C1 and 118C2 are defined between the drain extension line extended portions 117-E1 and 117-E2 and the CS bus lines 113-1 and 113-2 as shown in FIGS. 17 and 18B, thereby forming storage capacitors. Specifically, a storage capacitor CS1 is formed in the SOG film removed region 118C1 and a storage capacitor CS2 is formed in the SOG film removed region 118C2.

[0130] In the liquid crystal display device 600A, by setting the capacitance values of the storage capacitors CS1 and CS2 of the blue picture element (i.e., the (m, n+1) picture element) to be smaller than those of the storage capacitors CS1 and CS2 of the other color picture element (i.e., the (m, n) picture element), the $\Delta V\alpha$ value of the blue picture element can be smaller than that of the other color picture element.

[0131] ΔVd is regulated by adjusting Cgd (i.e., the numerator of the equation that gives ΔVd) of the TFT, as in the liquid crystal display devices 400A and 500A described above. Also, as in the liquid crystal display device 500A, the areas of the drain electrodes 116-1D and 116-2D of the TFTs 116-1 and 116-2 are increased in the (m, n) picture element compared to the (m, n+1) picture element, and the areas of the source electrodes 116S are increased, too. By adopting such a configuration, the Cgd capacitance value of the (m, n) picture element can be increased and the channel width of the TFT can also be increased effectively.

[0132] The method of regulating ΔVd by adjusting Cgd may be modified in various manners. According to the TFT configuration, any appropriate one may be selected from those various methods, or if necessary, two or more methods may be combined, too. Some of those modified methods of adjusting Cgd of a TFT are shown in FIGS. 19(a) through 19(g).

[0133] First, in the TFT section 70A shown in FIG. 19(a), Cgd of a color picture element other than a blue picture element is increased by extending the drain electrodes 116-1D and 116-2D.

[0134] On the other hand, in the TFT section 70B shown in FIG. 19(b), Cgd of a color picture element other than the blue picture element is increased and the channel width of the TFT is increased effectively by extending the drain electrodes 116-1D and 116-2D and the source electrode 116S.

[0135] These methods can be carried out just as described above. Other options are available as shown in FIGS. 19(c) through 19(g).

[0136] Specifically, in the TFT section 70C shown in FIG. 19(c), Cgd of the color picture element other than the blue picture element is increased by extending the drain electrode 116-1D. And by extending the drain electrode in the direction in which the gate bus line runs, the decrease in aperture ratio is minimized.

[0137] On the other hand, in the TFT section 70D shown in FIG. 19(d), not just Cgd of the color picture element other than the blue picture element but also the channel width of the TFT are increased effectively by extending the source electrode 116S, as well as the drain electrode 116-1D. And by extending the channel width of the TFT in the direction in which the gate bus line runs, the decrease in aperture ratio is minimized.

[0138] Furthermore, in the TFT section 70E shown in FIG. 19(e), CGD-1 is formed with the tip of the drain electrode 116D extended, thereby increasing not only Cgd of the color picture element other than the blue picture element but also the vertical channel width of the TFT. Since the shape of the source electrode 116S is not changed, the load on the source bus line 114 hardly increases.

[0139] Meanwhile, in the TFT section 70F shown in FIG. 19(f), not just Cgd of the color picture element other than the blue picture element but also the channel width of the TFT are increased effectively by extending the drain electrodes 116-1D and 116-2D. Since the shape of the source electrode 116S is not changed, the load on the source bus line 114 hardly increases.

[0140] Furthermore, in the TFT section **70G** shown in FIG. **19(g)**, not just C_{gd} of the color picture element other than the blue picture element but also the channel width of the TFT are increased even more effectively than in the TFT section **70F** by extending the source electrodes **116S1** and **116S2**, as well as the drain electrodes **116-1D** and **116-2D**.

[0141] Optionally, the configuration of the liquid crystal display device **700A** shown in FIG. **20** may also be adopted.

[0142] The liquid crystal display device **700A** basically has the same configuration as the liquid crystal display device **200A** shown in FIG. **12**. In the liquid crystal display device **200A**, two storage capacitors are provided for each sub-picture element (e.g., the storage capacitors **CS1A** and **CS1B** are provided for the sub-picture element **SP1**) and their capacitance values are changed between the blue picture element and the other color picture element, thereby making their ΔV_{α} different from each other. On the other hand, in the liquid crystal display device **700A**, each sub-picture element also includes two storage capacitors (e.g., the storage capacitors **CS1A** and **CS1B** are provided for the sub-picture element **SP1**) but the capacitance values of these storage capacitors are the same in every color picture element. In the liquid crystal display device **700A**, the drain extension line **117-1** for the first sub-picture element **SP1** of the blue picture element (i.e., the $(m, n+1)$ picture element) and the drain extension line **117-2** for the second sub-picture element **SP2** thereof are short-circuited together with a drain short-circuit line **117-3**, thereby reducing ΔV_{α} of the blue picture element to substantially zero. That is to say, since only the blue picture element does not have the multi-picture element structure, the viewing angle dependence of the blue grayscale characteristic will deteriorate but problems that would otherwise be caused by coloring or a variation in ΔV_d will never happen.

[0143] Any of these configurations that have been described with reference to FIGS. **12** through **19**, but the one shown in FIG. **20**, may be used either by itself or in any arbitrary combination with another one or other ones.

[0144] FIG. **21** shows the grayscale dependences of ΔV_d of respective color picture elements in a liquid crystal display device as a preferred embodiment of the present invention. The graph shown in FIG. **21** shows ΔV_d of the respective color picture elements in a situation where the ratio **X** of the capacitance value of the storage capacitor of the blue picture element to that of the storage capacitor of the other color picture elements is optimized to be 0.56 in order to minimize the shift toward the yellow range at an oblique viewing angle in the liquid crystal display device that has already been described with reference to FIG. **10**. Specifically, the curve **L(B)** shows ΔV_d of the blue picture element, the curve **L'(R, G)** shows ΔV_d of the other color picture elements, of which the difference in storage capacitance value is not compensated for, and the curve **L(R, G)** shows ΔV_d of the other color picture elements that has been substantially equalized with that of the blue picture element by adjusting C_{gd} .

[0145] As can be seen clearly from FIG. **21**, if $X=0.56$ and if the difference in storage capacitance is not compensated for at all, then the difference in ΔV_d between the blue picture element and the other color picture elements exceeds 0.5 V (=500 mV). The present inventors discovered and confirmed via experiments that when the difference in ΔV_d exceeded 150 mV, a flicker was produced and the reliability decreased. If the difference in ΔV_d exceeds 50 mV, then sometimes a degradation may be recognized in display quality. That is why to avoid the problems to be caused by the ΔV_d difference in actual products, ΔV_d should be reduced to 50 mV or less in at least one grayscale. In this description, if ΔV_d is substantially the same, it means that the difference in ΔV_d is equal to or smaller than 50 mV. It can be seen that in the example illustrated in FIG. **21**, the difference between the curve **L(B)** and the curve **L(R, G)** at the 140th grayscale is as small as 4 mV.

[0146] A multi-picture element structure in which each picture element is split into two sub-picture elements has been described as a preferred embodiment of the present invention. However, the present invention is in no way limited to that specific preferred embodiment. Alternatively, each picture element may also be divided into three or more sub-picture elements as well.

INDUSTRIAL APPLICABILITY

[0147] A liquid crystal display device according to the present invention can be used effectively in liquid crystal TVs and other applications that require excellent viewing angle characteristics.

Claims

1. A liquid crystal display device comprising a plurality of picture elements that are arranged in columns and rows so as to form a matrix pattern, each said picture element including a liquid crystal layer and a plurality of electrodes for applying a voltage to the liquid crystal layer, wherein each said picture element includes a first sub-picture element and a second sub-picture element having the ability to apply mutually different voltages to their liquid crystal layer, wherein at a grayscale level, the first sub-picture element has a higher luminance than the second sub-picture element, and wherein each of the first and second sub-picture elements includes a liquid crystal capacitor formed by a counter electrode and a sub-picture element electrode that faces the counter

electrode through the liquid crystal layer, and

at least one storage capacitor, each being formed by a storage capacitor electrode that is electrically connected to the sub-picture element electrode, an insulating layer, and a storage capacitor counter electrode that is opposed to the storage capacitor electrode with the insulating layer interposed between them, and

wherein after a display voltage representing a certain grayscale level has been applied to the respective sub-picture element electrodes of the first and second sub-picture elements, a voltage difference ΔV_{α} is produced between voltages to be applied to the respective liquid crystal capacitors of the first and second sub-picture elements by way of their associated storage capacitor(s), and

wherein in some of the picture elements, the voltage difference ΔV_{α} changes from one picture element to another.

2. The liquid crystal display device of claim 1, wherein the picture elements include a plurality of color picture elements that represent mutually different colors and that include a blue picture element and/or a cyan picture element, and wherein among those color picture elements, the ΔV_{α} value of the blue and/or cyan picture element(s) is the smallest.
3. The liquid crystal display device of claim 1, wherein the at least one storage capacitor includes only one storage capacitor, and wherein the counter electrode is a single electrode that is provided in common for the first and second sub-picture elements, the storage capacitor counter electrodes of the first and second sub-picture elements are electrically independent of each other, and the waveforms of storage capacitor counter voltages to be supplied through storage capacitor lines that are associated with the storage capacitor counter electrodes are different between the first and second sub-picture elements, and wherein in some of the picture elements, the storage capacitors have different capacitance values.
4. The liquid crystal display device of claim 3, wherein the picture elements include a plurality of color picture elements that represent mutually different colors and that include a blue picture element and/or a cyan picture element, and wherein among those color picture elements, the capacitance value of the storage capacitor of the blue and/or cyan picture element(s) is the smallest.
5. The liquid crystal display device of claim 4, wherein the color picture elements further include a red picture element and a green picture element, and wherein supposing the capacitance values of the storage capacitors of the blue and/or cyan picture element(s), the green picture element, and the red picture element are identified by C_{CS-B} , C_{CS-C} , C_{CS-G} and C_{CS-R} , respectively, the inequality $C_{CS-B} \leq C_{CS-C} < C_{CS-G} \leq C_{CS-R}$ is satisfied.
6. The liquid crystal display device of claim 2, wherein the at least one storage capacitor includes only one storage capacitor, and wherein the counter electrode is a single electrode that is provided in common for the first and second sub-picture elements, the storage capacitor counter electrodes of the first and second sub-picture elements are electrically independent of each other, and the waveforms of storage capacitor counter voltages to be supplied through storage capacitor lines that are associated with the storage capacitor counter electrodes are different between the first and second sub-picture elements, and wherein in some of the picture elements, the liquid crystal capacitors have different capacitance values.
7. The liquid crystal display device of one of claims 1 to 6, further comprising gate bus lines, source bus lines and TFTs, wherein each of the first and second sub-picture elements includes a TFT that is connected to the sub-picture element electrode thereof, and wherein one of the picture elements that has the smallest voltage difference ΔV_{α} further includes a storage capacitor that has been formed between the picture element's row and the gate bus line of its adjacent row.
8. The liquid crystal display device of one of claims 1 to 7, further comprising gate bus lines, source bus lines and TFTs, wherein each of the first and second sub-picture elements includes a TFT that is connected to the sub-picture element electrode thereof, and wherein the gate-drain capacitance C_{gd} of the TFT of one of the picture elements that has the smallest voltage difference ΔV_{α} is smaller than that of the TFT of any other picture element.
9. The liquid crystal display device of one of claims 1 to 8, wherein the liquid crystal layer is a vertical alignment liquid crystal layer and contributes to conducting a display operation in normally black mode.

10. The liquid crystal display device of claim 1 or 2, wherein the at least one storage capacitor includes two storage capacitors, and
wherein the counter electrode is a single electrode that is provided in common for the first and second sub-picture elements, and
5 wherein the storage capacitor counter electrodes of the two storage capacitors of the first sub-picture element are electrically independent of each other, and the storage capacitor counter electrodes of the two storage capacitors of the second sub-picture element are also electrically independent of each other.
11. The liquid crystal display device of claim 10, wherein if the two storage capacitors of the first sub-picture element are identified by CS1A and CS1B and if the two storage capacitors of the second sub-picture element are identified by CS2A and CS2B,
10 the storage capacitor counter electrodes of the storage capacitors CS1A and CS2B are electrically connected to the same first storage capacitor line,
the storage capacitor counter electrodes of the storage capacitors CS1B and CS2A are electrically connected to the same second storage capacitor line, and
15 the first and second storage capacitor lines are electrically independent of each other.
12. The liquid crystal display device of claim 11, wherein if the capacitance values of the storage capacitors CS1A, CS1B, CS2A and CS2B are identified by Ccs1A, Ccs1B, Ccs2A and Ccs2B, respectively, and if $Ccs1\alpha = Ccs1A - Ccs1B$ and $Ccs2\alpha = Ccs2A - Ccs2B$, some of the picture elements have different Ccs1 α or Ccs2 α .
20
13. The liquid crystal display device of claim 12, wherein the picture elements include a plurality of color picture elements that represent mutually different colors and that include a blue picture element and/or a cyan picture element, and
wherein among those color picture elements, the Ccs1 α and Ccs2 α values of the blue and/or cyan picture element
25 (s) are the smallest.
14. The liquid crystal display device of claim 12 or 13, wherein if $Ccs1\beta = Ccs1A + Ccs1B$ and $Ccs2\beta = Ccs2A + Ccs2B$, the Ccs1 β and Ccs2 β values remain the same in every picture element.
30

FIG. 1





FIG. 2

(a)

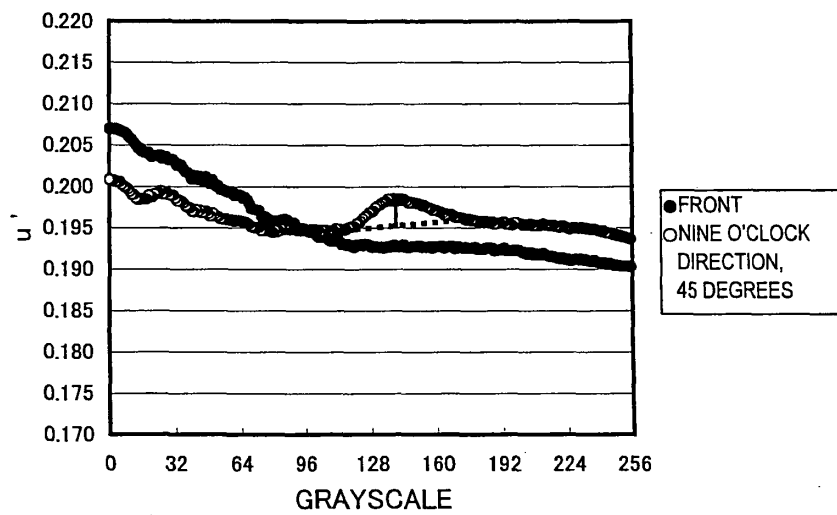

(b)


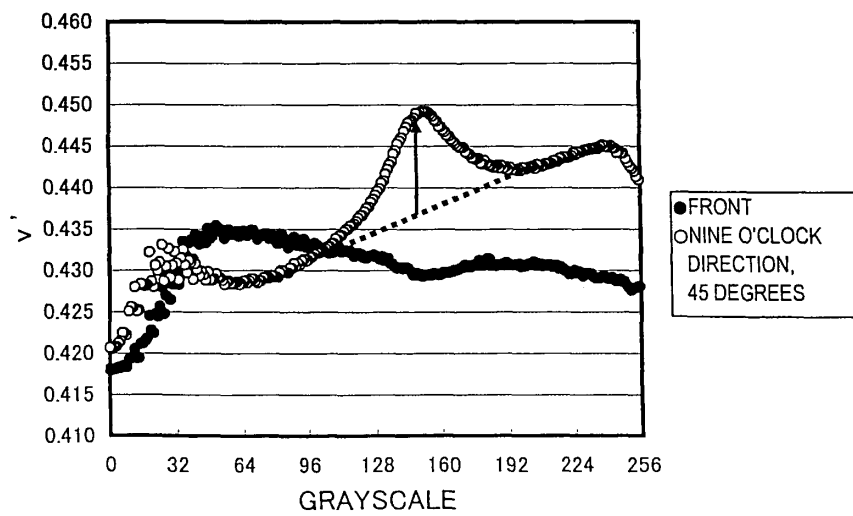


FIG.3

(a)

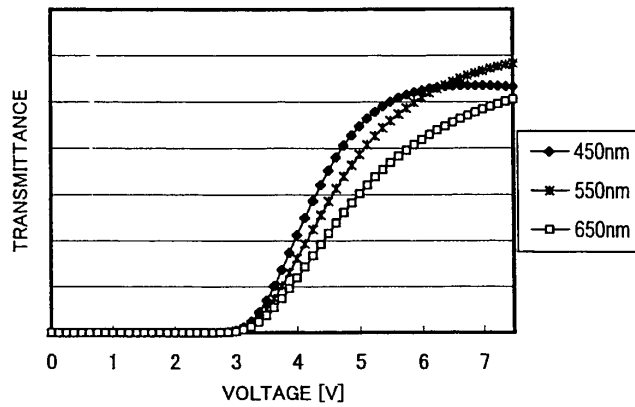

(b)

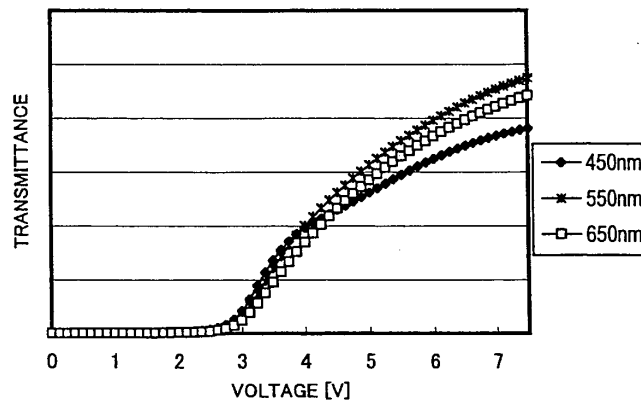


FIG.4

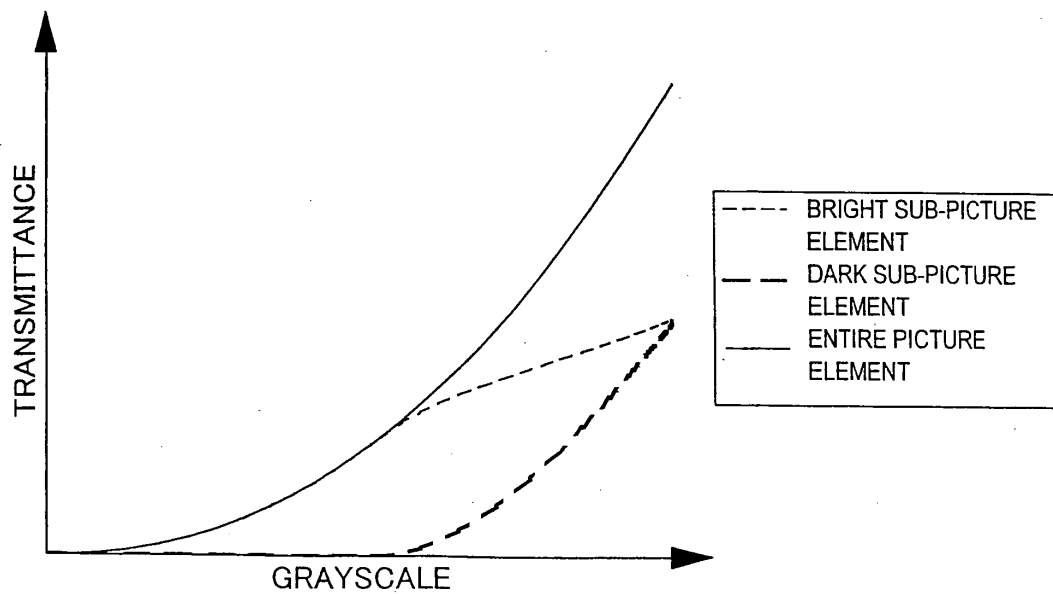


FIG. 5

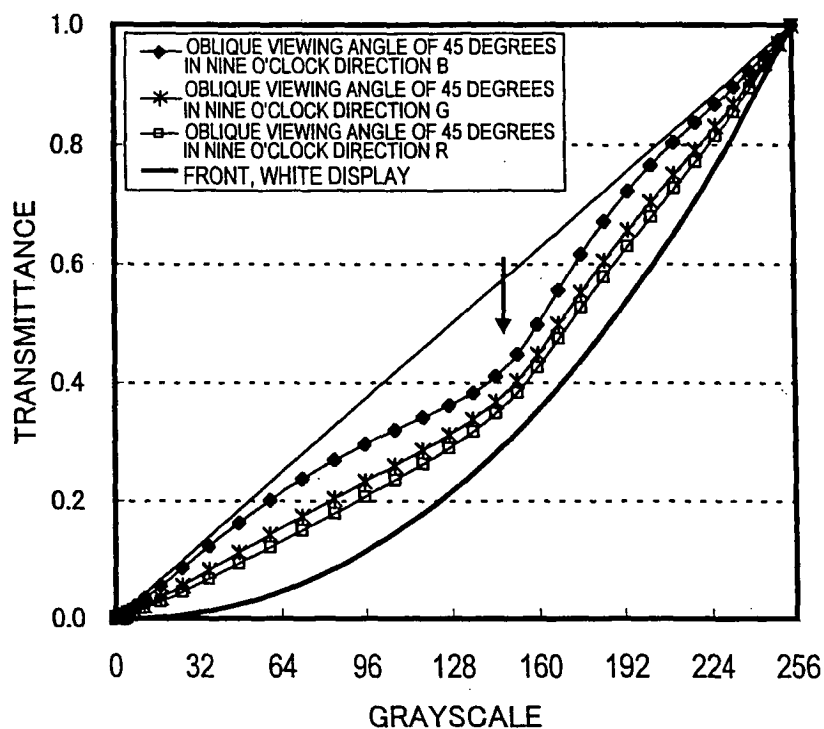


FIG. 6

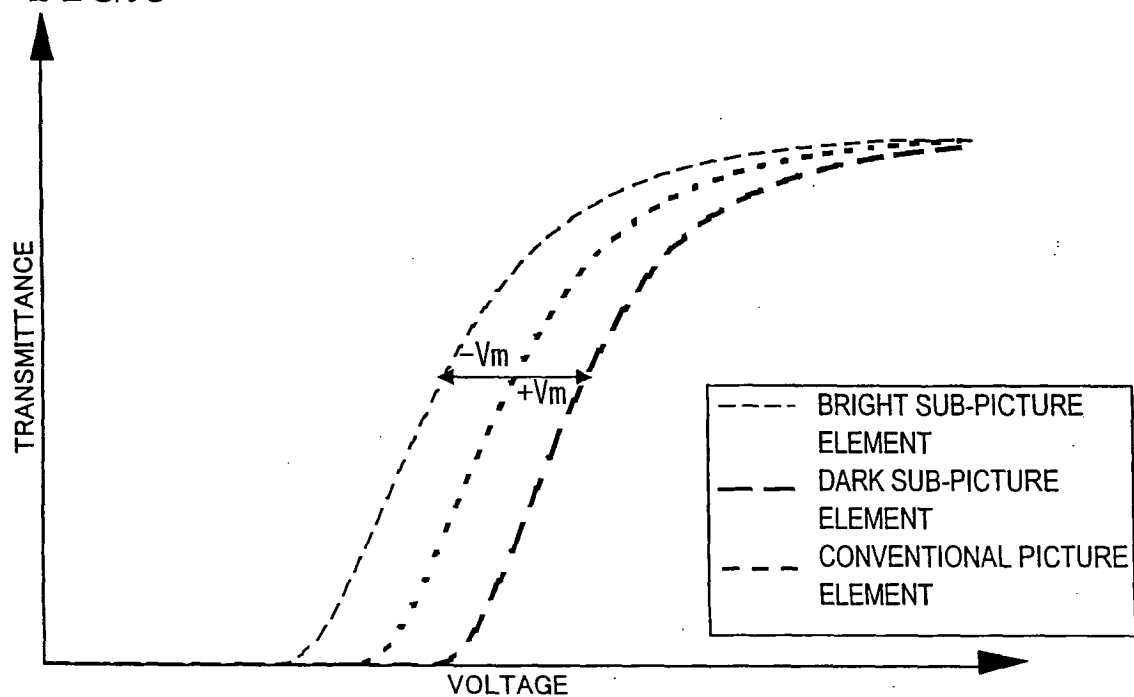


FIG. 7

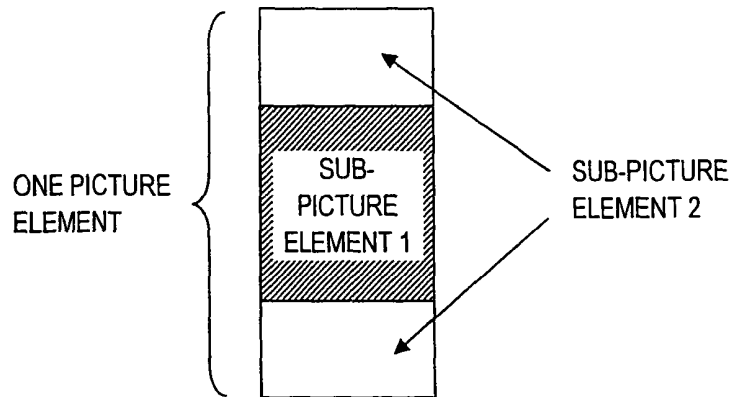


FIG. 8

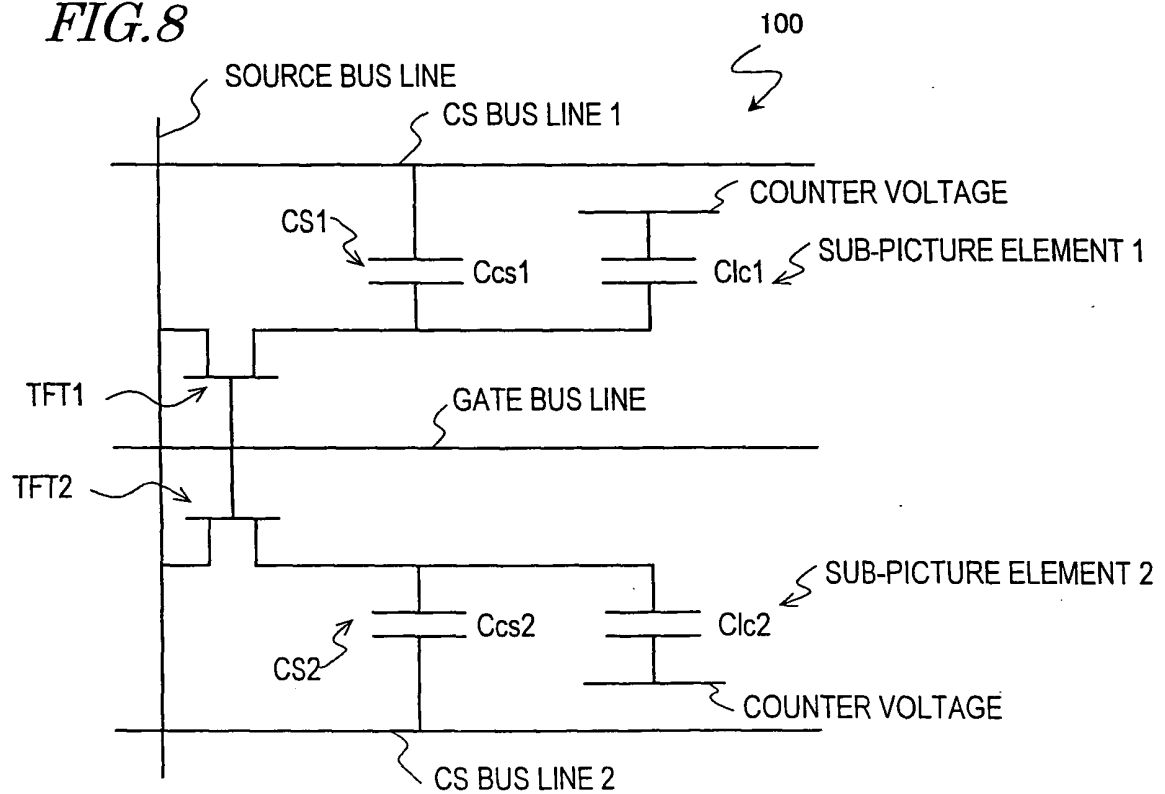


FIG. 9

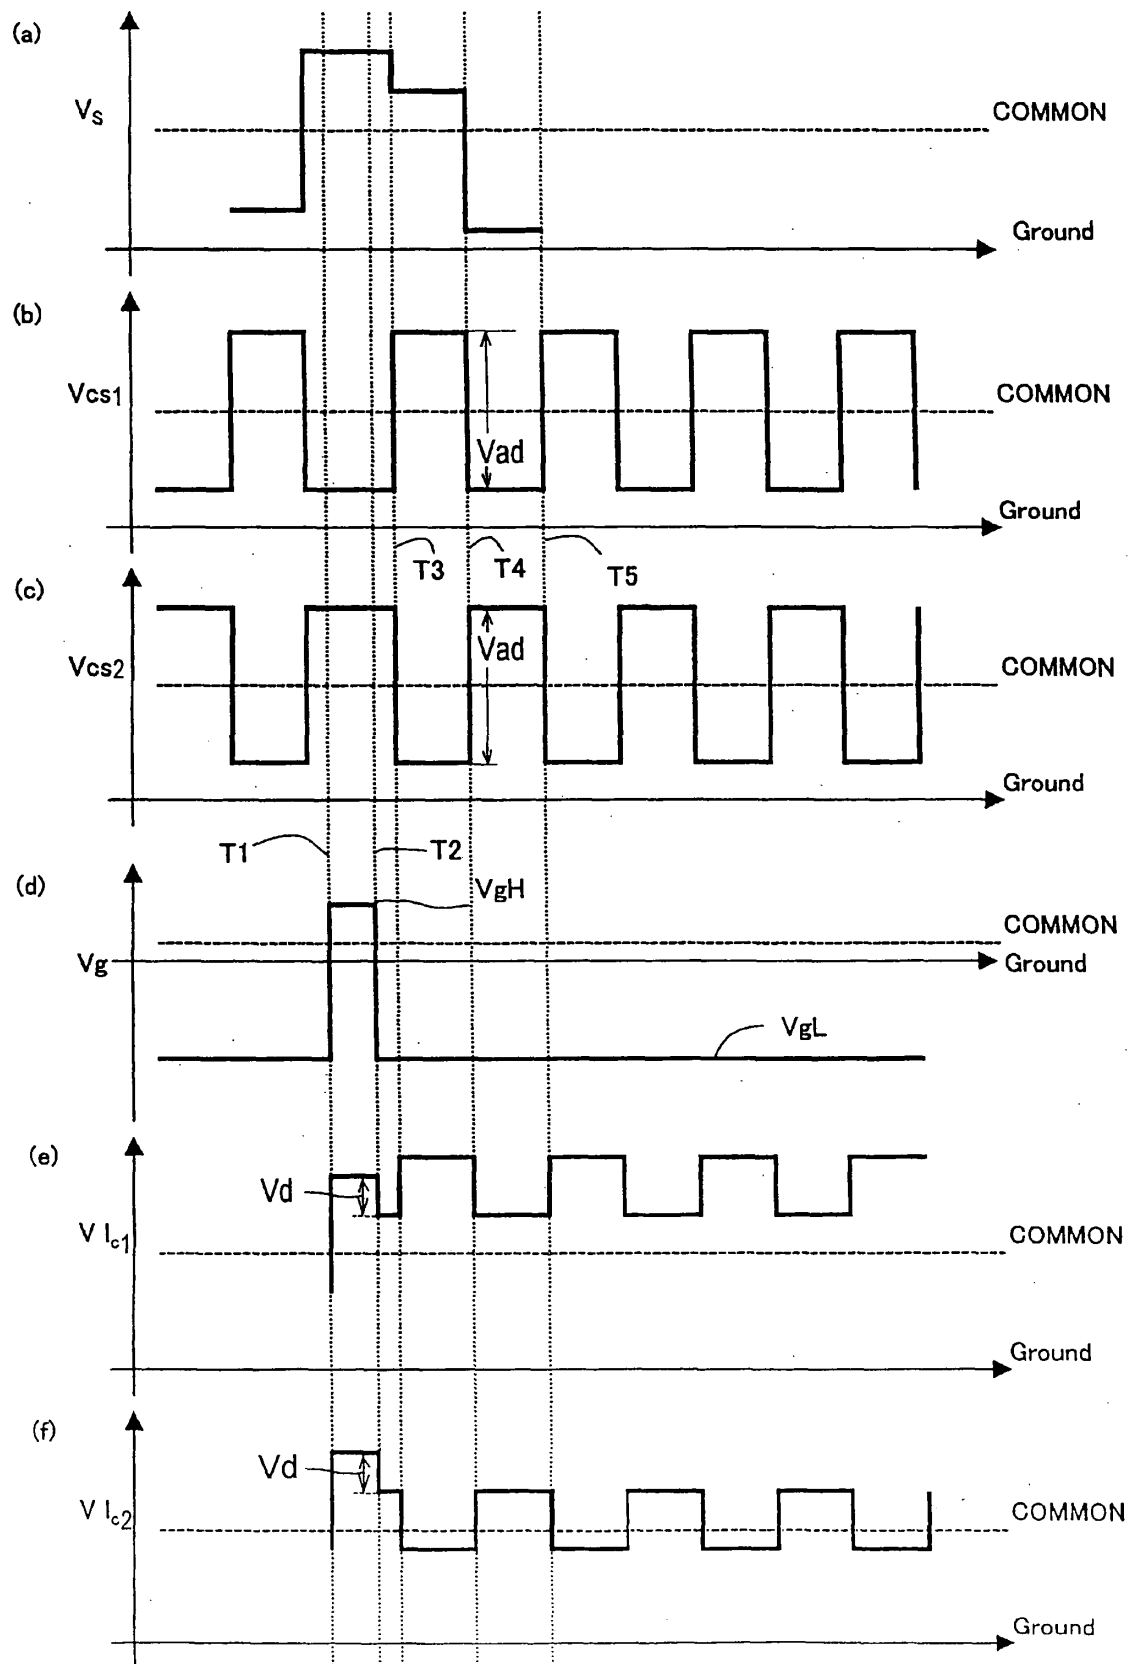


FIG. 10

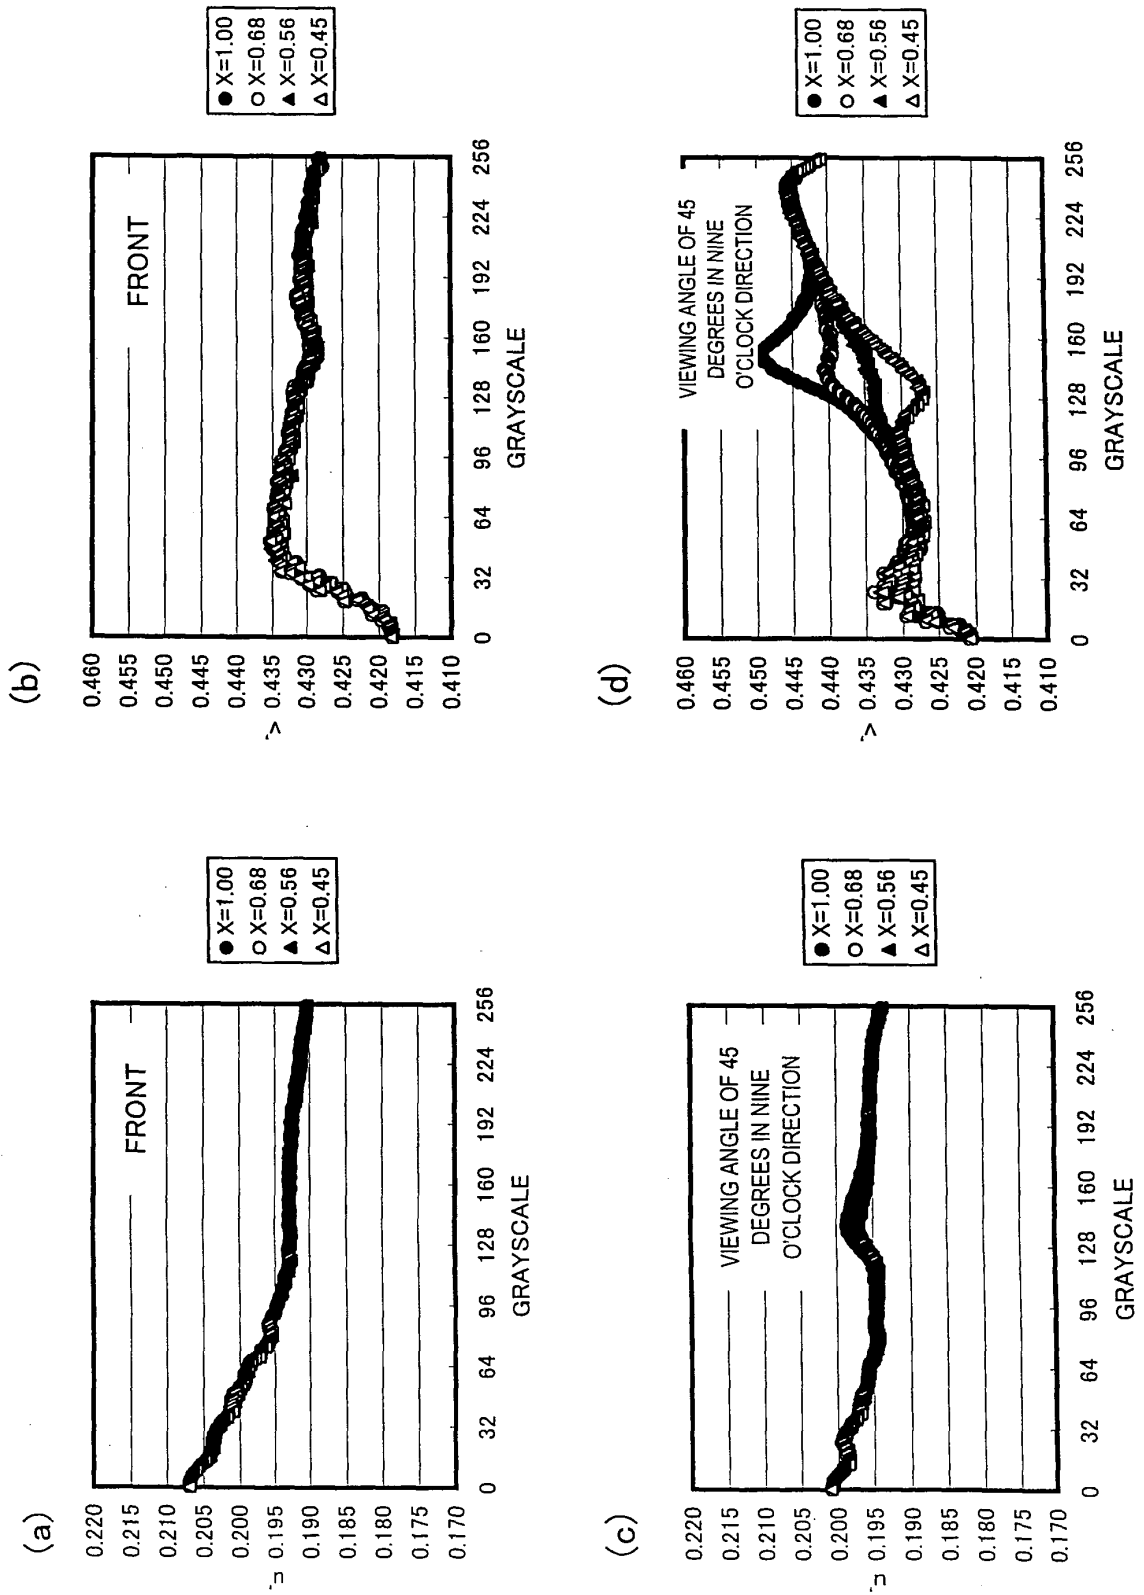


FIG. 11

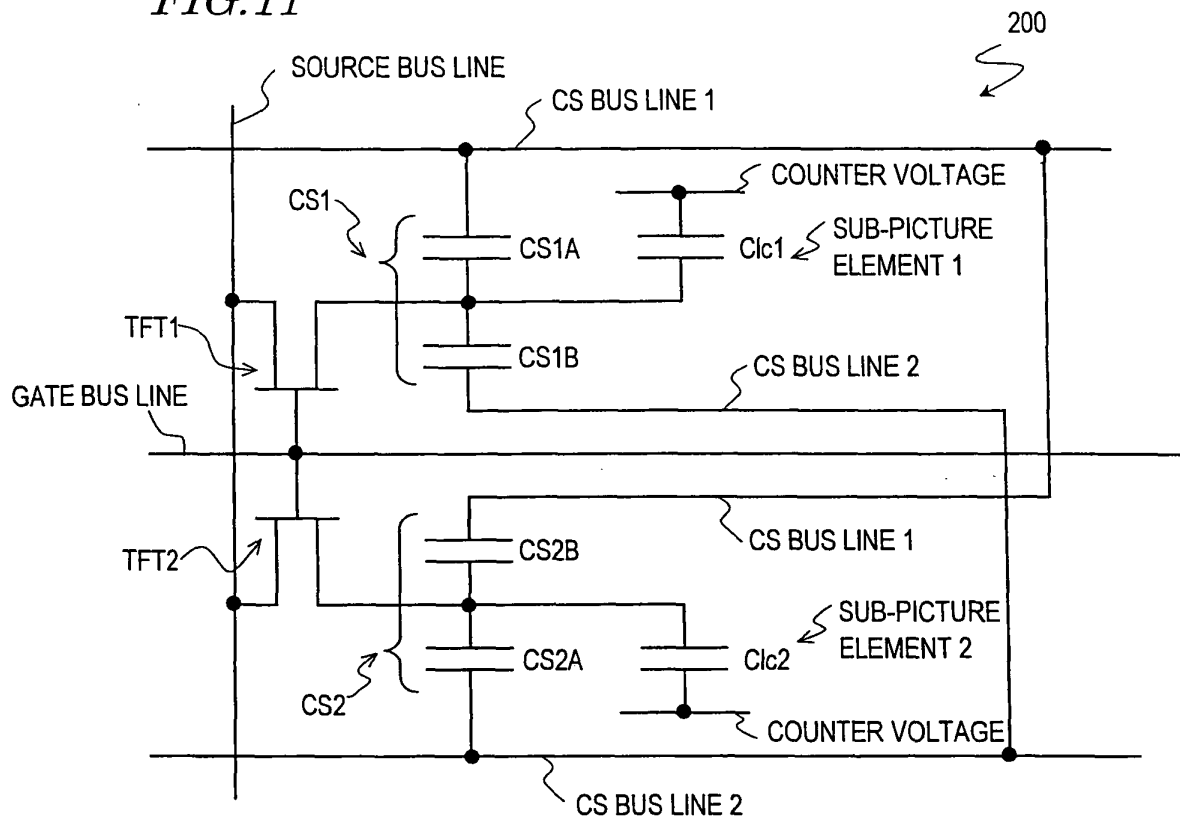
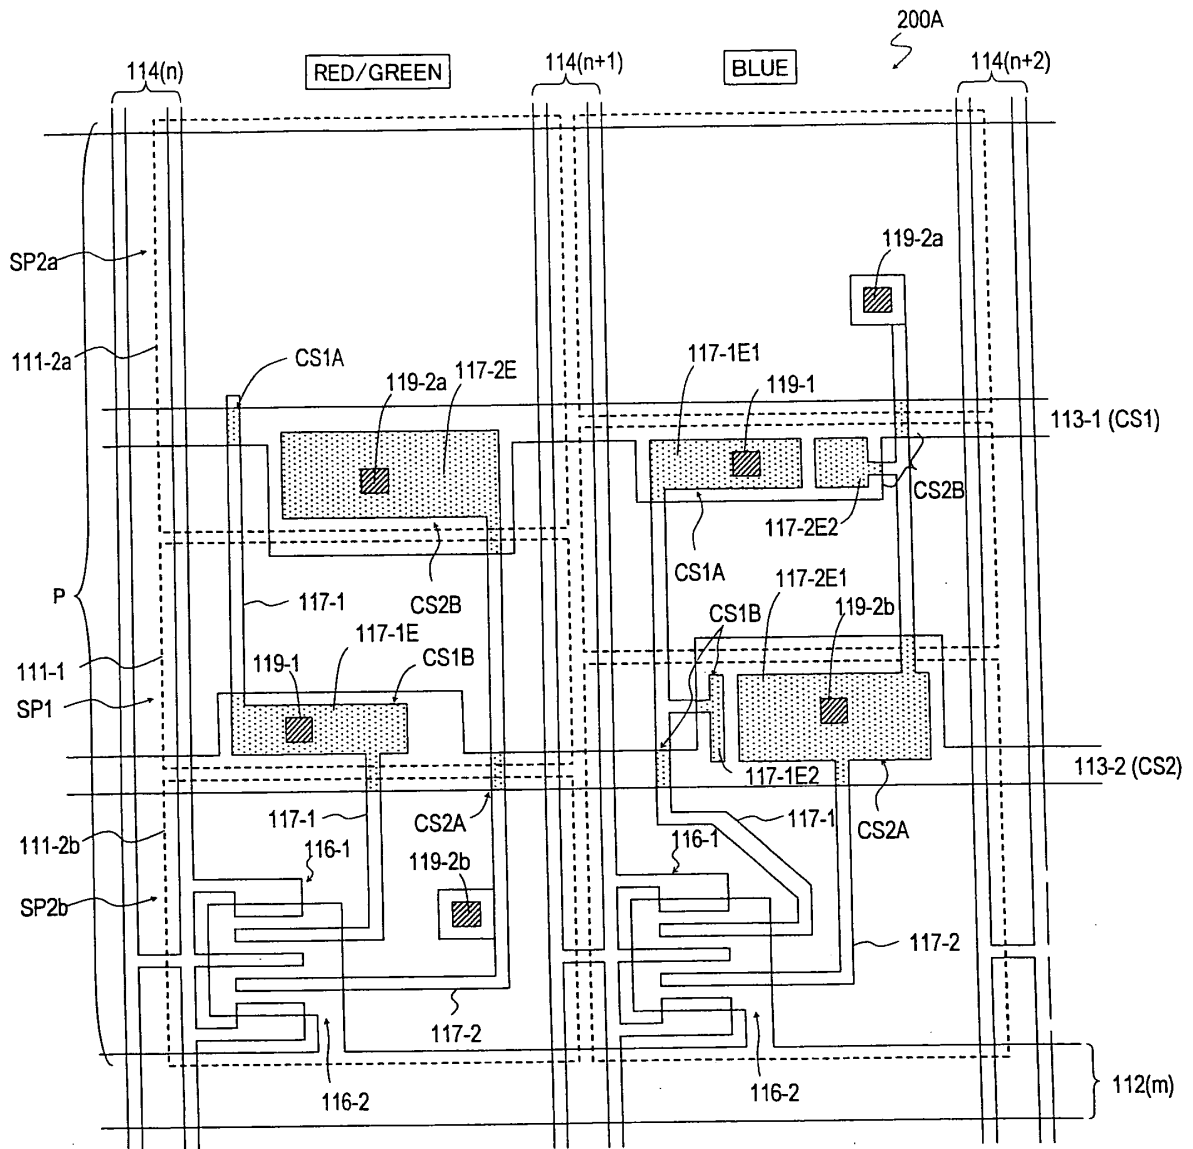


FIG. 12



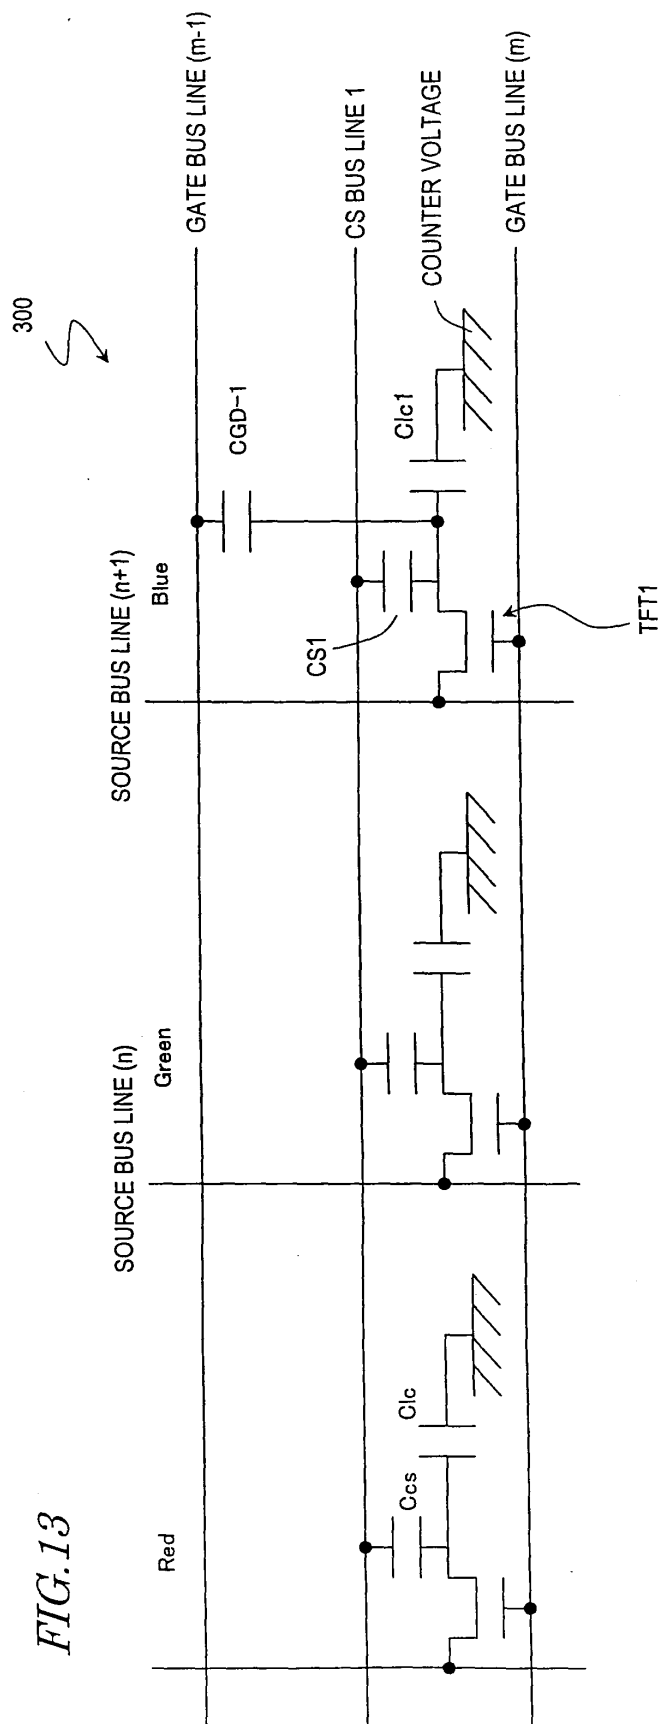


FIG. 14

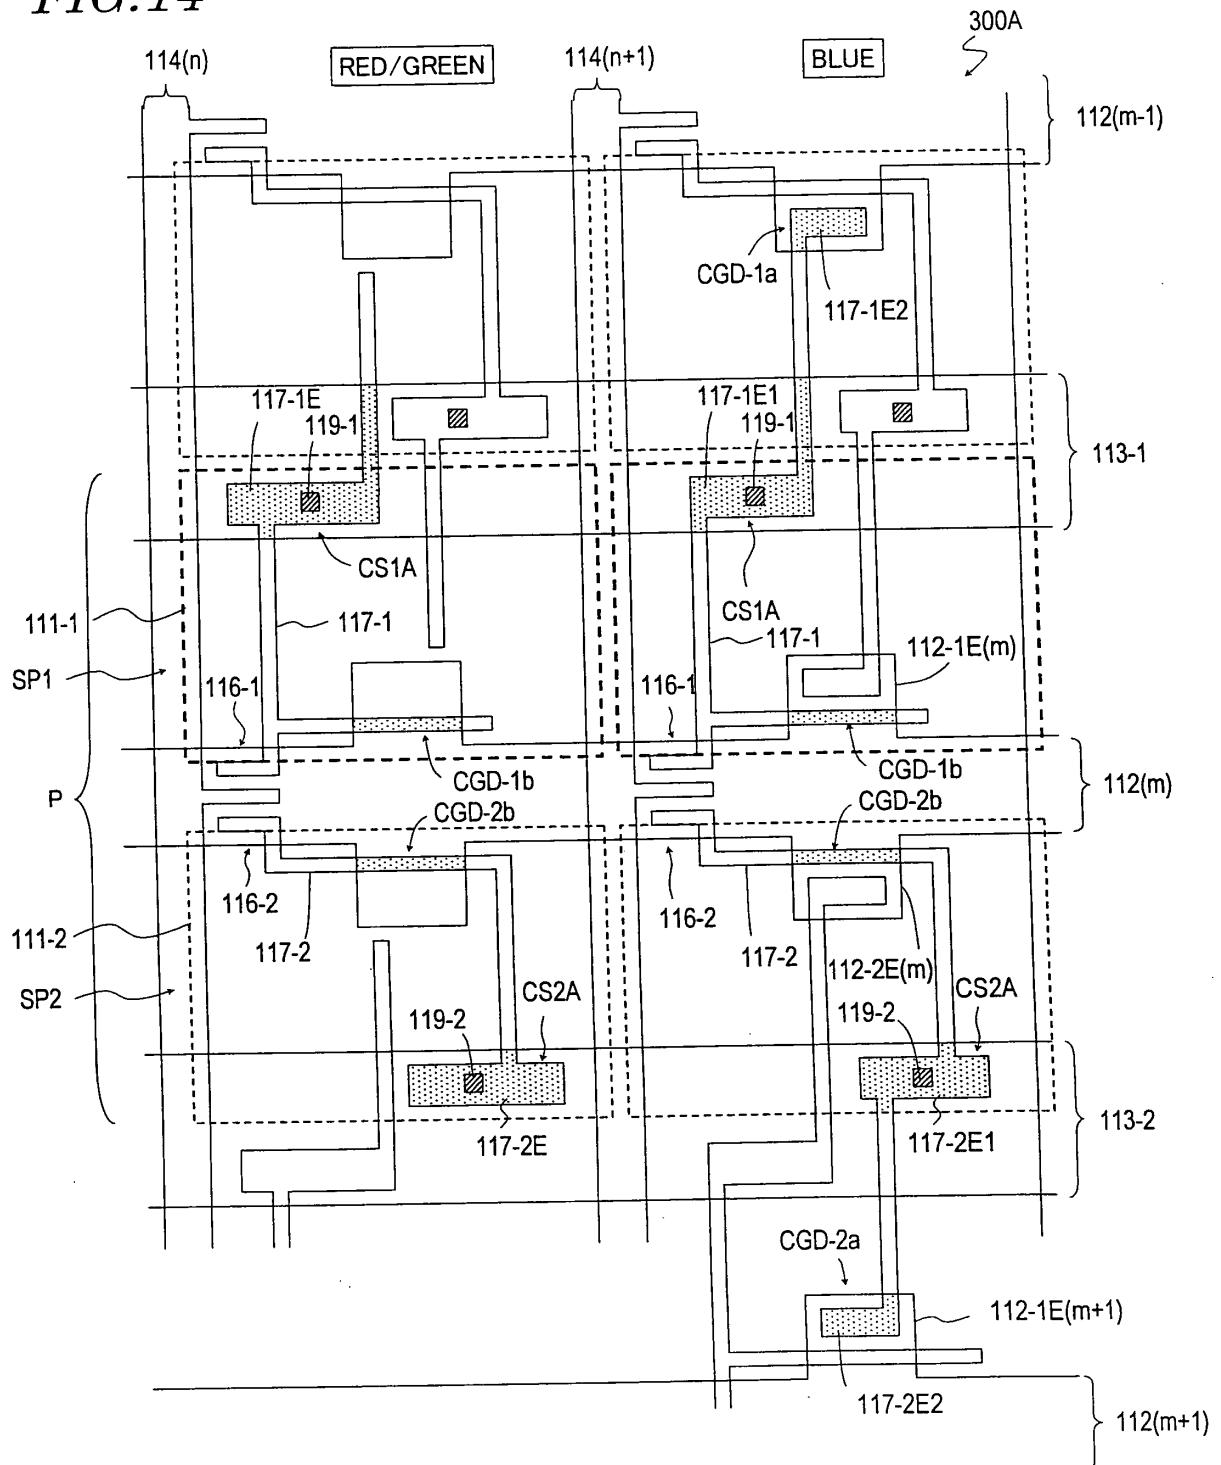


FIG. 15

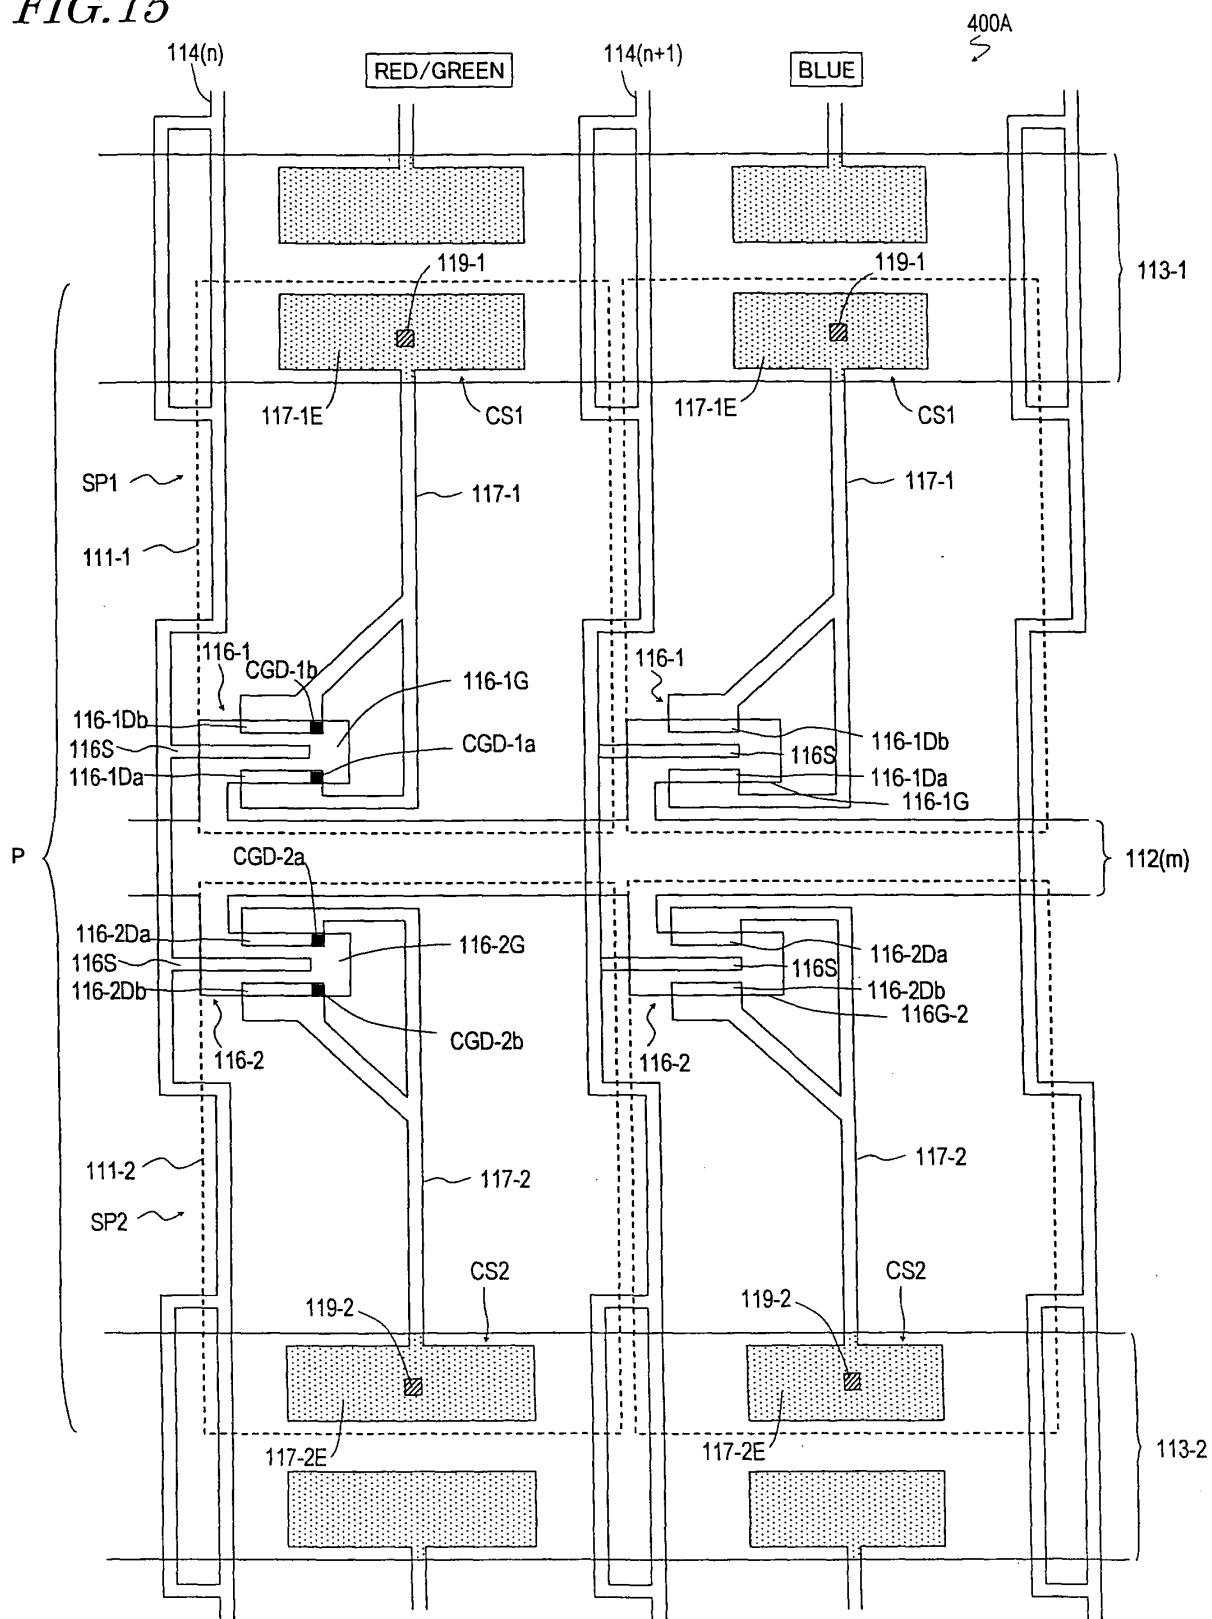


FIG. 16

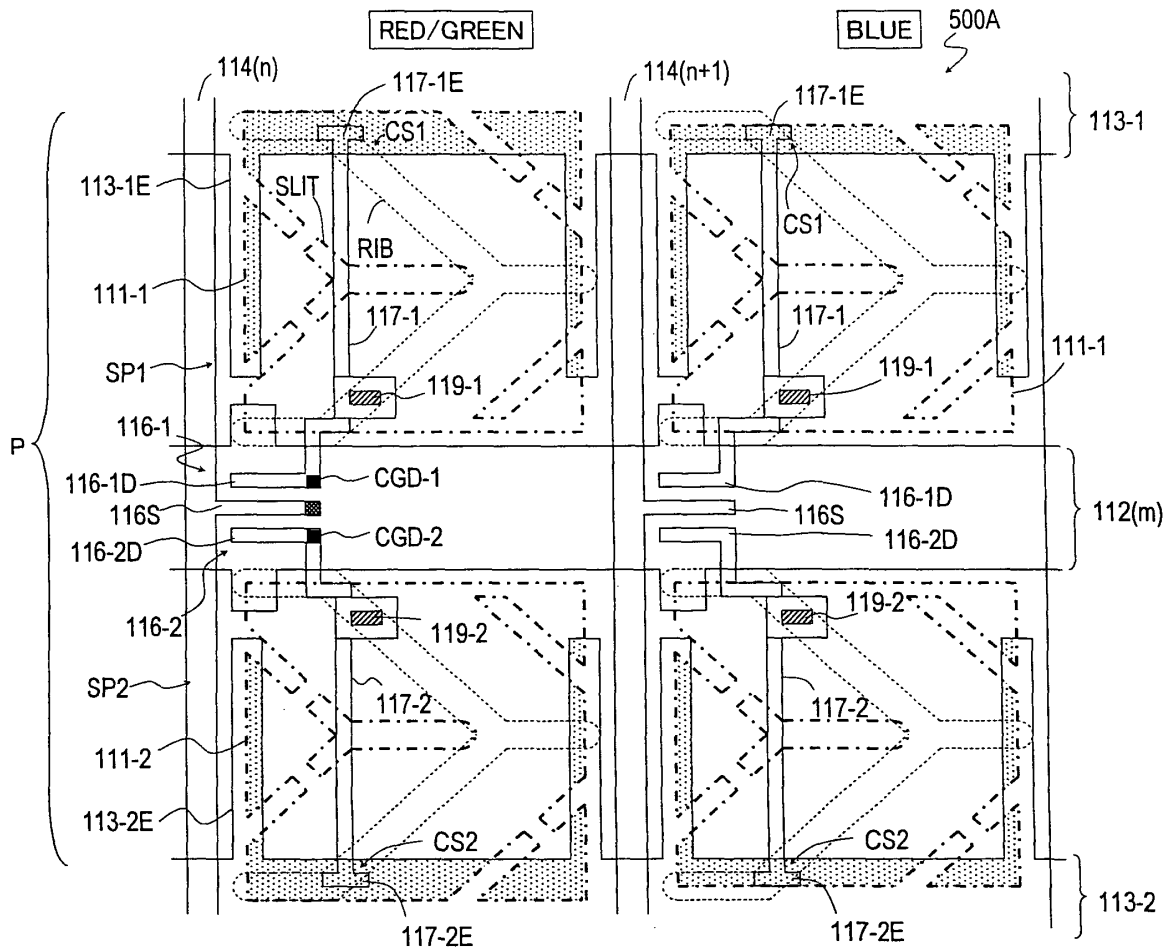


FIG.17

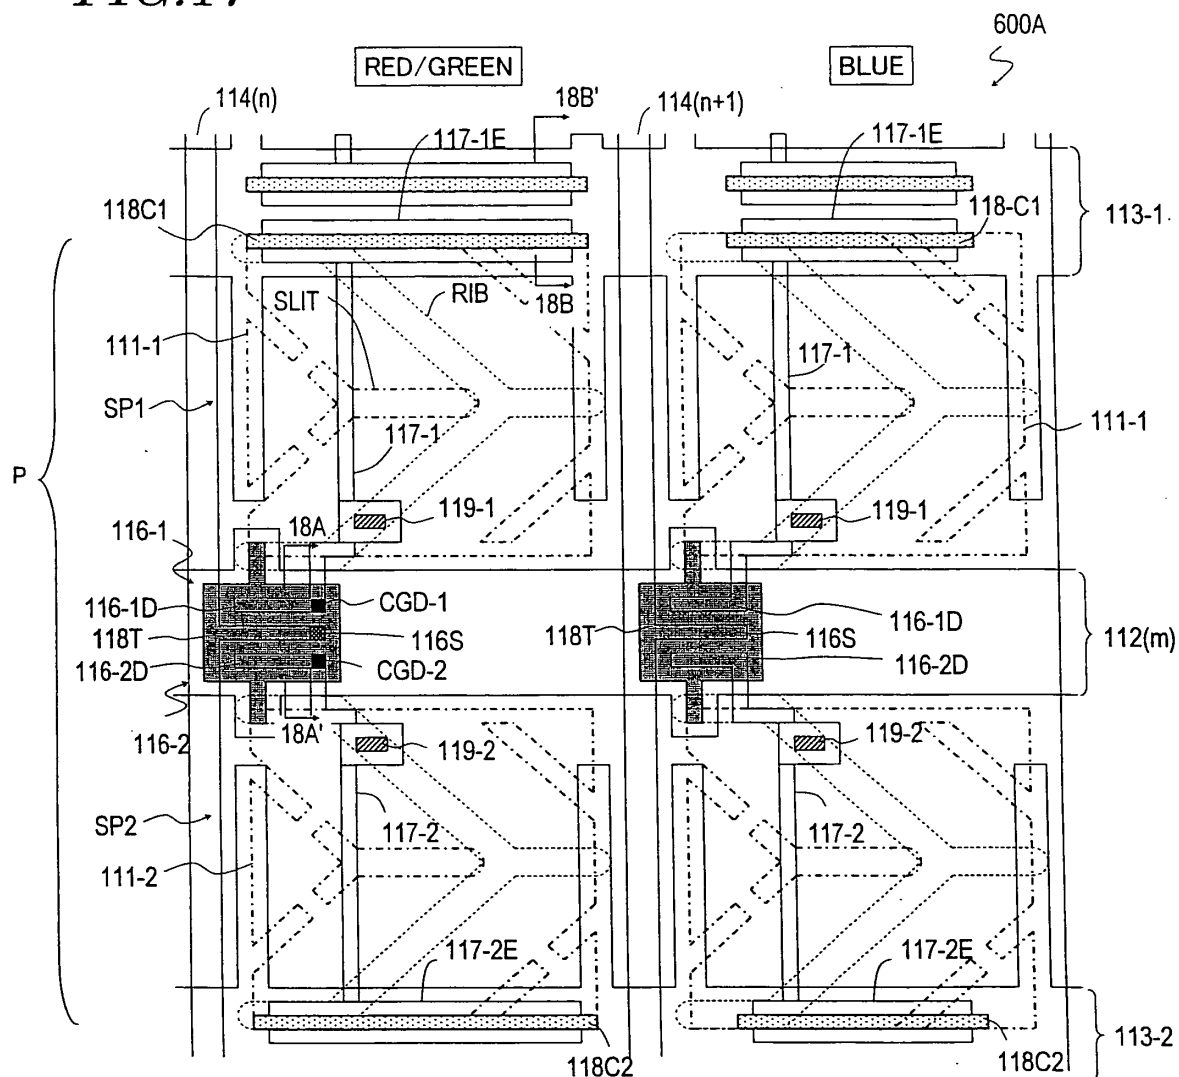


FIG. 18A

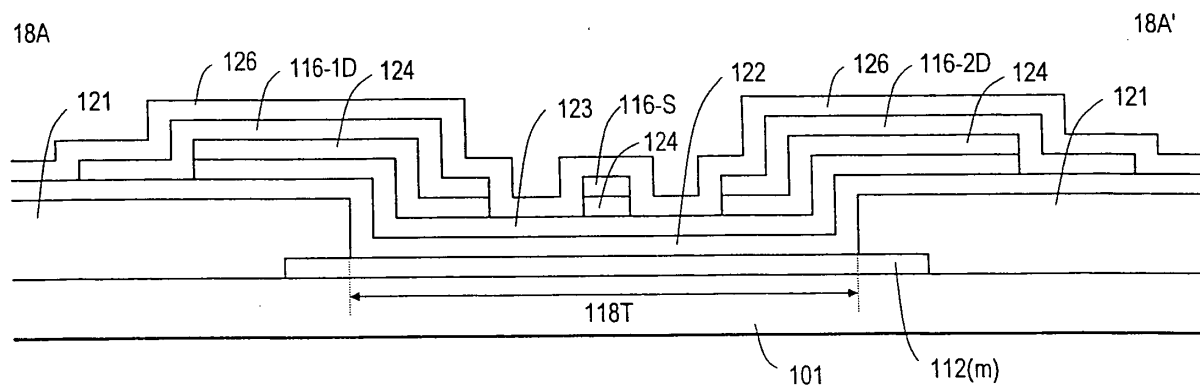


FIG. 18B

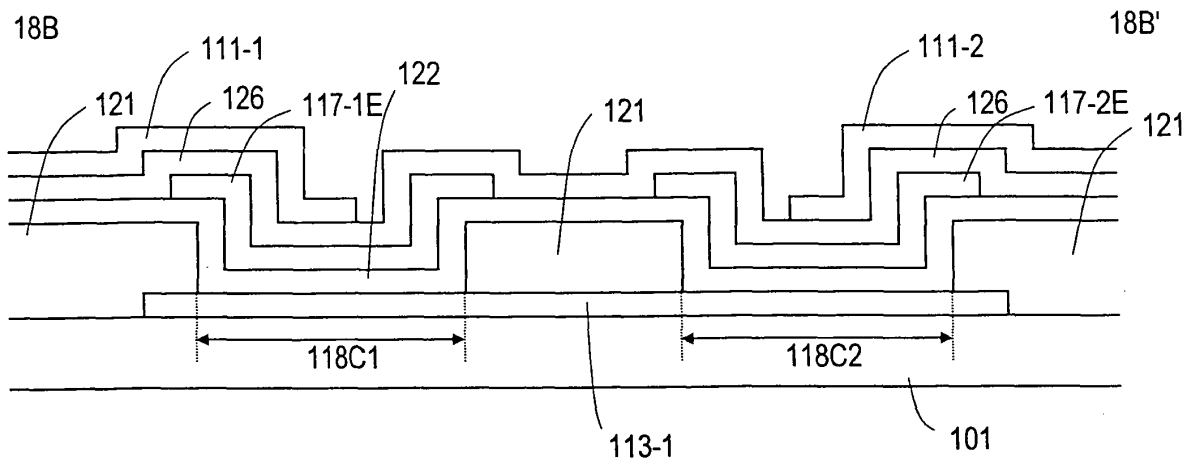


FIG. 18C

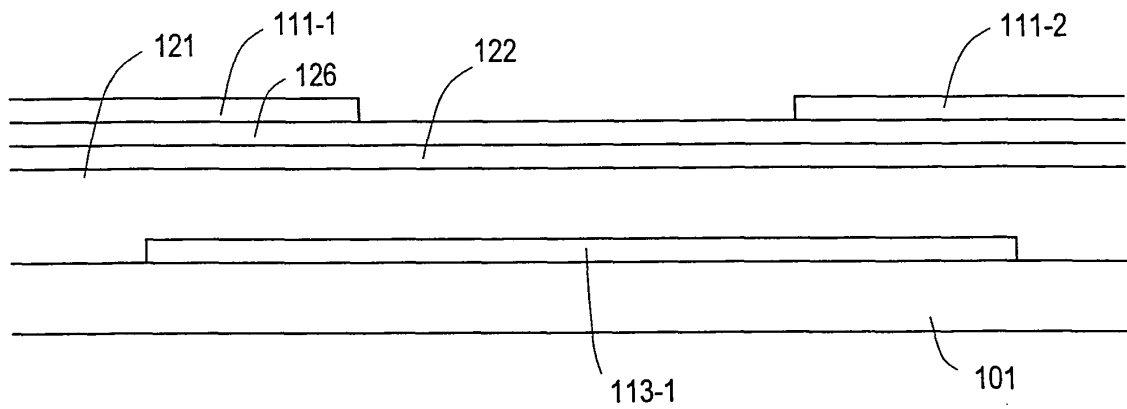


FIG. 19

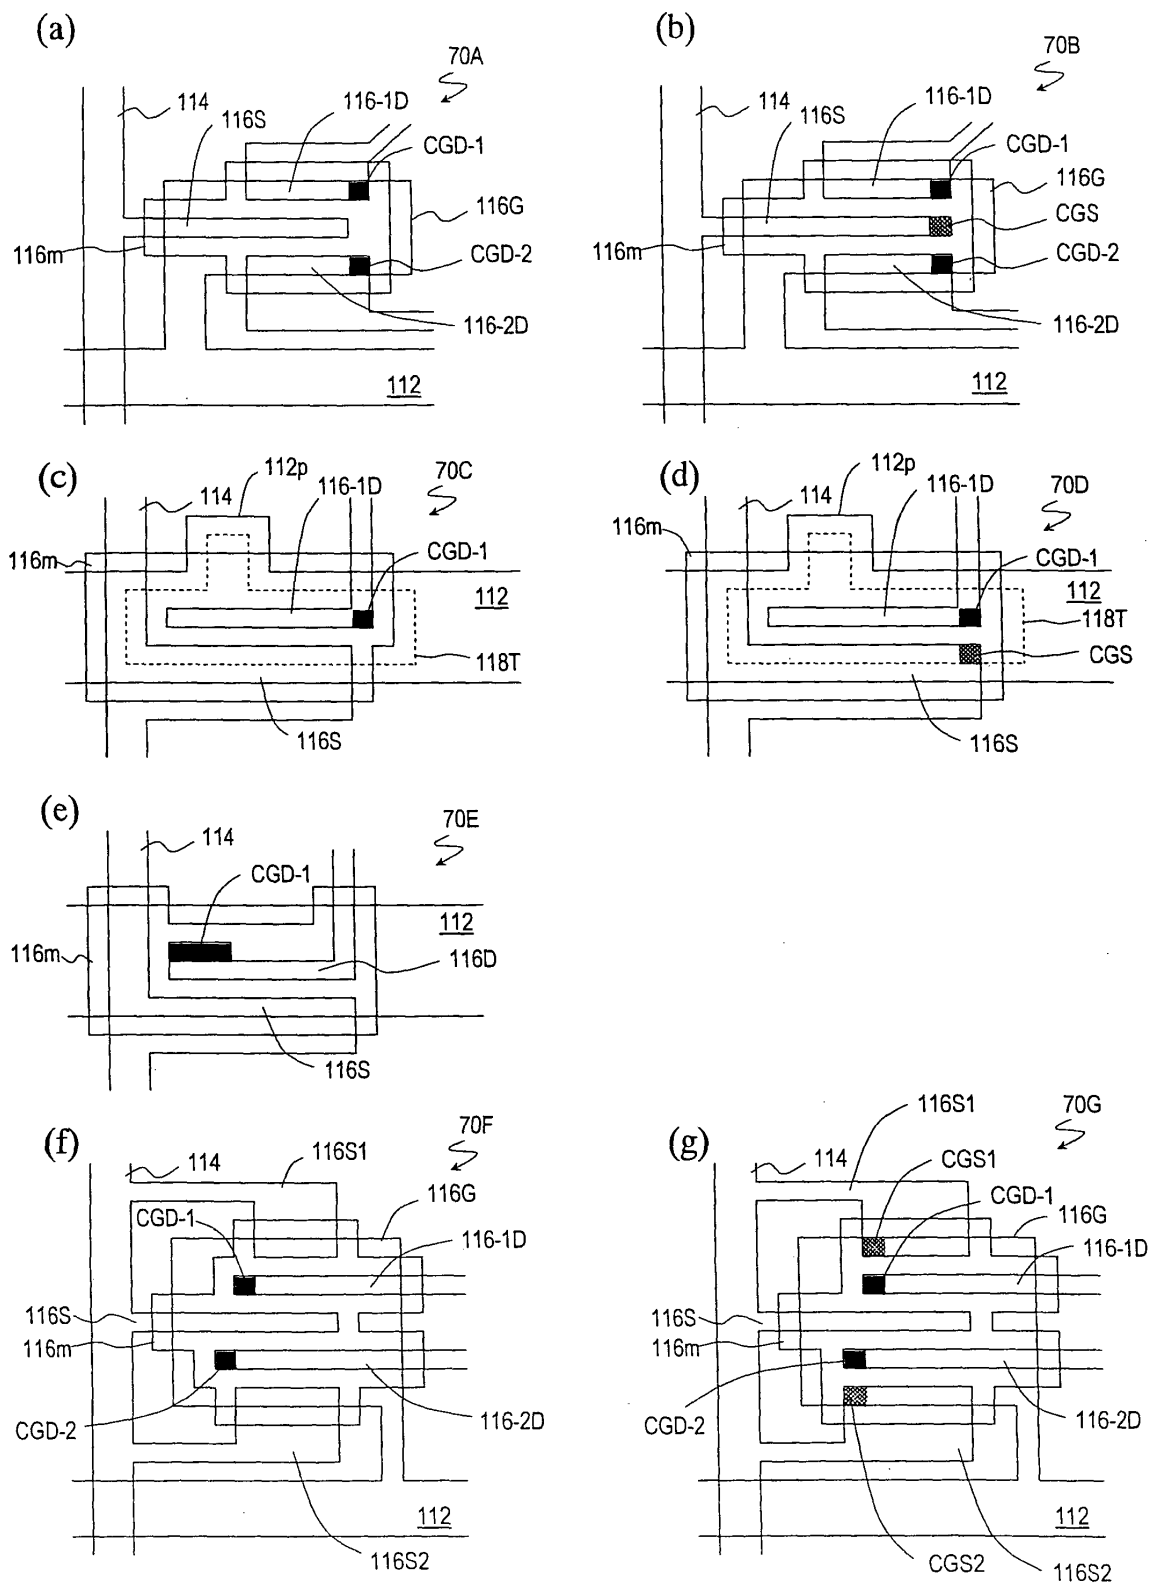


FIG. 20


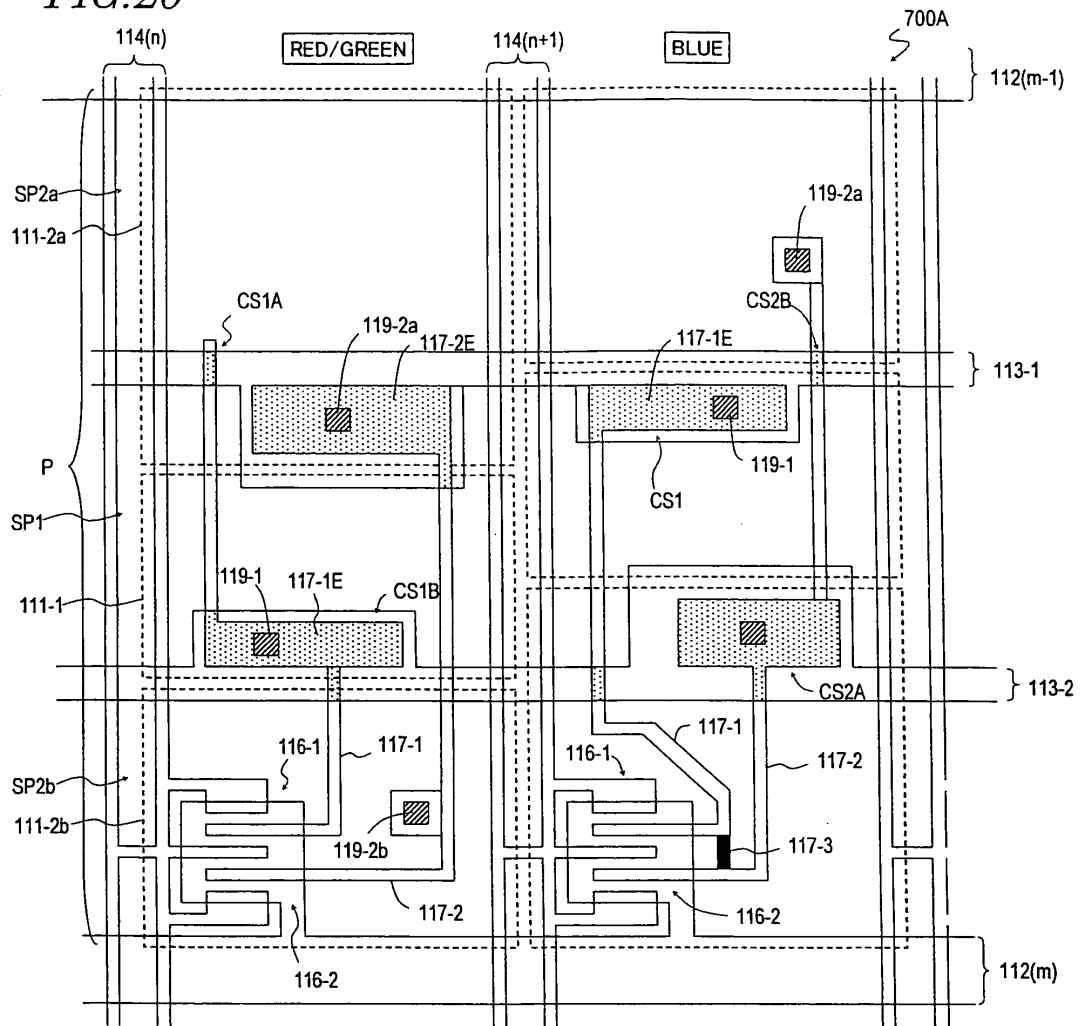


FIG. 21

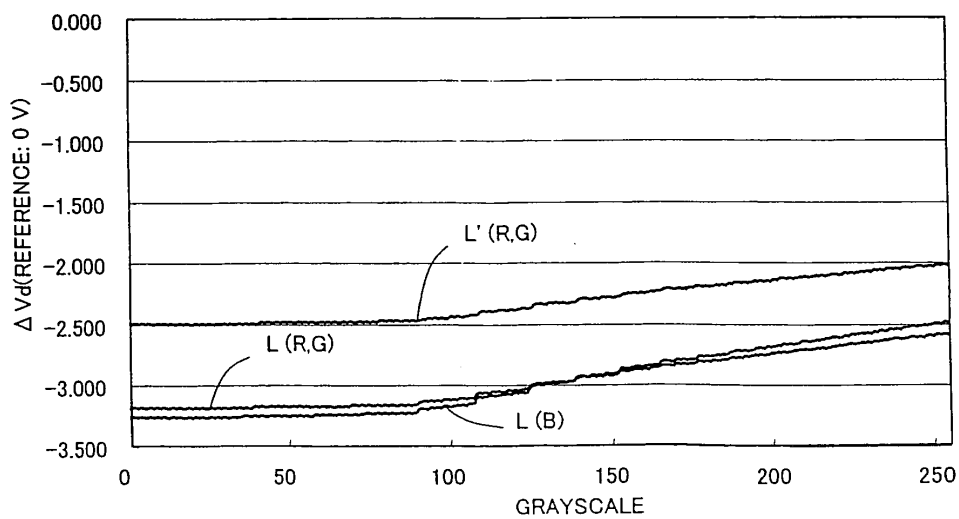

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2007/065635

A. CLASSIFICATION OF SUBJECT MATTER <i>G02F1/1368</i> (2006.01) i, <i>G02F1/133</i> (2006.01) i, <i>G02F1/1343</i> (2006.01) i, <i>G09G3/20</i> (2006.01) i, <i>G09G3/36</i> (2006.01) i According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) <i>G02F1/1368</i> , <i>G02F1/133</i> , <i>G02F1/1343</i> , <i>G09G3/20</i> , <i>G09G3/36</i> Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2007 Kokai Jitsuyo Shinan Koho 1971-2007 Toroku Jitsuyo Shinan Koho 1994-2007 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	JP 2005-189804 A (Sharp Corp.), 14 July, 2005 (14.07.05), Par. Nos. [0037], [0096] to [0097]; Figs. 12, 13 & US 2005/0122441 A1 & EP 1538599 A2	1 2-14
Y A	JP 2006-048055 A (Samsung Electronics Co., Ltd.), 16 February, 2006 (16.02.06), Par. Nos. [0007] to [0008] & US 2006/0028589 A1 & EP 1624332 A1	1 2-14
A	JP 2006-139288 A (Samsung Electronics Co., Ltd.), 01 June, 2006 (01.06.06), Full text; all drawings & US 2006/0208984 A1	1-14
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 26 September, 2007 (26.09.07)		Date of mailing of the international search report 09 October, 2007 (09.10.07)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 11242225 A [0004]
- JP 2004062146 A [0004]
- US 6958791 B [0004]
- JP 2005055896 A [0004]
- JP 2003270614 A [0004]

专利名称(译)	液晶显示器		
公开(公告)号	EP2051136A1	公开(公告)日	2009-04-22
申请号	EP2007792285	申请日	2007-08-09
[标]申请(专利权)人(译)	夏普株式会社		
申请(专利权)人(译)	夏普株式会社		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	SHIMOSHIKIRYOH FUMIKAZU IRIE KENTAROH TAKEUCHI MASANORI NAGASHIMA NOBUYOSHI TSUBATA TOSHIHIDE		
发明人	SHIMOSHIKIRYOH, FUMIKAZU IRIE, KENTAROH TAKEUCHI, MASANORI NAGASHIMA, NOBUYOSHI TSUBATA, TOSHIHIDE		
IPC分类号	G02F1/1368 G02F1/133 G02F1/1343 G09G3/20 G09G3/36		
CPC分类号	G09G3/3648 G02F1/136213 G02F1/13624 G02F2001/134345 G02F2001/13606 G02F2201/40 G02F2203/30 G09G3/3607 G09G2300/0443 G09G2300/0447 G09G2300/0876 G09G2320/028 G09G2320/0666 H01L29/41733 H01L29/66757		
优先权	2007060426 2007-03-09 JP 2006218926 2006-08-10 JP		
其他公开文献	EP2051136A4		
外部链接	Espacenet		

摘要(译)

每个像素包括第一和第二子图像元素，每个子图像元素包括液晶电容器和至少一个存储电容器。在表示某个灰度级的显示电压已经施加到第一和第二子图像元素的各个子图像元素电极之后，在要施加到第一和第二子图像元素的各个液晶电容器的电压之间产生电压差 ΔV_{α} 。和第二子图像元素通过其相关的存储电容器。通过将蓝色和/或青色像素的电压差 ΔV_{α} 值设定为小于其他彩色图像元素的电压差 ΔV_{α} 值，可以使倾斜视角的黄色范围的偏移最小化。

FIG. 8

