

(19)



(11)

EP 2 959 937 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

30.12.2015 Bulletin 2015/53

(51) Int Cl.:

A61N 1/05 (2006.01)

A61N 1/28 (2006.01)

A61N 1/36 (2006.01)

A61B 5/00 (2006.01)

A61B 5/0295 (2006.01)

A61B 5/11 (2006.01)

(21) Application number: **15170635.5**

(22) Date of filing: **04.06.2015**

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

Designated Extension States:

BA ME

Designated Validation States:

MA

• Kibler, Andrew B.

Lake Oswego, OR Oregon 97035 (US)

• Dabney, Warren

Lake Oswego, OR Oregon 97035 (US)

• Lian, Jie

Beaverton, OR Oregon 97007 (US)

• Moulder, J. Christopher

Portland, OR Oregon 97202 (US)

• Müssig, Dirk

West Linn, 97068 (US)

(30) Priority: **26.06.2014 US 201462017282 P**

(71) Applicant: **BIOTRONIK SE & Co. KG**

12359 Berlin (DE)

(74) Representative: **Galandar, Marcus et al**

Biotronik SE & Co. KG

Corporate Intellectual Properties

Woermannkehre 1

12359 Berlin (DE)

(72) Inventors:

• Baru, Marcelo

Tualatin, OR Oregon 97062 (US)

(54) CUFF ELECTRODE COMPRISING A SENSOR AND CONTACTS FOR VAGUS NERVE STIMULATION

(57) The application refers to a nerve cuff stimulation electrode (100) for cervical vagus nerve stimulation, the electrode configured to be arranged so as to at least partially surround or enclose one of the vagus nerves. The cuff stimulation electrode comprises at least two contacts (102) configured to deliver electric stimulation pulses to a vagus nerve. The cuff stimulation electrode further

comprises at least one of a tilt sensor, a kinematic sensor and a pulsation sensor configured to generate a signal representative of arterial and venous pressures. The tilt sensor may be configured to output a posture signal indicating a patient's posture, thus allowing discrimination between supine and semi-recumbent or erect postures.

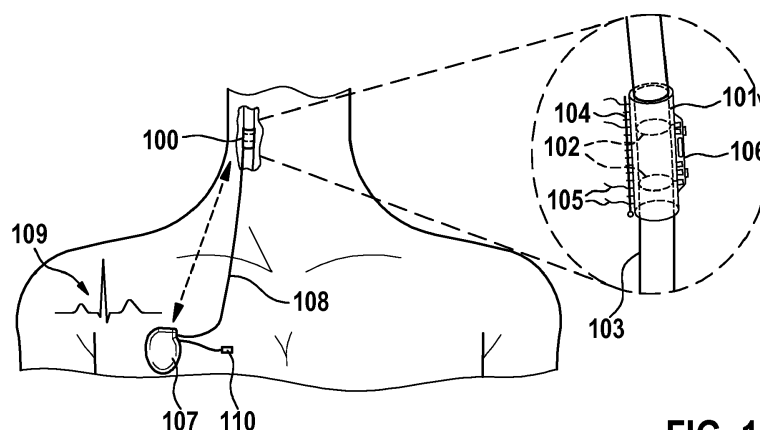


FIG. 1

EP 2 959 937 A1

Description

[0001] The present invention generally relates to a nerve cuff stimulation electrode, a control device for a Vagus Nerve Stimulation (VNS) system, and a VNS system.

[0002] Vagus Nerve Stimulation (VNS) systems and methods are inter alia disclosed in US 8,401,640, US 2013/0184773 and US 8,473,068.

[0003] Cervical VNS may be used for the treatment of Congestive Heart Failure (CHF).

[0004] Prior art chronic implantable apparatuses for VNS for the treatment of CHF generally involve implanting a cervical nerve cuff electrode for stimulation that connects via wires to an Implantable Pulse Generator (IPG) in a patient's chest. A standard pacemaker sensing lead in the ventricle has been disclosed for the purpose of synchronous delivery of VNS pulses in the cardiac refractory period. This sensing lead allows for certain cardiac timing monitoring. However, there is a need for an improved VNS system.

[0005] With respect to terminology, it is noted that the term "nerve cuff stimulation electrode" refers to a nerve cuff that has contacts for delivering electrical stimulation. A contact could also be referred to as "electrode pole". It is noted that the term "electrode" as used in this disclosure refers to the cuff in its entirety and not to the electrode poles or contacts.

[0006] According to a first aspect of the invention, the need for an improved VNS system is met by a nerve cuff stimulation electrode for cervical VNS configured to be arranged so as to at least partially surround or enclose one of the vagus nerves. The cuff stimulation electrode comprises a cuff and at least two contacts that are arranged on an inner cuff surface and that are configured to deliver electric stimulation to a vagus nerve. The cuff stimulation electrode may further comprise or may be attached or connected to at least one of a tilt sensor, a kinematic sensor, and a pulsation sensor, whose waveform depict volume representations of arterial and venous pressure pulses, which closely resemble pressure waveforms in appearance and timing. Preferably, the implantable tilt sensor is configured to output a posture signal indicative of the patient's posture, thus allowing discrimination between supine and semi-recumbent or erect postures.

[0007] The tilt and kinematic sensors can be implemented using comprises an accelerometer.

[0008] The cuff stimulation electrode may further comprise at least two additional contacts and associated connections, wherein the additional contacts arranged on the outer wall of said cuff stimulation electrode.

[0009] In such embodiment, the pulsation sensor can be based on electrical impedance plethysmography via the additional contacts.

[0010] Alternatively, the pulsation sensor may be based on strain gage.

Such cuff stimulation electrode may be used in a VNS

system and provides improved monitoring capabilities, in particular continuous monitoring of venous and arterial pressure waveforms and patient's posture.

[0011] The tilt sensor may further incorporate a kinematic response for the extraction of heart rate and the diagnostics of Obstructive Sleep Apnea (OSA). When the cuff stimulation electrode is implanted so as to surround or enclose a vagus nerve, the cuff stimulation electrode is also arranged next to the Common Carotid Artery (CCA) and the Internal Jugular Vein (IJV) within the carotid sheath in the neck area. Thus, the pulsation sensor would pick up a signal that corresponds to the pressure waveforms in the IJV and the CCA. The signal provided by such pulsation sensor may therefore be referred to as the "pressure signal", although it only indirectly represents arterial and venous pressures in terms of shape and timing with respect to the cardiac cycle. Depending on the posture of the patient, this signal will either mainly depend on the IJV pressure waveform or the CCA one.

[0012] According to a second aspect of the invention, a control device is provided, that can be embedded in the cuff stimulation electrode assembly or connected to it, can be configured to process posture and pressure waveform signals that are generated by the tilt and pulsation sensors, respectively, and that can evaluate the pressure waveforms in dependence of the posture signal in order to allow discrimination of the IJV pressure waveform from the CCA pressure waveform.

[0013] The cuff stimulation electrode may comprising an interface to the control device for a data communication connection from and to said cuff stimulation electrode. The data communication connection may be a galvanic connection through the patient's body that comprises a data transceiver, and wherein said additional contacts are configured to provide data communication via modulation of an imposed alternating electric field.

In an alternative embodiment, the tilt sensor is neither part of nor physically attached to the cuff stimulation electrode but connected to the control device instead as a part of the VNS system. In yet another alternative embodiment, the tilt sensor may even be part of the control device as long as it can be implanted so that the tilt sensor orientation corresponds to the posture of a patient. In a preferred embodiment, the combined tilt-kinematic sensor is implemented using a triaxial accelerometer and the pulsation sensor is implemented by electrical impedance plethysmography. In an alternative embodiment, the pulsation sensor utilizes a displacement-sensitive measurement method instead such as a strain gage.

[0014] Preferably, the control device is configured to process posture signals and pressure signals that are generated by said tilt sensor and said pulsation sensor, respectively, said control device further being configured to evaluate said pressure signals in dependence of said posture signal, if said posture signal indicates a predetermined change of the orientation of said tilt sensor.

[0015] The control device may further be configured to extract a heart rate signal from said at least one sensor.

The control device may alternatively or additionally be configured to determine congestive heart failure status from processing said sensor(s) signals.

[0016] In a further preferred embodiment, the control device is configured to determine obstructive sleep apnea from processing said kinematic sensor signal.

[0017] The control device may be an implantable pulse generator with an internal power source.

[0018] The control device may further be configured to process posture signals and pulsation signals that are generated by said tilt sensor and said pulsation sensor, respectively, wherein the control device is further configured to evaluate the pulsation signals in dependence of the posture signal, if the posture signal indicates a pre-determined change of the orientation of said tilt sensor.

[0019] The control device may further have far-field electrogram recording capabilities. The control device may be configured to determine Congestive Heart Failure status from processing said sensor(s) signal(s) and said far-field electrogram recordings.

[0020] The control device may be further configured to determine Obstructive Sleep Apnea from processing said kinematic sensor signal.

[0021] The control device may be an implantable pulse generator.

[0022] The implantable pulse generator may further comprise wireless data communication with an external programmer or patient messenger.

[0023] In preferred embodiment the cuff stimulation electrode including the tilt sensor and the pulsation sensor is hermetically sealed for chronic implantation.

[0024] The invention includes the insight that chronic implantable VNS for CHF apparatuses in prior art generally lack monitoring capabilities for disease progression, or these are limited to cardiac timing and transthoracic impedance measurements which require leads in the heart. Since the targeted CHF patient population may require implantation of an implantable cardioverter/defibrillator to prevent sudden cardiac death or another cardiac rhythm management device, it is preferred to avoid adding leads in the heart for the purpose of delivering VNS therapy. Apparatuses in prior art lack, in particular, the capability of measuring arterial or venous pressure waveforms, which are critical parameters in the assessment of complications related to CHF. Patient sleeping angles, as well as OSA-related parameters, can also give extra diagnostics information in this patient population. VNS for CHF apparatuses in prior art lack these measurement capabilities as well.

[0025] According to a further aspect, prior art apparatuses also suffer from limited lifetime, since they are powered from a primary battery, which requires a revision surgery to replace the IPG once its battery depletes. Rechargeable and inductively-powered IPGs, and wirelessly-powered nerve cuff electrodes with embedded electronics, have been proposed in prior art for other VNS therapies (e.g. epilepsy, obesity), but are not suitable for adaptation to VNS for CHF due to patience-compliance

issues. A VNS for CHF apparatus cannot rely on the patient to provide power to deliver therapy.

[0026] The nerve cuff stimulation electrode according to a preferred embodiment of the invention is an implantable apparatus for cervical Vagus Nerve Stimulation (VNS) with the capability of recording Common Carotid Artery (CCA) and Internal Jugular Vein (IJV) pressure waveforms, among other key parameters applicable to the treatment of Congestive Heart Failure (CHF). This nerve cuff stimulation electrode can be implanted around one of the vagus nerves in the neck area, with internal stimulation contacts for delivering electrical stimulation to the nerve, a pulsation sensor, a triaxial accelerometer, and associated front-end electronic circuitry attached to or integrated into the stimulation electrode cuff's wall and all hermetically-sealed for chronic implantation. The front-end electronic circuitry may serve for stimulation and/or recording purposes. According to a further preferred embodiment, the nerve cuff stimulation electrode connects to a battery-operated Implantable Pulse Generator (IPG) in the patient's chest, which controls stimulation delivery, powers the cuff stimulation electrode electronic components, and receives pressure and acceleration signals for further processing.

[0027] The nerve cuff stimulation electrode of this preferred embodiment is implanted such as the pulsation and accelerometer sensors face the CCA/IJV outer walls. The accelerometer allows determining Obstructive Sleep Apnea (OSA)-related parameters, patient sleeping angles and heart rate, which can also be extracted from the CCA pressure waveform timing. It can also be used for arterial acceleration plethysmography, which highly correlates to systolic blood pressure.

[0028] The IPG is capable of performing intrathoracic far-field Electrogram (EGM) recording and processing for arrhythmia monitoring. The IPG has the possibility of communicating, via a MICS-band link or equivalent, to an external Programmer or bedside Patient Messenger connected to a Home Monitoring/Remote Programming Center.

[0029] In another preferred embodiment, the apparatus incorporates the control device and it is powered by reliable body energy harvesting for continuous and autonomous operation, e.g. by a Thermoelectric Generator (TEG) implanted around the External Jugular Vein (EJV) and wired to the control device. The temperature difference between the EJV and the surrounding subcutaneous tissue below the skin provides enough of a temperature gradient to power the apparatus in the present application. The TEG is held in place by a Ni-based vein cuff for external banding around the EJV.

[0030] In yet another preferred embodiment, the apparatus communicates, via modulation of an imposed alternating electric field (Passive Z-COMM), with an external skin Patch connectable to a Programmer or to another implantable device, hence being suitable for integration in a Home Monitoring/Remote Programming regime, an important feature in the integral medical treat-

ment of CHF patients. In a further embodiment, the extra contacts on the nerve cuff stimulation electrode outer wall required for Passive Z-COMM are preferably multiplexed to perform impedance plethysmography for arterial blood flow assessment.

[0031] The nerve cuff stimulation electrode, the control device and the Vagus Nerve Stimulation (VNS) system comprising both, the nerve cuff stimulation electrode and the control device according to a preferred embodiment of the invention, each advance the state-of-the-art in cervical VNS for CHF treatment by providing a means for continuous monitoring of venous and arterial pressures, cardiac timing for arrhythmia detection, in particular patient sleeping angles and parameters relevant to the diagnostics of OSA, without requiring endocardial leads.

[0032] Before turning to the detailed description of the invention and the drawings, a more general disclosure of the invention and preferred embodiments is given:

[0033] Each vagus nerve is situated posteriorly between the Common Carotid Artery (CCA) and the Internal Jugular Vein (IJV) in the carotid sheath, a fibrous connective tissue that surrounds the vascular compartment of the neck. The nerve cuff stimulation electrode of the present invention takes advantage of this proximity and integrates a pulsation sensor (and associated front-end electronic circuitry) on its outer wall to indirectly measure the combined pressure waveforms of both vessels. Such combined pressure waveform can be further decomposed in the individual CCA and IJV pressure waveforms, based on the patient posture determined by the triaxial accelerometer. In the supine position, the IJV is partially distended and its higher compliance, with respect to the CCA, allows recording a waveform that reflects the IJV pressure. On the other hand, in semi-recumbent and erect postures, the IJV vein normally collapses to a slit-like passage leaving only the CCA volume pulsations. Because the spectral content of respiratory waveforms and vascular waveforms overlap, a band-pass filter (that can be part of the cuff stimulation electrode's front-end circuitry or part of the control device) may allow eliminating the distortion caused by the former.

[0034] Present miniaturization technologies, and the length of the cuff stimulation electrode, allow integrating other electronics on the same electrode assembly. An embedded triaxial accelerometer (and associated front-end electronic circuitry) permits diagnosing Obstructive Sleep Apnea (OSA), and the static acceleration component permits monitoring sleeping angles. These two parameters are of particular interest, as patients with Congestive Heart Failure (CHF) generally suffer from sleep apnea, and they tend to sleep in a sitting position due to breathing difficulties. Statistics on the sleeping angle, for example, may be utilized to analyze improvements or worsening of a patient's condition. The same accelerometer may be used for acceleration plethysmography which allows an indirect measurement of the systolic blood pressure. Alternatively, the accelerometer is located within the IPG. Electrical impedance plethysmogra-

phy of the artery is also possible, with a minimum of two electrode contacts on the nerve cuff stimulation electrode's outer wall and the same stimulating electronic circuitry, which allows artery blood flow assessment.

5 These two electrode contacts may be the same as the ones utilized for Passive Z-COMM communication. They may also be arranged to provide enough of a vector to extract heart rate.

[0035] Although heart rate can be extracted from the accelerometer or CCA pressure waveform, an intrathoracic far-field Electrogram (EGM) can be recorded between the IPG can (that is the IPG housing) and one of the nerve cuff stimulation electrode contacts or other dedicated electrode contacts to provide more meaningful cardiac timing information for arrhythmia detection purposes in particular. All the available diagnostics, combined with wireless communication capability to a bedside Patient Messenger (an external device that can communicate with the implantable IPG), make the system of the present invention suitable for integration into a Home Monitoring/Remote Programming therapy regime. The same wireless link can be used for IPG programmability via an external Programmer.

[0036] With respect to powering the nerve cuff stimulation electrode by way of energy harvesting, the following observation applies: Given the location of the External Jugular Vein (EJV), the temperature difference with its surrounding tissue beneath the skin, and the very low power required for the nerve cuff stimulation electrode of the present application, the apparatus is powered by a TEG module (Seebeck effect) placed around the EJV using a Ni-based vein cuff for external banding. Implantation of this TEG module avoids long wire tunneling to a control device in the chest area, as it is located in the same neck area as the nerve cuff stimulation electrode. The vein cuff should provide enough support for connective tissue to grow and keep the TEG module in place. Such power supply of the nerve cuff stimulation electrode by way of energy harvesting can be implemented independently from other features of the nerve cuff stimulation electrode.

[0037] In a preferred embodiment, the apparatus of the present invention has two electrode contacts on its outer wall for galvanic intrabody data communication with an external skin Patch connectable to a Programmer, an implantable heart monitor or another implantable device via modulation of an imposed alternating electric field. Either the heart monitor or the skin Patch (which can operate autonomously) may communicate via a MICS-band link (or equivalent) to a bedside Patient Messenger connected to a Home Monitoring/Remote Programming Center.

[0038] The above and other aspects, features and advantages of the present invention will be more apparent from the following more particular description thereof presented in conjunction with the following drawings, wherein:

- Figure 1: is an illustration of an implanted cuff stimulation electrode and control device according to a preferred embodiment of the invention;
- Figure 2: is a schematic block diagram of the main electronic components (front-end) of the cuff stimulation electrode;
- Figure 3: is an illustration of a cuff stimulation electrode that incorporates the control device and it is connected to an implanted Thermoelectric Generator (TEG);
- Figure 4: is a cross-sectional view of the vagus nerve, the Common Carotid Artery (CCA) and the Internal Jugular Vein (IJV) within the carotid sheath in the neck area;
- Figure 5: is an illustration of an alternative embodiment, wherein the TEG module is placed with its hot plate adjacent to the CCA and its cold plate facing surrounding tissue away from the IJV;
- Figure 6: is an illustration of an IJV and a CCA pressure waveform;
- Figure 7: illustrates a communication scheme with an implantable nerve stimulation system; and
- Figure 8: illustrates an alternative communication scheme with an implantable nerve stimulation system.

[0039] The following description is of the best mode presently contemplated for carrying out the invention. This description is not to be taken in a limiting sense, but is made merely for the purpose of describing the general principles of the invention. The scope of the invention should be determined with reference to the claims.

[0040] According to a preferred embodiment of the invention as shown in Figure 1, a nerve cuff stimulation electrode 100 is constructed, using a silicone rubber tube 101, with at least two exposed Pt/Ir (or equivalent material) ring contacts 102 in its interior wall in contact with the vagus nerve 103 surface, and a closing structure 104. The cuff stimulation electrode 100 can be self-coiling, or it may include other closing mechanisms, such as a piano hinge with a nylon suture. Biocompatible strings 105 are built on the cuff stimulation electrode 100 outer wall to open it for easy implantation around the nerve 103. Electronic circuitry 106, which may include a pulsation sensor, a triaxial accelerometer, and associated front-end electronic circuitry, is built on the cuff stimulation electrode 100 outer wall and/or associated assembly structures.

[0041] In a second embodiment, the ring contacts 102 are replaced by multiple contacts around the nerve 103.

Local bipolar stimulation between any two of these contacts may increase effectiveness and selectivity for cardiovascular effects.

[0042] The nerve cuff stimulation electrode 100 is connected to an Implantable Pulse Generator (IPG) 107 located in the patient's chest area via a subcutaneously implanted wire 108. Such wire 108 provides electrical connection to the contacts 102, powers the electronic module 106 built on the cuff stimulation electrode 100, and receives pre-processed pressure and acceleration signals from the vicinity of the cuff stimulation electrode 100. Electronic circuitry in the IPG 107 can drive the ring contacts 102 for delivering low-level electrical stimulation pulses to the nerve 103, i.e. a stimulation level that may not cause a heart rate drop or any other noticeable effect in the patient. Sub-threshold pulses can also be delivered through the ring contacts 102 for impedance measurement to assess potential nerve 103 damage, connective tissue growth, or closing structure 104 failure. The IPG 107 also has the capabilities of recording intrathoracic far-field EGMs 109 between its can and a contact 102, or alternatively using a separate lead with contact(s) 110 closer to the heart. Thus, the IPG 107 acts as a control device for the cuff stimulation electrode 100. It should be noted that the control device may also be another device different from an IPG.

[0043] Figure 2 is a schematic block diagram showing the main electronic components of the nerve cuff stimulation electrode 100. These may include a pulsationsensor 106.2, which utilizes a displacement-sensitive measurement method (e.g. a strain gage), and a triaxial accelerometer 106.3, both connected to the front-end electronic circuitry 106.1. In preferred embodiments, such circuitry 106.1 may be connected to stimulation contacts 102 and/or to communication contacts 106.4. These contacts 106.4 may serve for galvanic intrabody data communication via modulation of an imposed alternating electric field on the body. They are part of a data communication interface of the IPG 107. For the purpose of data communication, the IPG 107 may comprise a data transceiver connected to communication contacts 106.4. In an alternative embodiment, the pulsation sensor is based on electrical impedance plethysmography re-utilizing these contacts 106.4 (multiplexed with communication) and the IPG 107 circuitry utilized for nerve 103 impedance measurements.

[0044] In an alternative embodiment, the control device is integrated with the electronic circuitry 106 and powered by a Thermoelectric Generator (TEG) module 111 implanted around the External Jugular Vein (EJV) 112 using a Ni-based vein cuff, with the TEG's hot plate in thermal contact with the EJV 112 outer wall and the cold plate facing the surrounding tissue beneath the skin 113, as shown in Figure 3. A temperature difference of 2 K can be expected between the two plates of the TEG module 111, and such temperature difference can be converted (by Seebeck effect) into electrical energy for powering the embedded electronic circuitry 106. Typical-

ly 1.0 V at 5.0 μ A or 5.0 μ W can be harvested with this TEG. This may be enough power for the particular application given that VNS for CHF is duty cycled with a few pulses delivered every few seconds or cardiac cycles. A typical stimulation pulse may consist of a rectangular pulse of 1.0 mA with a 200 μ s width which requires negligible charge consumption compared with the background power consumption required for operation. Most of the power consumption in the present application is required for signal processing from the mentioned sensors.

[0045] The circuitry 106 in this case includes the necessary low-power management circuitry for power regulation and continuous operation. Power supply from the TEG module 111 to the control device and electronic circuitry 106 is provided by the power supply wire 114.

[0046] Figure 4 sketches a cross-sectional view of the vagus nerve 103, the Common Carotid Artery (CCA) 200 and the Internal Jugular Vein (IJV) 201 within the carotid sheath 203 in the neck area. As it can be seen, the nerve cuff electrode 100 is implanted so its built-in electronic circuitry 106 faces the CCA 200 and IJV 201 for pressure waveform recording. In another embodiment, the nerve cuff electrode 100 may partially or fully wrap at least one of the CCA 200 and IJV 201 for improved pressure waveform recording.

[0047] As can be taken from Figure 5, in another embodiment, the TEG module 111 is instead placed with its hot plate adjacent to the CCA 300 and its cold plate facing surrounding tissue away from the blood vessel, for instance the IJV. The TEG module 111 anchoring may be part of the cuff 304, wrapping both the vagus nerve 103 and the CCA 300. As can be seen in Figure 5, the cuff 304 is implanted so its embedded electronic circuitry 106 faces the CCA 300.

[0048] As pointed out above, the signal provided by the pulsation sensor 106.2 is representative of arterial and venous pressures in terms of shape and timing with respect to the cardiac cycle and thus can be considered an indirect pressure signal.

[0049] The CCA 200 and IJV 201 pressure waveforms provide relevant information about the patient's heart condition and hence are very useful for the monitoring of CHF status. As shown in Figure 6, the IJV pressure waveform can be differentiated from the CCA pressure waveform by recording when the triaxial accelerometer indicates a supine and a semi-recumbent or erect position, respectively. The sampled pressure waveform is band-pass filtered to eliminate or minimize respiratory components. In a preferred embodiment, the lower limit of the digital linear phase filter is set to a frequency above the fundamental respiratory rate and below the fundamental heart rate. The upper limit, on the other hand, can be set to reduce electrical noise from the mains. The front-end electronic circuitry 106.1 is configured to filter the pressure signal with a lower cutoff frequency between 0.75 Hz - 1.75 Hz and an upper cutoff frequency between 20 Hz - 30 Hz. The pressure signal either represents the IJV

or CCA pressure based on the patient's position. A preferred sampling rate is 200 Hz.

[0050] The accelerometer signal provided by the triaxial accelerometer 106.3 is pre-processed by the front-end electronic circuitry 106.1 to determine heart and respiratory signals as follows:

Breathing signal band-pass: 0.10 Hz - 0.50 Hz.

Heart rate signal band-pass: 0.50 Hz - 3.50 Hz.

Snoring signal band-pass: 3.5 Hz - 100.0 Hz.

[0051] Also in a preferred embodiment, morphological filters are implemented in the IPG 107 embedded electronic circuitry to track changes in the IJV and CCA pressure waveforms. The parameters of these filters may be adjusted following implantation. Deviations from the original waveforms with time will indicate heart complications that may occur with the progression of the patient's condition. In addition, changes in the Pulse Transit Time (PTT) 303, i.e. the delay between the R-wave detection and the peak of the CCA pressure waveform, can be used to determine arterial stiffness and to perform monitoring of arterial blood pressure. PTT trending analysis can be used to assess disease progression.

[0052] The system of the present invention has the signal processing capabilities to identify changes that may occur in the CCA and IJV pressure waveforms and alerting a Home Monitoring Center via a bedside Patient Messenger.

[0053] In an alternative embodiment, the system of the present invention has the signal processing capabilities to identify changes that may occur in the CCA and IJV pressure waveforms and alert a Home Monitoring Center accordingly either via a skin Patch when applied or by relaying the information to a heart monitor implanted device with wireless communication with the outside world.

[0054] As mentioned above, the triaxial accelerometer 106.3 signal can also be filtered in different ways to extract heart, breathing and snoring signals, which are key elements for the diagnosis of OSA. It can also be used to extract sleeping angle patterns. A decrease in the patient's sleeping angle will indicate an improvement of the patient's condition, as patients with CHF tend to sleep with several pillows due to breathing difficulties associated with the disease. Furthermore, the accelerometer can be used to determine the Reflected Wave Transit Time (RWTT) of the CCA pulse wave, which is the temporal difference between the incident and reflected wave at the same position. It has been shown in vivo that the RWTT has high correlation with systolic blood pressure, and hence it can be used as an estimator.

[0055] Going to Figure 7, the IPG 107 can be wirelessly programmed by an external Programmer 400 via a MICS-band link 401 (or equivalent). The IPG 107 can also communicate with a bedside Patient Messenger 402 via a similar link 403. Arrhythmia detection, blood pressure waveform changes, and the other relevant diagnostic parameters described before can be transmitted to the bed-

side Patient Messenger 402 who can alert a Home Monitoring/Remote Programming Center, if medical attention is required.

[0056] Going to Figure 8, the nerve stimulation electrode cuff 304 includes a minimum of two external contacts 600 placed longitudinally across its outer wall that can be used for galvanic communication 601 with an external skin Patch 602 applied on the patient's neck 603 or adjacent upper body location and wired to an external Programmer 604. The external skin Patch 602 can also be employed as an ambulatory monitor, if desired, with a low-power wireless link 605 to a bedside Patient Messenger 606 connected to a Home Monitoring/Remote Programming Center. The external contacts 600 can also be used for heart rate determination.

[0057] In another embodiment, the same communication contacts 600 of Figure 8 for galvanic intrabody communication via modulation of an imposed alternating electric field can be multiplexed and utilized for impedance plethysmography that indirectly allows measuring the pulsatile blood flow through the CCA. The circuitry built-in for nerve impedance measurement can be used for this purpose.

[0058] The nerve cuff stimulation electrode 304 may also communicate via galvanic intrabody communication 607 with an implantable heart monitor 608 or another implantable device with the capability of MICS-communication 609 (or equivalent) with the bedside Patient Messenger 606.

[0059] Technical advantages of this invention include:

- 1) a nerve cuff stimulation electrode with built-in electronic circuitry that includes a pulsation sensor (e.g. electrical impedance plethysmography or strain gauge), a tilt-kinematic sensor (e.g. a triaxial accelerometer), and associated front-end electronic circuitry, implanted as a standard VNS cuff for CHF;
- 2) a VNS for CHF system, capable of recording CCA and IJV pressure waveforms, critical parameters for CHF monitoring, in addition to other relevant parameters, such as heart rate, OSA-related, body posture, etc.; and
- 3) a VNS for CHF system, capable of recording intrathoracic far-field EGMs for arrhythmia detection in particular; 4) a VNS for CHF system, suitable for integration into a Home Monitoring/Remote Programming regime.

List of Terms

[0060]

VNS	Vagus Nerve Stimulation
CHF	Congestive Heart Failure
IPG	Implantable Pulse Generator
CCA	Common Carotid Artery
IJV	Internal Jugular Vein
OSA	Obstructive Sleep Apnea

EGM	Electrogram
TEG	Thermoelectric Generator
EJV	External Jugular Vein
PTT	Pulse Transit Time
RWTT	Reflected Wave Transit Time

List of Reference Numerals

[0061]

100, 304 -	Cuff Stimulation Electrode
101 -	Silicone Rubber Tube
102 -	Ring Contacts
103 -	Nerve
104 -	Closing Structure
105 -	Biocompatible Strings
106 -	Electronic Circuitry
107 -	Implantable Pulse Generator
108 -	Wire
109 -	Intrathoracic Far-Field Electrogram (EGM)
110 -	Contacts
111 -	Thermoelectric Generator (TEG)
112 -	External Jugular Vein (EJV)
113 -	Skin
114 -	Power Supply Wire
200, 300 -	Common Carotid Artery (CCA)
201, 301 -	Internal Jugular Vein (IJV)
203 -	Carotid Sheath
400, 604 -	External Programmer
401 -	MICS-Band Communication Link to Programmer
402, 606 -	Patient Messenger
403, 607 -	MICS-Band Communication Link to Patient Messenger
600 -	Communication Contacts
601 -	Wireless Intrabody Communication Link
602 -	External Skin Patch
603 -	Patient's Neck
605 -	Low-Power Wireless Link
608 -	Implantable heart monitor
609 -	MICS Communication

Claims

1. A cuff stimulation electrode (100, 304) for cervical Vagus Nerve Stimulation (VNS), comprising:

An inner cuff surface that faces a nerve (103); at least two contacts (110) arranged on said inner cuff surface for delivering electrical stimulation, and at least one of a tilt sensor, a kinematic sensor, and a pulsation sensor; wherein said at least one sensor is configured to generate a signal representative of physiological parameters.

2. A cuff stimulation electrode (100, 304) according to claim 1, wherein said tilt and kinematic sensors are implemented using an accelerometer.
3. A cuff stimulation electrode (100, 304) according to at least one of claims 1 and 2, further comprising at least two additional contacts (110) and associated connections, said additional contacts arranged on the outer wall of said cuff stimulation electrode (100,304).
4. A cuff stimulation electrode (100, 304) according to claim 3, wherein said pulsation sensor is based on electrical impedance plethysmography via the additional contacts.
5. A cuff stimulation electrode (100, 304) according to at least one of claims 1 to 4, further comprising an interface to a control device for a data communication connection from and to said cuff stimulation electrode (100, 304).
6. A cuff stimulation electrode (100, 304) according to claims 3 and 5, wherein said data communication connection is a galvanic connection through the patient's body that comprises a data transceiver, and wherein said additional contacts are configured to provide data communication via modulation of an imposed alternating electric field.
7. A cuff stimulation electrode (100, 304) according to at least one of claims 1 and 6" wherein said pulsation sensor is based on strain gage.
8. A cuff stimulation electrode (100, 304) according to at least one of claims 1 to 7, further comprising a control device.
9. A cuff stimulation electrode (100, 304) according to claim 8, further comprising or being electrically connected to a thermoelectric generator that is configured to be placed adjacent to a blood vessel.
10. A cuff stimulation electrode (100, 304) according to at least one of claims 8 or 9, wherein said control device of said cuff stimulation electrode (100, 304) is configured to process posture signals and pressure signals that are generated by said tilt sensor and said pulsation sensor, respectively, said control device further being configured to evaluate said pressure signals in dependence of said posture signal, if said posture signal indicates a predetermined change of the orientation of said tilt sensor.
11. A cuff stimulation electrode (100, 304) according to claim 10, further configured to extract a heart rate signal from said at least one sensor.
12. A vagus nerve stimulation system comprising a cuff stimulation electrode (100, 304) according to at least one of claims 1 to 11.
13. A control device for a vagus nerve stimulation system according to claim 12, wherein the control device is an implantable pulse generator with an internal power source.
14. A control device according to claim 13, wherein said implantable pulse generator being configured to process posture signals and pressure signals that are generated by said tilt sensor and said pulsation sensor, respectively, said control device further being configured to evaluate said pressure signals in dependence of said posture signal, if said posture signal indicates a predetermined change of the orientation of said tilt sensor.
15. A control device according to at least one of claims 12 to 14, further comprising far-field electrogram (109) recording capabilities and wherein said implantable pulse generator is configured to determine Congestive Heart Failure status from processing said sensor(s) signal(s) and said far-field electrogram (109) recordings.

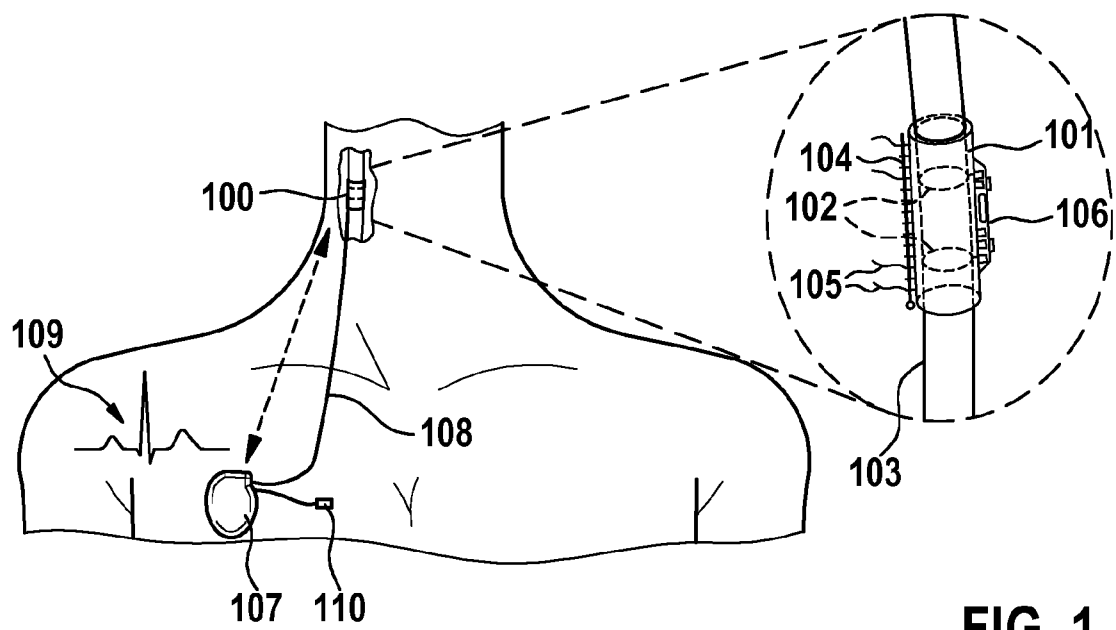


FIG. 1

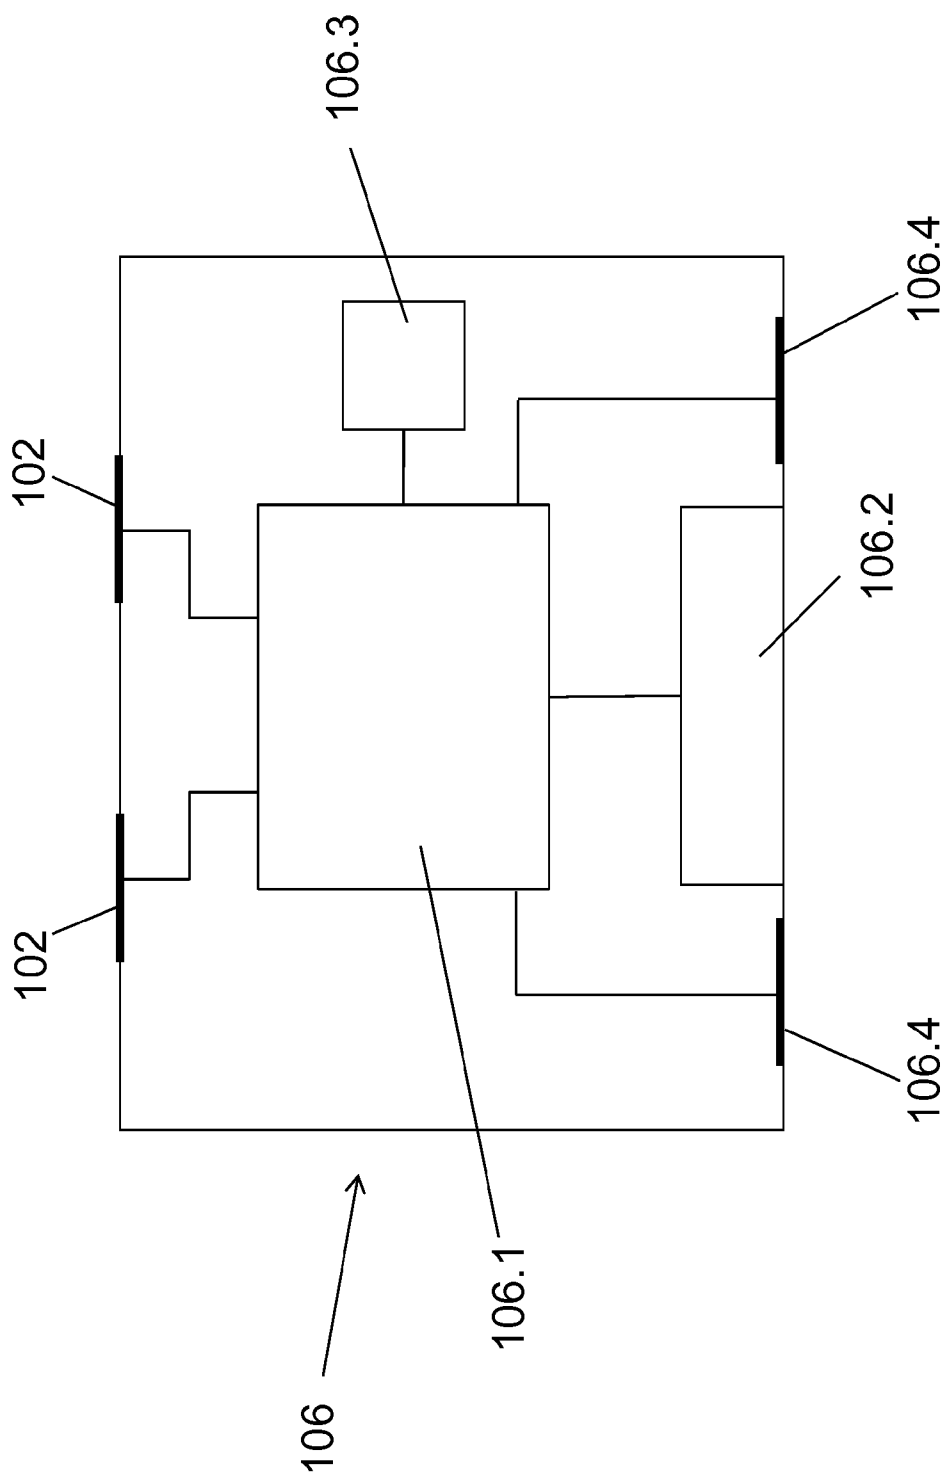


FIG. 2

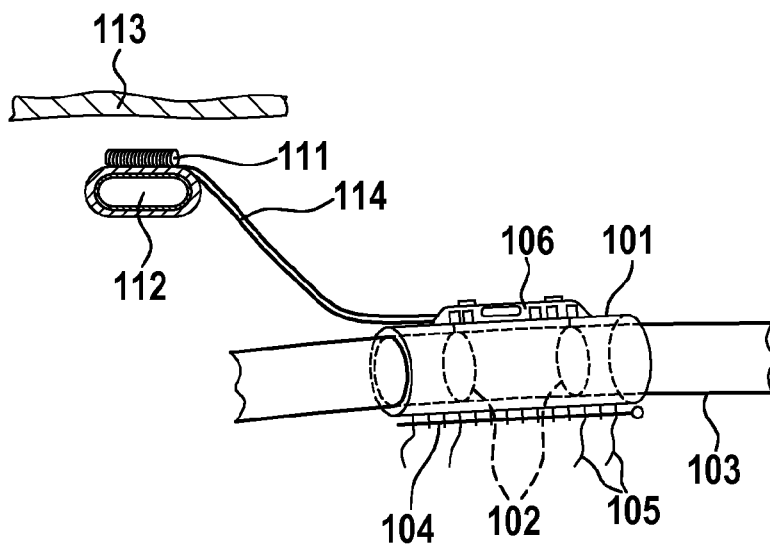


FIG. 3

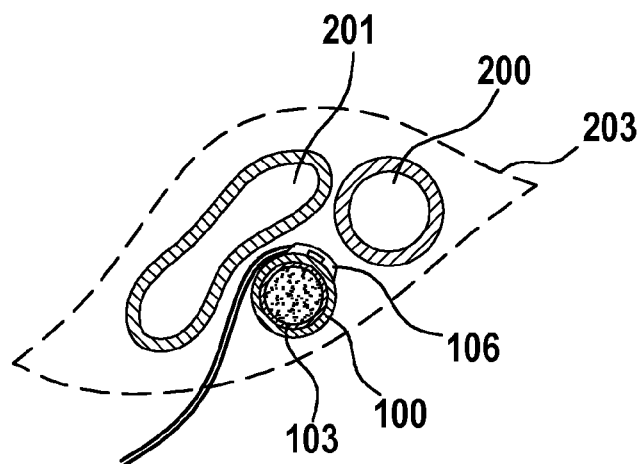


FIG. 4

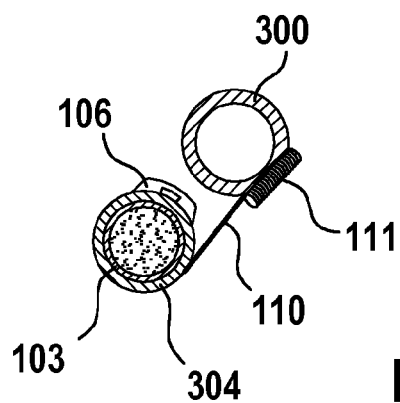


FIG. 5

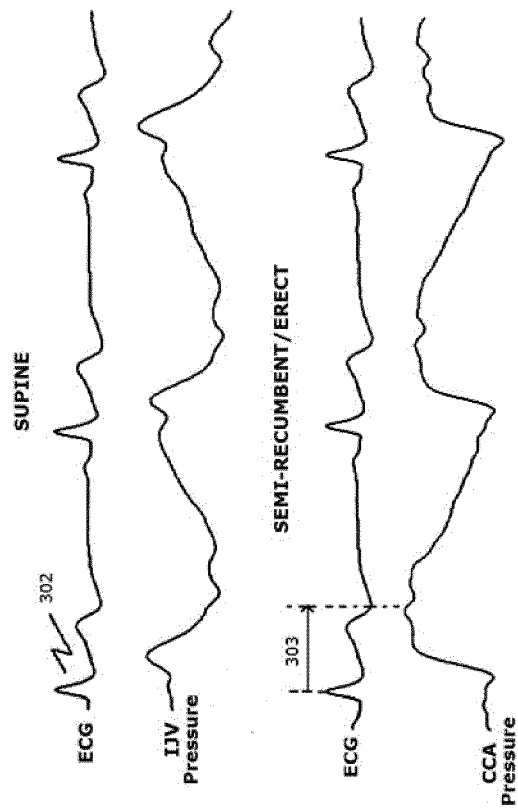


FIG. 6

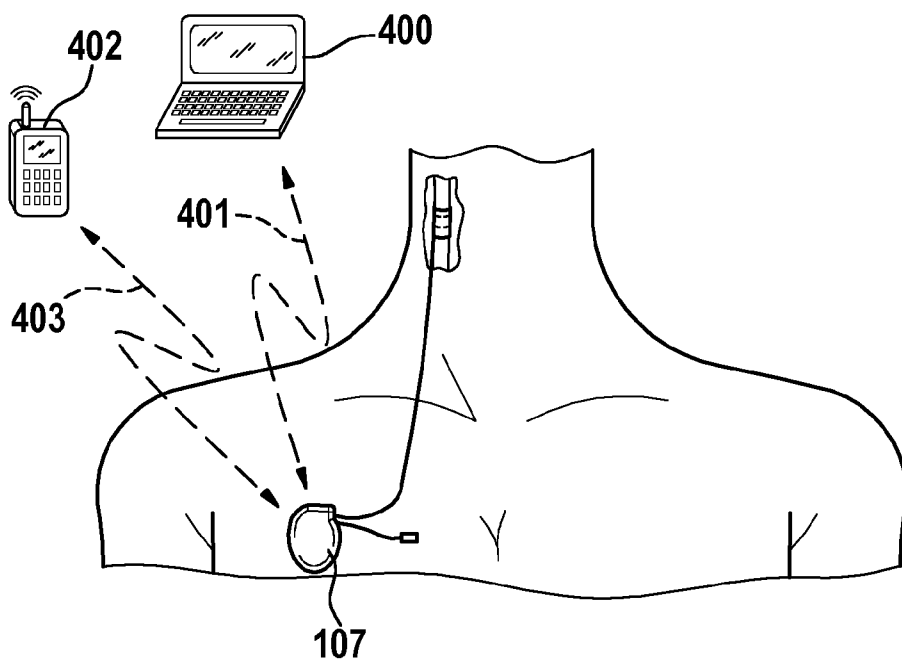


FIG. 7

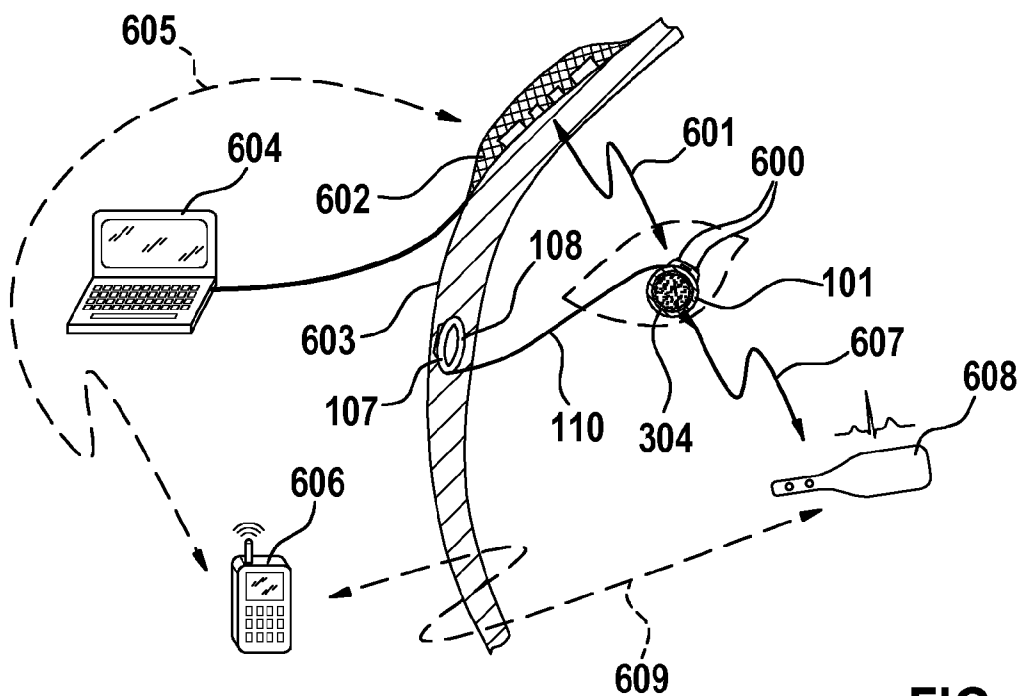


FIG. 8



EUROPEAN SEARCH REPORT

Application Number
EP 15 17 0635

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2010/042186 A1 (BEN-DAVID TAMIR [IL] ET AL) 18 February 2010 (2010-02-18)	1,3,5,6,8,12,13	INV. A61N1/05
Y	* paragraph [0076] - paragraph [0085] * * paragraph [0098] - paragraph [0105] * * paragraph [0114]; figures 1-3 *	4,7,9,15	A61N1/28 A61N1/36 A61B5/00 A61B5/0295 A61B5/11
X	US 2013/046358 A1 (LEYDE KENT W [US]) 21 February 2013 (2013-02-21)	1,2,5,8,12,13	
Y	* paragraph [0040] - paragraph [0048] * * paragraph [0069]; figures 1, 7 *	7,9-11,14	
Y	US 2013/204328 A1 (STAHMANN JEFFREY E [US] ET AL) 8 August 2013 (2013-08-08)	4,10,11,14,15	
	* paragraph [0035] - paragraph [0043] * * paragraph [0087] - paragraph [0088] * * paragraph [0104] - paragraph [0113]; figures 2, 7A, 9 *		
Y	US 2009/131767 A1 (ARNE LAWRENCE W [US] ET AL) 21 May 2009 (2009-05-21)	7	TECHNICAL FIELDS SEARCHED (IPC)
	* paragraph [0061] * * paragraph [0070] - paragraph [0071] *		A61B A61N
Y	US 2014/114305 A1 (ZARINS DENISE [US] ET AL) 24 April 2014 (2014-04-24)	9	
	* paragraph [0032] - paragraph [0038] * * paragraph [0048] - paragraph [0050] * * paragraph [0098] - paragraph [0101]; figure 11 *		
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 3 November 2015	Examiner Sigurd, Karin
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 15 17 0635

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-11-2015

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010042186 A1	18-02-2010	NONE	
US 2013046358 A1	21-02-2013	US 2008114417 A1 US 2013046358 A1	15-05-2008 21-02-2013
US 2013204328 A1	08-08-2013	CN 104220129 A EP 2812070 A1 US 2013204328 A1 US 2014343637 A1 WO 2013119732 A1	17-12-2014 17-12-2014 08-08-2013 20-11-2014 15-08-2013
US 2009131767 A1	21-05-2009	US 2009131767 A1 WO 2009067463 A1	21-05-2009 28-05-2009
US 2014114305 A1	24-04-2014	US 2007135875 A1 US 2011208096 A1 US 2014114305 A1 US 2015282877 A1	14-06-2007 25-08-2011 24-04-2014 08-10-2015

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 8401640 B [0002]
- US 20130184773 A [0002]
- US 8473068 B [0002]

专利名称(译)	袖带电极包括传感器和用于迷走神经刺激的触点		
公开(公告)号	EP2959937A1	公开(公告)日	2015-12-30
申请号	EP2015170635	申请日	2015-06-04
申请(专利权)人(译)	BIOTRONIK SE & CO.KG		
当前申请(专利权)人(译)	BIOTRONIK SE & CO.KG		
[标]发明人	BARU MARCELO KIBLER ANDREW B DABNEY WARREN LIAN JIE MOULDER J CHRISTOPHER MUSSIG DIRK		
发明人	BARU, MARCELO KIBLER, ANDREW B. DABNEY, WARREN LIAN, JIE MOULDER, J. CHRISTOPHER MÜSSIG, DIRK		
IPC分类号	A61N1/05 A61N1/28 A61N1/36 A61B5/00 A61B5/0295 A61B5/11 A61B5/0205 A61B5/021 A61B5/0215 A61N1/378		
CPC分类号	A61B5/6877 A61B5/002 A61B5/0205 A61B5/02125 A61B5/0215 A61B5/1116 A61N1/0556 A61N1/28 A61N1/36053		
优先权	62/017282 2014-06-26 US		
外部链接	Espacenet		

摘要(译)

本申请涉及用于颈部迷走神经刺激的神经套囊刺激电极（100），该电极被配置成至少部分地围绕或包围迷走神经之一。袖带刺激电极包括至少两个触点（102），其配置成将电刺激脉冲传递到迷走神经。袖带刺激电极还包括倾斜传感器，运动传感器和脉动传感器中的至少一个，该脉动传感器配置成产生代表动脉和静脉压力的信号。倾斜传感器可以被配置为输出指示患者姿势的姿势信号，从而允许区分仰卧姿势和半卧姿或直立姿势。

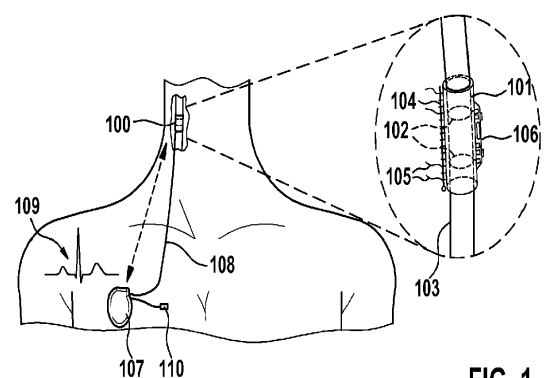


FIG. 1