

(19)



(11)

EP 3 357 430 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

18.09.2019 Bulletin 2019/38

(51) Int Cl.:

A61B 8/13 (2006.01)

A61B 5/00 (2006.01)

(86) International application number:

PCT/JP2016/004307

(21) Application number: **16850642.6**

(22) Date of filing: **21.09.2016**

(87) International publication number:

WO 2017/056462 (06.04.2017 Gazette 2017/14)

(54) PHOTOACOUSTIC MEASUREMENT DEVICE AND SIGNAL PROCESSING METHOD OF PHOTOACOUSTIC MEASUREMENT DEVICE

VORRICHTUNG ZUR PHOTOAKUSTISCHEN MESSUNG UND
SIGNALVERARBEITUNGSVERFAHREN EINER VORRICHTUNG ZUR PHOTOAKUSTISCHEN
MESSUNG

DISPOSITIF DE MESURE PHOTO-ACOUSTIQUE ET PROCEDE DE TRAITEMENT DU SIGNAL
D'UN DISPOSITIF DE MESURE PHOTOACOUSTIQUE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **29.09.2015 JP 2015191727**

(43) Date of publication of application:

08.08.2018 Bulletin 2018/32

(73) Proprietor: **FUJIFILM Corporation**

Tokyo 106-8620 (JP)

(72) Inventors:

- **HASHIMOTO, Atsushi**
Ashigarakami-gun
Kanagawa 258-8538 (JP)
- **IRISAWA, Kaku**
Ashigarakami-gun
Kanagawa 258-8538 (JP)

• **OSAWA, Atsushi**

Ashigarakami-gun
Kanagawa 258-8538 (JP)

• **INOUE, Tomoki**

Ashigarakami-gun
Kanagawa 258-8538 (JP)

(74) Representative: **Klunker IP**

Patentanwälte PartG mbB
Destouchesstraße 68
80796 München (DE)

(56) References cited:

WO-A1-2014/148375	WO-A1-2015/118881
JP-A- 2011 217 767	JP-A- 2013 005 957
JP-A- 2013 005 957	US-A1- 2012 253 180
US-A1- 2012 296 192	US-A1- 2013 199 300
US-A1- 2013 245 418	US-A1- 2013 245 419
US-A1- 2013 261 427	US-A1- 2014 018 659

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to a photoacoustic measurement device that generates a photoacoustic image on the basis of a photoacoustic signal generated in a subject, and a signal processing method used for the photoacoustic measurement device.

Background Art

[0002] In recent years, a noninvasive measurement method using a photoacoustic effect attracts attention. In this measurement method, pulsed light having a certain appropriate wavelength (for example, a wavelength band of visible light, near-infrared light, or intermediate infrared light) is emitted toward a subject, photoacoustic waves which are elastic waves generated as a result of absorbing substance in the subject absorbing energy of the pulsed light are detected, and a concentration of the absorbing substance in the subject is, for example, glucose or hemoglobin contained in blood. Further, a technology of detecting such photoacoustic waves and generating a photoacoustic image on the basis of a detection signal is called photoacoustic imaging (PAI) or photoacoustic tomography (PAT).

[0003] In photoacoustic imaging, for example, as disclosed in Patent Document 1 and Patent Document 2, a probe including a light emitting portion that emits measurement light toward a subject, and an acoustic wave detection portion that is provided in parallel to the light emitting portion and detects photoacoustic waves generated in the subject due to the emission of the measurement light is often used.

[0004] Patent document 3 discloses a photoacoustic measurement device according to the preamble of claim 1 and discloses a signal processing method of a photoacoustic measurement device according to the preamble of claim 10. That is to say, this disclosure of this document is similar to that of patent document 1 or document 2.

Prior Art Documents

Patent Documents

[0005]

Patent Document 1: JP2013-158531 A

Patent Document 2: JP2015-519183 A

Patent Document 3: JP2013-005957 A

SUMMARY OF INVENTION

Technical Problem

[0006] The inventors of the present invention have found that in a case where the probe in which the light emitting portion and the acoustic wave detection portion are arranged in parallel as described above is used, photoacoustic waves generated at a surface portion of the subject on which the measurement light is incident propagate on a subject surface, are detected by the acoustic wave detection portion together with other signals, and cause artifacts (a false image). Such artifacts impair diagnostic performance of the displayed photoacoustic image.

[0007] Patent Document 1 describes a technology for suppressing artifacts by changing processing for a photoacoustic wave detection signal for each of regions that are different in a depth direction of a subject. Further, Patent Document 2 describes a technology for removing artifacts by performing a low-frequency cutting process on a photoacoustic wave detection signal.

[0008] However, the technology described in Patent Document 1 is based on elastography measurement or B mode measurement. With these measurements, an artifact generation region caused by the photoacoustic waves generated at a surface portion of the subject on which the measurement light is incident cannot be detected. Therefore, with the technology described in Patent Document 1, it is impossible to accurately reduce or remove artifacts caused by photoacoustic waves generated in the surface portion of the subject on which measurement light is incident.

[0009] Further, in the technology described in Patent Document 2, the low-frequency cutting process is performed without recognition of a region in which artifacts are generated. Therefore, with this technology, it is impossible to accurately reduce or remove the artifacts caused by the photoacoustic waves generated at the surface portion of the subject on which the measurement light is incident.

[0010] The present invention has been made in view of the above problems, and an object of the present invention is to provide a photoacoustic measurement device capable of accurately reducing or removing artifacts caused by photoacoustic waves generated at a surface portion of a subject on which measurement light is incident, and a signal processing method that is used in the photoacoustic measurement device.

Solution to Problem

[0011] A photoacoustic measurement device according to the present invention comprises: a probe including a light emitting portion that emits measurement light to a subject, and an acoustic wave detection portion that is arranged in parallel to the light emitting portion and detects photoacoustic waves generated in the subject due

to emission of the measurement light; an image generation unit that generates a photoacoustic image on the basis of a photoacoustic wave detection signal output by the acoustic wave detection portion; a region discrimination means for discriminating an artifact generation region and an artifact non-generation region in the photoacoustic image on the basis of at least a positional relationship between the light emitting portion and the acoustic wave detection portion; and a filter means for performing a first filtering process on a first photoacoustic wave detection signal corresponding to a photoacoustic image of the artifact non-generation region discriminated by the region discrimination means among the photoacoustic wave detection signals, and performing a second filtering process on a second photoacoustic wave detection signal corresponding to a photoacoustic image of the artifact generation region discriminated by the region discrimination means among the photoacoustic wave detection signals, wherein the second filtering process includes further reducing the photoacoustic wave detection signal in a frequency range lower than a predetermined frequency as compared with the first filtering process.

[0012] The "photoacoustic wave detection signal", the "first photoacoustic wave detection signal", and the "second photoacoustic wave detection signal" include not only a signal output from an acoustic wave detection unit that detects photoacoustic waves, but also a signal (including digitized data) after such a signal is subjected to any processing.

[0013] Further, the "predetermined frequency" does not mean a certain frequency with a certain value, but means a predetermined frequency. A value thereof can be arbitrarily set.

[0014] In the photoacoustic measurement device of the present invention, it is preferable that the filter means includes a band pass filter that performs a band pass filtering process, and the band pass filtering process as the second filtering process includes setting a cutoff frequency on the low frequency side to be on the higher frequency side as compared with the band pass filtering process as the first filtering process.

[0015] Further, in the photoacoustic measurement device of the present invention, the filter means may include a high pass filter that performs a high pass filtering process, and the high pass filtering process as the second filtering process may include setting a cutoff frequency to be on a higher frequency side as compared with the high pass filtering process as the first filtering process.

[0016] Further, in the photoacoustic measurement device of the present invention, it is preferable that the region discrimination means discriminates the artifact generation region and the artifact non-generation region on the basis of a correspondence table in which a positional relationship between the light emitting portion and the acoustic wave detection portion is associated with a boundary between the artifact generation region and the artifact non-generation region.

[0017] Further, in the photoacoustic measurement de-

vice of the present invention, the region discrimination means may discriminate the artifact generation region and the artifact non-generation region using a calculation equation for calculating a boundary between the artifact generation region and the artifact non-generation region from a positional relationship between the light emitting portion and the acoustic wave detection portion.

[0018] Further, in the photoacoustic measurement device of the present invention, it is preferable that the region discrimination means corrects the discrimination according to a sound speed at a portion of a subject through which the photoacoustic waves propagate.

[0019] Further, in the photoacoustic measurement device of the present invention, it is preferable that the filter means performs a boundary region filtering process different from the first filtering process and the second filtering process on a photoacoustic wave detection signal corresponding to a photoacoustic image of at least one boundary region set in a range including the boundary between the artifact non-generation region and the artifact generation region.

[0020] It is preferable that the boundary region filtering process is an intermediate filtering process between the first filtering process and the second filtering process.

[0021] Further, it is preferable that pass characteristics of the boundary region filtering process are determined according to a subject depth direction position of the boundary region on the basis of pass characteristics of the first filtering process and pass characteristics of the second filtering process.

[0022] Further, it is preferable that the photoacoustic measurement device of the present invention further comprises means for forming an image corresponding to a photoacoustic image of at least one boundary region set in a range including a boundary between the artifact non-generation region and the artifact generation region using a signal obtained by performing weighted adding on the first photoacoustic wave detection signal subjected to the first filtering process and the second photoacoustic wave detection signal subjected to the second filtering process according to a subject depth direction position of the boundary region.

[0023] Meanwhile, a signal processing method of a photoacoustic measurement device according to the present invention is the signal processing method of the photoacoustic measurement device comprising a probe including a light emitting portion that emits measurement light to a subject, and an acoustic wave detection portion that is arranged in parallel to the light emitting portion and detects photoacoustic waves generated in the subject due to emission of the measurement light, and an image generation unit that generates a photoacoustic image on the basis of a photoacoustic wave detection signal output by the acoustic wave detection portion, the signal processing method comprising: discriminating an artifact generation region and an artifact non-generation region in the photoacoustic image on the basis of at least a positional relationship between the light emitting portion and

the acoustic wave detection portion; performing a first filtering process on a first photoacoustic wave detection signal corresponding to a photoacoustic image of the artifact non-generation region among the photoacoustic wave detection signals; performing a second filtering process on a second photoacoustic wave detection signal corresponding to a photoacoustic image of the artifact generation region among the photoacoustic wave detection signals; and further reducing the photoacoustic wave detection signal in a frequency range lower than a predetermined frequency in the second filtering process as compared with the first filtering process.

[0024] In the signal processing method of a photoacoustic measurement device according to the present invention, it is preferable that the filtering process is a band pass filtering process, and the band pass filtering process as the second filtering process includes setting a cutoff frequency on the low frequency side to be on a higher frequency side as compared with the band pass filtering process as the first filtering process.

[0025] Further, in the signal processing method of a photoacoustic measurement device according to the present invention, the filtering process may be a high pass filtering process, and the high pass filtering process as the second filtering process may include setting a cutoff frequency to be on a higher frequency side as compared with the high pass filtering process as the first filtering process.

[0026] Further, in the signal processing method of a photoacoustic measurement device according to the present invention, it is preferable that the artifact generation region and the artifact non-generation region are discriminated on the basis of a correspondence table in which a positional relationship between the light emitting portion and the acoustic wave detection portion is associated with a boundary between the artifact generation region and the artifact non-generation region.

[0027] Alternatively, in the signal processing method of a photoacoustic measurement device according to the present invention, the artifact generation region and the artifact non-generation region may be discriminated using a calculation equation for calculating a boundary between the artifact generation region and the artifact non-generation region from a positional relationship between the light emitting portion and the acoustic wave detection portion.

[0028] Further, in the signal processing method of a photoacoustic measurement device according to the present invention, it is preferable that the discrimination is corrected according to a sound speed at a portion of a subject through which the photoacoustic waves propagate.

[0029] Further, in the signal processing method of a photoacoustic measurement device according to the present invention, it is preferable that a boundary region filtering process different from the first filtering process and the second filtering process is performed on a photoacoustic wave detection signal corresponding to a photoacoustic image of at least one boundary region set in a range including the boundary between the artifact non-generation region and the artifact generation region.

toacoustic image of at least one boundary region set in a range including the boundary between the artifact non-generation region and the artifact generation region.

[0030] It is preferable that the boundary region filtering process is an intermediate filtering process between the first filtering process and the second filtering process.

[0031] It is preferable that pass characteristics of the boundary region filtering process is determined according to a subject depth direction position of the boundary region on the basis of pass characteristics of the first filtering process and pass characteristics of the second filtering process.

[0032] Further, it is preferable that the signal processing method of a photoacoustic measurement device according to the present invention further comprises forming an image corresponding to a photoacoustic image of at least one boundary region set in a range including a boundary between the artifact non-generation region and the artifact generation region using a signal obtained by performing weighted adding on the first photoacoustic wave detection signal subjected to the first filtering process and the second photoacoustic wave detection signal subjected to the second filtering process according to a subject depth direction position of the boundary region.

[0033] Since the photoacoustic measurement device according to the present invention includes a probe including a light emitting portion that emits measurement light to a subject, and an acoustic wave detection portion that is arranged in parallel to the light emitting portion and detects photoacoustic waves generated in the subject due to emission of the measurement light; an image generation unit that generates a photoacoustic image on the basis of a photoacoustic wave detection signal output by the acoustic wave detection portion; a region discrimination means for discriminating an artifact generation region and an artifact non-generation region in the photoacoustic image on the basis of at least a positional relationship between the light emitting portion and the acoustic wave detection portion; and a filter means for performing a first filtering process on a first photoacoustic wave detection signal corresponding to a photoacoustic image of the artifact non-generation region discriminated by the region discrimination means among the photoacoustic wave detection signals, and performs a second filtering process on a second photoacoustic wave detection signal corresponding to a photoacoustic image of the artifact generation region discriminated by the region discrimination means among the photoacoustic wave detection signals, and the second filtering process includes further reducing the photoacoustic wave detection signal in a frequency range lower than a predetermined frequency as compared with the first filtering process, it is possible to accurately reduce or remove artifacts caused by the photoacoustic waves generated at the surface portion of the subject on which the measurement light is incident.

BRIEF DESCRIPTION OF DRAWINGS

[0034]

Fig. 1 is a schematic diagram illustrating an overall configuration of a photoacoustic measurement device according to an embodiment of the present invention.

Fig. 2 is a diagram illustrating generation of a false image.

(A) to (D) of Fig. 3 are diagrams illustrating photoacoustic images in which an artifact region is generated due to photoacoustic waves generated on a subject surface, and (E) and (F) of Fig. 3 are schematic diagrams illustrating a positional relationship between a light emitting portion and a vibrator array in a case where the photoacoustic images of (A) and (D) of Fig. 3 are generated.

Fig. 4 is a graph illustrating an example of a relationship between a distance between the light emitting portion and the vibrator array, and an observable depth.

Fig. 5 is a schematic diagram illustrating an example of pass characteristics of a filter.

Fig. 6 is a schematic diagram illustrating another example of the pass characteristics of a filter.

Fig. 7 is a schematic diagram illustrating yet another example of the pass characteristics of the filter.

Fig. 8 is a schematic diagram illustrating yet another example of the pass characteristics of the filter.

Fig. 9 is a schematic diagram illustrating a boundary region.

Fig. 10 is a schematic diagram illustrating yet another example of the pass characteristics of the filter.

Fig. 11 is a diagram illustrating a distance between a light emitting portion and a vibrator array.

Fig. 12 is a schematic diagram illustrating an overall configuration of a photoacoustic measurement device according to another embodiment of the present invention.

DESCRIPTION OF EMBODIMENTS

[0035] The invention is defined in claim 1 and claim 11. Further aspects and preferred embodiments are defined in the appended claims. Aspects, embodiments and examples of the present disclosure which do not fall under the scope of the appended claims do not form part of the invention and are merely provided for illustrative purposes.

[0036] Hereinafter, embodiments of the present invention will be described in detail with reference to the drawings.

[0037] Fig. 1 is a schematic diagram illustrating an overall configuration of a photoacoustic measurement device 10 according to an embodiment of the present invention. In Fig. 1, a shape of the probe 11 is schematically shown. The photoacoustic measurement device 10

of the embodiment has, for example, a function of generating a photoacoustic image on the basis of a photoacoustic signal. As schematically illustrated in Fig. 1, the photoacoustic measurement device 10 includes a probe 11 configured as an ultrasonic probe, an ultrasonic unit 12, a laser unit 13, a display unit 14, an input unit 15, and the like. These components will be sequentially described below.

[0038] The probe 11 has, for example, a function of emitting measurement light and ultrasonic waves toward a subject M that is a living body, and a function of detecting acoustic waves U propagating in the subject M. That is, the probe 11 can perform emission (transmission) of ultrasonic waves to the subject M, and detection (reception) of reflected ultrasonic waves (reflected acoustic waves) reflected at and returned from the subject M.

[0039] The "acoustic waves" as used herein are a term including ultrasonic waves and photoacoustic waves. Here, the "ultrasonic waves" means elastic waves transmitted by a probe and reflected waves thereof, and the "photoacoustic waves" means elastic waves emitted by the absorber 65 absorbing the measurement light. Further, the acoustic waves emitted from the probe 11 are not limited to the ultrasonic waves, and acoustic waves at an audible frequency may be used as long as an appropriate frequency is selected according to a subject, measurement conditions, or the like. The absorber 65 in the subject M may be, for example, a blood vessel, a metal member, or the like.

[0040] Generally, for the probe 11, a probe corresponding to sector scanning, a probe corresponding to linear scanning, and a probe corresponding to convex scanning, and the like is prepared, and an appropriate probe is selected from among the probes according to an imaging part and is used. Further, an optical fiber 60 serving as a connection unit that guides laser light L which is measurement light emitted from the laser unit 13 described below to a light emitting portion 40 is connected to the probe 11.

[0041] The probe 11 includes a vibrator array 20 which is an acoustic wave detector, a total of two light emitting portions 40 arranged one by one on both sides of the vibrator array 20 with the vibrator array 20 interposed therebetween, and a casing 50 in which, for example, the vibrator array 20 and the two light emitting portions 40 are accommodated.

[0042] In the embodiment, the vibrator array 20 also functions as an ultrasonic wave transmission element. The vibrator array 20 is connected to, for example, a circuit for ultrasonic wave transmission, a circuit for acoustic wave reception via a wire (not illustrated).

[0043] The vibrator array 20 includes a plurality of ultrasonic vibrators which are electroacoustic transducer elements arranged side by side in one direction. The ultrasonic vibrator is, for example, piezoelectric ceramics or a piezoelectric element configured of a polymer film such as polyvinylidene fluoride (PVDF). The ultrasonic vibrator has a function of converting the received acoustic

wave U into an electric signal. The vibrator array 20 may include an acoustic lens.

[0044] As described above, the vibrator array 20 in the embodiment is a vibrator array in which a plurality of ultrasonic vibrators are one-dimensionally arranged, but a vibrator array in which a plurality of ultrasonic vibrators are two-dimensionally arranged may be used.

[0045] The ultrasonic vibrator also has a function of transmitting ultrasonic waves, as described above. That is, in a case where an alternating voltage is applied to the ultrasonic vibrator, the ultrasonic vibrator generates ultrasonic waves at a frequency corresponding to a frequency of the alternating voltage. Transmission and reception of ultrasonic waves may be separated from each other. That is, for example, transmission of the ultrasonic waves may be performed from a position different from the probe 11, and reflected ultrasonic waves with respect to the transmitted ultrasonic waves may be received by the probe 11.

[0046] The light emitting portion 40 is a portion that emits the laser light L guided by the optical fiber 60 toward the subject M. In the embodiment, the light emitting portion 40 is configured by a distal end portion of the optical fiber 60, that is, an end portion far from the laser unit 13 which is a light source for the measurement light. As illustrated in Fig. 1, in this embodiment, two light emitting portions 40 are arranged on both sides, for example, in an elevation direction of the vibrator array 20 with the vibrator array 20 interposed therebetween. In a case where a plurality of ultrasonic vibrators are one-dimensionally arranged, the elevation direction is a direction perpendicular to an arrangement direction of the vibrators and parallel to a detection surface of the vibrator array 20.

[0047] The light emitting portion may include a light guide plate and a diffusion plate optically coupled to a distal end of the optical fiber 60. Such a light guide plate can be configured by, for example, an acrylic plate or a quartz plate. Further, a lens diffusion plate in which microlenses are randomly arranged on a substrate, a quartz plate in which, for example, diffusing fine particles are dispersed, or the like may be used as the diffusion plate. A holographic diffusion plate or an engineering diffusion plate may be used as the lens diffusion plate.

[0048] The laser unit 13 illustrated in Fig. 1 includes, for example, a flash lamp excitation Q-switched solid state laser, such as a Q-switched alexandrite laser, and emits laser light L as measurement light. The laser unit 13 is configured to receive a trigger signal from the control unit 34 of the ultrasonic unit 12 and output the laser light L. It is preferable that the laser unit 13 outputs pulsed laser light L having a pulse width of 1 to 100 nsec (nanoseconds).

[0049] A wavelength of the laser light L is appropriately selected according to light absorption characteristics of the absorber 65 in the subject M that is a measurement target. For example, in a case where the measurement target is hemoglobin in the living body, that is, in a case

where blood vessels are imaged, it is generally preferable that the wavelength is a wavelength belonging to a near infrared wavelength range. The near infrared wavelength range means a wavelength range of about 700 to 850 nm. However, the wavelength of the laser light L is naturally not limited to this. Further, the laser light L may be laser light having a single wavelength or may be laser light including a plurality of wavelengths such as 750 nm and 800 nm, for example. In the case where the laser light L includes the plurality of wavelengths, light including the wavelengths may be emitted at the same time, or may be emitted while being alternatively switched.

[0050] The laser unit 13 may be configured using a second harmonic generation (YAG-SHG)-optical parametric oscillation (OPO) laser capable of similarly outputting laser light in a near infrared wavelength range, or a titanium-sapphire (Ti-Sapphire) laser, or the like, in addition to the above-described alexandrite laser.

[0051] The optical fiber 60 guides the laser light L emitted from the laser unit 13 to the two light emitting portions 40. The optical fiber 60 is not particularly limited, and a known optical fiber such as a quartz fiber can be used. For example, one thick optical fiber may be used, or a bundle fiber in which a plurality of optical fibers are bundled may be used. For example, in a case where the bundle fiber is used, the bundle fiber is arranged so that the laser light L is incident from a light incidence end face of one integrated fiber portion, and a distal portion of each of fiber portions branched in two in the bundle fiber constitutes the light emitting portion 40 as described above.

[0052] The ultrasonic unit 12 includes a reception circuit 21, a reception memory 22, data separation means 23, a photoacoustic image generation unit 24, an ultrasonic image generation unit 29, a display control unit 30, a transmission control circuit 33, and a control unit 34.

[0053] The control unit 34 controls each unit of the photoacoustic measurement device 10, and includes a trigger control circuit (not illustrated) in this embodiment. For example, in a case where a photoacoustic image is acquired, the trigger control circuit sends an optical trigger signal to the laser unit 13. Accordingly, a flash lamp that is an excitation source is lit in the Q-switched solid state laser of the laser unit 13, and excitation of a laser rod is started. While an excitation state of the laser rod is being maintained, the laser unit 13 enters a state in which the laser unit 13 can output the laser light L.

[0054] The control unit 34 then transmits a Q switch trigger signal from the trigger control circuit to the laser unit 13. That is, the control unit 34 controls an output timing of the laser light L from the laser unit 13 using this Q switch trigger signal. The control unit 34 transmits a sampling trigger signal to the reception circuit 21 simultaneously with the transmission of the Q switch trigger signal. This sampling trigger signal specifies a sampling start timing of the photoacoustic signal in an analog to digital converter (AD converter) of the reception circuit 21. Thus, by using the sampling trigger signal, the photoacoustic signal can be sampled in synchronization with

the output of the laser light L.

[0055] In a case where an ultrasonic image is acquired, the control unit 34 transmits an ultrasonic transmission trigger signal to instruct the transmission control circuit 33 to transmit ultrasonic waves. In a case where the transmission control circuit 33 receives the ultrasonic transmission trigger signal, the transmission control circuit 33 causes the probe 11 to transmit the ultrasonic waves. The control unit 34 transmits a sampling trigger signal to the reception circuit 21 at a timing of the ultrasonic transmission to start sampling of a reflected ultrasonic signal.

[0056] In a case where the photoacoustic image or the ultrasonic image described above is acquired, the probe 11 is slightly shifted in position, for example, in the above-described elevation direction with respect to the subject M, and the subject M is scanned by the laser light L or ultrasonic waves. Therefore, sampling of the photoacoustic signal or the reflected ultrasonic signal is performed while shifting acoustic wave detection lines line by line, in synchronization with the scanning. The scanning may be performed by an operator manually moving the probe 11, or may be performed using an automatic scanning mechanism.

[0057] The reception circuit 21 receives the photoacoustic wave detection signal output by the vibrator array 20 of the probe 11 and stores the received detection signal in the reception memory 22. The reception circuit 21 typically includes a low noise amplifier, a variable gain amplifier, a low pass filter, and an AD converter. The photoacoustic wave detection signal output by the probe 11 is amplified by the low noise amplifier, gain adjustment is performed according to the depth in the variable gain amplifier, a high frequency component is cut by the low pass filter, and then, the signal is converted into a digital signal in the AD converter and stored in the reception memory 22. The reception circuit 21 is configured by, for example, one integrated circuit (IC). The cut of the high frequency component in the low pass filter is intended to prevent aliasing noise from being generated at the time of AD conversion. In general, a cutoff frequency is about 10 MHz to 30 MHz, which is about a half of the sampling frequency of the AD conversion.

[0058] In the embodiment, the probe 11 outputs the photoacoustic wave detection signal and a reflected ultrasonic detection signal. Therefore, the reception memory 22 stores a photoacoustic wave detection signal and a reflected ultrasonic detection signal which have been digitized. The data separation means 23 reads the data for a photoacoustic image, that is, the digitized photoacoustic wave detection signal from the reception memory 22, and transmits the digitized photoacoustic wave detection signal to the photoacoustic image generation unit 24. Further, the data separation means 23 reads the data for a reflected ultrasonic image, that is, the digitized reflected ultrasonic detection signal from the reception memory 22, and transmits the digitized reflected ultrasonic detection signal to the ultrasonic image generation

unit 29.

[0059] The photoacoustic image generation unit 24 reconstructs the photoacoustic wave detection signal received from the reception memory 22 to generate a photoacoustic image. Specifically, the photoacoustic image generation unit 24 adds the photoacoustic wave detection signal based on the signal from each ultrasonic vibrator with a delay time according to a position of each ultrasonic vibrator of the vibrator array 20, to generate a photoacoustic wave detection signal for one line (delayed addition method). The photoacoustic image generation unit 24 may perform the reconstruction using a circular back projection (CBP) method instead of the delayed addition method. Alternatively, the photoacoustic image generation unit 24 may perform the reconstruction using a Hough transform method or a Fourier transform method. The reconstructed photoacoustic wave detection signals for a plurality of lines are sent to the display control unit 30 as a signal for displaying the photoacoustic image (tomographic image) through signal processing such as a detection process and a logarithmic conversion process.

[0060] The photoacoustic wave detection signals for a plurality of lines have been subjected to processing such as digitization or reconstruction and are not the photoacoustic wave detection signals themselves output by the vibrator array 20 of the probe 11. However, since the photoacoustic wave detection signals are signals based on the photoacoustic wave detection signal output by the vibrator array 20, the photoacoustic wave detection signals are referred to as "photoacoustic wave detection signals". Further, in the embodiment, the photoacoustic image generation unit 24 performs the above-described filtering process, which will be described in detail below.

[0061] The ultrasonic image generation unit 29 basically performs the same process as that for the photoacoustic wave detection signal on the reflected ultrasonic detection signal stored in the reception memory 22 to generate a reflected ultrasonic detection signal for a plurality of lines indicating the ultrasonic image (tomographic image). The ultrasonic image generation unit 29 outputs the thus generated reflected ultrasonic detection signal to the display control unit 30.

[0062] The display control unit 30 causes the display unit 14 to display the photoacoustic image on the basis of the photoacoustic wave detection signal and an ultrasonic image on the basis of the reflected ultrasonic detection signal. The two images are separately displayed on the display unit 14 or are combined and displayed on the display unit 14 as a combined image. In the latter case, the display control unit 30, for example, superimposes the photoacoustic image and the ultrasonic image and performs image combination. Thus, in a case where the ultrasonic image is generated and displayed in addition to the photoacoustic image, a portion which cannot be formed as an image in the photoacoustic image can be observed in the ultrasonic image.

[0063] Next, preventing the above-described artifact

from being generated in the photoacoustic measurement device 10 having the basic configuration as described above will be described. First, this artifact will be described in detail with reference to Figs. 2 and 3.

[0064] Fig. 2 is a schematic diagram illustrating a state in which photoacoustic waves generated from a blood vessel V that is an example of the absorber 65 illustrated in Fig. 1 and photoacoustic waves generated on a surface of the subject on which the measurement light is incident are detected. Ideally, it is preferable to detect only photoacoustic waves U1 from the blood vessel V in a case where the subject M is irradiated with the measurement light L. However, actually, photoacoustic waves U2 generated at a subject surface portion 44 on which the measurement light L is incident is also detected. This photoacoustic waves U2 cause artifacts (a false image). A time from generation of the photoacoustic waves U2 to detection thereof depends on a distance between the light emitting portion 40 and the vibrator array 20 (or an individual ultrasonic vibrator; the same applies hereinafter) and, more specifically, a distance between an arrival region on an abutment plane of the measurement light L and the acoustic wave detection portion. That is, as the distance between the light emitting portion 40 and the vibrator array 20 increases, a distance by which the photoacoustic waves U2 travels through the subject increases, and therefore, the time from the generation of the photoacoustic waves U2 to the detection thereof increases.

[0065] The "abutment plane" means a plane that passes through a distal end of the probe 11 (that is, an intersection between a probe surface in contact with the subject M and a central axis of the acoustic wave detection portion) and is parallel to a detection surface of the acoustic wave detection portion. Further, the "arrival region" means a region in which the abutment plane and the measurement light L intersect each other.

[0066] A time from generation of the photoacoustic waves U2 to detection thereof affects the range in which the artifact region appears in the photoacoustic image. (A) to (F) of Fig. 3 illustrates states in which sizes of an observation region (artifact non-generation region) R1 and the artifact generation region R2 changes depending on a distance W1 between the light emitting portion 40 and the vibrator array 20. Specifically, (A) to (D) of Fig. 3 are diagrams illustrating photoacoustic images P in which the artifact generation region R2 is generated due to the photoacoustic waves U2 generated on the surface of the subject. Further, (E) and (F) of Figs. 3 are schematic diagrams illustrating a positional relationship between the light emitting portion 40 and the vibrator array 20 in a case where the photoacoustic images P of (A) and (D) of Figs. 3 are generated, respectively.

[0067] It can be seen from Fig. 3 that a boundary B between the artifact non-generation region R1 and the artifact generation region R2 is lowered as the distance W1 between the light emitting portion 40 and the vibrator array 20 increases, that is, the boundary B moves to a

deeper side of the subject M. This is because a vertical direction of the photoacoustic image P corresponds to a time axis, and a time until the signal of the photoacoustic waves U2 is detected is delayed as the distance W1 between the light emitting portion 40 and the vibrator array 20 increases. Fig. 4 illustrates an example of a relationship between the boundary B between the artifact non-generation region R1 and the artifact generation region R2 with respect to a distance W1 between the light emitting portion 40 and the vibrator array 20 described above. A horizontal axis in Fig. 4 is the above-described distance W1, and an "observable depth" on a vertical axis is a depth of the artifact non-generation region R1, that is, a depth position of the boundary B.

[0068] On the basis of the above findings, in the embodiment, as an example, the following filtering process is performed by a band pass filter in the photoacoustic image generation unit 24 of Fig. 1. This filtering process is performed by arithmetic processing on the basis of a previously given program.

[0069] This band pass filtering process is performed on the photoacoustic wave detection signal (first photoacoustic wave detection signal) corresponding to a photoacoustic image of the artifact non-generation region R1 and the photoacoustic wave detection signal (second photoacoustic wave detection signal) corresponding to a photoacoustic image of the artifact generation region R2 among the photoacoustic wave detection signals reconstructed as described above and representing photoacoustic images while changing pass characteristics of the filter. Here, the band pass filtering process for the first photoacoustic wave detection signal is referred to as a first band pass filtering process (a first filtering process in the present invention), and the second band pass filtering process for the second photoacoustic wave detection signal is referred to as a second band pass filtering process (a second filtering process in the present invention).

[0070] Fig. 5 illustrates basic pass characteristics of the band pass filtering process. In Fig. 5, a broken line indicates the pass characteristics in the first band pass filtering process, and a solid line indicates the pass characteristics in the second band pass filtering process. That is, a cutoff frequency fL2 on the low frequency side for the second photoacoustic wave detection signal is set to be on a higher frequency side than a cutoff frequency fL1 on the low frequency side for the first photoacoustic wave detection signal. More specifically, for example, in a case where a detection center frequency of the vibrator array 20 of the probe 11 is 6.5 MHz, the cutoff frequency fL1 on the low frequency side for the first photoacoustic wave detection signal is about 1 MHz, the cutoff frequency fH on the high frequency side for the first photoacoustic wave detection signal is about 10 MHz, the cutoff frequency fL2 on the low frequency side for the second photoacoustic wave detection signal is about 2 MHz, and the cutoff frequency fH on the high frequency side for the second photoacoustic wave detection signal is about 10

MHz.

[0071] As described above, in the embodiment, the second band pass filtering process for the second photoacoustic wave detection signal includes further reducing the photoacoustic wave detection signal in a frequency range lower than a predetermined frequency (2 MHz) as compared with the first band pass filtering process for the first photoacoustic wave detection signal. Here, the "frequency range lower than a predetermined frequency" is not limited to the frequency range lower than 2 MHz, but may be a frequency range having a certain width existing on the lowest frequency side of the photoacoustic wave detection signal, and a numerical value of the "predetermined frequency" may be appropriately set.

[0072] As described above with reference to Fig. 2, since the photoacoustic waves U2 generated in the subject surface portion 44 and causing artifacts are generated from the entire surface portion of the subject M on which the laser light L is incident, a signal obtained by detecting the photoacoustic waves U2 becomes a signal in a relatively low frequency range. Therefore, as described above, in a case where more signal components in the low frequency range of the second photoacoustic wave detection signal are removed as compared with the first photoacoustic wave detection signal, the artifacts are no longer generated or are reduced in the artifact generation region R2 of the photoacoustic image displayed on the display unit 14. On the other hand, in the artifact non-generation region R1, diagnostically significant signal components in a low frequency range of the subject M are not inadvertently removed. Therefore, in the display unit 14, a photoacoustic image with high diagnostic performance as a whole can be displayed. On the other hand, in the technology described in Patent Document 2 described above, diagnostically significant signal components in the low frequency range are likely to be removed.

[0073] It is necessary to know the boundary B between the artifact non-generation region R1 and the artifact generation region R2 in order to discriminate the artifact non-generation region R1 and the artifact generation region R2. As described above with reference to Figs. 3 and 4, the subject depth direction position of the boundary B basically corresponds to the distance W1 between the light emitting portion 40 and the vibrator array 20. Therefore, in the embodiment, a correspondence table between the subject depth direction position of the boundary B for each probe 11 and the distance W1 is stored in the form of a lookup table in an internal memory of the photoacoustic image generation unit 24 illustrated in Fig. 1, and the photoacoustic image generation unit 24 discriminates the boundary B, that is, the artifact non-generation region R1 and the artifact generation region R2 by referring to this lookup table. By doing so, even in a case where a plurality of types of probes 11 are interchangeably attached to the photoacoustic measurement device 10, recognition information of the probe 11 to be used is received from, for example, the input unit 15, and

the artifact non-generation region R1 and the artifact generation region R2 can be correctly discriminated for the probe 11. As is obvious from the above description, in the embodiment, the photoacoustic image generation unit 24 constitutes region discrimination means and filter means in the present invention.

[0074] Here, as the filter means, it is preferable to use filter means in which influence of side lobes is reduced by a window function such as a Hamming window, a Hanning window, a Blackman window, or a Kaiser window.

[0075] A relationship between the subject depth direction position of the boundary B and the distance W1 changes according to sound velocity at an observation part, that is, sound speed at a part of the subject M in which the photoacoustic waves propagate. Therefore, the relationship between the subject depth direction position of the boundary B and the distance W1 in the correspondence table may be corrected according to the sound speed. Through this correction, the subject depth direction position of the boundary B is corrected, that is, the discrimination between the artifact non-generation region R1 and the artifact generation region R2 is corrected.

[0076] The sound velocity may be input from the input unit 15 illustrated in Fig. 1, or a correspondence relationship between the sound velocity and the observation part may be stored in a storage unit (not illustrated), and the sound speed may be recognized by referring to the correspondence relationship from the information on the observation part input from the input unit 15.

[0077] Further, the relationship may be corrected on the basis of at least one of intensity of the laser L that is the measurement light, a pulse width of the laser L, or the presence or absence of an acoustic member on a detection surface of the vibrator array 20, in addition to correcting the relationship between the subject depth direction position of the boundary B and the distance W1 according to the sound speed.

[0078] Further, a calculation equation for calculating the subject depth direction position of the boundary B from the distance W1 may be stored, and the boundary B may be obtained from the distance W1 input from the input unit 15 shown in Fig. 1 using the above calculation equation, instead of obtaining the boundary B from the correspondence table between the subject depth direction position of the boundary B and the distance W1.

[0079] Further, the operator may input information for designating the boundary B from the input unit 15 while confirming the display of the artifact non-generation region R1 and the artifact generation region R2 shown on the display unit 14.

[0080] The information for designating the boundary B may not be information indicating the subject depth direction position of the boundary B itself. For example, the information may be x (a distance from a position of an optical axis at an emitting end of the light emitting portion 40 to a central axis of the vibrator array 20), y (a distance from the position of the optical axis at the emit-

ting end of the light emitting portion 40 to an abutment plane S1), or θ (an angle formed by the abutment plane S1 and an optical axis of the measurement light) as illustrated in Fig. 11. In a case where x , y , and θ are obtained, the distance W1 between the light emitting portion 40 and the vibrator array 20 can be obtained, and the subject depth direction position of the boundary B can also be obtained from the distance W1.

[0081] Further, in a case where the optical axis at the emitting end of the light emitting portion 40 is inclined with respect to the abutment plane, a "distance between the arrival region on the abutment plane of the measurement light and the acoustic wave detection portion" can be defined as follows. For example, in a case where nothing is mounted on the detection surface as illustrated in Fig. 11, an intersection between the detection surface and a central axis of the vibrator array 20 is defined as P1, and a maximum point in a case where an energy profile EP in the arrival region of the measurement light is approximated to a Gaussian distribution is defined as P2. In this case, the point P1 is a distal end of the probe through which the abutment plane passes. A distance W2 between the point P1 and the point P2 can be defined as the "distance between the arrival region and the acoustic wave detection portion".

[0082] Further, in a case where the operator confirms the display of the artifact non-generation region R1 and the artifact generation region R2 determined on the basis of the above-described correspondence table or calculation equation on the display unit 14, and appropriate region division can be considered from that, the operator may input information for designating the boundary B of the region division from the input unit 15 to reset the artifact non-generation region R1 and the artifact generation region R2.

[0083] The signal components in the low frequency range of the first photoacoustic wave detection signal and the second photoacoustic wave detection signal may be removed using a high pass filter, instead of removing the signal components in the low frequency range of the first photoacoustic wave detection signal and the second photoacoustic wave detection signal through the above-described band pass filtering process. Fig. 6 illustrates an example of basic pass characteristics of such a high pass filter. In Fig. 6, a broken line indicates pass characteristics of a first high pass filtering process (a first filtering process in the present invention) for the first photoacoustic wave detection signal, and a solid line indicates pass characteristics of a second high pass filtering process (a second filtering process in the present invention) for the second photoacoustic wave detection signal. That is, in this case, a cutoff frequency f_2 for the second photoacoustic wave detection signal is set to be on a higher frequency side than a cutoff frequency f_1 for the first photoacoustic wave detection signal.

[0084] For example, the cutoff frequency f_1 is about 1 MHz and the cutoff frequency f_2 is about 2 MHz. Thus, in this case, in a case where more signal components in

the low frequency range of the second photoacoustic wave detection signal are removed as compared with the first photoacoustic wave detection signal, basically the same effects as in a case where the band pass filter having the pass characteristics illustrated in Fig. 5 is used can be obtained.

[0085] Further, in a case where the band pass filter is used, a band pass filter having pass characteristics illustrated in Fig. 7 or pass characteristics illustrated in Fig. 8 can also be applied. In these figures, a broken line indicates pass characteristics of the first band pass filtering process for the first photoacoustic wave detection signal, and a solid line indicates pass characteristics of the second band pass filtering process for the second photoacoustic wave detection signal.

[0086] The pass characteristics illustrated in Fig. 7 differs from the pass characteristics illustrated in Fig. 5 in that a cutoff frequency on the low frequency side for the first photoacoustic wave detection signal is between f_{L1} and f_{L2} and continuously changes in a roll-off state. Further, in this case, since more signal components in the low frequency range of the second photoacoustic wave detection signal can be removed as compared with the first photoacoustic wave detection signal, basically the same effects as a case where the band pass filter having the pass characteristics illustrated in Fig. 5 is used can be obtained.

[0087] Although the cutoff frequency on the low frequency side of the first band pass filtering process for the first photoacoustic wave detection signal continuously changes between f_{L1} and f_{L2} in the example illustrated in Fig. 7, this cutoff frequency may change in a stepwise manner between f_{L1} and f_{L2} .

[0088] The pass characteristics illustrated in Fig. 8 is different from the pass characteristics illustrated in Fig. 5 in that a filtering gain for the second photoacoustic wave detection signal is set to be higher than the filtering gain for the first photoacoustic wave detection signal. Further, in this case, since more signal components in the low frequency range of the second photoacoustic wave detection signal can be removed as compared with the first photoacoustic wave detection signal, basically the same effects as the case where the band pass filter having the pass characteristics illustrated in Fig. 5 is used can be obtained. Further, in this case, by removing more signal components in the low frequency range of the second photoacoustic wave detection signal, the amount by which overall signal intensity of the second photoacoustic wave detection signal is reduced can be compensated by increasing the filtering gain for the second photoacoustic wave detection signal as described above.

[0089] As described above, in a case where characteristics of filtering for the photoacoustic wave detection signal corresponding to a photoacoustic image of the artifact non-generation region R1 and characteristics of filtering for the photoacoustic wave detection signal corresponding to a photoacoustic image of the artifact generation region R2 are different from each other, frequency

characteristics of the image easily rapidly changes at the boundary B between the artifact non-generation region R1 and the artifact generation region R2 in the photoacoustic image created and displayed on the basis of the photoacoustic wave detection signal after filtering. Hereinafter, an embodiment in which this abrupt change in the frequency characteristics is suppressed will be described.

[0090] A process to be described below is performed in the photoacoustic image generation unit 24 in Fig. 1, for example. In this embodiment, for example, two boundary regions BR1 and BR2 are set in a range including the boundary B between the artifact non-generation region R1 and the artifact generation region R2 schematically illustrated in Fig. 9. In this example, the boundary region BR1 belongs to the artifact non-generation region R1, and the boundary region BR2 belongs to the artifact generation region R2. In this case, the band pass filtering process is performed on the photoacoustic wave detection signals corresponding to the respective photoacoustic images in the boundary region BR1 and the boundary region BR2 by the band pass filter described above, but the band pass filtering process is a boundary region band pass filtering process which is different from the first band pass filtering process for the first photoacoustic wave detection signal corresponding to the photoacoustic image of the artifact non-generation region R1 and the second band pass filtering process for the second photoacoustic wave detection signal corresponding to the photoacoustic image in the artifact generation region R2.

[0091] Here, the basic pass characteristics in each band pass filtering are illustrated in Fig. 10. In Fig. 10, a broken line indicates pass characteristics for the first photoacoustic wave detection signal, a solid line indicates pass characteristics for the second photoacoustic wave detection signal, a two-dot chain line indicates pass characteristic for the photoacoustic wave detection signal corresponding to the photoacoustic image of the boundary region BR1, and a one-dot chain line indicates pass characteristics for the photoacoustic wave detection signal corresponding to the photoacoustic image of the boundary region BR2.

[0092] As described above, the boundary region band pass filtering process for the photoacoustic wave detection signal corresponding to the photoacoustic image of the boundary region BR1 and the boundary region band pass filtering process for the photoacoustic wave detection signal corresponding to the photoacoustic image of the boundary region BR2 are intermediate processes between a first band pass filtering process for the first photoacoustic wave detection signal corresponding to the photoacoustic image of the artifact non-generation region R1 and a second band pass filtering process for the second photoacoustic wave detection signal corresponding to the photoacoustic image in the artifact generation region R2.

[0093] More specifically, a cutoff frequency $fL3$ (= 1.3 MHz) on the low frequency side which is one of the pass

characteristics of the band filtering process for the boundary region BR1, and a cutoff frequency $fL4$ (= 1.7 MHz) on the low frequency side of the band filtering process for the boundary region BR2 are determined according to the subject depth direction positions of the boundary region BR1 and the boundary region BR2 on the basis of the cutoff frequency $fL1$ (= 1 MHz) on the low frequency side of the first band pass filtering process for the artifact non-generation region R1 and the cutoff frequency $fL2$ (= 2 MHz) on the low frequency side of the second band pass filtering process for the artifact generation region R2.

[0094] As described above, by setting the cutoff frequencies $fL1$ to $fL4$ on the low frequency side of the respective band pass filtering processes, the frequency characteristics of the photoacoustic image do not abruptly change at the boundary B between the artifact non-generation region R1 and the artifact generation region R2. That is, in the photoacoustic image displayed on the display unit 14, the frequency characteristics gradually change at each boundary of the artifact non-generation region R1, the boundary region BR1, the boundary region BR2, and the artifact generation region R2, and diagnostic performance of the photoacoustic image is enhanced.

[0095] Although the two boundary regions BR1 and BR2 are set in the range including the boundary B between the artifact non-generation region R1 and the artifact generation region R2 in the embodiment described above, one or more boundary regions may be set. In a case where only one boundary region is set, an edge of the boundary region may be aligned with the boundary B. The more the boundary regions are set, the smoother the change in the frequency characteristics at the boundary of each region, but a time required for the filtering process correspondingly increases. Therefore, the appropriate number of boundary regions may be set in consideration of both of the respects.

[0096] Next, another embodiment of the present invention in which it is possible to suppress a sudden change in frequency characteristics of the image at the boundary B between the artifact non-generation region R1 and the artifact generation region R2 will be described. A process to be described below is performed in the photoacoustic image generation unit 24 in Fig. 1, for example.

[0097] In this embodiment, at least one boundary region is set in a range including the boundary between the artifact non-generation region R1 and the artifact generation region R2, as illustrated in Fig. 9. In the embodiment, two boundary regions BR1 and BR2 are set, as in the example of Fig. 9. A first band pass filtering process in which the cutoff frequency $fL1$ on the low frequency side is set to 1 MHz is performed on the first photoacoustic wave detection signal corresponding to the photoacoustic image of the artifact non-generation region R1 to obtain a first processed photoacoustic wave detection signal. On the other hand, a second band pass filtering process in which the cutoff frequency $fL2$ on the low frequency side is set to 2 MHz is performed on the second photoa-

coustic wave detection signal corresponding to the photoacoustic image of the artifact generation region R2 to obtain a second processed photoacoustic wave detection signal.

[0098] Weighted addition is performed on the first processed photoacoustic wave detection signal and the second processed photoacoustic wave detection signal according to the subject depth direction position of the boundary region BR1 and the boundary region BR2 to obtain a photoacoustic wave detection signal for the boundary region BR1 and a photoacoustic wave detection signal for the boundary region BR2. In this case, for example, the weighted addition is performed by giving a weighting coefficient of 0.7 to the first processed photoacoustic wave detection signal and a weighting coefficient of 0.3 to the second processed photoacoustic wave detection signal to obtain the photoacoustic wave detection signal for boundary region BR1. Further, for example, the weighted addition is performed by giving a weighting coefficient of 0.3 to the first processed photoacoustic wave detection signal and a weighting coefficient of 0.7 to the second processed photoacoustic wave detection signal to obtain the photoacoustic wave detection signal for boundary region BR2.

[0099] The photoacoustic image of the boundary region BR1 is generated using the photoacoustic wave detection signal for the boundary region BR1 obtained as described above, the photoacoustic image of the boundary region BR2 is generated using the photoacoustic wave detection signal for the boundary region BR2, the photoacoustic image is generated using the first processed photoacoustic wave detection signal for a portion other than the boundary region BR1 of the artifact non-generation region R1, the photoacoustic image is generated using the second processed photoacoustic wave detection signal for a portion other than the boundary region BR2 of the artifact generation region R2, and the photoacoustic images are combined to generate and display one photoacoustic image.

[0100] In the photoacoustic image displayed on the display unit 14 in this way, the frequency characteristics gradually change at each boundary of the artifact non-generation region R1, the boundary region BR1, the boundary region BR2, and the artifact generation region R2, and diagnostic performance of the photoacoustic image is enhanced.

[0101] Further, in the embodiment, since the sudden change in the frequency characteristics is suppressed, the embodiment is superior to the case where the characteristics of the filtering processes for the respective photoacoustic wave detection signals of the artifact non-generation region R1, the artifact generation region R2, the boundary region BR1, and the boundary region BR2 are changed as described above in that a calculation process is light.

[0102] Although the photoacoustic measurement device 10 capable of generating and displaying the reflected ultrasonic image together with the photoacoustic image

has been described above, it is to be understood that the present invention is applied to a photoacoustic measurement device configured to perform only the generation and the display of the photoacoustic image without performing the generation and the display of the reflected ultrasonic image. Fig. 12 illustrates an example of the photoacoustic measurement device 10 configured in this way. The photoacoustic measurement device 10 illustrated in Fig. 12 is of a form in which the data separation means 23, the ultrasonic image generation unit 29, and the transmission control circuit 33 are excluded, unlike the photoacoustic measurement device 10 illustrated in Fig. 1.

15 Explanation of References

[0103]

10: photoacoustic measurement device

11: probe

12: ultrasonic unit

13: laser unit

14: display unit

15: input unit

20: vibrator array

21: reception circuit

22: reception memory

23: data separation means

24: photoacoustic image generation unit

29: ultrasonic image generation unit

30: display control unit

33: transmission control circuit

34: control unit

40: light emitting portion

50: casing

60: optical fiber

65: absorber

B: boundary between artifact non-generation region and artifact generation region

L: laser light (measurement light)

M: subject

R1 : artifact non-generation region

R2: artifact generation region

U: acoustic waves

U1, U2: photoacoustic waves

Claims

50 1. A photoacoustic measurement device comprising:

a probe (11) including a light emitting portion (40) that emits measurement light to a subject, and an acoustic wave detection portion (20) that is arranged in parallel to the light emitting portion and detects photoacoustic waves generated in the subject due to emission of the measurement light; and

an image generation unit (24) that generates a photoacoustic image on the basis of a photoacoustic wave detection signal output by the acoustic wave detection portion (20);

characterized by a region discrimination means (24) for discriminating an artifact generation region (R2) and an artifact non-generation region (R1) in the photoacoustic image on the basis of at least a positional relationship between the light emitting portion (40) and the acoustic wave detection portion (20); and a filter means (24) for performing a first filtering process on a first photoacoustic wave detection signal corresponding to a photoacoustic image of the artifact non-generation region (R1) discriminated by the region discrimination means among the photoacoustic wave detection signals, and performing a second filtering process on a second photoacoustic wave detection signal corresponding to a photoacoustic image of the artifact generation region (R2) discriminated by the region discrimination means among the photoacoustic wave detection signals, wherein the second filtering process includes further reducing the photoacoustic wave detection signal in a frequency range lower than a predetermined frequency as compared with the first filtering process.

2. The photoacoustic measurement device according to claim 1,

wherein the filter means includes a band pass filter that performs a band pass filtering process, and the band pass filtering process as the second filtering process includes setting a cutoff frequency on the low frequency side to be on the higher frequency side as compared with the band pass filtering process as the first filtering process.

3. The photoacoustic measurement device according to claim 1,

wherein the filter means includes a high pass filter that performs a high pass filtering process, and the high pass filtering process as the second filtering process includes setting a cutoff frequency to be on a higher frequency side as compared with the high pass filtering process as the first filtering process.

4. The photoacoustic measurement device according to any one of claims 1 to 3, wherein the region discrimination means discriminates the artifact generation region (R2) and the ar-

tifact non-generation region (R1) on the basis of a correspondence table in which a positional relationship between the light emitting portion (40) and the acoustic wave detection portion (20) is associated with a boundary (B) between the artifact generation region (R2) and the artifact non-generation region (R1).

5. The photoacoustic measurement device according to any one of claims 1 to 3, wherein the region discrimination means discriminates the artifact generation region (R2) and the artifact non-generation region (R1) using a calculation equation for calculating a boundary (B) between the artifact generation region (R2) and the artifact non-generation region (R1) from a positional relationship between the light emitting portion and the acoustic wave detection portion (20).
6. The photoacoustic measurement device according to any one of claims 1 to 5, wherein the region discrimination means corrects the discrimination according to a sound speed at a portion of a subject through which the photoacoustic waves propagate.
7. The photoacoustic measurement device according to any one of claims 1 to 6, wherein the filter means performs a boundary region filtering process different from the first filtering process and the second filtering process on a photoacoustic wave detection signal corresponding to a photoacoustic image of at least one boundary region set in a range including the boundary (B) between the artifact non-generation region (R1) and the artifact generation region (R2).
8. The photoacoustic measurement device according to claim 7, wherein the boundary region filtering process is an intermediate filtering process between the first filtering process and the second filtering process.
9. The photoacoustic measurement device according to claim 8, wherein pass characteristics of the boundary region filtering process is determined according to a subject depth direction position of the boundary region on the basis of pass characteristics of the first filtering process and pass characteristics of the second filtering process.
10. The photoacoustic measurement device according to any one of claims 1 to 6, further comprising: means for forming an image corresponding to a photoacoustic image of at least one boundary region set in a range including a boundary (B) between the artifact non-generation region (R1) and the artifact

generation region (R2) using a signal obtained by performing weighted adding on the first photoacoustic wave detection signal subjected to the first filtering process and the second photoacoustic wave detection signal subjected to the second filtering process according to a subject depth direction position of the boundary region.

11. A signal processing method of a photoacoustic measurement device comprising a probe including a light emitting portion (40) that emits measurement light to a subject, and an acoustic wave detection portion that is arranged in parallel to the light emitting portion and detects photoacoustic waves generated in the subject due to emission of the measurement light, and an image generation unit that generates a photoacoustic image on the basis of a photoacoustic wave detection signal output by the acoustic wave detection portion (20), the signal processing method **characterized by:**

discriminating an artifact generation region (R2) and an artifact non-generation region (R1) in the photoacoustic image on the basis of at least a positional relationship between the light emitting portion and the acoustic wave detection portion (20);

performing a first filtering process on a first photoacoustic wave detection signal corresponding to a photoacoustic image of the artifact non-generation region (R1) among the photoacoustic wave detection signals;

performing a second filtering process on a second photoacoustic wave detection signal corresponding to a photoacoustic image of the artifact generation region (R2) among the photoacoustic wave detection signals; and

further reducing the photoacoustic wave detection signal in a frequency range lower than a predetermined frequency in the second filtering process as compared with the first filtering process.

12. The signal processing method of a photoacoustic measurement device according to claim 11,

wherein the filtering process is a band pass filtering process, and

the band pass filtering process as the second filtering process includes setting a cutoff frequency on the low frequency side to be on a higher frequency side as compared with the band pass filtering process as the first filtering process.

13. The signal processing method of a photoacoustic measurement device according to claim 11,

wherein the filtering process is a high pass filtering process, and

the high pass filtering process as the second filtering process includes setting a cutoff frequency to be on a higher frequency side as compared with the high pass filtering process as the first filtering process.

14. The signal processing method of a photoacoustic measurement device according to any one of claims 11 to 13, wherein the artifact generation region (R2) and the artifact non-generation region (R1) are discriminated on the basis of a correspondence table in which a positional relationship between the light emitting portion and the acoustic wave detection portion is associated with a boundary between the artifact generation region (R2) and the artifact non-generation region (R1).

15. The signal processing method of a photoacoustic measurement device according to any one of claims 11 to 13, wherein the artifact generation region (R2) and the artifact non-generation region (R1) are discriminated using a calculation equation for calculating a boundary (B) between the artifact generation region (R2) and the artifact non-generation region (R1) from a positional relationship between the light emitting portion and the acoustic wave detection portion (20).

16. The signal processing method of a photoacoustic measurement device according to any one of claims 11 to 15, wherein the discrimination is corrected according to a sound speed at a portion of a subject through which the photoacoustic waves propagate.

17. The signal processing method of a photoacoustic measurement device according to any one of claims 11 to 16, wherein a boundary region filtering process different from the first filtering process and the second filtering process is performed on a photoacoustic wave detection signal corresponding to a photoacoustic image of at least one boundary region set in a range including the boundary between the artifact non-generation region and the artifact generation region.

18. The signal processing method of a photoacoustic measurement device according to claim 17, wherein the boundary region filtering process is an intermediate filtering process between the first filtering process and the second filtering process.

19. The signal processing method of a photoacoustic measurement device according to claim 18, wherein pass characteristics of the boundary region

filtering process is determined according to a subject depth direction position of the boundary region on the basis of pass characteristics of the first filtering process and pass characteristics of the second filtering process.

20. The signal processing method of a photoacoustic measurement device according to any one of claims 11 to 16, further comprising:
forming an image corresponding to a photoacoustic image of at least one boundary region set in a range including a boundary between the artifact non-generation region (R1) and the artifact generation region (R2) using a signal obtained by performing weighted adding on the first photoacoustic wave detection signal subjected to the first filtering process and the second photoacoustic wave detection signal subjected to the second filtering process according to a subject depth direction position of the boundary region.

Patentansprüche

1. Photoakustische Messvorrichtung, umfassend:

eine Sonde (11) mit einem Lichtemissionsabschnitt (40), der Messlicht auf ein Subjekt emittiert, und einem akustischen Wellendetektorabschnitt (20), der parallel zu dem Lichtemissionsabschnitt angeordnet ist und photoakustische Wellen detektiert, die in dem Subjekt aufgrund der Emission des Messlichts erzeugt werden; und

eine Bilderzeugungseinheit (24), die auf der Grundlage eines von dem akustischen Wellendetektorabschnitt (20) ausgegebenen photoakustischen Wellendetektorsignals ein photoakustisches Bild erzeugt;

gekennzeichnet durch eine Zonenunterscheidungseinrichtung (24) zum Unterscheiden einer Artefaktentstehungszone (R2) von einer artefaktfreien Zone (R1) in dem akustischen Bild auf der Grundlage von mindestens einer Lagebeziehung zwischen dem Lichtemissionsabschnitt (40) und dem akustischen Wellendetektorabschnitt (20); und

eine Filtereinrichtung (24) zum Ausführen eines ersten Filterprozesses an einem ersten photoakustischen Wellendetektorsignal entsprechend einem photoakustischen Bild in der artefaktfreien Zone (R1), die von der Zonenunterscheidungseinrichtung ermittelt wurde, unter den photoakustischen Wellendetektorsignalen, und zum Ausführen eines zweiten Filterprozesses an einem zweiten photoakustischen Wellendetektorsignal entsprechend einem photoakustischen Bild der Artefaktentstehungszone

(R2), die von der Zonenunterscheidungseinrichtung ermittelt wurde, unter den photoakustischen Wellendetektorsignalen, wobei der zweite Filterprozess weiterhin ein Reduzieren des photoakustischen Wellendetektorsignals in einem Frequenzbereich unterhalb einer vorbestimmten Frequenz im Vergleich zu dem ersten Filterprozess enthält.

2. Vorrichtung nach Anspruch 1, bei der die Filtereinrichtung ein Bandpassfilter enthält, das eine Bandpassfilterung ausführt, und der Bandpassfilterprozess als der zweite Filterprozess das Einstellen einer Eckfrequenz auf der niederfrequenten Seite im Vergleich zu dem Bandpassfilterprozess als erster Filterprozess auf der höherfrequenten Seite enthält.

3. Vorrichtung nach Anspruch 1, bei der die Filtereinrichtung ein Hochpassfilter enthält, das einen Hochpassfilterprozess ausführt, und der Hochpassfilterprozess als der zweite Filterprozess das Einstellen einer Eckfrequenz auf einer höherfrequenten Seite im Vergleich zu dem Hochpassfilterprozess als der erste Filterprozess enthält.

4. Vorrichtung nach einem der Ansprüche 1 bis 3, bei dem der die Zonenunterscheidungseinrichtung die artefakte Entstehungszone (R2) und die artefaktfreie Zone (R1) auf der Grundlage einer Korrespondenztabelle voneinander unterscheiden, in welcher eine Lagebeziehung zwischen dem Lichtemissionsabschnitt (40) und dem akustischen Wellendetektorabschnitt (20) zugeordnet ist zu einer Grenze (B) zwischen der Artefaktentstehungszone (R2) und der artefaktfreien Zone (R1).

5. Vorrichtung nach einem der Ansprüche 1 bis 3, bei der die Zonenunterscheidungseinrichtung die Artefaktentstehungszone (R2) und die artefaktfreie Zone (R1) unter Verwendung einer Berechnungsgleichung unterscheidet, mit der eine Grenze (B) zwischen der Artefaktentstehungszone (R2) und der artefaktfreien Zone (R1) berechnet wird aus einer Lagebeziehung zwischen dem Lichtemissionsabschnitt und dem akustischen Wellendetektor (20).

6. Vorrichtung nach einem der Ansprüche 1 bis 5, bei der die Zonenunterscheidungseinrichtung die Unterscheidung nach Maßgabe einer Schallgeschwindigkeit an einem Teil eines Subjekts, durch den die photoakustischen Wellen sich ausbreiten, korrigiert.

7. Vorrichtung nach einem der Ansprüche 1 bis 6, bei der die Filtereinrichtung einen Grenzzonen-Filterprozess verschieden von dem ersten Filterprozess und dem zweiten Filterprozess an dem photo-

- akustischen Wellendetektorsignal entsprechend einem photoakustischen Bild von mindestens einer Grenzzone ausführt, die in einem Bereich eingerichtet ist, die die Grenze (B) zwischen der artefaktfreien Zone (R1) und der Artefaktentstehungszone (R2) enthält. 5
8. Vorrichtung nach Anspruch 7, bei der der Grenzzonen-Filterprozess ein Zwischenfilterprozess zwischen dem ersten Filterprozess und dem zweiten Filterprozess ist. 10
9. Vorrichtung nach Anspruch 8, bei der eine Durchlasskennlinie des Grenzzonen-Filterprozesses bestimmt wird nach Maßgabe einer Subjekt-Tiefenrichtungsposition der Grenzzone auf der Grundlage der Durchlasskennlinie des ersten Filterprozesses und der Durchlasskennlinie des zweiten Filterprozesses. 15
10. Vorrichtung nach einem der Ansprüche 1 bis 6, weiterhin umfassend: eine Einrichtung zum Erzeugen eines Bilds entsprechend einem photoakustischem Bild von mindestens einer Grenzzone, die in einem Bereich eingerichtet ist, der eine Grenze (B) zwischen der artefaktfreien Zone (R1) und der Artefaktentstehungszone (R2) enthält, unter Verwendung eines Signals, das erhalten wird durch Ausführen einer gewichteten Addierung des ersten photoakustischen Wellendetektorsignals, welches dem ersten Filterprozess unterzogen wurde, und des zweiten photoakustischen Wellendetektorsignals, das dem zweiten Filterprozess unterzogen wurde, abhängig von einer Subjekt-Tiefenrichtungsposition der Grenzzone. 20
11. Signalverarbeitungsverfahren einer photoakustischen Messvorrichtung, die eine Sonde mit einem Lichtemissionsabschnitt (40), der Messlicht auf ein Subjekt emittiert und mit einem akustischen Wellendetektorabschnitt, der parallel zu dem Lichtemissionsabschnitt angeordnet ist, und photoakustische Wellen detektiert, die in dem Subjekt aufgrund der Emission des Messlichts erzeugt werden, und eine Bilderzeugungseinheit enthält, die auf der Grundlage eines von dem akustischen Detektorabschnitt (20) ausgegebenen photoakustischen Wellendetektorsignals ein photoakustisches Bild erzeugt, **gekennzeichnet durch:** 25
- Unterscheiden einer Artefaktentstehungszone (R2) von einer artefaktfreien Zone (R1) in dem photoakustischen Bild auf der Grundlage von mindestens einer Lagebeziehung zwischen dem Lichtemissionsabschnitt und dem akustischen Wellendetektorabschnitt (20); 30
- Ausführen eines ersten Filterprozesses an einem ersten photoakustischen Wellendetektorsignal entsprechend einem photoakustischen Bild der artefaktfreien Zone (R1) unter den photoakustischen Wellendetektorsignalen; 35
- Ausführen eines zweiten Filterprozesses an einem zweiten photoakustischen Wellendetektorsignal entsprechend einem photoakustischen Bild der Artefaktentstehungszone (R2) unter den photoakustischen Wellendetektorsignalen; und 40
- weiteres Reduzieren des photoakustischen Wellendetektorsignals in einem Frequenzbereich unterhalb einer vorbestimmten Frequenz in dem zweiten Filterprozess, verglichen mit dem ersten Filterprozess. 45
12. Verfahren nach Anspruch 11, bei dem der Filterprozess ein Bandpassfilterprozess ist, und der Bandpassfilterprozess als der zweite Filterprozess das Einstellen einer Eckfrequenz auf der niederfrequenten Seite im Vergleich zu dem Bandpassfilterprozess als erster Filterprozess auf einer höherfrequenten Seite enthält. 50
13. Verfahren nach Anspruch 11, bei dem der Filterprozess ein Hochpassfilterprozess ist, und der Hochpassfilterprozess als der zweite Filterprozess das Einstellen einer Eckfrequenz auf einer höherfrequenten Seite im Vergleich zu dem Hochpassfilterprozess als der erste Filterprozess enthält. 55
14. Verfahren nach einem der Ansprüche 11 bis 13, bei dem die Artefaktentstehungszone (R2) und die artefaktfreie Zone (R1) voneinander unterschieden werden auf der Grundlage einer Korrespondenztabelle, in welcher eine Lagebeziehung zwischen dem Lichtemissionsabschnitt und dem akustischen Wellendetektorabschnitt einer Grenze zwischen der Artefaktentstehungszone (R2) und der artefaktfreien Zone (R1) zugeordnet ist.
15. Verfahren nach einem der Ansprüche 11 bis 13, bei dem die Artefaktentstehungszone (R2) und die artefaktfreie Zone (R1) unter Verwendung einer Berechnungsgleichung voneinander unterschieden werden, mit welcher eine Grenze (B) zwischen der Artefaktentstehungszone (R2) und der artefaktfreien Zone (R1) berechnet wird aus einer Lagebeziehung zwischen dem Lichtemissionsabschnitt und dem akustischen Wellendetektorabschnitt (20).
16. Verfahren nach einem der Ansprüche 11 bis 15, bei dem die Unterscheidung nach Maßgabe einer Schallgeschwindigkeit an einem Teil eines Subjekts, durch den sich die photoakustischen Wellen ausbreiten, korrigiert wird.

17. Verfahren nach einem der Ansprüche 11 bis 16, bei dem ein Grenzzonen-Filterprozess verschieden von dem ersten Filterprozess und dem zweiten Filterprozess an einem photoakustischen Wellendetektorsignal entsprechend einem photoakustischen Bild von mindestens einer Grenzzone ausgeführt wird, die in einem Bereich eingerichtet ist, die die Grenze zwischen der artefaktfreien Zone und der Artefaktentstehungszone enthält.
18. Verfahren nach Anspruch 17, bei dem der Grenzzonen-Filterprozess ein Zwischenfilterprozess zwischen dem ersten Filterprozess und dem zweiten Filterprozess ist.
19. Verfahren nach Anspruch 18, bei dem die Durchlasskennlinie des Grenzzonen-Filterprozesses bestimmt wird nach Maßgabe einer Subjekt-Tiefenrichtungsposition der Grenzzone auf der Grundlage der Durchlasskennlinie des ersten Filterprozesses und der Durchlasskennlinie des zweiten Filterprozesses.
20. Verfahren nach einem der Ansprüche 11 bis 16, weiterhin umfassend:
Erzeugen eines Bilds entsprechend einem photoakustischen Bild von mindestens einer Grenzzone, die eingerichtet ist in einem Bereich, der eine Grenze zwischen der artefaktfreien Zone (R1) und der Artefaktentstehungszone (R2) enthält, unter Verwendung eines Signals, das erhalten wird durch Ausführen einer gewichteten Addition an dem ersten photoakustischen Wellendetektorsignal, das dem ersten Filterprozess unterzogen wurde, und dem zweiten photoakustischen Wellendetektorsignal, das dem zweiten Filterprozess unterzogen wurde, abhängig von einer Subjekt-Tiefenrichtungsposition der Grenzzone.

Revendications

1. Dispositif de mesure photoacoustique, comprenant :

une sonde (11) incluant une portion d'émission lumineuse (40), laquelle émet une lumière de mesure vers un sujet, et une portion de détection d'onde acoustique (20), laquelle est agencée parallèlement à la portion d'émission lumineuse et détecte des ondes photoacoustiques générées dans le sujet suite à l'émission de la lumière de mesure, et
une unité de génération d'image (24), laquelle génère une image photoacoustique sur la base d'un signal de détection d'onde photoacoustique produit par la portion de détection d'onde acoustique (20) ;
caractérisé par un moyen de discrimination de région (24) pour discriminer une région de gé-

nération d'artéfact (R2) et une région sans génération d'artéfact (R1) dans l'image photoacoustique sur la base d'au moins une relation de position entre la portion d'émission lumineuse (40) et la portion de détection d'onde acoustique (20), et
un moyen formant filtre (24) pour réaliser un premier processus de filtrage sur un premier signal de détection d'onde photoacoustique correspondant à une image photoacoustique de la région sans génération d'artéfact (R1) discriminée par le moyen de discrimination de région parmi les signaux de détection d'onde photoacoustique, et réaliser un second processus de filtrage sur un second signal de détection d'onde photoacoustique correspondant à une image photoacoustique de la région de génération d'artéfact (R2) discriminée par le moyen de discrimination de région parmi les signaux de détection d'onde photoacoustique, dans lequel le second processus de filtrage inclut en outre la réduction du signal de détection d'onde photoacoustique dans une bande de fréquences inférieure à une bande de fréquences prédéterminée en comparaison avec le premier processus de filtrage.

2. Dispositif de mesure photoacoustique selon la revendication 1, dans lequel le moyen formant filtre inclut un filtre passe-bande, lequel réalise un processus de filtrage passe-bande, et le processus de filtrage passe-bande comme second processus de filtrage inclut le réglage d'une fréquence de coupure sur le côté basse fréquence de manière à ce que celle-ci soit sur le côté de fréquence plus haute par comparaison avec le processus de filtrage passe-bande comme premier processus de filtrage.
3. Dispositif de mesure photoacoustique selon la revendication 1, dans lequel le moyen formant filtre inclut un filtre passe-haut, lequel réalise un processus de filtrage passe-haut, et le processus de filtrage passe-haut comme second processus de filtrage inclut le réglage d'une fréquence de coupure sur un côté de fréquence plus haute par comparaison avec le processus de filtrage passe-haut comme premier processus de filtrage.
4. Dispositif de mesure photoacoustique selon l'une quelconque des revendications 1 à 3, dans lequel le moyen de discrimination de région discrimine la région de génération d'artéfact (R2) et la région sans génération d'artéfact (R1) sur la base d'une table de correspondance où une relation de position entre la portion d'émission lumineuse (40)

et la portion de détection d'onde acoustique (20) est associée à une frontière (B) entre la région de génération d'artéfact (R2) et la région sans génération d'artéfact (R1).

5. Dispositif de mesure photoacoustique selon l'une quelconque des revendications 1 à 3, dans lequel le moyen de discrimination de région discrimine la région de génération d'artéfact (R2) et la région sans génération d'artéfact (R1) à l'aide d'une équation de calcul pour calculer une frontière (B) entre la région de génération d'artéfact (R2) et la région sans génération d'artéfact (R1) à partir d'une relation de position entre la portion d'émission lumineuse et la portion de détection d'onde acoustique (20). 5
6. Dispositif de mesure photoacoustique selon l'une quelconque des revendications 1 à 5, dans lequel le moyen de discrimination de région corrige la discrimination conformément à une vitesse du son sur une portion d'un sujet à travers lequel les ondes photoacoustiques se propagent. 10
7. Dispositif de mesure photoacoustique selon l'une quelconque des revendications 1 à 6, dans lequel le moyen formant filtre réalise un processus de filtrage de région frontière, différent du premier processus de filtrage et du second processus de filtrage, sur un signal de détection d'onde photoacoustique correspondant à une image photoacoustique d'au moins une région frontière réglée dans une plage incluant la frontière (B) entre la région sans génération d'artéfact (R1) et la région de génération d'artéfact (R2). 15
8. Dispositif de mesure photoacoustique selon la revendication 7, dans lequel le processus de filtrage de région frontière est un processus de filtrage intermédiaire entre le premier processus de filtrage et le second processus de filtrage. 20
9. Dispositif de mesure photoacoustique selon la revendication 8, dans lequel des caractéristiques passantes du processus de filtrage de région frontière sont déterminées conformément à une position de direction de profondeur de sujet de la région frontière sur la base de caractéristiques passantes du premier processus de filtrage et de caractéristiques passantes du second processus de filtrage. 25
10. Dispositif de mesure photoacoustique selon l'une quelconque des revendications 1 à 6, comprenant en outre : un moyen pour former une image correspondant à une image photoacoustique d'au moins une région 30

frontière réglée dans une plage incluant au moins une frontière (B) entre la région sans génération d'artéfact (R1) et la région de génération d'artéfact (R2) à l'aide d'un signal obtenu en réalisant une addition pondérée sur le premier signal de détection d'onde photoacoustique soumis au premier processus de filtrage et du second signal de détection d'onde photoacoustique soumis au second processus de filtrage conformément à une position de direction de profondeur de sujet de la région frontière. 35

11. Procédé de traitement de signaux d'un dispositif de mesure photoacoustique comprenant une sonde incluant une portion d'émission lumineuse (40), laquelle émet une lumière de mesure vers un sujet, et une portion de détection d'onde acoustique, laquelle est agencée parallèlement à la portion d'émission lumineuse et détecte des ondes photoacoustiques générées dans le sujet suite à l'émission de la lumière de mesure, et une unité de génération d'image, laquelle génère une image photoacoustique sur la base d'un signal de détection d'onde photoacoustique produit par la portion de détection d'onde acoustique (20), le procédé de traitement de signaux étant **caractérisé par** les étapes consistant à : 40

discriminer une région de génération d'artéfact (R2) et une région sans génération d'artéfact (R1) dans l'image photoacoustique sur la base d'au moins une relation de position entre la portion d'émission lumineuse et la portion de détection d'onde acoustique (20) ;
réaliser un premier processus de filtrage sur un premier signal de détection d'onde photoacoustique correspondant à une image photoacoustique de la région sans génération d'artéfact (R1) parmi les signaux de détection d'onde photoacoustique ;
réaliser un second processus de filtrage sur un second signal de détection d'onde photoacoustique correspondant à une image photoacoustique de la région de génération d'artéfact (R2) parmi les signaux de détection d'onde photoacoustique, et
réduire davantage le signal de détection d'onde photoacoustique dans une bande de fréquences inférieure à une fréquence prédéterminée dans le second processus de filtrage en comparaison avec le premier processus de filtrage. 45

12. Procédé de traitement de signaux d'un dispositif de mesure photoacoustique selon la revendication 11, dans lequel le processus de filtrage est un processus de filtrage passe-bande, et le processus de filtrage passe-bande comme second processus de filtrage inclut le réglage d'une fréquence de coupure sur le côté basse fréquence de manière à ce que celle-ci soit sur le côté de fré- 50

quence plus haute par comparaison avec le processus de filtrage passe-bande comme premier processus de filtrage.

13. Procédé de traitement de signaux d'un dispositif de mesure photoacoustique selon la revendication 11, dans lequel le processus de filtrage est un processus de filtrage passe-haut, et le processus de filtrage passe-haut comme second processus de filtrage inclut le réglage d'une fréquence de coupure sur un côté de fréquence plus haute par comparaison avec le processus de filtrage passe-haut comme premier processus de filtrage. 5
14. Procédé de traitement de signaux d'un dispositif de mesure photoacoustique selon l'une quelconque des revendications 11 à 13, dans lequel la région de génération d'artéfact (R2) et la région sans génération d'artéfact (R1) sont discriminées sur la base d'une table de correspondance où une relation de position entre la portion d'émission lumineuse et la portion de détection d'onde acoustique est associée à une frontière entre la région de génération d'artéfact (R2) et la région sans génération d'artéfact (R1). 10 20 25
15. Procédé de traitement de signaux d'un dispositif de mesure photoacoustique selon l'une quelconque des revendications 11 à 13, dans lequel la région de génération d'artéfact (R2) et la région sans génération d'artéfact (R1) sont discriminées à l'aide d'une équation de calcul pour calculer une frontière (B) entre la région de génération d'artéfact (R2) et la région sans génération d'artéfact (R1) à partir d'une relation de position entre la portion d'émission lumineuse et la portion de détection d'onde acoustique (20). 30 35
16. Procédé de traitement de signaux d'un dispositif de mesure photoacoustique selon l'une quelconque des revendications 11 à 15, dans lequel la discrimination est corrigée conformément à une vitesse du son sur une portion d'un sujet à travers lequel les ondes photoacoustiques se propagent. 40 45
17. Procédé de traitement de signaux d'un dispositif de mesure photoacoustique selon l'une quelconque des revendications 11 à 16, dans lequel un processus de filtrage de région frontière, différent du premier processus de filtrage et du second processus de filtrage, est réalisé sur un signal de détection d'onde photoacoustique correspondant à une image photoacoustique d'au moins une région frontière réglée dans une plage incluant la frontière entre la région sans génération d'artéfact et la région de génération d'artéfact. 50 55

18. Procédé de traitement de signaux d'un dispositif de mesure photoacoustique selon la revendication 17, dans lequel le processus de filtrage de région frontière est un processus de filtrage intermédiaire entre le premier processus de filtrage et le second processus de filtrage.

19. Procédé de traitement de signaux d'un dispositif de mesure photoacoustique selon la revendication 18, dans lequel des caractéristiques passantes du processus de filtrage de région frontière sont déterminées conformément à une position de direction de profondeur de sujet de la région frontière sur la base de caractéristiques passantes du premier processus de filtrage et de caractéristiques passantes du second processus de filtrage.

20. Procédé de traitement de signaux d'un dispositif de mesure photoacoustique selon l'une quelconque des revendications 11 à 16, comprenant en outre l'étape consistant à : former une image correspondant à une image photoacoustique d'au moins une région frontière réglée dans une plage incluant au moins une frontière entre la région sans génération d'artéfact (R1) et la région de génération d'artéfact (R2) à l'aide d'un signal obtenu en réalisant une addition pondérée sur le premier signal de détection d'onde photoacoustique soumis au premier processus de filtrage et du second signal de détection d'onde photoacoustique soumis au second processus de filtrage conformément à une position de direction de profondeur de sujet de la région frontière.

FIG. 1

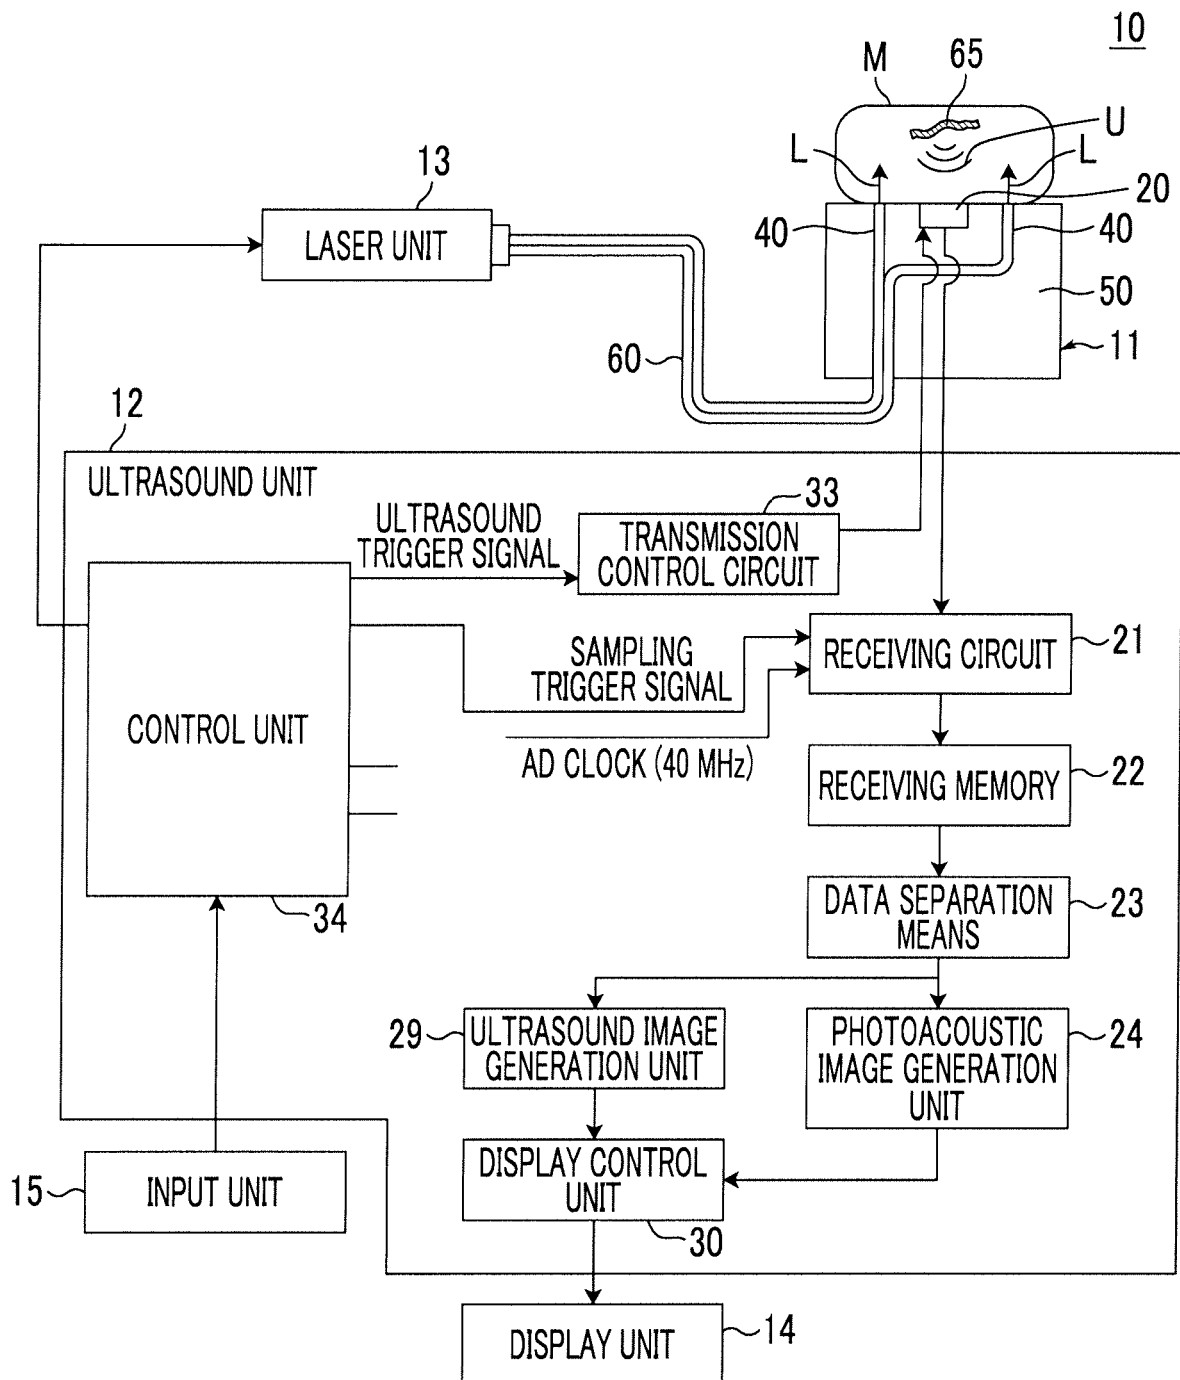


FIG. 2

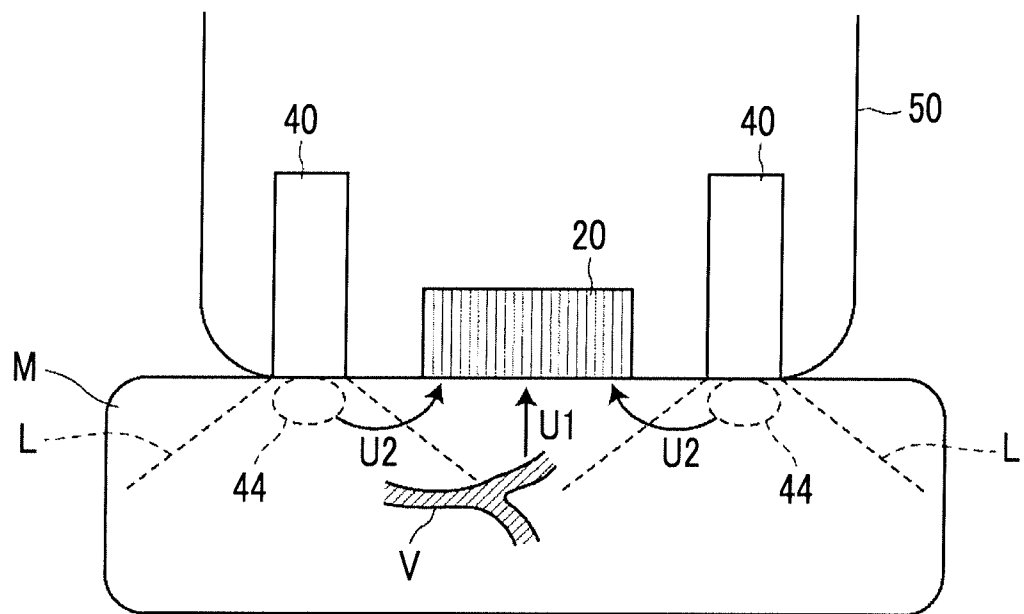


FIG. 3

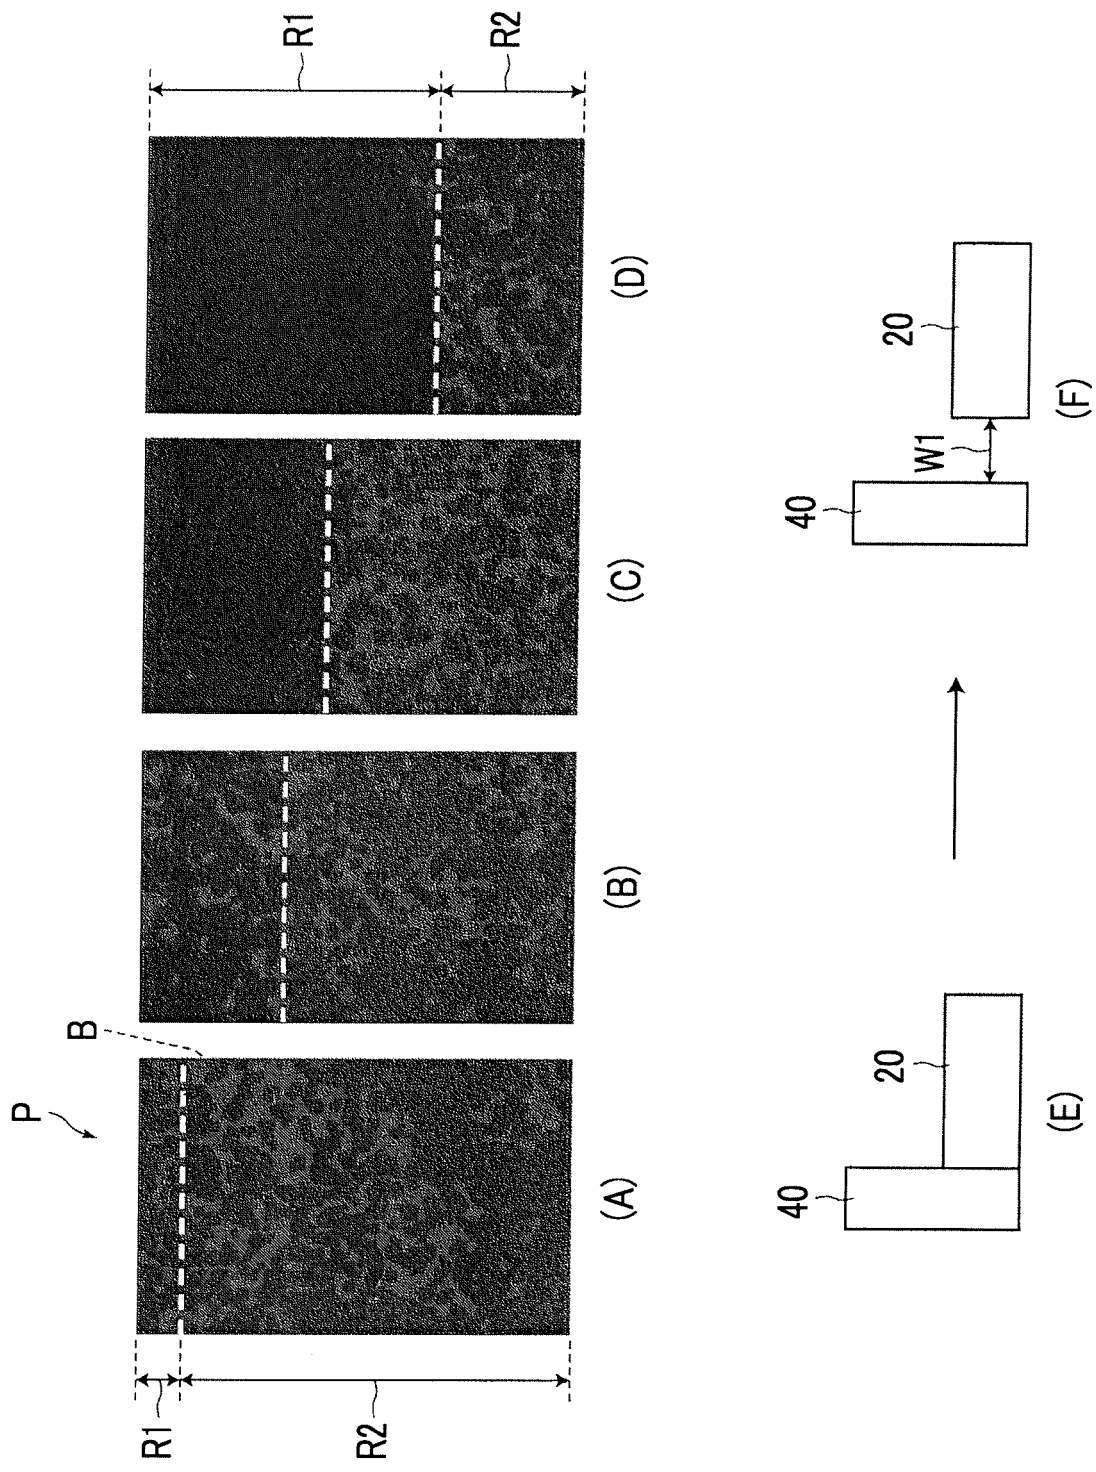


FIG. 4

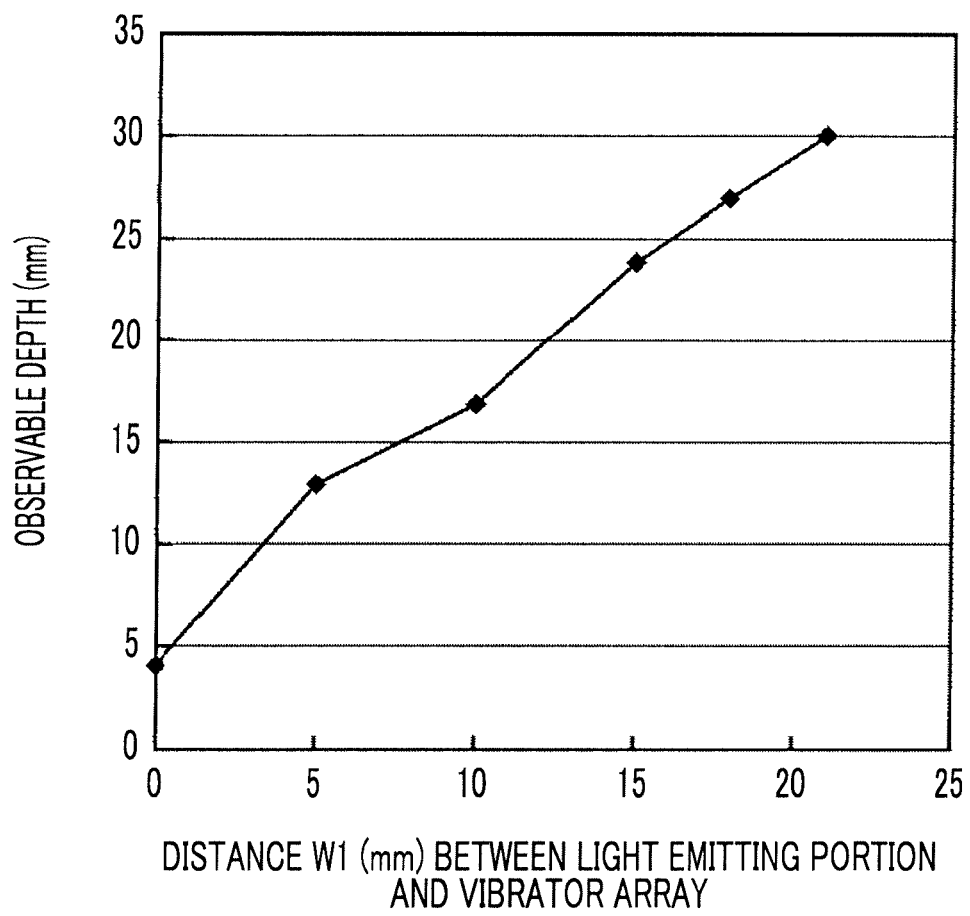


FIG. 5

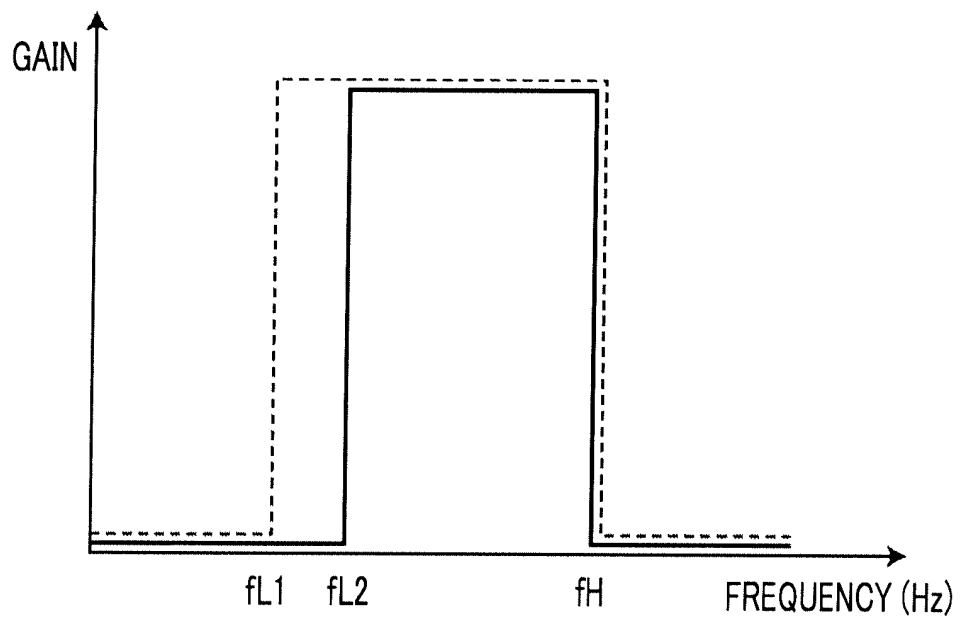


FIG. 6

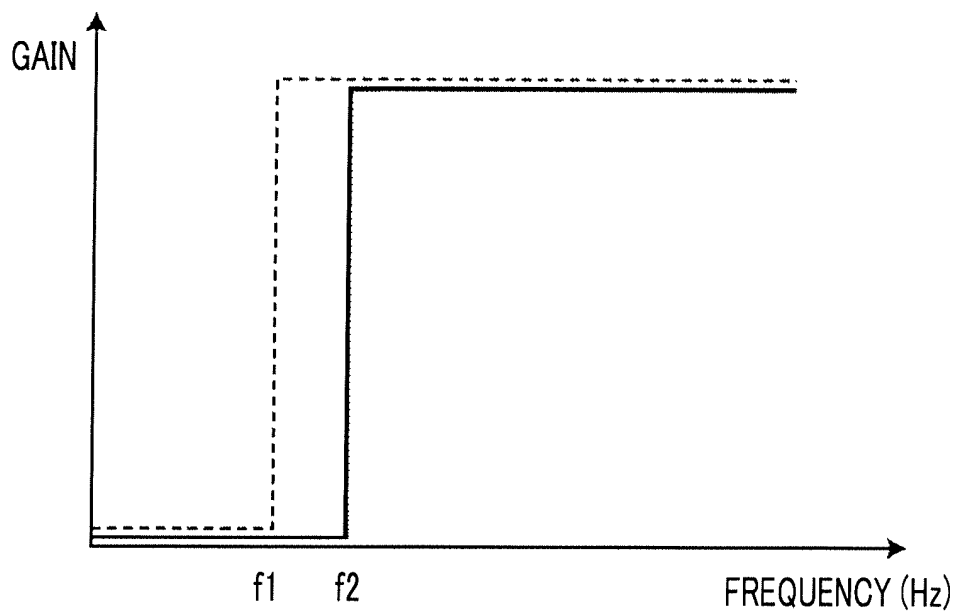


FIG. 7

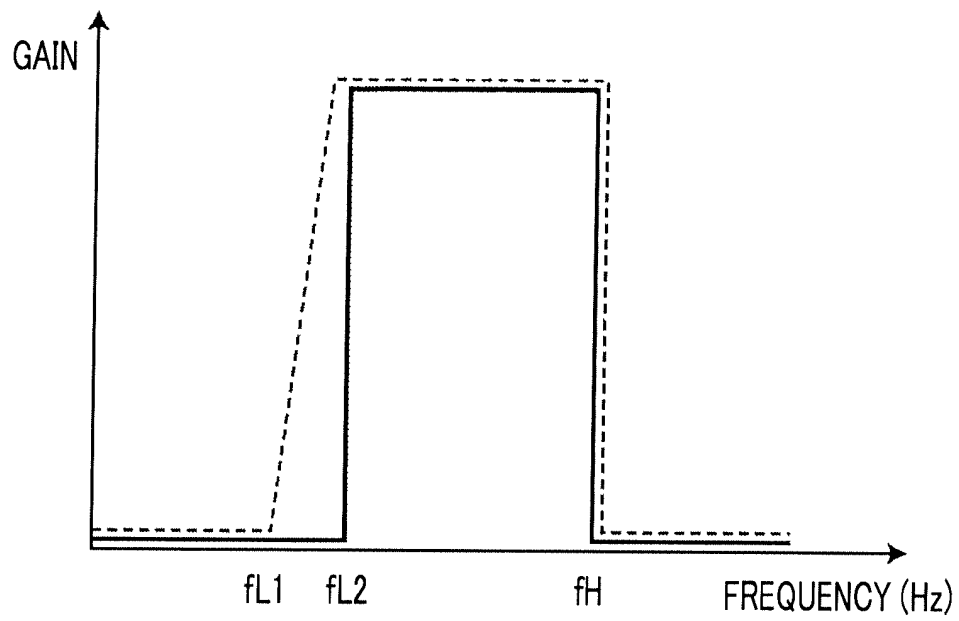


FIG. 8

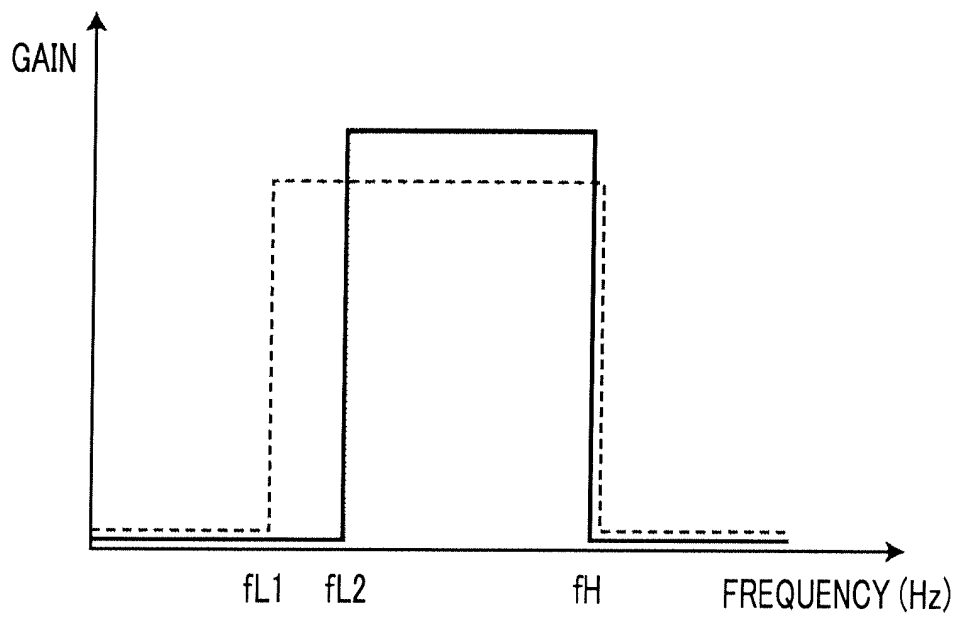


FIG. 9

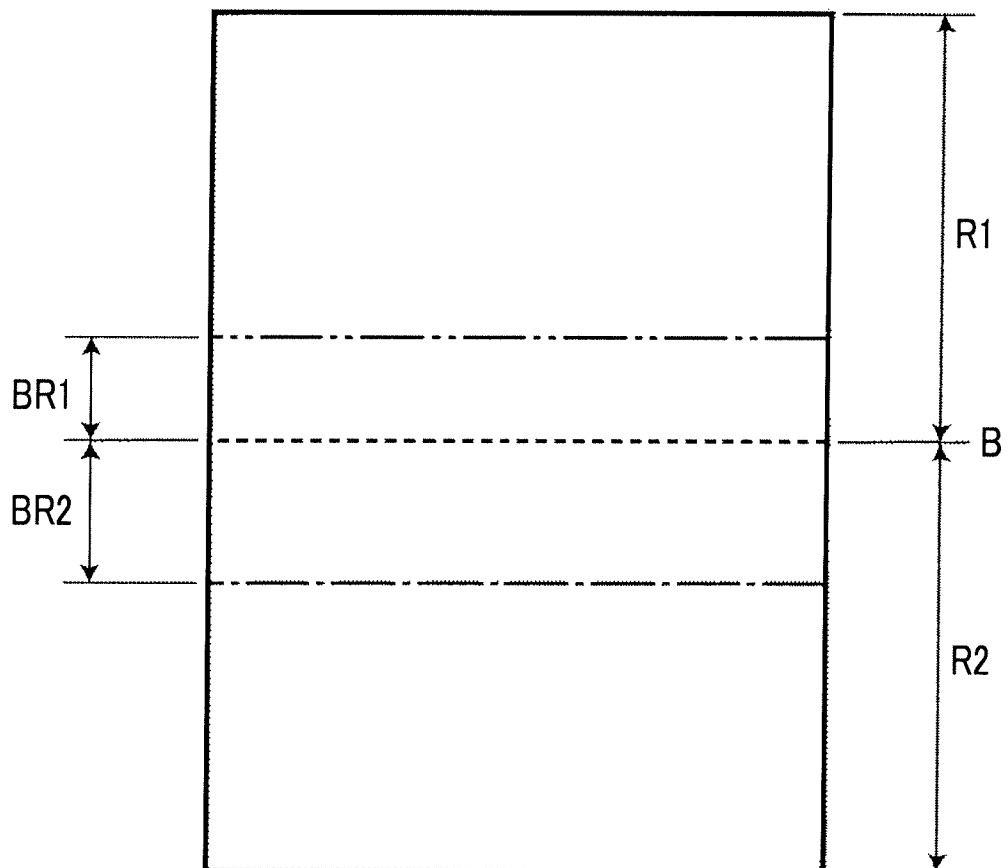


FIG. 10

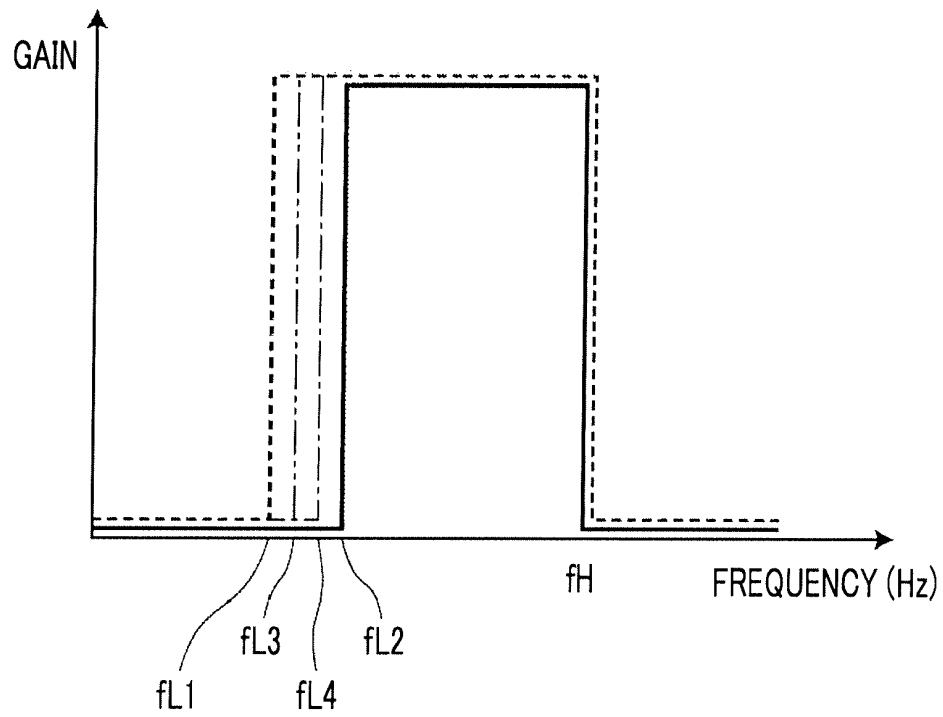


FIG. 11


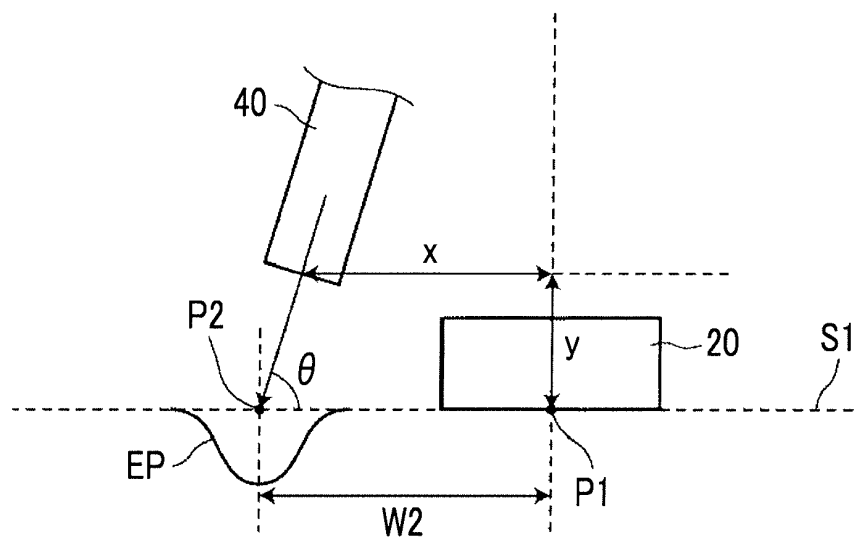


FIG. 12

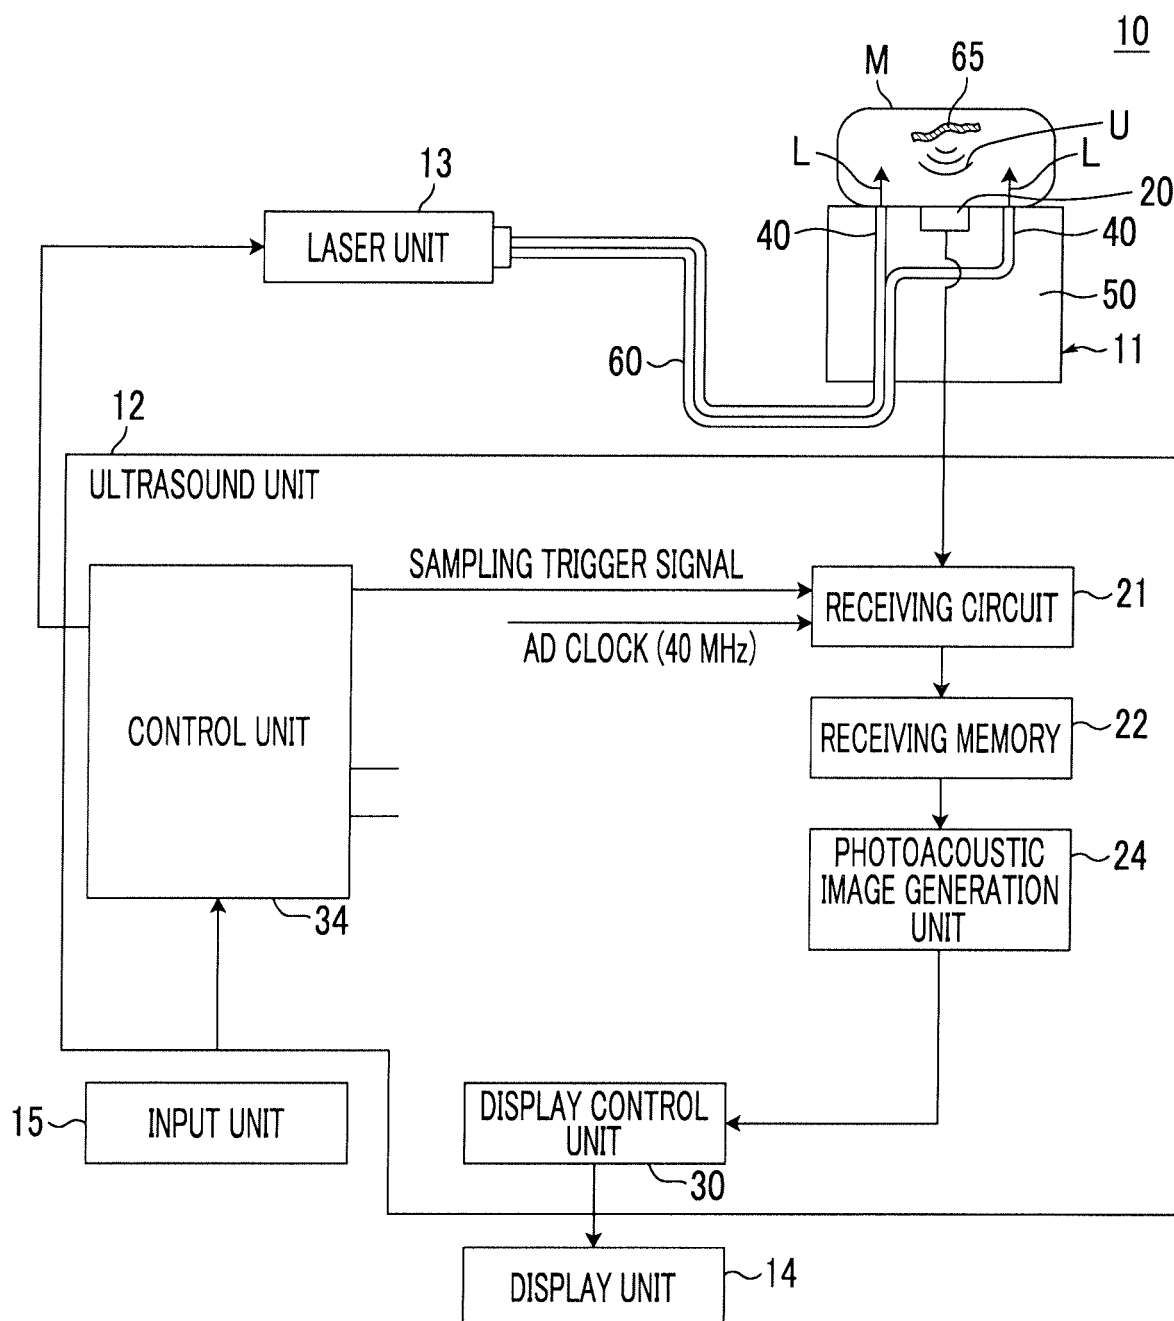

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2013158531 A [0005]
- JP 2015519183 A [0005]
- JP 2013005957 A [0005]

专利名称(译)	光声测量装置和光声测量装置的信号处理方法		
公开(公告)号	EP3357430B1	公开(公告)日	2019-09-18
申请号	EP2016850642	申请日	2016-09-21
[标]申请(专利权)人(译)	富士胶片株式会社		
申请(专利权)人(译)	富士胶片株式会社		
当前申请(专利权)人(译)	富士胶片株式会社		
[标]发明人	HASHIMOTO ATSUSHI IRISAWA KAKU OSAWA ATSUSHI INOUE TOMOKI		
发明人	HASHIMOTO, ATSUSHI IRISAWA, KAKU OSAWA, ATSUSHI INOUE, TOMOKI		
IPC分类号	A61B8/13 A61B5/00		
优先权	2015191727 2015-09-29 JP		
其他公开文献	EP3357430A4 EP3357430A1		
外部链接	Espacenet		

摘要(译)

获得了一种能够减少由在测量光入射的被检体的表面部分处产生的光声波引起的伪影的光声测量装置及其信号处理方法。光声测量装置(10)包括区域辨别装置(24)，该区域辨别装置(24)基于发光部(40)和声波之间的位置关系来辨别光声图像中的伪影产生区域和伪影非产生区域。检测部分(20)和滤波装置(24)，用于对与伪像非生成区域的光声图像相对应的第一光声波检测信号进行第一滤波处理，并对第二光声波检测信号进行第二滤波处理对应于伪像生成区域的光声图像。与第一滤波处理相比，第二滤波处理包括进一步在低于预定频率的频率范围内减小光声波检测信号。

FIG. 1

