

(19)



(11)

EP 2 337 016 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

10.01.2018 Bulletin 2018/02

(51) Int Cl.:

G09G 5/00 ^(2006.01)	G09G 5/08 ^(2006.01)
G06F 3/01 ^(2006.01)	G06F 3/0346 ^(2013.01)
H04N 5/44 ^(2011.01)	H04N 21/422 ^(2011.01)
A61B 5/1171 ^(2016.01)	A61B 5/117 ^(2016.01)
A61B 5/00 ^(2006.01)	A61B 5/11 ^(2006.01)
G06F 21/32 ^(2013.01)	G06K 9/00 ^(2006.01)

(21) Application number: **10014911.1**

(22) Date of filing: **02.05.2005**

(54) **Free space pointing devices with tilt compensation and improved usability**

Freiraum-Zeigeeinrichtungen mit Neigungskompensation und verbesserter Benutzbarkeit

Dispositifs de pointage d'espace libre comprenant une compensation d'inclinaison et une facilité d'emploi améliorée

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **30.04.2004 US 566444 P**

23.09.2004 US 612571 P

05.01.2005 US 641410 P

(43) Date of publication of application:

22.06.2011 Bulletin 2011/25

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:

05744089.3 / 1 741 088

(73) Proprietor: **IDHL Holdings, Inc.**
Wilmington, DE 19809 (US)

(72) Inventor: **Liberty, Matthew**
Potomac, MD 20854 (US)

(74) Representative: **Diehl & Partner GbR**
Patentanwälte
Erika-Mann-Strasse 9
80636 München (DE)

(56) References cited:

US-A- 5 453 758 US-A- 5 598 187
US-A1- 2003 107 551

EP 2 337 016 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**BACKGROUND**

5 **[0001]** The present invention relates generally to handheld, pointing devices and, more specifically to free space pointing devices and techniques for tilt compensation and improved usability associated therewith.

[0002] Technologies associated with the communication of information have evolved rapidly over the last several decades. Television, cellular telephony, the Internet and optical communication techniques (to name just a few things) combine to inundate consumers with available information and entertainment options. Taking television as an example, 10 the last three decades have seen the introduction of cable television service, satellite television service, pay-per-view movies and video-on-demand. Whereas television viewers of the 1960s could typically receive perhaps four or five over-the-air TV channels on their television sets, today's TV watchers have the opportunity to select from hundreds, thousands, and potentially millions of channels of shows and information. Video-on-demand technology, currently used primarily in hotels and the like, provides the potential for in-home entertainment selection from among thousands of movie titles.

15 **[0003]** The technological ability to provide so much information and content to end users provides both opportunities and challenges to system designers and service providers. One challenge is that while end users typically prefer having more choices rather than fewer, this preference is counterweighted by their desire that the selection process be both fast and simple. Unfortunately, the development of the systems and interfaces by which end users access media items has resulted in selection processes which are neither fast nor simple. Consider again the example of television programs.

20 When television was in its infancy, determining which program to watch was a relatively simple process primarily due to the small number of choices. One would consult a printed guide which was formatted, for example, as series of columns and rows which showed the correspondence between (1) nearby television channels, (2) programs being transmitted on those channels and (3) date and time. The television was tuned to the desired channel by adjusting a tuner knob and the viewer watched the selected program. Later, remote control devices were introduced that permitted 25 viewers to tune the television from a distance. This addition to the user-television interface created the phenomenon known as "channel surfing" whereby a viewer could rapidly view short segments being broadcast on a number of channels to quickly learn what programs were available at any given time.

[0004] Despite the fact that the number of channels and amount of viewable content has dramatically increased, the generally available user interface, control device options and frameworks for televisions has not changed much over 30 the last 30 years. Printed guides are still the most prevalent mechanism for conveying programming information. The multiple button remote control with up and down arrows is still the most prevalent channel/content selection mechanism. The reaction of those who design and implement the TV user interface to the increase in available media content has been a straightforward extension of the existing selection procedures and interface objects. Thus, the number of rows in the printed guides has been increased to accommodate more channels. The number of buttons on the remote control devices has been increased to support additional functionality and content handling, e.g., as shown in Figure 1. However, 35 this approach has significantly increased both the time required for a viewer to review the available information and the complexity of actions required to implement a selection. Arguably, the cumbersome nature of the existing interface has hampered commercial implementation of some services, e.g., video-on-demand, since consumers are resistant to new services that will add complexity to an interface that they view as already too slow and complex.

40 **[0005]** In addition to increases in bandwidth and content, the user interface bottleneck problem is being exacerbated by the aggregation of technologies. Consumers are reacting positively to having the option of buying integrated systems rather than a number of segregable components. An example of this trend is the combination television/VCR/DVD in which three previously independent components are frequently sold today as an integrated unit. This trend is likely to continue, potentially with an end result that most if not all of the communication devices currently found in the household 45 will be packaged together as an integrated unit, e.g., a television/VCR/DVD/internet access/radio/stereo unit. Even those who continue to buy separate components will likely desire seamless control of, and interworking between, the separate components. With this increased aggregation comes the potential for more complexity in the user interface. For example, when so-called "universal" remote units were introduced, e.g., to combine the functionality of TV remote units and VCR remote units, the number of buttons on these universal remote units was typically more than the number of buttons on either the TV remote unit or VCR remote unit individually. This added number of buttons and functionality makes it very 50 difficult to control anything but the simplest aspects of a TV or VCR without hunting for exactly the right button on the remote. Many times, these universal remotes do not provide enough buttons to access many levels of control or features unique to certain TVs. In these cases, the original device remote unit is still needed, and the original hassle of handling multiple remotes remains due to user interface issues arising from the complexity of aggregation. Some remote units have addressed this problem by adding "soft" buttons that can be programmed with the expert commands. These soft 55 buttons sometimes have accompanying LCD displays to indicate their action. These too have the flaw that they are difficult to use without looking away from the TV to the remote control. Yet another flaw in these remote units is the use of modes in an attempt to reduce the number of buttons. In these "moded" universal remote units, a special button exists

to select whether the remote should communicate with the TV, DVD player, cable set-top box, VCR, etc. This causes many usability issues including sending commands to the wrong device, forcing the user to look at the remote to make sure that it is in the right mode, and it does not provide any simplification to the integration of multiple devices. The most advanced of these universal remote units provide some integration by allowing the user to program sequences of commands to multiple devices into the remote. This is such a difficult task that many users hire professional installers to program their universal remote units.

[0006] Some attempts have also been made to modernize the screen interface between end users and media systems. However, these attempts typically suffer from, among other drawbacks, an inability to easily scale between large collections of media items and small collections of media items. For example, interfaces which rely on lists of items may work well for small collections of media items, but are tedious to browse for large collections of media items. Interfaces which rely on hierarchical navigation (e.g., tree structures) may be speedier to traverse than list interfaces for large collections of media items, but are not readily adaptable to small collections of media items. Additionally, users tend to lose interest in selection processes wherein the user has to move through three or more layers in a tree structure. For all of these cases, current remote units make this selection process even more tedious by forcing the user to repeatedly depress the up and down buttons to navigate the list or hierarchies. When selection skipping controls are available such as page up and page down, the user usually has to look at the remote to find these special buttons or be trained to know that they even exist. Accordingly, organizing frameworks, techniques and systems which simplify the control and screen interface between users and media systems as well as accelerate the selection process, while at the same time permitting service providers to take advantage of the increases in available bandwidth to end user equipment by facilitating the supply of a large number of media items and new services to the user have been proposed in U.S. Patent Application Serial No. 10/768,432, filed on January 30, 2004, entitled "A Control Framework with a Zoomable Graphical User Interface for Organizing, Selecting and Launching Media Items".

[0007] Of particular interest for this specification are the remote devices usable to interact with such frameworks, as well as other applications and systems. As mentioned in the above-cited application, various different types of remote devices can be used with such frameworks including, for example, trackballs, "mouse"-type pointing devices, light pens, etc. However, another category of remote devices which can be used with such frameworks (and other applications) is free space pointing devices. The phrase "free space pointing" is used in this specification to refer to the ability of an input device to move in three (or more) dimensions in the air in front of, e.g., a display screen, and the corresponding ability of the user interface to translate those motions directly into user interface commands, e.g., movement of a cursor on the display screen. The transfer of data between the free space pointing device and another device may be performed wirelessly or via a wire connecting the free space pointing device to the other device. Thus "free space pointing" differs from, e.g., conventional computer mouse pointing techniques which use a surface, e.g., a desk surface or mousepad, as a proxy surface from which relative movement of the mouse is translated into cursor movement on the computer display screen. An example of a free space pointing device can be found in U.S. Patent No. 5,440,326.

[0008] The '326 patent describes, among other things, a vertical gyroscope adapted for use as a pointing device for controlling the position of a cursor on the display of a computer. A motor at the core of the gyroscope is suspended by two pairs of orthogonal gimbals from a hand-held controller device and nominally oriented with its spin axis vertical by a pendulous device. Electro-optical shaft angle encoders sense the orientation of a hand-held controller device as it is manipulated by a user and the resulting electrical output is converted into a format usable by a computer to control the movement of a cursor on the screen of the computer display.

[0009] However, the freedom of use associated with free-space pointers creates additional challenges. For example, since there is generally no proxy surface on which a free space pointing device rests, the orientation of the handheld control device may vary considerably from user to user or even use to use. If a free space pointing device is used to, for example, control the movement of a cursor displayed on a screen, then some mapping is performed between the detected movement of the handheld device and the movement of the cursor on the screen.

[0010] One technique for performing this mapping is to use the body frame of the device as the frame of reference for mapping detected motion of the free space pointing device into intended motion of the cursor. The term "body frame" refers to a set of axes associated with the body of the object being moved as described in more detail below. Using the body frame of reference to perform the mapping, however, has certain drawbacks. For example, it requires the user to hold the device in a certain orientation in order to obtain the cursor movement he or she desires. For example, if the user holds the device on its side and moves the device left to right, the cursor will move vertically, not horizontally, on the screen.

[0011] US 5,598,187 discloses a handheld pointing device having first and second motion detectors for sensing horizontal and vertical movements of the device, which are translated into movements of a cursor on a screen. The device further includes a rotational sensor for detecting undesired rotations when a user unconsciously twists his wrist in the course of moving the device. The detected linear movement is corrected based on this detected rotation.

Summary

[0012] It is an object of the present invention to provide a handheld pointing device and a method for operating a free space pointing device in which e.g. a movement of a cursor on a screen controlled by the device conforms better with the expectations of the user.

[0013] This object is achieved by the subject-matter of the appended independent claims. Advantageous embodiments of the invention are defined in the appended dependent claims. Systems and methods according to the present invention include free space pointing devices which enhance usability by transforming sensed motion data from a body frame of reference (associated with the body of the free space pointing device) into a user's or inertial frame of reference, wherein effects associated with a tilt orientation relative to gravity in which the free space pointing device is held by a user are removed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The accompanying drawings illustrate exemplary embodiments of the present invention, wherein:

FIG. 1 depicts a conventional remote control unit for an entertainment system;

FIG. 2 depicts an exemplary media system in which exemplary embodiments of the present invention can be implemented;

FIG. 3 shows a free space pointing device according to an exemplary embodiment of the present invention;

FIG. 4 illustrates a cutaway view of the free space pointing device in FIG. 3 including two rotational sensors and one accelerometer;

FIG. 5 is a block diagram illustrating processing of data associated with free space pointing devices according to an exemplary embodiment of the present invention;

FIGS. 6(a) -6(d) illustrate the effects of tilt;

FIG. 7 depicts a hardware architecture of a free space pointing device according to an exemplary embodiment of the present invention;

FIG. 8 is a state diagram depicting a stationary detection mechanism according to an exemplary embodiment of the present invention;

FIG. 9 is a block diagram illustrating transformation of sensed motion data from a first frame of reference into a second frame of reference according to an exemplary embodiment of the present invention; and

FIG. 10 graphically illustrates the transformation of sensed motion data from a first frame of reference into a second frame of reference according to an exemplary embodiment of the present invention.

DETAILED DESCRIPTION

[0015] The following detailed description of the invention refers to the accompanying drawings. The same reference numbers in different drawings identify the same or similar elements. Also, the following detailed description does not limit the invention. Instead, the scope of the invention is defined by the appended claims.

[0016] In order to provide some context for this discussion, an exemplary aggregated media system 200 in which the present invention can be implemented will first be described with respect to Figure 2. Those skilled in the art will appreciate, however, that the present invention is not restricted to implementation in this type of media system and that more or fewer components can be included therein. Therein, an input/output (I/O) bus 210 connects the system components in the media system 200 together. The I/O bus 210 represents any of a number of different mechanisms and techniques for routing signals between the media system components. For example, the I/O bus 210 may include an appropriate number of independent audio "patch" cables that route audio signals, coaxial cables that route video signals, two-wire serial lines or infrared or radio frequency transceivers that route control signals, optical fiber or any other routing mechanisms that route other types of signals.

[0017] In this exemplary embodiment, the media system 200 includes a television/monitor 212, a video cassette recorder (VCR) 214, digital video disk (DVD) recorder/playback device 216, audio/video tuner 218 and compact disk player 220 coupled to the I/O bus 210. The VCR 214, DVD 216 and compact disk player 220 may be single disk or single cassette devices, or alternatively may be multiple disk or multiple cassette devices. They may be independent units or integrated together. In addition, the media system 200 includes a microphone/speaker system 222, video camera 224 and a wireless I/O control device 226. According to exemplary embodiments of the present invention, the wireless I/O control device 226 is a free space pointing device according to one of the exemplary embodiments described below. The wireless I/O control device 226 can communicate with the entertainment system 200 using, e.g., an IR or RF transmitter or transceiver. Alternatively, the I/O control device can be connected to the entertainment system 200 via a wire.

[0018] The entertainment system 200 also includes a system controller 228. According to one exemplary embodiment of the present invention, the system controller 228 operates to store and display entertainment system data available from a plurality of entertainment system data sources and to control a wide variety of features associated with each of the system components. As shown in Figure 2, system controller 228 is coupled, either directly or indirectly, to each of the system components, as necessary, through I/O bus 210. In one exemplary embodiment, in addition to or in place of I/O bus 210, system controller 228 is configured with a wireless communication transmitter (or transceiver), which is capable of communicating with the system components via IR signals or RF signals. Regardless of the control medium, the system controller 228 is configured to control the media components of the media system 200 via a graphical user interface described below.

[0019] As further illustrated in Figure 2, media system 200 may be configured to receive media items from various media sources and service providers. In this exemplary embodiment, media system 200 receives media input from and, optionally, sends information to, any or all of the following sources: cable broadcast 230, satellite broadcast 232 (e.g., via a satellite dish), very high frequency (VHF) or ultra high frequency (UHF) radio frequency communication of the broadcast television networks 234 (e.g., via an aerial antenna), telephone network 236 and cable modem 238 (or another source of Internet content). Those skilled in the art will appreciate that the media components and media sources illustrated and described with respect to Figure 2 are purely exemplary and that media system 200 may include more or fewer of both. For example, other types of inputs to the system include AM/FM radio and satellite radio.

[0020] More details regarding this exemplary entertainment system and frameworks associated therewith can be found in the above-cited U.S. Patent Application "A Control Framework with a Zoomable Graphical User Interface for Organizing, Selecting and Launching Media Items". Alternatively, remote devices in accordance with the present invention can be used in conjunction with other systems, for example computer systems including, e.g., a display, a processor and a memory system or with various other systems and applications.

[0021] As mentioned in the Background section, remote devices which operate as free space pointers are of particular interest for the present specification. Such devices enable the translation of movement, e.g., gestures, into commands to a user interface. An exemplary free space pointing device 400 is depicted in Figure 3. Therein, user movement of the free space pointing device can be defined, for example, in terms of a combination of x-axis attitude (roll), y-axis elevation (pitch) and/or z-axis heading (yaw) motion of the free space pointing device 400. In addition, some exemplary embodiments of the present invention can also measure linear movement of the free space pointing device 400 along the x, y, and z axes to generate cursor movement or other user interface commands. In the exemplary embodiment of Figure 3, the free space pointing device 400 includes two buttons 402 and 404 as well as a scroll wheel 406, although other exemplary embodiments will include other physical configurations. According to exemplary embodiments of the present invention, it is anticipated that free space pointing devices 400 will be held by a user in front of a display 408 and that motion of the free space pointing device 400 will be translated by the free space pointing device into output which is usable to interact with the information displayed on display 408, e.g., to move the cursor 410 on the display 408. For example, rotation of the free space pointing device 400 about the y-axis can be sensed by the free space pointing device 400 and translated into an output usable by the system to move cursor 410 along the y_2 axis of the display 408. Likewise, rotation of the free space pointing device 408 about the z-axis can be sensed by the free space pointing device 400 and translated into an output usable by the system to move cursor 410 along the x_2 axis of the display 408. It will be appreciated that the output of free space pointing device 400 can be used to interact with the display 408 in a number of ways other than (or in addition to) cursor movement, for example it can control cursor fading, volume or media transport (play, pause, fast-forward and rewind). Input commands may include operations in addition to cursor movement, for example, a zoom in or zoom out on a particular region of a display. A cursor may or may not be visible. Similarly, rotation of the free space pointing device 400 sensed about the x-axis of free space pointing device 400 can be used in addition to, or as an alternative to, y-axis and/or z-axis rotation to provide input to a user interface.

[0022] According to one exemplary embodiment of the present invention, two rotational sensors 502 and 504 and one accelerometer 506 can be employed as sensors in free space pointing device 400 as shown in Figure 4. The rotational sensors 502 and 504 can, for example, be implemented using ADXRS150 or ADXRS401 sensors made by Analog Devices. It will be appreciated by those skilled in the art that other types of rotational sensors can be employed as rotational sensors 502 and 504 and that the ADXRS150 and ADXRS401 are purely used as an illustrative example. Unlike traditional gyroscopes, the ADXRS150 rotational sensors use MEMS technology to provide a resonating mass which is attached to a frame so that it can resonate only along one direction. The resonating mass is displaced when the body to which the sensor is affixed is rotated around the sensor's sensing axis. This displacement can be measured using the Coriolis acceleration effect to determine an angular velocity associated with rotation along the sensing axis. If the rotational sensors 502 and 504 have a single sensing axis (as for example the ADXRS150s), then they can be mounted in the free space pointing device 400 such that their sensing axes are aligned with the rotations to be measured. For this exemplary embodiment of the present invention, this means that rotational sensor 504 is mounted such that its sensing axis is parallel to the y-axis and that rotational sensor 502 is mounted such that its sensing axis is parallel to the z-axis as shown in Figure 4. Note, however, that aligning the sensing axes of the rotational sensors 502 and 504

parallel to the desired measurement axes is not required since exemplary embodiments of the present invention also provide techniques for compensating for offset between axes.

[0023] One challenge faced in implementing exemplary free space pointing devices 400 in accordance with the present invention is to employ components, e.g., rotational sensors 502 and 504, which are not too costly, while at the same time providing a high degree of correlation between movement of the free space pointing device 400, a user's expectation regarding how the user interface will react to that particular movement of the free space pointing device and actual user interface performance in response to that movement. For example, if the free space pointing device 400 is not moving, the user will likely expect that the cursor ought not to be drifting across the screen. Likewise, if the user rotates the free space pointing device 400 purely around the y-axis, she or he would likely not expect to see the resulting cursor movement on display 408 contain any significant x_2 axis component. To achieve these, and other, aspects of exemplary embodiments of the present invention, various measurements and calculations are performed by the handheld device 400 which are used to adjust the outputs of one or more of the sensors 502, 504 and 506 and/or as part of the input used by a processor to determine an appropriate output for the user interface based on the outputs of the sensors 502, 504 and 506. These measurements and calculations are used to compensate for factors which fall broadly into two categories: (1) factors which are intrinsic to the free space pointing device 400, e.g., errors associated with the particular sensors 502, 504 and 506 used in the device 400 or the way in which the sensors are mounted in the device 400 and (2) factors which are not intrinsic to the free space pointing device 400, but are instead associated with the manner in which a user is using the free space pointing device 400, e.g., linear acceleration, tilt and tremor. Exemplary techniques for handling each of these effects are described below.

[0024] A process model 600 which describes the general operation of free space pointing devices according to exemplary embodiments of the present invention is illustrated in Figure 5. The rotational sensors 502 and 504, as well as the accelerometer 506, produce analog signals which are sampled periodically, e.g., 200 samples/second. For the purposes of this discussion, a set of these inputs shall be referred to using the notation $(x, y, z, \alpha_y, \alpha_z)$, wherein x, y, z are the sampled output values of the exemplary three-axis accelerometer 506 which are associated with acceleration of the free space pointing device in the x-axis, y-axis and z-axis directions, respectively, α_y is the sampled output value from rotational sensor 502 associated with the rotation of the free space pointing device about the y-axis and α_z is the sampled output value from rotational sensor 504 associated with rotation of the free space pointing device 400 about the z-axis.

[0025] The output from the accelerometer 506 is provided and, if the accelerometer 506 provides analog output, then the output is sampled and digitized by an A/D converter (not shown) to generate sampled accelerometer output 602. The sampled output values are converted from raw units to units of acceleration, e.g., gravities (g), as indicated by conversion function 604. The acceleration calibration block 606 provides the values used for the conversion function 604. This calibration of the accelerometer output 602 can include, for example, compensation for one or more of scale, offset and axis misalignment error associated with the accelerometer 506. Exemplary conversions for the accelerometer data can be performed using the following equation:

$$A = S * ((M-P) .* G(T)) \quad (1)$$

wherein M is a 3×1 column vector composed of the sampled output values (x, y, z) , P is a 3×1 column vector of sensor offsets, and S is a 3×3 matrix that contains both scale, axis misalignment, and sensor rotation compensation. $G(T)$ is a gain factor that is a function of temperature. The "*" operator represents matrix multiplication and the ".*" operator represents element multiplication. The exemplary accelerometer 506 has an exemplary full range of $\pm 2g$. Sensor offset, P , refers to the sensor output, M , for an accelerometer measurement of $0g$. Scale refers to the conversion factor between the sampled unit value and g . The actual scale of any given accelerometer sensor may deviate from these nominal scale values due to, e.g., manufacturing variances. Accordingly the scale factor in the equations above will be proportional to this deviation.

[0026] Accelerometer 506 scale and offset deviations can be measured by, for example, applying $1g$ of force along one axis and measuring the result, $R1$. Then a $-1g$ force is applied resulting in measurement $R2$. The individual axis scale, s , and the individual axis offset, p , can be computed as follows:

$$s = (R1 - R2) / 2 \quad (2)$$

$$p = (R1 + R2) / 2 \quad (3)$$

In this simple case, P is the column vector of the p for each axis, and S is the diagonal matrix of the 1/s for each axis.

[0027] However, in addition to scale and offset, readings generated by accelerometer 506 may also suffer from cross-axes effects. Cross-axes effects include non-aligned axes, e.g., wherein one or more of the sensing axes of the accelerometer 506 as it is mounted in the free space pointing device 400 are not aligned with the corresponding axis in the inertial frame of reference, or mechanical errors associated with the machining of the accelerometer 506 itself, e.g., wherein even though the axes are properly aligned, a purely y-axis acceleration force may result in a sensor reading along the z-axis of the accelerometer 506. Both of these effects can also be measured and added to the calibration performed by function 606.

[0028] The accelerometer 506 serves several purposes in exemplary free space pointing devices according to exemplary embodiments of the present invention. For example, if rotational sensors 502 and 504 are implemented using the exemplary Coriolis effect rotational sensors described above, then the output of the rotational sensors 502 and 504 will vary based on the linear acceleration experienced by each rotational sensor. Thus, one exemplary use of the accelerometer 506 is to compensate for fluctuations in the readings generated by the rotational sensors 502 and 504 which are caused by variances in linear acceleration. This can be accomplished by multiplying the converted accelerometer readings by a gain matrix 610 and subtracting (or adding) the results from (or to) the corresponding sampled rotational sensor data 612. For example, the sampled rotational data αy from rotational sensor 502 can be compensated for linear acceleration at block 614 as:

$$\alpha y' = \alpha y - C * A \quad (4)$$

wherein C is the 1x3 row vector of rotational sensor susceptibility to linear acceleration along each axis given in units/g and A is the calibrated linear acceleration. Similarly, linear acceleration compensation for the sampled rotational data αz from rotational sensor 504 can be provided at block 614. The gain matrices, C, vary between rotational sensors due to manufacturing differences. C may be computed using the average value for many rotational sensors, or it may be custom computed for each rotational sensor.

[0029] Like the accelerometer data, the sampled rotational data 612 is then converted from a sampled unit value into a value associated with a rate of angular rotation, e.g., radians/s, at function 616. This conversion step can also include calibration provided by function 618 to compensate the sampled rotational data for, e.g., scale and offset. Conversion/calibration for both αy and αz can be accomplished using, for example, the following equation:

$$\alpha \text{ rad/s} = (\alpha' - \text{offset}(T)) * \text{scale} + \text{dOffset} \quad (5)$$

wherein α' refers to the value being converted/calibrated, $\text{offset}(T)$ refers to an offset value associated with temperature, scale refers to the conversion factor between the sampled unit value and rad/s, and dOffset refers to a dynamic offset value. Equation (5) may be implemented as a matrix equation in which case all variables are vectors except for scale. In matrix equation form, scale corrects for axis misalignment and rotational offset factors. Each of these variables is discussed in more detail below.

[0030] The offset values $\text{offset}(T)$ and dOffset can be determined in a number of different ways. When the free space pointing device 400 is not being rotated in, for example, the y-axis direction, the sensor 502 should output its offset value. However, the offset can be highly affected by temperature, so this offset value will likely vary. Offset temperature calibration may be performed at the factory, in which case the value(s) for $\text{offset}(T)$ can be preprogrammed into the handheld device 400 or, alternatively, offset temperature calibration may also be learned dynamically during the lifetime of the device. To accomplish dynamic offset compensation, an input from a temperature sensor 619 is used in rotation calibration function 618 to compute the current value for $\text{offset}(T)$. The $\text{offset}(T)$ parameter removes the majority of offset bias from the sensor readings. However, negating nearly all cursor drift at zero movement can be useful for producing a high-performance pointing device. Therefore, the additional factor dOffset, can be computed dynamically while the free space pointing device 400 is in use. The stationary detection function 608 determines when the handheld is most likely stationary and when the offset should be recomputed. Exemplary techniques for implementing stationary detection function 608, as well as other uses therefore, are described below.

[0031] An exemplary implementation of dOffset computation employs calibrated sensor outputs which are low-pass filtered. The stationary output detection function 608 provides an indication to rotation calibration function 618 to trigger computation of, for example, the mean of the low-pass filter output. The stationary output detection function 608 can also control when the newly computed mean is factored into the existing value for dOffset. Those skilled in the art will recognize that a multitude of different techniques can be used for computing the new value for dOffset from the existing value of dOffset and the new mean including, but not limited to, simple averaging, low-pass filtering and Kalman filtering.

Additionally, those skilled in the art will recognize that numerous variations for offset compensation of the rotational sensors 502 and 504 can be employed. For example, the offset(T) function can have a constant value (e.g., invariant with temperature), more than two offset compensation values can be used and/or only a single offset value can be computed/used for offset compensation.

[0032] After conversion/calibration at block 616, the inputs from the rotational sensors 502 and 504 can be further processed to rotate those inputs into an inertial frame of reference, i.e., to compensate for tilt associated with the manner in which the user is holding the free space pointing device 400, at function 620. Tilt correction is another significant aspect of some exemplary embodiments of the present invention as it is intended to compensate for differences in usage patterns of free space pointing devices according to the present invention. More specifically, tilt correction according to exemplary embodiments of the present invention is intended to compensate for the fact that users will hold pointing devices in their hands at different x-axis rotational positions, but that the sensing axes of the rotational sensors 502 and 504 in the free space pointing devices 400 are fixed. It is desirable that cursor translation across display 408 is substantially insensitive to the way in which the user grips the free space pointing device 400, e.g., rotating the free space pointing device 400 back and forth in a manner generally corresponding to the horizontal dimension (x_2 -axis) of the display 408 should result in cursor translation along the x_2 -axis, while rotating the free space pointing device up and down in a manner generally corresponding to the vertical dimension (y_2 -axis) of the display 408 should result in cursor translation along the y_2 -axis, regardless of the orientation in which the user is holding the free space pointing device 400.

[0033] To better understand the need for tilt compensation according to exemplary embodiments of the present invention, consider the example shown in Figure 6(a). Therein, the user is holding free space pointing device 400 in an exemplary inertial frame of reference, which can be defined as having an x-axis rotational value of 0 degrees, e.g., the inertial frame of reference can be that in which the free space device has its bottom substantially parallel to a floor of a room in which, e.g., a television is located. The inertial frame of reference can, purely as an example, correspond to the orientation illustrated in Figure 6(a) or it can be defined as any other orientation. Rotation of the free space pointing device 400 in either the y-axis or z-axis directions will be sensed by rotational sensors 502 and 504, respectively. For example, rotation of the free space pointing device 400 around the z-axis by an amount Δz as shown in Figure 6(b) will result in a corresponding cursor translation Δx_2 in the x_2 axis dimension across the display 408 (i.e., the distance between the dotted version of cursor 410 and the undotted version).

[0034] If, on the other hand, the user holds the free space pointing device 400 in a different orientation, e.g., with some amount of x-axis rotation relative to the inertial frame of reference, then the information provided by the sensors 502 and 504 would not (absent tilt compensation) provide an accurate representation of the user's intended interface actions. For example, referring to Figure 6(c), consider a situation wherein the user holds the free space pointing device 400 with an x-axis rotation of 45 degrees relative to the exemplary inertial frame of reference as illustrated in Figure 6(a). Assuming the same z-axis rotation Δz is imparted to the free space pointing device 400 by a user as in the example of Figure 6(b), the cursor 410 will instead be translated in both the x_2 -axis direction and the y_2 -axis direction as shown in Figure 6(d). This is due to the fact that the sensing axis of rotational sensor 502 is now oriented between the y-axis and the z-axis (because of the orientation of the device in the user's hand). Similarly, the sensing axis of the rotational sensor 504 is also oriented between the y-axis and the z-axis (although in a different quadrant). In order to provide an interface which is transparent to the user in terms of how the free space pointing device 400 is held, tilt compensation according to exemplary embodiments of the present invention translates the readings output from rotational sensors 502 and 504 back into the inertial frame of reference as part of processing the readings from these sensors into information indicative of rotational motion of the free space pointing device 400.

[0035] According to exemplary embodiments of the present invention, returning to Figure 5, this can be accomplished by determining the tilt of the free space pointing device 400 using the inputs y and z received from accelerometer 506 at function 622. More specifically, after the acceleration data is converted and calibrated as described above, it can be low pass filtered at LPF 624 to provide an average acceleration (gravity) value to the tilt determination function 622. Then, tilt θ can be calculated in function 622 as:

$$\theta = \tan^{-1}\left(\frac{y}{z}\right) \quad (7)$$

The value θ can be numerically computed as $\text{atan2}(y,z)$ to prevent division by zero and give the correct sign. Then, function 620 can perform the rotation R of the converted/calibrated inputs αy and αz using the equation:

$$R = \begin{bmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{bmatrix} \cdot \begin{bmatrix} \alpha y \\ \alpha z \end{bmatrix} \quad (8)$$

to rotate the converted/calibrated inputs α_y and α_z to compensate for the tilt θ . Tilt compensation as described in this exemplary embodiment is a subset of a more general technique for translating sensor readings from the body frame of reference into a user's frame of reference according to another exemplary embodiment of the present invention which is described below.

[0036] Once the calibrated sensor readings have been compensated for linear acceleration, processed into readings indicative of angular rotation of the free space pointing device 400, and compensated for tilt, post-processing can be performed at blocks 626 and 628. Exemplary post-processing can include compensation for various factors such as human tremor. Although tremor may be removed using several different methods, one way to remove tremor is by using hysteresis. The angular velocity produced by rotation function 620 is integrated to produce an angular position. Hysteresis of a calibrated magnitude is then applied to the angular position. The derivative is taken of the output of the hysteresis block to again yield an angular velocity. The resulting output is then scaled at function 628 (e.g., based on the sampling period) and used to generate a result within the interface, e.g., movement of a cursor 410 on a display 408.

[0037] Having provided a process description of exemplary free space pointing devices according to the present invention, Figure 7 illustrates an exemplary hardware architecture. Therein, a processor 800 communicates with other elements of the free space pointing device including a scroll wheel 802, JTAG 804, LEDs 806, switch matrix 808, IR photodetector 810, rotational sensors 812, accelerometer 814 and transceiver 816. The scroll wheel 802 is an optional input component which enables a user to provide input to the interface by rotating the scroll wheel 802 clockwise or counterclockwise. JTAG 804 provides the programming and debugging interface to the processor. LEDs 806 provide visual feedback to a user, for example, when a button is pressed. Switch matrix 808 receives inputs, e.g., indications that a button on the free space pointing device 400 has been depressed or released, that are then passed on to processor 800. The optional IR photodetector 810 can be provided to enable the exemplary free space pointing device to learn IR codes from other remote controls. Rotational sensors 812 provide readings to processor 800 regarding, e.g., the y-axis and z-axis rotation of the free space pointing device as described above. Accelerometer 814 provides readings to processor 800 regarding the linear acceleration of the free space pointing device 400 which can be used as described above, e.g., to perform tilt compensation and to compensate for errors which linear acceleration introduces into the rotational readings generated by rotational sensors 812. Transceiver 816 is used to communicate information to and from free space pointing device 400, e.g., to the system controller 228 or to a processor associated with a computer. The transceiver 816 can be a wireless transceiver, e.g., operating in accordance with the Bluetooth standards for short-range wireless communication or an infrared transceiver. Alternatively, free space pointing device 400 can communicate with systems via a wireline connection.

[0038] In the exemplary embodiment of Figure 4, the free space pointing device 400 includes two rotational sensors 502 and 504, as well as an accelerometer 506. However, according to another exemplary embodiment of the present invention, a free space pointing device can alternatively include just one rotational sensor, e.g., for measuring angular velocity in the z-axis direction, and an accelerometer. For such an exemplary embodiment, similar functionality to that described above can be provided by using the accelerometer to determine the angular velocity along the axis which is not sensed by the rotational sensor. For example, rotational velocity around the y-axis can be computed using data generated by the accelerometer and calculating:

$$\omega_y = \frac{\partial \theta_y}{\partial t} = \frac{\partial}{\partial t} \tan^{-1} \left(\frac{x}{z} \right) \quad (9)$$

In addition, the parasitic acceleration effects that are not measured by a rotational sensor should also be removed. These effects include actual linear acceleration, acceleration measured due to rotational velocity and rotational acceleration, and acceleration due to human tremor.

[0039] Stationary detection function 608, mentioned briefly above, can operate to determine whether the free space pointing device 400 is, for example, either stationary or active (moving). This categorization can be performed in a number of different ways. One way, according to an exemplary embodiment of the present invention, is to compute the variance of the sampled input data of all inputs (x, y, z, α_y , α_z) over a predetermined window, e.g., every quarter of a second. This variance is then compared with a threshold to classify the free space pointing device as either stationary or active.

[0040] Another stationary detection technique according to exemplary embodiments of the present invention involves transforming the inputs into the frequency domain by, e.g., performing a Fast Fourier Transform (FFT) on the input data. Then, the data can be analyzed using, e.g., peak detection methods, to determine if the free space pointing device 400 is either stationary or active. Additionally, a third category can be distinguished, specifically the case where a user is holding the free space pointing device 400 but is not moving it (also referred to herein as the "stable" state. This third category can be distinguished from stationary (not held) and active by detecting the small movement of the free space pointing device 400 introduced by a user's hand tremor when the free space pointing device 400 is being held by a user.

Peak detection can also be used by stationary detection function 608 to make this determination. Peaks within the range of human tremor frequencies, e.g., nominally 8-12 Hz, will typically exceed the noise floor of the device (experienced when the device is stationary and not held) by approximately 20 dB.

[0041] In the foregoing examples, the variances in the frequency domain were sensed within a particular frequency range, however the actual frequency range to be monitored and used to characterize the status of the free space pointing device 400 may vary. For example, the nominal tremor frequency range may shift based on e.g., the ergonomics and weight of the free space pointing device 400, e.g., from 8-12 Hz to 4-7 Hz.

[0042] According to another exemplary embodiment of the present invention, stationary detection mechanism 608 can include a state machine. An exemplary state machine is shown in Figure 8. Therein, the ACTIVE state is, in this example, the default state during which the free space pointing device 400 is moving and being used to, e.g., provide inputs to a user interface. The free space pointing device 400 can enter the ACTIVE state on power-up of the device as indicated by the reset input. If the free space pointing device 400 stops moving, it may then enter the INACTIVE state. The various state transitions illustrated in Figure 8 can be triggered by any of a number of different criteria including, but not limited to, data output from one or both of the rotational sensors 502 and 504, data output from the accelerometer 506, time domain data, frequency domain data or any combination thereof. State transition conditions will be generically referred to herein using the convention "Condition_{stateA→stateB}". For example, the free space pointing device 400 will transition from the ACTIVE state to the INACTIVE state when condition_{active→inactive} occurs. For the sole purpose of illustration, consider that condition_{active→inactive} can, in an exemplary free space pointing device 400, occur when mean and/or standard deviation values from both the rotational sensor(s) and the accelerometer fall below first predetermined threshold values for a first predetermined time period.

[0043] State transitions can be determined by a number of different conditions based upon the interpreted sensor outputs. Exemplary condition metrics include the variance of the interpreted signals over a time window, the threshold between a reference value and the interpreted signal over a time window, the threshold between a reference value and the filtered interpreted signal over a time window, and the threshold between a reference value and the interpreted signal from a start time can be used to determine state transitions. All, or any combination, of these condition metrics can be used to trigger state transitions. Alternatively, other metrics can also be used. According to one exemplary embodiment of the present invention, a transition from the INACTIVE state to the ACTIVE state occurs either when (1) a mean value of sensor output(s) over a time window is greater than predetermined threshold(s) or (2) a variance of values of sensor output(s) over a time window is greater than predetermined threshold(s) or (3) an instantaneous delta between sensor values is greater than a predetermined threshold.

[0044] The INACTIVE state enables the stationary detection mechanism 608 to distinguish between brief pauses during which the free space pointing device 400 is still being used, e.g., on the order of a tenth of a second, and an actual transition to either a stable or stationary condition. This protects against the functions which are performed during the STABLE and STATIONARY states, described below, from inadvertently being performed when the free space pointing device is being used. The free space pointing device 400 will transition back to the ACTIVE state when condition_{inactive→active} occurs, e.g., if the free space pointing device 400 starts moving again such that the measured outputs from the rotational sensor(s) and the accelerometer exceed the first threshold before a second predetermined time period in the INACTIVE state elapses.

[0045] The free space pointing device 400 will transition to either the STABLE state or the STATIONARY state after the second predetermined time period elapses. As mentioned earlier, the STABLE state reflects the characterization of the free space pointing device 400 as being held by a person but being substantially unmoving, while the STATIONARY state reflects a characterization of the free space pointing device as not being held by a person. Thus, an exemplary state machine according to the present invention can provide for a transition to the STABLE state after the second predetermined time period has elapsed if minimal movement associated with hand tremor is present or, otherwise, transition to the STATIONARY state.

[0046] The STABLE and STATIONARY states define times during which the free space pointing device 400 can perform various functions. For example, since the STABLE state is intended to reflect times when the user is holding the free space pointing device 400 but is not moving it, the device can record the movement of the free space pointing device 400 when it is in the STABLE state e.g., by storing outputs from the rotational sensor(s) and/or the accelerometer while in this state. These stored measurements can be used to determine a tremor pattern associated with a particular user or users as described below. Likewise, when in the STATIONARY state, the free space pointing device 400 can take readings from the rotational sensors and/or the accelerometer for use in compensating for offset as described above.

[0047] If the free space pointing device 400 starts to move while in either the STABLE or STATIONARY state, this can trigger a return to the ACTIVE state. Otherwise, after measurements are taken, the device can transition to the SLEEP state. While in the sleep state, the device can enter a power down mode wherein power consumption of the free space pointing device is reduced and, e.g., the sampling rate of the rotational sensors and/or the accelerometer is also reduced. The SLEEP state can also be entered via an external command so that the user or another device can command the free space pointing device 400 to enter the SLEEP state.

[0048] Upon receipt of another command, or if the free space pointing device 400 begins to move, the device can transition from the SLEEP state to the WAKEUP state. Like the INACTIVE state, the WAKEUP state provides an opportunity for the device to confirm that a transition to the ACTIVE state is justified, e.g., that the free space pointing device 400 was not inadvertently jostled.

[0049] The conditions for state transitions may be symmetrical or may differ. Thus, the threshold associated with the condition_{active→inactive} may be the same as (or different from) the threshold(s) associated with the condition_{inactive→active}. This enables free space pointing devices according to the present invention to more accurately capture user input. For example, exemplary embodiments which include a state machine implementation allow, among other things, for the threshold for transition into a stationary condition to be different than the threshold for the transition out of a stationary condition.

[0050] Entering or leaving a state can be used to trigger other device functions as well. For example, the user interface can be powered up based on a transition from any state to the ACTIVE state. Conversely, the free space pointing device and/or the user interface can be turned off (or enter a sleep mode) when the free space pointing device transitions from ACTIVE or STABLE to STATIONARY or INACTIVE. Alternatively, the cursor 410 can be displayed or removed from the screen based on the transition from or to the stationary state of the free space pointing device 400.

[0051] As mentioned above, exemplary embodiments of the present invention process movement data received from sensor(s) in the free space pointing device to convert this data from the frame of reference of the free space pointing device's body into another frame of reference, e.g., the user's frame of reference. In the exemplary application of a free space pointing device used to control a user interface displayed on a screen, e.g., a television, the user's frame of reference might be a coordinate system associated with the television screen. Regardless, translation of the data from the body frame of reference into another frame of reference improves the usability of the handheld device by resulting in an operation that is from the user's perspective rather than the device's perspective. Thus, when the user moves his or her hand from left to right in front of a display while holding the free space pointing device, the cursor will move in the left to right direction regardless of the orientation of the free space pointing device.

[0052] To simplify this discussion an exemplary processing system associated with a free space pointing device is shown in Figure 9, e.g., as described in more detail above. Therein, the handheld system senses motion using one or more sensors 901, e.g., rotational sensor(s), gyroscopes(s), accelerometer(s), magnetometer(s), optical sensor(s), camera(s) or any combination thereof. The sensors are then interpreted in block 902 to produce an estimate of the motion that occurred. The processing block 903 then translates the measured motion from the natural (body) reference frame of the device into the reference frame of the user. The movement is then mapped 904 into meaningful actions that are interpreted at block 905 and forwarded to the system to produce a meaningful response, such as moving an on-screen cursor.

[0053] Block 903 converts detected movement into the reference frame of the user instead of the reference frame of the device. Orientation may be represented by many different mathematically similar methods including Euler angles, a direction cosine matrix (DCM), or a unit quaternion. Position is generally represented as an offset from the coordinate system origin in a consistent unit including but not limited to meters, centimeters, feet, inches, and miles. In one exemplary embodiment described above, a free space pointing device measures inertial forces including acceleration and rotational velocity. These forces are measured relative to the body of the device by sensors mounted therein. In order to convert the measured data into the user frame of reference, the device estimates both its position and its orientation.

[0054] In this exemplary embodiment, it is assumed that the user frame of reference is stationary and has fixed orientation, although those skilled in the art will appreciate that this technique in accordance with the present invention can be readily extended to the cases where the user's frame of reference is non-stationary by either directly transforming to the time-varying frame or by first converting to a stationary frame and then converting to the moving frame. For the stationary, fixed-orientation user frame of reference example, conversion from the body frame to the user frame can be performed by use of the following equations:

$$P_u = \text{Rotate}(P_b, Q) + P_{\text{delta}}$$

$$P_u' = \text{Rotate}(P_b', Q)$$

$$P_u'' = \text{Rotate}(P_b'', Q)$$

$$W_u = \text{Rotate}(W_b, Q)$$

$$Wu' = \text{Rotate}(Wb', Q)$$

where:

Rotate represents the quaternion rotation operator such that $\text{Rotate}(A, Q)$ is equal to $Q^* A Q$ where Q^* is the quaternion conjugate and the vector A is a quaternion with the complex component equal to A and the real component equal to 0;

Pu is the position in the user frame of reference;

Pb is the position in the device frame of reference;

'represents the derivative. Therefore, Pu' is the derivative of the position in the user frame of reference which is the velocity in the user frame of reference;

Wu is the angular velocity of the device in body angles in the user frame of reference;

Wb is the angular velocity of the device in body angles in the body frame of the device;

$Pdelta$ is the difference between the origin of the user frame of reference and the body frame of reference in the user frame of reference coordinate system;

Q is the normalized rotation quaternion that represents the rotation from the body frame to the user frame. Since the rotation quaternion to rotate from the user frame to the body frame is Q^* , we could replace Q with R^* where R is the rotation from the user frame to the body frame. Note that Q can be represented in a number of equivalent forms including Euler angles and the direction cosine matrix (DCM), and the above equations may vary slightly in their equivalent forms based upon different representations of Q . Figure 10 graphically illustrates the transformation from a body frame of reference to a user's frame of reference.

[0055] During operation, the device estimates Q in an implementation dependent manner to perform this transformation. One exemplary implementation described above involves compensating for tilt (i.e., variations in x-axis roll of the free space pointing device based on the manner in which it is held by a user). The orientation is computed by first estimating the acceleration component due to gravity in the body frame, Ab . By definition, the acceleration vector due to gravity in the user frame, Ag , is set to $[0, 0, -1]$. Since gravity cannot estimate the heading (rotation about the z-axis), the body frame estimate for heading is used. Therefore, the rotation quaternion has an axis of rotation in the $z=0$ plane. The following is one of several mathematically equivalent methods for computing the rotation quaternion:

$$V = \|Ab\| \times \|Ag\| \quad (\text{cross product of unit vectors})$$

$$qV = \|V\|$$

$$\alpha = \sin^{-1}|V|$$

$$Q = \text{Quaternion}[qV, \alpha] = [qV * \sin(\alpha/2), \cos(\alpha/2)]$$

Position is then computed as the double integral of the acceleration in the user frame. The acceleration in the user frame is the acceleration of the body frame rotated into the user frame by Q above. Normally, the origin is assumed to be zero when the device is first activated, but the origin may be reset during normal operation either manually or automatically.

[0056] Generally, when the device is not moving, Pu' , Pu'' , Wu , and Wu'' are all 0. In this exemplary embodiment, Pb'' and Wb are measured. Although an infinite number of rotations Q exist, the minimal rotation can be selected from the available set and used to estimate Wu based on Wb . Alternatively, Q may be computed using an assumed starting offset orientation Qo , by integrating Wb over time as shown using the discrete time integral below:

$$WbAngle = |Wb| * \text{period}$$

$$Q_{DELTA} = \text{Quaternion}[Wb, WbAngle] = [\|Wb\| * \sin(WbAngle/2), \cos(WbAngle/2)]$$

$$Q_{\text{NEXT}} = Q_0 ** Q_{\text{DELTA}}$$

Where * represents multiplication and ** represents quaternion multiplication. Additional stability can be provided by constant field vectors including gravity and the earth's magnetic field and combined with the results above. The combination can be achieved using several numerical and filtering methods including, but not limited to, Kalman filtering.

[0057] A variety of different sensors could be employed as long as they measure motion with respect to the body of the device. Exemplary sensors include accelerometers, rotational sensors, gyroscopes, magnetometers and cameras. The user frame does not need to be stationary. For example, if the user's frame of reference is selected to be the user's forearm, then the device would only respond to wrist and finger movement.

[0058] One skilled in the art will recognize the commutative property applies to the frame of reference transformations described in this invention. Therefore, the order of the mathematical operations can be altered without materially affecting the invention described herein. In addition, many motion processing algorithms can operate in either frame of reference equivalently, especially when the user frame is chosen to be stationary with a constant orientation.

[0059] In addition to providing ease of use, frame of reference transformations according to this exemplary embodiment of the present invention can also be used to address other challenges in handheld device implementations. For example, if a sensor (such as an accelerometer) is not located precisely at the center of rotation in the body frame of reference, the measured acceleration will include both the acceleration of the frame and acceleration components due to the rotation of the frame. Therefore, the measured acceleration can first be transformed to a different target location within the body frame of the device using the following relationship:

$$A_{\text{body}} = A_{\text{accelerometer}} + \omega' \times R + \omega \times (\omega \times R)$$

where R is the vector from the accelerometer to the target location, ω is the angular velocity of the body frame of reference and ω' is the angular acceleration of the body frame of reference. If the body frame of the device is constructed such that it lies at R from the accelerometer, then it should have zero angular acceleration effects and may be more easily used to compute the device movement in the user frame. This compensates for intentional or unintentional misalignment between the accelerometer and the center of the body frame of reference. In addition, the estimate of the gravity vector becomes much simpler since there are fewer forces acting at the center of rotation. Then,

$$A_{\text{user}} = \text{Rotate}(A_{\text{body}}, Q)$$

where Q is the rotation from the body frame of reference to the accelerometer frame of reference.

[0060] Unfortunately, different users have different values for R. For example, one user may use the handheld device by rotating their elbow while another may use the device by rotating their wrist. In addition, people have different sized wrists and forearms. For improved usability this exemplary embodiment of the handheld dynamically computes R and moves the body origin such that it has minimal acceleration components due to angular motion. The exemplary embodiment estimates R by defining R as [Rx, 0, 0] and solving for Rx using and minimizing $A_{\text{body}} - \text{Rotate}[A_g, Q]$. Note that many numerical methods exist including recursive least squares and Kalman filtering that may perform minimization to compute Rx.

[0061] Based on the foregoing, it will be appreciated that the present invention describes various techniques for mapping sensed motion of a handheld device from one frame of reference (e.g., a body frame of reference) to another frame of reference (e.g., a user's frame of reference). These mappings can be independent from other mappings associated with the use of the handheld device, e.g., the mapping of sensed motion to cursor movement or can be combined therewith. Moreover, transformations according to the present invention can be performed to transform the sensed motion in all three dimensions, for translational motion and rotational motion or any subset thereof, from the perspective of either the input side of the motion equation or the output side. Additionally, the selection of the frame of reference into which the sensed motion is mapped or transformed can be made in a number of different ways. One example provided above shows the second frame of reference being a user's frame of reference associated with the tilt of the device, however many other variations are possible. For example, the user may select his or her desired frame of reference, which setting can be stored in the handheld as one of a plurality of user preferences and used to perform the transformation. The second frame of reference can be selected based on any number of techniques. The second frame of reference can be selected based upon an explicit command (e.g., button or user interface selection) or automatically through user recognition determined by device use patterns, tremor, and other biometrics.

[0062] Additionally, although some of the exemplary embodiments described above operate on data in the velocity

domain, the present invention is not so limited. Mapping or transformation according to the present invention can alternatively or additionally be performed on, for example, position or acceleration data and can be for translational motion, rotational motion or both. Also the order of processing is not critical. For example, if the handheld device is being used to output gesture commands, the mapping can be performed first and then the gesture determined or the gesture can be determined first and then the mapping can be performed.

[0063] The above-described exemplary embodiments are intended to be illustrative in all respects, rather than restrictive, of the present invention. Thus the present invention is capable of many variations in detailed implementation that can be derived from the description contained herein by a person skilled in the art. For example, although the foregoing exemplary embodiments describe, among other things, the use of inertial sensors to detect movement of a device, other types of sensors (e.g., ultrasound, magnetic or optical) can be used instead of, or in addition to, inertial sensors in conjunction with the aforescribed signal processing. All such variations and modifications are considered to be within the scope of the present invention as defined by the following claims. No element, act, or instruction used in the description of the present application should be construed as critical or essential to the invention unless explicitly described as such. Also, as used herein, the article "a" is intended to include one or more items.

Claims

1. A free space handheld pointing device (400) comprising:

a first rotational sensor (502) for determining rotation of said pointing device about a first axis and generating a first rotational output (α_y) associated therewith;
 a second rotational sensor (504) for determining rotation of said pointing device about a second axis and generating a second rotational output (α_z) associated therewith;
 an accelerometer (506) for determining an acceleration of said pointing device and outputting an acceleration output associated therewith; and
 a processing unit (800) for receiving said first and second rotational outputs and said acceleration output and for:

(a) determining a tilt (θ) relative to gravity associated with an orientation in which said pointing device is held, wherein said tilt is determined based upon the acceleration output; and
 (b) converting said first and second rotational outputs from a body frame of reference associated with said pointing device into a user's frame of reference in order to remove the effects of said determined tilt.

2. The pointing device of claim 1, further comprising determining data associated with x and y coordinates which are in turn associated with movement of a screen cursor (410), said data based on said converted first and second rotational outputs, wherein said step of converting renders said movement of said screen cursor independent of said tilt.

3. The pointing device of claim 1 or 2, wherein said user's frame of reference is associated with a television screen.

4. The pointing device of one of claims 1 to 3, wherein said step of converting further comprises the step of: rotating said first and second rotational outputs into said user's frame of reference by calculating:

$$R = \begin{bmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{bmatrix} \bullet \begin{bmatrix} \alpha_y \\ \alpha_z \end{bmatrix} ,$$

wherein θ is said determined tilt, α_y is said first rotational output and α_z is said second rotational output.

5. A method for operating a free space pointing device (400) comprising the steps of:

determining, using an accelerometer (506), a tilt (θ) relative to gravity associated with an orientation in which said free space pointing device is held;
 detecting, using first and second rotational sensors (502, 504), rotational movement (α_y , α_z) of said free space pointing device about a first axis and a second axis respectively; and transforming said detected movement from a body frame of reference associated with said free space pointing device into an inertial frame of reference, wherein the transforming includes compensating said detected rotational movement to correct the detected

rotational movement for said determined tilt,

6. The method of claim 5, wherein said step of compensating said detected rotational movement to correct for said tilt comprises the step of:

rotating first and second rotational outputs of said first and second rotational sensors into said inertial frame of reference by calculating:

$$R = \begin{bmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{bmatrix} \cdot \begin{bmatrix} \alpha_y \\ \alpha_z \end{bmatrix}$$

wherein θ is said determined tilt, α_y is said first rotational output and α_z is said second rotational output.

7. The method of claim 5 or 6, further comprising the step of: providing information associated with said compensated, detected movement as input to a user interface.

Patentansprüche

1. Im freien Raum handhabbare, in der Hand haltbare Zeigevorrichtung (400), die Folgendes aufweist:

einen ersten Rotationssensor (502) zum Bestimmen einer Rotation der Zeigevorrichtung um eine erste Achse und zum Erzeugen einer dieser zugeordneten ersten Rotationswertausgabe a_y ;
einen zweiten Rotationssensor (504) zum Bestimmen einer Rotation der Zeigevorrichtung um eine zweite Achse und zum Erzeugen einer dieser zugeordneten zweiten Rotationswertausgabe a_z ;
einen Beschleunigungsaufnehmer (506) zum Bestimmen einer Beschleunigung der Zeigevorrichtung und zum Ausgeben einer dieser zugeordneten Beschleunigungswertausgabe; und
eine Verarbeitungseinheit (800) zum Erhalten der ersten und der zweiten Rotationswertausgabe und der Beschleunigungswertausgabe, und zum:

- (a) Bestimmen einer Neigung (θ) relativ zur Gravitation, die einer Ausrichtung zugeordnet ist, in der die Zeigevorrichtung gehalten wird, wobei die Neigung basierend auf der Beschleunigungswertausgabe bestimmt wird; und
(b) Konvertieren der ersten und der zweiten Rotationswertausgabe von einem der Zeigevorrichtung zugeordneten Gehäusebezugssystem in ein Nutzerbezugssystem, um die Auswirkungen der bestimmten Neigung zu entfernen.

2. Zeigevorrichtung nach Anspruch 1, ferner umfassend Bestimmen von Daten, die x- und y-Koordinaten zugeordnet sind, die wiederum einer Bewegung eines Bildschirmzeigers (410) zugeordnet sind, wobei die Daten auf den konvertierten ersten und zweiten Beschleunigungswertausgaben basieren, und wobei der Schritt zum Konvertieren zu einer von der Neigung unabhängigen Bewegung des Bildschirmzeigers führt.

3. Zeigevorrichtung nach Anspruch 1 oder 2, worin das Nutzerbezugssystem einem Fernseh Bildschirm zugeordnet ist.

4. Zeigevorrichtung nach einem der Ansprüche 1 bis 3, worin der Schritt zum Konvertieren ferner einen Schritt zum Drehen der ersten und der zweiten Rotationswertausgabe in das Nutzerbezugssystem mittels der Rechenvorschrift

$$R = \begin{bmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{bmatrix} \cdot \begin{bmatrix} \alpha_y \\ \alpha_z \end{bmatrix},$$

aufweist, worin θ die bestimmte Neigung, a_y die erste Rotationswertausgabe und a_z die zweite Rotationswertausgabe bedeuten.

5. Verfahren zum Betreiben einer im freien Raum handhabbaren Zeigevorrichtung (400), wobei das Verfahren folgende

Schritte aufweist:

Bestimmen, mittels eines Beschleunigungsaufnehmers (506), einer Neigung (θ) relativ zur Gravitation, die einer Ausrichtung zugeordnet ist, in der die im freien Raum handhabbare Zeigevorrichtung gehalten wird;
Erfassen, mittels eines ersten und eines zweiten Rotationssensors (502, 504), einer Rotationsbewegung (a_y , a_z) der im freien Raum handhabbaren Zeigevorrichtung um eine erste Achse bzw. eine zweite Achse; und
Transformieren der erfassten Bewegung von einem der im freien Raum handhabbaren Zeigevorrichtung zugeordneten Gehäusebezugssystem in ein Inertialsystem;
wobei das Transformieren ein Kompensieren der erfassten Rotationsbewegung zur Korrektur der erfassten Rotationsbewegung in Bezug auf die Neigung umfasst.

6. Verfahren nach Anspruch 5, worin der Schritt zum Kompensieren der erfassten Rotationsbewegung zur Korrektur in Bezug auf die Neigung einen Schritt zum Drehen der ersten und der zweiten Rotationswertausgabe vom ersten und zweiten Rotationssensor in das Inertialsystem mittels der Rechenvorschrift

$$R = \begin{bmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{bmatrix} \cdot \begin{bmatrix} \alpha_y \\ \alpha_z \end{bmatrix},$$

umfasst, worin θ die bestimmte Neigung, a_y die erste Rotationswertausgabe und a_z die zweite Rotationswertausgabe bedeuten.

7. Verfahren nach Anspruch 5 oder 6, das ferner einen Schritt umfasst zum Erstellen einer, der kompensierten erfassten Bewegung zugeordneten, Information als Eingabe für eine Benutzerschnittstelle.

Revendications

1. Dispositif portatif de pointage d'espace libre (400) comprenant :

un premier capteur de rotation (502) pour déterminer une rotation dudit dispositif de pointage autour d'un premier axe et générer une première sortie de rotation (D_y) associée à celle-ci ;
un second capteur de rotation (504) pour déterminer une rotation dudit dispositif de pointage autour d'un second axe et générer une seconde sortie de rotation (D_z) associée à celle-ci ;
un accéléromètre (506) pour déterminer une accélération dudit dispositif de pointage et délivrer en sortie une sortie d'accélération associée à celle-ci ; et
une unité de traitement (800) pour recevoir lesdites première et seconde sorties de rotation et ladite sortie d'accélération et pour :

- (a) déterminer une inclinaison (θ) relative à la pesanteur associée à une orientation dans laquelle ledit dispositif de pointage est tenu, dans lequel ladite inclinaison est déterminée sur la base de la sortie d'accélération ; et
(b) convertir lesdites première et seconde sorties de rotation d'un référentiel corps associé audit dispositif de pointage dans un référentiel utilisateur afin de supprimer les effets de ladite inclinaison déterminée.

2. Dispositif de pointage selon la revendication 1, comprenant en outre la détermination de données associées aux coordonnées x et y qui sont à leur tour associées à un mouvement d'un curseur d'écran (410), lesdites données étant basées sur lesdites première et seconde sorties de rotation converties, dans lequel ladite étape de conversion rend ledit mouvement dudit curseur d'écran indépendant de ladite inclinaison.
3. Dispositif de pointage selon la revendication 1 ou 2, dans lequel ledit référentiel utilisateur est associé à un écran de téléviseur.
4. Dispositif de pointage selon l'une quelconque des revendications 1 à 3, dans lequel ladite étape de conversion comprend en outre l'étape de : rotation desdites première et seconde sorties de rotation dans ledit référentiel utilisateur en calculant :

$$R = \begin{bmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{bmatrix} \cdot \begin{bmatrix} \alpha y \\ \alpha z \end{bmatrix} ,$$

dans lequel θ est ladite inclinaison déterminée, αy est ladite première sortie de rotation et αz est ladite seconde sortie de rotation.

5. Procédé de fonctionnement d'un dispositif de pointage d'espace libre (400) comprenant les étapes de :

détermination, à l'aide d'un accéléromètre (506), d'une inclinaison (θ) relative à la pesanteur associée à une orientation dans laquelle ledit dispositif de pointage d'espace libre est tenu ;
 détection, à l'aide de premier et second capteurs de rotation (502, 504), d'un mouvement de rotation (αy , αz) dudit dispositif de pointage d'espace libre respectivement autour d'un premier axe et d'un second axe ; et
 transformation dudit mouvement détecté d'un référentiel corps associé audit dispositif de pointage d'espace libre dans un référentiel inertiel,
 dans lequel la transformation inclut la compensation dudit mouvement de rotation détecté pour corriger le mouvement de rotation détecté pour ladite inclinaison déterminée.

6. Procédé selon la revendication 5, dans lequel ladite étape de compensation dudit mouvement de rotation détecté pour corriger ladite inclinaison comprend l'étape de :

rotation des première et seconde sorties de rotation desdits premier et second capteurs de rotation dans ledit référentiel inertiel en calculant :

$$R = \begin{bmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{bmatrix} \cdot \begin{bmatrix} \alpha y \\ \alpha z \end{bmatrix} ,$$


dans lequel θ est ladite inclinaison déterminée, αy est ladite première sortie de rotation et αz est ladite seconde sortie de rotation.

7. Procédé selon la revendication 5 ou 6, comprenant en outre l'étape de :

fourniture d'informations associées audit mouvement détecté compensé en tant qu'entrée à une interface utilisateur.

FIG. 1

(Prior Art)

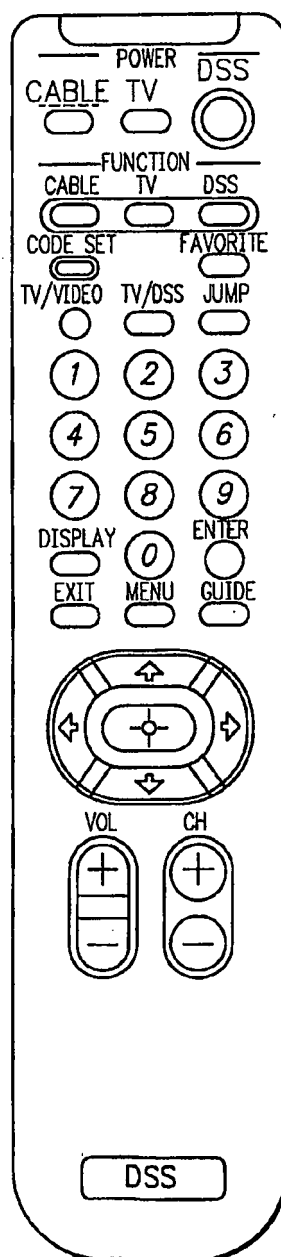

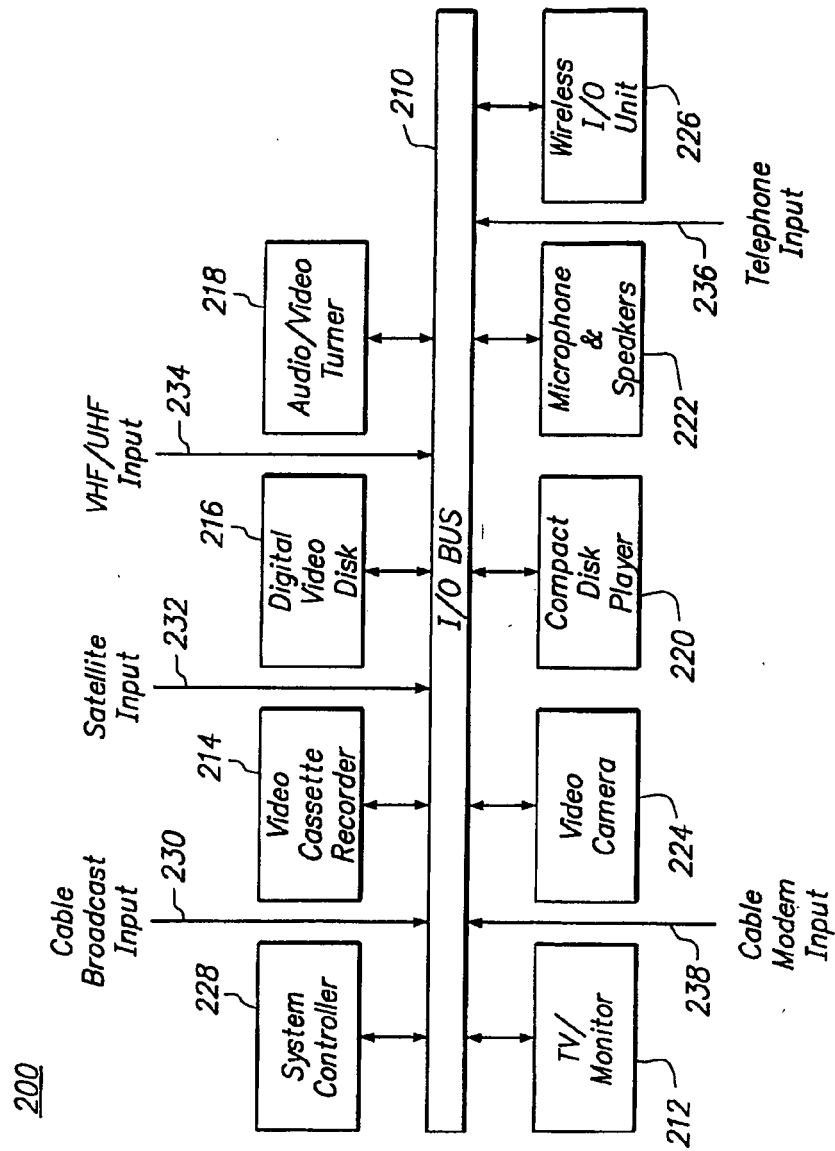


FIG. 2

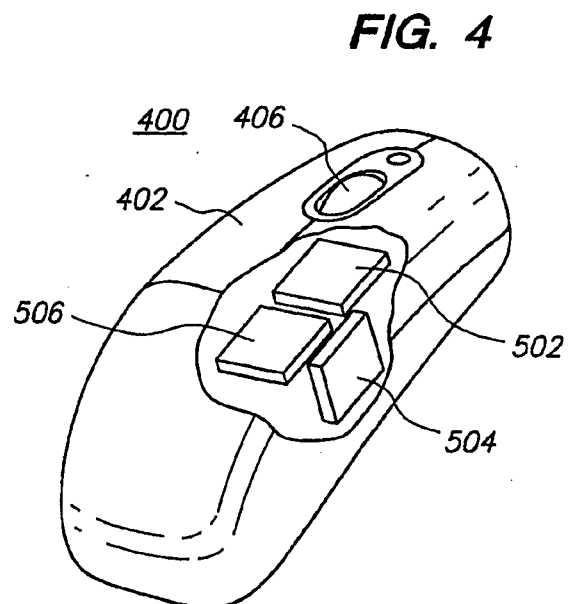
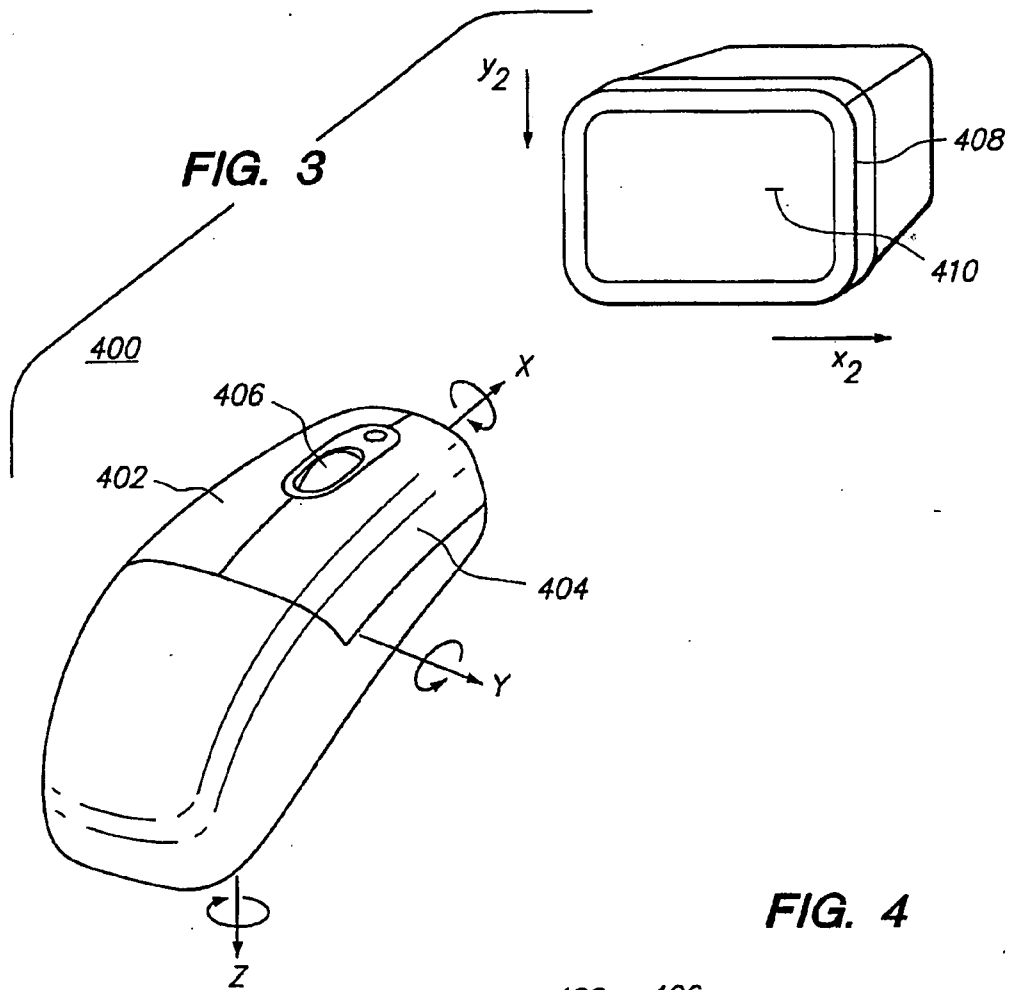


FIG. 5

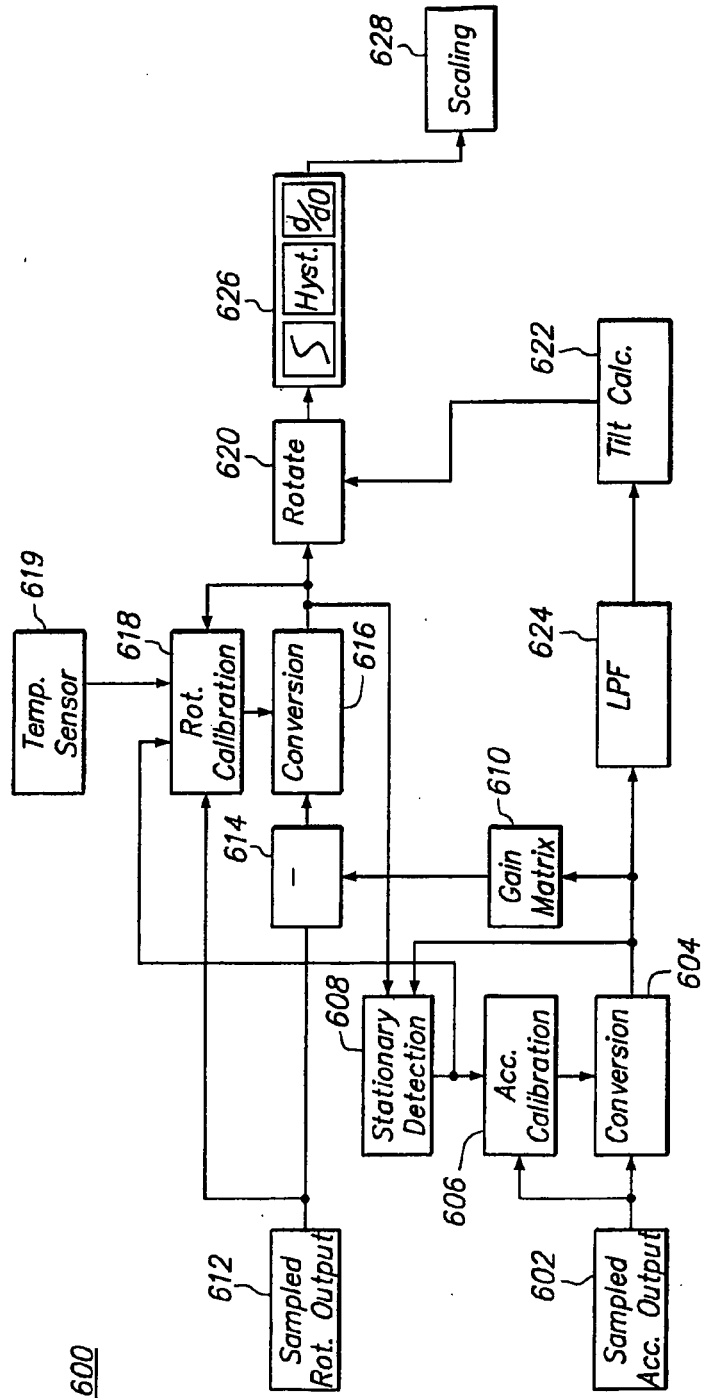


FIG. 6A

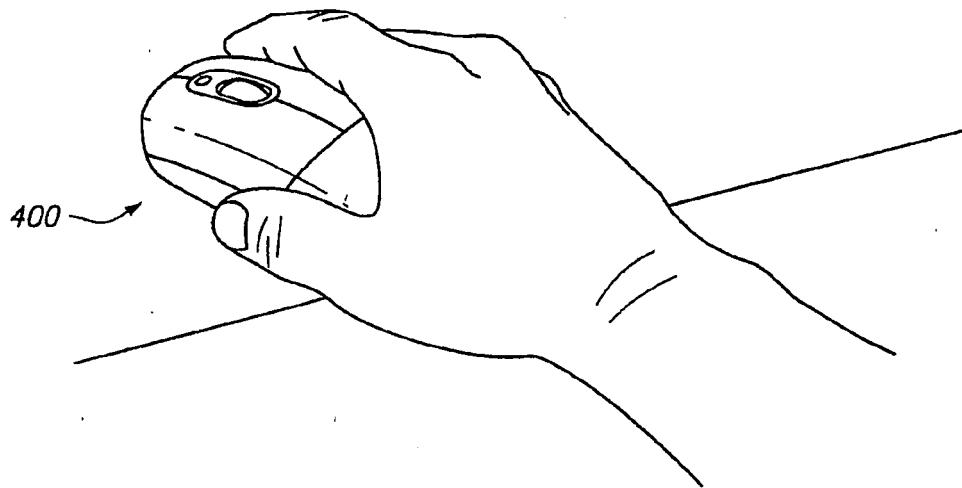


FIG. 6B

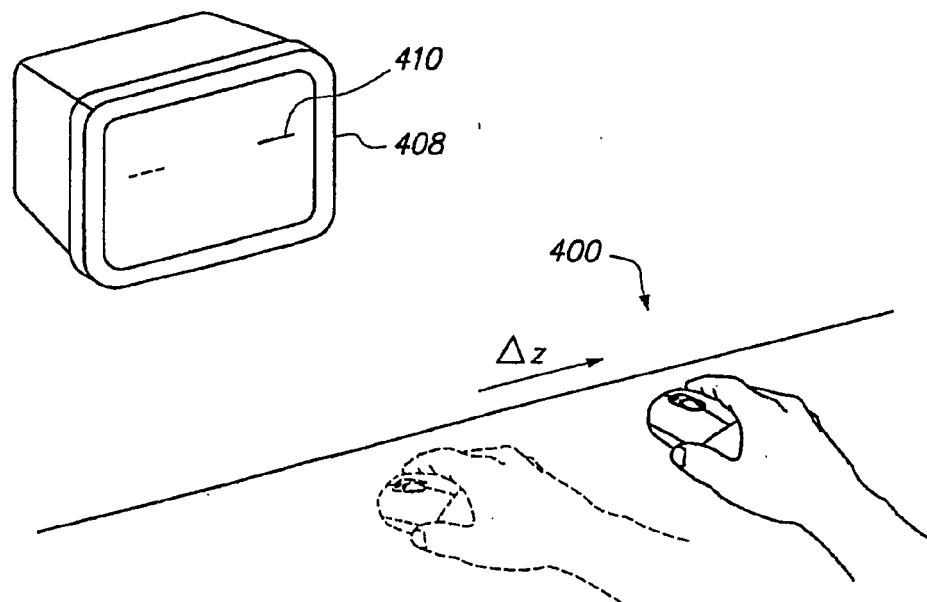


FIG. 6C

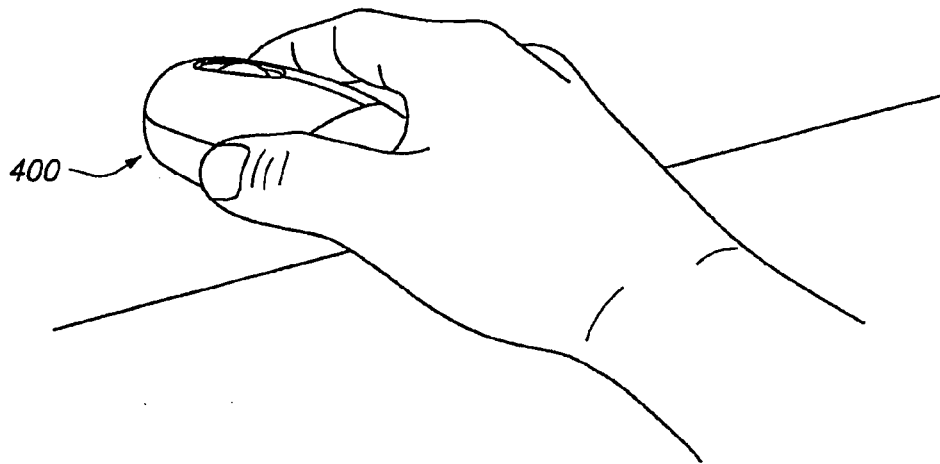


FIG. 6D

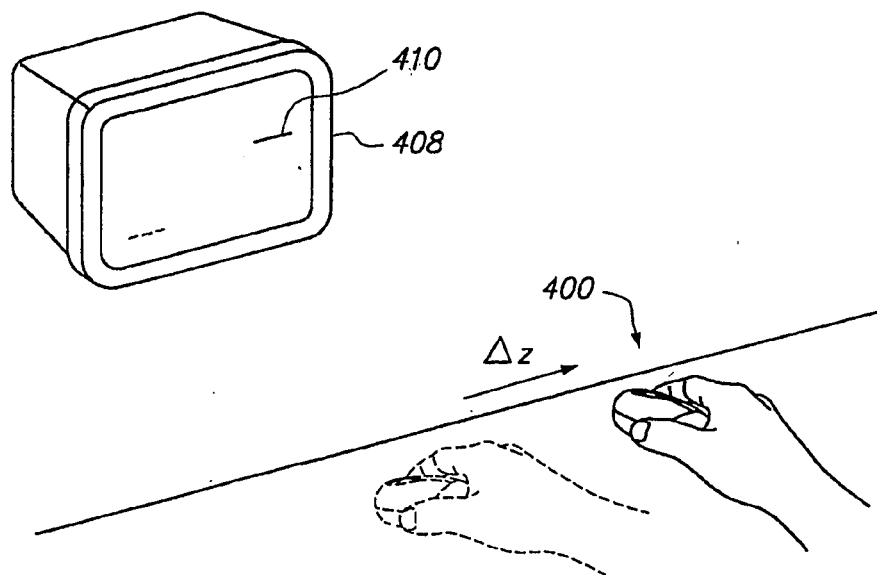
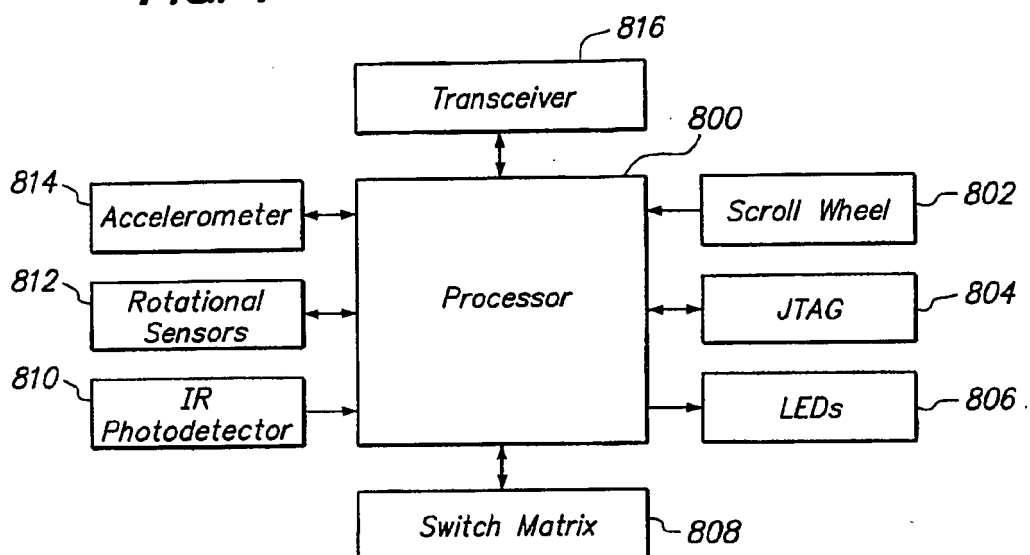


FIG. 7



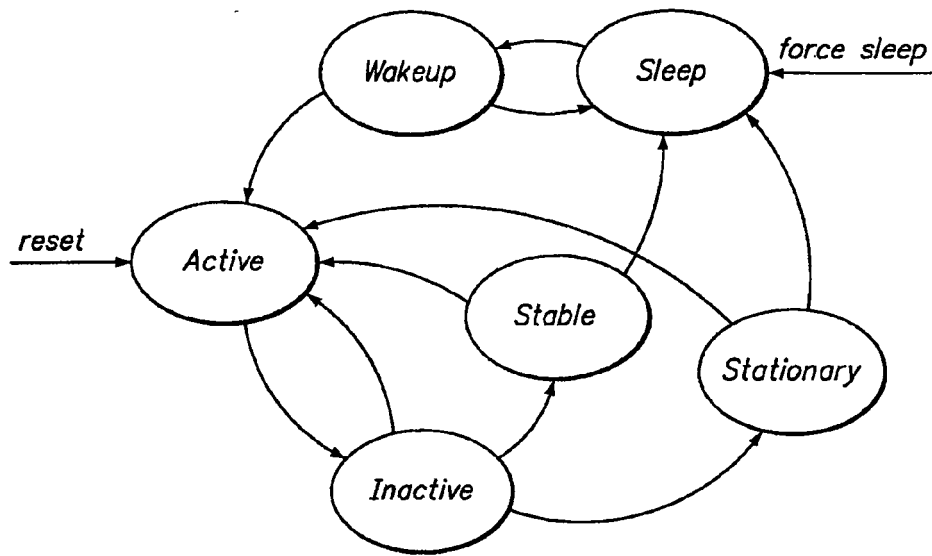


FIG. 8

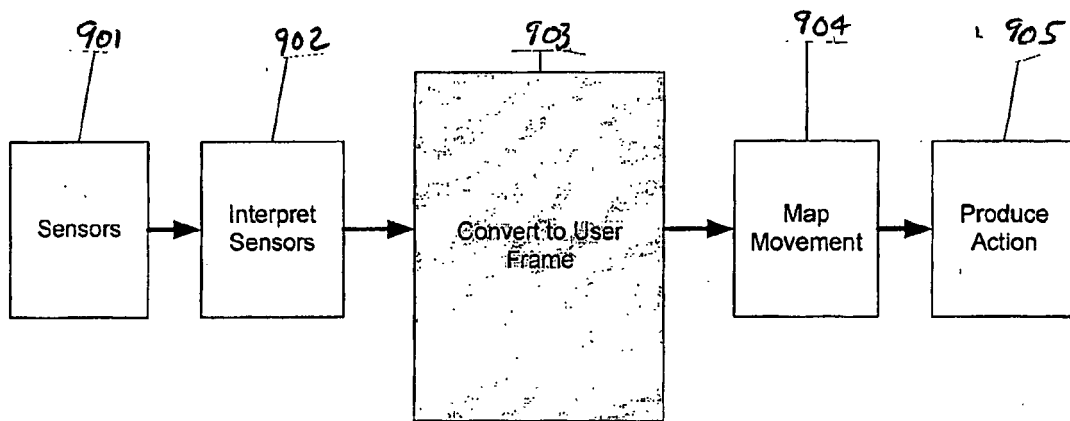


FIG. 9

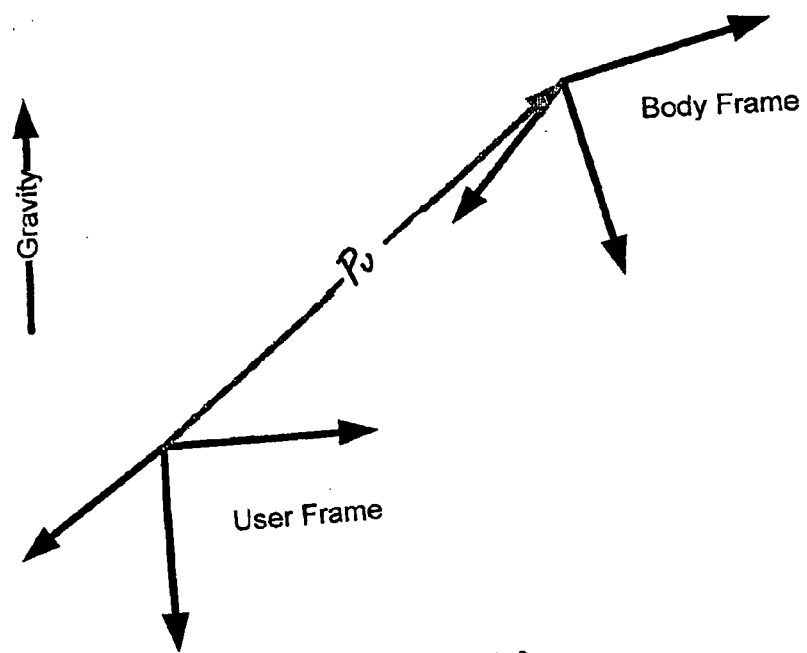


FIG. 10

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 76843204 A [0006]
- US 5440326 A [0007]
- US 5598187 A [0011]

专利名称(译)	具有倾斜补偿和改进的可用性的自由空间定位设备		
公开(公告)号	EP2337016B1	公开(公告)日	2018-01-10
申请号	EP2010014911	申请日	2005-05-02
申请(专利权)人(译)	HILLCREST实验室, INC.		
[标]发明人	LIBERTY MATTHEW		
发明人	LIBERTY, MATTHEW		
IPC分类号	G09G5/00 G09G5/08 G06F3/01 G06F3/0346 H04N5/44 H04N21/422 A61B5/1171 A61B5/117 A61B5/00 A61B5/11 G06F21/32 G06K9/00 B60B7/16 G06F3/033 G06F13/00 G06F21/00 H04N		
CPC分类号	A61B5/1101 A61B5/117 A61B5/1171 A61B5/6825 A61B5/6897 G06F3/017 G06F3/0346 G06F3/038 G06F21/32 G06K9/00885 G08C2201/32 G08C2201/61 H04N5/4403 H04N21/42222 H04N2005/4428		
优先权	60/566444 2004-04-30 US 60/612571 2004-09-23 US 60/641410 2005-01-05 US		
其他公开文献	EP2337016A1		
外部链接	Espacenet		

摘要(译)

一种用于操作自由空间定位设备的方法, 包括感测所述自由空间定位设备的移动, 所述自由空间定位设备包括用于感测移动的加速度计, 以及产生与所述移动相关联的第一数据; 将与所述移动相关联的所述第一数据分离成与所述自由空间定位设备的有意移动相关联的第二数据和与所述自由空间定位设备的无意移动相关联的第三数据; 基于所述第二数据生成与所述自由空间定位设备的预期移动相关联的处理输出。手持式指示设备包括加速度计, 用于感测所述自由空间定位设备的移动, 并产生与所述移动相关的第一数据; 处理器, 配置用于执行上述方法。

