



(12) **Patent Application Publication** (10) Pub. No.: US 2002/0018649 A1
Hakamata (43) Pub. Date: Feb. 14, 2002

(52) **U.S. Cl.** 396/17

(57) **ABSTRACT**

A photographing method and apparatus for photographing a fluorescent image, composed of fluorescent light emitted by a living tissue that has been illuminated by a stimulating light, as an image having a higher S/N ratio. Fluorescent light emitted by a living tissue that has been illuminated by a stimulating light emitted from a light source and propagated along an endoscope enters an image fiber. The fluorescent light entering the image fiber is propagated along the image fiber to the output face of the image fiber and focused on the light-receiving zone of a photographing element, under photographing conditions set so that the relation between the pixels of aforementioned output face, upon which the fluorescent image is formed, to the pixels receiving the light of the fluorescent image within aforementioned light-receiving zone satisfies the condition expressed by the formula: $N_f \times 4 > N_d$.

(22) Filed: **Apr. 19, 2001**

(30) **Foreign Application Priority Data**

Apr. 19, 2000	(JP)	117439/2000
Jun. 9, 2000	(JP)	174165/2000

Publication Classification

(51) **Int. Cl.⁷** **G03B 29/00**

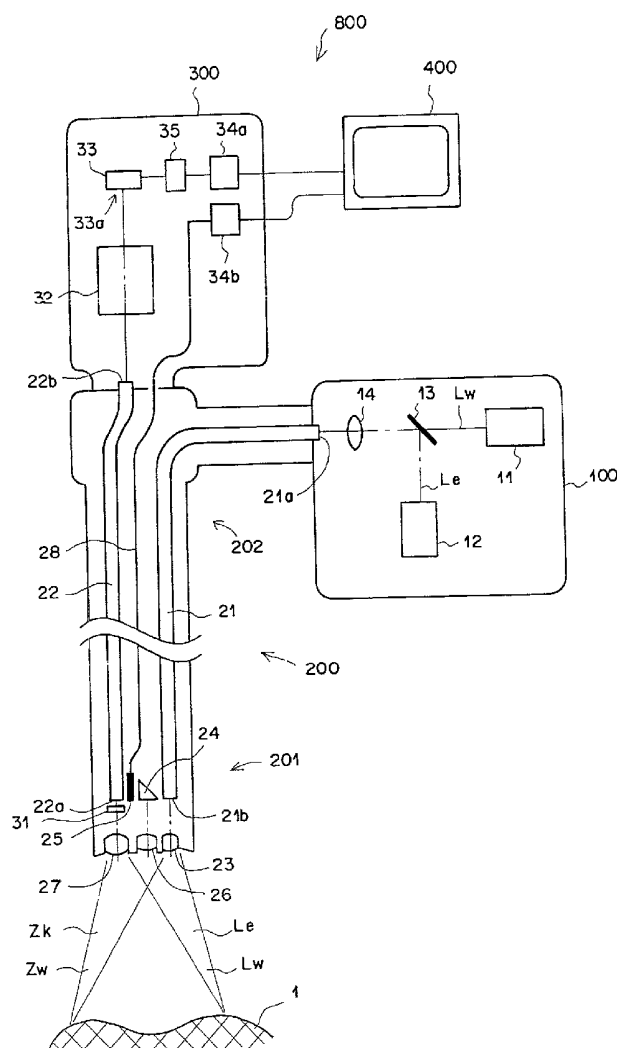


FIG. 1



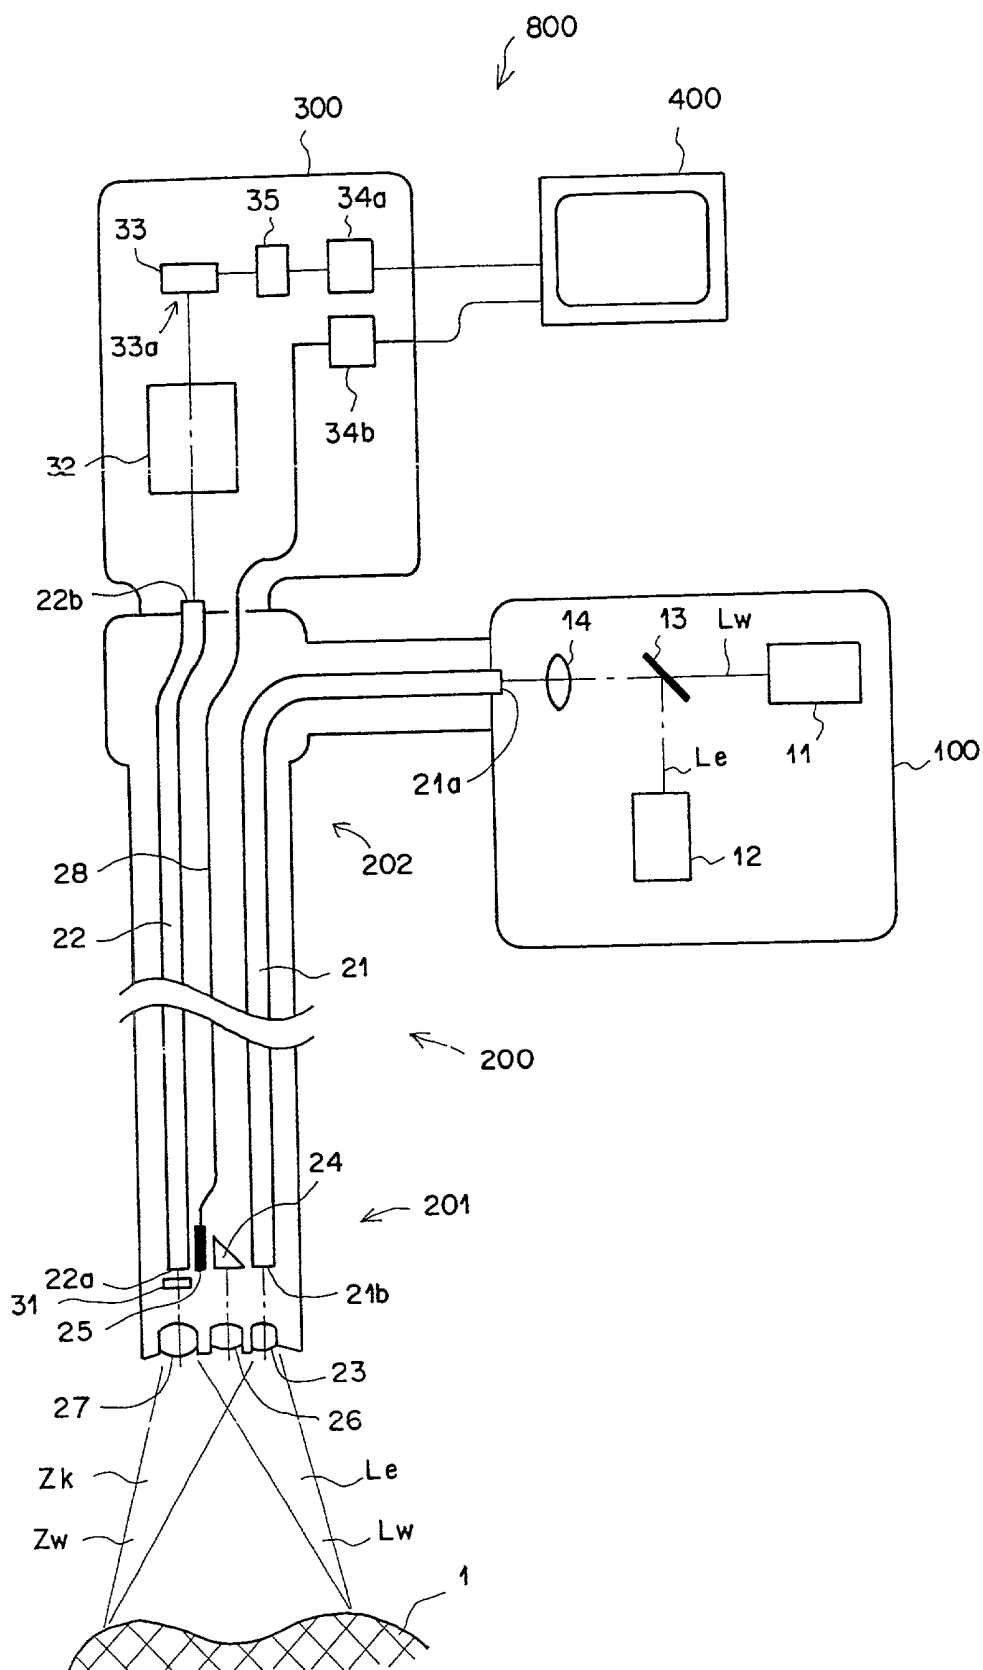



FIG. 2

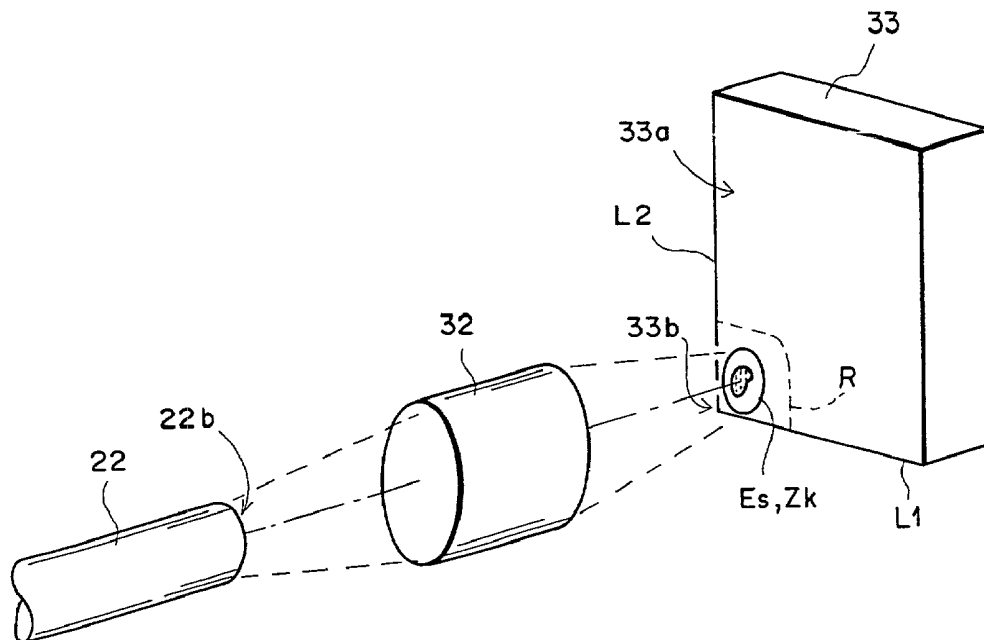


F I G . 3

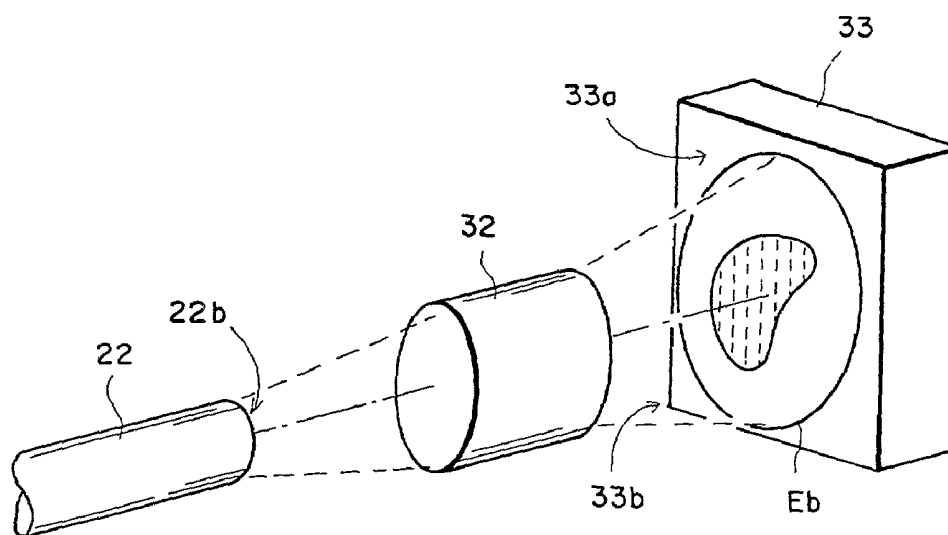

F I G. 4A

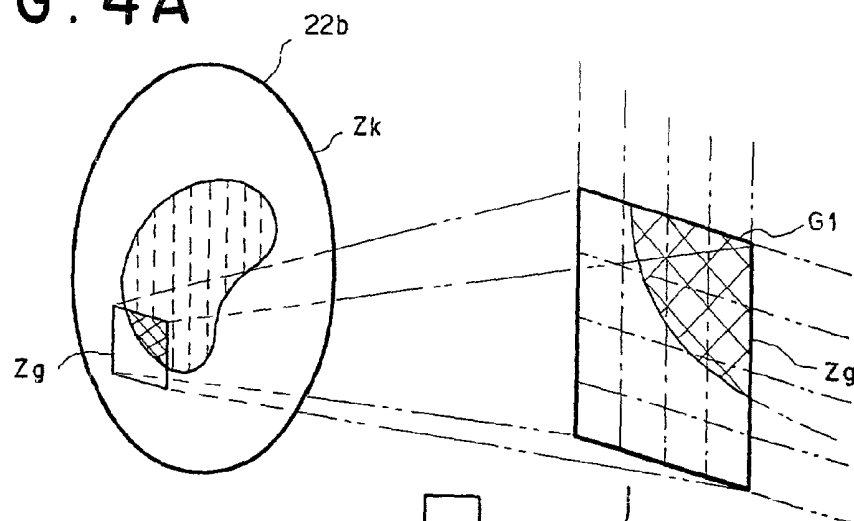

F I G. 4B

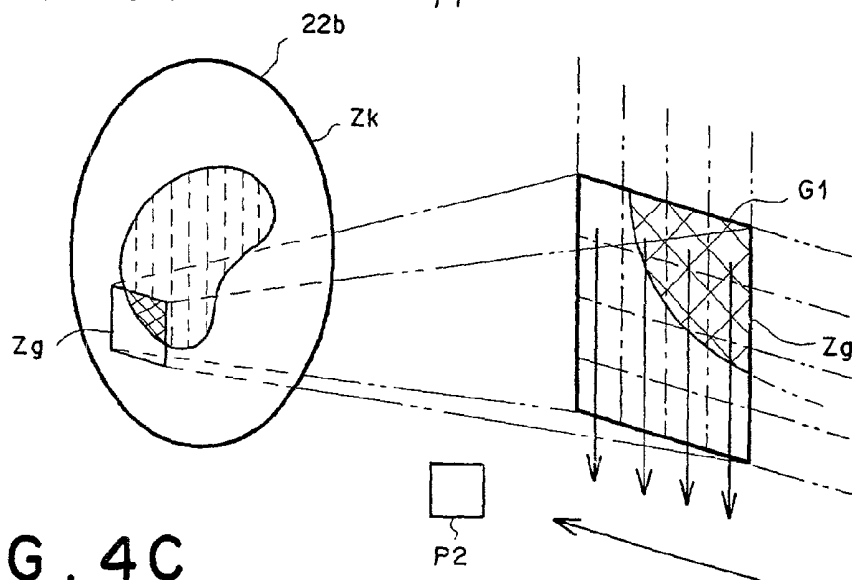

F I G. 4C

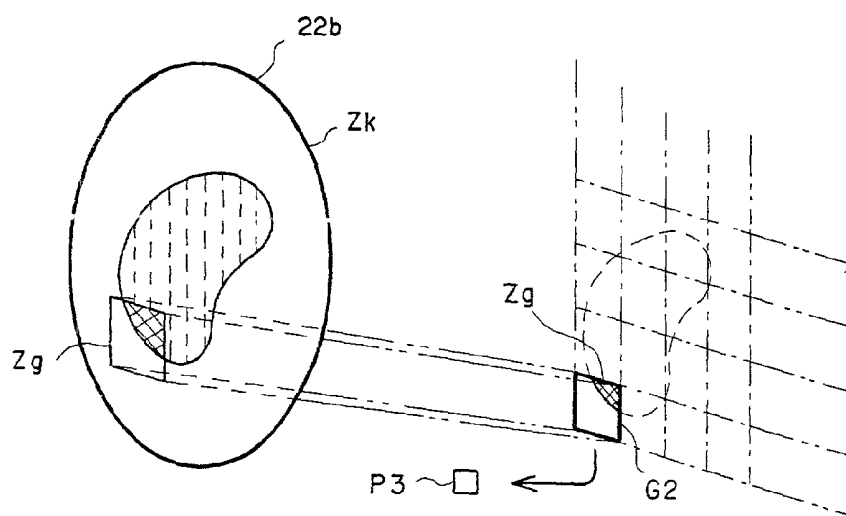


FIG. 5A



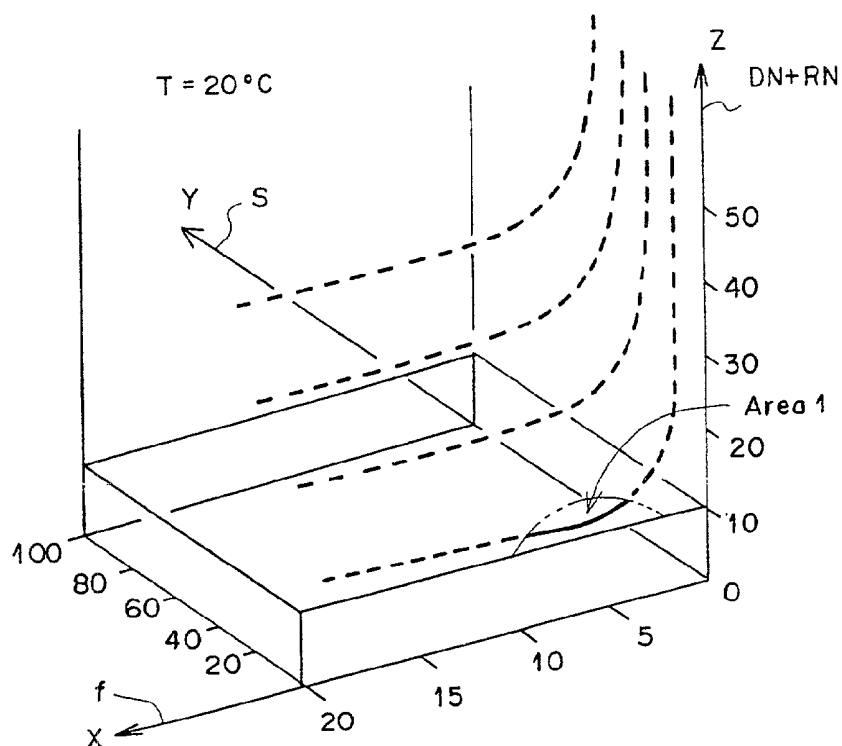



FIG. 5B

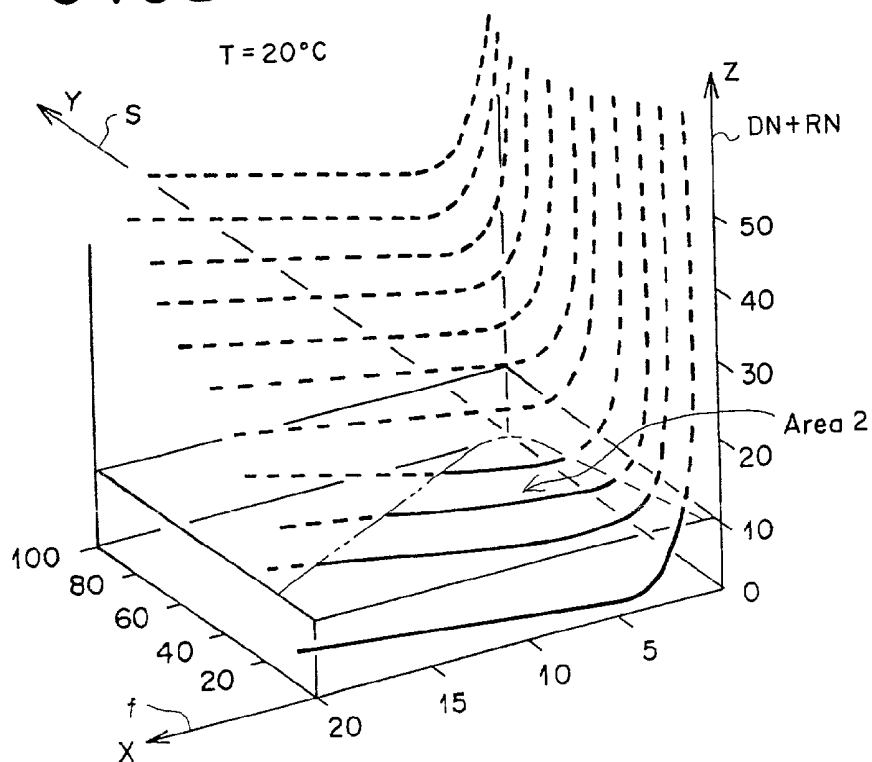


F I G. 6A

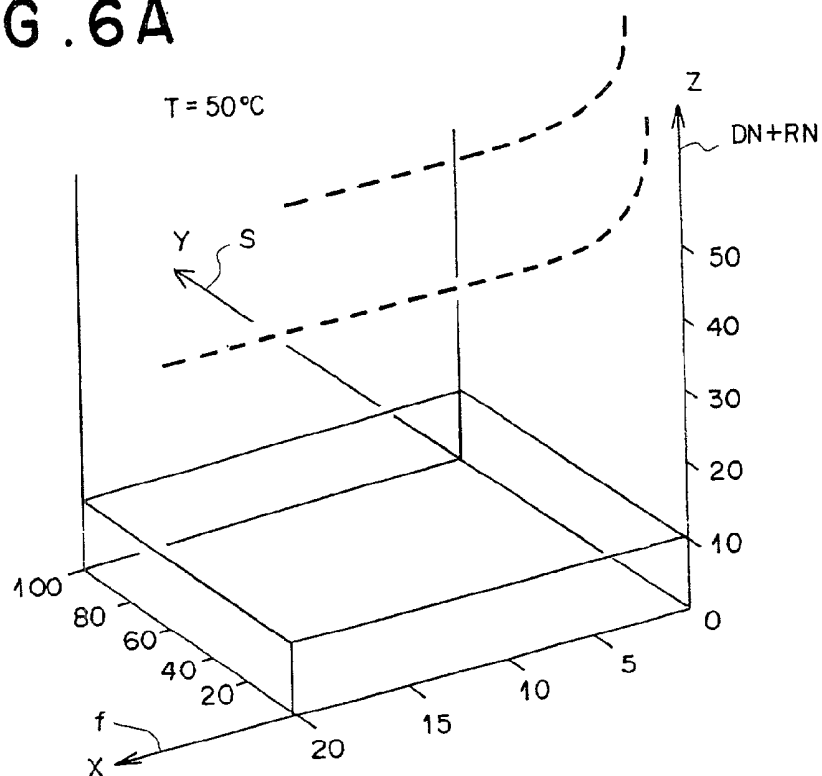


F I G. 6B

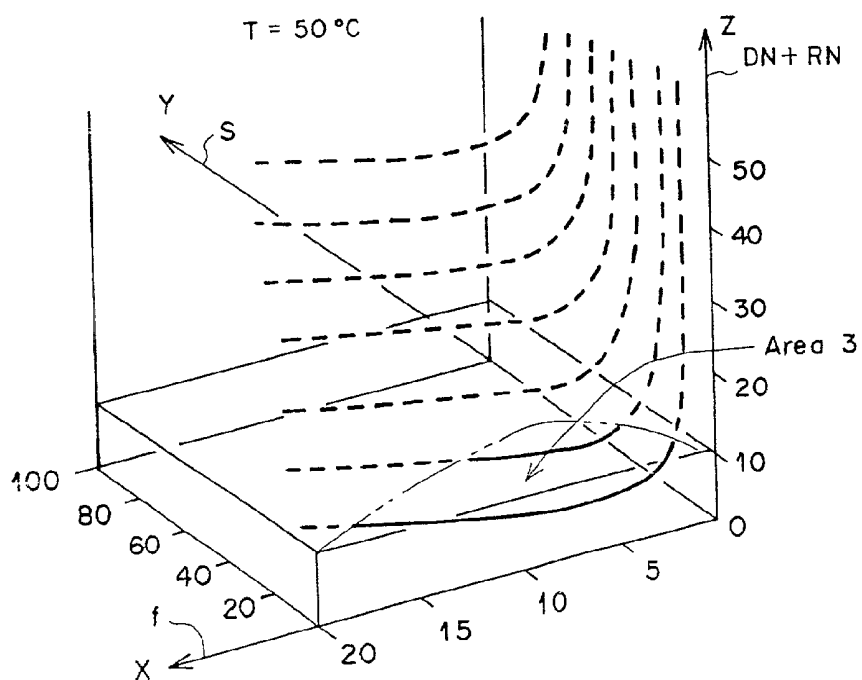


F I G . 7 A

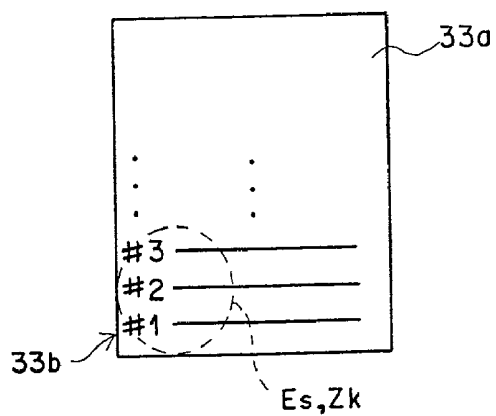

F I G . 7 B

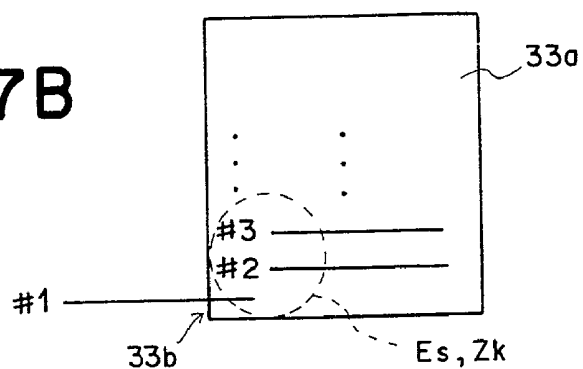

F I G . 7 C

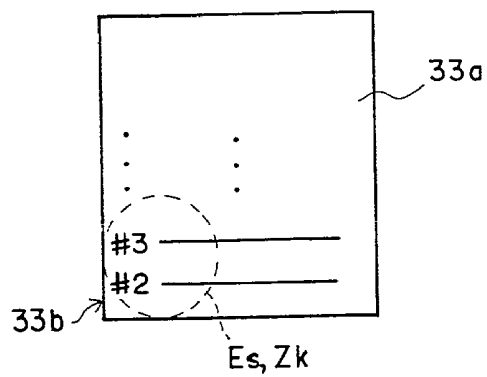

F I G . 7 D



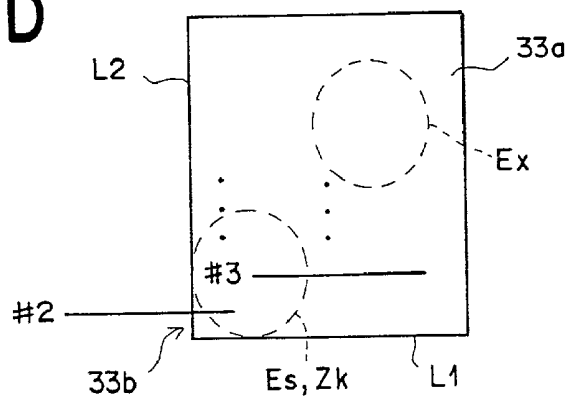



FIG. 8

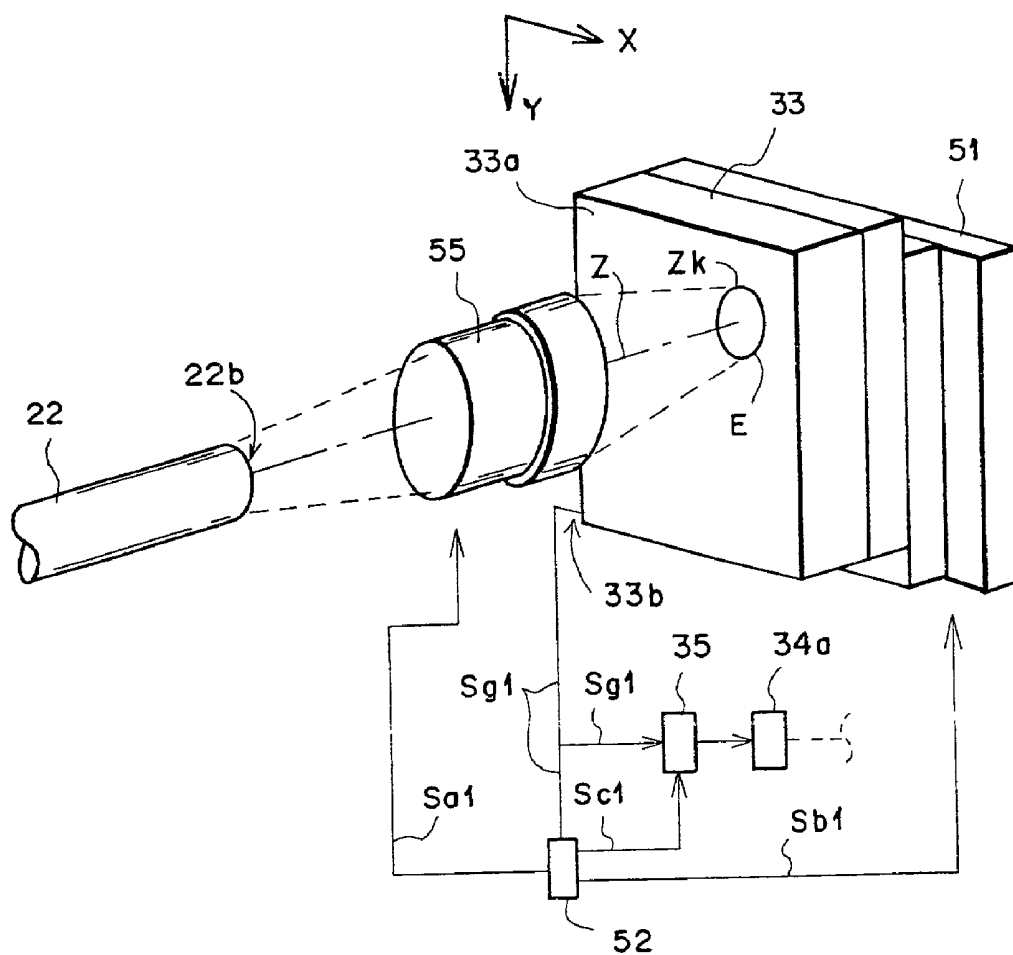

F I G . 9

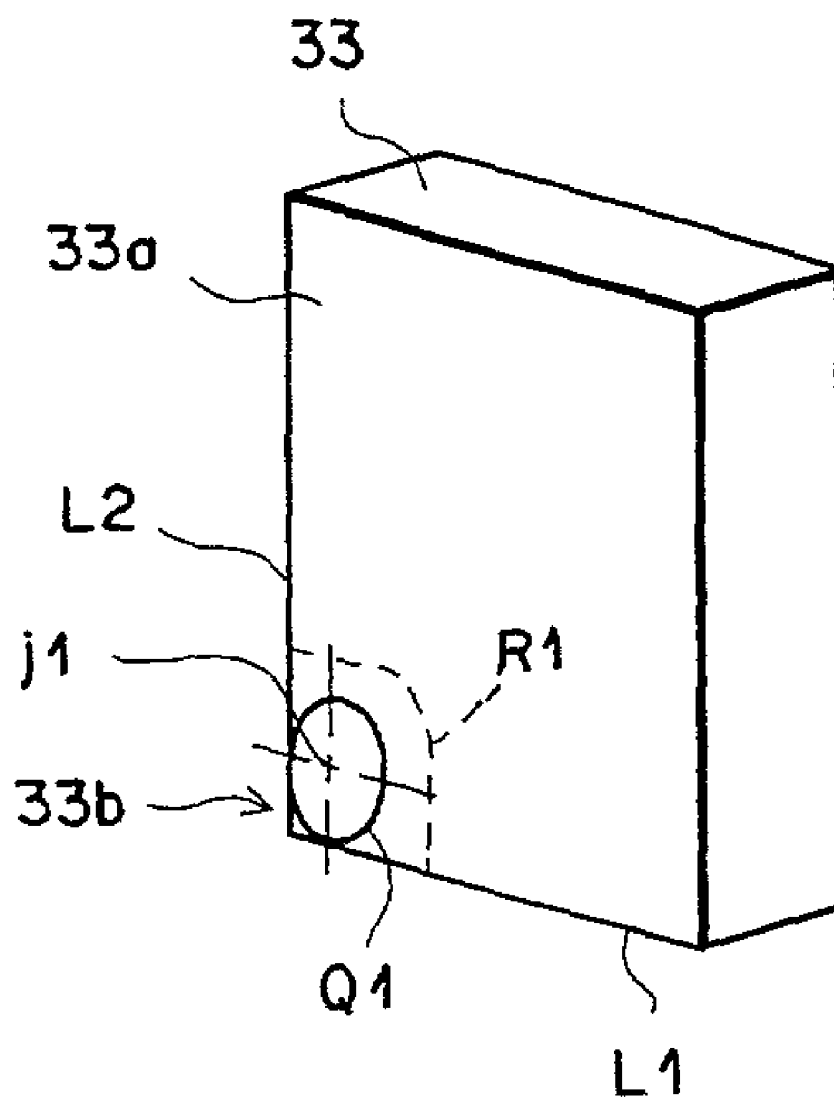

F I G . 10

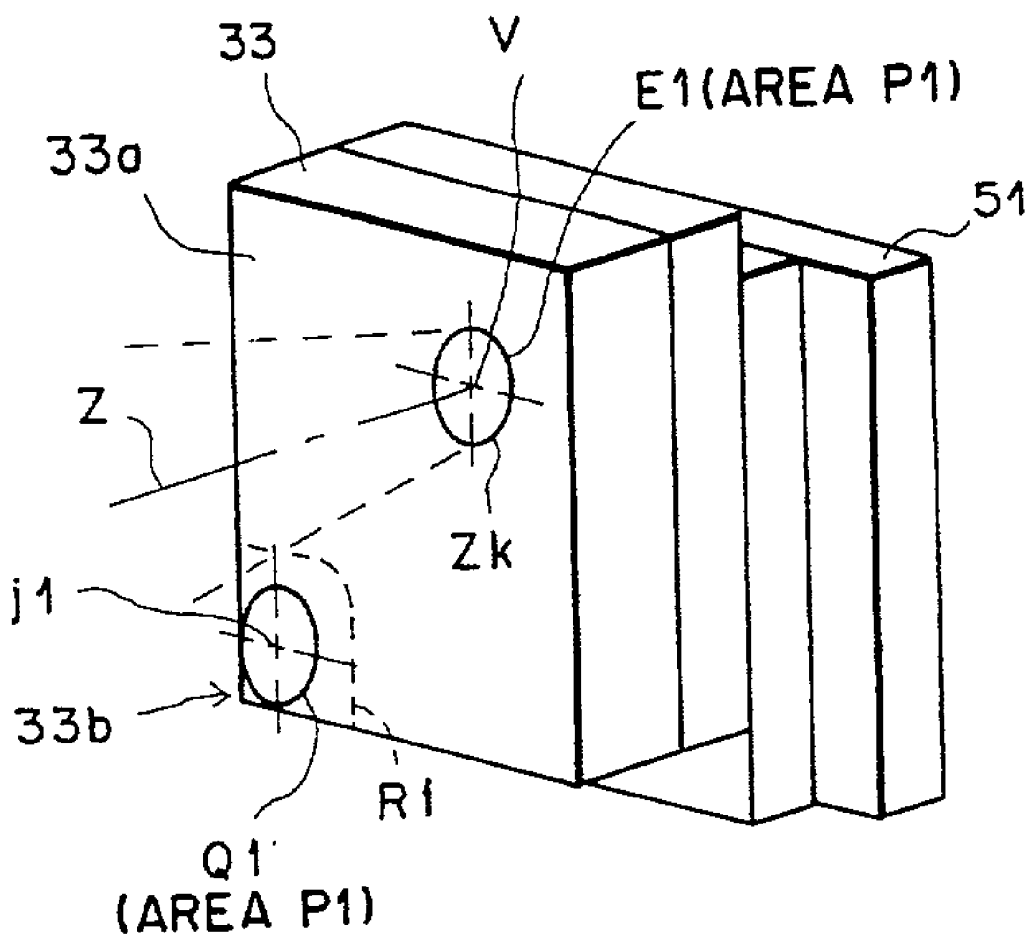

F I G . 11



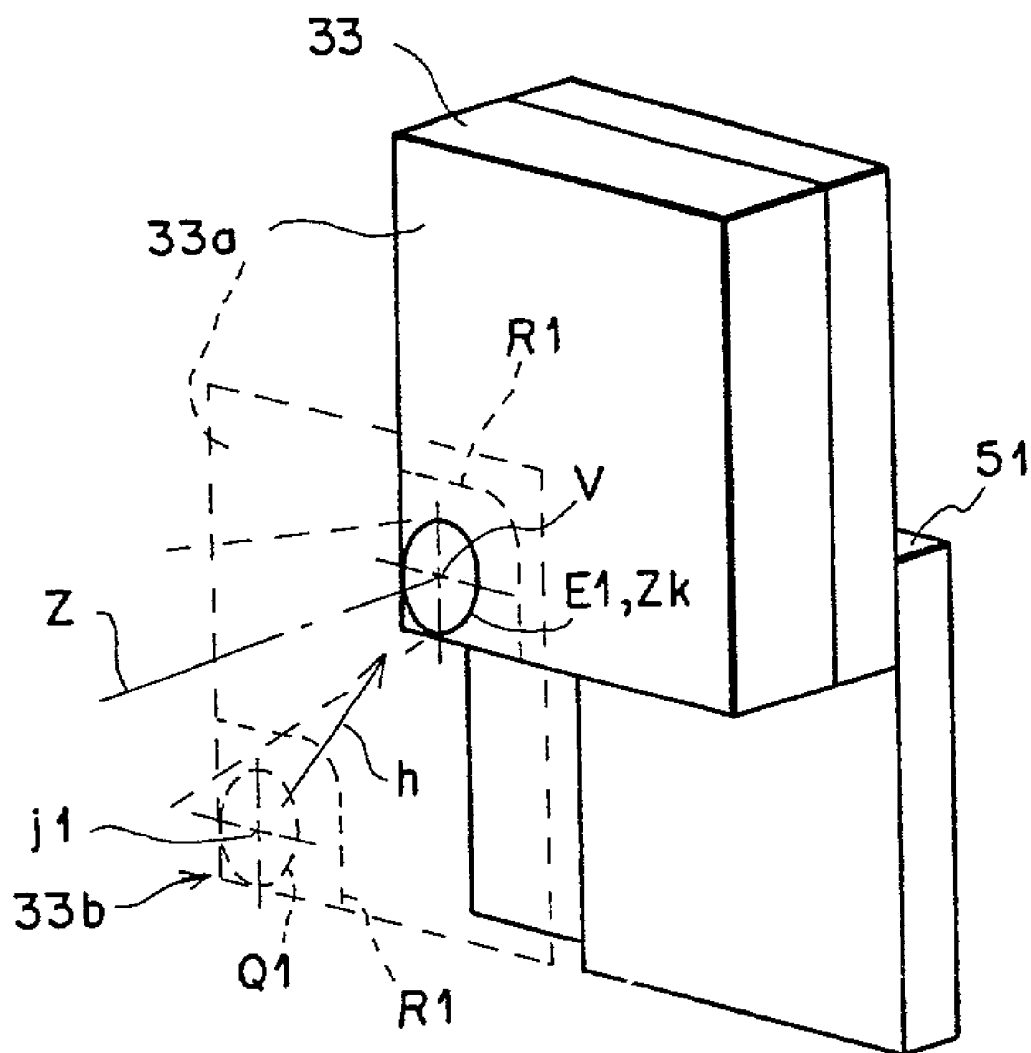



FIG. 12

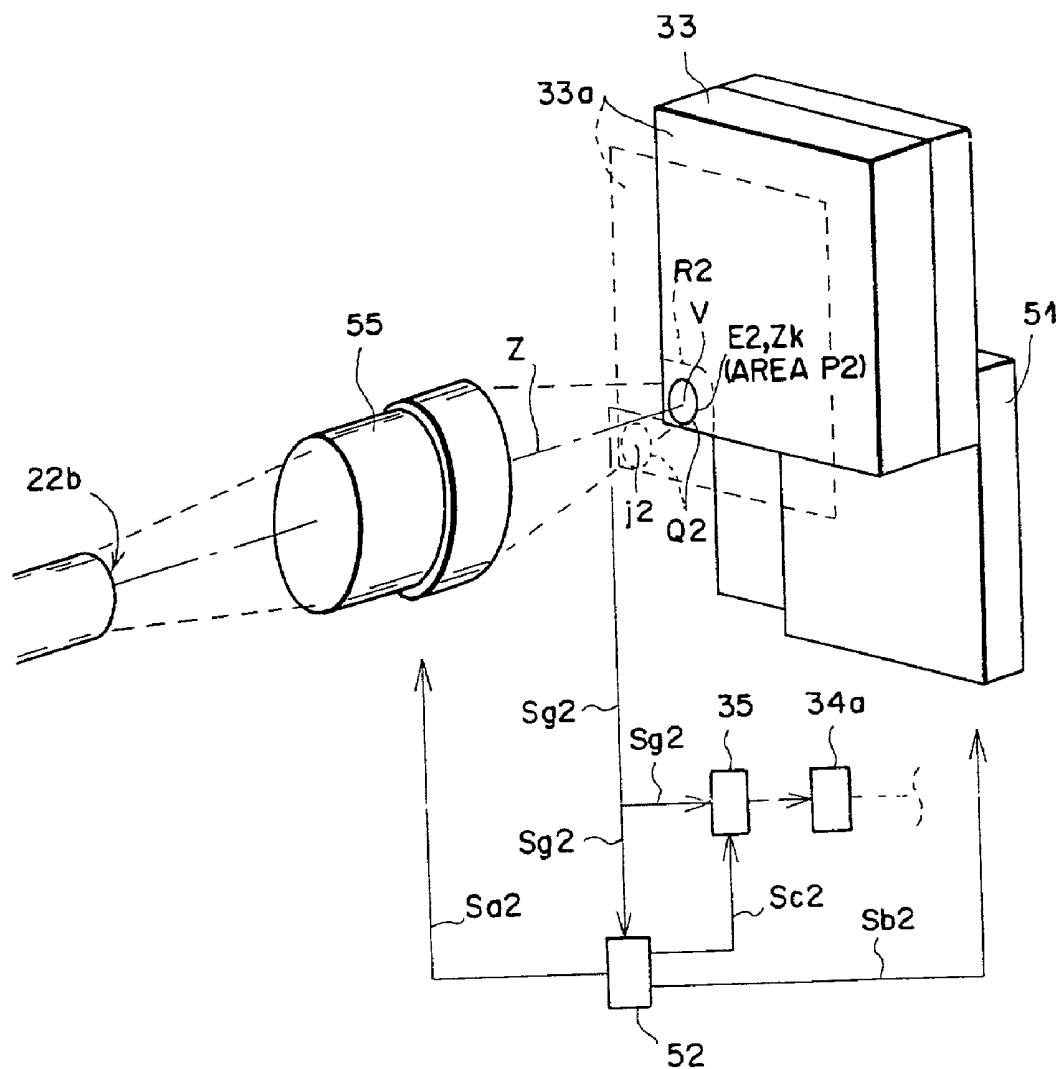


F I G . 13

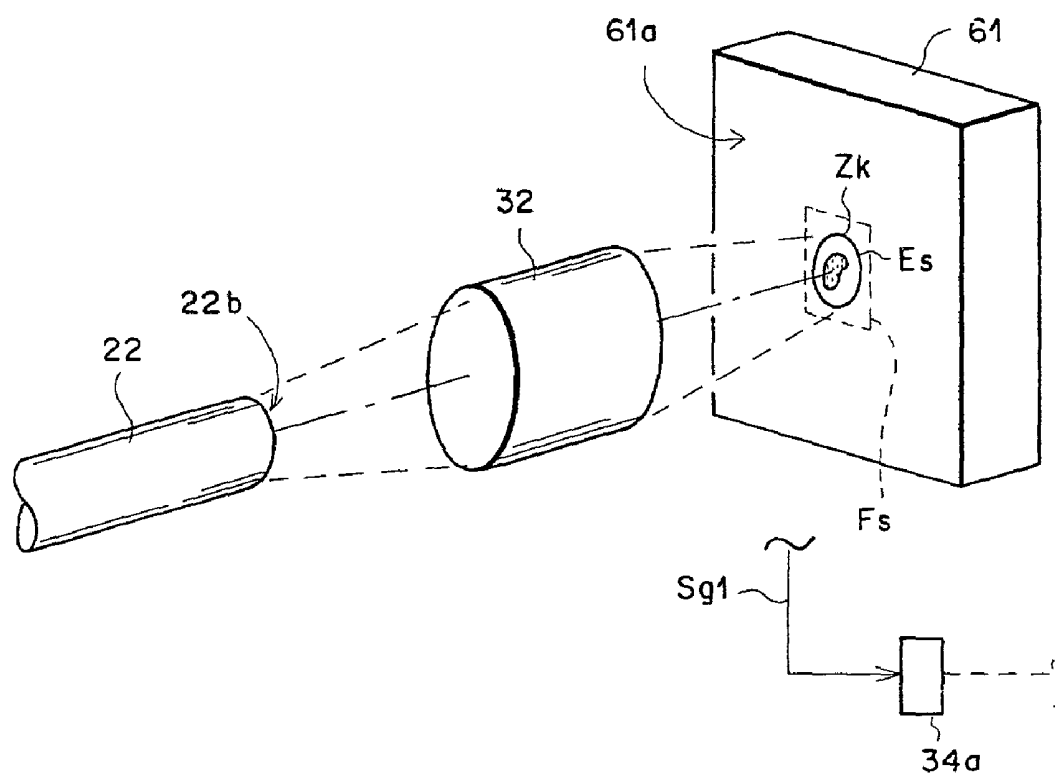


F I G . 14

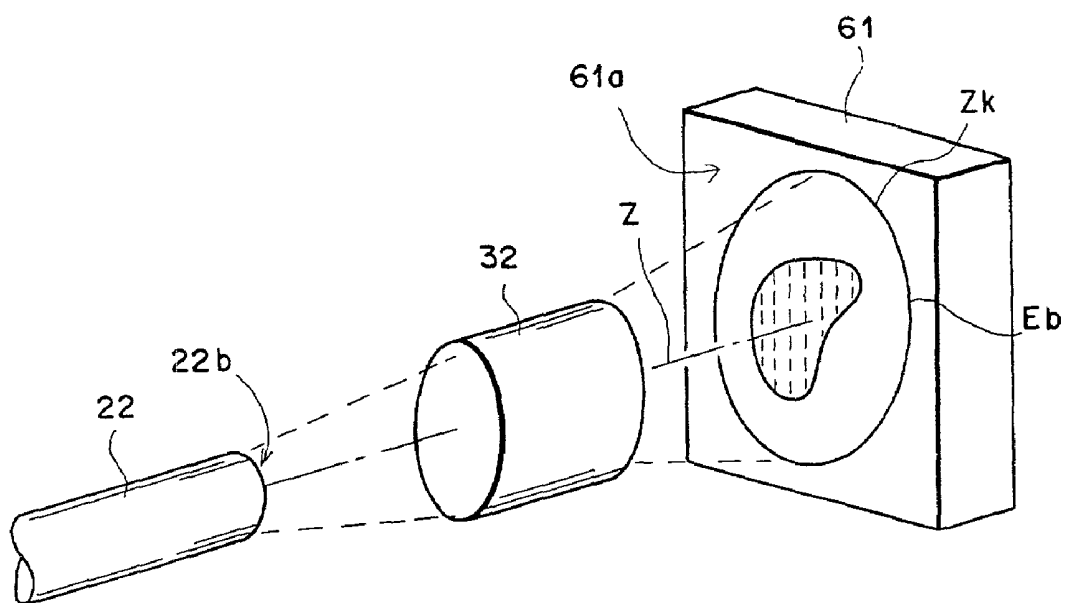

F I G . 15

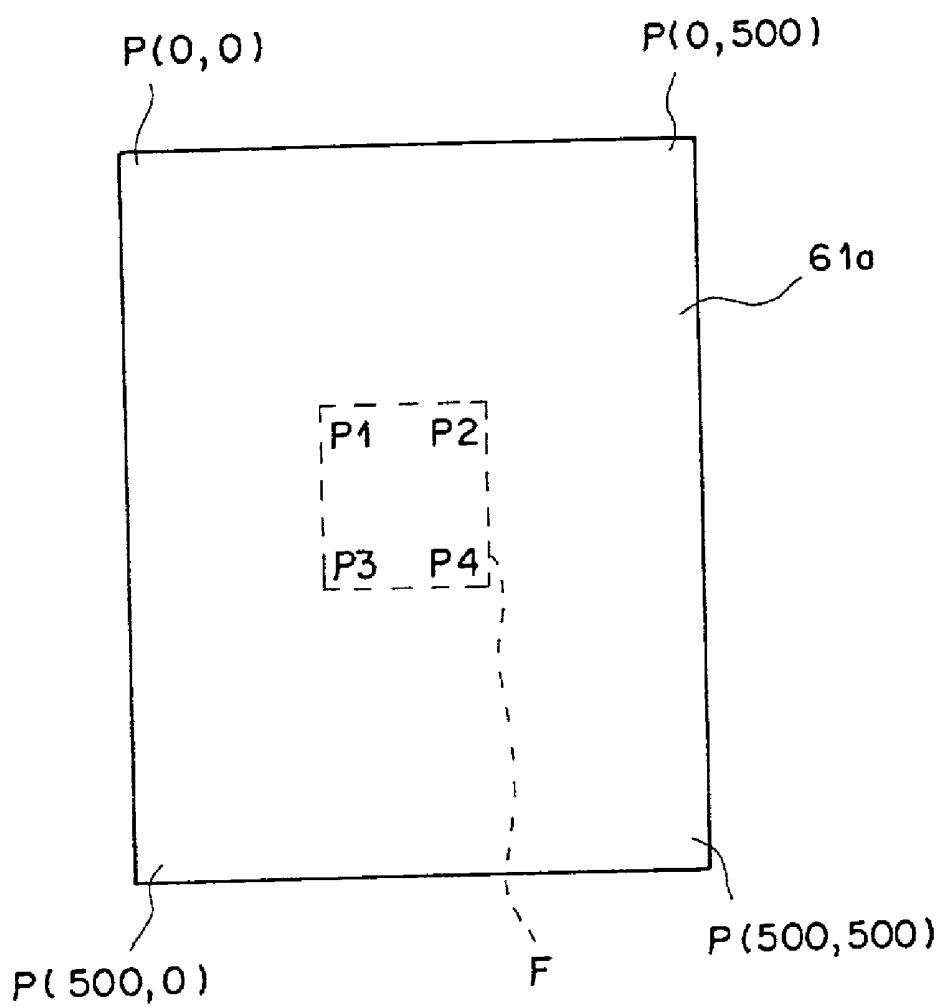

F I G . 16

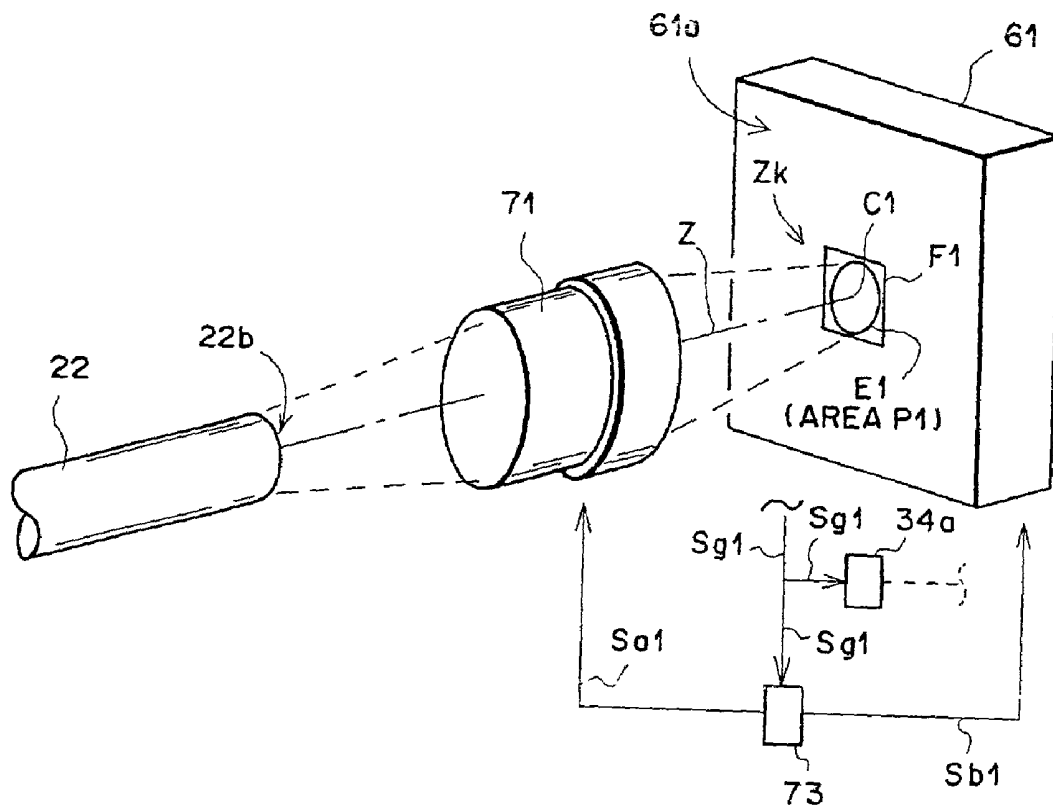

F I G . 17


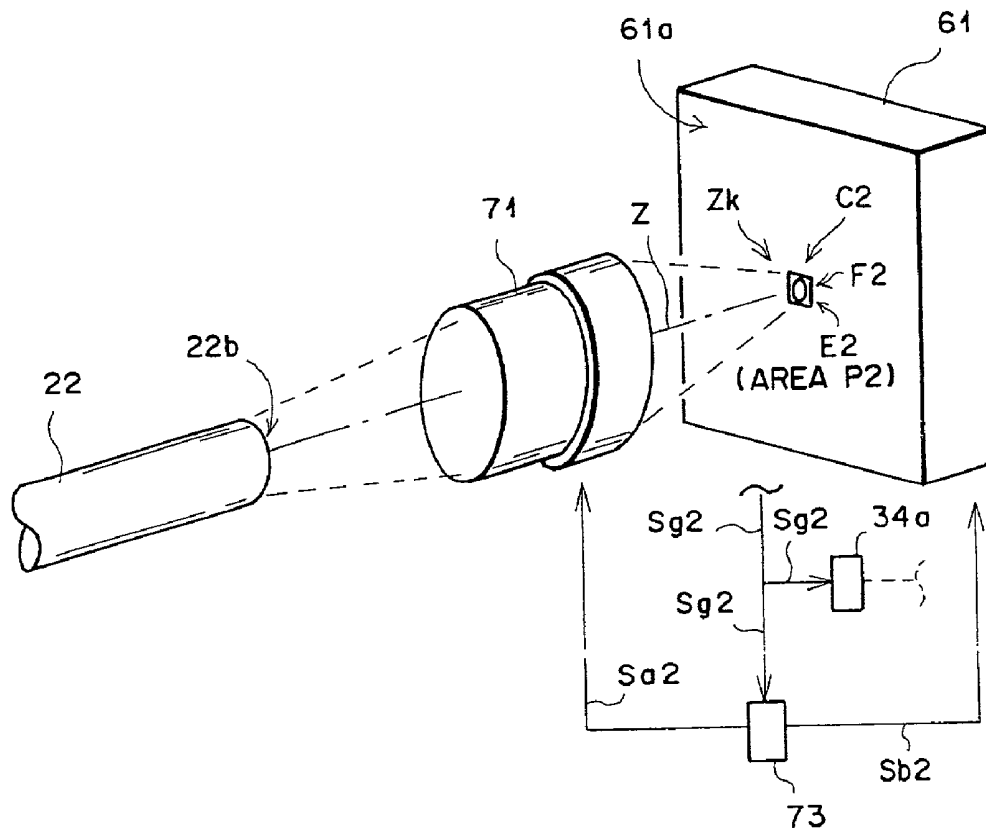


FIG. 18

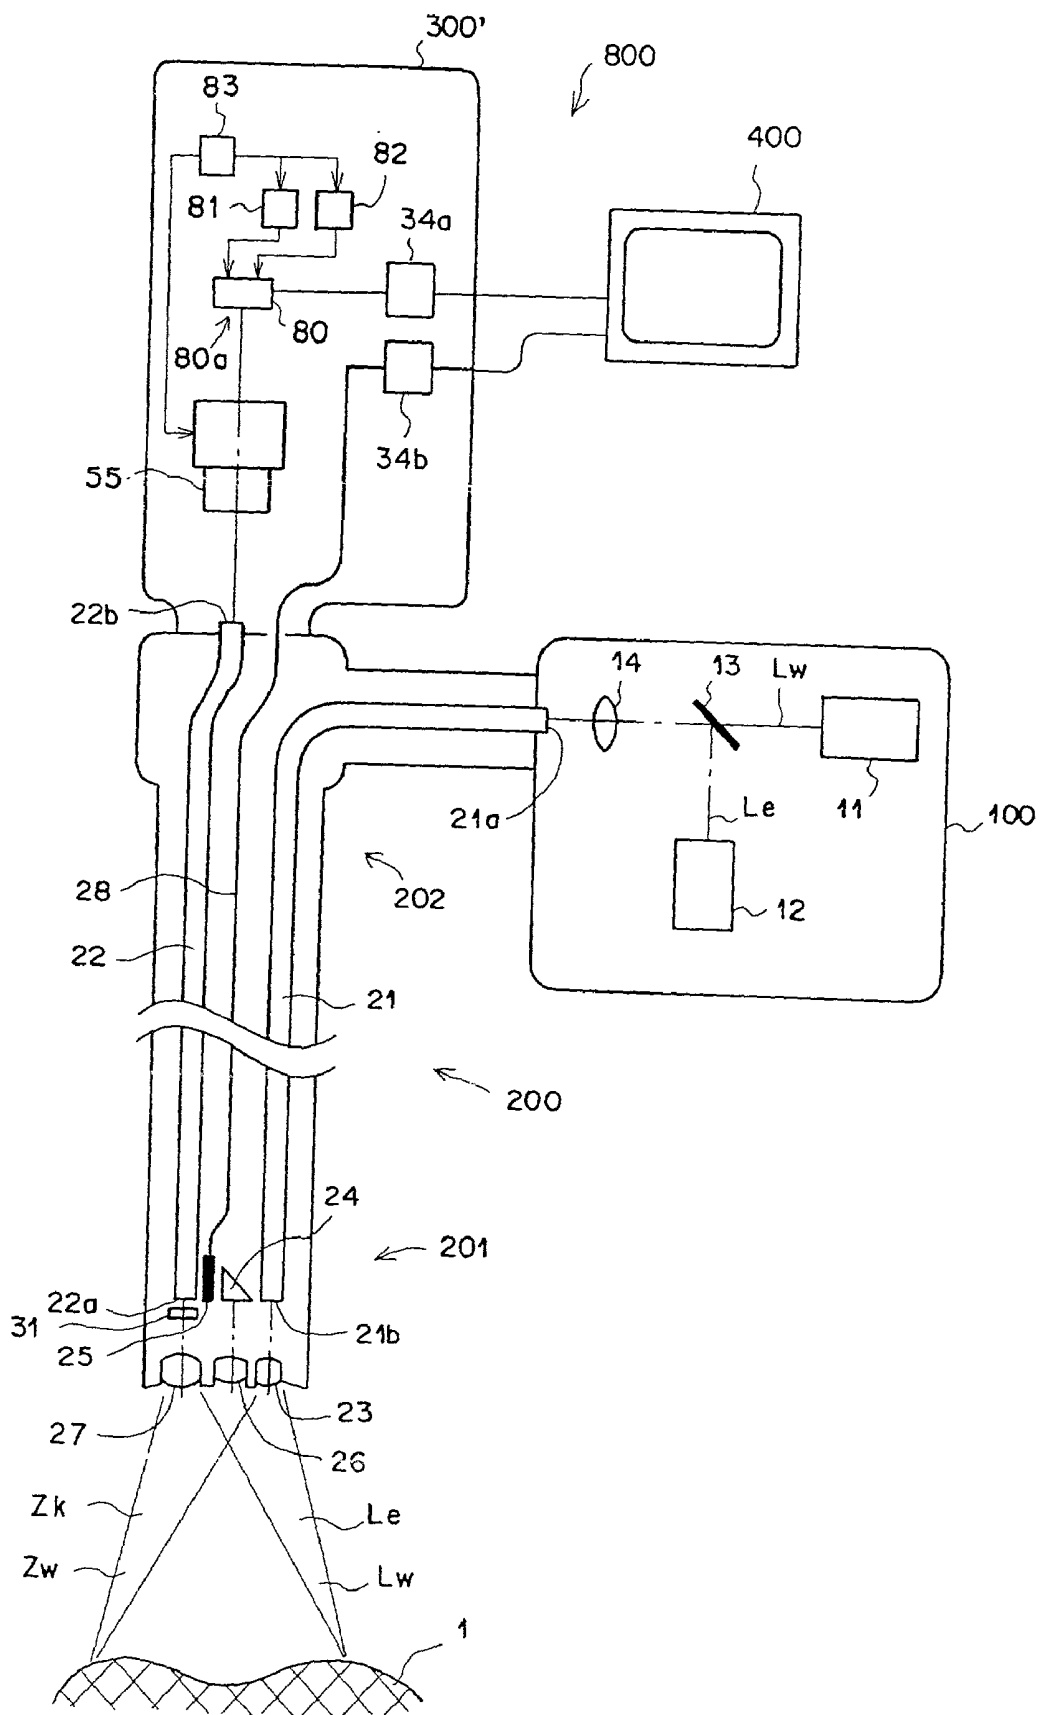

F I G . 19

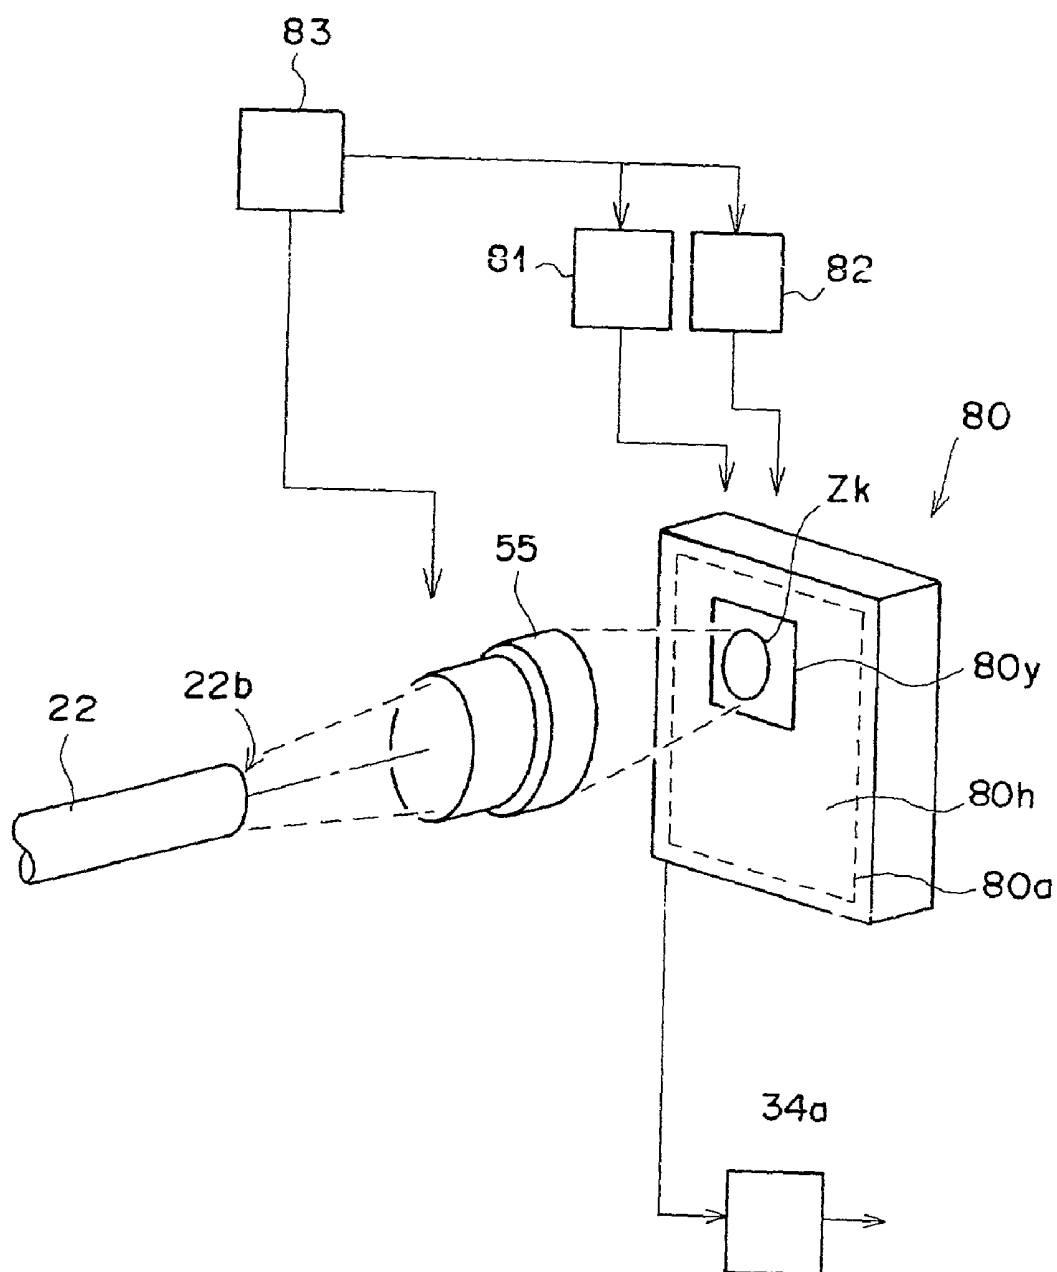


FIG. 20



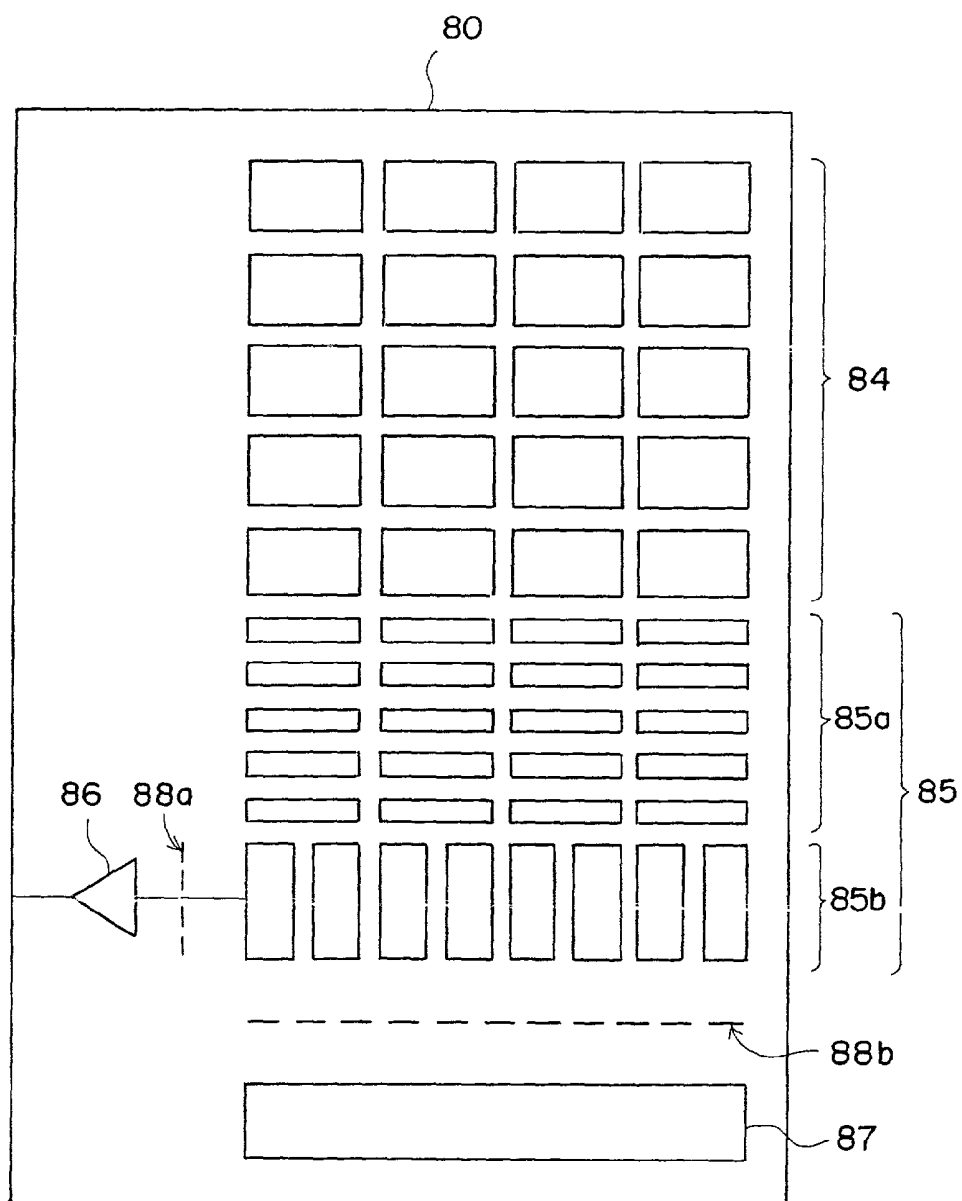


FIG. 21

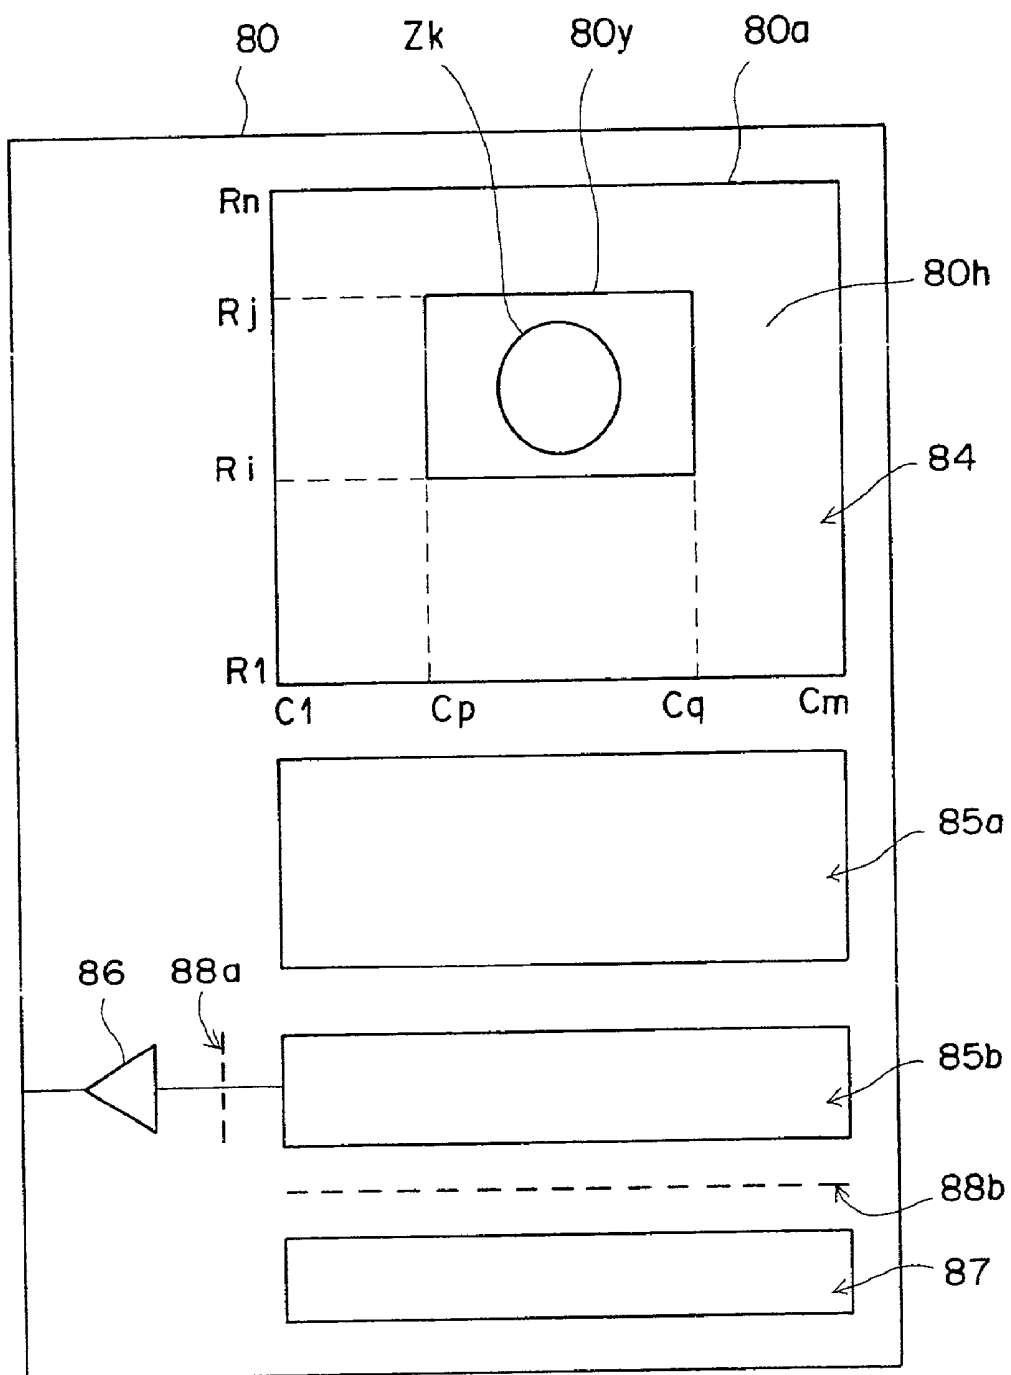

F I G . 22

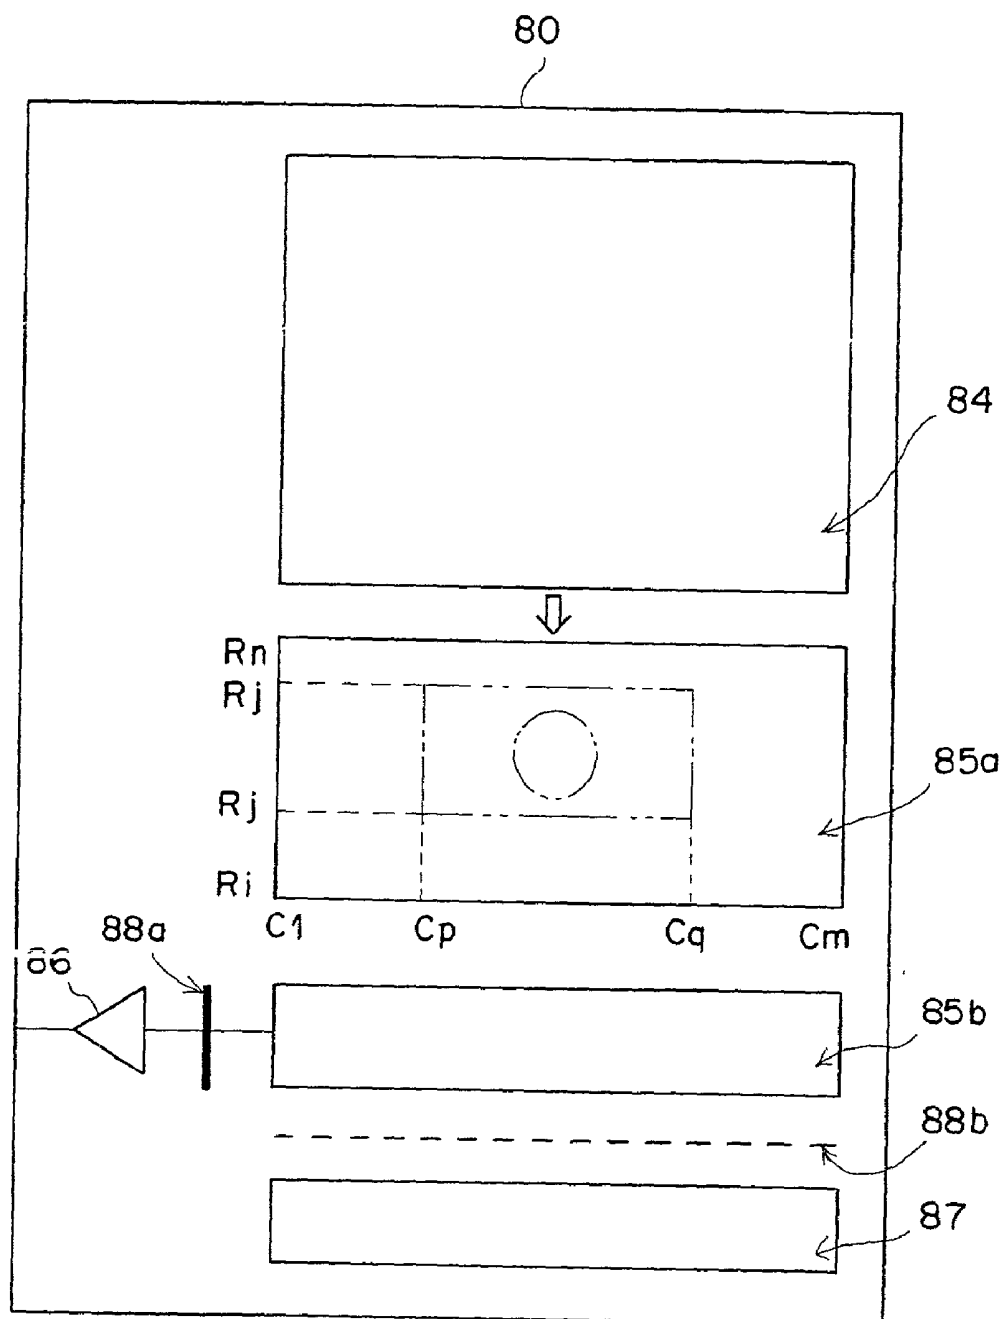

F I G . 23

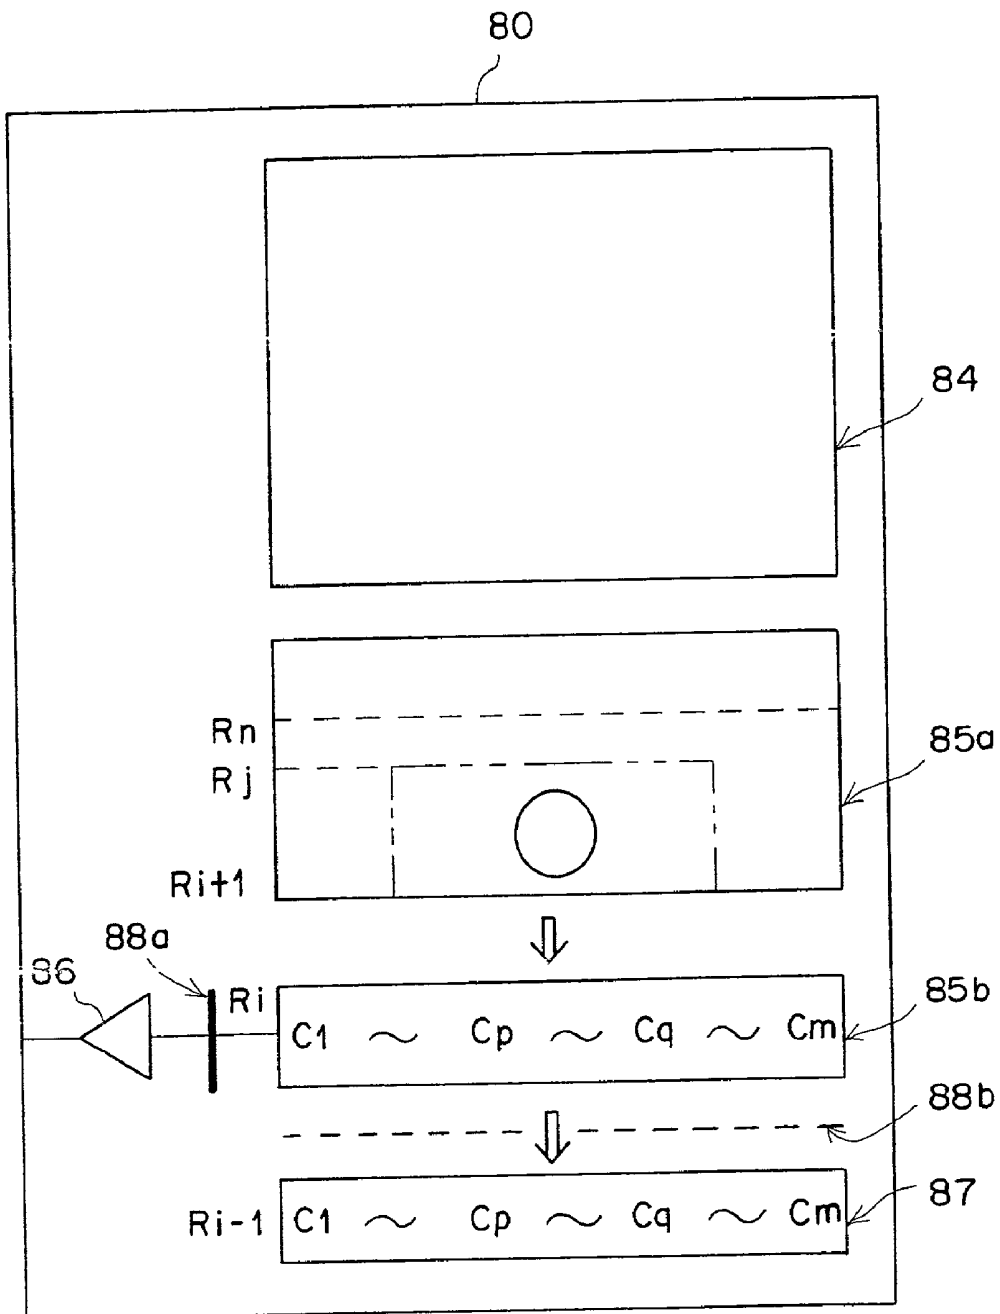


FIG. 24

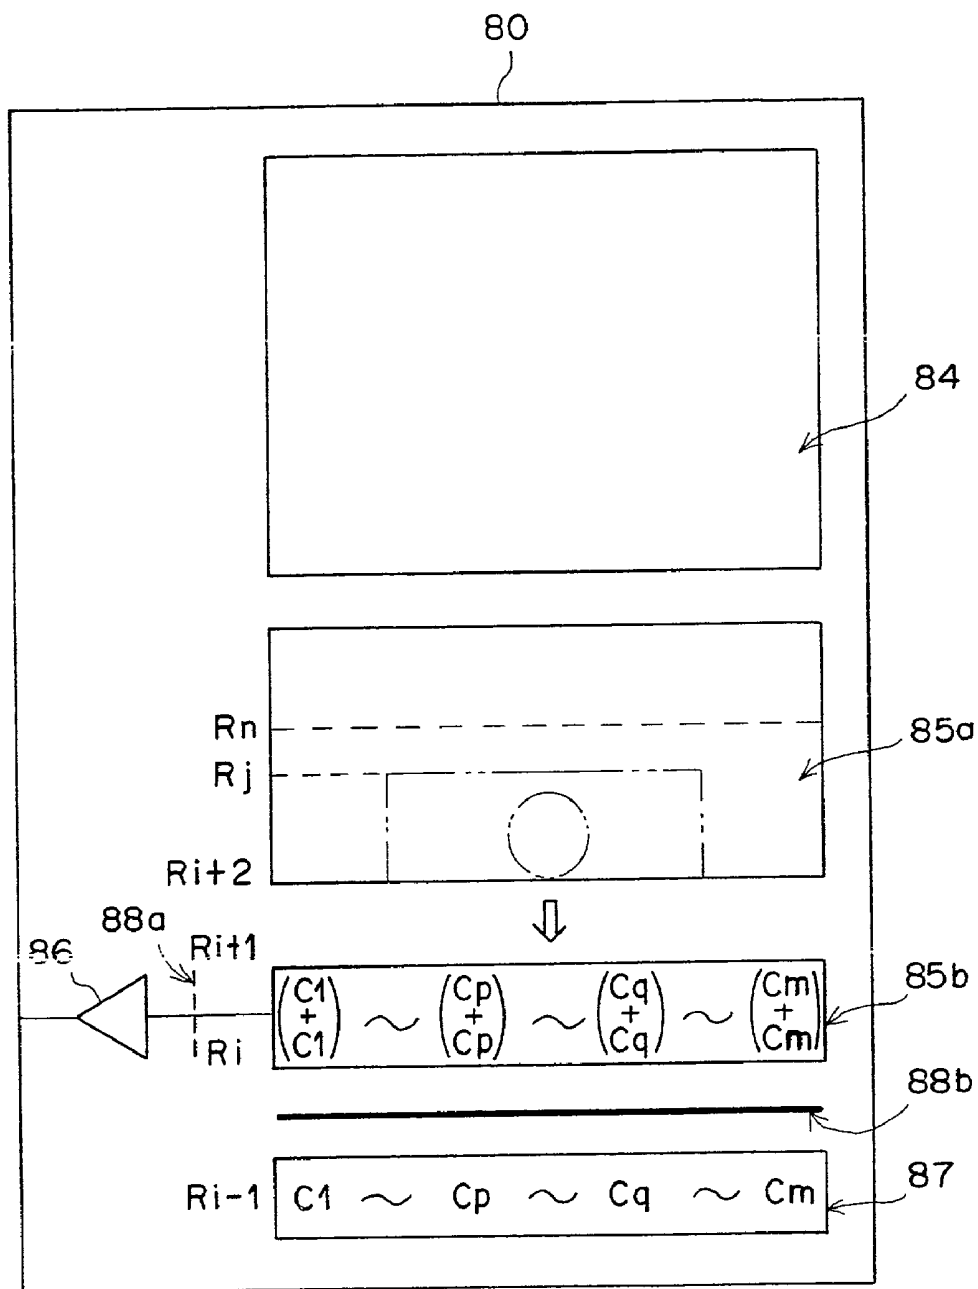


FIG. 25

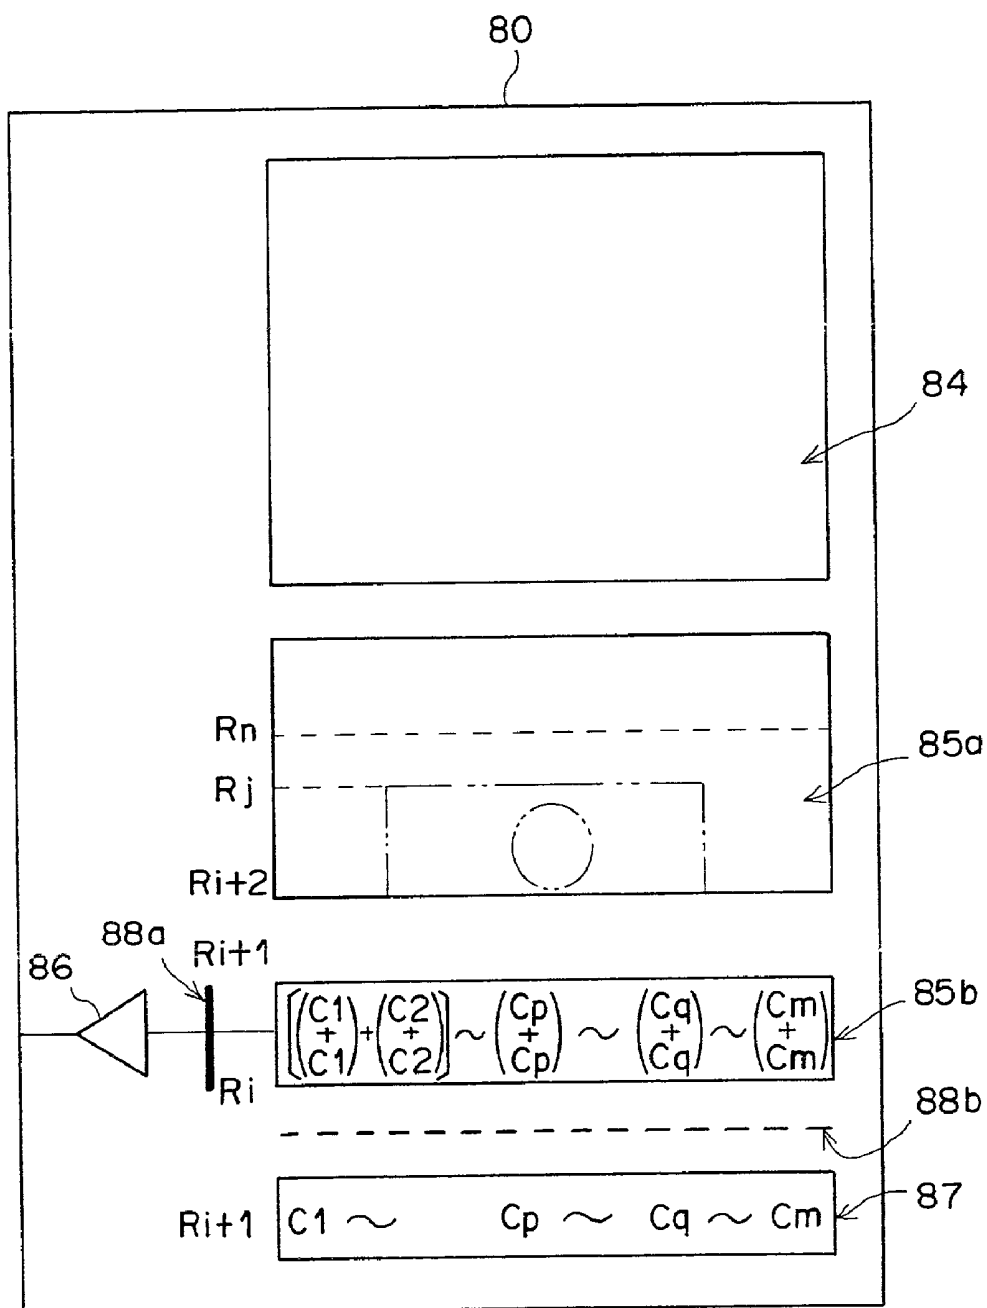


FIG. 26



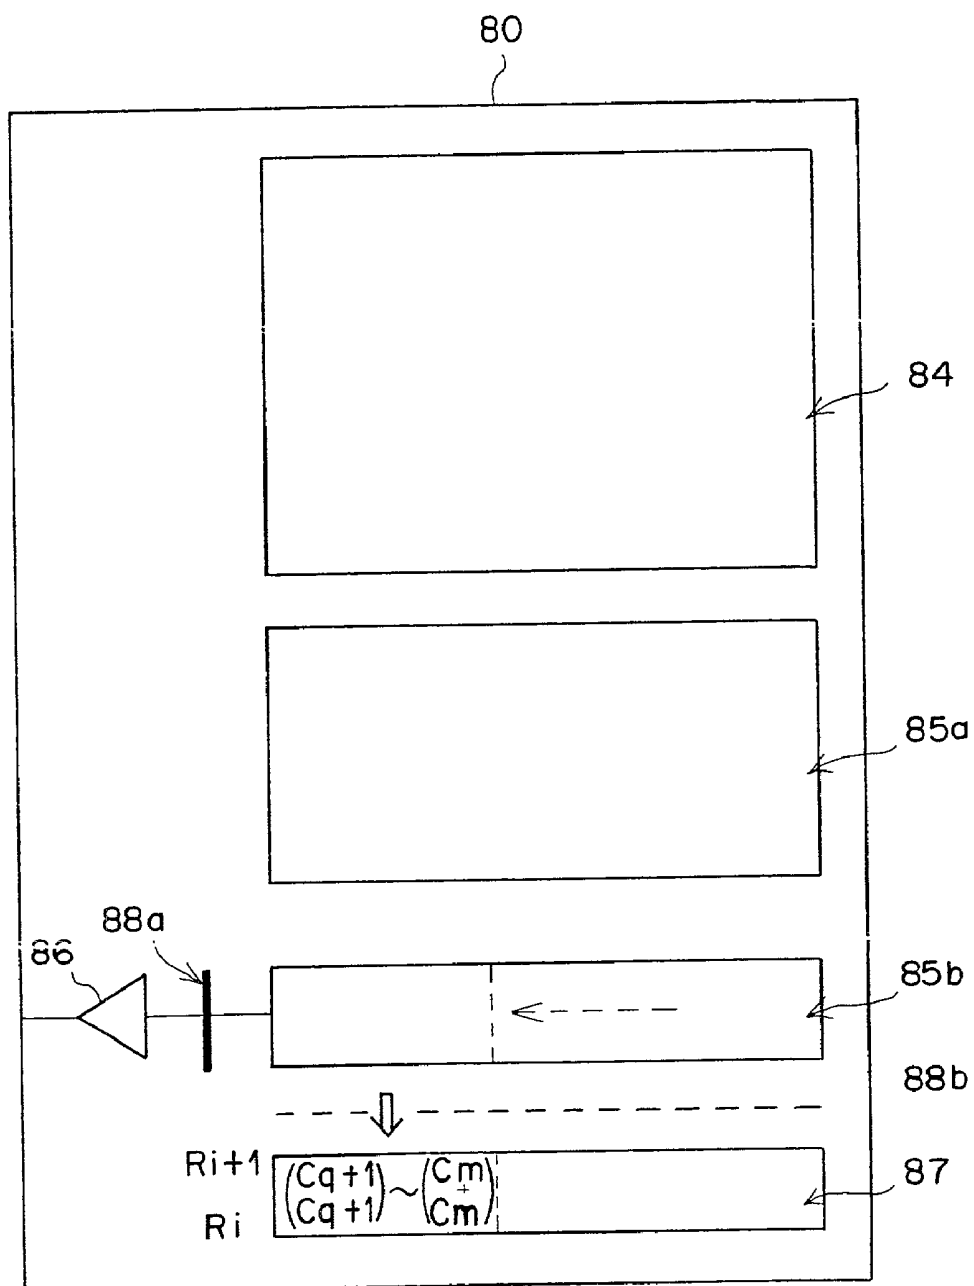



FIG. 27

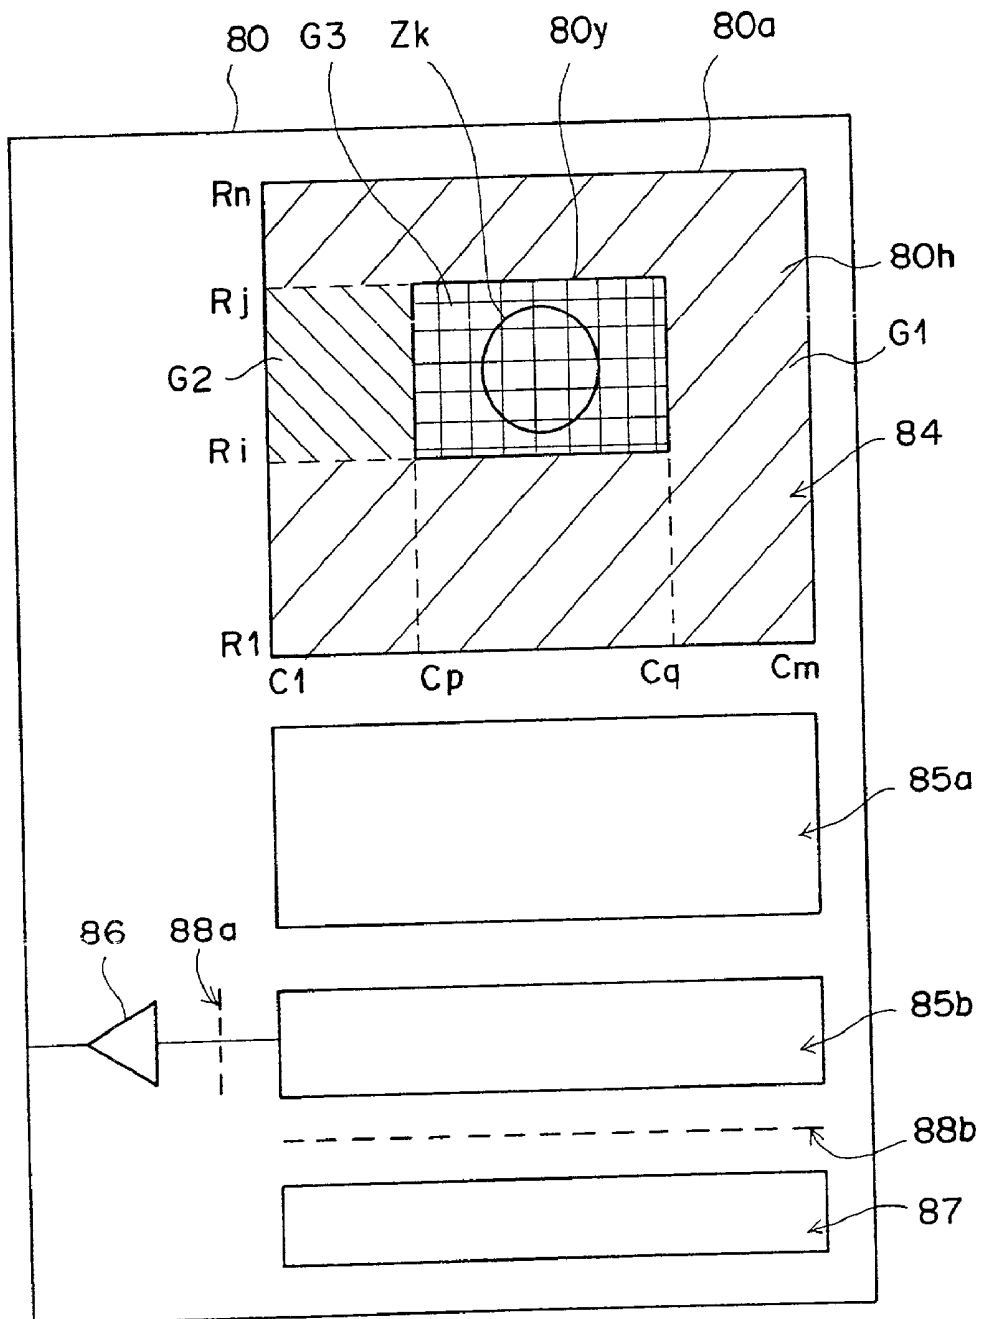


F I G . 28

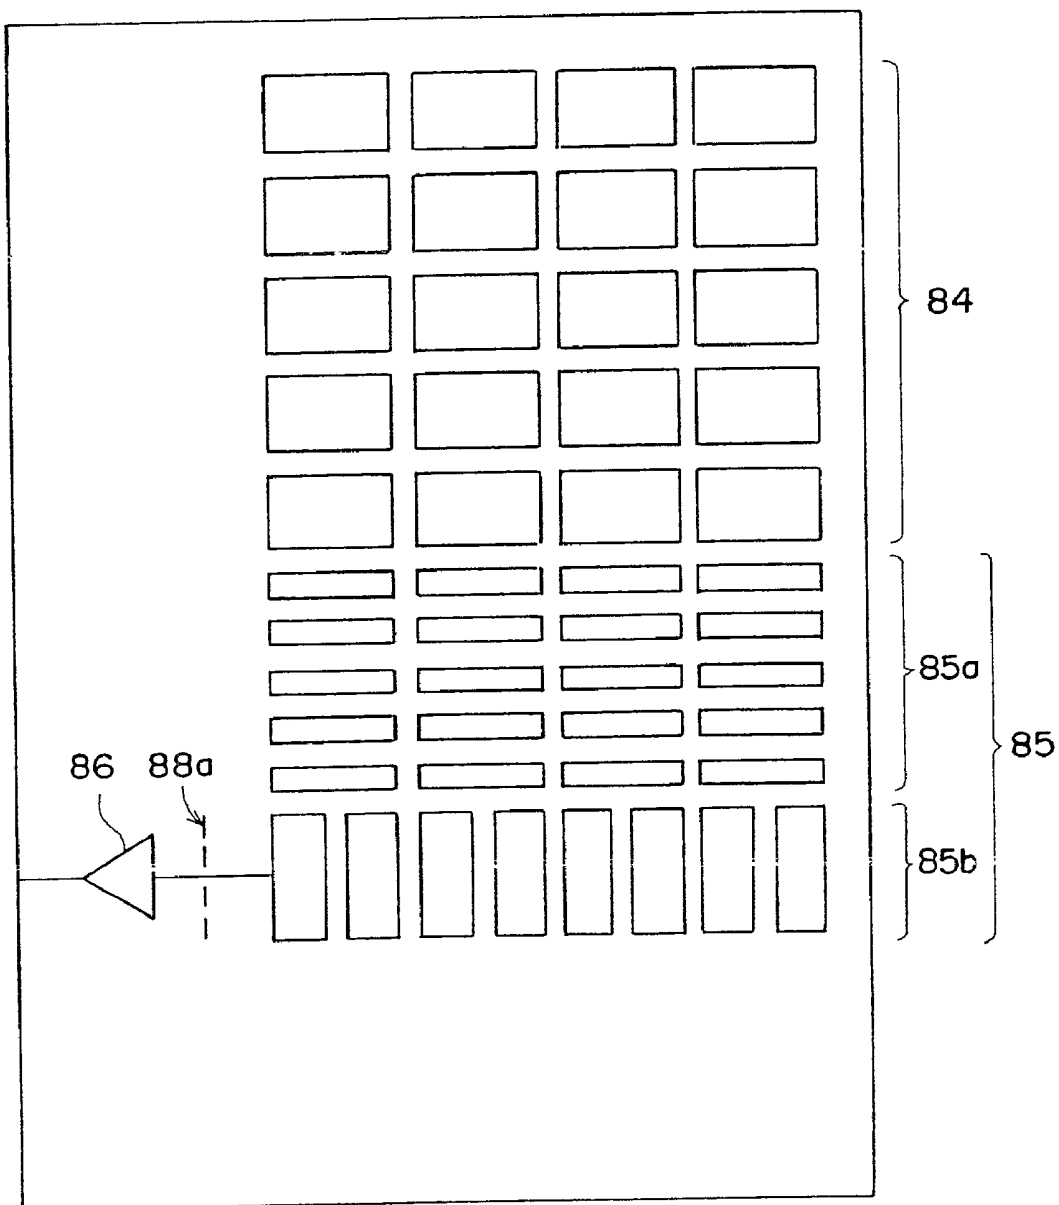


F I G . 29

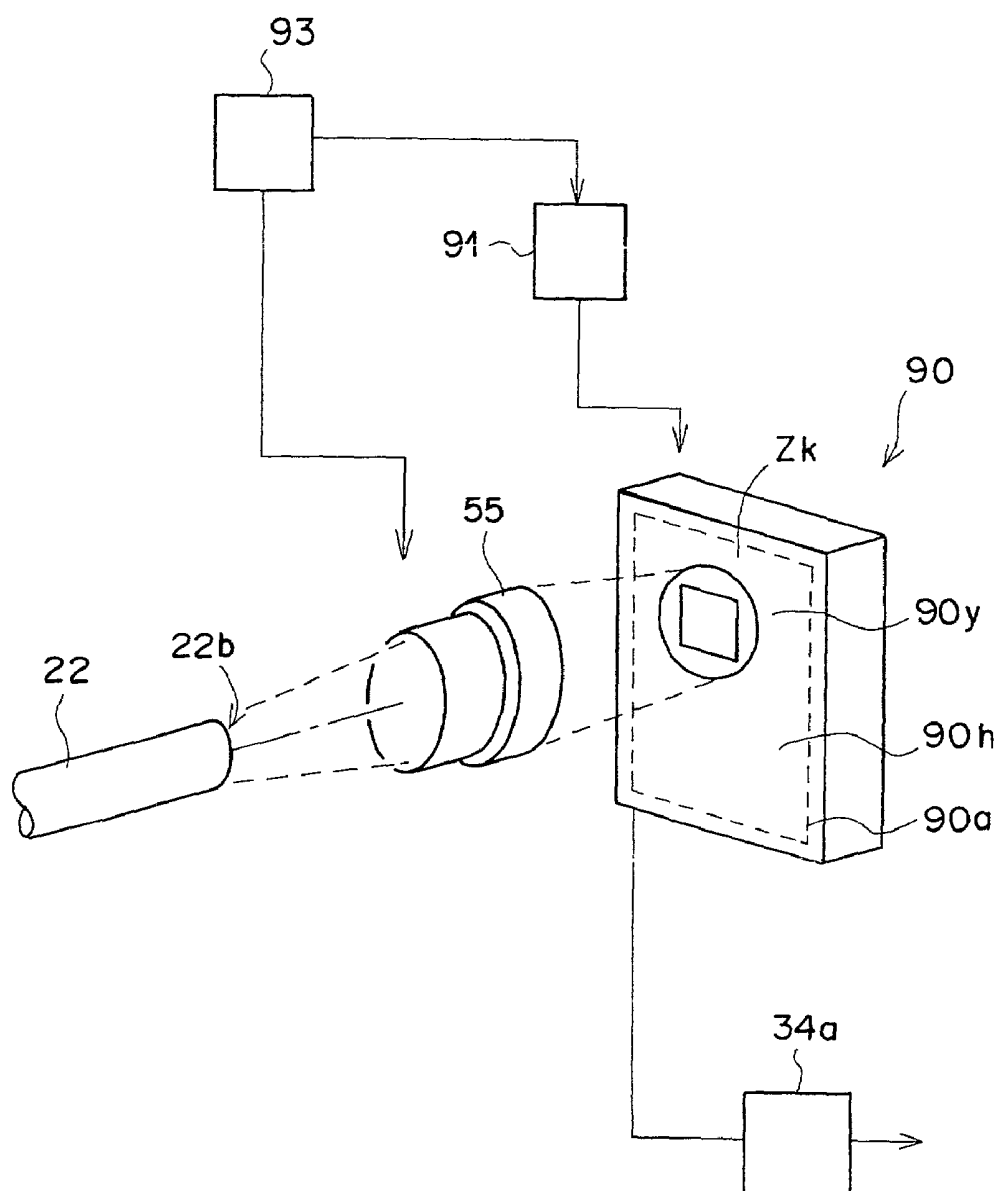


F I G . 30

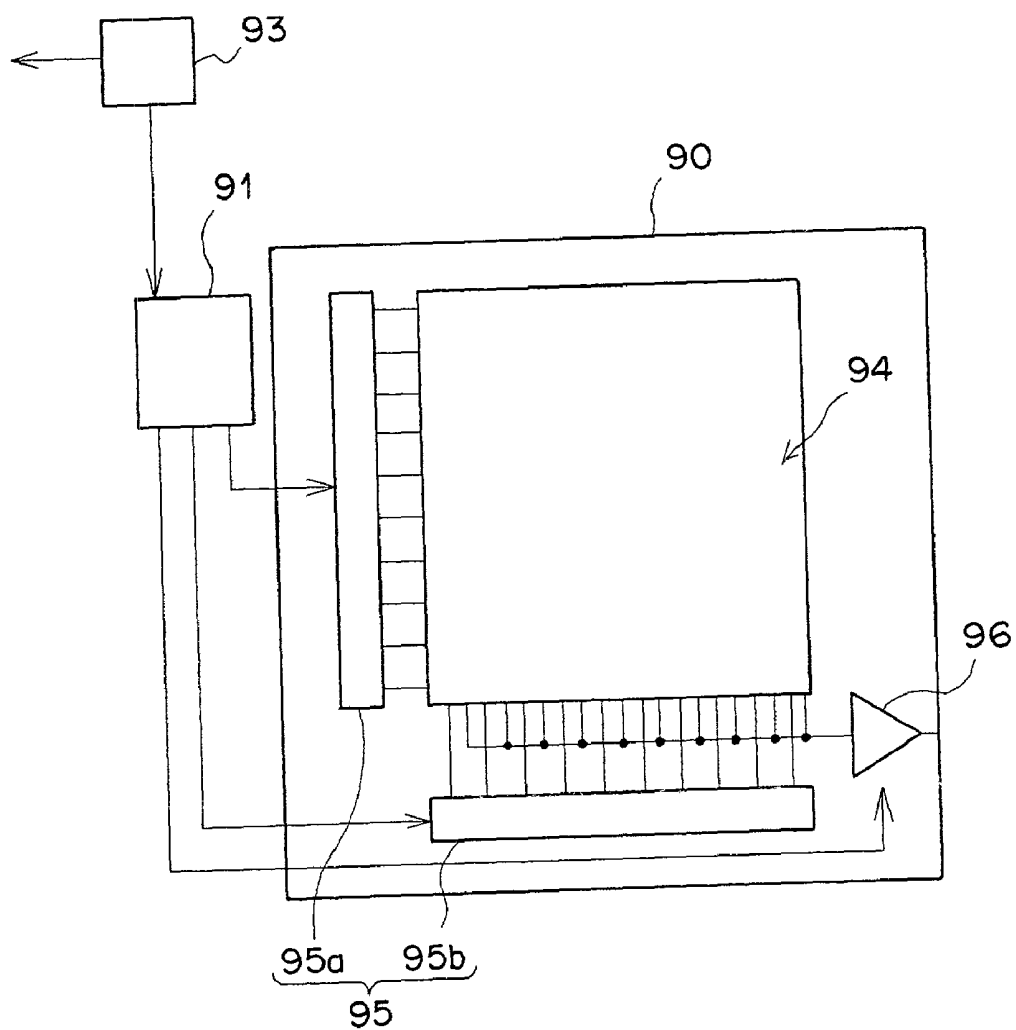


F I G . 31

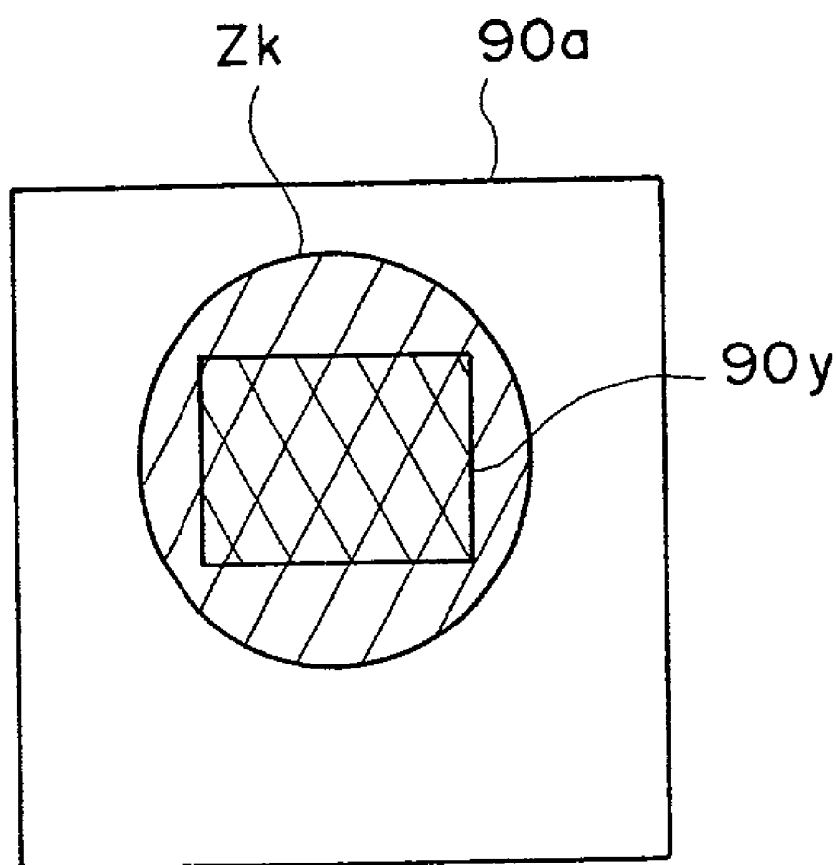


F I G . 32

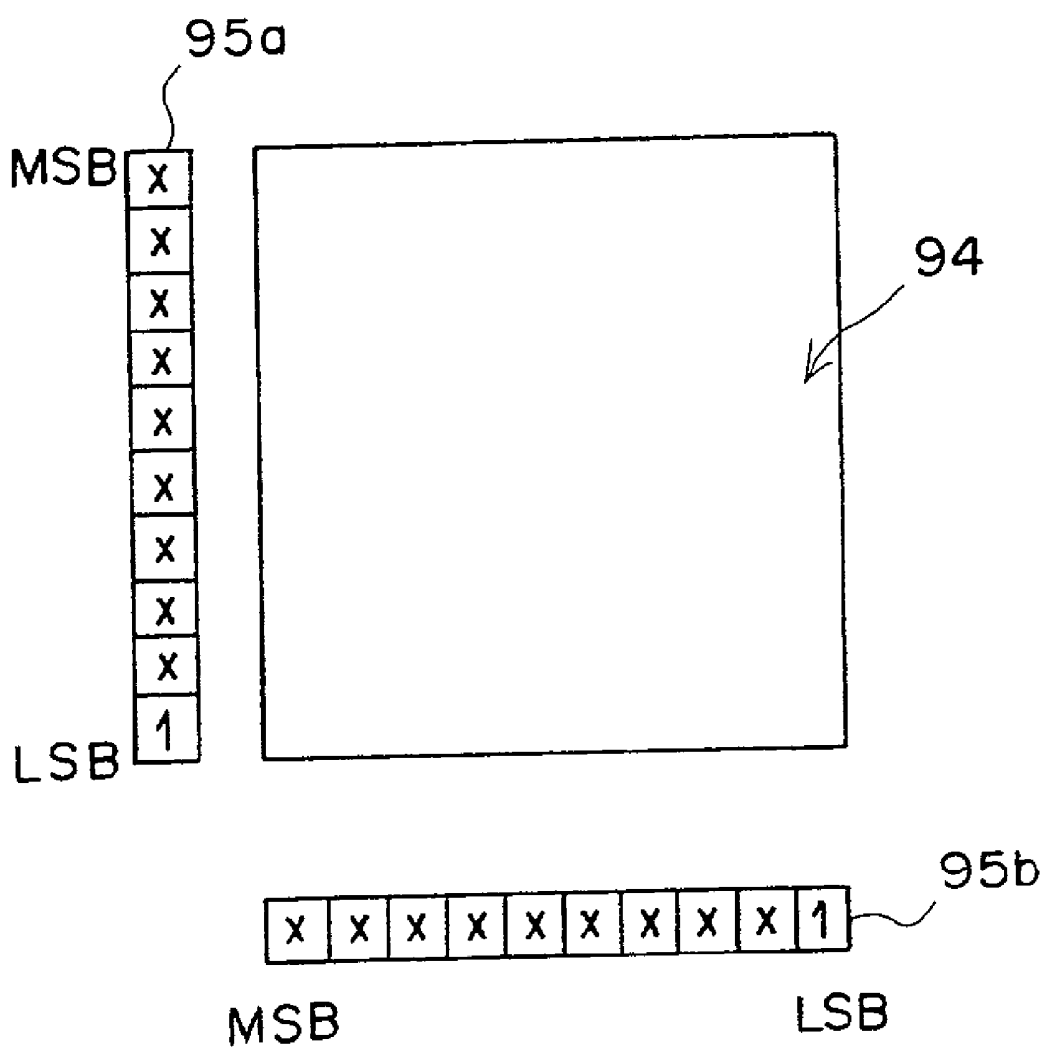


F I G . 33

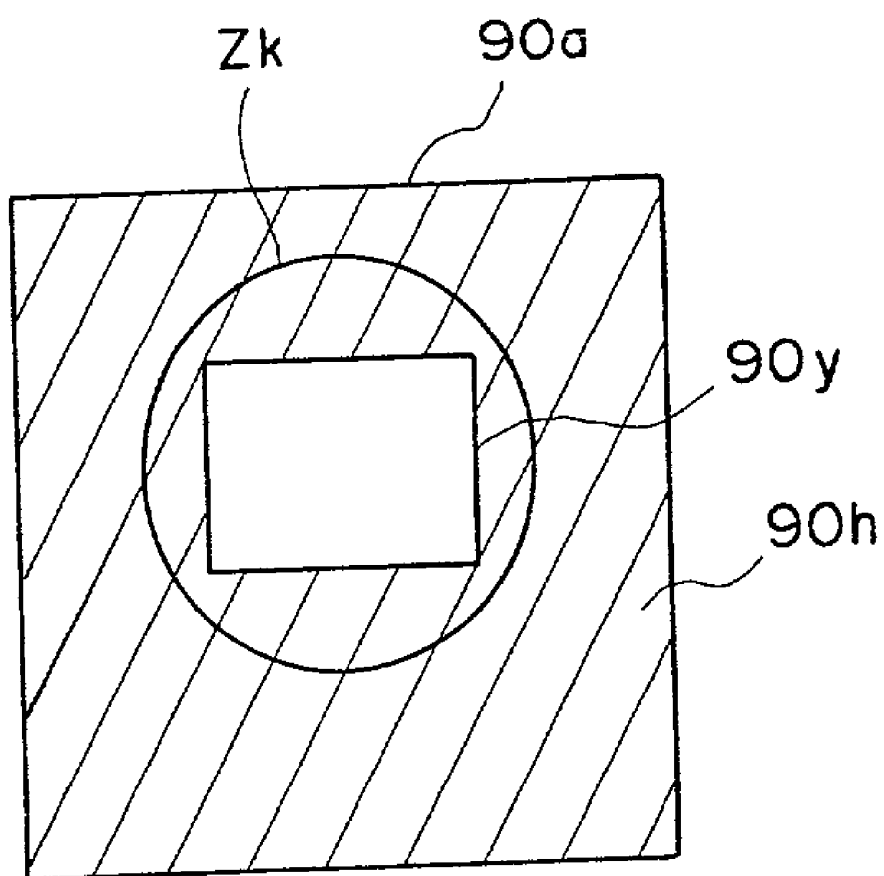

F I G . 34

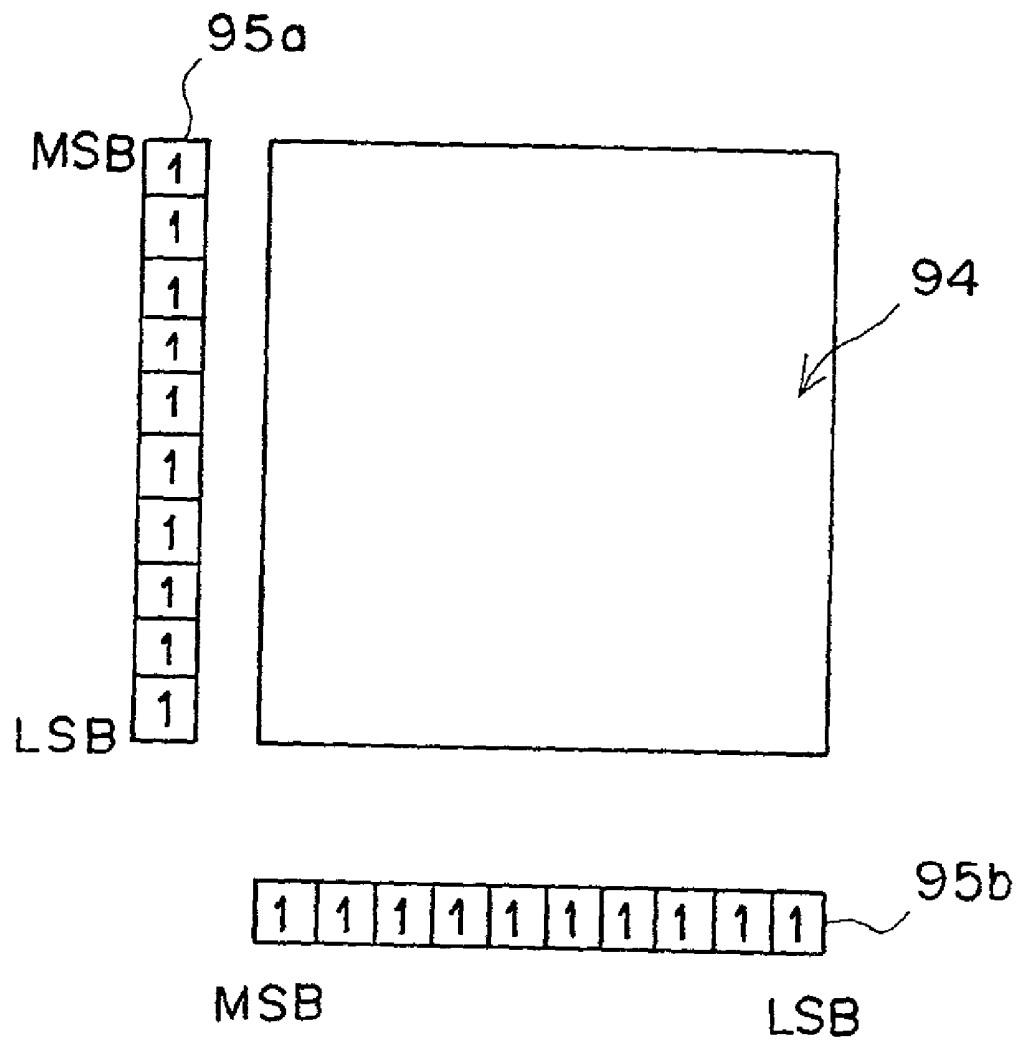

F I G . 35

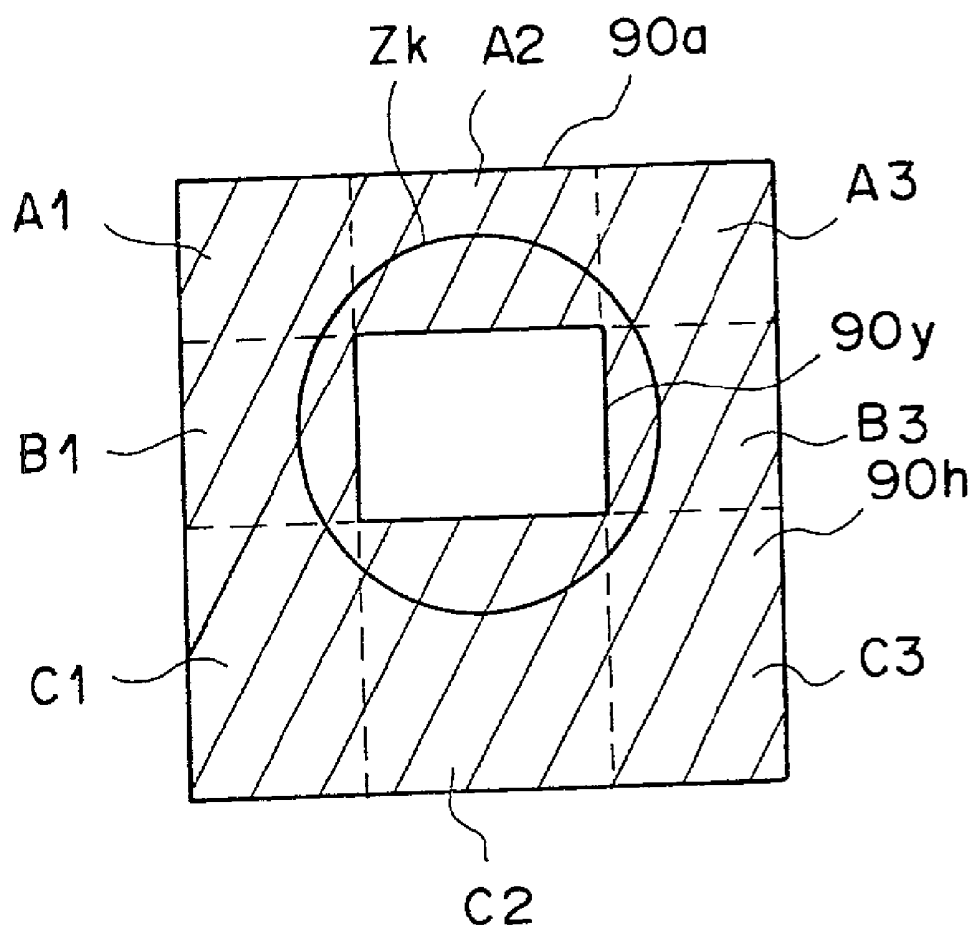

METHOD AND APPARATUS FOR PHOTOGRAPHING FLUORESCENT AND REFLECTED-LIGHT IMAGES

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates generally to a photographing method and apparatus, and more particularly to a photographing method and apparatus for photographing a fluorescent image of the fluorescent light emitted by a subject and a reflected light-image, etc. of a subject illuminated by a faint light.

[0003] 2. Description of the Related Art

[0004] There has been expressed a desire for photographing a fluorescent image of the fluorescent light emitted by a subject and a reflected-light image of a subject illuminated by a faint light as clear images, and much discussion has ensued in regard to development of a high-sensitivity photographing system therefor.

[0005] For example, research has been conducted on an apparatus which, by analyzing fluorescent light-images obtained by photographing the fluorescent light emitted by the inherent dye of the structures of a living tissue illuminated by a stimulating light, facilitates the distinguishing of changes, etc. in the state of each type of disease. In a fluorescent endoscope, the image of the fluorescent light emitted by a subject is propagated along an image fiber and guided to the end thereof. The size of the image guided into the image fiber is magnified to a larger size than that at which it entered the image fiber, focused on a photographing element and photographed.

[0006] The fluorescent light emitted by the structures of a living tissue is faint, and a high-sensitivity photographing element is used to detect this light as an image. When the quantity of light received by the photographing element is large, the fluorescent image is photographed at the resolution corresponding to the number of pixels provided on the photographing element, however, when the quantity of light received by the photographing element is small, the signal charge of a plurality of pixels is multiplied, readout, subjected to a pixel binning processing, and the fluorescent image is photographed. For example, if an image fiber of a 2 mm diameter is constituted of 10,000 strands and the image formed by fluorescent light at the end of this fiber is formed of 10,000 pixels, the light-receiving zone of the photographing element for receiving this image is provided with 4 times the number of pixels (40,000 pixels or more). When, for example, the phosphor image received uses 25,000 or 38,000, etc. substantially all of the light-receiving zone of the photographing element, and when the quantity of fluorescent light received is small, the number of pixels to be subjected to pixel binning processing; that is, the number of pixels corresponding to 1 pixel is multiplied and increased, the quantity of light received corresponding to one pixel is increased and the resolution decreased, and conversely, when the quantity of fluorescent light received is large, the number of pixels to be subjected to pixel binning processing is reduced, the resolution increased and the image photographed.

[0007] More specifically, a desire has been expressed to obtain an image of a cancerous portion, which is located 50

mm away from the point on which the stimulated light is emitted, as an image signal having a S/N ratio of 1 or higher under standard photographing conditions, in which the structures of a living tissue are illuminated by a 120° wide, 100 mw stimulating light and exposed for $\frac{1}{30}$ of a second over the entire light-receiving zone.

[0008] When photographing is performed using a front-exposure type photographing element under aforementioned standard photographing conditions, because the normal charge of the image signal representing the fluorescent image of aforementioned cancerous portion stored on 1 pixel of the light-receiving zone is substantially 10 electrons, by controlling the sum of the number of electrons of the readout noise of each pixel of the light-receiving zone and the number of electrons of dark noise to 10 electrons or less, a S/N ratio of 1 or higher can be obtained for the image signal representing the fluorescent light-image of the cancerous portion. In addition, for cases in which a rear-exposure type photographing element, which has a quantum efficiency substantially twice that of aforementioned front-exposure photographing element, is used, because the charge of the image signal representing the fluorescent image stored on 1 pixel under the settings of aforementioned standard photographing conditions is substantially 20 electrons, by controlling the sum of the number of electrons of the readout noise of each pixel of the light-receiving zone and the number of electrons of dark noise to 20 electrons or less, a S/N ratio of 1 or higher can be obtained for the image signal representing the fluorescent light-image of the cancerous tissue.

[0009] However, even if the above described method of employing a processing such as pixel binning is used, when the signal charge that has been stored on a plurality of pixels receiving the fluorescent light the fluorescent image is multiplied within the photographing element, because the signal charge generated due to reception of fluorescent light is in the end simultaneously multiplied together with the signal charge stored due to the dark noise, even if the charge of the image signal stored on a plurality of pixels is grouped together as a unit by being subjected to pixel binning processing and are and treated as corresponding to 1 pixel, the ratio of the dark noise component is not reduced, and an improvement in the S/N ratio cannot be hoped for. At this point, a photographing system in which the S/N ratio can be improved by reducing the dark noise component is desired.

SUMMARY OF THE INVENTION

[0010] The present invention has been developed in consideration of the circumstances described above, and it is a primary object of the present invention to provide a faint light photographing method and apparatus in which, by reducing the dark noise, the light-image of a subject can be photographed as an image having a high S/N ratio.

[0011] According to the photographing method of the present invention, in which fluorescent light emitted by a living-tissue subject illuminated by stimulating light enters an image fiber and is guided toward the output face of the image fiber, and the fluorescent image formed at the output face of the image fiber is focused on the light-receiving zone of the photographing element and photographed by the photographing element, the relationship between the number of pixels N_f forming the fluorescent image on the output face

of the image fiber and the number of pixels N_d receiving the light of the fluorescent image assembled within the light-receiving zone of the photographing element satisfy the condition expressed by the formula: $N_f \times 4 > N_d$.

[0012] For cases in which a front-exposure type photographing element is used, at normal temperature or lower, it is preferable that the fluorescent image be photographed under photographing conditions set so that the sum of the number of electrons of the readout noise produced on each pixel within the light-receiving zone receiving the light of a fluorescent image and the number of electrons of dark noise be 10 or less.

[0013] For cases in which a rear-exposure type photographing element is used, at normal temperature or lower, it is preferable that the fluorescent image be photographed with the photographing conditions set so that the sum of the number of electrons of the readout noise produced on each pixel within the light-receiving zone receiving the light of a fluorescent image and of dark noise be 20 or less.

[0014] It is preferable that the fluorescent image be focused on an imaged focusing means in which the number of pixels of the light-receiving zone receiving the light of the fluorescent image is 40,000 or less.

[0015] For cases in which the photographing element is capable of reading out, in a random manner, the signal charge stored on each pixel, it is preferable that a readout zone narrower than the light-receiving zone and which includes the fluorescent image is set within the light-receiving zone, and that readout of the readout zone be performed prior to readout of other zones within the light-receiving zone.

[0016] For cases in which the photographing element reads out the signal charge stored on each pixel sequentially, it is preferable that the fluorescent image be assembled at the closest position to the readout port of the photographing element, within the light-receiving zone.

[0017] A photographing apparatus according to the present invention comprises an optical system for directing fluorescent light emitted from a living-tissue subject illuminated by stimulating light into an image fiber and guiding it to the output face of the image fiber, an image focusing means for focusing on the light-receiving zone of the photographing element the fluorescent image formed by the fluorescent light guided to the output face of the image fiber, and a photographing means for photographing the fluorescent image assembled at the light-receiving zone thereof, wherein the relationship between the number of pixels N_f forming the fluorescent image on the output face of the image fiber and the number of pixels N_d receiving light of the fluorescent image assembled within the light-receiving zone of the photographing element satisfy the condition expressed by the formula: $N_f \times 4 > N_d$.

[0018] For cases in which the photographing element of the photographing means is provided as a front-exposure type photographing element, at normal temperature or lower, it is preferable that the fluorescent image be photographed under photographing conditions set so that the sum of the number of electrons of the readout noise produced on each pixel within the light-receiving zone receiving the light of a fluorescent image and the number of electrons of dark noise be 10 or less.

[0019] For cases in which the photographing element of the photographing means is provided as a rear-exposure type photographing element, at normal temperature or lower, it is preferable that the fluorescent image be photographed under photographing conditions set so that the sum of the number of electrons of the readout noise produced on each pixel within the light-receiving zone receiving the light of a fluorescent image and the number of electrons of dark noise be 20 or less.

[0020] It is preferable that the fluorescent image be focused on an imaged focusing means in which the number of pixels of the light-receiving zone receiving the light of the fluorescent image is 40,000 or less.

[0021] The image focusing means can be a means capable of changing, corresponding to the quantity of fluorescent light received by the photographing element, the size of the fluorescent image assembled within the light-receiving zone thereof.

[0022] The image focusing means is provided with a zooming optical system, and by use of the zooming optical system, can be a means capable of changing the size of the fluorescent image assembled within the light-receiving zone thereof.

[0023] The photographing apparatus can also be a photographing element that changes the readout frequency of the photographing element, corresponding to the zooming rate of the zooming optical system.

[0024] For cases in which the photographing element is capable of reading out in a random manner the image signal charge stored on each pixel, it is preferable that the photographing means be provided with a readout control means for setting a readout zone narrower than the light-receiving zone and which includes the fluorescent image within the light-receiving zone, and causing readout of the readout zone to be performed prior to readout of other zones within the light-receiving zone.

[0025] For cases in which the photographing element is capable of reading out in a random manner the image signal charge stored on each pixel, it is preferable that the photographing means be provided with a readout control means for setting a readout zone narrower than the light-receiving zone and which includes the fluorescent image within the light-receiving zone, which is also capable of changing the size of the readout zone and causing readout of the readout zone to be performed before readout of other zones within the light-receiving zone.

[0026] For cases in which the photographing element is a photographing element that sequentially reads out the image signal charge stored on each pixel, it is preferable that the photographing element is structured so that the fluorescent image is assembled at the closest position to the readout port of the photographing element, within the light-receiving zone.

[0027] For cases in which the photographing element is a photographing element that sequentially reads out the image signal charge stored on each pixel, it is preferable that the photographing element be provided with an focusing-position changing means for changing the position at which the fluorescent image is assembled within the light-receiving zone.

[0028] According to a photographing method of the present invention: a photographing element in which the charge stored on each pixel is sequentially transferred and readout is utilized; the light-image of the subject is focused on the light-receiving zone of the photographing element; the assembled light-image is photoelectrically converted on each light-receiving pixel within the light-receiving zone and stored within each light-receiving pixel as an image charge; and the signal charge stored within each light-receiving pixel is converted to an image signal and readout. In addition, the light-image is focused on the light-receiving pixels of a readout zone formed from less than the total number of pixels of the light-receiving zone, and the readout signal charge transferred to and stored on the light-receiving pixels contained within the readout zone is readout as aforementioned image charge and the residual signal charge transferred to and stored on the light-receiving pixels outside the readout zone in the non-readout zone is readout as a null change.

[0029] According to aforementioned photographing method, the sequentially transferred readout signal charge can be subjected to binning processing before it is readout.

[0030] According to another photographing method of the present invention: a photographing element in which the charge stored on each pixel is sequentially transferred and readout is utilized; the light-image of the subject is focused on the light-receiving zone of the photographing element; the assembled light-image is photoelectrically converted on each light-receiving pixel within the light-receiving zone and stored within each light-receiving pixel as an image charge; and the signal charge stored within each light-receiving pixel is converted to an image signal and readout. In addition, the light-image is focused on the light-receiving pixels of a readout zone formed from less than the total number of pixels of the light-receiving zone, and the readout signal charge transferred to and stored on the light-receiving pixels contained within the readout zone is readout as aforementioned image charge and the residual signal charge transferred to and stored on the light-receiving pixels outside the readout zone in the non-readout zone is discarded through a clearing drain.

[0031] According to a further photographing method of the present invention: a photographing element in which the charge stored on each pixel is sequentially transferred and readout is utilized; in which the light-image of the subject is focused on the light-receiving zone of the photographing element; the assembled light-image is photoelectrically converted on each light-receiving pixel within the light-receiving zone and stored within each light-receiving pixel as an image charge; and the signal charge stored within each light-receiving pixel is converted to an electric image signal and readout. In addition, the light-image is focused on the light-receiving pixels of a readout zone formed from less than the total number of pixels of the light-receiving zone, and after the readout signal charge transferred to and stored on the light-receiving pixels contained within the readout zone is readout as aforementioned image charge, the residual signal charge transferred to and stored on the light-receiving pixels outside the readout zone in the non-readout zone, or aforementioned residual signal charge and the image signal charge stored on the light-receiving pixels contained within the light-receiving zone after the readout signal charge has

been read out are grouped together and read out as null for each block or one pixel at a time.

[0032] A photographing apparatus according to the present invention comprises a photographing element and an image focusing means for focusing the light-image of a subject in the light-receiving zone of the photographing element. The photographing element is provided with a photoelectric converting portion for photoelectrically converting and accumulating as an image signal the received light on each light-receiving pixel within the light-receiving zone, a charge transfer portion for sequentially transferring the image charge stored on each light-receiving pixel, and a sequential-readout portion for converting the sequentially transferred image charge to an electric image signal and reading out said image charge, wherein said image focusing means focuses the light-image on the light-receiving pixels of a readout zone formed from less than the total number of pixels of the light-receiving zone, and a sequential-readout control means is provided for controlling the readout as an image signal of the readout charge stored on the light-receiving pixels of the readout zone by the sequential-readout portion and the readout as null of the residual signal charge stored on the light-receiving pixels outside the readout zone in the non-readout zone by the sequential-readout portion.

[0033] Aforementioned photographing apparatus can be provided with a gate between the charge transfer portion and the sequential-readout portion for controlling passage of the signal charge from the charge transfer portion to the sequential-readout portion, and a gate control means for controlling aforementioned gate so as to facilitate the subjecting of said readout signal charge to binning processing before the readout signal charge is transferred by the charge conversion portion and read out by the sequential-readout portion.

[0034] A further photographing apparatus according to the present invention comprises a photographing element and an image focusing means for focusing the light-image of the subject in the light-receiving zone of the photographing element, and the photographing element is provided with a photoelectric converting portion for photoelectrically converting and storing as an image signal the received light on each light-receiving pixel within the light-receiving zone, a charge transfer portion for sequentially transferring the image charge stored on each light-receiving pixel, and a sequential-readout portion for converting the sequentially transferred image charge to an electric image signal and reading out said image charge, wherein said image focusing means focuses the light-image on the light-receiving pixels of a readout zone formed from less than the total number of pixels of the light-receiving zone, and is further provided with a clearing drain for discarding the signal charge sequentially transferred by the charge transfer portion, and a sequential-readout control means for controlling readout of the readout signal charge, which is stored on the light-receiving pixels of the readout zone, by the sequential readout means and the discarding of the residual signal charge, which is stored on the light-receiving pixels outside the readout zone in the non-readout zone, into the clearing drain.

[0035] A still further photographing apparatus of the present invention comprises a first gate provided between the charge transfer portion and the sequential-readout por-

tion for controlling passage of the signal charge from the charge transfer portion to the sequential-readout portion, a second gate provided between the charge transfer portion and aforementioned clearing drain for controlling passage of the signal charge from the charge transfer portion to the clearing drain, and a gate control means for controlling gate 1 and gate 2 so as to facilitate the subjecting of the readout signal charge to binning processing before the readout signal charge is transferred by said charge conversion portion and read out by the sequential-readout portion.

[0036] Yet another photographing apparatus of the present invention comprises a photographing element and an image focusing means for focusing the light-image of the subject in the light-receiving zone of the photographing element, and the photographing element is provided with a photoelectric converting portion for photoelectrically converting and accumulating as an image signal the light received on each light-receiving pixel within the light-receiving zone, a pixel selecting means capable of randomly selecting pixels from among the light-receiving pixels, and a random readout portion for photoelectrically converting the signal charge of the selected light-receiving pixels to an electric image signal and reading it out, wherein the image focusing means focuses the light-image on the light-receiving pixels of a readout zone formed from less than total number of pixels of the light-receiving zone, and the pixel selecting portion selects light-receiving pixels of the readout zone, and after the random readout portion reads out the image charge stored on the selected light-receiving pixels, the pixel selecting means selects light-receiving pixels contained in the non-readout zone outside the readout zone, or the pixels contained in the non-readout zone and the readout zone, and a random readout control means is provided to control the pixel selecting portion and the random readout portion so as to facilitate readout as a null change for each block or one pixel at a time by the random readout means of the residual signal charge stored on the light-receiving pixels in the non-readout zone or aforementioned residual signal charge grouped together with the image signal charge stored on the light-receiving pixels contained within the light-receiving zone.

[0037] According to the random readout control means, at the same time a plurality of light-receiving pixels within the light-receiving zone are selected by the pixel selecting means, binning processing can be performed on the readout signal charge so that the multiplied signal charge of each readout signal charge stored on the selected light-receiving pixels can be converted to an electric image signal and readout.

[0038] According to aforementioned photographing apparatus, the image focusing means is provided with a zooming optical system, and said zooming optical system can be a means capable of changing the size of the light image focused on the light-receiving zone.

[0039] The photographing apparatus can also be a photographing element that changes the readout frequency of the photographing element, corresponding to the zooming rate of the zooming optical system.

[0040] Aforementioned photographing apparatus can be loaded in a fluorescent endoscope.

[0041] According to the photographing method and apparatus described above, the photographing element can be a charge amplification type for amplifying the charge by impact ionization.

[0042] Note that the "charge-amplification type photographing element" for amplifying the charge by impact ionization is a photographing element having a shift-resistor provided with a charge amplifying function and which is disposed between the horizontal CCD readout shift-resistor and the output amplifier. The operating principle by which the shift-resistor provided with a charge amplifying function amplifies the charge is the impact ionization phenomenon, which forms 2-dimensional electrons, occurring when the signal charge is transferred in deep potential formed at a sufficient strength (the charge collides with Si, and electron holes are formed). By transferring the signal charge, which has been transferred from the horizontal readout shift-resistor, by the multi-step shift-resistors of the shift-resistor provided with a charge amplifying function, each having deep potential, the 2-dimensional electrons are repeatedly formed, the readout noise level is not substantially increased and the signal charge is amplified. In relation to this charge-amplification type photographing element for amplifying a charge by use of impact ionization, refer to the specification of U.S. Pat. No. 5,337,340 (name of invention: Charge Multiplying Detector <CMD> suitable for small pixel CCD image sensor).

[0043] According to the photographing method and apparatus of the present invention, in photographing of a fluorescent image focused on the light-receiving zone of the photographing element, because the fluorescent image is focused on the light-receiving zone wherein the relationship of the pixels N_f , which represent the fluorescent image formed on the output face of the image fiber, to the pixels N_d , which are the pixels in the light-receiving zone receiving the light of the fluorescent image assembled therein, satisfies the condition expressed by the formula: $N_f \times 4 > N_d$. That is, because the number of pixels of the light-receiving zone of the photographing element focusing the fluorescent image formed at the output face of the image fiber has been kept not unnecessarily high, the quantity of dark noise produced per each pixel is not changed and quantity of fluorescent light received per pixel is increased, and because the fluorescent image, having a relatively reduced ratio of dark noise, can be read out from the photographing element, the fluorescent image can be photographed as an image having a high S/N ratio.

[0044] Note that for cases in which a front-exposure type photographing element is used, if the photographing conditions are set so that the sum of the number of noise and dark noise electrons produced on each pixel in the light-receiving zone receiving the light of the fluorescent image, at normal temperature or lower, is 10 or less, in aforementioned standard photographing state, an image of a cancerous tissue, for example, can be photographed having an S/N ratio of 1 or higher.

[0045] In addition, for cases in which a rear-exposure type photographing element is used, if the photographing conditions are set so that the sum of the number of noise and dark noise electrons produced on each pixel in the light-receiving zone receiving the light of the fluorescent image at normal temperature or lower is 20 or less, because the quantum

efficiency of a rear-exposure photographing element becomes twice that of a front-exposure photographing element, in aforementioned standard photographing state, an image of a cancerous tissue, for example, can be photographed having an S/N ratio of 1 or higher.

[0046] Further, if the fluorescent image is assembled and photographed in a light-receiving zone in which the number of pixels receiving the light of the fluorescent image is 40,000 or less, even for cases, for example, in which there are sufficiently plentiful pixels to represent the image formed at the output face of the image fiber, there are not an excess number of unnecessary pixels receiving the light of the fluorescent image in the light-receiving zone, and by controlling the number of pixels receiving the light of the fluorescent image to 40,000 or less, which is a number of pixels providing for the capability for distinguishing the change, etc. in the state of diseased tissues of various diseases by analyzing the photographed fluorescent image, a fluorescent image in which the quantity of light received per pixel is further increased can be read out from the photographing element, and the fluorescent image can be photographed as an image with a higher S/N ratio.

[0047] Further yet, if the size of the fluorescent image focused on the photographing element is changed, corresponding to the amount of light received at the photographing element, by use of a zooming optical means, etc., in a case, for example, when the quantity of received light of the fluorescent image is small, the fluorescent image is assembled small on the photographing element, and by photographing the fluorescent image by use of few pixels, the quantity of light received per pixel increases and the resolution of the image deteriorates, and for cases in which the quantity of received light of the fluorescent image is large, the fluorescent image assembled large on the photographing element, and by photographing the fluorescent image by use of many pixels, because adjustment can be made so that the quantity of received light is ensured while increasing the resolution, the fluorescent image can be photographed as an image having both the appropriate quantity of received-light and resolution.

[0048] Still further, if the photographing element is provided so that it is capable of reading out, in a random manner, the image charge stored on each pixel and with a readout zone including the fluorescent image and narrower than the light-receiving zone, if readout of the readout zone is performed prior to readout of the other zones, the time for dark noise to accumulate on each pixel of the readout zone, which are read out before the pixels of the other zones, can be shortened, and the fluorescent image can be read out as an image having a high S/N ratio.

[0049] Further still, if the photographing element is provided so as to sequentially read out the signal charge stored on each pixel and assemble the fluorescent image at the point closest to the readout port of the photographing element within the light-receiving zone thereof, compared to other cases, because the light of the fluorescent image received at each pixel is read out faster and the time for dark noise to accumulate can be reduced, the fluorescent image can be photographed as an image having a higher S/N ratio.

[0050] In addition, if the photographing element is provided so that it is capable of reading out, in a random manner, the signal charge stored on each pixel, and a readout

zone, which is read out prior to other zones and whose size it is possible to change, is set within the light-receiving zone of the photographing element, in a case, for example, in which the size of an image to be assembled is changed corresponding to the quantity of received light, the position at which the fluorescent image is to be assembled can be set close to aforementioned readout port corresponding to the change in size thereof, by which efficient early readout of the fluorescent image becomes possible, and the fluorescent image can be photographed as an image having a higher S/N ratio.

[0051] Further, if the photographic element is provided so that it sequentially reads out the signal charge stored on each pixel, and so that it is possible to change the position at which the fluorescent image is assembled within the light-receiving zone thereof, in a case, for example, in which the size of an image to be assembled is changed corresponding to the quantity of received light, the position at which the fluorescent image is to be assembled can be set close to aforementioned readout port corresponding to the change in size thereof, by which efficient early readout of the fluorescent image becomes possible, and the fluorescent image can be photographed as an image having a higher S/N ratio.

[0052] According to a photographing method and apparatus of the present invention, a photographing element for sequentially transferring and reading out the signal charge stored on each pixel is utilized, and in converting the signal charge stored in each pixel to an electric image signal and reading out said image signal, the light-image is focused on the light-receiving pixels of a readout zone formed from less than the total number of pixels of the light-receiving zone, and accompanying the conversion and readout of the readout signal charge, which has been transferred to and stored on the light-receiving pixels contained within the readout zone, as an image charge, because the residual signal charge transferred to and stored on the light-receiving pixels outside the readout zone in the non-readout zone has been read out as null, the quantity of dark noise produced per each pixel is not changed and quantity of fluorescent light received per pixel can be increased twofold or greater, and because the ratio of dark noise of the fluorescent image can be relatively reduced, the fluorescent image can be photographed as an image having a high S/N ratio.

[0053] Note that upon converting the signal charge stored on each light receiving pixel image signal charge and reading out said image signal, the light-image of the subject is focused in a readout zone formed of a number of light-receiving pixels equal to less than half of the total number of light-receiving pixels of the light-receiving zone. Accompanying the conversion to an image signal of the readout signal charge that has been transferred to the readout zone and readout of said image signal, if the residual signal charge that has been transferred to and stored on the light-receiving pixels of the no-readout zone outside of the readout zone is read out as a null change, because the quantity of dark noise produced per pixel does not change and the quantity of light received per pixel can be increased by more than double and the ratio of dark noise can be relatively reduced, the light-image can be photographed as an image having a higher S/N ratio.

[0054] According to another photographing method and apparatus of the present invention, a photographing element

for sequentially transferring and reading out the signal charge stored on each pixel is utilized, and in converting the signal charge stored in each pixel to an electric image signal and reading out said image signal, the light-image is focused on the light-receiving pixels of a readout zone formed from less than half of the total number of pixels of the light-receiving zone, and accompanying the conversion of the readout signal charge transferred to and stored on the light-receiving pixels contained within the readout zone to an image signal and readout of said image signal, because the residual signal charge transferred to and stored on the light-receiving pixels outside the readout zone in the non-readout zone has been discarded via a clearing drain, the quantity of dark noise produced per each pixel is not changed and quantity of fluorescent light received per pixel can be increased twofold or greater the quantity of dark noise produced per each pixel is not changed and quantity of fluorescent light received per pixel can be increased twofold or greater, the ratio of dark noise of the fluorescent image can be relatively reduced, and it is not necessary to convert the residual signal charge transferred to and stored on the light-receiving pixels outside the readout zone in the non-readout zone to an image signal and read out and discard the thus converted image signal as in the prior art, and because the residual signal charge transferred to and stored on the light-receiving pixels outside the readout zone in the non-readout zone has been discarded at a high speed via the clearing drain, the processing time for one section of the display is shortened, and readout of the signal charge stored in the readout zone can be completed rapidly, the quantity of dark noise can be further reduced with the passage of time and the fluorescent image can be photographed as an image having a high S/N ratio.

[0055] Note that upon converting the signal charge stored on each light receiving pixel image signal charge and reading out said image signal, the fluorescent image of the subject is focused in a readout zone formed of a number of light-receiving pixels equal to less than half of the total number of light-receiving pixels of the light-receiving zone. Accompanying the conversion to an image signal of the readout signal charge that has been transferred to the readout zone and readout of said image signal, if the residual signal charge that has been transferred to and stored on the light-receiving pixels of the non-readout zone outside of the readout zone is discarded via a clearing drain, the quantity of dark noise produced per pixel does not change, and by increasing the quantity of light received per pixel by more than double, the ratio of dark noise can be relatively reduced, and because the residual signal charge stored on the light-receiving pixels of the non-readout zone outside the readout zone is not converted to an image signal and readout and discarded as in conventional processing, but is discarded via a clearing drain at a high speed, readout of the signal charge of the readout zone can be completed rapidly, and because the quantity of dark noise, which accumulates with the passage of time, can be further reduced, the light image can be photographed as an image having a higher S/N ratio.

[0056] According to yet another photographing method and apparatus of the present invention, a photographing element for sequentially transferring and reading out the signal charge stored on each pixel is utilized, and in converting the signal charge stored in each pixel to an electric image signal and reading out said image signal, the light-image is focused on the light-receiving pixels forming the

readout zone, which account for $\frac{1}{2}$ or less of the total number of pixels of the light-receiving zone, and after readout of the readout signal charge stored on the light-receiving pixels contained within the readout zone as an image signal, because the residual signal charge stored on the light-receiving pixels contained in the non-readout zone outside the readout zone, or said residual signal charge together with the signal charge stored on the light-receiving pixels contained in said readout zone after readout of the readout signal charge have been read out from said random readout portion as null for each block or one pixel at a time, readout of the signal charge stored on the light-receiving pixels in the readout zone can be completed more rapidly and the quantity of dark noise, which accumulates with the passage of time, can be further reduced. Also, the blooming that occurs in cases in which the residual signal charge stored on the light-receiving pixels of the non-readout zone is not discarded, that is, the phenomenon wherein a signal charge continues to accumulate on the light-receiving pixels of the non-readout zone and overflows onto the light-receiving pixels of the readout zone can be prevented.

[0057] According to a still further readout method and apparatus of the present invention, employing a photographing element capable of reading out, in a random manner, the signal charge stored on each light-receiving pixel, upon conversion of the signal charge stored on each light-receiving pixel to an electric image signal and readout of said image signal, the light-image of the subject is focused in a readout zone formed of a number of light-receiving pixels equal to less than half of the total number of light-receiving pixels of the light-receiving zone, and after readout of the readout signal charge, as an image signal, stored on each of the light-receiving pixels of said readout zone, if the residual signal charge stored on the light-receiving pixels of the non-readout zone outside the readout zone, or said residual signal charge grouped together with the signal charge stored on the readout zone after the readout signal charge has been readout therefrom is readout as empty for each block or each pixel, readout of the signal charge stored on the light-receiving pixels of the readout zone can be completed more rapidly, and the quantity of dark noise, which accumulates with the passage of time, can be reduced. Further, the blooming occurring for cases in which discarding of the residual signal charge stored on the light-receiving pixels of the non-readout zone has not been performed, that is, the phenomenon wherein the signal charge continuing to be accumulated on the light-receiving pixels of the non-readout zone overflows onto the light-receiving pixels within the readout zone, can be prevented.

[0058] Further, if aforementioned readout signal charge is subjected to binning processing, because the signal charge stored on a plurality of pixels can be grouped together as a unit and converted to an image signal, the readout noise produced when a signal charge is converted to an electric image signal can be further reduced and image signal carrying the light-image of a subject can be photographed as an image having an even higher S/N ratio.

[0059] Still further, if the image focusing means is provided with a zooming optical means, by use of which it becomes a means capable of changing the size of the light-image to be focused on the light-receiving zone, for cases in which the quantity of light received from the light-image is insufficient and an image signal having a low

S/N ratio is read out, by focusing the light image in a small area within the light-receiving zone, the quantity of light received per pixel is increased and the light-image can be read out as an image signal having a high S/N ratio. In addition, for cases in which the quantity of light received from the light-image is sufficiently large and an image signal having a high S/N ratio has been read out, by focusing the light-image on a larger area of the light-receiving zone, the number of light-receiving pixels receiving the light of the light-image is increased, and an image signal carrying a light-image having a higher resolution can be read out.

[0060] In addition, if the photographing apparatus is a photographing element that changes the readout frequency, corresponding to the zooming rate of the zooming optical system, the level of readout noise mixed in the images to be readout can be more precisely made to be low. That is to say, for cases in which a normal photographing element is used, because the quantity of readout noise produced is proportional to the horizontal base of the readout frequency, if the readout frequency is lowered, the quantity of readout noise can be caused to be low. For example, if the zooming rate of the zooming optical system is set low, and a predetermined observation zone is focused smaller on the photographing element and the number of readout pixels reduced, the readout frequency can be lowered by only the portion of the number of pixels read out for 1 frame and the quantity of readout noise produced can be precisely made to be small.

[0061] More specifically, for example, in a case in which a normal photographing element is employed under a photographing condition of 30 frames/second, the readout noise is more controlled than the dark noise, and reducing the readout noise becomes a means of improving the sensitivity (improving the S/N ratio). Because the quantity of readout noise produced is proportional to the horizontal base of the readout frequency, if the readout frequency is lowered, it is possible to raise the sensitivity (S/N). Here, if the predetermined observation zone is focused smaller on the photographing element by the zooming optical means and the number of pixels read out is reduced, the readout frequency can be lowered by only the portion of the number of pixels read out for 1 frame and the quantity of readout noise produced can be precisely made to be small. If the readout frequency becomes low, the quantity of readout noise produced is reduced, and the sensitivity (S/N) can be improved.

[0062] If the photographing apparatus is implemented in an endoscope apparatus, because the quantity of light received per pixel is increased and the dark noise can be reduced, a reflected light-image produced by the light reflected from inside a living-tissue subject illuminated by an illuminating light, the fluorescent light image produced by the fluorescent light emitted by a living-tissue subject illuminated by a stimulating light, etc. can be observed as a light-image having a high S/N ratio.

[0063] In addition, if the photographing apparatus is a charge-amplification type photographing element that amplifies the charge by impact ionization, the readout noise is lowered, and the signal charge can be read out as an image signal having an even higher S/N ratio.

BRIEF DESCRIPTION OF THE DRAWINGS

[0064] FIG. 1 is a schematic drawing of a fluorescent endoscope according to the first embodiment of the present invention,

[0065] FIG. 2 shows a fluorescent image Zk focused on an area of the light-receiving zone of the photographing element smaller than the entire light-receiving zone,

[0066] FIG. 3 shows a fluorescent image Zk focused on an area covering the entire light-receiving zone of the photographing element,

[0067] FIGS. 4A, 4B and 4C show the relationship between photographing system and the quantity of readout noise and dark noise produced thereby,

[0068] FIGS. 5A and 5B show the quantity of noise produced when the temperature is 20° C.,

[0069] FIGS. 6A and 6B show the quantity of noise produced when the temperature is 50° C.,

[0070] FIGS. 7A, 7B, 7C and 7D show readout of an image signal from fluorescent image focusing zone Es set on the photographing element,

[0071] FIG. 8 is a schematic drawing of a fluorescent endoscope according to the second embodiment of the present invention,

[0072] FIG. 9 shows a fluorescent image light-receiving sector set within the light-receiving zone,

[0073] FIG. 10 shows a fluorescent image focusing zone in which fluorescent image Zk is to be assembled,

[0074] FIG. 11 shows a fluorescent image light-receiving sector and fluorescent image focusing zone that have been matched,

[0075] FIG. 12 shows a fluorescent image Zk focused on an area of the light-receiving zone of the photographing element smaller than the entire light-receiving zone,

[0076] FIG. 13 is a schematic drawing of a fluorescent endoscope according to the third embodiment of the present invention,

[0077] FIG. 14 shows a fluorescent image Zk focused on an area covering the entire light-receiving zone of the photographing element,

[0078] FIG. 15 shows the readout of an image signal from an MOS-type photographing element,

[0079] FIG. 16 is a schematic drawing of a fluorescent endoscope according to the fourth embodiment of the present invention,

[0080] FIG. 17 shows a fluorescent image Zk focused on an area of the light-receiving zone of the photographing element smaller than the entire light-receiving zone,

[0081] FIG. 18 is a schematic drawing of a fluorescent endoscope according to the fifth embodiment of the present invention,

[0082] FIG. 19 is a schematic drawing of the main part of a fluorescent image photographing unit,

[0083] FIG. 20 is a schematic drawing showing the internal structures of a photographing element,

[0084] FIG. 21 shows the range of a readout zone set within the light-receiving zone of a photographing element,

[0085] FIG. 22 shows a charge transfer and storage portion in the state in which a signal charge has been transferred thereto from the light-receiving zone,

[0086] FIG. 23 shows a state in which a signal charge has been discarded into the clearing drain,

[0087] FIG. 24 shows a state in which a signal charge is subjected binning processing in the vertical transfer direction,

[0088] FIG. 25 shows a state in which a signal charge is subjected binning processing in the horizontal transfer direction,

[0089] FIG. 26 shows the excess signal charge discarded into the clearing drain at an intermediate stage of the reading out of signal charge of horizontal line 1,

[0090] FIG. 27 shows a comparison between a zone read out as a signal charge and the readout zone,

[0091] FIG. 28 is a schematic drawing of a photographing element not provided with a clearing drain,

[0092] FIG. 29 is a schematic drawing of a fluorescent endoscope according to the sixth embodiment of the present invention,

[0093] FIG. 30 is a schematic drawing of a photographing element,

[0094] FIG. 31 shows a readout zone and the zone in which a fluorescent image has been assembled,

[0095] FIG. 32 shows the settings of the pixel selecting portion when a signal charge is subjected to binning processing and read out,

[0096] FIG. 33 shows the range of the non-readout zone,

[0097] FIG. 34 shows the settings of the pixel selecting portion when the dump charge is grouped together and read out, and

[0098] FIG. 35 shows an example of the settings for each block when the residual signal charge is read out for each block.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0099] Hereinafter, with reference to the drawings, the preferred embodiments of the present invention will be explained. FIG. 1 is a schematic drawing of a first embodiment of a fluorescent endoscope implementing a photographing apparatus for executing the photographing method according to the present invention.

[0100] Endoscope apparatus 800 comprises a light source unit 100 for emitting stimulating light Le of a wavelength of 410 nm, an endoscope unit 200 for transferring a fluorescent image of a living-tissue subject 1, which is formed of the fluorescent light emitted by upon illumination thereof by stimulating light Le emitted by light source unit 100 and passed through an illumination fiber 21, from an input face 22a of an image fiber 22 to an output face 22b of said image fiber 22, a fluorescent image photographing unit 300 for photographing, converting to an image signal and outputting the fluorescent image transferred to output face 22b of image fiber 22, and a display 400 for displaying as an image the

image signal that has been output from fluorescent image photographing unit 300 and input thereto.

[0101] Light source unit 100 is provided with a white light source 11 for emitting white light Lw, and a stimulating light source 12 for emitting stimulating light Le. Of the white light Lw emitted from white light source 11, that having a wavelength of 420 nm is reflected and that in the wavelength range over 420 nm passes through a dichroic mirror 13, and the light passing through dichroic mirror 13 is focused by a focusing lens 14 and enters the end face 21a of illumination fiber 21. The stimulating light Le is emitted from stimulating light source 12 at a different timing from that of the white light Lw, and is reflected by dichroic mirror 13 and enters input face 21a of illumination fiber 21 in the same way as said component of white light Lw.

[0102] Endoscope unit 200 comprises a forward end 201, into which the image of living-tissue subject 1, produced by illumination thereof by the white light Lw and stimulating light Le transferred through illumination fiber 21 enters, an operation section 202 to which light source unit 100 and fluorescent image photographing unit 300 are connected, and an image fiber 22 formed of 10,000 strands of optical fiber, wherein illumination fiber 21 extends from operating section 202 to forward end 201.

[0103] In addition, forward end 201 is provided with an illumination lens 23 for directing the white light Lw and the stimulating light Le emitted from output 21b of illumination fiber 21 entering end face 21a toward living-tissue subject 1, an assembly lens 26 for focusing the image of living-tissue subject 1 (hereinafter referred to as normal image Zw), formed via a prism 24 by the white light Lw reflected by said living-tissue subject 1, on a normal-image photographing element 25, and a fluorescent image assembly lens 27 for focusing the image of living-tissue subject 1 (hereinafter referred to as fluorescent image Zk), which is composed of the fluorescent light emitted by said living-tissue subject 1 upon illumination thereof by stimulating light Le and passed through a stimulating light cutoff filter that cuts off wavelengths of light in the wavelength range below 420 nm, on input face 22a of image fiber 22; fluorescent image Zk focused on said input face 22a of image fiber 22 is transferred to output face 22b thereof. On the other hand, normal image Zw focused on normal-image photographing element 25 is converted into an electric image signal and transferred via a cable 28 to fluorescent image photographing unit 300.

[0104] Output face 22b of image fiber 22 is connected to fluorescent image photographing unit 300, and fluorescent image Zk conveyed to output face 22b is passed through assembly lens 32 and reduced and assembled within light-receiving zone 33a of fluorescent image photographing element 33, which is a front-exposure type CCD photographing element comprising 25,000 pixels. The fluorescent image Zk focused on said light-receiving zone 33a is photographed by fluorescent image photographing element 33, converted to an electric image signal and output. The image signal output by fluorescent image photographing element 33 is input to an image signal extraction circuit 35, and only the image signal obtained from the pixels contained in the image readout zone contained in the assembly zone, which has been determined in advance, within light-receiving zone 33a is extracted and output and again converted to an image signal by a visible image processing circuit 34a

and output. On the other hand, the image signal output by normal-image photographing element **25** and transferred via cable **28** is input to visible image processing circuit **34b**, converted to an image signal and output.

[0105] The two images output from visible image processing circuits **34a** and **34b** are input to display **400** and displayed as visible images.

[0106] Next, the operation of the fluorescent endoscope of the configuration described above will be explained. Stimulating light L_e emitted from light source **100** enters end face **21a** of illumination fiber **21**, is conveyed therethrough to the other end face **21b**, is output there from and passed through illumination lens **23** and illuminates live-tissue subject **1**. Fluorescent image Z_k emitted by live-tissue subject **1** upon illumination by stimulating light L_e passes through fluorescent image assembly lens **27**, stimulating light cutoff filter **31** and image fiber **22** and is conveyed to said output face **22b**. Fluorescent image Z_k conveyed to output face **22b** is assembled within light-receiving zone **33a** of photographing element **33** by assembly lens **32**. Then, the assembled fluorescent image Z_k is photographed by fluorescent image photographing element **33** and output as an image signal; only the image signal obtained from the signal charge held on the pixels contained within the image readout zone of light-receiving zone **33** is extracted by image signal extraction circuit **35** and output. The extracted image signal is converted to a visible-image signal by visible image processing circuit **34a** and output from fluorescent image photographing unit **300**.

[0107] On the other hand, the image of live-tissue subject **1** formed by the white light reflected from live-tissue subject **1** upon illumination thereof by white light L_w emitted from light source **100** is focused on normal-image photographing element **25** via prism **24**. The assembled normal image Z_w is photographed by normal-image photographing element **25**, output as an image signal, input to visible image processing circuit **34b** via cable **28**, converted to a visible-image signal and output from fluorescent image photographing unit **300**.

[0108] Next, a detailed explanation will be given for cases in which a fluorescent image Z_k is photographed by fluorescent image photographing unit **300**. As shown in FIG. 2, fluorescent image Z_k transferred to output face **22b** is assembled within light-receiving zone **33** as close as possible to readout port **33b** from which an image signal is read out from fluorescent image recording element **33**. More specifically, a fluorescent image Z_k having a circular outline is focused on a zone inscribed in a corner formed by adjacent sides L_1 and L_2 , which define readout port **33b** of light-receiving zone **33a** of fluorescent photographing element **33**. The number of pixels N_d (the number of pixels within the light-receiving zone **33a** receiving the light of the fluorescent image focused on light-receiving zone **33a**) contained within the fluorescent image focusing zone E_s in which fluorescent image Z_k has been assembled is less than four times the number of pixels N_f (the number of strands of optical fiber representing fluorescent image Z_k) representing the image formed on the output face **22b** of image fiber **22**, that is to say, the relationship therebetween is set so as to satisfy the condition expressed by the formula $N_f \times 4 > N_d$.

[0109] That is to say, in conventional photographing systems, the fluorescent image Z_k conveyed to output face **22b**

of image fiber **22** is focused on a light-receiving zone having a number of pixels greater than the sampling number of $N_f \times 4$ required to obtain the image data of the pixels formed of the number of optical fiber strands N_f ; for example, the fluorescent image Z_k is focused on a fluorescent image focusing zone E_b 4 times the size of fluorescent image focusing zone E_s (16 times the number of pixels, and also substantially 16 times the area), which encompasses almost the entire area of light-receiving zone **33a** (refer to FIG. 3).

[0110] Therefore, for a case in which fluorescent image Z_k , which has been subjected to readout peak cell binning processing, where 4×4 pixels=16 corresponds to 1 pixel, is focused on fluorescent image focusing zone E_b and photographed, because each 16 pixels forming the fluorescent image are treated as corresponding to 1 pixel, the image becomes an image corresponding to the same as that of aforementioned pixels N_d , and the total quantity of received light also becomes equivalent to aforementioned quantity of fluorescent light obtained when said fluorescent image Z_k is assembled small on few pixels in fluorescent image focusing zone E_s and the quantity of fluorescent light obtained when said fluorescent image Z_k is assembled large on many pixels in fluorescent image focusing zone E_b .

[0111] Accordingly, for cases in which fluorescent image Z_k is not subjected to peak cell binning processing and is assembled small in fluorescent image focusing zone E_s , and cases in which fluorescent image Z_k is assembled large in fluorescent image focusing zone E_b , is subjected to peak cell binning processing, where 4×4 pixels corresponds to 1 pixel and photographed, with regard to the total amount of received light and resolution, the conditions are the same. However, if the quantity of noise contained in the image signal of the photographed images are compared, the fluorescent image Z_k focused on fluorescent image focusing zone E_s having few pixels and photographed has less noise per pixel (that which corresponds to 1 pixel) than does the fluorescent image focused on fluorescent image focusing zone E_b having many pixels.

[0112] That is to say, as shown in FIG. 4A, when a portion Z_g within fluorescent image Z_k conveyed to output face **22b** of image fiber **22** is focused on a zone g_1 formed of $4 \times 4 = 16$ light-receiving pixels, not subjected to peak cell binning processing and is photographed, the total quantity of dark noise and read out noise TDR **1** contained in image signal P_1 obtained from the photographed 16 light-receiving pixels is 16 times the quantity of dark noise DN and read out noise Rn produced from 1 pixel, that is:

$$TDR1 = 16 \times DN + 16 \times RN.$$

[0113] In addition, as shown in FIG. 4B, in the same way as described above, when a portion Z_g within fluorescent image Z_k is focused on a zone G_1 formed of $4 \times 4 = 16$ light-receiving pixels, subjected to readout peak cell binning processing, where $4 \times 4 = 16$ pixels in zone G_1 correspond to 1 pixel, and photographed, the total quantity of dark noise and read out noise TDR **2** contained in image signal P_2 obtained from the photographed 16 light-receiving pixels is the sum of 16 times the quantity of dark noise DN produced from 1 pixel and 1 times the quantity of read out noise Rn produced from 1 pixel, that is:

$$TDR1 = 16 \times DN + 1 \times RN.$$

[0114] On the other hand, as shown in FIG. 4C, when a portion Z_g of the same fluorescent image Z_k described

above is assembled small in a zone G2 formed of 1 light-receiving pixel, the total quantity of dark noise and read out noise TDR3 contained in image signal P3 obtained from the photographed 1 pixel is the sum of 1 times the quantity of dark noise DN and read out noise Rn produced from 1 pixel, that is:

$$\begin{aligned} TDR1 &= 1 \times DN + 1 \times RN; \\ &= (1/16) \times TDR1; \\ &= (1/8) \times TDR2. \end{aligned}$$

[0115] Accordingly, if fluorescent image Zk is assembled small and photographed, compared to a case in which the same fluorescent image Zk is assembled large and photographed, the total quantity of noise contained in the image signal representing fluorescent image Zk on only the small number of pixels is reduced, the total quantity of received light can be made equal, and as a result, the quantity of light received per pixel can be increased.

[0116] More specifically, in a case, for example, in which fluorescent image Zk is focused on the entire area of a light-receiving zone of a photographing element comprising 512×512 pixels (substantially 250,000 pixels), is subjected to peak cell binning processing, where 4×4=16 pixels corresponds to 128×128 pixels (corresponding to substantially 16,000 pixels), and photographed, compared to a case in which the same fluorescent image Zk is optically reduced to 1/4 size 128×128 pixels (the 16,000 pixels of a zone 1/16 of the light-receiving zone of the photographing element) and assembled and photographed, the noise contained in the imager signal obtained of each fluorescent image is as follows.

[0117] That is, as shown in FIGS. 5A, 5B and 6A, 6B, the X axis is the readout frequency of the photographing element: f (mega pixels/sec), the Y axis is the area of 1 pixel of the photographing element: S (μm²) and the Z axis is the total of the read out noise added to the dark noise read out from the photographing element per pixel: DN+RN (number of electrons), and for cases in which the exposure time is 1/30 seconds at 20° C., the photographing element and the readout circuit must be set as per the zone setting shown in Area 1 of FIG. 5 in order to control the sum of readout noise electrons and dark noise electrons per pixel contained in an image signal read out when fluorescent image Zk is assembled large in a light-receiving zone comprising 512×512 pixels, is subjected to peak cell binning processing and photographed to 10 or less; there is almost no freedom in setting the substantially fixed range of the readout frequency F and the area S of 1 pixel. On the other hand, to control the sum of readout noise electrons and dark noise electrons per pixel contained in an image signal read out when the same fluorescent image Zk is optically reduced to 1/4 size, assembled small in a zone comprising 128×128 pixels and photographed, readout frequency F and area S of 1 pixel can be set as per the zone shown in Area 2 of FIG. 5B, wherein the range of possible settings for readout frequency F and area S of 1 pixel are expanded, and it becomes possible to select settings whereby the sum of the number of electrons of readout noise and dark noise per pixel (hereinafter referred to as number of noise electrons per pixel) can be controlled to even less than 10.

[0118] In addition, compared to the total quantity of noise electrons produced when the temperature of the photographing element is 50°, as shown in FIG. 6A, there is no setting zone for readout frequency F and the area S of 1 pixel to control the number of noise electrons contained to 10 or less per pixel in an image signal readout when fluorescent image Zk is assembled large, subjected to peak cell binning processing and photographed, however, the setting zone to control the number of noise electrons per pixel contained in an image signal read out when the same fluorescent image Zk is optically reduced to 1/4 size, assembled small in a zone comprising 128×128 pixels and photographed is the zone shown in Area 3 of FIG. 6B, and the settings for readout frequency F and area S of 1 pixel can be selected from this zone.

[0119] In this way, by focusing the fluorescent image within a light-receiving zone in which the relationship between the number of pixels Nf representing fluorescent image Zk formed on the output face of the image fiber, and the number of pixels Nd receiving the light of the fluorescent image assembled within the light-receiving zone is such that the condition expressed by the formula: Nd×4>Nf, is satisfied; the number of pixels falls within the range not meeting the required sampling number for obtaining the complete image data of the fluorescent image formed on the output face of the image fiber, and because the light of the fluorescent image has been received on a number of pixels in a range smaller than that by which it becomes possible to distinguish the change of state to a tissue accompanying various types of disease by analyzing a photographed fluorescent image, the total quantity of fluorescent light received is not reduced, the number of pixels, in the range within which analysis of the fluorescent image is unimpeded, receiving the light of fluorescent image Zk can be reduced, and as a result, because the amount of dark noise produced per pixel is not changed and the quantity of light received per pixel can be increased, the fluorescent image can be photographed as an image having a high S/N ratio.

[0120] In addition, for cases in which the noise produced on 1 pixel of fluorescent image photographing element 33 is set so as to be controlled to 10 or less, for example, as described above, in the standard photographing state, that is, in a photographing state in which the living-tissue subject is illuminated by 100 mw of stimulating light having an illumination coverage angle of 120° and in which the fluorescent image is photographed utilizing the entire light-receiving zone of the photographing element and an exposure time of 1/30 seconds, an image of a cancerous tissue can be obtained as an image having a S/N ratio of 1 or higher, and if, as described above, the fluorescent image is reduced to 1/4 size and focused on one section of the light-receiving zone of the photographing element, an image signal having an even higher S/N ratio can be obtained.

[0121] Further, if the number of optical fiber strands of the output face of an image fiber is large, such that the number of pixels representing a fluorescent image is, for example, 30,000, the formula expressing the condition to be met by the relation between the number of pixels Nf and the number of pixels Nd becomes: Nf×4=120,000>Nd, and for cases in which the number of pixels Nd receiving the light of the fluorescent image within the light-receiving zone is sufficiently large, for example Nd=100,000, there are not an unnecessarily large number of pixels Nd of the light-receiv-

ing zone of the photographing element focusing the fluorescent image formed on the output face of the image fiber, and by focusing the fluorescent image in a light-receiving zone limited to having 40,000 or fewer pixels, which is the number at which it is possible to analyze a photographed fluorescent image and distinguish the change of state to a tissue accompanying various types of disease, the quantity of fluorescent light received per pixel can be further increased and the fluorescent image read out from the photographing element, and the fluorescent image can be obtained as an image signal having even higher S/N ratio.

[0122] Still further, by photographing and reading out fluorescent image Zk at the closest point to readout port 33b, fluorescent image Zk can be photographed as an image having an even higher S/N ratio.

[0123] That is to say, as shown in FIG. 7A, if the pixels arranged in lines in light-receiving zone 33a are labeled starting with the line closest to readout port 33b as #1, #2, #3, etc., when read out from the photographing element as an image signal, as shown in FIG. 7B, the image signal stored on a one line portion is read out from readout port 33b starting with the pixels of line #1, and when read out of the image charge stored on the pixels in line #1 is complete, as shown in FIG. 7C, the image signal stored on the pixels of line #2 is transferred one line to the position of readout port 33b, that is, is transferred to the position that had been occupied by the already read out line #1. Then, as shown in FIG. 7D, in the same way as the one line portion of the pixels of line #1 were read out, the image signal stored on line #2 is read out from readout port 33b in a one-line portion. Then, this type of operation is repeated and by reading out the image charge stored on each pixel, because fluorescent image focusing zone Es in which fluorescent image Zk is assembled is read out faster than the other zones, the quantity of dark noise accumulated on each pixel with the passage of time can be kept small.

[0124] In other words, the image focusing zone (fluorescent image focusing zone Es) for focusing round fluorescent image Zk is set so that it is inscribed in a corner formed by adjacent sides L1 and L2, which define readout port 33b of light-receiving zone 33a of fluorescent photographing element 33, and although each line #1, #2, #3, etc. also contains pixels of zones outside fluorescent image readout zone Es, cases in which a fluorescent image Zk of the same size is assembled at the closest position to the set readout port 33b described above, readout of fluorescent image Zk can be completed more rapidly than for cases in which fluorescent image Zk is focused on other regions, such as region Ex shown in FIG. 7D.

[0125] For cases in which the signal charge stored on each pixel of the photographing element is sequentially read out as described above, by focusing the fluorescent image at the closest position to the readout port within the light-receiving zone of the photographing element, because the time for dark noise to accumulate is reduced, the fluorescent image can be photographed as an image having a higher S/N ratio.

[0126] The image signal carrying the image data of a fluorescent image Zk photographed in this way is input to image signal extraction circuit 35, and only the image signal corresponding to the pixels contained within image readout zone R of light-receiving zone 33a of the fluorescent image photographing element shown in FIG. 2, and the thus

extracted image signal is again input to image signal processing circuit 34a, converted to a visible-image signal and output from fluorescent image photographing unit 300. Then, the image signal carrying the image data of said fluorescent image Zk is input to display 400 together with the image signal carrying the image data of normal image Zw, which was photographed by normal-image photographing element 25 and output via visible image processing circuit 34b, combined therewith and output on a single screen as a visible image at the same time.

[0127] FIG. 8 is a schematic drawing of the main part of a fluorescent endoscope implementing photographing apparatus for executing the photographing method according to the second embodiment of the present invention, and the structures having functions in common with those in the first embodiment are labeled with the same reference numerals. As shown in FIG. 8, the fluorescent endoscope according to the second embodiment of the present invention comprises a zooming optical means 55 capable of changing the zooming rate of a fluorescent image Zk transferred to output face 22b of the image fiber and assembled at a predetermined zooming rate on fluorescent image photographing element, an XY table 51 for supporting fluorescent image photographing element 33, moving fluorescent image photographing element 33 and the light-receiving face thereof on a parallel XY plane surface and which is provided with a drive portion (not shown) for changing the position at which fluorescent image Zk is assembled within light-receiving zone 33a, and a photographing-conditions setting device 52 for splitting the signal again output from readout port 33b of fluorescent-image photographing element 33, inputting said split signal and obtaining the total quantity of fluorescent light the fluorescent image photographing element received, and outputting 4 setting signals, corresponding to said obtained quantity of received fluorescent light, related to the zooming rate of zooming optical system 55, the fluorescent image receiving sector within light-receiving zone 33a of the fluorescent-image photographing element, the readout zone within light-receiving zone 33a of the fluorescent-image photographing element, and the readout frequency of the photographing element to the zooming optical system 55, XY table 51 and image signal extracting circuit 35, and the fluorescent image photographing element 33, respectively, wherein the other structures are the same as those of the first embodiment.

[0128] Note that photographing conditions setting device 52 is also provided with a function for changing, corresponding to the zooming rate of zooming optical system 55, the readout frequency of fluorescent image photographing element 33, and corresponding to the degree to which the zooming rate of zooming optical system 55 becomes lower, the readout frequency of fluorescent image photographing element 33 is set lower. In addition, for cases in which said fluorescent image photographing element is a charge-amplification type photographing element that amplifies the charge by impact ionization, the readout frequency of the fluorescent image photographing element is fixed, and is not changed by the zooming rate of zooming optical system 55.

[0129] That is to say, according to photographing elements that are not charge-amplification type photographing elements that amplify the charge by impact ionization, for cases in which the readout speed is 30 frames/second, a greater quantity of readout noise than dark noise is produced, and

said readout noise accounts for the greater part of the noise produced. Here, if the readout speed is set and the number of pixels read out per frame is $\frac{1}{4}$, it is possible to make the readout frequency $\frac{1}{4}$ (it is possible to increase the time to readout 1 pixel by 4 times). Because the quantity of readout noise becomes larger in proportion to the readout frequency, if the readout frequency becomes $\frac{1}{4}$, the readout noise becomes $\frac{1}{2}$. In other words, if the zooming rate is set at $\frac{1}{2}$ and the predetermined observation zone is focused smaller on the photographing element and the number of pixels to be read out is made to be $\frac{1}{4}$, the readout frequency can be made to be $\frac{1}{4}$, and as a result, the readout noise can be reduced by $\frac{1}{4}$. Accordingly, the quantity of noise produced is reduced, and the sensitivity is improved (the S/N ratio of the image signal obtained is improved).

[0130] On the other hand, for cases in which a charge-amplification type photographing element that amplifies the charge by impact ionization is used at a readout speed of 30 frames/second, the dark noise accounts for the greater part of the noise produced (compared to a normal photographing element, the readout noise becomes less than $\frac{1}{10}$). The reverse side of this is that this dark noise cannot be reduced by the effect of impact ionization. Therefore, by making the zooming rate of zooming optical system $55\frac{1}{2}$ and focusing the predetermined observation zone smaller on the photographing element and making the number of pixels to be readout $\frac{1}{4}$, even if the readout frequency is made $\frac{1}{4}$, the dark noise is not reduced. For cases such as this, quite the opposite, if the readout frequency is fixed and not changed in correspondence to the zooming rate, the number of pixels read out when the zooming rate has been set low becomes small, the time required to read out 1 frame is shortened, and the effect whereby the dark noise is reduced can be used.

[0131] Note that for cases in which the zooming rate of zooming optical system 55 has been made low, the predetermined image is focused in a smaller zone on the photographing element (on a small number of pixels), and this small number of pixels is controlled by photographing conditions setting device 52 so as to be obtained as a 1 frame image.

[0132] Next, operation of the second embodiment will be explained. As shown in FIG. 8, in the initial state, in which zooming optical system 55 has been set to the desired zooming rate and XY table 51 has been set to the desired position, the fluorescent image Zk transferred to output face $22b$ of the image fiber is assembled within light-receiving zone $33a$ of the fluorescent-image photographing element at the desired size as an image having a circular outline in fluorescent image focusing zone E, photographed and output from readout port $33b$ as image signal Sg1. Then, the image signal Sg1 output from readout port $33b$ is split in two: the image signal Sg1 transferred to one side of the transfer circuit is input to the image signal extraction circuit 35 , and the image signal Sg1 transferred to the other side of the transfer circuit is input to photographing-conditions setting device 52 . Note that because the image signals of the split image signal have the same signal value as the image signal prior to splitting, all 3 of said image signals are represented as Sg1.

[0133] Next, setting the settings of zooming optical system 55 , XY table 51 and image signal extraction circuit 35 , based on the setting signals output from photographing-

conditions setting device 52 into which image signal Sg1 has been input, will be explained. Photographing-conditions setting device 52 into which image signal Sg1 has been input obtains the total quantity of fluorescent light Tp1 received by fluorescent image photographing element 33 , that is, obtains the total quantity of fluorescent light received from fluorescent image Zk, and by dividing the total quantity of received light Tp1 by the value, Op, of the standard quantity of light received per pixel, which has been entered and recorded in photographing-conditions setting device 52 in advance, photographing-conditions setting device 52 , obtains a number of pixels, $Tp1/Op=Gn1$, appropriate for receiving the light of said fluorescent image Zk. In other words, if fluorescent image Zk is focused on a number of pixels Gn1 (individual pixels) within light-receiving zone $33a$ of the fluorescent image photographing element, the average quantity of light received per pixel in the light-receiving zone receiving the light of fluorescent image Zk can be made to match the standard value Op of the quantity of light to be received per pixel recorded in photographing-conditions setting device 52 .

[0134] Note that said standard of quantity of received Op is set at the minimum quantity of light required to be received per pixel so as to ensure for the clarity of the fluorescent image to be viewed, and accompanying reception of a quantity of light per pixel that is lower than this value, the signal charge stored due to reception of the fluorescent light becomes buried in the signal charge stored due to noise, and the fluorescent image to be viewed has poor clarity, whereby it is difficult to distinguish clearly the structures therein.

[0135] For cases in which the relation of the number of pixels Gn1 to aforementioned value $Nf \times 4$ is such that $Nf \times 4 > Gn1$, the number of pixels receiving the light of fluorescent image Zk is Gn1, and for cases in which the relation is such that $Nf \times 4 < Gn1$, the number of pixels receiving the light of fluorescent image Zk is the number of pixels Gn1' satisfying the condition: $Nf \times 4 > Gn1'$. That is to say, even for cases in which the quantity of light emitted from a living-tissue subject is extraordinarily large, the fluorescent image Zk is not focused on a number of pixels greater than that required; the number of pixels receiving the light is set so that the quantity of light received per pixel is increased. Based on the number of pixels receiving the light of fluorescent image Zk, set as described above, the area of the light-receiving zone in which fluorescent image Zk is assembled, fluorescent image assembly area P1, is obtained.

[0136] Next, the obtaining of the setting signals by photographing conditions setting device 52 , based on aforementioned fluorescent image assembly area P1, will be explained. First, by obtaining the ratio of output face $22b$ of the image fiber to aforementioned fluorescent image assembly area P1, a setting signal Sa1, which sets the predetermined zooming rate M of zooming optical system 55 is obtained so that the area of the fluorescent image Zk to be assembled within light-receiving zone $33a$ of the fluorescent image photographing element is equivalent to fluorescent image assembly area P1. Next, in the same way as in the first embodiment and as shown in FIG. 9, within a circular zone inscribed by sides L1 and L2 and enclosing readout port $33b$ within light-receiving zone $33a$ of the fluorescent image photographing element, fluorescent image light-receiving sector Q1 within area P1 is set, and based on the position of

center-point J1 within said fluorescent image light-receiving sector Q1, a setting signal Sb1, which determines the orientations of the X and Y directions of fluorescent image photographing element 33, is determined. Then, by setting as an image readout zone R1 a desired zone contained within fluorescent image light-receiving sector Q1 within light-receiving zone 33a of the fluorescent image photographing element, a setting signal Sc1 for extracting a specific image signal corresponding to the pixels contained in image readout zone R1 is obtained.

[0137] Continuing, photographing conditions setting device 52 outputs setting signals Sa1, Sb1 and Sc1 to zooming optical system 55, XY table 51 and image signal extraction circuit 35, respectively. When setting signal Sa1 is input to zooming optical system 55, the zooming rate thereof is set, and as shown in FIG. 10, fluorescent image Zk having a fluorescent image assembly area P1 is assembled within fluorescent image focusing zone E1 within light-receiving zone 33a of the fluorescent image photographing element.

[0138] Then, as shown in FIG. 11, when setting signal Sb1 is input to XY table 51, fluorescent image photographing element 33 is moved by XY table 51 in the direction of arrow H so as to match center-point J1 of fluorescent image light-receiving sector Q1 within said light-receiving zone 33a with the position at which light axis Z of the zooming optical system focusing fluorescent image Zk intersects with light-receiving zone 33a of the fluorescent image photographing element, that is, center-point V of the fluorescent image focusing zone E1. That is to say, center-point J1 of fluorescent image light-receiving sector Q1 within light-receiving zone 33a of fluorescent image photographing element 33 is moved together with fluorescent image photographing unit 33 toward center-point V of fluorescent image focusing zone E1, in which the fluorescent image Zk has been assembled; the relative positions of the assembly zone, in which fluorescent image Zk has been assembled, and fluorescent image photographing element 33 are changed and XY table 51 stops at the position at which aforementioned fluorescent image focusing zone E1 and fluorescent image light-receiving sector Q1 are matched.

[0139] Then, fluorescent image Zk is photographed under the settings described above, image signal Sg1 that has been read out from readout port 33b of fluorescent image photographing element 33 and input to image signal extraction circuit 35, only the image signal obtained from the pixels contained within the range of readout zone R1 that has been set within light-receiving zone 33a is extracted and output, and the extracted and output image signal is input to visible-image signal processing circuit 34a, converted to a visible-image signal and output.

[0140] The visible-image signal, carrying the image data of fluorescent image Zk, output from visible image data processing circuit 34a, in the same way as in the first embodiment, is photographed by normal-image photographing element 25 and output via visible-image signal processing circuit 34b, and input, combined with the image signal carrying the image data of normal image Zw, to display 400 and output simultaneously on one display screen as a visible image (refer to FIG. 1).

[0141] Next, an explanation will be given for a case in which, with the fluorescent image Zk is in the state of being

displayed as described above, the quantity of fluorescent light emitted from a living-tissue subject and the quantity of light received at fluorescent image photographing element 33 is reduced. As shown in FIG. 12, in the same way as described above, the photographing conditions setting device 52 into which the image signal Sg2 obtained when the quantity of fluorescent light received at the fluorescent image photographing element 33 is reduced obtains the total quantity of received light Tp2 received at fluorescent image photographing element 33, and by dividing said total quantity of received light Tp2 by aforementioned standard quantity of received light Op, a smaller number of pixels than that described above, $Gn2 = Tp2/Op$, is obtained. In other words, if fluorescent image Zk is focused on the number of pixels Gn2 (individual pixels) within light-receiving zone 33a of fluorescent image photographing element 33, the average quantity of light received per pixel within this assembly zone can be made to be the same as the standard quantity of received light Op.

[0142] Then, in the same way as described above, for cases in which the relation of the number of pixels Gn2 to aforementioned value $Nf \times 4$ is such that $Nf \times 4 > Gn2$, the number of pixels receiving the light of fluorescent image Zk is Gn2, and for cases in which the relation is such that $Nf \times 4 < Gn2$, the number of pixels receiving the light of fluorescent image Zk is the number of pixels Gn2' satisfying the condition: $Nf \times 4 > Gn2'$. Based on the number of pixels receiving the light of fluorescent image Zk, set as described above, the area of the light-receiving zone in which fluorescent image Zk is assembled, fluorescent image assembly area P2, is obtained.

[0143] Continuing, by the same procedure described above, setting signals Sa2, Sb2 and Sa3 are obtained by photographing conditions setting device 52, based on aforementioned fluorescent image focusing zone P2, and output to zooming optical means 55, XY table 51 and image signal extraction circuit 35, respectively. When setting signal Sa2 is input to zooming optical system 55, the zooming rate of zooming optical system 55 is set so that when fluorescent image Zk is assembled, the area within light-receiving zone 33a of the fluorescent image photographing element focusing said fluorescent image Zk becomes fluorescent image assembly area P2. Next, when setting signal Sb2 is input to XY table 51, fluorescent image light-receiving sector Q2 is set at the closest position to the readout port 33b of the fluorescent image photographing element within light-receiving zone 33a having the same area as aforementioned fluorescent image assembly area P2, and fluorescent image photographing element 33 is moved by XY table 51 so as to match center-point J2 of said fluorescent image light-receiving sector Q2 within said light-receiving zone 33a with the light axis Z of the optical system focusing fluorescent image Zk, that is, center-point V of the fluorescent image focusing zone E2. That is to say, fluorescent image focusing zone E2 is moved together with fluorescent image photographing element 33 toward fluorescent image light-receiving sector Q2 in which fluorescent image Zk is has been assembled, and XY table 51 stops at the position at which aforementioned fluorescent image focusing zone E2 and fluorescent image light-receiving sector Q2 are matched.

[0144] Then, according to the setting in which the resolution of aforementioned fluorescent image is lowered, the quantity of light received per pixel is increased and the S/N

ratio improved, fluorescent image Zk is photographed and readout from readout port 33b as image signal Sg2, said image signal Sg2 is input to image signal extracting circuit 35 and only the image signal of the pixels contained within fluorescent image extraction zone R2 within fluorescent image light-receiving sector Q2, which has been set within light-receiving zone 33a based on aforementioned setting signal Sc2, is extracted and output, and said extracted and output image signal is converted to a visible-image signal and output.

[0145] The visible-image signal, carrying the image data of fluorescent image Zk, output from visible-image signal processing circuit 34a, in the same way as described above, is photographed by normal-image photographing element 25 and output via visible-image signal processing circuit 34b, and input, combined with the image signal carrying the image data of normal image Zw, to display 400 and output simultaneously on one display screen as a visible image.

[0146] In this way, according to the second embodiment of the present invention, by changing the size of the fluorescent image assembled within light-receiving zone 33a of the fluorescent image photographing element in accordance with the quantity of fluorescent light received at the photographing element, because adjustment can be made so that the quantity of light received per pixel is ensured and resolution of the fluorescent image is improved, the fluorescent image can be photographed as an image having an appropriate quantity of light as well as good resolution.

[0147] Note that according to the first and second embodiments, although fluorescent image Zk is assembled at the closest point to the readout port, even if fluorescent image Zk is not assembled at the closest point to the readout port, if the light received per pixel can be ensured to match the standard quantity of received light per pixel, the effect whereby the S/N ratio per pixel is improved can be obtained. Further, if the settings to assemble fluorescent image Zk at the closest point to the readout port are carried out, early readout of the signal charge, representing fluorescent image Zk, stored on each pixel of the fluorescent image focusing zone becomes possible, and because the time for dark noise to accumulate on each pixel contained in said fluorescent image focusing zone is shortened, the fluorescent image can be photographed as an image having a higher S/N ratio.

[0148] In addition, according to the first and second embodiments, an example utilizing a front-exposure type CCD photographing element was given, if a photographing element sequentially reads out the signal charge stored on each pixel, the photographing element to be utilized is not necessarily limited to front-exposure CCD type photographing elements; other photographing elements, such as rear-exposure type CCD photographing elements, etc. may also be used.

[0149] Note that for cases in which a rear-exposure type photographing element is used, because the quantum efficiency of a rear-exposure type photographing element is substantially twice that of a front-exposure type photographing element, in aforementioned standard photographing state, for cases in which a cancerous tissue is photographed as an image having an S/N ratio of 1 or higher, at normal temperature or lower, the photographing conditions can be set so that the sum of the number of electrons of readout noise and dark noise produced on each pixel within the

light-receiving zone receiving the light of the fluorescent image is 20 or less and the fluorescent image formed on the output face of the image fiber photographed, and if the number of pixels receiving the light of fluorescent image Zk within the light-receiving zone is made few, the S/N ratio can be raised even further.

[0150] FIG. 13 is a schematic drawing showing the main part of a fluorescent image photographing unit, contained within a fluorescent endoscope apparatus implementing a photographing apparatus for carrying out the photographing method according to the third embodiment of the present invention, and structures having functions in common with those of the first embodiment are labeled with the same reference numerals. As shown in FIG. 13, the configuration of the fluorescent endoscope apparatus according to the third embodiment utilizes an MOS type photographing element 61 capable of reading out the signal charge stored on each pixel as the photographing element, which is set so that the fluorescent image Zk conveyed to output face 22b of the image fiber is assembled by an focusing mirror 32 in the fluorescent image focusing zone Es within the readout zone Fs set within light-receiving zone 61a of MOS type photographing element 61 and photographed, and in which the image signal extracting circuit 35 employed in the first embodiment has been excluded.

[0151] In addition, in the same way as in the first embodiment, the number of pixels Nd contained within fluorescent image focusing zone Es in which fluorescent image Zk has been assembled (the number of pixels Nd contained within light-receiving zone 61a receiving the light of fluorescent image Zk which has been assembled therein) is less than 4 times the number of pixels Nf displaying the fluorescent image formed on output face 22b of the image fiber, that is to say, is set so as to satisfy the condition: $Nd \times 4 > Nf$.

[0152] According to this type of configuration, for cases in which the fluorescent image Zk conveyed to output face 22b of the image fiber is assembled by an focusing mirror 32 in the fluorescent image focusing zone Es within light-receiving zone 61a and photographed by MOS type photographing element 61, compared to cases in which fluorescent image Zk is focused on fluorescent image focusing zone Eb, which encompasses almost the entire light-receiving zone of the photographing element (refer to FIG. 14), cases in which fluorescent image Zk is assembled within light-receiving zone 61a on a small fluorescent image focusing zone Es satisfying the condition expressed by the formula: $Nf \times 4 > Nd$, and photographed, the S/N ratio of the image can be improved due to the same reason as in the first embodiment.

[0153] For example, comparing fluorescent image Zk assembled large in fluorescent image focusing zone Zk of photographing element 61 to fluorescent image Zk assembled small within fluorescent image focusing zone Eb at $\frac{1}{16}$ the size of said fluorescent image focusing zone Es, the quantity of light received per pixel for cases in which fluorescent image Zk is assembled small on the $\frac{1}{16}$ size zone becomes 16 times that of cases in which fluorescent image Zk is assembled large on the entire light-receiving zone, and on the other hand, the quantity of noise produced per pixel is substantially equal. As a result, because the ratio of the signal charge stored on 1 pixel due to reception of fluores-

cent light to the signal charge stored as noise becomes high, the fluorescent image can be photographed as an image having a high S/N ratio.

[0154] In addition, because the MOS type photographing element is capable of reading out, in a random manner, the signal charge stored on each pixel, there is no limitation due to the direction in which each pixel of the photographing element is arranged, and as shown in FIG. 15, for example, if the arrangement of the pixels of light-receiving zone 61a within MOS type photographing element 61 is 500×500 lines represented by P (500, 500), because the pixels contained within readout zone Fs enclosed within the 4 points of pixel P1=P (200, 200), pixel P2=P (200, 300), P3=(300, 200) and P4=(300, 300) can be set so as to be read out prior to the pixels contained within other zones, if said readout zone Fs is set so as to be read out prior to the other zones, the time for dark noise to accumulate on each pixel of readout zone Fs is shortened and the fluorescent image can be photographed as an image having a higher S/N ratio.

[0155] According to this type of setting, fluorescent image Zk is photographed by MOS type photographing element 61 and output therefrom as image signal Sg1, said image signal Sg1 is input to visible image processing circuit 34a, converted to a visible-image signal and output from fluorescent image photographing unit 300.

[0156] The visible-image signal, carrying the image data of fluorescent image Zk, output from visible-image signal processing circuit 34a, in the same way as in the first embodiment, is photographed by normal-image photographing element 25 and output via visible-image signal processing circuit 34b, and input, combined with the image signal carrying the image data of normal image Zw, to display 400 and output simultaneously on one display screen as a visible image.

[0157] FIG. 16 is a schematic drawing showing the main part of a fluorescent image photographing unit, contained within a fluorescent endoscope apparatus implementing a photographing apparatus for carrying out the photographing method according to the fourth embodiment of the present invention, and structures having functions in common with those of the third embodiment are labeled with the same reference numerals. Note that the third embodiment has been described in reference to the first embodiment, and a part of the explanation given below is given in reference to FIG. 1.

[0158] As shown in FIG. 16, the fluorescent endoscope apparatus according to the fourth embodiment comprises a zooming optical system 71 capable of changing the predetermined zooming rate at which the fluorescent image Zk conveyed to output face 22b of the image fiber is assembled within light-receiving zone 61a of MOS type photographing element 61, and a readout control device 73 for splitting and inputting the image signal output from MOS type photographing element 61, obtaining the total quantity of fluorescent light received at MOS type photographing element 61, obtaining the zooming rate setting value of zooming optical means 71 and the setting value of the readout zone within light-receiving zone 61a corresponding to said total quantity of received light, and outputting each respective setting signal to zooming optical system 71 and MOS type photographing element 61, wherein the other structures are the same as those of the third embodiment.

[0159] Next, the operation of photographing apparatus according to the fourth embodiment will be explained. In the

initial state, in which the desired zooming rate of zooming optical system 71 and the desired readout zone within light-receiving zone 61a of MOS type photographing element 61 have been set, the fluorescent image Zk transferred to output face 22b of the image fiber is assembled at the desired position and the desired size within light-receiving zone 61a of MOS type photographing element 61 as an image having a round outline, photographed, and output as image signal Sg1. Then, the image signal Sg1 output from MOS type photographing element 61 is split in two: the image signal Sg1 transferred to one side of the transfer circuit is input to visible image processing circuit 34a, and the image signal Sg1 transferred to the other side of the transfer circuit is input to readout control device 73. Note that because the two image signals of the split image signal have the same signal value as the image signal prior to splitting, all three of said image signals are represented as Sg1.

[0160] Next, the setting of the zooming rate of zooming optical system 71, and the readout zone within light-receiving zone 61a, based on the setting signals output from readout control device 73 into which image signal Sg1 has been input, will be explained.

[0161] The readout control device 73, into which image signal Sg1 has been input, obtains the total quantity of fluorescent light received at MOS type photographing element 61, that is, the total quantity of received light Tp1 received through reception of fluorescent image Zk, and by dividing said total quantity of received light Tp1 by the value of the standard quantity of received light per pixel Op, which has been prerecorded in readout control device 73, an appropriate number of pixels to receive the light of fluorescent image Zk, $Tp1/Op = Gn1$, is obtained. In other words, if fluorescent image Zk is focused on a number of pixels Gn1 (individual pixels) within light-receiving zone 33a of the fluorescent image photographing element, the average quantity of light received per pixel within the light-receiving zone receiving the light of said fluorescent image Zk can be made to match that of the standard quantity of received light per pixel Op prerecorded in said readout control device 73.

[0162] Note that the value of aforementioned standard quantity of received light Op is set at the minimum quantity of light required to be received per pixel so as to ensure for the clarity of the fluorescent image to be viewed, and accompanying reception of a quantity of light per pixel that is lower than this value, the signal charge stored due to reception of the fluorescent light becomes buried in the signal charge stored due to noise, and the fluorescent image to be viewed has poor clarity, whereby it is difficult to distinguish clearly the structures therein.

[0163] For cases in which the relation of the number of pixels Gn1 to aforementioned value $Nf \times 4$ is such that $Nf \times 4 > Gn1$, the number of pixels receiving the light of fluorescent image Zk is Gn1, and for cases in which the relation is such that $Nf \times 4 < Gn1$, the number of pixels receiving the light of fluorescent image Zk is the number of pixels Gn1' satisfying the condition: $Nf \times 4 > Gn1'$. That is to say, even for cases in which the quantity of light emitted from a living-tissue subject is extraordinarily large, the fluorescent image Zk is not focused on a number of pixels greater than that required; the number of pixels receiving the light is set so that the quantity of light received per pixel is increased.

Based on the number of pixels receiving the light of fluorescent image Zk, set as described above, the area of the light-receiving zone in which fluorescent image Zk is assembled, fluorescent image assembly area P1, is obtained.

[0164] Continuing, the obtaining of the setting signals by readout control device 73, based on aforementioned fluorescent image assembly area P1, will be explained. First, by obtaining the ratio of output face 22b of the image fiber to aforementioned fluorescent image assembly area P1, the setting signal Sa1 for setting the predetermined zooming rate of zooming optical system 71, which causes the area within light-receiving zone 61a of MOS type photographing element 61 in which fluorescent image Zk is to be assembled to become equal to that of fluorescent image focusing zone P1, is obtained. Next, a setting signal Sb1 for setting a square-shaped readout zone F1, which circumscribes fluorescent image focusing zone E1 having a round shape, within which fluorescent image Zk is assembled in area P1 of light-receiving zone 61a, so that the center-point C1 thereof (the point at which the diagonal lines intersect) is matched with light axis Z of the optical system focusing the fluorescent image Zk, that is, with the center-point of fluorescent image focusing zone E1, is obtained.

[0165] Then, when setting Sa1 is input to zooming optical system 71, the zooming rate thereof is set, and fluorescent image Zk having fluorescent image assembly area P1 is assembled within light-receiving zone 61a of MOS type photographing element 61. Then, when setting signal Sb1 is input to MOS type photographing element 61, aforementioned readout zone F1 is set within the light-receiving zone 61a thereof.

[0166] According to the settings described above, fluorescent image Zk is photographed by MOS type photographing element 61 and output therefrom as image signal Sg1, said image signal Sg1 is input to visible image processing circuit 34a, converted to a visible-image signal and output from fluorescent image photographing unit 300.

[0167] The visible-image signal, carrying the image data of fluorescent image Zk, output from visible image data processing circuit 34a, in the same way as in the third embodiment, is photographed by normal-image photographing element 25 and output via visible-image signal processing circuit 34b, and input, combined with the image signal carrying the image data of normal image Zw, to display 400 and output simultaneously on one display screen as a visible image (refer to FIG. 1).

[0168] Next, an explanation will be with reference to FIG. 17 for cases in which, in the state described above in which the range of readout zone F1 containing fluorescent image Zk is displayed as a visible image, the quantity of light emitted from the living-tissue subject is reduced and the quantity of fluorescent light received on MOS type photographing element 61 is reduced.

[0169] Readout control device 73 into which image signal Sg2 has been input when the quantity of fluorescent light received by MOS type photographing element 61 is reduced, in the same way as described above, obtains the total quantity of fluorescent light received by MOS type photographing element 61, and by dividing the value of this total quantity of received light Tp2 by the value of aforemen-

tioned standard quantity of received light Op, a number of pixels Gn2 smaller than aforementioned number of pixels is obtained: $Gn2 = Tp2 / Op$. In other words, if fluorescent image Zk is focused on the number of pixels Gn2 (individual pixels) within light-receiving zone 61a of the fluorescent image photographing element, the average quantity of light received on the pixels within this assembly zone can be made to match the value of the standard quantity of received light Op.

[0170] Then, in the same way as described above, for cases in which the relation of the number of pixels Gn2 to aforementioned value $Nf \times 4$ is such that $Nf \times 4 > Gn2$, the number of pixels receiving the light of fluorescent image Zk is Gn2, for cases in which the relation is such that $Nf \times 4 < Gn2$, the number of pixels receiving the light of fluorescent image Zk is the number of pixels Gn2' satisfying the condition: $Nf \times 4 > Gn2'$. Based on the number of pixels receiving the light of fluorescent image Zk, set as described above, the area of the light-receiving zone in which fluorescent image Zk is assembled, fluorescent image assembly area P2, is obtained.

[0171] Continuing, the obtaining of the setting signals by readout control device 73, based on aforementioned fluorescent image assembly area P2, will be explained. First, by obtaining the ratio of output face 22b of the image fiber to aforementioned fluorescent image assembly area P2, the setting signal Sa2 for setting the zooming rate of zooming optical system 71, is obtained. Next, a setting signal Sb2 for setting a square-shaped readout zone F2, which circumscribes fluorescent image focusing zone E2 having a round shape, within which fluorescent image Zk is assembled in area P2 of light-receiving zone 61a, so that the center-point C2 thereof (the point at which the diagonal lines intersect) is matched with light axis Z of the optical system focusing the fluorescent image Zk, that is, with the center-point of fluorescent image focusing zone E2, is obtained.

[0172] Then, when setting Sa2 is input to zooming optical system 71, the zooming rate thereof is set, and a small fluorescent image Zk having fluorescent image assembly area P2 is assembled within light-receiving zone 61a of MOS type photographing element 61. Then, when setting signal Sb2 is input to MOS type photographing element 61, a readout zone F2 containing aforementioned fluorescent image Zk, which has been assembled small within the light-receiving zone 61a thereof, is set within said light-receiving zone 61a.

[0173] According to the setting in which the resolution of aforementioned image is lowered, the quantity of light received per pixel is increased and the S/N ratio improved, the signal charge of the pixels contained within readout zone F2 is output from MOS type photographing element 61 as image signal Sg2', input to visible-image signal processing circuit 34a, converted to a visible-image signal and output from fluorescent image photographing unit 300.

[0174] The visible-image signal, carrying the image data of fluorescent image Zk, output from visible image data processing circuit 34a, in the same way as in the third embodiment, is photographed by normal-image photographing element 25 and output via visible-image signal processing circuit 34b, and input, combined with the image signal

carrying the image data of normal image **Zw**, to display **400** and output simultaneously on one display screen as a visible image (refer to **FIG. 1**).

[0175] In this way, according to the fourth embodiment of the present invention, by changing the size of the fluorescent image assembled within light-receiving zone of the MOS type photographing element in accordance with the quantity of fluorescent light received at said photographing element, because adjustment can be made so that the quantity of light received per pixel is ensured and resolution of the fluorescent image is improved, the fluorescent image can be photographed as an image having an appropriate quantity of light as well as good resolution, a reading zone neither too small nor too large can be set in accordance with the size of the fluorescent image, whereby efficient initial readout of the fluorescent image becomes possible and the fluorescent image can be photographed as an image having a high S/N ratio.

[0176] Note that according to the fourth embodiment, an example in which a readout zone was set as a square-shaped circumscribed in the image focusing zone of the fluorescent image, and the signal charge of the pixels contained within said readout zone were set so as to be read out was given, however, the effect by which the noise produced per pixel is controlled, the quantity of received light increased and the S/N ratio improved can be obtained by focusing the fluorescent image small, and settings such as those described above are not necessarily required. However, if readout zone circumscribed within the image focusing zone of the fluorescent image is set and read out at an early period/prior to the other zones, compared to cases in a larger readout zone has been set read out thereof is performed, because the time for dark noise to accumulate on each pixel receiving the light of the fluorescent image is shortened, an effect by which the fluorescent image can be photographed as an image having a further improved S/N ratio can be obtained.

[0177] In addition, according to the third and fourth embodiments, examples were given in which an MOS type photographing element was used as the photographing element, however, if the photographing element used is capable of reading out the signal charge of each pixel in a random manner, it is not necessarily limited to being an MOS type photographing element.

[0178] **FIG. 18** is a schematic drawing showing a part of a fluorescent image photographing unit, contained within a fluorescent endoscope apparatus implementing a photographing apparatus for carrying out the photographing method according to the fifth embodiment of the present invention, and structures in common with those of the first embodiment are labeled with the same reference numerals. The photographing apparatus utilized in the fluorescent endoscope apparatus according to the fifth embodiment of the present invention is a frame transfer type CCD for sequentially transferring and reading out the signal charge stored on each pixel, which is provided with a clearing drain.

[0179] As shown in **FIGS. 18 and 19**, the fluorescent image photographing unit **300** of the fluorescent endoscope apparatus of the fifth embodiment comprises an image fiber **22**, a photographing element **80** for sequentially transferring and reading out the signal charge stored on each pixel, a sequential-readout control means **81** and a gate control means **82** for controlling the readout of the signal charge of

the light received by photographing element **80**, a zooming optical system **55**, which is an assembly means capable of changing the zooming rate, for focusing fluorescent image **Zk** transferred to output face **22b** of the image cable on photographing element **80** (assembled as the light image of the subject), and a readout conditions setting device **83** for setting the zooming rate of zooming optical system **55** as well as the readout zone, and in which the image signal extraction circuit, for extracting the image signal, of the first embodiment has been excluded. The other structures are the same as those of the first embodiment. Note that the light-receiving zone **80a** of photographing element **80** is provided with $n \times m$ number of individual light-receiving pixels arranged as a matrix.

[0180] The fluorescent image **Zk** transferred to output face **22b** of the image fiber is focused on readout zone **80y**, which is formed from $\frac{1}{2}$ or less of the total number of light-receiving pixels of light-receiving zone **80a**.

[0181] As shown in **FIG. 18**, photographing element **80** comprises a photoelectric conversion portion **84** formed of a number $n \times m$ light-receiving pixels arranged as a matrix and provided with a function for photoelectrically converting the light received at each pixel and storing said photoelectrically converted light as a signal charge on each pixel and a function for grouping together and vertically transferring the entire signal charge stored on the light-receiving pixels, a charge transfer portion **85** for sequentially transferring the signal charge from photoelectric conversion portion **84**, which has been grouped together, vertically transferred and stored on each light-receiving pixel, a sequential-readout portion **86** for converting to an electric image signal and reading out the signal charge, of readout zone **80y**, sequentially transferred by charge transfer portion **85**, a clearing drain **87** for discarding outside of charge transfer portion **85** the signal charge stored on the pixels contained in non-readout zone **80h** outside said readout zone **80y**, a first gate **88a** disposed between charge transfer portion **85** and sequential-readout portion **86** for controlling passage of the signal charge transferred by charge transfer portion **85** to sequential-readout portion **86** (that is, opening and closing of the gate is performed to control passage of the signal charge), and a second gate **88b** disposed between charge transfer portion **85** and clearing drain **87** for controlling passage of the signal charge transferred by charge transfer portion **85** to clearing drain **87**.

[0182] Charge transfer portion **85** is provided with a charge transfer storage portion formed of a number of pixels $n \times m$ arranged as a matrix for storing a signal charge, and a horizontal charge transfer portion **85b** formed of a number of pixels m arranged in a straight line. Charge transfer storage portion **85a** stores the signal charge grouped together and vertically transferred by charge transfer portion **84**, and transfers said stored signal charge to horizontal transfer portion **85b** 1 horizontal line at a time. Horizontal transfer portion **85b**, by again horizontally transferring the signal charge transferred 1 horizontal line at a time from charge transfer storage portion **85a**, has a function of grouping together and discarding, and a function of transferring said horizontal 1 line signal charge to sequential-readout portion **86**.

[0183] Sequential readout control means **81** inputs the setting signal output from readout conditions setting device

83, and based on said setting signal, controls charge transfer storage portion **85a**, horizontal transfer portion **85b** and sequential-readout portion **86**, and outputs vertical transfer commands, horizontal transfer commands, etc.

[0184] For cases in which a vertical transfer command is output from sequential readout control means **81**, the charge transfer storage portion **85a** and horizontal transfer portion **85b** into which said command has been input transfer said horizontal 1 line signal charge in a vertical direction. That is to say, these signal charges are transferred 1 horizontal line at a time from charge transfer storage portion **85a** to horizontal transfer portion **85b**, and to clearing drain **87** and discarded.

[0185] For cases in which a horizontal transfer command is output from sequential readout control means **81**, the charge transfer storage portion **85a** and horizontal transfer portion **85b** into which said command has been input cease said vertical transferring and transfer the 1 horizontal line signal charges transferred to horizontal transfer portion **85b** toward sequential-readout portion **86** in a horizontal direction. Then, these signal charges are converted to electric image signals by sequential-readout portion **86** and read out.

[0186] Gate control means **82** inputs a binning processing conditions setting signal from readout conditions setting device **83**, and in accordance with said input binning processing conditions, outputs to first gate **88a** and second gate **88b** signal carrying out control of the opening and closing thereof.

[0187] That is to say, for cases in which vertical binning processing is performed on an image signal, by closing first gate **88a** when a vertical-transfer command has been output from sequential readout control means **81**, the image signal transferred from charge transfer storage portion **85a** to horizontal transfer portion **85b**, and the 1 line portion signal charges transferred vertically toward clearing drain **87** cannot pass through second gate **88b** and are sequentially multiplied and stored in horizontal transfer portion **85b**.

[0188] On the other hand, for cases in which horizontal binning processing is performed on an image signal, by closing second gate **88b** when a horizontal-transfer command has been output from sequential readout control means **81**, the 1 line portion signal charges transferred horizontally toward sequential-readout portion **86** cannot pass through first gate **88a** and are sequentially multiplied and stored in horizontal transfer portion **85b**.

[0189] Next, the operation of the fifth embodiment will be explained.

[0190] Readout conditions setting device **83** outputs readout conditions setting signal to zooming optical system **55**, sequential readout control means **81** and gate control means **82**. As shown in FIG. 21, by these readout conditions, binning processing conditions are set so that readout zone **80y** formed of $\frac{1}{2}$ or less of the total number of light-receiving pixels of light-receiving zone **80a** is set, and a 2 vertical pixel $\times$ 2 horizontal pixel binning processing is performed on a circular fluorescent image **Zk** focused on said readout zone **80y**.

[0191] More specifically, sequential readout control means **81**, into which the setting signal output from readout conditions setting device **83** for setting readout zone **80y** has

been input, recognizes and records the position of all the light-receiving pixels contained within said readout zone **80y**. Zooming optical system **55**, into which the setting signal output from readout conditions setting device **83** for setting the zooming rate has been input, sets the zooming rate so that the circular fluorescent image **Zk** formed on output face **22b** of the image fiber is assembled as a circular fluorescent image **Zk** within light-receiving zone **80a**. Gate control means **82** and sequential readout control means **81**, into which the setting signal output from readout conditions setting device **83** for setting the binning processing have been input, recognize and record that a 2 vertical pixel $\times$ 2 horizontal pixel binning processing is to be performed on the signal charge transferred by charge transfer portion **85**.

[0192] Note that as shown in FIG. 21, readout zone **80y** is set so that it is formed by light-receiving pixels contained in rows **Ri-Rj** and columns **Cp-Cq** within light-receiving zone **80a**, which is formed of $n \times m$ number of individual pixels arranged in rows **R1-Rn** and columns **C1-Cm**.

[0193] Hereinafter, taking the position of the light-receiving pixels of light-receiving zone **80a**, which are arranged as a matrix, as the standard, when referring to each signal charge the corresponding position of aforementioned each light receiving pixel will be referred to: for example, the signal charge of row **Ry**, or the signal charge of column **Cx**, etc.

[0194] As described above, signal charge readout processing is initiated when each readout condition has been set by the setting signals from readout conditions setting device **83**. Note that in the initial state of said initiated reading out, first gate **88a** and second gate **88b** are open: in the state in which signal charges can pass therethrough.

[0195] When readout of the signal charge is initiated, first, the signal charge stored on the $n \times m$ number of individual pixels, from which light-receiving zone **80a** is formed, is transferred to charge transfer storage portion **85a**, which can store the entire signal charge stored on $n \times m$ number of individual pixels as such en masse (frame transfer) as a 1 screen portion (a 1 frame portion) (refer to FIG. 22).

[0196] The 1 screen portion signal charge transferred to and stored in charge transfer storage portion **85a** is vertically transferred 1 horizontal line at a time upon issuance of a vertical transfer command from sequential readout control means **81**.

[0197] Whether or not the signal charge stored on the light-receiving pixels within readout zone **80y** is contained in these 1 horizontal line image signals is remembered by sequential readout control means **81**, and because the signal charge due to light received within readout zone **80y** is not contained in the signal charge of the first 1 horizontal line **R1** of non-readout zone **80h**, the signal charge from this first 1 horizontal line is vertically transferred again from horizontal transfer portion **85b** to clearing drain **87** and discarded.

[0198] Also, because the photoelectrically converted signal charge of light received in readout zone **80y** is not contained in the signal charge of each of rows **R1-Ri** of non-readout zone **80h**, in the same way as described above, each 1 horizontal line of these signal charges is transferred to and discarded in clearing drain **87**.

[0199] Then, when the 1 horizontal line signal charges of rows **Ri-R1** that have been transferred to horizontal transfer

portion **85b** are transferred to clearing drain **87** and discarded, the signal charge of row R_i is transferred to horizontal transfer portion **85b**. Because the signal charge of this 1 horizontal line, row R_i , contains a readout signal charge photoelectrically converted by pixels contained within readout zone **80y**, said readout signal charge is subjected to binning processing in the vertical transfer direction (refer to **FIG. 23**).

[0200] That is to say, gate control means **82** outputs a control signal and second gate **88b** closes, the 1 horizontal line signal charge of row R_i transferred to horizontal transfer portion **85b** remains at horizontal transfer portion **85b**, and the next 1 line horizontal signal charge, R_{i+1} , is vertically transferred, multiplied and stored (refer to **FIG. 24**).

[0201] Next, upon issuance of a horizontal transfer command from sequential readout control means **81**, said two 1 horizontal line signal charges stored within horizontal transfer portion **85b** are transferred toward sequential-readout portion **86** in the horizontal direction, however, at this point, first gate **88a** is closed by gate control means **82**, and the signal charge of columns C_1 and C_2 stored within horizontal transfer portion **85b** is multiplied and stored (refer to **FIG. 25**). When multiplication of the signal charges is complete, first gate **88a** opens, and the signal charge contained on said rows R_i and R_{i+1} as well as columns C_1 and C_2 , which have been subjected to 2x2 binning processing, are output to sequential-readout portion **86**.

[0202] Because the signal charge subjected to binning processing contained on rows R_i and R_{i+1} as well as columns C_1 and C_2 does not contain a signal charge photoelectrically converted by pixels contained within readout zone **80y** (because it is a signal charge of non-readout zone **80h**), these residual signal charges are read out as null by sequential-readout portion **86** and no subsequent processing is performed.

[0203] Afterward, first gate **88a** is again closed, and next the signal charge of columns C_3 and C_4 within horizontal transfer portion **85b** is multiplied, and subjected to binning processing in the same way as described above.

[0204] In this way, the signal charges stored within horizontal transfer portion **85** on columns C_1 - C_q are subjected 2 at a time to binning processing in a horizontal direction, however, because these signal charges within columns C_1 - C_{p-1} are signal charges of the non-readout zone **80h**, said signal charges are read out as null by sequential-readout portion **86** and no subsequent processing is performed, and the signal charge of columns C_p - C_q are read out as readout signal charges by sequential-readout portion **86**, after which said signal charges are output to visible-image signal processing circuit **34a**, converted to display signals and displayed on display **400**.

[0205] In this way, upon completion of reading out of the signal charge stored on rows C_1 - C_q of horizontal transfer portion **85b**, because the signal portion of the remaining rows C_{q+1} - C_m are signal charges of the non-readout zone **80h**, second gate **88b** opens, a vertical transfer command is output from sequential readout control means **81**, and as shown in **FIG. 26**, the signal charges remaining in the 1 horizontal line portion of horizontal transfer portion **85b** are grouped together, transferred to clearing drain **87** and discarded, and horizontal transfer portion **85b** is cleared.

[0206] When readout of the signal charges of rows R_i - R_j of readout zone **80y** is completed in this way, because the signal charges of the next row R_{j+1} through the last row R_n are signal charges of non-readout zone **80h**, in the same way as the processing performed on the signal charges of rows R_1 - R_{i-1} , said signal charges of rows R_{j+1} - R_n are discarded into clearing drain **87**.

[0207] In addition, aforementioned binning processing is not limited to a 2 vertical pixelx2 horizontal pixel binning processing; the effect of further reducing the dark noise is obtained by performing any binning processing grouping.

[0208] Further, if the time required for reading out the signal charge of 1 pixel is already set uniformly at, for example, $\frac{1}{60}$ seconds, the portion of readout time saved by use of the clearing drain, the readout frequency used when reading out, as an image signal, the readout signal charge of readout zone **80y** can be set low and readout can be performed slowly, and the readout noise can be further reduced.

[0209] Still further, if the readout zone in which fluorescent image Z_k is assembled is set close to the readout port of the photographing element, because the charge stored in the readout zone can be read out even faster, and the dark noise can be further reduced.

[0210] Further still, when the signal charge stored on the light-receiving pixels of the non-readout zone are readout as null by sequential-readout portion **86**, if the standard clock frequency for controlling the timing of the charge transfer operation is made faster and readout is carried out at high speed, because the time required for reading out a 1 frame portion can be further shortened, an effect by which the dark noise mixed with the readout signal charge stored on the light-receiving pixels of the readout zone is further reduced can be obtained.

[0211] Also, as shown in **FIG. 28**, with the clearing drain and second gate excluded from the photographing element, as shown in **FIG. 27**, the signal charge stored on the light-receiving pixels within the non-readout zone, which is formed of zones G_1 and G_2 , can be readout as null by sequential-readout portion **86**. Note that even for cases in which second gate **88b** has been excluded, because the signal charge vertically transferred from charge transfer storage portion **85a** can be multiplied and stored in horizontal transfer portion **85b**, by control of binning processing in the horizontal direction by first gate **88a**, binning processing in the horizontal as well as the vertical direction can be performed.

[0212] In addition, for reading out the signal charge of the readout-zone, it is not necessary that binning processing be performed and the signal charge read out, the signal charge of 1 light-receiving pixel can be read out in the normal way as a 1 pixel portion signal charge.

[0213] Further, readout of the signal charge stored on the light-receiving pixels of the non-readout zone as null can be carried out by any method, if said signal charge is not treated as a readout signal charge.

[0214] **FIG. 29** is a schematic drawing showing a part of a fluorescent image photographing unit, contained within a fluorescent endoscope apparatus implementing a photographing apparatus for carrying out the photographing

method according to the sixth embodiment of the present invention, and structures in common with those of the fifth embodiment are labeled with the same reference numerals. The photographing apparatus utilized in the sixth embodiment is provided with an MOS type photographing element capable reading out, in a random manner, the signal charge stored on each pixel.

[0215] As shown in **FIG. 29**, the fluorescent endoscope of the sixth embodiment comprises an image fiber **22**, a photographing element **90** capable of reading out, in a random manner, the signal charge stored on each pixel, a zooming optical system **55**, for focusing fluorescent image Z_k transferred to output face **22b** of the image cable on photographing element **90** (assembled as the light image of the subject), and a readout conditions setting device **93** for setting the zooming rate of zooming optical system **55**, as well as the readout zone, and a random readout control means **91**, into which the setting signal output from readout conditions setting device **93** representing the readout zone is input, for controlling read out of the signal charge stored on the light-receiving pixels within the readout zone as well as read out of the signal charge stored on the light-receiving pixels contained within the non-readout zone outside of the readout zone, and in which the sequential readout control means and the gate control means of the fifth embodiment have been excluded. The other structures are the same as those of the fifth embodiment.

[0216] Zooming optical system **55** focuses the fluorescent image Z_k transferred to output face **22b** of the image fiber in the readout zone **90y**, which is formed of $\frac{1}{2}$ or less of the light-receiving pixels of light-receiving zone **90a**.

[0217] As shown in **FIG. 30**, photographing element **90** comprises a photoelectric conversion portion **94** for photoelectrically converting the light received at each light-receiving pixel within the light-receiving zone to a signal charge and storing said signal charge, a pixel selection portion **95** formed of a row decoder **95a** and a column decoder **95b** for selecting, in a random manner, pixels from among the light-receiving pixels, and a random readout portion **96** for converting the signal charge of the randomly selected light-receiving pixels to an electric image signal and reading out said electric image signal.

[0218] Next, the operation of the sixth embodiment will be explained.

[0219] Zooming optical system **55** and random readout control means **91**, into which setting signal output from readout conditions setting device **93** for setting the readout conditions have been input, set the readout zone **90y** according to said readout conditions, assemble fluorescent image Z_k in said readout zone, and set the binning processing conditions so that a 2 vertical pixel $\times$ 2 horizontal binning processing is performed.

[0220] More specifically, random readout control means **91**, into which the setting signal output from readout conditions setting device **93** for setting the readout zone has been input, as shown in **FIG. 31**, sets the readout zone **90y**, which is formed of $\frac{1}{2}$ or less of the total number of light-receiving pixels of light-receiving zone **90a**, within said light-receiving zone **90a**. On the other hand, zooming optical means **55**, into which the setting signal for setting the zooming rate has been input, sets the zooming rate so as to

position the fluorescent image Z_k to be readout within said readout zone **90y**, and the fluorescent image Z_k formed on output face **22b** of the image fiber is assembled. At this point, for cases in which the image to be read out is 1 portion of the fluorescent image Z_k , it doesn't matter if the fluorescent be assembled so that it protrudes out of readout zone **90y**.

[0221] Next, random readout control means **91** outputs a control signal to pixel selecting portion **95** so that an address of 2 vertical pixel $\times$ 2 horizontal pixel of the light-receiving pixels from within aforementioned set readout zone **90y** is specified, and outputs a control signal to read out the signal charge to random readout portion **96**. Pixel selecting means **95**, into which said control signal has been input, sets the readout signal charge stored on the light-receiving pixels of the 2 vertical pixel $\times$ 2 horizontal pixel address, within readout zone **90y**, specified by pixel selecting means **95** so as to be in a state wherein readout thereof is possible.

[0222] Here, as shown in **FIG. 32**, in order to set the signal charge of the 4 light-receiving pixels of the 2 vertical pixel $\times$ 2 horizontal pixel address so as to be in a state wherein readout thereof is possible, row decoder **95a** and column decoder **95b** are in normally in a state in which 1 is set in the lowest position (LSB) of the specified address, and the light-receiving pixels of the 2 vertical $\times$ 2 horizontal pixel address are specified from the upper address.

[0223] Random readout portion **96** multiplies (that is, performs binning processing on) the readout signal charge of the 4 light-receiving pixels set so as to be in a state in which readout thereof is possible, is converted to signal charge representing 1 pixel and read out.

[0224] In this way, 2 vertical pixel $\times$ 2 horizontal pixel light-receiving pixels within readout zone **90y** are consecutively selected by random readout control means **91**, and by converting the readout signal charge of each 2 vertical pixel $\times$ 2 horizontal pixel light-receiving pixels to an image signal representing a 1 pixel portion and reading out said 1 pixel portion image signal, readout of the signal charge of the light-receiving pixels of readout zone **90y** is completed.

[0225] The signal readout in the manner described above is output from photographing element **90**, and is converted to a visible-image signal by visible-image signal processing circuit **34a** and displayed as a visible image on a display.

[0226] For cases in which the next 1 screen portion is readout from photographing element **90**, the residual signal charge stored on the light-receiving pixels of non-readout zone **90h** (refer to **FIG. 33**) and the signal charge stored on the light-receiving pixels of the readout zone after readout of the readout signal charge are grouped together and read out from random readout portion **96** and discarded (cleared), after which, in the same way as described above, readout of the readout signal charge from the readout zone is initiated.

[0227] That is to say, a group together and readout control signal is output from random readout control means **91**, and when said control signal is input to pixel selecting portion **95**, the entire signal charge stored on the light-receiving pixels of light-receiving zone **90a** is set so as to be in a state wherein readout thereof is possible. Here, in order to set the signal charge contained on all of the light-receiving pixels in a state wherein readout thereof is possible, as shown in **FIG. 34**, the addresses of row decoder **95a** and column decoder

95b are all set so that from the highest position (MSB) to the lowest position (LSB), all are put in a state of 1.

[0228] Random readout portion **96** groups together and reads out the signal charge of all of the light-receiving pixels of light-receiving zone **90a**, which has been set in a state wherein read out thereof is possible, and the entire signal charge of all of the light-receiving pixels of light-receiving zone **90a** is discarded.

[0229] In this way, because the processing time for reading out a 1 screen portion of signal charge is shortened and readout of the signal charge of the light-receiving pixels of the readout zone can be completed rapidly, the quantity of dark noise, which accumulates with the passage of time, can be reduced, in addition to which, by grouping together and discarding the residual signal charge stored on the light-receiving pixels of the non-readout zone, the occurrence of blooming, which occurs due to the continuous accumulation of signal charge on the light-receiving pixels, can be prevented.

[0230] Note that aforementioned binning processing is not limited to a 2 verticalx2 horizontal pixel binning processing, and the effect by which the readout noise is further reduced can be obtained by use of any binning processing grouping. Further, it is not necessary to perform binning processing when performing the readout described above.

[0231] In addition, it is not necessary that the residual signal charge stored on the light-receiving pixels of non-readout zone and the signal charge stored on the light-receiving pixels of the readout zone after readout of the readout signal charge be grouped together and read out. Although the readout time is lengthened, as shown in **FIG. 35**, pluralities of pixels grouped together in blocks **A1**, **A2**, **A3**, . . . **C2**, **C3**, and each said block may be read out, or alternatively, the signal charge may be read out 1 pixel at a time (pixel by pixel).

[0232] Further, according to the fifth and sixth embodiments described above, the fluorescent image focused on the output face of the image fiber was the subject of photographing, however, it is also to implement the present invention for cases in which the image of the subject is assembled directly on the photographing element, not via an image fiber, and photographed by an electron endoscope. In addition, the subject of photographing is not limited to images formed by fluorescent light, reflected-light images formed of the light reflected from a subject illuminated with normal light can also be the subject of photographing: For example, it is possible to apply the present invention for use with an infrared camera, etc., for photographing the light image of a body in a dark place illuminated with a faint light as an image with a high S/N ratio. Further, the optical means for focusing the fluorescent image is not required to be a zooming optical means, the fluorescent image may be assembled by an optical means having a fixed magnification.

What is claimed is:

1. A photographing method in which fluorescent light emitted by a living-tissue subject that has been illuminated by stimulating light enters an image fiber and is guided toward the output face of said image fiber, and the fluorescent image formed at the output face of the image fiber is focused on the light-receiving zone of a photographing element and photographed by said photographing element,

wherein the relationship between the number of pixels N_f forming the fluorescent image on the output face of the image fiber and the number of pixels N_d receiving the light of the fluorescent image assembled within the light-receiving zone of the photographing element satisfy the condition expressed by the formula: $N_f \times 4 > N_d$.

2. A photographing method as defined in claim 1, wherein

a front-exposure type photographing element is employed as said photographing element, and at normal temperature or lower, the fluorescent image is photographed under photographing conditions set so that the sum of the number of electrons of readout noise produced on each pixel within the light-receiving zone receiving the light of a fluorescent image and the number of electrons of dark noise is 10 or less.

3. A photographing method as defined in claim 1 or 2, wherein

a rear-exposure type photographing element is employed as said photographing element, and at normal temperature or lower, the fluorescent image is photographed under photographing conditions set so that the sum of the number of electrons of readout noise produced on each pixel within the light-receiving zone receiving the light of a fluorescent image and the number of electrons of dark noise is 20 or less.

4. A photographing method as defined in claim 1 or 2, wherein

said fluorescent image is focused such that the number of the light-receiving zone receiving the light of the fluorescent image is 40,000 or less, and said fluorescent image is photographed.

5. A photographing method as defined in claim 3, wherein

said fluorescent image is focused such that the number of the light-receiving zone receiving the light of the fluorescent image is 40,000 or less, and said fluorescent image is photographed.

6. A photographing method as defined in claim 1 or 2, wherein

the size of the fluorescent image focused on the light-receiving zone of the photographing element is changed corresponding to the quantity of light of said fluorescent image received at said photographing element.

7. A photographing method as defined in claim 3, wherein

the size of the fluorescent image focused on the light-receiving zone of the photographing element is changed corresponding to the quantity of light of said fluorescent image received at said photographing element.

8. A photographing method as defined in claim 4, wherein

the size of the fluorescent image focused on the light-receiving zone of the photographing element is changed corresponding to the quantity of light of said fluorescent image received at said photographing element.

9. A photographing method as defined in claim 5, wherein

the size of the fluorescent image focused on the light-receiving zone of the photographing element is

changed corresponding to the quantity of light of said fluorescent image received at said photographing element.

10. A photographing method as defined in claim 1 or 2, wherein

for cases in which said photographing element is capable of reading out in a random manner the signal charge stored on each pixel, a readout zone narrower than said light-receiving zone and which contains the fluorescent image is set within said light-receiving zone, and readout of said readout zone is performed prior to readout of other zones within said light-receiving zone.

11. A photographing apparatus comprising:

an optical system for directing fluorescent light emitted from a living-tissue subject illuminated by stimulating light into an image fiber, wherein said fluorescent light is guided to the output face of the image fiber, an image focusing means for focusing on the light-receiving zone of the photographing element the fluorescent image formed by the fluorescent light guided to the output face of the image fiber, and a photographing means for photographing the fluorescent image focused on the light-receiving zone thereof, wherein

said fluorescent image is focused on said light-receiving zone, wherein the relationship between the number of pixels N_f forming the fluorescent image on the output face of the image fiber and the number of pixels N_d receiving light of the fluorescent image assembled within the light-receiving zone of the photographing element satisfies the condition expressed by the formula: $N_f \times 4 > N_d$.

12. A photographing apparatus as defined in claim 11, wherein

said photographing element is provided as a front-exposure type photographing element, in which the photographing conditions are set so that at normal temperature or lower the sum of the number of electrons of readout noise produced on each pixel within the light-receiving zone receiving the light of a fluorescent image and the number of electrons of dark noise is 10 or less.

13. A photographing apparatus as defined in claim 11, wherein

said photographing element is provided as a rear-exposure type photographing element, in which the photographing conditions are set so that at normal temperature or lower the sum of the number of electrons of readout noise produced on each pixel within the light-receiving zone receiving the light of a fluorescent image and the number of electrons of dark noise is 20 or less.

14. A photographing apparatus as defined in claim 11, **12** or **13**, wherein

the image focusing means focuses said fluorescent image in a manner in which the number of pixels of the light-receiving zone receiving the light of the fluorescent image is 40,000 or less.

15. A photographing apparatus as defined in claim 11, **12** or **13**, wherein

said image focusing means is capable of changing, corresponding to the quantity of light of said fluorescent image received at said photographing element, the size

of the fluorescent image focused on the light-receiving zone of said photographing element.

16. A photographing apparatus as defined in claim 11, **12** or **13**, wherein

said photographing means is capable of reading out in a random manner the signal charge stored on each pixel, and sets a readout zone narrower than the light-receiving zone and which contains the fluorescent image within the light-receiving zone, and

said photographing means is provided with a readout control means for carrying out read out of said readout zone prior to readout of other zones within the light-receiving zone.

17. A photographing apparatus as defined in claim 14 wherein

said photographing means is capable of reading out in a random manner the signal charge stored on each pixel, and sets a readout zone narrower than the light-receiving zone and which contains the fluorescent image within the light-receiving zone, and

said photographing means is provided with a readout control means for carrying out read out of said readout zone prior to readout of other zones within the light-receiving zone.

18. A photographing apparatus as defined in claim 15 wherein

said photographing means is capable of reading out in a random manner the signal charge stored on each pixel, and sets a readout zone narrower than the light-receiving zone and which contains the fluorescent image within the light-receiving zone, and

said photographing means is provided with a readout control means for carrying out read out of said readout zone prior to readout of other zones within the light-receiving zone.

19. A photographing apparatus as defined in claim 15 wherein

said photographing means is capable of reading out in a random manner the signal charge stored on each pixel, and sets a readout zone narrower than the light-receiving zone and which contains the fluorescent image within the light-receiving zone, and

said photographing means is provided with a readout control means for carrying out read out of said readout zone prior to readout of other zones within the light-receiving zone, which is also capable of changing the size of said readout zone.

20. A photographing apparatus as defined in claim 11, **12** or **13**, wherein

said photographing element sequentially reads out the signal charge stored on each pixel, and is structured so that said fluorescent image is assembled at the closest position of the readout port of said photographing element within said light-receiving zone.

21. A photographing apparatus as defined in claim 14 wherein

said photographing element sequentially reads out the signal charge stored on each pixel, and is structured so that said fluorescent image is assembled at the closest

position of the readout port of said photographing element within said light-receiving zone.

22. A photographing apparatus as defined in claim 15 wherein

said photographing element sequentially reads out the signal charge stored on each pixel, and is structured so that said fluorescent image is assembled at the closest position of the readout port of said photographing element within said light-receiving zone.

23. A photographing apparatus as defined in claim 15 wherein

said photographing element sequentially reads out the signal charge stored on each pixel, and

said photographing element is provided with an focusing-position changing means capable of changing the position at which said fluorescent image is assembled within said light-receiving zone.

24. A photographing method in which:

employing a photographing element for sequentially transferring and reading out the charge stored on each light receiving pixel, a light-image of a subject is focused on the light-receiving zone of said photographing element, and

said assembled light image is photoelectrically converted at and stored as a signal charge on each light-receiving pixel within said light-receiving zone, and

said stored signal charge is converted to an image signal and read out, wherein

said light-image is focused on a readout zone formed from less than the total number of pixels within the light-receiving zone, and

the readout signal charge transferred to and stored on the light-receiving pixels contained in said light-receiving zone is read out as said image signal and the residual signal charge transferred to and stored on the light-receiving pixels in the non-readout zone outside the readout zone is read out as empty.

25. A photographing method as defined in claim 24, wherein

said sequentially transferred signal charge is subjected to binning processing before said readout signal charge is read out.

26. A photographing method in which:

employing a photographing element for sequentially transferring and reading out the charge stored on each light-receiving pixel, a light-image of a subject is focused on the light-receiving zone of said photographing element, and

said assembled light image is photoelectrically converted at and stored as a signal charge on each light-receiving pixel within said light-receiving zone, and

said stored signal charge is converted to an image signal and read out, wherein

said light-image is focused on a readout zone formed from less than the total number of pixels within the light-receiving zone, and

the readout signal charge transferred to and stored on the pixels contained in said light-receiving zone is read out as said image signal and the residual signal charge transferred to and stored on the light-receiving pixels in the non-readout zone outside the readout zone is discarded via a clearing drain.

27. A photographing method in which:

employing a photographing element capable of reading out in a random manner the charge stored on each pixel, a light-image of a subject is focused on the light-receiving zone of said photographing element, and

said assembled light image is photoelectrically converted at and stored as a signal charge on each light-receiving pixel within said light-receiving zone, and

said stored signal charge is converted to an image signal and read out, wherein

said light-image is focused on a readout zone formed from less than the total number of pixels within the light-receiving zone, and

the readout signal charge transferred to and stored on the pixels contained in said light-receiving zone is read out as said image signal and the residual signal charge transferred to and stored on the light-receiving pixels in the non-readout zone outside the readout zone or said residual signal charge grouped together with the signal charge stored on the light-received pixels contained in said light-receiving zone after said readout signal charge has been read out are read out as empty for each block or one pixel at a time.

28. A photographing apparatus comprising a photographing element, an image focusing means for focusing a light-image of a subject within the light-receiving zone of said photographing element, said photographing element comprising a photoelectric conversion portion for photoelectrically converting at each light-receiving pixel within said light-receiving zone the light received thereon to a signal charge and storing said signal charge on each of said pixels, a charge transfer portion for sequentially transferring the signal charge stored on each of said light-receiving pixels, and a readout portion for converting said sequentially transferred signal charge to an electric image signal and reading out said image signal, wherein

said light-image is focused on a readout zone formed from less than the total number of pixels within the light-receiving zone, and

further comprising a sequential-readout control means for controlling the reading out, by the sequential-readout portion, of the readout signal charge stored on the light-receiving pixels of said readout zone as an image signal and the reading out, by said sequential-readout portion, as empty of the residual signal charge stored on the light-receiving pixels of the non-readout zone outside said readout zone.

29. A photographing apparatus as defined in claim 28, further comprising

a gate provided between said charge conversion portion and said sequential-readout portion for controlling passage of the signal charge from said charge conversion portion to said sequential-readout portion, and a gate control means for controlling said gate so as to facili-

tate the subjecting of said readout signal charge to binning processing before said readout signal charge is transferred by said charge conversion portion and read out by said sequential-readout portion.

30. A photographing apparatus comprising a photographing element, an image focusing means for focusing a light-image of a subject within the light-receiving zone of said photographing element, said photographing element comprising a photoelectric conversion portion for photoelectrically converting at each light-receiving pixel within said light-receiving zone the light received thereon to a signal charge and storing said signal charge on each of said light-receiving pixels, a charge transfer portion for sequentially transferring the signal charge stored on each of said light-receiving pixels, and a readout portion for converting said sequentially transferred signal charge to an electric image signal and reading out said image signal, wherein

said light-image is focused on a readout zone formed from less than the total number of pixels within the light-receiving zone, and

further comprising a clearing drain for discarding the signal charge sequentially transferred by said charge converting portion, and a sequential-readout control means for controlling the reading out, by said sequential-readout portion, of the readout signal charge stored on the light-receiving pixels of said readout zone, and the discarding of the residual signal charge stored on the light-receiving pixels of the non-readout zone outside the readout zone into said clearing drain.

31. A photographing apparatus as defined in claim 30, further comprising

a first gate provided between said charge transfer portion and said sequential-readout portion for controlling passage of the signal charge from said charge transfer portion to the sequential-readout portion, a second gate provided between said charge transfer portion and said clearing drain for controlling passage of the signal charge from the charge transfer portion to the clearing drain, and a gate control means for controlling gate 1 and gate 2 so as to facilitate the subjecting of said readout signal charge to binning processing before said readout signal charge is transferred by said charge conversion portion and read out by said sequential-readout portion.

32. A photographing apparatus comprising a photographing element, an image focusing means for focusing a light-image of a subject within the light-receiving zone of said photographing element, said photographing element comprising a photoelectric conversion portion for photoelectrically converting at each light-receiving pixel within said light-receiving zone the light received thereon to a signal charge and storing said signal charge on each of said light-receiving pixels, a pixel selecting means capable of randomly selecting pixels from among said light-receiving pixels, and a random readout portion for converting the signal charge of said selected light-receiving pixels to an electric image signal and reading out said image signal in a random manner, wherein

said light-image is focused on a readout zone formed from less than the total number of pixels within the light-receiving zone, and

a random-readout control means for controlling said pixel selecting portion and said random readout portion so that the light-receiving pixels of said readout zone are selected by said pixel selecting means, and after the readout signal charge stored on said selected light-receiving pixels is read out by said random readout portion, the residual signal charge stored on the light-receiving pixels contained in the non-readout zone outside the readout zone, or said residual signal charge grouped together with the signal charge stored on the light-receiving pixels contained in said readout zone after readout of the readout signal charge are read out from said random readout portion as empty for each block or one pixel at a time.

33. A photographing apparatus as defined in claim 32, wherein

said readout signal charge is subjected to binning processing so that a plurality of light-receiving pixels within said readout zone is simultaneously selected by said pixel selecting means, and the multiplied signal charge of each readout signal charge stored on said plurality of selected light-receiving pixels is converted to an electric image signal and read out by said random reading portion.

34. A photographing apparatus as defined in claim 26, **27**, **28**, **29**, **30**, **31**, **32** or **33**, wherein

said image focusing means is provided with a zooming optical system, and by use of said zooming optical system is capable of changing the size of the light image assembled within the light-receiving zone.

35. A photographing apparatus as defined in claim 34, wherein the readout frequency of said photographing element changes in correspondence to the zooming rate of the zooming optical system.

36. A fluorescent endoscope implementing the photographing apparatus as defined in claim **28**, **29**, **30**, **31**, **32** or **33**.

37. A fluorescent endoscope implementing the photographing apparatus as defined in claim 34.

38. A fluorescent endoscope implementing the photographing apparatus as defined in claim 35.

39. A photographing method as defined in claim 1 or 2, wherein the photographing element is a charge-amplifier type photographing element for amplifying the charge by impact ionization.

40. A photographing method as defined in claim 24, **25**, **26**, **27** or **28**, wherein the photographing element is a charge-amplifier type photographing element for amplifying the charge by impact ionization.

41. A photographing apparatus as defined in claim 11, **12** or **13**, wherein the photographing element is a charge-amplifier type photographing element for amplifying the charge by impact ionization.

42. A photographing apparatus as defined in claim 29, **30**, **31**, **32** or **33**, wherein the photographing element is a charge-amplifier type photographing element for amplifying the charge by impact ionization.

专利名称(译)	用于拍摄荧光和反射光图像的方法和设备		
公开(公告)号	US20020018649A1	公开(公告)日	2002-02-14
申请号	US09/837764	申请日	2001-04-19
[标]申请(专利权)人(译)	HAKAMATA KAZUO		
申请(专利权)人(译)	HAKAMATA KAZUO		
当前申请(专利权)人(译)	HAKAMATA KAZUO		
[标]发明人	HAKAMATA KAZUO		
发明人	HAKAMATA, KAZUO		
IPC分类号	A61B1/04 A61B1/05 A61B5/00 H04N5/225 H04N5/347 H04N5/361 H04N5/369 G03B29/00		
CPC分类号	A61B1/00009 A61B1/043 A61B1/05 A61B5/0071 A61B5/0084 H04N3/1562 H04N2005/2255 H04N5/3454 H04N5/3725		
优先权	2000174165 2000-06-09 JP 2000117439 2000-04-19 JP		
其他公开文献	US6760058		
外部链接	Espacenet USPTO		

摘要(译)

一种用于拍摄荧光图像的拍摄方法和设备，其由由刺激光照射的活组织发射的荧光组成，作为具有较高S / N比的图像。由从光源发出并沿内窥镜传播的刺激光照射的活组织发出的荧光进入图像光纤。进入图像光纤的荧光沿着图像光纤传播到图像光纤的输出面并聚焦在拍摄元件的光接收区上，在设定的拍摄条件下，使得上述输出面的像素之间的关系，在形成荧光图像的情况下，在上述光接收区内接收荧光图像的光的像素满足由下式表示的条件： $N_{fx4} > N_d$ 。

