



(11) **EP 2 706 404 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
11.10.2017 Bulletin 2017/41

(51) Int Cl.:
G02F 1/1339^(2006.01) G02F 1/1333^(2006.01)

(21) Application number: **13180696.0**

(22) Date of filing: **16.08.2013**

(54) **Liquid crystal display apparatus**

Flüssigkristallanzeigevorrichtung

Appareil d'affichage à cristaux liquides

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **10.09.2012 TW 101132959**

(43) Date of publication of application:
12.03.2014 Bulletin 2014/11

(73) Proprietor: **InnoLux Corporation**
Chu-Nan, Miao-Li 350 (TW)

(72) Inventors:
• **Yang, Po-Ju**
350 Miao-Li County (TW)

• **Kao, Yu-Chien**
350 Miao-Li County (TW)
• **Sung, Li-Wei**
350 Miao-Li County (TW)

(74) Representative: **dompatent von Kreisler Selting
Werner -
Partnerschaft von Patent- und Rechtsanwälten
mbB
Deichmannhaus am Dom
Bahnhofsvorplatz 1
50667 Köln (DE)**

(56) References cited:
**EP-A2- 1 898 253 JP-A- 2001 083 528
JP-A- 2005 241 856 US-A1- 2005 052 607
US-A1- 2008 136 760**

EP 2 706 404 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The disclosed embodiments relate to a liquid crystal display (LCD) apparatus and, in particular, to an active matrix LCD apparatus.

Related Art

[0002] With the more progress of liquid crystal display (LCD) technology, LCD apparatuses have been widely applied to various information products, such as notebooks, personal digital assistants (PDAs), smart phones, or tablet computers.

[0003] A conventional LCD apparatus mainly includes an LCD panel, which includes a thin film transistor (TFT) substrate, a color filter (CF) substrate and a liquid crystal layer disposed between the TFT and CF substrates. Besides, the LCD apparatus further includes a backlight module, which is disposed on a side of the TFT substrate facing away from the CF substrate. The TFT substrate includes a transparent substrate and a TFT layer disposed on a side of the transparent substrate. Besides, the CF substrate is disposed opposite to the TFT substrate. An interval between the TFT and CF substrates is kept by spacers.

[0004] However, when the LCD apparatus is pressed by an external force, the interval between the TFT and CF substrates will be reduced, and meanwhile, the relative movement between the spacers and the TFT substrate may occur. Accordingly, the TFT substrate may be rubbed and damaged, and thus the LCD apparatus will be subjected to a light leakage problem.

[0005] US 2005/052607 A1 discloses that the first substrate 1 and the second substrate 2 holding the liquid crystal layer 3 between them are attached to each other through the columnar spacer 25, and the columnar spacer 25 is formed on the second substrate 2 at substantially the same position as the contact hole 19 of the first substrate 1. The columnar spacer 25 is formed in such a manner as to have an area superposed and an area not superposed with the contact hole 19.

[0006] US 2008/136760 A1 discloses that a display substrate includes a base substrate, a first storage electrode, a second storage electrode, a first insulating layer, a first spacing member and a second spacing member. The base substrate includes a first pixel region and a second pixel region that are defined by a plurality of gate lines and a plurality of source lines extended in a direction different from an extended direction of the gate lines. The first storage electrode is in the first pixel region. The second storage electrode is in the second pixel region. The first insulating layer covers the first storage electrode, and has a recessed portion on the second storage electrode. The first spacing member is on the first insulating layer corresponding to the first storage electrode. The second spacing member is on the recessed portion.

[0007] JP 2005 241856 A discloses that a plurality of granular spacers 81 are interposed between the element substrate 10 and the counter substrate 20. Also on the element substrate 10, a plurality of post spacers 91 with compressive strength higher than that of the granular spacers 81 and with height with a dimension smaller than the diameter of the granular spacers 81 are formed on a region other than pixel electrodes 34a.

[0008] EP 1898253 A2 discloses that a display device includes an array substrate, which includes a plurality of gate wires, a plurality of data wires, which cross the gate wires, and a plurality of pixel electrodes, which are defined by the gate wires and the data wires; a counter substrate, which includes a common electrode formed corresponding to the pixel electrodes; and a spacer, which maintains a gap between the array substrate and the counter substrate.

SUMMARY

[0009] In view of the foregoing problem, an objective of this disclosure is to provide an LCD apparatus that can be prevented from being rubbed and damaged by spacers when pressed by an external force so that the light leakage problem can be avoided.

[0010] To achieve the above objective, a liquid crystal display apparatus according to the embodiments of this disclosure comprises a first substrate, a second substrate and a first spacer. The first substrate includes a transparent plate, a metal layer, an insulating layer and a first electrode layer. The metal layer is disposed on the transparent plate. The insulating layer is disposed between the metal layer and the first electrode layer, and covers the metal layer. The insulating layer has a first indentation. A surface of the first substrate has a second indentation corresponding to the first indentation and having a first width. The second substrate is disposed opposite to the first substrate. The first spacer is disposed on the second substrate and has a top surface opposite to the second indentation. The top surface and the second indentation at least partially overlap, and the top surface has a second width which is larger than the first width.

[0011] The present invention is reflected in independent claim 1. Preferred embodiments are defined in the dependent claims.

[0012] In one embodiment, the liquid crystal display apparatus further comprises a liquid crystal layer disposed between the first substrate and the second substrate.

[0013] In one embodiment, the first spacer is not disposed against the surface of the first substrate.

[0014] In one embodiment, the metal layer is the same layer as the drain or source of a thin film transistor of the first substrate.

[0015] In one embodiment, the insulating layer includes a first insulating layer and a second insulating layer, the first insulating layer is disposed on the second

insulating layer, and the second insulating layer is disposed above the thin film transistor.

[0016] In one embodiment, the first substrate further includes a second electrode layer disposed between the first and second insulating layers.

[0017] In one embodiment, the first indentation is disposed corresponding to the second indentation, and the depth of the second indentation is less than or equal to that of the first indentation.

[0018] In one embodiment, the second insulating layer has a third indentation disposed corresponding to the first indentation, and the depth of the first indentation is less than or equal to that of the third indentation.

[0019] In one embodiment, a bottom of the second indentation has a plurality of protrusions.

[0020] In one embodiment, the second substrate has an additional transparent plate and a common electrode layer disposed on the additional transparent plate.

[0021] In one embodiment, the liquid crystal display apparatus further comprises a second spacer disposed on the second substrate.

[0022] In one embodiment, the second spacer is disposed against the surface of the first substrate.

[0023] In one embodiment, the first spacer and the second spacer have different heights according to the direction perpendicular to the transparent substrate.

[0024] In one embodiment, the height of the second spacer is between one time and two times the height of the first spacer.

[0025] In one embodiment, the first spacer and the second spacer have the same height according to the direction perpendicular to the transparent substrate.

[0026] In one embodiment, the first and second spacers are disposed against the surface of the first substrate.

[0027] In one embodiment, the surface of the first substrate has a fourth indentation disposed corresponding to the second indentation, and the depth of the fourth indentation is less than that of the second indentation.

[0028] In one embodiment, the width of a top surface of the second spacer is larger than that of the fourth indentation.

[0029] In one embodiment, the first insulating layer further has a fifth indentation disposed corresponding to the fourth indentation, and the depth of the fourth indentation is less than or equal to that of the fifth indentation.

[0030] In one embodiment, the second insulating layer further has a sixth indentation disposed corresponding to the fifth indentation, and the depth of the fifth indentation is less than or equal to that of the sixth indentation.

[0031] As mentioned above, in the LCD apparatus according to the embodiments of this disclosure, the insulating layer covers the metal layer and has a first indentation, and the surface of the first substrate has a second indentation corresponding to the first indentation. Besides, the top surface of the first spacer at least partially overlaps the opening of the second indentation, and the second width of the top surface is larger than the first width of the second indentation. Therefore, when the

LCD apparatus is pressed by an external force, the first spacers are respectively pushed into the second indentations of the first substrate with some deformation. Thereby, the pressure received by the LCD apparatus from outside can be distributed, and the more contact area can be provided when the first spacers are respectively pushed into the second indentations, resulting in the larger lateral friction, which can prevent the relative movement and accompanying rubbing between the spacers and the first substrate, so that the first substrate will not be damaged and thus the LCD apparatus will not be subjected to the light leakage problem.

BRIEF DESCRIPTION OF THE DRAWINGS

[0032] The invention will become more fully understood from the detailed description and accompanying drawings, which are given for illustration only, and thus are not limitative of the present invention, and wherein:

FIG. 1A is a schematic sectional diagram of a liquid crystal display (LCD) apparatus according to an embodiment of this disclosure;

FIG. 1B is a schematic sectional diagram of a liquid crystal display apparatus according to another embodiment of this disclosure;

FIG. 1C is a top-view diagram of the LCD apparatus in FIG. 1A;

FIG. 1D is a schematic sectional diagram of a variation of the first spacer;

FIG. 1E is a schematic sectional diagram of a variation of the second indentation;

FIGS. 1F and 1G are schematic diagrams showing variations of the overlap between the top surface of the first spacer and the opening of the second indentation according to the direction perpendicular to the transparent substrate of the first substrate in FIG. 1A;

FIG. 1H is a schematic diagram of the first spacer moved against the first substrate when the LCD apparatus in FIG. 1A is pressed by an external force; and

FIGS. 2A to 2E are schematic sectional diagrams of variations of the LCD apparatus according to an embodiment of this disclosure.

DETAILED DESCRIPTION

[0033] The present invention will be apparent from the following detailed description, which proceeds with reference to the accompanying drawings, wherein the same references relate to the same elements.

[0034] FIG. 1A is a schematic sectional diagram of a liquid crystal display (LCD) apparatus 2 according to an embodiment of this disclosure.

[0035] The LCD apparatus 2 includes a first substrate 21, a second substrate 22, a liquid crystal layer 24 and a backlight module (not shown). The liquid crystal layer 24 is disposed between the first and second substrates 21 and 22 (the liquid crystal molecules are not shown in FIG. 1A). The backlight module is disposed on a side of the first substrate 21 facing away from the second substrate 22. In FIG. 1A, the backlight module can be disposed on a bottom side of the first substrate 21 to emit light towards the first substrate 21. Besides, the LCD apparatus 2 can further include a first spacer 23 and a second spacer 25.

[0036] The first substrate 21 includes a transparent substrate 211, a metal layer 212, a protection layer 213, an insulating layer 214, a first electrode layer 215 and an alignment layer 217. The first substrate 21 can further include a thin film transistor (TFT) T. The structures of the transparent substrate 211 and thin film transistor T are first illustrated as below.

[0037] The thin film transistor T is disposed on the transparent substrate 211. As an embodiment, the transparent substrate 211 can be made by a transparent material, and applied to a transmissive display apparatus. The transparent material is, for example, glass, quartz or the like, plastic material, rubber, fiberglass or other polymer material. Preferably, the transparent substrate 211 is an alumino silicate glass substrate. Otherwise, the transparent substrate 211 can be made by opaque material, and applied to a self-luminous or reflective display apparatus. In this case, the transparent substrate 211 is a metal-fiberglass composite plate or a metal-ceramic composite plate for example. The transparent substrate 211 also can be a flexible substrate, such as an acrylic substrate or a very thin glass substrate.

[0038] The thin film transistor T has a gate G, a gate dielectric layer T1, a channel layer T2, a source S and a drain D. The gate G is disposed on the transparent substrate 211, and the gate G is a single-layer or multi-layer structure composed of metal (e.g. aluminum, copper, silver, molybdenum, or titanium), alloy or their any combinations. Some of the conductive wires, such as scan lines, for transmitting driving signals can be made by the same process as the gate G and formed into the same layer as the gate G, electrically connected to the gate G. The gate dielectric layer T1 is disposed on the gate G, and can be made by organic material such as organic silicone compound, or inorganic material such as silicon nitride, silicon oxide, silicon oxynitride, silicon carbide, aluminum oxide, hafnium oxide or their any combinations. The gate dielectric layer T1 can be a single-layer or multi-layer structure. The gate dielectric layer T1 needs to completely cover the gate G, and can cover the partial or whole transparent substrate 211. The channel layer T2 is disposed on the gate dielectric layer T1 and corresponding to the gate G. As an embodiment, the

channel layer T2 can contain an oxide semiconductor for example. The oxide semiconductor contains an oxide, which includes one of indium, zinc and tin for example.

[0039] The source S and the drain D are disposed on the channel layer T2, and contact the channel layer T2. When the channel layer T2 of the thin film transistor T is not enabled, the source S and the drain D are separated electrically. The source S and the drain D each can be made into a single-layer or multi-layer structure composed of metal (e.g. aluminum, copper, silver, molybdenum, or titanium), alloy or their any combinations. Besides, some of the conductive wires, such as data lines, for transmitting driving signals can be made by the same process as the source S and the drain D and into the same layer (i.e. the second metal layer M2) as the source S and the drain D. To be noted, the metal layer 212 can be the same layer as the drain D and the source S of the thin film transistor T, and can be the data line or the scan line of the LCD apparatus 2.

[0040] To be mentioned, the source S and the drain D are disposed on an etch stop layer ES, and respectively contact the channel layer T2 through the openings of the etch stop layer ES. The etch stop layer ES can be made by inorganic material such as silicon nitride, silicon oxide, silicon oxynitride, silicon carbide, aluminum oxide, hafnium oxide or their any combinations. The etch stop layer ES can be a single-layer or multi-layer structure. In other embodiments, the source S and the drain D can be directly disposed on the channel layer T2 instead of through the etch stop layer ES.

[0041] The protection layer 213 is disposed on the drain D and the source S, and covers the drain D and the source S. The insulating layer 214 is disposed between the metal layer 212 and the first electrode layer 215, covers the metal layer 212, and has a first indentation U1. Herein, that the insulating layer 214 covers the metal layer 212 doesn't mean the insulating layer 214 must contact the metal layer 212, and the insulating layer 214 can be just disposed over the metal layer 212 so that the metal layer 212 can not be exposed. Besides, that the insulating layer 214 is disposed between the metal layer 212 and the first electrode layer 215 doesn't mean the insulating layer 214 must contact the metal layer 212 or the first electrode layer 215. In this embodiment, the insulating layer 214 includes a first insulating layer 214a and a second insulating layer 214b. The first insulating layer 214a is disposed on the second insulating layer 214b, and the second insulating layer 214b is disposed above the thin film transistor T and contacts the protection layer 213. In other words, the protection layer 213 is disposed between the second insulating layer 214b and the drain D and source S. In other embodiments, the insulating layer 214 can include only one of the first insulating layer 214a and the second insulating layer 214b. The first insulating layer 214a can be made by inorganic material for example. The second insulating layer 214b can be a thin film layer, and can be made by organic material such as Polyfluoroalkoxy (PFA), for example.

[0042] In this embodiment, the first insulating layer 214a has the first indentation U1, so that a surface 216 of the first substrate 21 has a second indentation U2 corresponding to the first indentation U1. In other words, by the manufacturing method of this embodiment, the first indentation U1 is formed on the insulating layer 214 (such as on the first insulating layer 214a), so that the surface 216 of the first substrate 21 has the second indentation U2. The first indentation U1 is disposed corresponding to the second indentation U2, and the depth of the second indentation U2 can be less than or equal to the depth of the first indentation U1. Herein, the said depth denotes the depth along the direction perpendicular to the transparent substrate 211. The thickness of the second insulating layer 214b can be between 2 μ m and 3 μ m, and the depths of the first and second indentations U1 and U2 each can be between 0.05 μ m and 1 μ m, and preferably between 0.05 μ m and 0.5 μ m. In detail, the first indentation U1 is formed on the first insulating layer 214a, then the first electrode layer 215 is formed on the first indentation U1 so as to have an indentation, and then the alignment layer 217 is formed on the indentation of the first electrode layer 215 so as to have the second indentation U2. The width of the first indentation U1 of the first insulating layer 214a can be slightly larger than that of the indentation of the first electrode layer 215, and the width of the indentation of the first electrode layer 215 can be slightly larger than that of the second indentation U2. Herein, the said width denotes the width along the direction parallel with the transparent substrate 211.

[0043] In this embodiment the second indentation U2 is disposed above the thin film transistor T, but in other embodiments it can be disposed at other locations. Besides, in this embodiment the first electrode layer 215 is disposed on an interior side of the second indentation U2, but otherwise it is not necessarily disposed there, and it may merely overlap the partial second indentation U2, depending on the location of the first spacer 23. The first electrode layer 215 can be a pixel electrode layer or a common electrode layer, and the alignment layer 217 is disposed on the first electrode layer 215. The alignment layer 217 can be made by polyimide (PI) for example, and the liquid crystal molecules of the liquid crystal layer 24 can be arranged accordingly.

[0044] The second substrate 22 is disposed opposite to the first substrate 21. In FIG. 1A, the second substrate 22 sequentially includes a transparent plate 221, a black matrix layer 222, a color filter layer 223, a protection layer 224 and an alignment layer 225 from top to bottom. The black matrix layer 222 is disposed on the substrate 221, and the color filter layer 223 covers the transparent substrate 221 and the black matrix layer 222. The color filter layer 223 can have a red filter portion, a green filter portion and a blue filter portion (not shown). Besides, the protection layer 224 is disposed on the color filter layer 223, the first spacer 23 and the second spacer 25 are disposed on the protection layer 224, and the alignment layer 225 is disposed on the first spacer 23, the second spacer 25

and the protection layer 224.

[0045] To be noted, the LCD apparatus 2 is an in-plane switch (IPS) type for example, so that the second substrate 22 has no transparent conductive layer. However, for other types of LCD apparatuses, such as a twisted nematic (TN) type of LCD apparatus, the second substrate 22 can have a transparent conductive layer as a common electrode layer (not shown), and this common electrode layer can be disposed on the transparent substrate 221 and between the protection layer 224 and the alignment layer 225. Moreover, in this embodiment, the first substrate 21 is a TFT substrate and the second substrate 22 is a CF substrate, but in other embodiments, the black matrix layer 222 and the color filter layer 223 can be disposed to the TFT substrate, so that the first substrate 21 becomes a BOA (BM on array) substrate or a COA (color filter on array) substrate. However, this disclosure is not limited thereto.

[0046] To be noted, the LCD apparatus 2 is an in-plane switch (IPS) type for example, so that no electrode layer is disposed between the first and second insulating layers 214a and 214b. However, in another embodiment as shown in FIG. 1B, the LCD apparatus 2a is instanced as a fringe field switching (FFS) type, so that the first substrate 21a further includes a second electrode layer 218, which is disposed between the first and second insulating layers 214a and 214b. The first electrode layer 215 can be a pixel electrode layer while the second electrode layer 218 can be a common electrode layer, or the first electrode layer 215 can be a common electrode layer while the second electrode layer 218 can be a pixel electrode layer.

[0047] In FIG. 1A, the first spacer 23 is disposed on the second substrate 22 corresponding to the black matrix layer 222 of the second substrate 22, and the alignment layer 225 is disposed on the first spacer 23 and the protection layer 224. In other words, according to the direction perpendicular to the transparent substrate 211 (i.e. a top view of the LCD apparatus 2), the black matrix layer 222 can cover the first spacer 23. Otherwise, the first spacer 23 can be covered by a metal layer, so that the first spacer 23 is not necessarily disposed under the black matrix layer 222. However, the disposition of the first spacer 23 is not limited thereto.

[0048] FIG. 1C is a top-view diagram of the LCD apparatus 2 in FIG. 1A, and only shows the scan line, data line, black matrix layer 222 and transparent region of the pixel of the LCD apparatus 2. The first spacer 23 is not necessarily disposed above the thin film transistor T (not shown in FIG. 1C). Furthermore, in FIG. 1C, the first spacer 23 can be disposed in the area A (closer to the intersection of the scan line and the data line), the area B (adjacent to the scan line), the area C (overlapping the scan line) or other locations so as to be covered or shielded by the black matrix layer 222 or the metal layer.

[0049] In FIG. 1A, the first spacer 23 of this embodiment has a top surface 231, which is disposed opposite to the second indentation U2 and doesn't contact the

surface 216 of the first substrate 21. Besides, the second indentation U2 has a first width W1, and the top surface 231 has a second width W2, which can be larger than the first width W1 and not equal to the first width W1. For example, the second width W2 is 6 μ m or more and less than or equal to 30 μ m, and preferably between 8 μ m and 20 μ m. Furthermore, the first width W1 can be less than 10 μ m and larger than zero, and preferably between 4 μ m and 8 μ m. The second indentation U2 has an opening O. According to the direction perpendicular to the transparent substrate 211, the area of the top surface 231 of the first spacer 23 can be larger than or equal to that of the opening O. The first spacer 23 can have a prismatic form for example. A cross-section of the first spacer 23 can have a polygonal form, such as a tetragon, a hexagon or an octagon, or a circular or elliptic form. Here, the cross-section of the first spacer 23 is instanced as an inverse trapezoid. The opening O of the second indentation U2 can have a circular, polygonal or irregular form. To be noted, when the top surface of the first spacer 23 is curviform or irregular as shown in FIG. 1D, the second width W2 is regarded as the sectional width at 90% of the height H ($H1=0.9 \times H$ in FIG. 1D) of the first spacer 23, the height H reckoned from the connection surface of the first spacer 23 and the second substrate 22 (e.g. the protection layer 224). In another embodiment as shown in FIG. 1E, when the opening O of the second indentation U2 is too rough so that the first width W1 is difficult to be measured, the first width W1 is regarded as the sectional width at 90% of the depth E ($E1=0.9 \times E$ in FIG. 1E) of the second indentation U2 reckoned from the bottommost point to the surface 216. Here, the second width W2 in FIG. 1D and the first width W1 in FIG. 1E have different proportions.

[0050] FIGS. 1F and 1G are schematic diagrams showing variations of the overlap between the top surface 231 of the first spacer 23 and the opening O of the second indentation U2 according to the direction perpendicular to the transparent substrate 211. Here, the top surface 231 has a hexagonal form and the opening O has a tetragonal form, for example.

[0051] In FIG. 1F, according to the direction perpendicular to the transparent substrate 211, the top surface 231 and the opening O of the second indentation U2 completely overlap each other. In FIG. 1G, the top surface 231 and the opening O of the second indentation U2 partially overlap each other. Hence, according to the direction perpendicular to the transparent substrate 211, the top surface 231 and the opening O of the second indentation U2 at least partially overlap each other.

[0052] In FIG. 1A, the second spacer 25 is disposed on the second substrate 22. The second spacer 25 is disposed on the protection layer 224 corresponding to the black matrix layer 222. The number of the first spacers 23 is much larger than that of the second spacers 25. Each of the first and second spacers 23 and 25 can be made by resin, silicate, fiberglass or other kinds of photosensitive photo-resist material. The second spacer 25 is disposed against the surface 216 of the first substrate

21 through the alignment layer 225. In other words, the first and second spacers 23 and 25 have different heights according to the direction perpendicular to the transparent substrate 211, so as to have a height difference. Here, the height of the second spacer 25 can be between one time and two times the height of the first spacer 23, and preferably between one time and 1.5 times the height of the first spacer 23.

[0053] FIG. 1H is a schematic diagram of the first spacer 23 moved against the surface 216 of the first substrate 21 when the LCD apparatus 2 in FIG. 1A is pressed by an external force, and only the first spacer 23 and the partial first substrate 21 are shown therein.

[0054] Because the number of the first spacers 23 is much larger than that of the second spacers 25, the first spacer 23 is made by photoresist material so as to have flexibility, the top surface 231 of the first spacer 23 at least partially overlaps the opening O of the second indentation U2, and the second width W2 of the top surface 231 of the first spacer 23 is larger than the first width W1, a plurality of the first spacers 23 will be respectively deformed and pushed into (with contact) the second indentations U2 of the surface 216 of the first substrate 21 when the LCD apparatus 2 is pressed. Thereby, the pressure received by the LCD apparatus 2 from outside can be distributed, and the more contact area can be provided when the first spacers 23 are respectively pushed into the second indentations U2, resulting in the larger lateral friction, which can prevent the relative movement and accompanying rubbing between the spacers and the first substrate 21, so that the first substrate 21 will not be damaged and thus the LCD apparatus 2 will not be subjected to the light leakage problem.

[0055] FIG. 2A is a schematic sectional diagram of an LCD apparatus 2b according to another embodiment of this disclosure.

[0056] Mainly different from the LCD apparatus 2 in FIG. 1A, the bottom of the second indentation U2 of the LCD apparatus 2b has a plurality of protrusions P to become a rough surface for increasing the lateral friction between the first spacer 23 and the second indentation U2. As to the manufacturing process of the protrusions P, a plurality of protrusions are formed first to the bottom of the first indentation U1 of the first insulating layer 214a by using a gray tone photomask, and then a plurality of the protrusions P are formed to the bottom of the second indentation U2 by controlling the manufacturing process.

[0057] FIG. 2B is a schematic sectional diagram of an LCD apparatus 2c according to another embodiment of this disclosure.

[0058] Mainly different from the LCD apparatus 2 in FIG. 1A, the second insulating layer 214b of the first substrate 21c of the LCD apparatus 2c has a third indentation U3, which is disposed corresponding to the first indentation U1, and the depth of the first indentation U1 is less than or equal to that of the third indentation U3. The width of the third indentation U3 can be slightly larger than that of the first indentation U1. In other words, in the manu-

facturing process, the second insulating layer 214b can be made to have the third indentation U3, so that the surface 216 of the first substrate 21c has the second indentation U2. Besides, the width of the third indentation U3 can be slightly larger than that of the second indentation U2.

[0059] FIG. 2C is a schematic sectional diagram of an LCD apparatus 2d according to another embodiment of this disclosure.

[0060] Mainly different from the LCD apparatus 2 in FIG. 1A, the first spacer 23d and the second spacer 25 of the LCD apparatus 2d have the same height according to the direction perpendicular to the transparent substrate 211, and the first and second spacers 23d and 25 are disposed against the surface 216 of the first substrate 21d through the alignment layer 225. When the LCD apparatus 2d is pressed by an external force, the first spacer 23d also can be pushed into the second indentation U2. Thereby, the pressure received by the LCD apparatus 2d from outside can be distributed, and the more contact area can be provided when the first spacers 23d are respectively pushed into the second indentations U2, resulting in the larger lateral friction, which can prevent the relative movement and accompanying rubbing between the spacers and the first substrate 21d, so that the first substrate 21d will not be damaged and thus the LCD apparatus 2d will not be subjected to the light leakage problem.

[0061] Other technical features of the LCD apparatuses 2b, 2c and 2d can be known by referring to the LCD apparatus 2, and therefore they are not described here for concise purpose.

[0062] FIG. 2D is a schematic sectional diagram of an LCD apparatus 2e according to another embodiment of this disclosure.

[0063] Mainly different from the LCD apparatus 2d in FIG. 2C, the surface 216 of the first substrate 21e of the LCD apparatus 2e further has a fourth indentation U4, which is disposed corresponding to the second spacer 25, and the depth d1 of the fourth indentation U4 is less than the depth d2 of the second indentation U2. Besides, the width of a top surface of the second spacer 25 is larger than that of the opening of the fourth indentation U4. Furthermore, the first insulating layer 214a of the first substrate 21e further has a fifth indentation U5, which is disposed corresponding to the fourth indentation U4, and the depth of the fourth indentation U4 is less than or equal to that of the fifth indentation U5.

[0064] Other technical features of the LCD apparatuses 2e can be known by referring to the LCD apparatus 2d, and therefore they are not described here for concise purpose.

[0065] FIG. 2E is a schematic sectional diagram of an LCD apparatus 2f according to another embodiment of this disclosure.

[0066] Mainly different from the LCD apparatus 2e in FIG. 2D, the second insulating layer 214b of the LCD apparatus 2f further has a sixth indentation U6 disposed

corresponding to the fifth indentation U5, in addition to a third indentation U3 disposed corresponding to the first indentation U1. Besides, the depth of the first indentation U1 is less than or equal to that of the third indentation U3, and the depth of the fifth indentation U5 is less than or equal to that of the sixth indentation U6.

[0067] Other technical features of the LCD apparatuses 2f can be known by referring to the LCD apparatus 2e, and therefore they are not described here for concise purpose.

[0068] In summary, in the LCD apparatus according to the embodiments of this disclosure, the insulating layer covers the metal layer and has a first indentation, so that the surface of the first substrate has a second indentation. Besides, the top surface of the first spacer at least partially overlaps the opening of the second indentation, and the second width of the top surface is larger than the first width of the second indentation. Therefore, when the LCD apparatus is pressed by an external force, the first spacers are respectively pushed into the second indentations of the first substrate. Thereby, the pressure received by the LCD apparatus from outside can be distributed, and the more contact area can be provided when the first spacers are respectively pushed into the second indentations, resulting in the larger lateral friction, which can prevent the relative movement and accompanying rubbing between the spacers and the first substrate, so that the first substrate will not be damaged and thus the LCD apparatus will not be subjected to the light leakage problem.

[0069] Although the invention has been described with reference to specific embodiments, this description is not meant to be construed in a limiting sense. Various modifications of the disclosed embodiments, as well as alternative embodiments, will be apparent to persons skilled in the art. It is, therefore, contemplated that the appended claims will cover all modifications that fall within the true scope of the invention.

Claims

1. A liquid crystal display apparatus (2) comprising:

a first substrate (21) including a transparent plate (211), a metal layer (212), an insulating layer (214), a first electrode layer (215) and an alignment layer (217), wherein the metal layer (212) is disposed on the transparent plate (211), the insulating layer (214) is disposed on the metal layer (212) and has a first indentation (U1), the first electrode layer (215) is formed on the first indentation (U1) so as to have a corresponding indentation, the alignment layer (217) is formed on the corresponding indentation of the first electrode layer (215) so as to have a second indentation (U2), and the second indentation (U2) is disposed on the first indentation (U1) and

- has a first width (W1);
 a second substrate (22) disposed opposite to the first substrate (21); and
 a first spacer (23) disposed on the second substrate (22) and having a top surface (231) opposite to the second indentation (U2), wherein the top surface (231) and the second indentation (U2) at least partially overlap, and the top surface (231) has a second width (W2) which is larger than the first width (W1), **characterised in that** the insulating layer (214) is disposed between the metal layer (212) and the first electrode layer (215) at the position of the first indentation (U1) and covers the metal layer (212) so that the metal layer (212) can not be exposed.
2. The liquid crystal display apparatus (2) as recited in claim 1, further comprising:
 a liquid crystal layer (24) disposed between the first substrate (21) and the second substrate (22).
 3. The liquid crystal display apparatus (2) as recited in claim 1 or claim 2, wherein the first spacer (23) is not disposed against a surface of the first substrate (21).
 4. The liquid crystal display apparatus (2) according to at least one of the preceding claims, further comprising:
 a thin film transistor (T) disposed on the transparent plate (211), wherein the thin film transistor (T) has a gate (G), a gate dielectric layer (T1), a channel layer (T2), a source (S) and a drain (D), and the gate (G) is disposed on the transparent plate (211), the gate dielectric layer (T1) is disposed on the gate (G), the channel layer (T2) is disposed on the gate dielectric layer (T1), the source (S) and the drain (D) are disposed on the channel layer (T2), and the metal layer (212) is the same layer as the drain (D) or source (S) of the thin film transistor (T).
 5. The liquid crystal display apparatus according to at least one of the preceding claims, wherein the insulating layer (214) includes a first insulating sub-layer (214a) and a second insulating sub-layer (214b), the first insulating sub-layer (214a) is disposed on the second insulating sub-layer (214b), and the second insulating sub-layer (214b) is disposed above the thin film transistor (T).
 6. The liquid crystal display apparatus as recited in claim 5, wherein the first substrate further includes a second electrode layer (218) disposed between the first and second insulating sub-layers (214a,
- 214b).
7. The liquid crystal display apparatus as recited in claim 5, wherein the depth of the second indentation (U2) is less than that of the first indentation (U1).
 8. The liquid crystal display apparatus as recited in claim 7, wherein the second insulating sub-layer (214b) has a third indentation (U3) disposed on the first indentation (U1), and the depth of the first indentation (U1) is less than or equal to that of the third indentation (U3).
 9. The liquid crystal display apparatus (2) as recited in claim 7, wherein a bottom of the second indentation (U2) has a plurality of protrusions.
 10. The liquid crystal display apparatus as recited in claim 1, wherein the second substrate has an additional transparent plate and a common electrode layer disposed on the additional transparent plate.
 11. The liquid crystal display apparatus as recited in claim 7, further comprising:
 a second spacer (25) disposed on the second substrate (22).
 12. The liquid crystal display apparatus as recited in claim 11, wherein the second spacer (25) is disposed against a surface of the first substrate (21).
 13. The liquid crystal display apparatus as recited in claim 11, wherein the first spacer (23) and the second spacer (25) have different heights in the direction perpendicular to the transparent plate (211).
 14. The liquid crystal display apparatus (2) as recited in claim 13, wherein the height of the second spacer (25) is between one time and two times the height of the first spacer (23).
 15. The liquid crystal display apparatus as recited in claim 11, wherein the first spacer (23) and the second spacer (25) have the same height in the direction perpendicular to the transparent plate (211).
 16. The liquid crystal display apparatus as recited in claim 15, wherein the first and second spacers (23, 25) are disposed against a surface of the first substrate (21).
 17. The liquid crystal display apparatus as recited in claim 15, wherein the alignment (217) has a fourth indentation (U4) disposed on the second indentation (U2), and the depth of the fourth indentation (U4) is less than that of the second indentation (U2).

18. The liquid crystal display apparatus (2) as recited in claim 17, wherein the width of a top surface of the second spacer (25) is larger than that of the fourth indentation (U4).
19. The liquid crystal display apparatus as recited in claim 17, wherein the first insulating-sub-layer (214a) further has a fifth indentation (U5) disposed on the fourth indentation (U4), and the depth of the fourth indentation (U4) is less than or equal to that of the fifth indentation (U5).
20. The liquid crystal display apparatus as recited in claim 19, wherein the second insulating sub-layer (214b) further has a sixth indentation (U6) disposed on the fifth indentation (U5), and the depth of the fifth indentation (U5) is less than or equal to that of the sixth indentation (U6).

Patentansprüche

1. Flüssigkristallanzeigevorrichtung (2), umfassend:

ein erstes Substrat (21), das eine transparente Platte (211), eine Metallschicht (212), eine Isolationsschicht (214), eine erste Elektroden-schicht (215) und eine Ausrichtungsschicht (217) umfasst, wobei sich die Metallschicht (212) auf der transparenten Platte (211) befindet, sich die Isolationsschicht (214) auf der Metallschicht (212) befindet und eine erste Einkerbung (U1) aufweist, die erste Elektroden-schicht (215) auf der ersten Einkerbung (U1) gebildet ist, so dass sie eine entsprechende Einkerbung aufweist, die Ausrichtungsschicht (217) auf der entsprechenden Einkerbung der ersten Elektroden-schicht (215) gebildet ist, so dass sie eine zweite Einkerbung (U2) aufweist, und sich die zweite Einkerbung (U2) auf der ersten Einkerbung (U1) befindet und eine erste Breite (W1) aufweist;

ein zweites Substrat (22), das sich gegenüber dem ersten Substrat (21) befindet; und

einen ersten Abstandshalter (23), der sich auf dem zweiten Substrat (22) befindet und eine obere Fläche (231) gegenüber der zweiten Einkerbung (U2) aufweist, wobei die obere Fläche (231) und die zweite Einkerbung (U2) wenigstens teilweise überlappen und die obere Fläche (231) eine zweite Breite (W2) aufweist, die größer ist als die erste Breite (W1), **dadurch gekennzeichnet, dass** sich die Isolationsschicht (214) auf der Position der ersten Einkerbung (U1) zwischen der Metallschicht (212) und der ersten Elektroden-schicht (215) befindet und die Metallschicht (212) bedeckt, so dass die Metallschicht (212) nicht exponiert sein kann.

2. Flüssigkristallanzeigevorrichtung (2) gemäß Anspruch 1, weiterhin umfassend:

eine Flüssigkristallschicht (24), die sich zwischen dem ersten Substrat (21) und dem zweiten Substrat (22) befindet.

3. Flüssigkristallanzeigevorrichtung (2) gemäß Anspruch 1 oder 2, wobei der erste Abstandshalter (23) nicht an einer Fläche des ersten Substrats (21) anliegt.

4. Flüssigkristallanzeigevorrichtung (2) gemäß wenigstens einem der vorstehenden Ansprüche, weiterhin umfassend:

einen Dünnschichttransistor (T), der sich auf der transparenten Platte (211) befindet, wobei der Dünnschichttransistor (T) ein Gate (G), eine dielektrische Schicht des Gates (T1), eine Kanalschicht (T2), eine Source (S) und ein Drain (D) aufweist und sich das Gate (G) auf der transparenten Platte (211) befindet, sich die dielektrische Schicht des Gates (T1) auf dem Gate (G) befindet, sich die Kanalschicht (T2) auf der dielektrischen Schicht des Gates (T1) befindet, sich die Source (S) und das Drain (D) auf der Kanalschicht (T2) befinden und die Metallschicht (212) dieselbe Schicht ist wie das Drain (D) oder die Source (S) des Dünnschichttransistors (T).

5. Flüssigkristallanzeigevorrichtung gemäß wenigstens einem der vorstehenden Ansprüche, wobei die Isolationsschicht (214) eine erste isolierende Teilschicht (214a) und eine zweite isolierende Teilschicht (214b) umfasst, wobei sich die erste isolierende Teilschicht (214a) auf der zweiten isolierenden Teilschicht (214b) befindet und sich die zweite isolierende Teilschicht (214b) oberhalb des Dünnschichttransistors (T) befindet.

6. Flüssigkristallanzeigevorrichtung gemäß Anspruch 5, wobei das erste Substrat weiterhin eine zweite Elektroden-schicht (218) umfasst, die sich zwischen der ersten und der zweiten isolierenden Teilschicht (214a, 214b) befindet.

7. Flüssigkristallanzeigevorrichtung gemäß Anspruch 5, wobei die Tiefe der zweiten Einkerbung (U2) geringer ist als die der ersten Einkerbung (U1).

8. Flüssigkristallanzeigevorrichtung gemäß Anspruch 7, wobei die zweite isolierende Teilschicht (214b) eine dritte Einkerbung (U3) aufweist, die sich auf der ersten Einkerbung (U1) befindet, und die Tiefe der ersten Einkerbung (U1) kleiner oder gleich der Tiefe der dritten Einkerbung (U3) ist.

9. Flüssigkristallanzeigevorrichtung (2) gemäß Anspruch 7, wobei der Boden der zweiten Einkerbung (U2) eine Vielzahl von Vorsprüngen aufweist.
10. Flüssigkristallanzeigevorrichtung gemäß Anspruch 1, wobei das zweite Substrat eine zusätzliche transparente Platte und eine gemeinsame Elektroden-schicht, die sich auf der zusätzlichen transparenten Platte befindet, aufweist.
11. Flüssigkristallanzeigevorrichtung gemäß Anspruch 7, weiterhin umfassend:
- einen zweiten Abstandshalter (25), der sich auf dem zweiten Substrat (22) befindet.
12. Flüssigkristallanzeigevorrichtung gemäß Anspruch 11, wobei der zweite Abstandshalter (25) an einer Fläche des ersten Substrats (21) anliegt.
13. Flüssigkristallanzeigevorrichtung gemäß Anspruch 11, wobei der erste Abstandshalter (23) und der zweite Abstandshalter (25) in der Richtung senkrecht zur transparenten Platte (211) unterschiedliche Höhen aufweisen.
14. Flüssigkristallanzeigevorrichtung (2) gemäß Anspruch 13, wobei die Höhe des zweiten Abstandshalters (25) zwischen der einfachen und der doppelten Höhe des ersten Abstandshalters (23) liegt.
15. Flüssigkristallanzeigevorrichtung gemäß Anspruch 11, wobei der erste Abstandshalter (23) und der zweite Abstandshalter (25) in der Richtung senkrecht zur transparenten Platte (211) dieselbe Höhe aufweisen.
16. Flüssigkristallanzeigevorrichtung gemäß Anspruch 15, wobei der erste und der zweite Abstandshalter (23, 25) an einer Fläche des ersten Substrats (21) anliegen.
17. Flüssigkristallanzeigevorrichtung gemäß Anspruch 15, wobei die Ausrichtungsschicht (217) eine vierte Einkerbung (U4) aufweist, die sich auf der zweiten Einkerbung (U2) befindet, und die Tiefe der vierten Einkerbung (U4) kleiner ist als die der zweiten Einkerbung (U2).
18. Flüssigkristallanzeigevorrichtung (2) gemäß Anspruch 17, wobei die Breite einer oberen Fläche des zweiten Abstandshalters (25) größer ist als die der vierten Einkerbung (U4).
19. Flüssigkristallanzeigevorrichtung gemäß Anspruch 17, wobei die erste isolierende Teilschicht (214a) weiterhin eine fünfte Einkerbung (U5) aufweist, die sich auf der vierten Einkerbung (U4) befindet, und

die Tiefe der vierten Einkerbung (U4) kleiner oder gleich der Tiefe der fünften Einkerbung (U5) ist.

20. Flüssigkristallanzeigevorrichtung gemäß Anspruch 19, wobei die zweite isolierende Teilschicht (214b) weiterhin eine sechste Einkerbung (U6) aufweist, die sich auf der fünften Einkerbung (U5) befindet, und die Tiefe der fünften Einkerbung (U5) kleiner oder gleich der Tiefe der sechsten Einkerbung (U6) ist.

Revendications

1. Dispositif d'affichage à cristaux liquides (2), comprenant :

un premier substrat (21) comportant une plaque transparente (211), une couche de métal (212), une couche isolante (214), une première couche d'électrode (215) et une couche d'alignement (217), dans lequel ladite couche de métal (212) est disposée sur ladite plaque transparente (211), ladite couche isolante (214) est disposée sur ladite couche de métal (212) et présente une première indentation (U1), la première couche d'électrode (215) est formée sur la première indentation (U1), de sorte qu'elle présente une indentation correspondante, ladite couche d'alignement (217) est formée sur l'indentation correspondante de la première couche d'électrode (215), de sorte qu'elle présente une deuxième indentation (U2), et la deuxième indentation (U2) est disposée sur la première indentation (U1) et présente une première largeur (W1), un second substrat (22) opposé audit premier substrat (21), et une première entretoise (23) disposée sur le second substrat (22) et présentant une surface supérieure (231) opposée à la deuxième indentation (U2), dans lequel ladite surface supérieure (231) et la deuxième indentation (U2) se chevauchent au moins partiellement, et ladite surface supérieure (231) présente une seconde largeur (W2) qui est plus large que la première largeur (W1), **caractérisé en ce que** ladite couche isolante (214) est disposée entre ladite couche de métal (212) et la première couche d'électrode (215) à la position de la première indentation (U1), et couvre ladite couche de métal (212), de sorte que la couche de métal (212) ne peut pas être exposée.

2. Dispositif d'affichage à cristaux liquides (2) selon la revendication 1, comprenant en outre :

une couche de cristaux liquides (24) disposée entre le premier substrat (21) et le second substrat (22).

3. Dispositif d'affichage à cristaux liquides (2) selon la revendication 1 ou 2, dans lequel la première entretoise (23) n'est pas disposée contre une surface du premier substrat (21).
4. Dispositif d'affichage à cristaux liquides (2) selon au moins une des revendications précédentes, comprenant en outre :

un transistor à couche mince (T) disposé sur ladite plaque transparente (211), dans lequel ledit transistor à couche mince (T) présente une grille (G), une couche diélectrique de grille (T1), une couche de canal (T2), une source (S) et un drain (D), et ladite grille (G) est disposée sur ladite plaque transparente (211), ladite couche diélectrique de grille (T1) est disposée sur ladite grille (G), ladite couche de canal (T2) est disposée sur ladite couche diélectrique de grille (T1), lesdits source (S) et drain (D) sont disposés sur ladite couche de canal (T2), et ladite couche de métal (212) est la même couche que le drain (D) ou la source (S) dudit transistor à couche mince (T).
5. Dispositif d'affichage à cristaux liquides selon au moins une des revendications précédentes, dans lequel ladite couche isolante (214) comporte une première sous-couche isolante (214a) et une seconde sous-couche isolante (214b), la première sous-couche isolante (214a) est disposée sur la seconde sous-couche isolante (214b), et la seconde sous-couche isolante (214b), est disposée sur ledit transistor à couche mince (T).
6. Dispositif d'affichage à cristaux liquides selon la revendication 5, dans lequel le premier substrat comprend en outre une seconde couche d'électrode (218) disposée entre les première et seconde sous-couches isolantes (214a, 214b).
7. Dispositif d'affichage à cristaux liquides selon la revendication 5, dans lequel la profondeur de la deuxième indentation (U2) est inférieure à celle de la première indentation (U1).
8. Dispositif d'affichage à cristaux liquides selon la revendication 7, dans lequel la seconde sous-couche isolante (214b) présente une troisième indentation (U3) disposée sur la première indentation (U1), et la profondeur de la première indentation (U1) est inférieure ou égale à celle de la troisième indentation (U3).
9. Dispositif d'affichage à cristaux liquides (2) selon la revendication 7, dans lequel le bas de la deuxième indentation (U2) présente une pluralité de protubérances.
10. Dispositif d'affichage à cristaux liquides selon la revendication 1, dans lequel le second substrat présente une plaque transparente additionnelle et une couche d'électrode commune disposée sur la plaque transparente additionnelle.
11. Dispositif d'affichage à cristaux liquides selon la revendication 7, comprenant en outre :

une seconde entretoise (25) disposée sur le second substrat (22).
12. Dispositif d'affichage à cristaux liquides selon la revendication 11, dans lequel la seconde entretoise (25) est disposée contre une surface du premier substrat (21).
13. Dispositif d'affichage à cristaux liquides selon la revendication 11, dans lequel la première entretoise (23) et la seconde entretoise (25) présentent des hauteurs différentes dans la direction perpendiculaire à ladite plaque transparente (211).
14. Dispositif d'affichage à cristaux liquides (2) selon la revendication 13, dans lequel la hauteur de la seconde entretoise (25) est située entre une fois et deux fois la hauteur de la première entretoise (23).
15. Dispositif d'affichage à cristaux liquides selon la revendication 11, dans lequel la première entretoise (23) et la seconde entretoise (25) présentent la même hauteur dans la direction perpendiculaire à ladite plaque transparente (211).
16. Dispositif d'affichage à cristaux liquides selon la revendication 15, dans lequel les première et seconde entretoises (23, 25) sont disposées contre une surface du premier substrat (21).
17. Dispositif d'affichage à cristaux liquides selon la revendication 15, dans lequel ladite couche d'alignement (217) présente une quatrième indentation (U4) disposée sur la deuxième indentation (U2), et la profondeur de la quatrième indentation (U4) est inférieure à celle de la deuxième indentation (U2).
18. Dispositif d'affichage à cristaux liquides (2) selon la revendication 17, dans lequel la largeur de ladite surface supérieure de la seconde entretoise (25) est supérieure à celle de la quatrième indentation (U4).
19. Dispositif d'affichage à cristaux liquides selon la revendication 17, dans lequel la première sous-couche isolante (214a) présente en outre une cinquième indentation (U5) disposée sur la quatrième indentation (U4), et la profondeur de la quatrième indentation (U4) est inférieure ou égale à celle de la cinquième indentation (U5).

20. Dispositif d'affichage à cristaux liquides selon la revendication 19, dans lequel la seconde sous-couche isolante (214b) présente en outre une sixième indentation (U6) disposée sur la cinquième indentation (U5), et la profondeur de la cinquième indentation (U5) est inférieure ou égale à celle de la sixième indentation (U6).

10

15

20

25

30

35

40

45

50

55

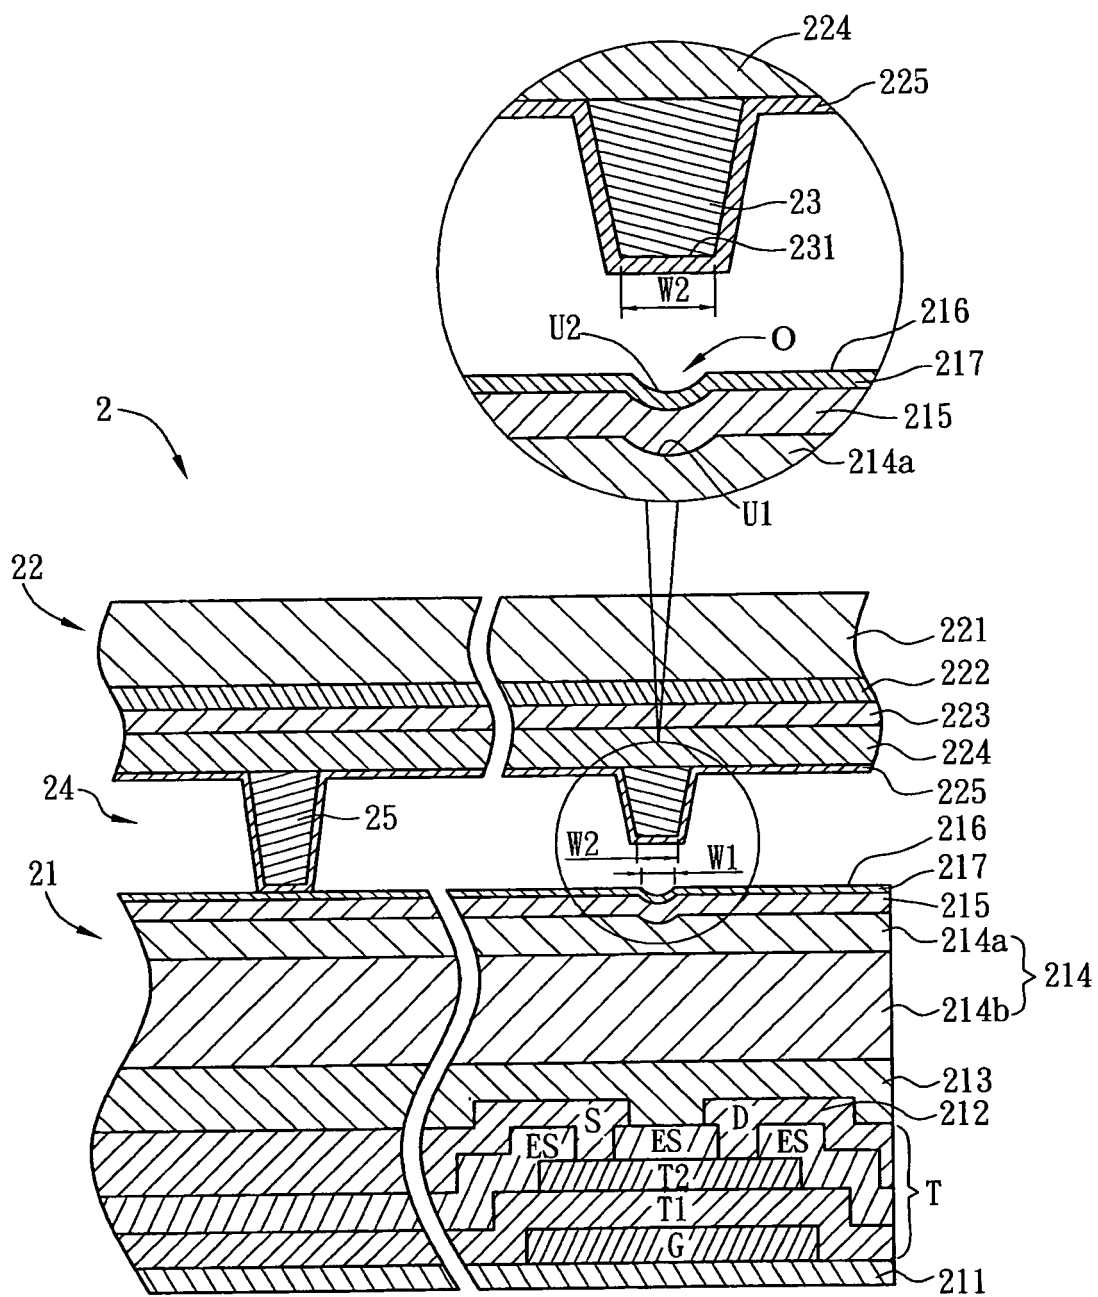


FIG. 1A

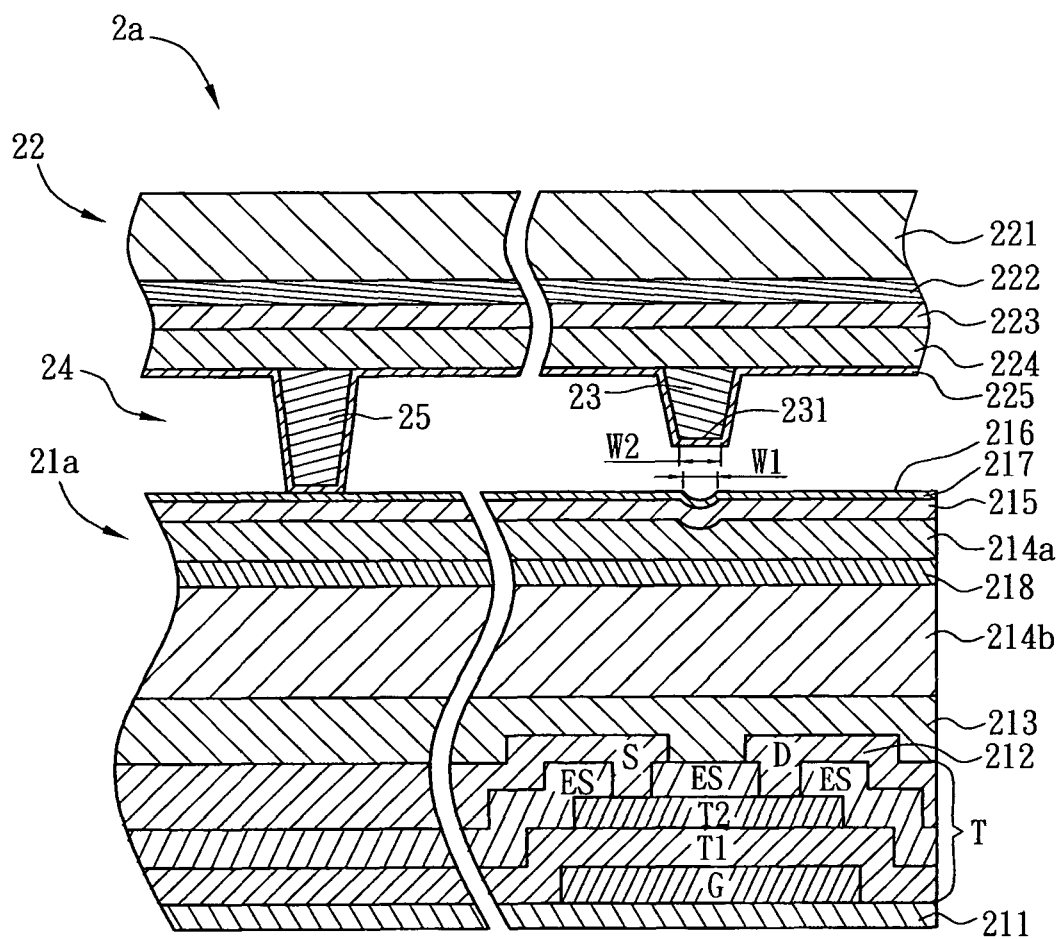


FIG. 1B

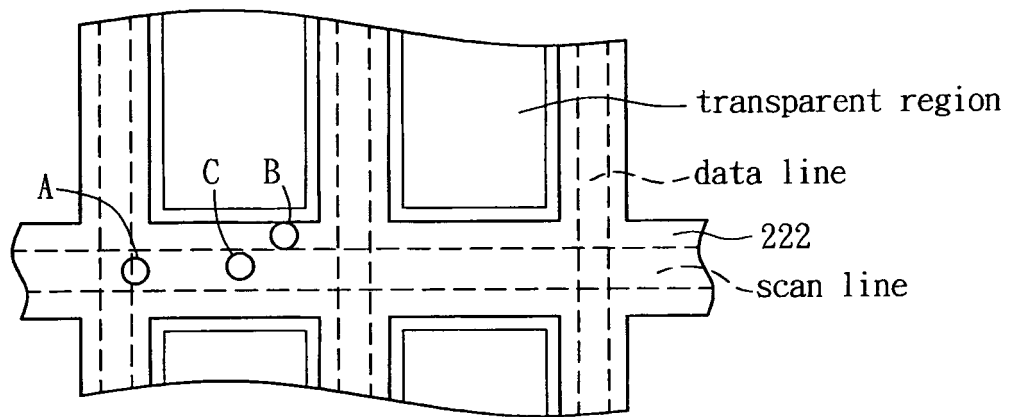


FIG. 1C

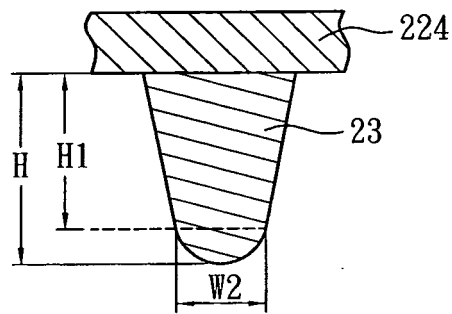


FIG. 1D

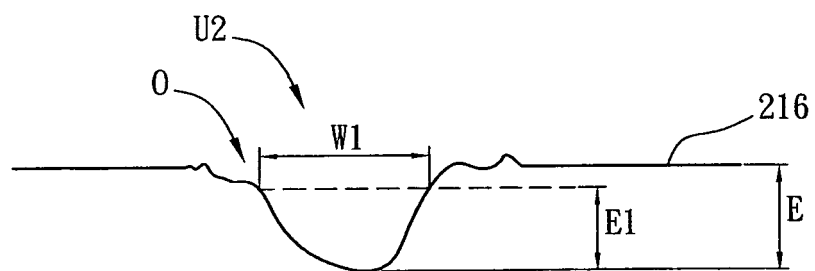


FIG. 1E

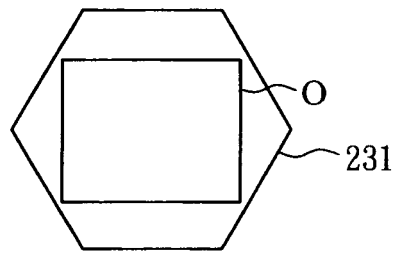


FIG. 1F

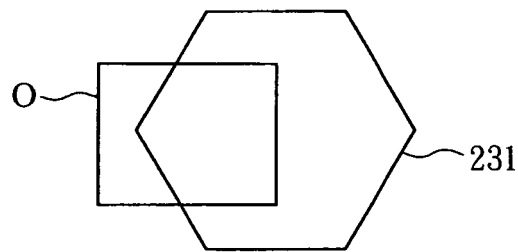


FIG. 1G

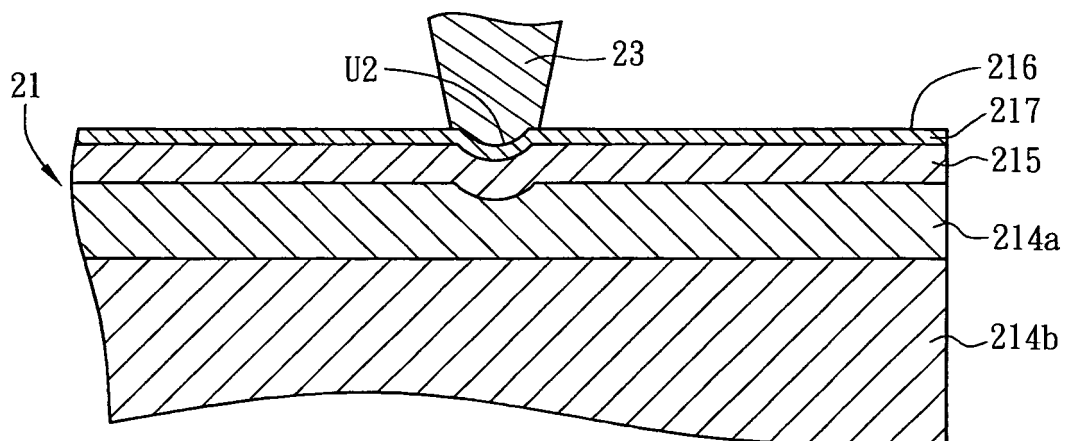


FIG. 1H

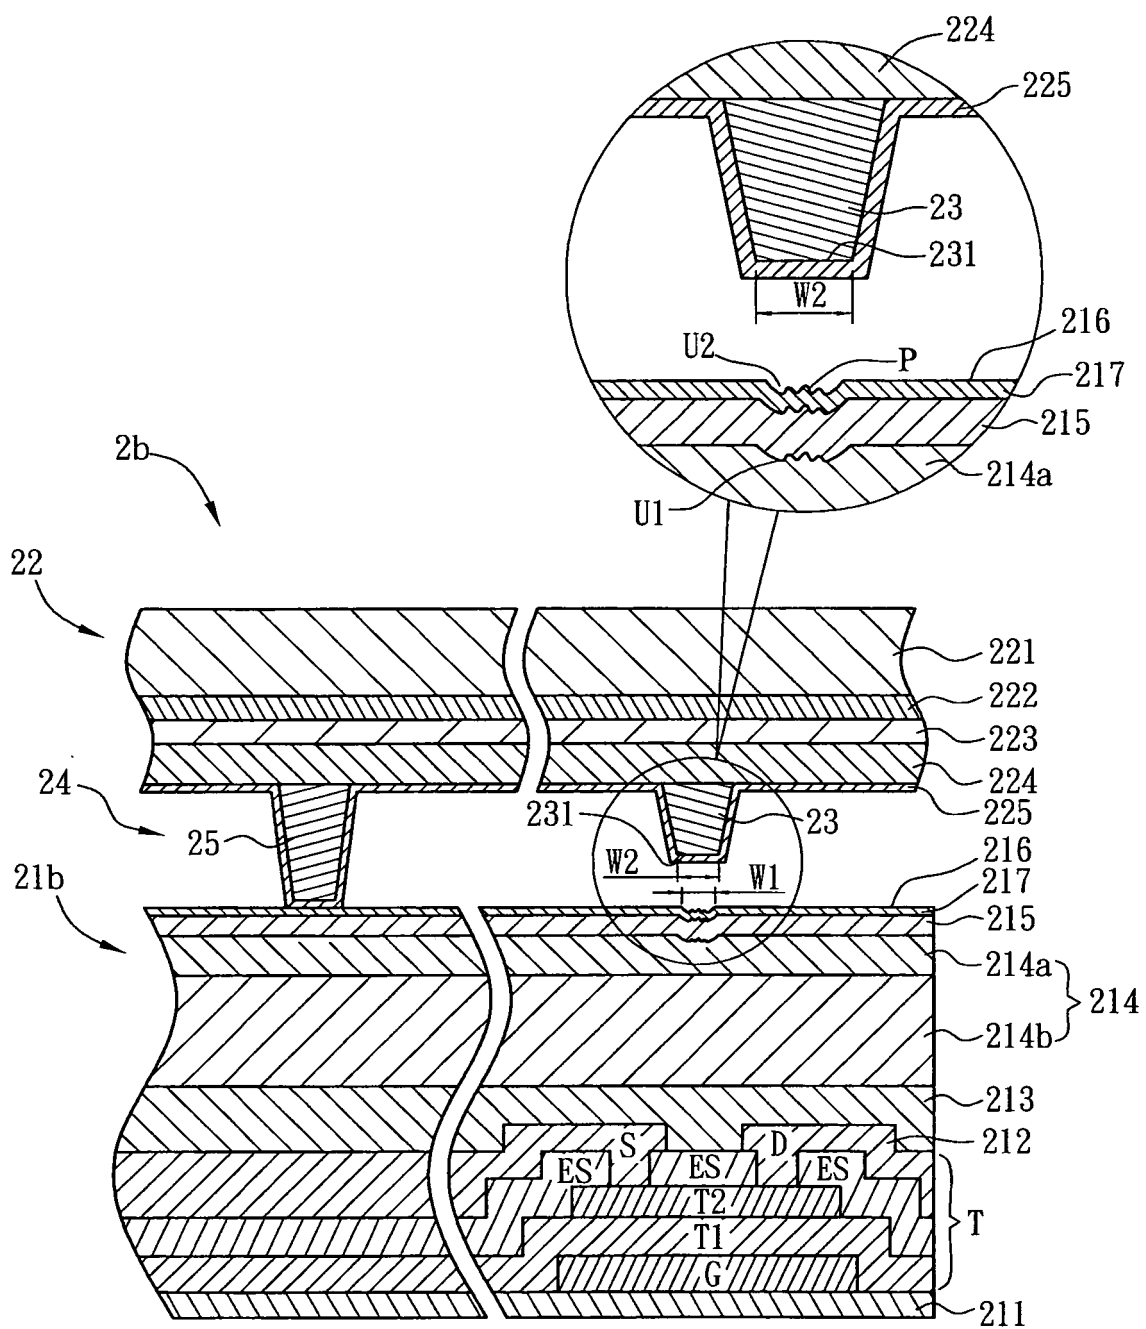


FIG. 2A

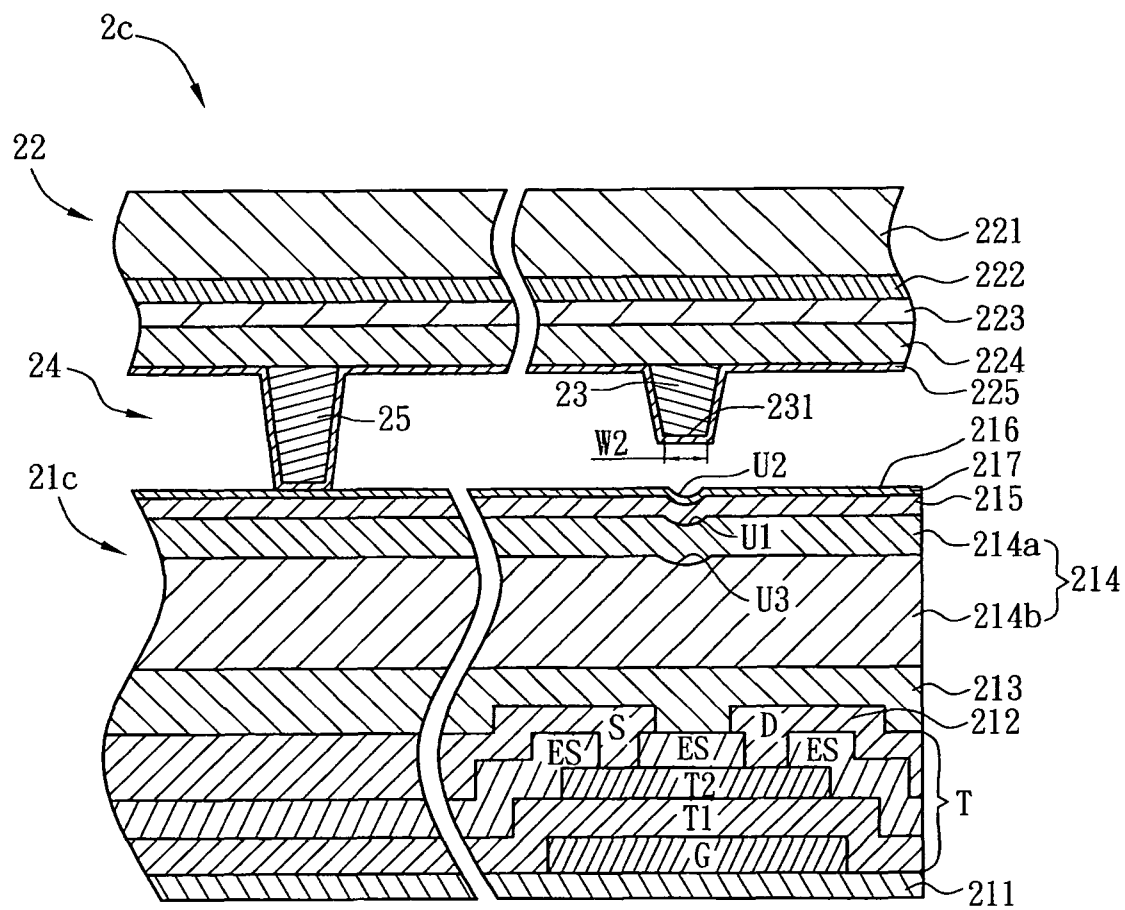


FIG. 2B

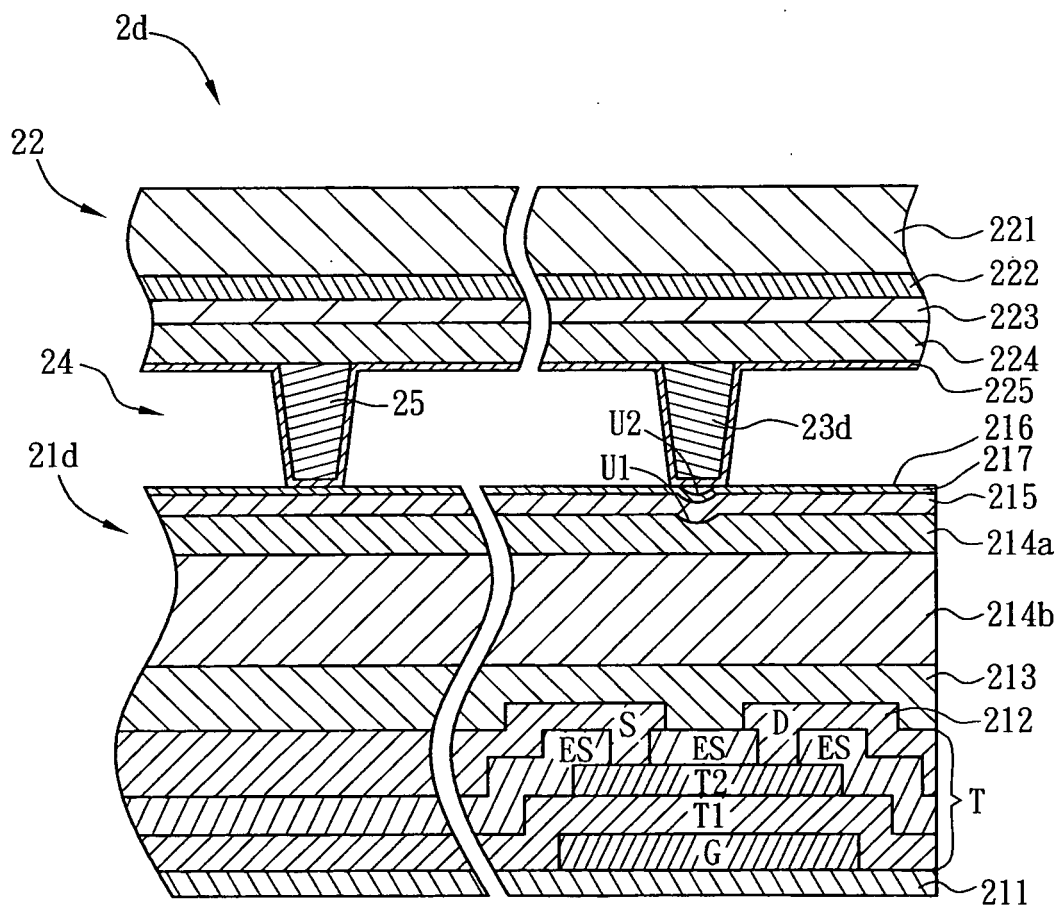


FIG. 2C

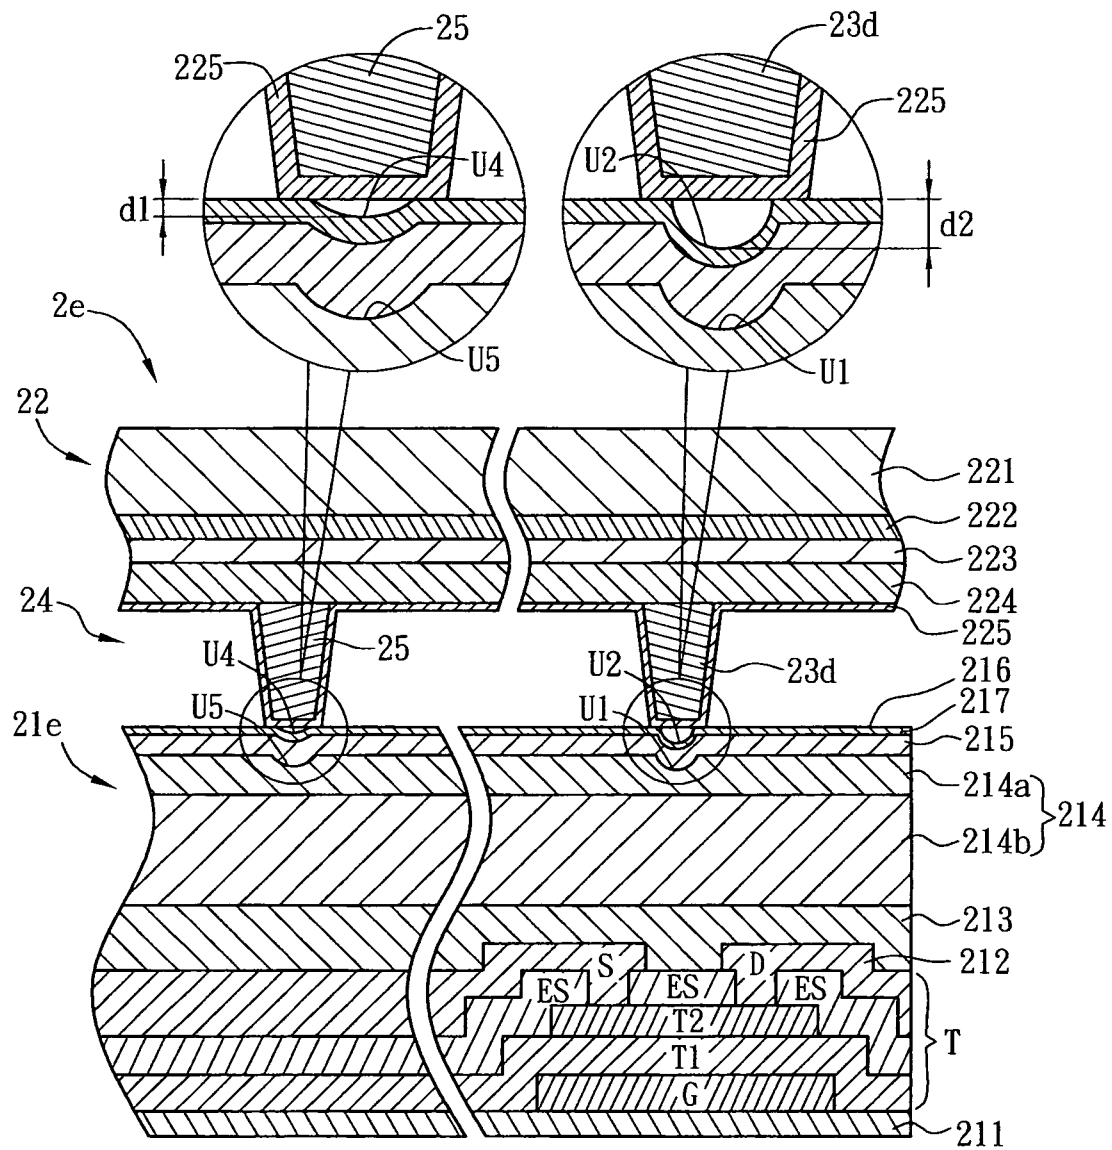


FIG. 2D

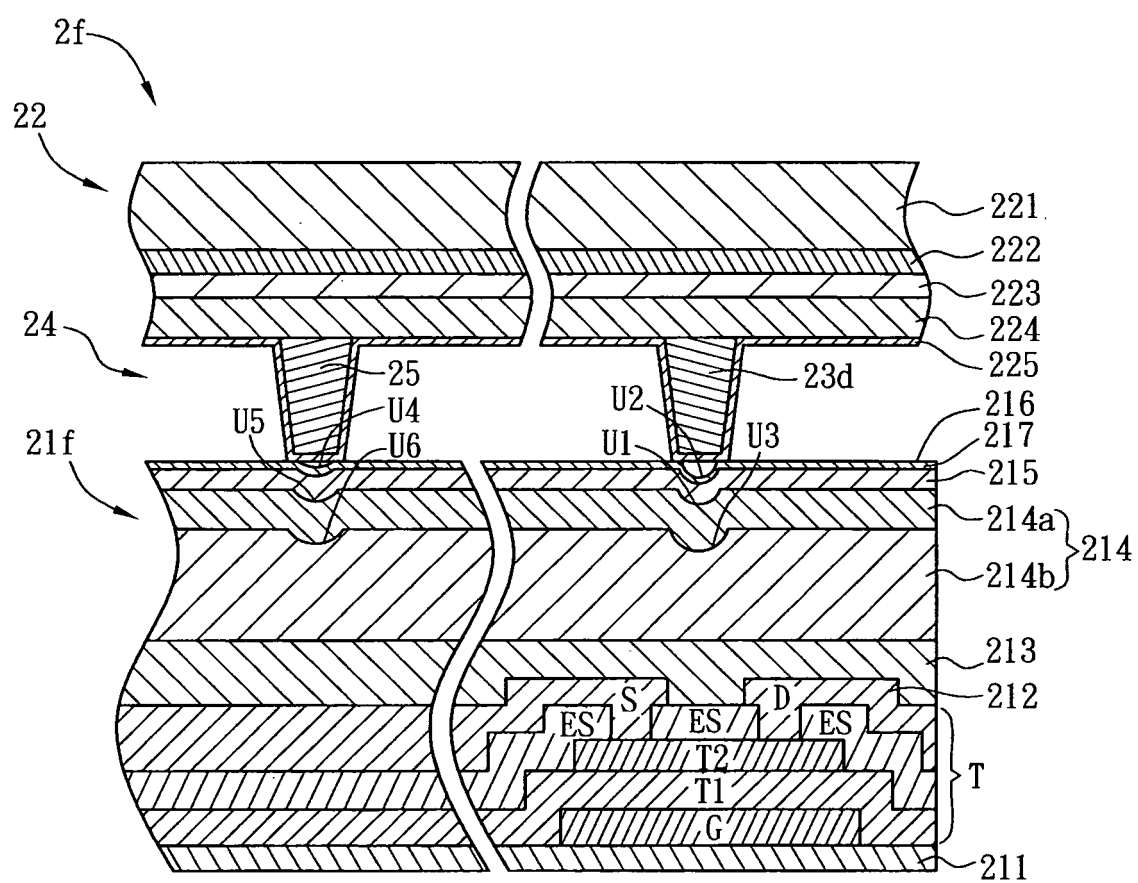


FIG. 2E

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2005052607 A1 [0005]
- US 2008136760 A1 [0006]
- JP 2005241856 A [0007]
- EP 1898253 A2 [0008]

专利名称(译)	液晶显示装置		
公开(公告)号	EP2706404B1	公开(公告)日	2017-10-11
申请号	EP2013180696	申请日	2013-08-16
[标]申请(专利权)人(译)	群创光电股份有限公司		
申请(专利权)人(译)	群创光电		
当前申请(专利权)人(译)	群创光电		
[标]发明人	YANG PO JU KAO YU CHIEN SUNG LI WEI		
发明人	YANG, PO-JU KAO, YU-CHIEN SUNG, LI-WEI		
IPC分类号	G02F1/1339 G02F1/1333		
CPC分类号	G02F1/133371 G02F1/13394 G02F1/136227 G02F2001/13396 G02F2201/50 G02F1/133345		
优先权	101132959 2012-09-10 TW		
其他公开文献	EP2706404A1		
外部链接	Espacenet		

摘要(译)

一种液晶显示装置，包括第一基板组件（21），第二基板组件（22）和第一隔离物（23）。第一基板组件（21）包括透明基板（211），金属层（212），绝缘层（214）和第一电极层（215）。金属层（212）设置在透明基板（211）上。绝缘层（214）位于金属层（212）和第一电极层（215）之间并覆盖金属层（212）。绝缘层（214）具有第一凹口（U1）。第一基板组件（21）的表面（216）具有形成在第一凹口（U1）上方并具有第一宽度（W1）的第二凹口（U2）。第二基板组件（22）与第一基板组件（21）相对。第一隔离物（23）形成在第二基板组件（22）上，并且每个隔离物具有与第二凹口（U2）相对的顶表面（231）。顶表面（231）和第二凹口（U2）至少部分地重叠，顶表面（231）具有大于第一宽度（W1）的第二宽度（W2），以防止基板的相对运动当设备受到压缩时。

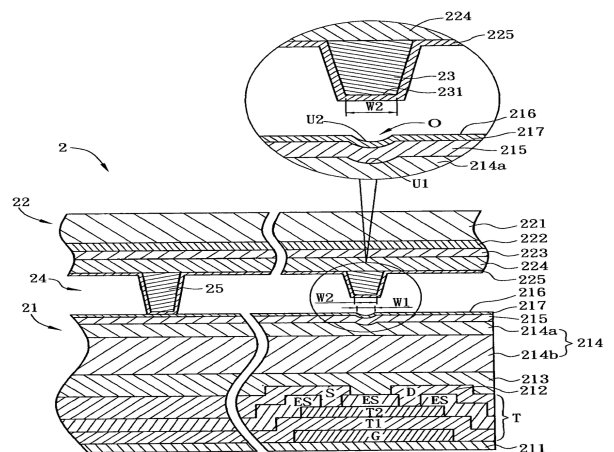


FIG. 1A