



US 20160065133A1

(19) **United States**(12) **Patent Application Publication**
Cong et al.(10) **Pub. No.: US 2016/0065133 A1**(43) **Pub. Date: Mar. 3, 2016**(54) **POWER-EFFICIENT CHOPPER AMPLIFIER***5/0402* (2013.01); *A61B 5/0488* (2013.01);*A61B 5/01* (2013.01); *A61B 5/04012*(71) Applicant: **Medtronic, Inc.**, Minneapolis, MN (US)(2013.01); *A61B 5/11* (2013.01); *A61B 5/6847*(72) Inventors: **Peng Cong**, Plymouth, MN (US);
Michael B. Terry, Camas, WA (US)(2013.01); *H03F 2200/324* (2013.01); *H03F**2200/171* (2013.01); *H03F 2203/45116*


(2013.01)

(21) Appl. No.: **14/474,858**(22) Filed: **Sep. 2, 2014****Publication Classification**(51) **Int. Cl.***H03F 1/02* (2006.01)*A61B 5/0476* (2006.01)*A61B 5/0402* (2006.01)*A61B 5/00* (2006.01)*A61B 5/01* (2006.01)*A61B 5/04* (2006.01)*A61B 5/11* (2006.01)*H03F 3/45* (2006.01)*A61B 5/0488* (2006.01)(52) **U.S. Cl.**CPC *H03F 1/0205* (2013.01); *H03F 3/45076*
(2013.01); *A61B 5/0476* (2013.01); *A61B*

(57)

ABSTRACT

In an example, an electrical circuit device for amplifying a physiological signal includes a modulation unit configured to receive an input signal, to modulate the input signal to produce a modulated signal. The device also includes an amplification and transconductance unit configured to amplify an amplitude of the modulated signal and increase a transconductance of the modulated signal to produce a transconductance enhanced modulated and amplified signal, where the amplification and transconductance unit comprises at least a first complementary pair of transistors and a second complementary pair of transistors configured to receive the modulated signal and to amplify and increase the transconductance of the modulated signal. The device also includes a demodulation unit configured to receive the transconductance enhanced modulated and amplified signal and to demodulate the signal.

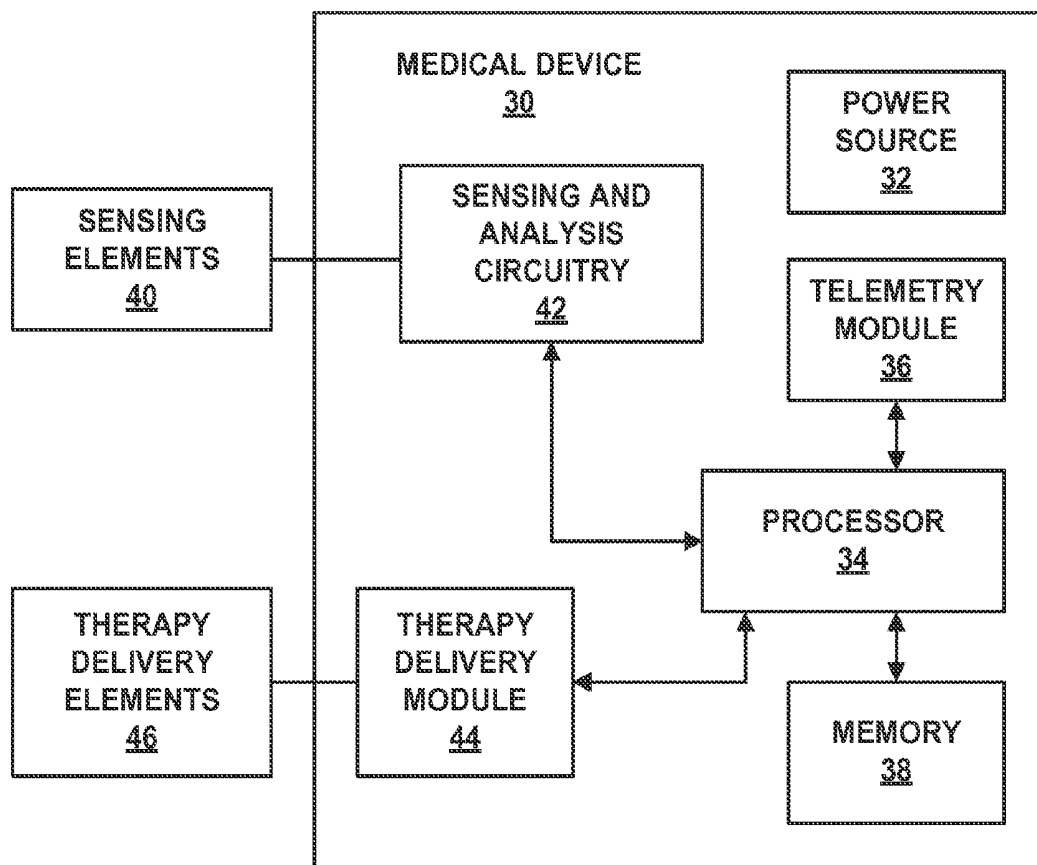

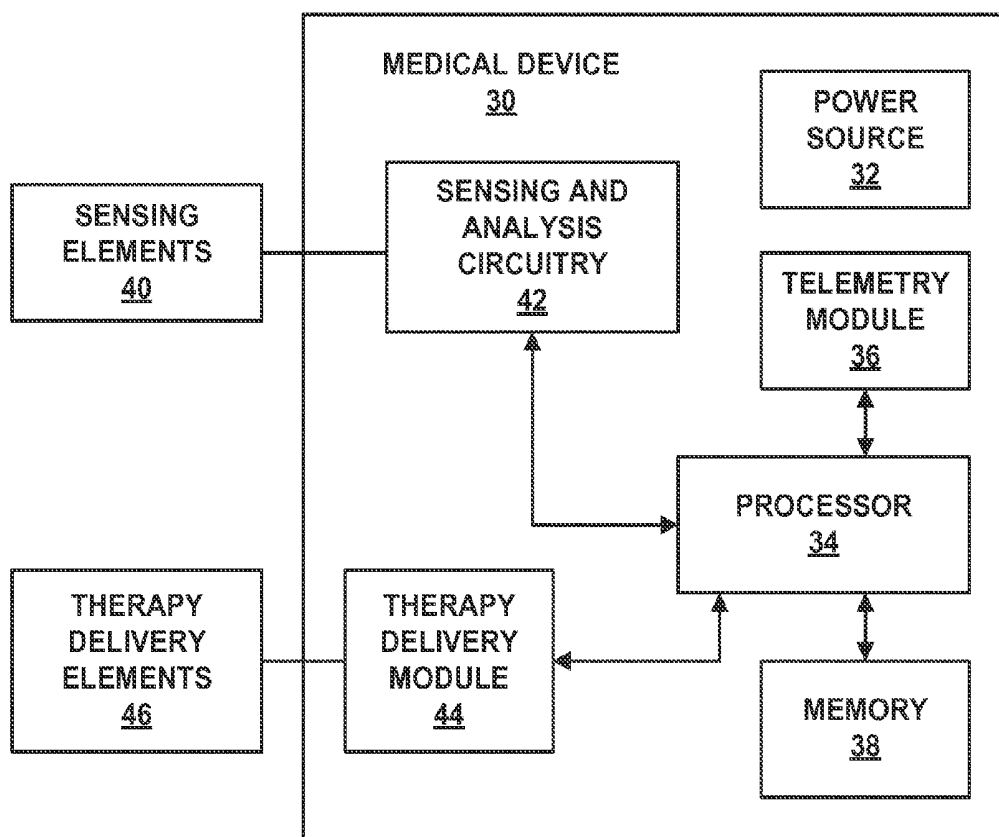


FIG. 1

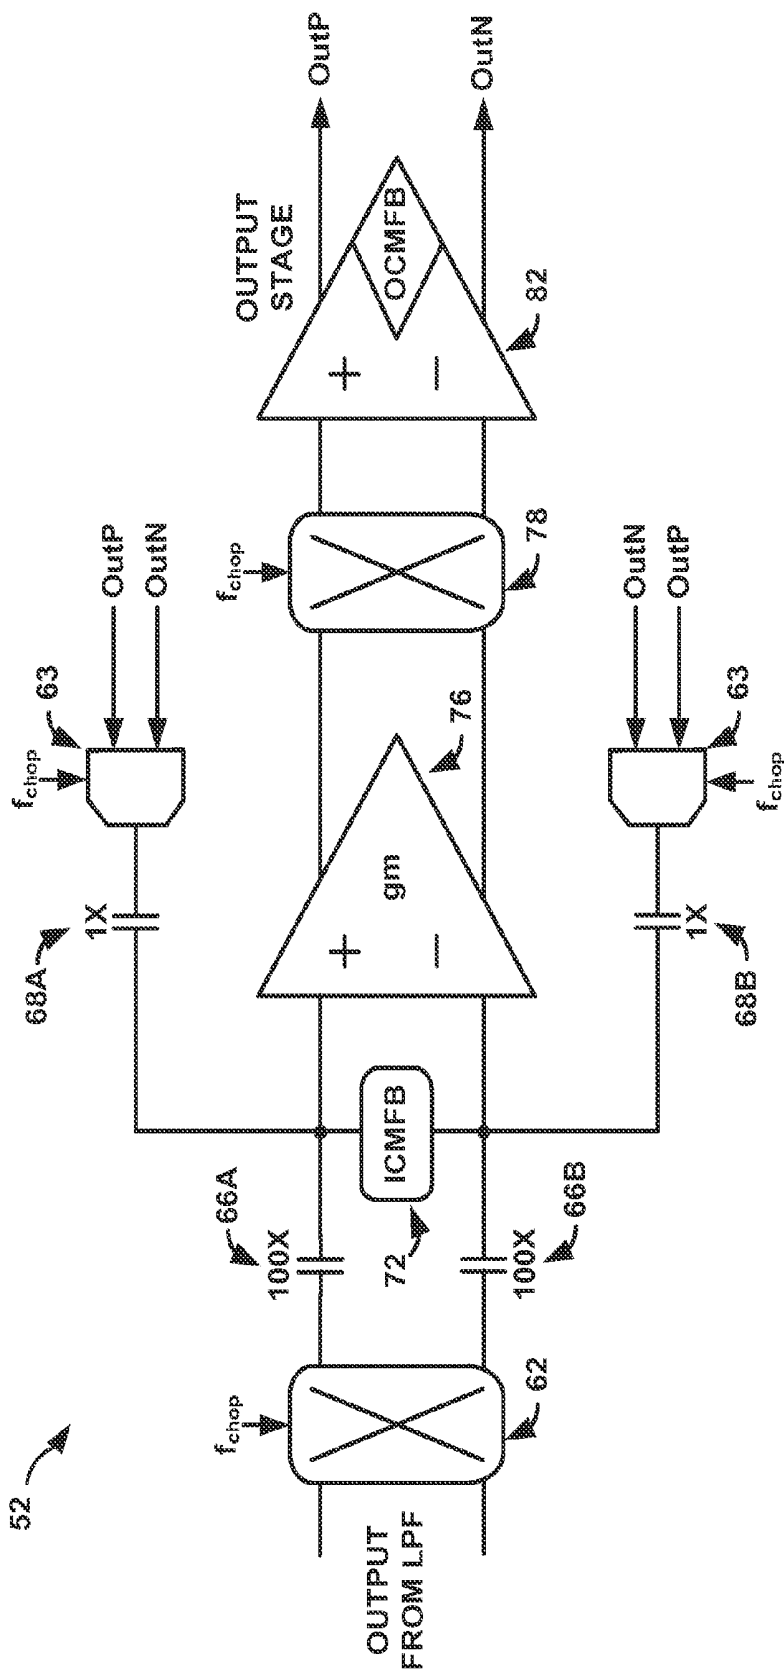


FIG. 2

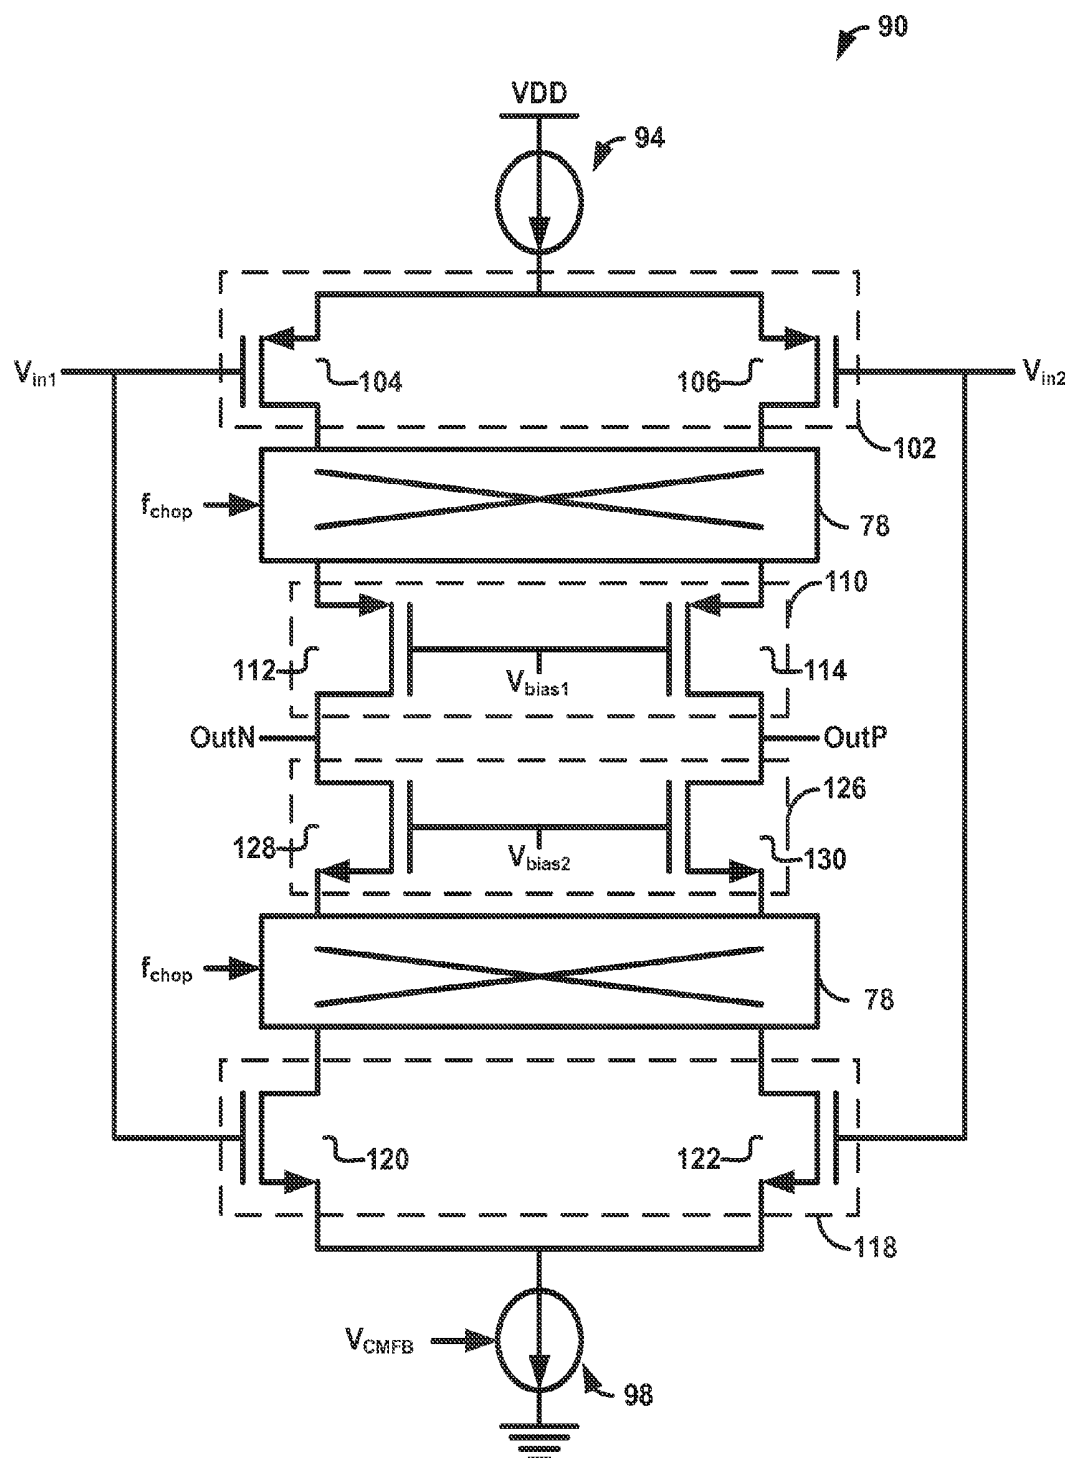


FIG. 3

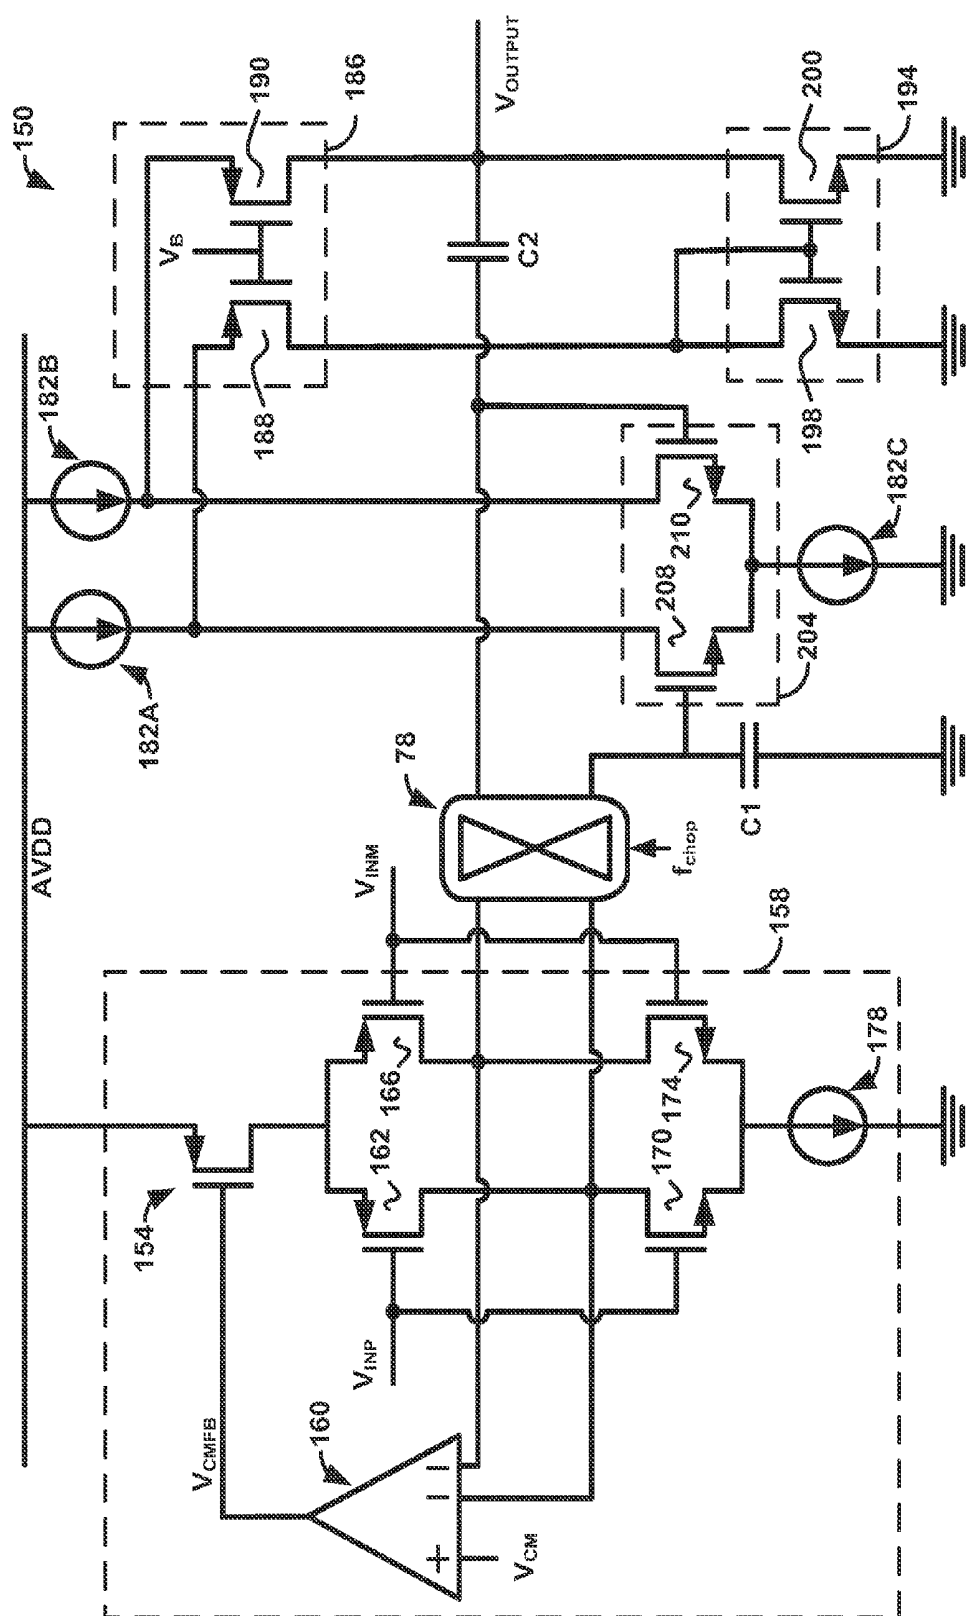


FIG. 4

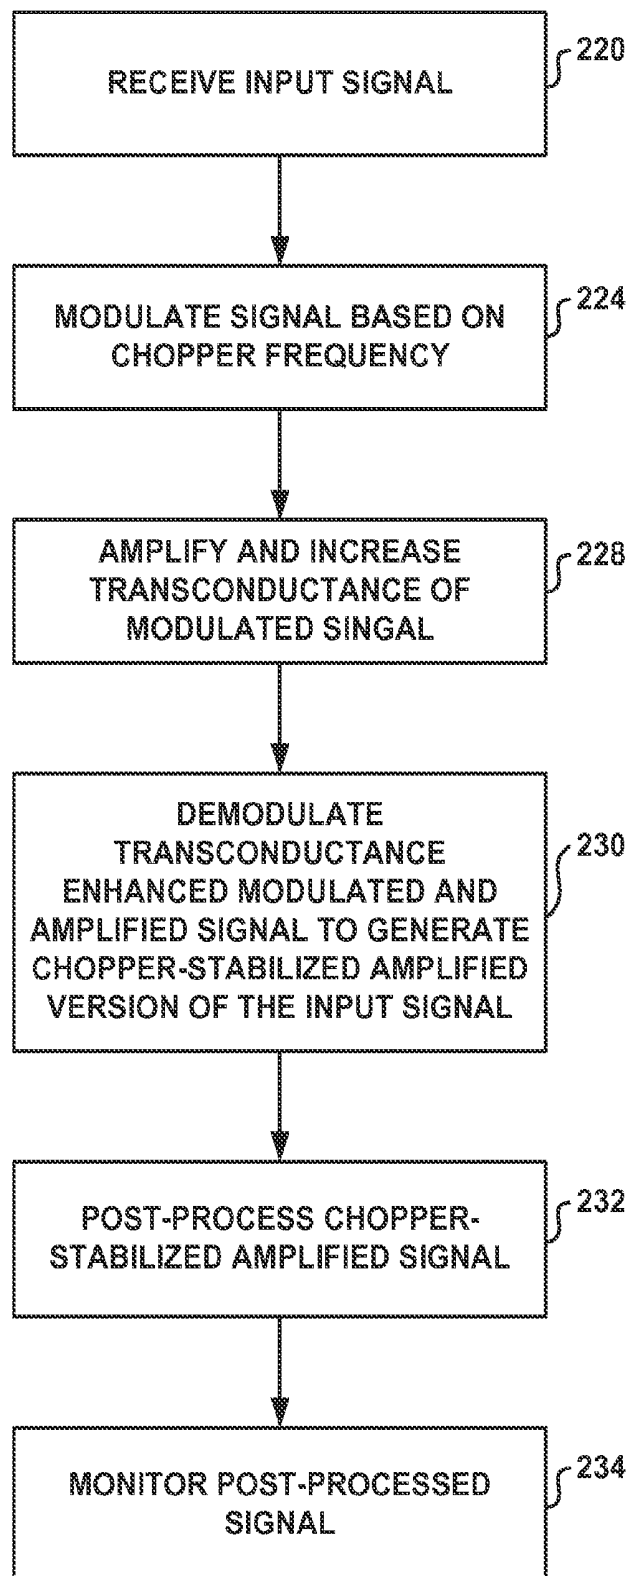


FIG. 5

POWER-EFFICIENT CHOPPER AMPLIFIER

TECHNICAL FIELD

[0001] This disclosure relates to medical devices and, more particularly, to the monitoring of physiological signals with a medical device.

BACKGROUND

[0002] Medical devices may be used to deliver therapy to patients to treat a variety of symptoms or conditions. Examples of therapy include electrical stimulation therapy and drug delivery therapy. Examples of symptoms or conditions include chronic pain, tremor, akinesia, Parkinson's disease, epilepsy, dystonia, neuralgia, obsessive compulsive disorder (OCD), depression, sleep dysfunction, urinary or fecal incontinence, sexual dysfunction, obesity, or gastroparesis. Information relating to symptoms or conditions may be sensed by monitoring physiological signals, such as, e.g., electrocardiogram (ECG) signals, electromyogram (EMG) signals, electroencephalogram (EEG) signals, electrocorticogram (ECoG) signals, pressure signals, temperature signals, impedance signals, motion signals, and other types of signals.

[0003] In some cases, the physiological signals associated with a patient may be relatively low voltage signals that have information encoded at relatively low frequencies in the signal, such as, e.g., brain signals. Amplifying low frequency signals may present significant challenges in medical devices, particularly in the case of implantable medical devices where power resources may be limited.

SUMMARY

[0004] This disclosure describes techniques and circuitry for amplifying low frequency signals. A chopper amplifier may be used to amplify a signal with low frequency components to produce a resulting amplified signal with relatively low offset noise and relatively low 1/f noise (i.e., flicker noise or pink noise). In addition, random and/or thermal noise may be influenced by a transconductance of an amplifier. According to aspects of this disclosure, amplifier circuitry may include an amplification and transconductance unit configured to amplify a low frequency signal while also increasing transconductance and reducing power consumption. In some examples, the amplification and transconductance unit may include complementary transistors for amplifying and increasing a transconductance of a chopper modulated signal. In addition, in some examples, for differential applications, the amplification and transconductance unit may have complementary pairs of transistors for amplifying and increasing the transconductance of the modulated signal.

[0005] In one example, an electrical circuit device for amplifying a physiological signal includes a modulation unit configured to receive an input signal, to modulate the input signal to produce a modulated signal, an amplification and transconductance unit configured to amplify an amplitude of the modulated signal and increase a transconductance of the modulated signal to produce a transconductance enhanced modulated and amplified signal, wherein the amplification and transconductance unit comprises at least a first complementary pair of transistors and a second complementary pair of transistors configured to receive the modulated signal and to amplify and increase the transconductance of the modulated signal, and a demodulation unit configured to receive the transconductance enhanced modulated and amplified signal

and to demodulate the transconductance enhanced modulated and amplified signal to generate a chopper-stabilized amplified version of the input signal.

[0006] In another example, a method for amplifying a physiological signal includes modulating an input signal to produce a modulated signal, amplifying an amplitude and increasing a transconductance of the modulated signal, by a first complementary pair of transistors and a second complementary pair of transistors configured to receive the modulated signal, to produce a transconductance enhanced modulated and amplified signal, and demodulating the transconductance enhanced modulated and amplified signal to generate a chopper-stabilized amplified version of the input signal.

[0007] In another example, an apparatus for amplifying a physiological signal includes means for modulating an input signal to produce a modulated signal, means for receiving the modulated signal and amplifying an amplitude and an increasing a transconductance of the modulated signal to produce a transconductance enhanced modulated and amplified signal, wherein the means for receiving and amplifying comprises at least a first complementary pair of transistors and a second complementary pair of transistors configured to receive the modulated signal and to amplify and increase the transconductance of the modulated signal, and means for demodulating the transconductance enhanced modulated and amplified signal to generate a chopper-stabilized amplified version of the input signal.

[0008] The details of one or more examples of the disclosure are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the disclosure will be apparent from the description and drawings, and from the claims.

BRIEF DESCRIPTION OF DRAWINGS

[0009] FIG. 1 is block diagram illustrating an example medical device in which the amplification techniques of this disclosure may be implemented.

[0010] FIG. 2 is a circuit diagram illustrating example sensing and analysis circuitry that may be used to perform the amplification techniques of this disclosure.

[0011] FIG. 3 is a circuit diagram illustrating example sensing and analysis circuitry that may be used to perform the amplification techniques of this disclosure.

[0012] FIG. 4 is a circuit diagram illustrating example sensing and analysis circuitry that may be used to perform the amplification techniques of this disclosure.

[0013] FIG. 5 is a flow diagram illustrating an example technique for amplification according to this disclosure.

[0014] Like reference characters denote like elements throughout the figures and text.

DETAILED DESCRIPTION

[0015] This disclosure describes techniques and circuitry for amplifying low frequency signals. A chopper amplifier may be used to amplify a signal with low frequency components to produce a resulting amplified signal with relatively low offset noise and relatively low 1/f noise (i.e., flicker noise or pink noise). In addition, random and/or thermal noise may be influenced by a transconductance of an amplifier. According to aspects of this disclosure, amplifier circuitry may include an amplification and transconductance unit to amplify a low frequency signal while also increasing

transconductance and reducing power consumption. In some examples, the amplification and transconductance unit may include complementary transistors for amplifying and increasing a transconductance of a chopper modulated signal. In addition, in some examples, for differential applications, the amplification and transconductance unit may have complimentary pairs of transistors for amplifying and increasing the transconductance of the modulated signal.

[0016] Sensing circuitry designed in accordance with the techniques of this disclosure may be used for sensing, monitoring, and analyzing a variety of signals including, e.g., electrocardiogram (ECG) signals, electromyogram (EMG) signals, electroencephalogram (EEG) signals, electrocorticogram (ECoG) signals, pressure signals, temperature signals, impedance signals, motion signals, and other types of signals. In addition, sensing circuitry designed in accordance with the techniques of this disclosure may be incorporated into a variety of implantable and non-implantable medical devices including, e.g., a pacemaker, defibrillator, or a neurostimulator, such as a neurostimulator configured to provide spinal cord stimulation, gastric stimulation, pelvic floor stimulation, peripheral nerve stimulation, or deep brain stimulation.

[0017] In some examples, the techniques of this disclosure may be used to sense, monitor, and analyze brain signals, such as, e.g., EEG signals, ECoG signals, and local field potentials (LFP's). Brain signals may include neurological biomarkers that are encoded as power fluctuations in particular frequency bands of the brain signal. For example, visual processing and motor planning may be correlated with power fluctuations in the alpha band (e.g., 5 to 15 Hz), and the symptoms of Parkinson's disease may be correlated with power fluctuations in the beta band (e.g., 15 to 35 Hz). Other target frequency bands of interest for brain signals may include the delta band (e.g., 1 Hz or lower), the theta band (e.g., 4 to 8 Hz), and the gamma band (e.g., 30-100 Hz).

[0018] A digital processor may be used to analyze power fluctuations of the brain signal in a specific frequency band. The power fluctuations in the brain signal may occur at relatively low frequencies and at a relatively low baseline power. The relatively low baseline power of the brain signal may make the signal difficult to analyze in a digital processor without amplification prior to digitization. The relatively low frequencies of interest in the brain signal may make the signal difficult to amplify without introducing noise (e.g., offset noise and 1/f noise) into the target frequency bands of interest, particularly in low power applications where the available power for the amplifier may be limited.

[0019] In addition, medical devices may be characterized by finite power resources that are required to last several months or years. To promote device longevity, sensing and therapy circuits are generally designed to consume relatively small levels of power. As an example, operation of a sensor circuit may require a supply current of less than 2.0 microamps or less than 1.0 microamps. In some examples, such a sensor circuit may consume supply current in a range of approximately 100 nanoamps to 1.0 microamps. Such a sensing circuit may generally be referred to as a micropower sensing circuit. Although medical devices are described for purposes of illustration, a micropower sensing circuit may be used in a variety of medical and non-medical test and measurement applications. In each case, the micropower sensing circuit may be required to draw low power, yet provide precise and accurate measurement.

[0020] Accordingly, an amplifier of a medical device may be designed to amplify an electrical signal between two electrodes in contact with body tissue while sustaining an acceptable signal to noise ratio (SNR) and also limiting the amount of power that is consumed. There may be two common noise sources associated with such an amplifier, including 1/f noise (and offset noise, as noted above) and random/thermal noise.

[0021] In some instances, 1/f noise may be removed using a chopper amplifier or a correlated double sampling (CDS) circuit. A chopper amplifier may be more power efficient than a CDS amplifier for some applications. In general, a chopper amplifier may be used to amplify a signal with low frequency components to produce a resulting amplified signal with relatively low offset and relatively low 1/f noise (i.e., flicker noise or pink noise). For example, a chopper amplifier is an example of a low power amplifier that may be used to amplify a brain signal to produce a resulting amplified signal with relatively low noise at low frequencies in the signal. A chopper amplifier may up-modulate a signal to be amplified based on a chopper frequency, amplify the up-modulated signal, and down-modulate the amplified signal based on the same chopper frequency to produce a chopper-stabilized amplified version of the input signal.

[0022] Thermal and random noise may be a function of a transconductance of amplifier input pairs. For example, increasing transconductance may result in a reduction in thermal noise. Thus, to achieve an efficient transconductance amplifier, transconductance may be increased for a given current consumption.

[0023] According to aspects of this disclosure, an amplifier having an amplification and transconductance unit may be configured to provide an accurate output at low frequency with relatively low power consumption. According to aspects of this disclosure, the amplification and transconductance unit may include one or more sets of transistors. The sets of transistors may include complementary NMOS and PMOS transistors. For example, for a single-ended (non-differential amplifier) amplification and transconductance unit may include complimentary NMOS and PMOS transistors. In another example, for a differential amplifier, amplification and transconductance unit may include one or more pairs of complimentary NMOS and PMOS transistors. In some examples, the techniques may be used to amplify a current drain of a sensing channel of a medical device, such as an implantable or external medical device for monitoring neural signals. The techniques may, in some instances, reduce the power consumption of such an amplifier by approximately 50% relative to an amplifier implementing chopper techniques alone.

[0024] FIG. 1 is block diagram illustrating an example medical device 30 that may perform the amplification techniques of this disclosure. In the example of FIG. 1, medical device 30 includes a power source 32, such as a rechargeable or nonrechargeable battery, a processor 34, a telemetry module 36, memory 38, sensing elements 40, sensing and analysis circuitry 42, a therapy delivery module 44, and therapy delivery elements 46. It should be understood that the components of medical device 30 are provided merely for purposes of example, and that medical device 30 may include more or fewer components than are shown in FIG. 1.

[0025] Power source 32 may provide operating power to components of medical device 30, such as processor 34, telemetry module 36, memory 38, sensing and analysis circuitry 42, and therapy delivery module 44. Power source 32

may take the form of a small, rechargeable or non-rechargeable battery, or an inductive power interface that receives inductively coupled energy. In the case of a rechargeable battery, power source **32** similarly may include an inductive power interface for transfer of recharge power.

[0026] Processor **34** may include one or more microprocessors, microcontrollers, digital signal processors (DSPs), application specific integrated circuits (ASICs), field programmable gate array (FPGAs), discrete logic circuitry, or a combination of such components. In general, processor **34** may control the functions of components of medical device **30**, such as the functions of telemetry module **36** and/or therapy delivery module **44** based on data retrieved from memory **38** and/or signals received from sensing and analysis circuitry **42**.

[0027] For example, processor **34** may control a telemetry module **36** to exchange information with an external programmer, such as a clinician programmer and/or patient programmer, by wireless, radio frequency (RF) telemetry. Processor **34** may control telemetry module **36** to communicate with the external programmer on a continuous basis, at periodic intervals, or upon request from the programmer. The programmer may, in turn, be connected to a computer that can program the device for algorithm and sensing adjustments, for issuing commands, for uplinking recorded loop data and for providing analysis. Alternatively or additionally, programmer may communicate directly with device **30** to, for example, perform one or more of the aforementioned functions. In addition, in some embodiments, telemetry module **36** may support wireless communication with one or more wireless sensors or sensing elements that sense physiological signals and transmit the signals to sensing and analysis circuitry **42** by wireless transmission.

[0028] Processor **34** may also communicate with memory **38**. For example, memory **38** may store therapy instructions that are available to be selected by processor **34** in response to receiving a patient therapy trigger from sensing and analysis circuitry **42** and/or upon receiving a communication from programmer or another device. In addition, processor **34** may be configured to record diagnostic information, such as sensed signals, signal characteristics, or the like in memory **38** or another memory or storage device. Memory **38** may include any combination of volatile, non-volatile, removable, or solid state media, such as read-only memory (ROM), random access memory (RAM), electronically-erasable programmable ROM (EEPROM), flash memory, or the like.

[0029] Processor **34** may receive information via sensing elements **40** and sensing and analysis circuitry **42**. In some examples, medical device **30** may comprise an implantable medical device capable of being implanted within the patient. In this case, sensing elements **40** may be positioned at a desired location within the patient to detect the physiological signal. In other examples, medical device **30** may comprise an external medical device with sensing elements **40** positioned at a desired location adjacent the patient to detect the physiological signal.

[0030] In general, sensing elements **40** provide a measurement of a physiological signal associated with the patient by translating the signal to an output voltage or current. Sensing elements **40** may include a variety of sensing elements, such as one or more pressure sensing elements, an accelerometer, an activity monitor, an impedance monitor, an electrical signal monitor or other monitor configured to monitor heart sounds, brain signals, and/or other physiological signals.

Sensing elements **40** may include a set of electrodes for sensing electrical signals. The electrodes may be, for example, implantable electrodes deployed on a lead or external surface electrodes. Sensing elements **40** may be deployed at selected tissue sites or on selected surfaces of a human patient, such as within the brain, proximate the spinal cord, on the scalp, or elsewhere. As an example, scalp electrodes may be used to measure or record EEG signals. As another example, electrodes implanted at the surface of the cortex may be used to measure or record ECoG signals.

[0031] Sensing elements **40** may include one or more leads. A lead may carry one electrode or multiple electrodes, such as ring electrodes, segmented electrodes or electrodes arranged in a planar or non-planar array, e.g., on a paddle lead. Such leads may carry sense electrodes or a combination of sense and stimulation electrodes. In some cases, different leads may be dedicated to sensing and stimulation functions. If external, medical device **30** may be coupled to one or more leads carrying sense and/or stimulation electrodes via a percutaneous extension. As a further illustration, sensing elements **40** may be surface electrodes suitable for placement on scalp, face, chest, or elsewhere on a patient, in which case such electrodes may be coupled to sensing and analysis circuitry **42** via conductors within external leads. Sensing elements **40** may further comprise combinations of electrodes provided on one or more implantable leads and on or within a housing of medical device **30**, or other electrode arrangements.

[0032] Sensing and analysis circuitry **42** may monitor the signals obtained from sensing elements **40**. Sensing and analysis circuitry **42** may include suitable electrical interconnections to sensing elements **40** and other components, as necessary. Sensing and analysis circuitry **42** may output a trigger signal to processor **34** to control therapy and/or record diagnostic information. In such examples, processor **34** may receive the trigger signal and initiate delivery of therapy, stop delivery of therapy or adjust one or more therapy parameters specified in memory **38**.

[0033] In some examples, sensing and analysis circuitry **42** may monitor and/or analyze physiological signals associated with a patient in selected frequency bands. The physiological signals may be relatively low frequency signals, and may have frequency bands of interest in a range of approximately 1 to 1000 Hertz (Hz) or, more particularly, in a range of approximately 1 to 500 Hz. For example, 1 Hz oscillations may be relevant for sleep state analysis, while fast ripples in a range of approximately 200 to 500 Hz or higher may be relevant for analysis of epilepsy. In general, frequencies in the selected frequency band are less than or equal to approximately 1000 Hz, more particularly less than or equal to approximately 500 Hz, and still more particularly less than or equal to approximately 100 Hz. For EEG signals, as an example, selected frequency bands may fall in the ranges of approximately 5 to 15 Hz (alpha band), 15 to 35 Hz (beta band), and 30 to 80 Hz (gamma band).

[0034] Characteristics of the signal in selected frequency bands may be useful in controlling therapy, such as electrical stimulation or drug delivery, either by initiation of delivery of therapy or adjustment of therapy parameters. Adjustment of therapy parameters may include adjustment of pulse amplitude, pulse rate, pulse width, electrode combination or the like for electrical stimulation, or adjustment of dosage, rate, frequency, lockout interval, or the like for drug delivery.

[0035] In some examples, sensing and analysis circuitry **42** may generate a signal indicative of a power of a target fre-

quency band of a physiological signal and/or a signal indicative of power fluctuation of a target frequency band of a physiological signal. In such examples, processor 34 may trigger, stop, or adjust a delivery of therapy and/or trigger the recording of diagnostic information based on the signal indicative of the power of the target frequency band and/or the signal indicative of power fluctuation of the target frequency band. In some instances, sensing and analysis circuitry 42 may receive a measured physiological signal as an input signal, generate a chopper-stabilized amplified version of the input signal based on a chopper frequency, sample the chopper-stabilized amplified version of the physiological input signal at a sampling rate to generate a sampled signal, and analyze information contained in a target frequency band of the sampled signal.

[0036] According to aspects of this disclosure, as described in greater detail below, sensing and analysis circuitry 42 may include amplifier circuitry including an amplification and transconductance unit. The amplifier circuitry may be configured to provide an accurate output at low frequency with relatively low power consumption. A modulation unit of the amplifier circuitry may modulate a signal to be amplified from sensing elements 40 based on a chopper frequency. The amplification and transconductance unit may amplify the up-modulated signal and increase the transconductance of the up-modulated signal.

[0037] According to aspects of this disclosure, the increased transconductance (also referred to as enhanced transconductance) may be used to reduce random noise associated with sensing elements 40 and/or sensing and analysis circuitry 42. In some examples, the amplification and transconductance unit may include complementary pairs of transistors that are both driven by signals from the modulation unit, such as complementary pairs of NMOS and PMOS transistors. The transistor pairs may provide greater transconductance than a single NMOS pair or PMOS pair. The amplifier of sensing and analysis circuitry 42 may then down-modulate the amplified signal based on the same chopper frequency to produce a chopper-stabilized, amplified version of the input signal.

[0038] Processor 34 may output therapy instructions to therapy delivery module 44 to initiate, stop, or adjust delivery of therapy. Therapy delivery module 44 may be connected to therapy delivery elements 46, such as one or more electrodes deployed on a lead or drug delivery conduits, which may be positioned at a desired location relative to the patient to deliver therapy to the patient in response to the monitored physiological signal.

[0039] Again, medical device 30 may be an implantable device or an external device. Accordingly, therapy delivery elements 46 may be positioned at a desired location within the patient to deliver the therapy, such as electrical stimulation, drug delivery or internal audio or visual cueing. In other examples, therapy delivery elements 46 may be positioned at a desired location external to the patient to deliver the therapy, such as external audio, visual or tactile cueing via lights, displays, speakers, or the like.

[0040] In some cases, as described above, therapy delivery module 44 may include a stimulation generator or other stimulation circuitry that delivers electrical signals, e.g., pulses or substantially continuous signals, such as sinusoidal signals, to the patient via at least some of the electrodes that form therapy delivery elements 46, under the control of the therapy instructions received from processor 34. Processor 34

may control therapy delivery module 44 to deliver electrical stimulation with pulse voltage or current amplitudes, pulse widths and frequencies (i.e., pulse rates), and electrode combinations specified by the programs of the selected therapy instructions, e.g., as stored in memory 38. Processor 34 may also control therapy delivery module 44 to deliver each pulse, or a burst of pulses, according to a different program of the therapy instructions, such that multiple programs of stimulation are delivered in an interleaved or alternating basis. In some embodiments, processor 34 may control therapy delivery module 44 to deliver a substantially continuous stimulation waveform rather than pulsed stimulation.

[0041] In other cases, as described above, therapy delivery module 44 may include one or more fluid reservoirs and one or more pump units that pump fluid from the fluid reservoirs to the target site through the fluid delivery devices, such as one or more catheters, that form therapy delivery elements 46, under the control of the therapy instructions received from processor 34. For example, processor 34 may control which drugs are delivered and the dosage, rate and lockout interval of the drugs delivered. The fluid reservoirs may contain a drug or mixture of drugs. The fluid reservoirs may provide access for filling, e.g., by percutaneous injection of fluid via a self-sealing injection port. The fluid delivery devices may comprise, for example, fluid delivery conduits in the form of catheters that deliver, i.e., infuse or disperse, drugs from the fluid reservoirs to the same or different target sites.

[0042] In some cases, therapy delivery module 44 may include an audio signal generator, a visual signal generator, or a tactile stimulus (e.g., vibration) generator for cueing to disrupt akinesia or treat other conditions. Processor 34 may control therapy delivery module 44 to deliver audio, visual or tactile cueing with different parameters, such as amplitude, frequency, or the like, as specified by programs stored in memory 38.

[0043] As noted above, it should be understood that the components of medical device 30 are provided merely for purposes of example, and that medical device 30 may include more or fewer components shown in FIG. 1. In addition, it should be understood that certain components shown in medical device 30 of FIG. 1 may be highly integrated, but are illustrated separately for conceptual purposes. For example, in some instances, certain functions described with respect to sensing and analysis circuitry 42 may be carried out by processor 34, or vice versa.

[0044] FIG. 2 is a circuit diagram illustrating example amplifier circuitry 52 that may be used to perform the amplification techniques of this disclosure. In some examples, amplifier circuitry 52 may be incorporated in sensing and analysis circuitry 42 (FIG. 1). In the example shown in FIG. 2, amplifier circuitry 52 includes modulator 62 with feedback 63, first and second capacitors 66A and 66B, first and second feedback capacitors 68A and 68B, an input common mode feedback function block 72, an amplification and transconductance unit 76, a demodulator 78, and an output stage 82.

[0045] According to aspects of this disclosure, amplifier circuitry 52 may be configured to amplify an input signal received from one or more sensing elements, such as sensing elements 40 (FIG. 1). In some examples, the input signal may be a physiological signal received from one or more sensing elements (e.g., electrodes) that are attached to, proximate to, and/or implanted within a human being. As described in greater detail below, amplifier circuitry 52 may receive the input signal, modulate an amplitude of the input signal based

on a chopper frequency to produce a modulated signal, and amplify an amplitude of the modulated signal to produce an amplified signal. Amplifier circuitry **52** may also increase a transconductance of the modulated signal to produce a transconductance enhanced modulated and amplified signal, and demodulate the transconductance enhanced modulated and amplified signal based on the chopper frequency to generate a chopper-stabilized amplified version of the input signal for output.

[0046] Modulator **62** may be configured to modulate an amplitude of an input signal based on a chopper frequency (i.e., f_{chop}) to produce a modulated signal. Modulating a signal based on a chopper frequency may refer to modulating the signal at the chopper frequency. In other words, modulator **62** may multiply a signal received by the respective modulator with the chopper frequency to produce an output signal (e.g., a modulated signal). Modulator **62** may also be referred to as a modulation unit and, while shown as a single component in the example of FIG. 2, may include a variety of components for modulating a signal. In some cases, modulator **62** may be constructed from one or more switches that are switched at the chopper frequency.

[0047] In some examples, modulator **62** and demodulator **78** may operate at the same chopper frequency. In other examples, modulator **62** and demodulator **78** may operate at different chopper frequencies. For example, in some instances, modulator **62** and demodulator **78** may operate using a selected frequency delta between the modulation frequency and demodulation frequencies. In an example for purposes of illustration, modulator **62** may operate at a particular chopper frequency f_{chop} and demodulator **78** may operate at a second, difference chopper frequency $f_{chop+\delta}$. In this example, amplifier circuitry **52** may produce an amplified, chopper-stabilized signal in a particular band of interest that may be defined based on the delta. Hence, amplifier circuitry **52** may comprise a frequency selective amplifier that may not require a bandpass filter at an output stage, such as output stage **82**. Additional information regarding example chopper amplifiers may be disclosed, for example, in U.S. application Ser. No. 11/700,404, filed Jan. 31, 2007 and U.S. application Ser. No. 12/237,868, filed Sep. 25, 2008, the entire contents of which are incorporated by reference herein.

[0048] In some examples, modulator **62** may use a chopper frequency that is higher than a $1/f$ noise cutoff frequency (e.g., a $1/f$ noise corner). Selecting a chopper frequency that is higher than the $1/f$ noise corner may be effective for reducing $1/f$ noise and the DC offset of the signal. However, a higher chopper frequency typically results in lower input impedance, which may attenuate the signal being monitored/analyzed (OutP and OutN). In addition, a higher chopper frequency may make the amplifier more susceptible to common mode interference. A chopper frequency for physiological signals may be from approximately 2 kHz to 10 kHz. According to aspects of this disclosure, in some examples, modulator **62** may use a relatively high chopper frequency to minimize $1/f$ noise and DC offset. A transconductance portion, as described herein, may be used to offset the resulting lower input impedance and/or signal attenuation associated with the relatively high chopper frequency.

[0049] First and second capacitors **66A** and **66B** and first and second feedback capacitors **68A** and **68B** set a gain for amplification and transconductance unit **76**. The example of FIG. 2 is shown as a differential amplifier. Feedback blocks **63** receive the chopper frequency (i.e., f_{chop}) and provide a

feedback signal to first and second feedback capacitors **68A** and **68B**. A difference between the output signals of modulator **62** may be amplified using first and second capacitors **66A** and **66B** and first and second feedback capacitors **68A** and **68B** to set the gain for amplification and transconductance unit **76**. A gain may be determined based on a ratio of first and second capacitors **66A** and **66B** and first and second feedback capacitors **68A** and **68B**. In the example, of FIG. 2, the capacitance values of capacitors **66A**, **66B**, **68A** and **66B** may be selected such that the gain of amplification and transconductance unit **76** is approximately 100 times the input signal ($100\times/1\times$). However, in other examples, first and second capacitors **66A** and **66B** and/or first and second feedback capacitors **68A** and **68B** may be selected to provide a different gain than that shown. Moreover, in other examples, components other than first and second capacitors **66A** and **66B** and/or first and second feedback capacitors **68A** and **68B** may be selected to control an amplification gain of amplifier circuitry **52**.

[0050] Input common mode feedback function block **72** may represent circuitry configured to sense a common-mode voltage and compare the common mode voltage with a reference voltage. Input common mode feedback function block **72** may be responsible for feeding back a correcting common-mode signal to both nodes of amplification and transconductance unit **76**.

[0051] Amplification and transconductance unit **76** may include circuitry for amplifying and increasing the transconductance of a received modulated signal. The increased transconductance may be used to reduce random and/or thermal noise associated with sensing elements, in instances in which amplifier circuitry is used to amplify physiological signals. According to aspects of this disclosure, and as described in greater detail with respect to FIGS. 3 and 4 below, amplification and transconductance unit **76** may include complementary pairs of transistors for amplifying and increasing the transconductance of the modulated signal. For example, according to aspects of this disclosure, modulator **62** may drive both complementary pairs of transistors of amplification and transconductance unit **76**. In some instances, amplification and transconductance unit **76** may include at least two pairs of NMOS and PMOS transistors, which may provide a relatively greater increase in transconductance versus a single transistor pair. In some examples, NMOS and PMOS transistors are selected to have a sub-threshold region that maximizes the ratio of transconductance to bias current.

[0052] In some examples, demodulator **78** may be configured in a similar manner as modulator **62**. Demodulator **78** may also be referred to as a demodulation unit and, while shown as a single component in the example of FIG. 2, may include a variety of components for demodulating a signal. For example, demodulator **78** may multiply a signal received by demodulator **78** with the chopper frequency to produce an output signal (e.g., a modulated signal). In some cases, demodulator **78** may be constructed from one or more switches that are switched at the chopper frequency. As noted above, in some examples, demodulator **78** may operate at the same frequency as modulator **62**. In other examples, demodulator **78** may operate at a different frequency as modulator **62**, e.g., to generate an output in a particular band of interest.

[0053] Output stage **82** may include a variety of components for filtering and/or conditioning an output from demodulator **78**. For example, output stage **82** includes an

output common mode function block (“OCMFB”) that may sense a common-mode voltage of the output signal and correct the common-mode signal, e.g., by cancelling out the common mode portions of the signal. In some examples, output stage **82** may include a low-pass filter (LPF) (not shown in FIG. 2) for low-pass filtering the demodulated signal from demodulator **78**. In some examples, the LPF may be an integrator or another type of low-pass filter that includes a pass band and a stop band. In some examples, output stage **82** may provide additional signal amplification. In some examples, amplifier circuitry **52** may be closed loop, such that the output from the LPF may be provided to modulator **62** (“output from LPF”). In addition, as described in greater detail with respect to FIG. 3, in some instances, output stage **82** may include one or more cascode devices to increase an output impedance of an output signal.

[0054] In operation, modulator **62** receives an input signal. As noted above, the input signal may be a physiological signal and may be a relatively low frequency signal. In some examples, the input signal may be associated with a current drain of a transistor used in a sensing channel, such as a sensing channel associated with one or more of sensing elements **40**. Modulator **62** may modulate the input signal based on a chopper frequency to produce a modulated signal.

[0055] First and second capacitors **66A** and **66B** and first and second feedback capacitors **68A** and **68B** may receive the modulated signal and may set the amplification gain for amplification and transconductance unit **76**. Input common mode feedback function block (ICMFB) **72** may sense a common-mode voltage of the amplified signal and correct the common-mode signal, e.g., by cancelling out the common mode portions of the signal.

[0056] Amplification and transconductance unit **76** may receive the modulated signal from first and second capacitors **66A** and **66B** and first and second feedback capacitors **68A** and **68B** at respective first and second inputs of amplification and transconductance unit **76**, and may amplify and increase the transconductance of the modulated signal to produce a transconductance enhanced modulated and amplified signal. As noted above, amplification and transconductance unit **76** may, in some instances, include complementary pairs of transistors for increasing the transconductance of the amplified signal.

[0057] Demodulator **78** may receive the transconductance enhanced modulated and amplified signal from amplification and transconductance unit **76** and may demodulate the transconductance enhanced modulated and amplified signal. In some examples, demodulator **78** may demodulate the received signal based on the chopper frequency (i.e., f_{chop}) to generate a chopper-stabilized amplified version of the input signal. In other examples, demodulator **78** may demodulate the received signal at a different chopper frequency, e.g., using a particular chopper frequency delta, to generate a chopper-stabilized amplified version of the input signal.

[0058] Output stage **82** may receive the chopper-stabilized amplified version of the input signal from demodulator **78**, and may filter and/or condition the demodulated signal. For example, in some instances, output stage **82** may low pass filter the received signal to produce a filtered signal. The low pass filter may reduce or eliminate the chopper frequency (i.e., f_{chop}) aggressor in the output signal. In some examples, output stage **82** may also include a cascode portion to increase

the output impedance of output stage **82**. In some examples, output stage **82** may also provide additional signal amplification for the signal.

[0059] It should be understood that amplifier circuitry **52** is provided merely for purposes of example, and that the techniques of this disclosure for amplifying a signal may be carried out using more, fewer, or a different arrangement of components than those shown in FIG. 2, for example, as described below with respect to FIGS. 3 and 4.

[0060] FIG. 3 is a circuit diagram illustrating example amplifier circuitry **90** that may be used to perform the amplification techniques of this disclosure. In the example shown in FIG. 3, amplifier circuitry **90** includes PMOS and NMOS biasing voltage sources **94** and **98**, respectively, a P-channel amplification and transconductance portion **102** having first PMOS transistor **104** and second PMOS transistor **106**, a P-channel cascode portion **110** having first cascode PMOS transistor **112** and second cascode PMOS transistor **114**, an N-channel amplification and transconductance portion **118** having first NMOS transistor **120** and second NMOS transistor **122**, and an N-channel cascode portion **126** having first cascode NMOS transistor **128** and second cascode NMOS transistor **130**. The example of FIG. 3 is shown having a differential configuration, with respective transistors of each transistor pair receiving respective differential inputs Vin1 and Vin2 (e.g., PMOS transistor **104** and NMOS transistor **120** being driven by Vin1, and PMOS transistor **106** and NMOS transistor **122** being driven by Vin2).

[0061] In some examples, at least a portion of amplifier circuitry **90** may be incorporated in amplifier circuitry **52** shown in the example of FIG. 2. For example, FIG. 3 includes demodulator **78**. In addition, P-channel amplification and transconductance portion **102** and N-channel amplification and transconductance portion **118** may form at least a portion of amplification and transconductance unit **76** shown in FIG. 2. In addition, P-channel cascode portion **110** and N-channel cascode portion **126** may form at least a portion of output stage **82**. It should be understood, however, that the components shown in FIG. 3 provide merely one example of components that may be included in amplifier circuitry **52**, and that other examples may include more or fewer components than those shown in FIG. 3. For example, as described below with respect to the example of FIG. 4, amplification and transconductance unit **76** may include additional circuitry not shown in the example of FIG. 3.

[0062] In the example of FIG. 3, P-channel amplification and transconductance portion **102** includes a pair of PMOS transistors connected to differential input voltages Vin1 and Vin2 and demodulator **78**. For example, first PMOS transistor **104** may have a source connected to PMOS biasing voltage **94**, a gate connected to first input voltage Vin1 and a drain connected to demodulator **78**. In addition, second PMOS transistor **106** may have a source connected to PMOS biasing voltage **94**, a gate connected to second input voltage Vin2 and a drain connected to demodulator **78**.

[0063] P-channel cascode portion **110** includes another pair of PMOS transistors connected to demodulator **78** and that contribute to differential output signals OutN (N-channel output) and OutP (P-channel output). For example, first cascode PMOS transistor **112** may have a source connected to demodulator **78**, a gate connected to a first cascode biasing voltage V_{bias1} and a drain connected to output signal OutN. In addition, second cascode PMOS transistor **114** may have a

source connected to demodulator 78, a gate connected to first cascode biasing voltage V_{bias1} and a drain connected to output signal OutP.

[0064] The N-channel circuitry of FIG. 3 may be complementary to the P-channel circuitry. For example, N-channel amplification and transconductance portion 118 includes a pair of NMOS transistors connected to differential input voltages Vin1 and Vin2 and demodulator 78. That is, first NMOS transistor 120 may have a source connected to NMOS biasing voltage 98, which may be adjusted based on common-mode feedback signal V_{CMFB} , a gate connected to first input voltage Vin1 and a drain connected to demodulator 78 (FIG. 2). In addition, second NMOS transistor 122 may have a source connected to NMOS biasing voltage 98, a gate connected to second input voltage Vin2 and a drain connected to demodulator 78.

[0065] N-channel cascode portion 126 includes another pair of NMOS transistors connected to demodulator 78 and that contribute to differential output signals OutN (N-channel output) and OutP (P-channel output). For example, first cascode NMOS transistor 128 may have a source connected to demodulator 78, a gate connected to a second cascode biasing voltage V_{bias2} and a drain connected to output signal OutN. In addition, second cascode NMOS transistor 130 may have a source connected to demodulator 78, a gate connected to second cascode biasing voltage V_{bias2} and a drain connected to output signal OutP.

[0066] In operation, amplifier circuitry 90 receives differential input voltages Vin1 and Vin2. In some examples, the differential input voltages Vin1 and Vin2 may correspond to low frequency signals (e.g., physiological signals) that have been modulated to a chopper frequency (f_{chop}) (e.g., via modulator 62 as described with respect to the example of FIG. 2). P-channel amplification and transconductance portion 102 may operate as a pull up network to amplify and increase the transconductance of the input signals Vin1 and Vin2. In some examples, the signals provided by P-channel amplification and transconductance portion 102 (for demodulation by demodulator 78) may be current signals having amplitudes that are proportional to the product of the input signal and the transconductance of P-channel amplification and transconductance portion 102.

[0067] Likewise, N-channel amplification and transconductance portion 118 may operate as a complementary pull down network to amplify and increase the transconductance of the input signals Vin1 and Vin2. In some examples, the signals provided by NMOS amplification and transconductance portion 118 (for demodulation by demodulator 78) may be current signals having amplitudes that are proportional to the product of the input signal and the transconductance of NMOS amplification and transconductance portion 118. In this way, P-channel amplification and transconductance portion 102 and N-channel amplification and transconductance portion 118 may operate to convert the input signals Vin1 and Vin2 into currents having relatively high transconductance. Increasing the transconductance of the input signals may help to reduce thermal or other random noise of the amplifier. For example, amplifier input noise power is typically inversely proportional to the transconductance of amplifier transistors.

[0068] According to aspects of this disclosure, the input signals Vin1 and Vin2 drive both transistor pairs (e.g., included in P-channel amplification and transconductance portion 102 and N-channel amplification and transconductance portion 118) in a sub-threshold region, thereby achiev-

ing a doubled transconductance versus a single NMOS transistor pair or a single PMOS transistor pair. As noted above, input signals Vin1 and Vin2 may be modulated input voltages generated by a chopper modulator (e.g., such as modulator 62 shown in FIG. 2), such that the modulator drives both sets of transistors, i.e., the transistors of P-channel amplification and transconductance portion 102 and N-channel amplification and transconductance portion 118.

[0069] In general, P-channel cascode portion 110 and N-channel cascode portion 126 may receive respective demodulated signals from demodulator 78 and may operate to increase the output impedance for output signals OutN and OutP. Cascode transistors may also improve the output impedance and open-loop gain of the amplifier. P-channel cascode portion 110 and N-channel cascode portion 126 may be biased by first cascode biasing voltage V_{bias1} and second cascode biasing voltage V_{bias2} , respectively. Biasing voltage may ensure proper operation of the respective cascode portions. In some examples, first cascode biasing voltage V_{bias1} and second cascode biasing voltage V_{bias2} may provide constant biasing voltages.

[0070] In this way, the complementary pairs of transconductance transistors (e.g., a pair including first PMOS transistor 104/first NMOS transistor 120 and a pair including second PMOS transistor 106/second NMOS transistor 122) may achieve twice the transconductance relative to a single pair of transistors being driven by an input voltage. In addition, by driving both of the pairs of transconductance transistors using a signal at a chopper frequency (as noted above with respect to FIG. 2), amplifier circuitry 90 may achieve an output signal having relatively less noise with the same current versus the signal achieved driving either PMOS transistors or NMOS transistors alone. Accordingly, using such pairs of transistors in chopper amplifier circuitry may result in an approximately 50% reduction in current consumption versus a chopper amplifier having a single pair of transistors driven by a chopper modulated signal.

[0071] FIG. 4 is a circuit diagram illustrating example amplifier circuitry 150 that may be used to perform the amplification techniques of this disclosure. In the example shown in FIG. 4, amplifier circuitry 150 includes demodulator 78 and an amplification and transconductance unit 158 that includes common-mode feedback circuit 160, common-mode transistor 154, first PMOS transistor 162, second PMOS transistor 166, first NMOS transistor 170, second NMOS transistor 174, transconductance biasing voltage source 178.

[0072] Amplifier circuitry 150 also includes biasing voltage sources 182A, 182B, and 182C (collectively, biasing voltages 182), a first filtering capacitor C1, a second filtering capacitor C2, a P-channel cascode transistor pair 186 having a first cascode PMOS transistor 188 and a second cascode PMOS transistor 190, a second cascode transistor pair 194 having a first cascode NMOS transistor 198 and a second cascode NMOS transistor 200, and a third transistor pair 204 including NMOS transistor 208 and NMOS transistor 210.

[0073] At least a portion of amplifier circuitry 150 may be incorporated in amplifier circuitry 52 shown in the example of FIG. 2. For example, FIG. 4 includes demodulator 78. In addition, amplification and transconductance unit 158 may form at least a portion of amplification and transconductance unit 76 shown in FIG. 2. In addition, biasing voltages 182, first filtering capacitor C1, second filtering capacitor C2, P-channel cascode transistor pair 186, second cascode transistor pair 194, and third transistor pair 204 may form at least

a portion of output stage 82. It should be understood, however, that the components shown in FIG. 4 provide merely one example of components that may be included in amplifier circuitry 52, and that other examples may include more or fewer components than those shown in FIG. 4.

[0074] Common-mode feedback circuit 160 and common-mode transistor 154 define a common voltage for amplifier circuitry 150. Common-mode feedback circuit 160 has a common mode input V_{CM} and inputs for transconductance portion 158, and an output for common-mode compensated feedback voltage V_{CMFB} . The V_{CM} input may be tied to a selected voltage level, which is the voltage level selected to be the common mode voltage for the signal provided to demodulator 78. V_{CM} will be selected based on the swing of the signal that is provided to demodulator 78. The common-mode feedback voltage V_{CMFB} is provided to a gate of common-mode transistor 154. In the example of FIG. 4, common-mode transistor 154 is a PMOS transistor having a source connected to analog supply voltage line (AVDD) and a drain connected to first transconductance PMOS transistor 162 and second transconductance PMOS transistor 166.

[0075] In general, amplification and transconductance unit 158 receives input voltages V_{INP} and V_{INM} and provides output signals to demodulator 78. In some examples, V_{INP} and V_{INM} may provide input voltages that have been modulated at a chopper frequency, such that a modulator (such as modulator 62 shown in FIG. 2) drives transistors 162, 166, 170, and 174. Sources of first PMOS transistor 162 and a second PMOS transistor 166 are connected to a drain of common-mode transistor 154. In addition, gates of first PMOS transistor 162 and a second PMOS transistor 166 are connected to input voltage V_{INP} and input voltage V_{INM} , respectively. Drains of first PMOS transistor 162 and a second PMOS transistor 166 are connected to demodulator 78.

[0076] First NMOS transistor 170 and second NMOS transistor 174 have sources connected to transconductance biasing voltage 178. Gates of first NMOS transistor 170 and second NMOS transistor 174 are connected to input voltage V_{INP} and input voltage V_{INM} , respectively. Drains of first NMOS transistor 170 and second NMOS transistor 174 are connected to demodulator 78.

[0077] Biasing voltages 182A, 182B, and 182C (collectively, biasing voltages 182) may provide biasing voltages for the remaining transistors of amplifier circuitry 150. For example, biasing voltage 182A is connected to a source of first cascode PMOS transistor 188 and a drain of NMOS transistor 208. Biasing voltage 182B is connected to a source of second cascode PMOS transistor 190 and a drain of NMOS transistor 210. Biasing voltage 182C is connected to sources of NMOS transistor 208 and NMOS transistor 210.

[0078] In the example of FIG. 4, first filtering capacitor C1 is connected, at one node, to demodulator 78 and a gate of NMOS capacitor 208. An opposite node of capacitor C1 is coupled to ground. Second filtering capacitor C2 is connected to demodulator 78 and a gate of NMOS transistor 210, at one node, with an opposite node connected to drains of PMOS transistor 190, NMOS transistor 200, and V_{OUTPUT} .

[0079] A source of first cascode PMOS transistor 188 is connected to biasing voltage 182A, while a gate of first cascode PMOS transistor 188 is connected to another biasing voltage V_B and a drain of first cascode PMOS transistor 188 is connected to second cascode pair 194. A source of second cascode PMOS transistor 190 is connected to biasing voltage 182B, while a gate of second cascode PMOS transistor 190 is

connected to another biasing voltage V_B and a drain of second cascode PMOS transistor 190 is connected to second cascode NMOS transistor 200.

[0080] First cascode NMOS transistor 198 has a drain and gate connected to the drain of first cascode PMOS transistor 188 and a source connected to ground. Second cascode NMOS transistor 200 has a drain connected to the drain of second cascode PMOS transistor 190 and output V_{OUTPUT} , a gate connected to the drain of first cascode PMOS transistor 188, and a source connected to ground.

[0081] Third transistor pair 204 including NMOS transistor 208 and NMOS transistor 210 are also connected to demodulator 78. For example, NMOS transistor 208 has a source connected to biasing voltage 182C, a gate connected to demodulator 78 and first filtering capacitor C1, and a drain connected to biasing voltage 182A and the source of first cascode PMOS transistor 188. NMOS transistor 210 has a source connected to biasing voltage 182C, a gate connected to demodulator 78, and a drain connected to biasing voltage 182B and the source of second cascode PMOS transistor 190.

[0082] In operation, common-mode feedback circuit 160 and common-mode transistor 154 define a common voltage for amplifier circuitry 150. According to aspects of this disclosure, common-mode feedback circuit 160 accounts for common-mode signals introduced by the pairs of complementary transistors 162, 166, 170, and 174 of amplification and transconductance unit 158. As noted above, common-mode feedback circuit 160 generates common-mode feedback voltage V_{CMFB} , which is provided to the gate of common-mode transistor 154.

[0083] Amplification and transconductance unit 158 may amplify and increase the transconductance of a chopper modulated signal prior to demodulation by demodulator 78. For example, as noted above, transistors 162, 166, 170, and 174 may receive input voltages V_{INP} and V_{INM} and may amplify and increase the transconductance of such signals. In instances in which amplifier circuitry 150 is included in an external or implantable medical device, V_{INP} and V_{INM} may be modulated (e.g., at a chopper frequency f_{chop}) physiological signals (e.g., such as signals from an EEG, an ECoG, an LFP, or a single cell action sensor).

[0084] As noted above with respect to FIG. 3, amplification and transconductance unit 158 may achieve twice the transconductance relative to a single pair of transistors.

[0085] As described above with respect to FIGS. 2 and 3, demodulator 78 demodulates the signals received from amplification and transconductance unit 158. Again, demodulator 78 may operate at the same chopper frequency or a different chopper frequency as a modulator, such as modulator 62. As noted above, chopper stabilization techniques may be used to reduce imperfections such as 1/f noise and DC offset associated with amplifying typically weak (e.g., in some instances, passive) signals. After signals are modulated to a relatively higher frequency where there is less 1/f noise and the signals are amplified, demodulator 78 demodulates the signal back to base-band or near base-band (and modulates the noise to be removed).

[0086] First filtering capacitor C1 and second filtering capacitor C2 may serve as compensation capacitors to promote stability of the amplifier. The first filtering capacitor C1 and second filtering capacitor C2 may also provide filtering for signals from demodulator 78. For example, first filtering capacitor C1 and second filtering capacitor C2 filter the demodulated signal from demodulator 78 to clean up the

output signal and remove modulated noise and/or other artifacts. First filtering capacitor C1 and second filtering capacitor C2 may act as low pass filters to filter the demodulated signal from demodulator 78.

[0087] First cascode transistor pair 186 and second cascode pair 194 may increase the output impedance for output signal V_{OUTPUT} . Third transistor pair 204 including NMOS transistor 208 and NMOS transistor 210 may be used as input transistors for a second stage of the amplifier to provide additional signal gain. For example, third transistor pair 204 may provide a second stage for amplifier circuitry 150 to increase the signal gain at V_{OUTPUT} .

[0088] FIG. 5 is a flow diagram illustrating an example technique for controlling spectral aggressors according to this disclosure. While described with respect to amplifier circuitry 52 (FIG. 2), it should be understood that the techniques described with respect to FIG. 5 may be performed using a variety of other circuitry having more, fewer, or an alternative arrangement of components than that shown in FIG. 2, e.g., such as the examples shown in FIGS. 3 and 4, or a variety of other circuit devices having alternative components.

[0089] Amplifier circuitry 52 receives an input signal (220). As noted above, in some examples, the signal may be one or more physiological signals (e.g., such as signals from an EEG, an ECoG, an LFP, or a single cell action sensor). In some examples, the signals may be passive signals received, e.g., from sensing elements 40 (FIG. 1). Modulator 62 of amplifier circuitry 52 may modulate the input signal based on a chopper frequency (i.e., f_{chop}) (224).

[0090] According to aspects of this disclosure, amplification and transconductance unit portion 76 may amplify and increase the transconductance of, the modulated signal (228). In some examples, the increased transconductance may be achieved via complementary pairs of transistors. In some examples, as described above with respect to FIG. 2, a number of capacitors may be used to set a gain for amplification of the modulated signal. However, the techniques of this disclosure are not limited in this way, and a variety of other components may also be incorporated in amplifier circuitry performing the techniques of this disclosure.

[0091] Demodulator 78 of amplifier circuitry 52 may receive the transconductance enhanced modulated and amplified signal and may demodulate the transconductance enhanced modulated and amplified signal based on the chopper frequency (i.e., f_{chop}) to generate a chopper-stabilized amplified version of the input signal (230). For example, demodulator 78 may modulate amplifier offset and low frequency noise (1/f noise) to remove the amplifier offset and noise from the signal band to the first order. Demodulator 78 may also return the transconductance enhanced modulated and amplified signal back to base-band.

[0092] In some examples, amplifier circuitry 52 may also perform post-processing of the chopper-stabilized signal (232). For example, as described with respect to FIG. 2 above, output stage 82 may include a low pass filter for removing the amplifier offset and noise from the demodulated signal. According to some aspects of this disclosure, as described with respect to FIGS. 3 and 4 above, a cascode stage may be included to increase the output impedance of the chopper-stabilized signal. In still other examples, as described with respect to FIG. 4 above, one or more additional amplification stages may be included to further amplify the chopper-stabilized signal. Other post-processing not specifically described herein may also be performed.

[0093] The post-processed signal may then be monitored (234). In some examples, amplifier circuitry 52 may include a filter for filtering a particular band of interest. Additionally or alternatively, modulator 62 and demodulator 78 may operate using a delta between chopper frequencies, which may generate an output in a particular band of interest. In any case, as noted above, the techniques described herein may be used for sensing, monitoring, and analyzing a variety of signals including, e.g., electrocardiogram (ECG) signals, electromyogram (EMG) signals, electroencephalogram (EEG) signals, electrocorticogram (ECoG) signals, pressure signals, temperature signals, impedance signals, motion signals, and other types of signals.

[0094] Various techniques described in this disclosure may be implemented in hardware, software, firmware or any combination thereof. For example, various aspects of the techniques may be implemented within or in conjunction with one or more microprocessors, digital signal processors (DSPs), application specific integrated circuits (ASICs), field programmable logic arrays (FPGAs), or any other equivalent integrated or discrete logic circuitry, as well as any combinations of such components. The term “processor” or “processing circuitry” may generally refer to any of the foregoing logic circuitry, alone or in combination with other logic circuitry, or any other equivalent circuitry.

[0095] When implemented in software, the functionality ascribed to the systems and devices described in this disclosure may be embodied as instructions on a computer-readable medium such as random access memory (RAM), read-only memory (ROM), non-volatile random access memory (NVRAM), electrically erasable programmable read-only memory (EEPROM), FLASH memory, magnetic media, optical media, or the like. The instructions may be executed to cause a processor to perform or support one or more aspects of the functionality described in this disclosure.

[0096] Various aspects and examples have been described. However, modifications can be made to the structure or techniques of this disclosure without departing from the scope of the following claims.

What is claimed is:

1. An electrical circuit device for amplifying a physiological signal, the device comprising:

a modulation unit configured to receive an input signal, to modulate the input signal to produce a modulated signal; an amplification and transconductance unit configured to amplify an amplitude of the modulated signal and increase a transconductance of the modulated signal to produce a transconductance enhanced modulated and amplified signal, wherein the amplification and transconductance unit comprises at least a first complementary pair of transistors and a second complementary pair of transistors configured to receive the modulated signal and to amplify and increase the transconductance of the modulated signal; and

a demodulation unit configured to receive the transconductance enhanced modulated and amplified signal and to demodulate the transconductance enhanced modulated and amplified signal to generate a chopper-stabilized amplified version of the input signal.

2. The electrical circuit device of claim 1, wherein the first complementary pair of transistors includes a first PMOS transistor and a first NMOS transistor and wherein the second pair of transistors includes a second PMOS transistor and a second NMOS transistor.

3. The electrical circuit device of claim 2, wherein the first PMOS transistor and the first NMOS transistor receive a first differential voltage signal from the modulation unit and wherein the second PMOS transistor and the second NMOS transistor receive a second differential voltage signal from the modulation unit.

4. The electrical circuit device of claim 3, wherein a gate of the first PMOS transistor is connected to the modulation unit to receive the first differential voltage signal, and a drain of the first PMOS transistor is connected to the demodulation unit,

wherein a gate of the second PMOS transistor is connected to the modulation unit to receive the second differential voltage signal, and a drain of the second PMOS transistor is connected to the demodulation unit,

wherein a gate of the first NMOS transistor is connected to the modulation unit to receive the first differential voltage signal, and a drain of the first NMOS transistor is connected to the demodulation unit, and

wherein a gate of the second NMOS transistor is connected to the modulation unit to receive the second differential voltage signal, and a drain of the second NMOS transistor is connected to the demodulation unit.

5. The electrical circuit device of claim 1, further comprising a cascode portion configured to receive the chopper-stabilized amplified version of the input signal and to increase an impedance of the chopper-stabilized amplified version of the input signal.

6. The electrical circuit device of claim 5, wherein the amplification and transconductance unit includes a PMOS circuit portion and an NMOS circuit portion, and wherein the cascode portion comprises a PMOS cascode portion and a NMOS cascode portion, wherein the PMOS cascode portion is connected to the PMOS circuit portion and the NMOS cascode portion is connected to the NMOS circuit portion.

7. The electrical circuit device of claim 1, further comprising a low pass filter unit configured to low pass filter the chopper-stabilized amplified version of the input signal.

8. The electrical circuit device of claim 1, wherein the low pass filter comprises one or more capacitors.

9. The electrical circuit device of claim 1, wherein the amplification and transconductance unit form at least a portion of a first amplifier stage, the electrical circuit device further comprising a second amplifier stage configured to receive the amplified signal from the chopper circuit portion and to increase a gain of the chopper-stabilized amplified version of the input signal.

10. The electrical circuit device of claim 1, wherein the modulation unit is configured to modulate the input signal based on a first chopper frequency, and wherein the demodulation unit is configured to demodulate the transconductance enhanced modulated and amplified signal based on a second chopper frequency, wherein the first chopper frequency is equal to the second chopper frequency.

11. The electrical circuit device of claim 1, wherein the modulation unit is configured to modulate the input signal based on a first chopper frequency, and wherein the demodulation unit is configured to demodulate the transconductance enhanced modulated and amplified signal based on a second chopper frequency, wherein the first chopper frequency is different than the second chopper frequency.

12. The electrical circuit device of claim 1, wherein the physiological signal is a brain signal comprising at least one of an electroencephalogram (EEG) signal, an electrocortico-

gram (ECoG) signal, a local field potential (LFP) signal, or a single cell action potential signal.

13. The electrical circuit device of claim 1, further comprising a processor configured to monitor the chopper-stabilized amplified version of the input signal.

14. The electrical circuit device of claim 13, wherein the device comprises an implantable medical device.

15. A method for amplifying a physiological signal, the method comprising:

modulating an input signal to produce a modulated signal; amplifying an amplitude and increasing a transconductance of the modulated signal with an amplification and transconductance unit comprising a first complementary pair of transistors and a second complementary pair of transistors configured to receive the modulated signal, to produce a transconductance enhanced modulated and amplified signal; and

demodulating the transconductance enhanced modulated and amplified signal to generate a chopper-stabilized amplified version of the input signal.

16. The method of claim 15, further comprising receiving the chopper-stabilized amplified version of the input signal and increasing an impedance of the chopper-stabilized amplified version of the input signal.

17. The method of claim 15, further comprising low pass filtering the chopper-stabilized amplified version of the input signal.

18. The method of claim 15, further comprising further amplifying the chopper-stabilized amplified version of the input signal.

19. The method of claim 15, wherein the physiological signal is a brain signal comprising at least one of an electroencephalogram (EEG) signal, an electrocorticogram (ECoG) signal, a local field potential (LFP) signal, or a single cell action potential signal.

20. The method of claim 15, further comprising monitoring the chopper-stabilized amplified version of the input signal.

21. The method of claim 15, wherein the modulating the input signal comprises modulating the input signal based on a first chopper frequency, and wherein demodulating the transconductance enhanced modulated and amplified signal comprises demodulating based on a second chopper frequency, wherein the first chopper frequency is equal to the second chopper frequency.

22. The method of claim 15, wherein the modulating the input signal comprises modulating the input signal based on a first chopper frequency, and wherein demodulating the transconductance enhanced modulated and amplified signal comprises demodulating based on a second chopper frequency, wherein the first chopper frequency is different than the second chopper frequency.

23. An apparatus for amplifying a physiological signal, the apparatus comprising:

means for modulating an input signal to produce a modulated signal;

means for receiving the modulated signal and amplifying an amplitude and an increasing a transconductance of the modulated signal to produce a transconductance enhanced modulated and amplified signal, wherein the means for receiving and amplifying comprises at least a first complementary pair of transistors and a second complementary pair of transistors configured to receive the modulated signal and to amplify and increase the transconductance of the modulated signal; and

means for demodulating the transconductance enhanced modulated and amplified signal to generate a chopper-stabilized amplified version of the input signal.

* * * * *

专利名称(译)	高功效斩波放大器		
公开(公告)号	US20160065133A1	公开(公告)日	2016-03-03
申请号	US14/474858	申请日	2014-09-02
[标]申请(专利权)人(译)	美敦力公司		
申请(专利权)人(译)	美敦力公司, INC.		
当前申请(专利权)人(译)	美敦力公司, INC.		
[标]发明人	CONG PENG TERRY MICHAEL B		
发明人	CONG, PENG TERRY, MICHAEL, B.		
IPC分类号	H03F1/02 A61B5/00 A61B5/01 A61B5/04 A61B5/0402 A61B5/0476 A61B5/0488 A61B5/11 H03F3/45		
CPC分类号	H03F1/0205 H03F3/45076 A61B5/0476 A61B5/0402 A61B5/0488 H03F2203/45116 A61B5/04012 A61B5/11 A61B5/6847 H03F2200/324 H03F2200/171 A61B5/01 A61B5/4836 A61B5/686 A61B5/6868 A61B5/7228 A61N1/36125 A61N1/36507 H03F1/303 H03F3/2178 H03F3/393 H03F3/45192 H03F3/45237 H03F3/45475 H03F3/4565 H03F2200/231 H03F2200/261 H03F2203/45138 H03F2203/45424		
其他公开文献	US9924904		
外部链接	Espacenet USPTO		

摘要(译)

在一个示例中，一种用于放大生理信号的电路装置包括：调制单元，被配置为接收输入信号，调制输入信号以产生调制信号。该装置还包括放大和跨导单元，被配置为放大调制信号的幅度并增加调制信号的跨导以产生跨导增强调制和放大信号，其中放大和跨导单元包括至少第一互补对晶体管和被配置为接收调制信号并放大和增加调制信号的跨导的第二互补晶体管对。该装置还包括解调单元，其被配置为接收跨导增强调制和放大信号并解调该信号。

