

(19)



(11)

EP 2 700 976 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

13.03.2019 Bulletin 2019/11

(51) Int Cl.:

G01S 7/52 (2006.01)

G10K 11/34 (2006.01)

A61B 8/00 (2006.01)

G01S 15/89 (2006.01)

A61B 5/00 (2006.01)

A61B 8/08 (2006.01)

(21) Application number: **13180189.6**

(22) Date of filing: **13.08.2013**

(54) **Ultrasound imaging apparatus and method for ultrasound imaging**

Ultraschallbildgebungsvorrichtung und Ultraschallbildgebungsverfahren

Appareil d'imagerie ultrasonore et procédé d'imagerie ultrasonore

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(74) Representative: **TBK**

Bavariaring 4-6

80336 München (DE)

(30) Priority: **23.08.2012 JP 2012183971**

(56) References cited:

WO-A1-2010/100868 WO-A1-2012/035723

(43) Date of publication of application:

26.02.2014 Bulletin 2014/09

- **ASL B METAL: "Minimum variance beamforming combined with adaptive coherence weighting applied to medical ultrasound imaging", IEEE TRANSACTIONS ON ULTRASONICS, FERROELECTRICS AND FREQUENCY CONTROL, IEEE, US, vol. 56, no. 9, September 2009 (2009-09), pages 1923-1931, XP011283399, ISSN: 0885-3010, DOI: 10.1109/TUFFC.2009.1268**

(73) Proprietor: **Canon Kabushiki Kaisha**

Tokyo 146-8501 (JP)

(72) Inventor: **Yoda, Haruo**

Tokyo, Tokyo 146-8501 (JP)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 700 976 B1

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to an object information acquiring apparatus, an information processing apparatus and an object information acquiring method.

Description of the Related Art

[0002] Ultrasound imaging devices for imaging of three-dimensional structures in the interior of an object, using ultrasound waves, are widely used as ultrasound diagnosis devices in the medical field.

[0003] The performance of ultrasound diagnosis devices improves rapidly year by year in the wake of advances in ultrasound imaging technology. Image reconstruction relying on adaptive signal processing is being researched as one technology aimed at further enhancing that performance. For instance, J. F. Synnevag, et al., "Adaptive Beamforming Applied to Medical Ultrasound Imaging", IEEE Trans. ULTRASONIC, FERROELECTRICS, AND FREQUENCY CONTROL, VOL. 54, NO. 8, AUGUST 2007, reports an ultrasound wave beamforming technology that relies on adaptive signal processing in the form of a DCMP (Directionally Constrained Minimization of Power) method.

[0004] The DCMP method is an adaptive signal processing technology developed as one technology in adaptive antennas. The DCMP method is a reception method that involves adaptively adjusting reception directionality on the basis of a constraint condition, namely rendering constant the reception gain of arriving waves in a desired direction, and minimizing the intensity of all reception signals including interfering waves. This method allows minimizing the ratio of interfering wave intensity with respect to signal intensity, and hence allows receiving signals having good SN ratio. As is likewise known, this method allows improving resolution and contrast in reconstructed images as compared with ordinary beamforming methods that are based on delay-and-sum. The DCMP method is also referred to as the CAPON method.

[0005] The specification of US Patent Application Publication No. 2003/0065262 (Patent Literature 2) and the specification of US Patent No. 6798380 (Patent Literature 3) disclose calculation methods in instances where the DCMP method is used in ultrasound imaging. Japanese Patent Application Laid-Open No. 2010-200926 (Patent Literature 1) discloses a beam signal synthesis method in which an output signal from beamforming based on the DCMP method and an output signal from delay-and-sum beamforming are compared, and the smaller signal is outputted.

Patent Literature 1: Japanese Patent Application Laid-Open No. 2010-200926

Patent Literature 2: Specification of US Patent Application Publication No. 2003/0065262

Patent Literature 3: Specification of US Patent No. 6798380

[0006] Non Patent Literature 1: J. F. Synnevag, et al., "Adaptive Beamforming Applied to Medical Ultrasound Imaging", IEEE Trans. ULTRASONIC, FERROELECTRICS, AND FREQUENCY CONTROL, VOL. 54, NO. 8, AUGUST 2007

[0007] *Further prior art can be found in document "ASL B M ET AL: 'Minimum variance beamforming combined with adaptive coherence weighting applied to medical ultrasound imaging', IEEE TRANSACTIONS ON ULTRASONICS, FERROELECTRICS AND FREQUENCY CONTROL, vol. 56, no. 9, September 2009, pages 1923 to 1931, XP011283399", disclosing an adaptive minimum variance based beamformer, which is adapted to medical ultrasound imaging, and that combines a minimum variance and coherence factor weighting.*

SUMMARY OF THE INVENTION

[0008] Ultrasound wave beamforming by the DCMP method is advantageous in that this method affords significantly enhanced resolution in reconstructed images. As is known, however, the DCMP method is problematic in that signal components from a focus point are cancelled when correlated interference waves, which are correlated with the signal component arriving from the focus point, are inputted as noise. In the case of ultrasound imaging, one transmission wave is reflected in various reflecting bodies, and composite signals thereof are received. In principle, therefore, noise waves from points other than the focus point are all correlated interference waves, which poses a particularly serious problem.

[0009] Numerous additional processing operations are ordinarily required in order to solve the above problem, for instance a spatial averaging processing of a correlation matrix, a temporal averaging processing of a correlation matrix, and/or summation of small positive numbers to the diagonal terms of a correlation matrix, in a case where the DCMP method is used in ultrasound images. These additional processing operations mitigate the problems of the DCMP method,

and are effective in enhancing the robustness of beamforming for reception signals that include various noise waves.

[0010] However, these additional processing operations detract somewhat from the characteristics of the DCMP method, and thus the characteristics of the DCMP method were in some instances inferior, depending on the above conditions, to those of an ordinary delay-and-sum beamforming method. Specifically, circumstances arose readily where the DCMP method was superior in terms of resolution, but the delay-and-sum method was superior in terms of contrast. That is, resolution is good but contrast is unsatisfactory the DCMP method, whereas contrast is good but resolution unsatisfactory in delay-and-sum beamforming.

[0011] Accordingly, some novel output signal generation means is required that combines the output signals of two or more beamforming methods having thus dissimilar advantages and shortcomings, and that emphasizes the advantages of the methods.

[0012] In the light of the above, the present invention is developed to provide a device that generates image data on the interior of an object by performing adaptive signal processing on ultrasound waves that are received from the object, and to enhance image quality.

[0013] The present invention in its first aspect provides an object information acquiring apparatus as specified in claims 1 to 11.

[0014] The present invention in its *second* aspect provides an object information acquiring method as specified in claim 12.

[0015] The present invention succeeds in providing a device that generates image data on the interior of an object by performing adaptive signal processing on ultrasound waves that are received from the object, and succeeds in enhancing image quality.

[0016] Further features of the present invention will become apparent from the following description of exemplary embodiments with reference to the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017]

Fig. 1 is a diagram illustrating the configuration of a conventional device that utilizes a DCMP method;
Figs. 2A to 2D are diagrams illustrating examples of line waveforms by a delay-and-sum method and a DCMP method;
Fig. 3 is a diagram illustrating the configuration of a device according to Example 1;
Figs. 4A to 4E are diagrams for explaining the results in Example 1 using an echo image of a one-point target;
Figs. 5A to 5E are diagrams for explaining the results in Example 1 using an echo image of a two-point target;
Fig. 6 is a diagram illustrating the configuration of a device according to Example 2 *which is an example useful for understanding the invention*;
Fig. 7 is a diagram illustrating the configuration of a device according to Example 3 *which is an example useful for understanding the invention*;
Fig. 8 is a diagram illustrating the configuration of a device according to Example 4; and
Fig. 9 is a diagram illustrating the configuration of a device according to Example 5.

DESCRIPTION OF THE EMBODIMENTS

[0018] Embodiments of the present invention are explained in detail below with reference to accompanying drawings. The specific computational expressions, calculation procedures and so forth described below are to be modified, as appropriate, in accordance with the configuration of the device in which the invention is to be used, and depending on various conditions. The scope of the invention is thus not limited to the features set forth below.

[0019] The object information acquiring apparatus of the present invention encompasses an ultrasound imaging method and apparatus that rely on an ultrasound wave echo technology that involves transmitting ultrasound waves to an object, receiving reflected waves (echo waves) that are reflected in, and that propagate through, the interior of the object, and acquiring object information in the form of image data. The invention encompasses also a photoacoustic imaging method and apparatus in which light (electromagnetic waves) is irradiated onto an object, and acoustic waves that are thereupon generated in and that propagate through the object, on account of the photoacoustic effect, are received, and object information is acquired in the form of image data.

[0020] In the case of a device that relies on the former ultrasound wave echo technology, the object information that is acquired is information that reflects differences in the acoustic impedance among tissues in the object interior. In the case of the latter device that relies on the photoacoustic effect, the object information that is acquired denotes the distribution of sources of acoustic waves that are generated as a result of light irradiation, the initial sound pressure distribution inside the object, or the light energy absorption density distribution and/or absorption coefficient distribution derived from the initial sound pressure distribution, as well as the distribution of the concentration of substances that

make up the tissues. The substance concentration distribution may be, for instance, an oxygen saturation distribution, an oxyhemoglobin-reduced hemoglobin concentration distribution or the like.

[0021] As used in the present invention, the term acoustic wave encompasses elastic waves referred to as sound waves, ultrasound waves and acoustic waves, typically ultrasound waves. Acoustic waves generated on account of the photoacoustic effect are referred to as photoacoustic waves or photo-ultrasound waves. An acoustic detector (for instance, a probe) receives acoustic waves that are generated or reflected in the object and that propagate through the latter.

[0022] The present invention can also be regarded as an object information acquiring method for realizing, through control by a computer or the like, the various operations that are performed in the object information acquiring apparatus. In a case where electric signals resulting from conversion of acoustic waves already acquired by a probe are stored in a storage device, the present invention can also be regarded as an information processing apparatus in which these signals are used to construct object information in the form of image data.

[0023] In the disclosure below, the term delay-and-sum denotes processing of working out object information taking into consideration the positions of a plurality of receiving elements in an ultrasound wave probe, as well as target positions inside the object. More specifically, there is carried out delaying processing for a plurality of reception signals in accordance with the direction in which the acoustic waves are transmitted and in accordance with the return positions of the waves (positions at which acoustic waves are generated, in cases where the photoacoustic effect resorted to). Summation processing is then performed on the plurality of reception signals after the delaying processing. That is, delay-and-sum processing is executed herein. Such delay-and-sum processing is processing, based on reception beamforming, of generating signals corresponding to the sound pressure of acoustic waves from respective positions inside the object.

[0024] Summation in the delay-and-sum processing may be performed after multiplication of the plurality of reception signals by respective weights. Specifically, the observation position and the conditions of transmission and reception are known before signal reception, and hence a good image can be obtained by performing the summation processing by multiplying the reception signals by weights that are established in accordance with these conditions. A method that utilizes, as such weights, fixed weights that are calculated beforehand in accordance with the observation position and the transmission and reception conditions may be referred to as fixed-type signal processing that is performed in ordinary delay-and-sum processing operations.

[0025] Other methods that can be carried out include methods in which the weights used for multiplication vary adaptively in accordance with the reception signals, i.e. adaptive signal processing methods. Examples thereof include, for instance, the above-described DCMP method (CAPON method). In such adaptive beamforming, reception directionality is adjusted in accordance with reception signals.

[0026] Processing of signal intensities (volume data) thus obtained at each position (pixel or voxel) inside the object is also referred to as image reconstruction, in the meaning of construction of image data for display.

[0027] An example of a conventional DCMP method will be explained before the present invention is explained in detail.

[0028] Fig. 1 illustrates the configuration of a conventional object information acquiring apparatus that relies on a DCMP method. In the figure, a transmission signal control circuit 2 generates a transmission signal 3, according to an instruction from a CPU 16, drives ultrasound wave transmitting and receiving element group 5 of an ultrasound wave probe 1 via a transmission and reception control circuit 4, and transmits a pulsed ultrasound wave beam 6.

[0029] An ultrasound echo wave 7 generated through reflection of the ultrasound wave beam 6 is converted once more to electric signals of M channels by the ultrasound wave transmitting and receiving element group 5, and is sent to a phasing delay circuit 8 via the transmission and reception control circuit 4. The sent electric signals are converted to digital signals by an AD conversion circuit (not shown). The phasing delay circuit 8 adjusts the delay time of the signals in such a manner that the arrival times of an echo signal from an arbitrary point Q on the ultrasound wave beam 6 are equalized.

[0030] A complex transform circuit 9 converts M-channel signals, the delay times whereof have been adjusted, to respective complex signals. The complex transform processing in the complex transform circuit 9 involves generating signals in which the phase of each frequency component is shifted by 90°, on the basis of input signals comprising a real value sequence, and adding the 90° phase-shifted signals as the imaginary parts, to convert thereby the signals to complex signals. The 90° phase-shifted signals can be calculated using a FIR filter with odd taps and odd-symmetry coefficients, and hence the complex transform circuit 9 can be realized easily. The M channel output signals at a point in time t in the complex transform circuit 9 are notated as $x[1,t]$, $x[2,t]$, $x[3,t]$, ..., $x[M,t]$ in the explanation below. In the figure, M corresponds to 5, and the point in time t is omitted.

[0031] The procedure for calculating a complex correlation matrix $A[t]$ out of the complex reception signals $x[1,t]$, $x[2,t]$, $x[3,t]$, ..., $x[M,t]$ obeys a known spatial averaging method as a method for attenuating the influence of correlated interference waves. In a spatial averaging method, sub-array signal vectors $X_j[t]$ are defined by taking M complex signals in L batches, as in Expression (1), and a complex correlation matrix is calculated according to Expression (2). Ordinarily, a numerical value of about M/2 is used as the numerical value L. In Expression (2), the symbol H in the superscript of $X_j[t]$ denotes the transpose and complex conjugate of a vector.

[Math 1]

$$X_j[t] = \begin{pmatrix} x[j, t] \\ x[j+1, t] \\ \vdots \\ x[j+L-1, t] \end{pmatrix}, \quad j = 1, 2, \dots, M-L+1 \quad (1)$$

$$A[t] = \frac{1}{M-L+1} \cdot \sum_{j=1}^{M-L+1} X_j[t] X_j[t]^H \quad (2)$$

[0032] In the figure, correlation matrix calculation circuits 10[1], 10[2], 10[3] are circuits that calculate respective correlation matrices of sub-array signal vectors $X_1[t]$, $X_2[t]$, $X_3[t]$. An averaging circuit 11 summates and averages the calculated correlation matrices, and outputs the complex correlation matrix $A[t]$ of Expression (2). In the figure, L corresponds to 3.

[0033] A correlation matrix modifying circuit 12 is a calculation circuit that summates $\varepsilon \times \text{Trace}[A]$, which is proportional to $\text{Trace}[A]$, to the diagonal terms of the complex correlation matrix $A[t]$, to yield a modified complex correlation matrix $A'[t]$. Herein, ε is a small positive number, and $\text{Trace}[A]$ is the sum of the diagonal terms of matrix A . The processing of summing $\varepsilon \times \text{Trace}[A]$ to the diagonal terms elicits the effect of stabilizing a subsequent optimal weight calculation and of enhancing the robustness of the output by the DCMP method. In the computational expression, as given by Expression (3), I denotes a unit matrix.

[Math 2]

$$A'[t] = A[t] + \varepsilon \cdot \text{Trace}[A[t]] \cdot I \quad (3)$$

[0034] Although not depicted in the example of the figure, the complex correlation matrix $A[t]$ may similarly be temporally averaged in order to enhance the robustness of the output by the DCMP method.

[0035] A weight vector calculation circuit 13 calculates an optimal weight vector $W[t]$ using the modified complex correlation matrix $A'[t]$ and a known constraint vector C . According to the DCMP method, the optimal weight vector $W[t]$ is given as a vector $W[t]$ that minimizes a signal intensity P of Expression (5) under the constraint condition of Expression (4).

[Math 3]

$$W[t]^H C = 1 \quad (4)$$

$$P[t] = W[t]^H A' W[t] \quad (5)$$

[0036] The problem of working out the optimal weight vector W that minimizes P , with Expression (4) as the constraint condition, can be solved analytically. The solution of the optimal weight vector $W[t]$ is given by Expression (6). The superscript -1 of $A'[t]$ denotes an inverse matrix of $A'[t]$. The constraint vector C is a known vector that designates the arrival direction of the signals to be received, such that ordinarily all the elements of the vector are set to 1 for the phasing delay output signal. For convenience in the explanation below, the constraint vector used herein has the magnitude thereof normalized to 1, as in Expression (7). The weight vector calculation circuit 13 calculates Expression (6).

[Math 4]

$$W[t] = \frac{A'[t]^{-1} C}{C^H A'[t]^{-1} C} \quad (6)$$

$$C = \frac{1}{\sqrt{L}} \cdot \begin{pmatrix} 1 \\ 1 \\ \vdots \\ 1 \end{pmatrix} \quad (7)$$

[0037] An output signal calculation circuit 14 calculates a complex output signal $Y(t)$ according to Expression (8), on the basis of the optimal weight vector $W[t]$ and sub-array complex signal vectors $X_j[t]$. A signal intensity calculation circuit 15 calculates an output signal intensity $Pow[t]$ according to Expression (9), on the basis of the output signal Y , and forwards the result to the CPU 16.

[Math 5]

$$Y[t] = \sum_{j=1}^{M-L+1} X_j[t]^H W[t] \quad (8)$$

$$Pow[k] = |Y[t]|^2 \quad (9)$$

[0038] The CPU 16 can obtain thereby high-precision echo intensity signals on the transmission beam path. By way of the transmission signal control circuit 2, the CPU 16 causes the transmission position and direction of an ultrasound wave beam to be sequentially scanned, gathers the echo intensity signals on the respective ultrasound wave beam paths, and, on the basis thereof, creates an echo image and displays the echo image on a display device 17.

[0039] The processing operations from Expression (1) to Expression (9) can be calculated using a digital circuit means or a general-purpose high-speed computer. Accordingly, an object information acquiring apparatus that relies on the DCMP method can be realized by executing the above procedure.

[0040] An example has been explained in detail of an instance where a conventional DCMP method is applied to ultrasound wave beamforming. As is known, the echo image that is generated in accordance with the DCMP method varies substantially depending, for instance, on the small parameter ε that is given by Expression (3). If the small parameter ε was set to be very small, the resolution of isolated point targets present inside the object was significantly enhanced; in some instances, however, the signal intensity was significantly reduced in the case of linear targets or the like, on account of interference with reflected waves from the surroundings.

[0041] As the small parameter ε increases, the echo image asymptotically approaches a delay-and-sum echo image of sub-array reception signals. The signal number L of the sub-array reception signals is narrowed to about half the original reception signal number M . Therefore, this means that setting a large small parameter ε results in an asymptotic approach to a delay-and-sum image of poorer resolution than that of an ordinary delay-and-sum image from M element signals.

[0042] These problems can be avoided to some extent by appropriately selecting the value of the ε parameter. Even upon appropriate selection of the value of the ε parameter, however, a possibility remained of decreased image contrast, compared to that of an ordinary delay-and-sum method, depending on the way in which reflecting bodies were distributed inside the object.

[0043] Methods wherein a correlation matrix is temporally smoothed and is used for optimal weight calculation constitute likewise an effective method for improving the robustness of the DCMP method. In some instances, however, such a method as well gave rise to decreased image contrast, depending on the conditions. As is characteristic of the DCMP method, resolution and image contrast decreased in some instances, similarly to cases where ε was set to a large value, when substantial reception random noise was superposed on the reception signal.

[0044] Fig. 2 illustrates one-line waveforms of an output echo image by the delay-and-sum method and the DCMP method, under given conditions. Fig. 2A illustrates results of delay-and-sum of an isolated point target, Fig. 2B illustrates results by the DCMP method, Fig. 2C illustrates results of delay-and-sum of two separated point targets, and Fig. 2D illustrates results by the DCMP method. The results show that peak width in the echo image by the DCMP method is narrower than that by the delay-and-sum method, and thus the former is superior in terms of resolution. However, the echo image by the DCMP method exhibits higher signal level at sites spaced apart from the peaks, which indicates that the method is inferior in terms of contrast.

[0045] In view of the above, there is a need for combining the outputs of the two beamforming methods having dissimilar characteristics, to generate a new output signal that brings out the advantages of both methods. In other words, it is necessary to enhance image quality in devices that generate image data on the interior of an object by subjecting ultrasound waves received from the object to adaptive signal processing (DCMP method).

Example 1

[0046] Fig. 3 is a diagram illustrating a device according to Example 1. Compared with the conventional example of Fig. 1, herein blocks 21 to 25 have been added in Example 1 in place of the output signal calculation circuit 14. The explanation below will focus on this difference.

[0047] A signal intensity calculation circuit 21 calculates, on the basis of Expression (10), an output signal intensity P_w according to the DCMP method, from the modified correlation matrix $A'[t]$ and the optimal weight vector $W[t]$.
[Math 6]

$$P_w[t] = W[t]^H A'[t] W[t] \quad (10)$$

[0048] A signal intensity calculation circuit 22 calculates, on the basis of Expression (11) a signal intensity P_c in the direction of arrival of the signals to be received, from the modified correlation matrix $A'[t]$ and the constraint vector C .
[Math 7]

$$P_c[t] = C^H A'[t] C \quad (11)$$

[0049] Herein, $A'[t]$ can be approximated by $A[t]$ if the ε parameter is a small positive number, and hence the signal intensity P_c is substantially equal to the average signal intensity from delay-and-sum of sub-array signals as given by Expression (12). Therefore, the calculation of P_c in Expression (11) can be performed directly on the basis of the average signal intensity from delay-and-sum of the sub-array signals X_j .
[Math 8]

$$\begin{aligned} P_c[t] &\cong C^H A[t] C \\ &= \frac{1}{M-L+1} \cdot C^H \left(\sum_{j=1}^{M-L+1} X_j[t] X_j[t]^H \right) C \\ &= \frac{1}{M-L+1} \cdot \sum_{j=1}^{M-L+1} |X_j[t]^H C|^2 \end{aligned} \quad (12)$$

[0050] A modulation ratio calculation circuit 23 calculates a ratio between the two output signal intensities P_w and P_c , to calculate thereby a modulation ratio γ , as in Expression (13).
[Math 9]

$$\gamma[t] = \frac{P_w[t]}{P_c[t]} = \frac{W[t]^H A'[t] W[t]}{C^H A'[t] C} \quad (13)$$

[0051] The numerator $P_w[t]$ in Expression (13) is the minimum intensity calculated on the basis of the constraint condition of Expression (4). When the constraint vector C is considered as one weight vector, the constraint vector C is also a weight vector that satisfies the constraint condition of Expression (4). As a result, this ensures that the modulation ratio γ calculated according to Expression (13) holds within the range of Expression (14).
[Math 10]

$$0 \leq \gamma[t] \leq 1 \quad (14)$$

[0052] A summing circuit 24 summates the input signals, and calculates a beamforming signal Y_{das} based on a delay-and-sum method. The calculated delay-and-sum signal Y_{das} is subjected to amplitude modulation in an amplitude modulation circuit 25, as in Expression (15), and the modulated delay-and-sum signal $Y'[t]$ is sent to the signal intensity calculation circuit 15.

[Math 11]

$$Y'[t] = Y_{das}[t] \cdot \gamma[t] \quad (15)$$

[0053] The signal intensity calculation circuit 15 performs envelope detection and conversion to intensity signals on the delay-and-sum signal $Y'[t]$, and forwards the result to the CPU 16. The CPU 16 receives the input of the intensity signals for each ultrasound wave beam, reconstructs the signals to an echo image, and displays the result on the display circuit 17.

[0054] Thus, the processing from Expression (10) to Expression (15) can be calculated using a digital circuit means or a general-purpose high-speed computer, and hence the present invention can be realized in an easy manner.

[0055] Fig. 4 is a diagram for explaining the effect of the present example, using line waveforms of an echo image for an isolated point target. Fig. 4A is an output line waveform of an ordinary delay-and-sum method corresponding to Y_{das} , and Fig. 4B is an output line waveform of a delay-and-sum method of sub-array signals corresponding to P_c . The waveform (Fig. 4B) of delay-and-sum of sub-array signals has fewer reception signals to be summated than in the case of a waveform (Fig. 4A) resulting from ordinary delay-and-sum, and hence the spread of the waveform is large and resolution is poor.

[0056] Fig. 4C is an output signal intensity waveform by the DCMP method corresponding to P_w . A comparison of the output signal intensity by the DCMP method (Fig. 4C) versus the result of delay-and-sum (Fig. 4A) reveals that although resolution improves significantly, the spread of the foot of the waveform is larger, and image contrast poorer. Fig. 4D is a modulation ratio waveform corresponding to γ . The modulation ratio γ is a ratio of the attenuation of the delay-and-sum output of sub-array signals by the DCMP method, and may be regarded as a ratio of characteristic improvement by the DCMP method. In the present example, output signals from ordinary delay-and-sum are multiplied by the "improvement" ratio γ of the DCMP method, so as to improve the output characteristic of ordinary delay-and-sum.

[0057] Fig. 4E is an intensity waveform of a resulting modulation output signal Y' . Through multiplication by the "improvement" ratio γ , the resulting intensity waveform of Y' (Fig. 4E) boasts the high resolution of a waveform by the DCMP method (Fig. 4C), and, at the same time, significantly attenuated foot spread, and yet better contrast than a waveform from delay-and-sum (Fig. 4A). The "improvement" ratio γ is no greater than 1, as given by Expression (14), and hence contrast can be improved beyond the result achievable by delay-and-sum.

[0058] Fig. 5 is a diagram illustrating line waveforms of echo images for two point targets. Similarly to Fig. 4, Fig. 5A is a line waveform of an echo image corresponding to Y_{das} , while Fig. 5B corresponds to P_c , Fig. 5C corresponds to P_w , Fig. 5D corresponds to γ , and Fig. 5E corresponds to Y' . As in the case of the isolated point target of Fig. 4, the output (Fig. 5E) in the present example is superior to both that of the delay-and-sum method and that of the DCMP method in terms of resolution and contrast.

[0059] Thus, the present invention allows combining the outputs of two beamforming methods having dissimilar characteristics, namely the delay-and-sum beamforming method and the DCMP beamforming method. In the present invention, this is equivalent to adaptive beamforming (DCMP method) being performed by an adaptive beamformer, and delay-and-sum beamforming being performed by a delay-and-sum beamformer, and is equivalent to performing amplitude modulation, by an amplitude modulator, on the output signal of one from among the adaptive beamformer and the delay-and-sum beamformer, using the output signal from the other. Image data on the interior of the object is generated on the basis of the output signal from the amplitude modulator.

[0060] As a result, it becomes possible to generate a beamforming output signal having superior characteristics. The present invention allows providing a means for realizing both high resolution and high contrast characteristics, which was hitherto not possible to achieve by resorting to a conventional single beamforming method.

Variations

[0061] The present example may accommodate various modifications in the way it is realized. The amplitude modulation processing is not limited to simple multiplication, such as the one given in Expression (15), and the modulation ratio may be corrected in an appropriate manner. For instance, a similar effect can be expected to be elicited also in a

variation as in Expression (16), using an arbitrary monotonically increasing function $g(x)$.
[Math 12]

$$Y'[t] = Ydas[t] \cdot g(\gamma[t]) \quad (16)$$

[0062] A linear interpolation formula such as the one of Expression (17) can be used as a parameter for the temporal change of α , in order to emphasize the characteristic of an ordinary delay-and-sum processing in accordance with the depth in the object interior.

[Math 13]

$$Y'[t] = Ydas[t] \cdot ((1 - \alpha) + \alpha \cdot \gamma[t]) \quad (17)$$

[0063] In order to facilitate the calculation of signal intensity, delay-and-sum is performed in the present example using, as an input, the complex output of the complex transform circuit 9. However, the calculation may be realized also through summation and amplitude modulation of the real values, without modification, of the output of the phasing delay circuit 8, and through envelope detection in the signal intensity calculation circuit 15.

[0064] The calculation of P_c and P_w yields similar results even if the correlation matrix A' of Expression (10) and Expression (11) is modified to the output A of an average-calculating circuit.

[0065] Further, amplitude modulation may be carried out not on a delay-and-sum signal, as in the present example, and a similar effect can be elicited by swapping the positions of the amplitude modulation circuit 25 and the signal intensity calculation circuit 15, and by performing amplitude modulation after conversion to signal intensity.

[0066] In the calculation processing of the present invention, thus, equivalent or identical effects can be expected to be achieved by modifying the order of the various calculations, and by replacing the variables in the computational expression by similar variables. Such variations are however encompassed by the present invention, since the variations conform to the gist of latter, namely modulation of the output of one beamforming method, from among a first and a second beamforming method, using an output signal intensity of the other beamforming method.

Example 2

[0067] Fig. 6 is a diagram illustrating a device according to Example 2 *which is an example useful for understanding the invention*. Example 2 corresponds to an example of a simplified version of Example 1. Herein, an output signal Y_{das} from a direct delay-and-sum beamforming method is subjected to amplitude modulation using the output signal intensity P_w from a DCMP beamforming method.

[0068] A comparison between Fig. 6 of the present example and Fig. 3 of Example 1 shows that the foregoing differ in that the signal intensity calculation circuit 22 and the modulation ratio calculation circuit 23 have been omitted, and the outputted P_w is inputted to the amplitude modulation circuit 25. That is, calculations that utilize the modulation ratio γ are not carried out.

[0069] The amplitude modulation circuit 25 in the present example may perform, for instance, the calculation processing of Expression (18a) or Expression (18b). In these mathematical expressions K is a constant. This way, an output signal that is an intermediate of the two beamforming methods can be outputted, and a composite signal can be outputted in which the shortcomings of the two beamforming methods are mitigated, though not as much as in Example 1.

[Math 14]

$$Y'[t] = Ydas[t] \cdot P_w \quad (18a)$$

$$Y'[t] = Ydas[t] \cdot \frac{P_w}{|Ydas[t]|^2 + K} \quad (18b)$$

Example 3

[0070] Fig. 7 is a diagram illustrating a device according to Example 3 *which is an example useful for understanding the invention*. Example 3 is an example where, as opposed to Example 2, amplitude modulation of the output signal by

the DCMP beamforming method is performed using an output intensity signal by the delay-and-sum beamforming method.

[0071] In the figure, the delay-and-sum signal Y_{das} outputted by the summing circuit 24 is converted to an intensity signal by an absolute-value circuit 31. An output signal Y_w by the DCMP method, outputted by the output signal calculation circuit 14, is amplitude-modulated using the intensity signal of the delay-and-sum signal Y_{das} in the amplitude modulation circuit 32, and the result is inputted to the signal intensity calculation circuit 15.

[0072] For instance, the modulation output signal Y' outputted by the amplitude modulation circuit 32 is set to be as given by Expression (19a) or Expression (19b). This way, a composite signal can be outputted in which the shortcomings of the two beamforming methods are mitigated, though not as much as in Example 1.

[Math 15]

$$Y'[t] = Y_w \cdot |Y_{das}[t]|^2 \quad (19a)$$

$$Y'[t] = Y_w[t] \cdot \frac{|Y_{das}[t]|^2}{|Y_w[t]|^2 + K} \quad (19b)$$

Example 4

[0073] Fig. 8 is an example of an instance of a device according to Example 4, where the present invention is used for two-dimensional beamforming. Two-dimensional scanning of an ultrasound wave beam in the present example is performed using the one-dimensional probe 1 in which a plurality of transmitting and receiving elements is arrayed in one dimension. Scanning in the array direction u takes place through electronic scanning by the one-dimensional probe 1, and scanning in a perpendicular direction v is accomplished through mechanical displacement of the one-dimensional probe 1.

[0074] In order to reduce ordinary calculation processing operations involved in the calculation two-dimensional beamforming, one-dimensional beamforming is performed herein in one direction, and, on the basis of the obtained result, one-dimensional beamforming is performed in a direction perpendicular to that direction. These processing operations allow acquiring image data of an object in the form of, for instance, a plurality of tomographic images, and allow displaying the internal structure of the object on a display device or the like. The direction in which the elements are arrayed and the direction of mechanical displacement are not limited to being perpendicular to each other, and it suffices that the directions intersect each other.

[0075] In the present example, a first step involves, firstly, performing electronic scanning in a u direction and mechanical scanning in a v direction, and storing the result of one-dimensional beamforming, at each scanning position in two dimensions, in a storage circuit 40. In the figure, a DCMP beamforming circuit 101 is a circuit that realizes the DCMP processing function of Example 1, and that outputs a modulation ratio γ . One-dimensional beamforming at each position can be realized in accordance with the method of Example 1, using this DCMP beamforming circuit 101 as well as the summing circuit 24 and the amplitude modulation circuit 25.

[0076] In a second step, next, the one-dimensional beamforming results, lined up in the v direction on a same u coordinate, are read parallelly from the storage circuit 40, and there is performed one-dimensional beamforming in the v direction.

[0077] A DCMP beamforming circuit 102, a summing circuit 41 and an amplitude modulation circuit 42, which are identical to the circuits denoted by the reference symbol 101, the reference symbol 24 and the reference symbol 25, perform the beamforming method of the present invention in the v direction, and the result is outputted to the intensity calculation circuit 15. The intensity calculation circuit 15 converts the output signal of the amplitude modulation circuit 42 to an output intensity signal. The CPU 16 receives the input of the output intensity signal at each position in two dimensions, from the intensity calculation circuit 15, reconstructs an echo image, and displays the echo image on the display device 17.

[0078] This way, the present invention can be easily carried out also for a two-dimensional beamforming method, and it becomes possible to provide a high-quality echo image. A combination of electronic scanning and mechanical scanning of a one-dimensional probe has been illustrated in the present example as an instance of two-dimensional scanning of an ultrasound wave beam, but it is evident that similar scanning can be carried out by electronically switching the output of a two-dimensional probe, and thus the present invention can be used in the latter case as well.

Example 5

[0079] Fig. 9 is an example of an instance where the present invention is used in a photoacoustic imaging device that acquires images by relying on the photoacoustic effect. In the figure, a light source 51 irradiates electromagnetic waves to the object interior via a light source control circuit 50 according to an instruction from the CPU 16. The substances to be inspected that are present in the interior of the object absorb the irradiated electromagnetic waves, and generate photoacoustic waves in unison on account of thermal expansion. An ultrasound wave receiving element group 52 converts the arriving acoustic waves to electric signals, and the signals are transmitted to the phasing delay circuit 8 by way of a selection circuit 54.

[0080] Defining herein an arbitrary scan line 55 in the object interior, and focusing only on photoacoustic waves generated on the scan line 55, it is found that a generation position Q of a photoacoustic wave 53 received by the ultrasound wave receiving element group 52 shifts, with the passage of time, from a near position on the scan line 55 to a distant position. Through modification of the delay time in the phasing delay circuit 8 in accordance with the reception time, therefore, the phasing delay circuit 8 can output, in the form of a signal of uniform phase, the photoacoustic wave signals generated at all points on one scan line 55.

[0081] This signal is exactly the same as a signal resulting from phasing delay of an echo signal obtained through transmission of an ultrasound wave beam in the direction of the scan line 55. Therefore, a photoacoustic signal intensity waveform can be calculated by resorting to the circuit configuration of Fig. 9 that is exactly the same as that of Example 1, for echo signal reception. A DCMP beamforming circuit 101 is a circuit that realizes the DCMP processing function of Example 1, and that outputs a modulation ratio γ . Therefore, a photoacoustic image of an entire surface in the object interior can be created through repeated irradiation of electromagnetic waves and reception of photoacoustic waves while the position of the scan line is shifted.

[0082] A configuration is also possible wherein there is provided a storage circuit 56 that stores reception signals, as in the figure, such that reception signals from an initial electromagnetic wave irradiation are stored in the storage circuit 56, and signals read out from the storage circuit 56 are used for second and subsequent reception signals. The reception signals by electromagnetic wave irradiation are the same every time, so long as the positions of the light source 51 and the ultrasound wave receiving element group 52 are not altered. Accordingly, the number of electromagnetic wave irradiations can be reduced, and a device having good efficiency can be achieved, by storing of reception signals from one single electromagnetic wave irradiation, and through repeated execution of processing of reading signals from the storage circuit 56 and calculating a reconstructed image on one scan line 55, while modifying the scan line position.

[0083] Thus, the present invention can also be used in an object information acquiring apparatus that receives photo-ultrasound waves generated as a result of irradiation of electromagnetic waves, and that reconstructs a photo-ultrasound image, and it becomes possible to provide a high-quality photo-ultrasound image.

[0084] In the present invention, a DCMP method has been explained as a specific example of adaptive beamforming, but APES (Amplitude and Phase Estimation) is a similar known method. In APES, the calculation method of the correlation matrix A upon calculation of the optimal weight vector W differs from Expression (2) in that the calculation method herein does not utilize sub-array signal vectors on their own, but difference vectors of the sub-array signal vectors and a mean vector thereof. Even accounting for the above difference, however, the characteristics of the method as an adaptive beamforming method are substantially identical to those of the DCMP method, and thus the present invention can be used in APES as well.

[0085] While the present invention has been described with reference to exemplary embodiments, it is to be understood that the invention is only limited to the following claims.

Claims

1. An object information acquiring apparatus, comprising:
 - an adaptive beamformer (9, 10, 11, 12, 13) configured to perform adaptive beamforming of adjusting reception directionality based on a constraint vector in accordance with a reception signal in use of the reception signal, wherein the reception signal is an electric signal converted from a received acoustic wave;
 - a delay-and-sum beamformer (24) configured to perform delay-and-sum beamforming having preset directionality in use of the reception signal;
 - a calculation circuit (21, 22, 23) configured to calculate a modulation ratio,
 - an amplitude modulator (25) configured to use an output signal of one of the adaptive beamformer and the delay-and-sum beamformer, to perform amplitude modulation on an output signal of the other one of the beamformers by using the modulation ratio; and
 - a generator (16) configured to, on the basis of a signal outputted by the amplitude modulator, generate image

data on the interior of the object,

characterized in that

the calculation circuit (21, 22, 23) is configured to calculate the modulation ratio as an attenuation ratio of an output from the delay-and-sum beamformer on the basis of an output signal from the adaptive beamformer and signal intensity worked out using the constraint vector.

2. The object information acquiring apparatus according to claim 1, wherein the amplitude modulator performs amplitude modulation on an output signal from the delay-and-sum beamformer using an output signal from the adaptive beamformer.

3. The object information acquisition apparatus according to any of claims 1 and 2, further comprising a plurality of receiving elements (5) configured to receive the acoustic wave that propagates from an object, and configured to convert the acoustic wave to the reception signal.

4. The object information acquiring apparatus according to claims 1 to 3, wherein the calculation circuit (21, 22, 23) is configured to calculate the modulation ratio by using an output signal intensity $P_w[t]$ from the adaptive beamformer calculated based on a complex correlation matrix A and an optimal weight vector $W[t]$ and a signal intensity $P_c[t]$ based on the constraint vector C , wherein $W[t]^H C = 1$, and $W[t]^H$ is the transpose and complex conjugate of $W[t]$.

5. The object information acquiring apparatus according to any of claims 1 to 4, wherein the amplitude modulator performs the amplitude modulation using the modulation ratio corrected by a function that changes over time.

6. The object information acquiring apparatus according to claim 5, wherein the amplitude modulator corrects the modulation ratio by using a monotonically increasing function.

7. The object information acquiring apparatus according to claim 5, wherein the amplitude modulator corrects the modulation ratio according to a linear interpolation formula that includes a parameter that changes over time.

8. The object information acquiring apparatus according to any one of claims 3 to 7, wherein the plurality of receiving elements is arrayed in one dimension, and generates the reception signal at respective positions where the elements have reached due to mechanical displacement thereof in a direction that intersects the direction of the arraying; the adaptive beamformer and the delay-and-sum beamformer generate an output signal by performing beamforming on a reception signal at each of the positions, and the amplitude modulator performs amplitude modulation at each of the positions; and beamforming in a direction that intersects the direction of the arraying is performed at a plurality of positions by using a signal generated and outputted by the amplitude modulator.

9. The object information acquiring apparatus according to any one of claims 1 to 8, wherein the adaptive beamforming is a DCMP method.

10. The object information acquiring apparatus according to any one of claims 1 to 9, wherein the acoustic wave that propagates from the object is an echo wave of an ultrasound wave that is transmitted to the object.

11. The object information acquiring apparatus according to any one of claims 1 to 9, wherein the acoustic wave that propagates from the object is a photoacoustic wave that is generated upon irradiation of an electromagnetic wave onto the object.

12. An object information acquiring method, comprising:

a step of receiving, by a plurality of receiving elements, an acoustic wave that propagates from an object, and converting the acoustic wave to a reception signal that is an electric signal;
an adaptive beamforming step of performing adaptive beamforming of adjusting reception directionality based on a constraint vector in accordance with the reception signal in use of the reception signal;
a delay-and-sum beamforming step of performing delay-and-sum beamforming having preset directionality in use of the reception signal;
a calculating step of calculating a modulation ratio;
an amplitude modulation step of performing amplitude modulation in use of an output signal in one of the adaptive beamforming step and the delay-and-sum beamforming step by using the modulation ratio, in order to perform

amplitude modulation on an output signal of the other; and
 a generation step of, on the basis the amplitude-modulated signal, generating image data on the interior of the object,

characterized in that

the calculating step calculates the modulation ratio as an attenuation ratio of an output from the delay-and-sum beamformer on the basis of an output signal from the adaptive beamformer and signal intensity worked out using the constraint vector.

Patentansprüche

1. Objektinformationserhaltevorrichtung mit:

einem adaptiven Strahlformer (9, 10, 11, 12, 13), der konfiguriert ist, ein adaptives Strahlformen zum Anpassen einer Empfangsdirectionalität basierend auf einem Beschränkungsvektor gemäß einem Empfangssignal beim Verwenden des Empfangssignals durchzuführen, wobei das Empfangssignal ein elektrisches Signal ist, dass aus einer empfangenen akustischen Welle umgewandelt ist;

einem Verzögerungs- und Summierungsstrahlformer (24), der konfiguriert ist, ein Verzögerungs- und Summierungsstrahlformen mit einer voreingestellten Directionalität bei der Verwendung des Empfangssignals durchzuführen;

einer Berechnungseinheit (21, 22, 23), die konfiguriert ist, ein Modulationsverhältnis zu berechnen, einem Amplitudenmodulator (25), der konfiguriert ist, ein Ausgabesignal von dem adaptiven Strahlformer oder dem Verzögerungs- und Summierungsstrahlformer zu verwenden, um eine Amplitudenmodulation auf einem Ausgabesignal des anderen der Strahlformer unter Verwendung des Modulationsverhältnisses durchzuführen; und

einem Generator (16), der konfiguriert ist, auf der Basis eines Signals, das durch den Amplitudenmodulator ausgegeben wird, Bilddaten des Inneren des Objekts zu erzeugen,

dadurch gekennzeichnet, dass

die Berechnungsschaltung (21, 22, 23) konfiguriert ist, das Modulationsverhältnis als ein Abschwächungsverhältnis einer Ausgabe von dem Verzögerungs- und Summierungsstrahlformer auf der Basis eines Ausgabesignals von dem adaptiven Strahlformer und einer Signalintensität, die unter Verwendung des Zwangsvektors ausgearbeitet wird, zu berechnen.

2. Objektinformationserhaltevorrichtung Anspruch 1, wobei der Amplitudenmodulator eine Amplitudenmodulation auf einem Ausgabesignal von dem Verzögerungs- und Summierungsstrahlformer unter Verwendung eines Ausgabesignals von dem adaptiven Strahlformer durchführt.

3. Objektinformationserhaltevorrichtung nach einem der Ansprüche 1 und 2, ferner mit einer Vielzahl von Empfangselementen (5), die konfiguriert sind, die akustische Welle, die von einem Objekt propagiert, zu empfangen, und konfiguriert sind, die akustische Welle in das Empfangssignal umzuwandeln.

4. Objektinformationserhaltevorrichtung nach einem der Ansprüche 1-3, wobei die Berechnungseinheit (21, 22, 23) konfiguriert ist, das Modulationsverhältnis unter Verwendung einer Ausgabesignalintensität $P_w[t]$ von dem adaptiven Strahlformer, die basierend auf einer komplexen Korrelationsmatrix A und einem optimalen Wichtungsvektor $W[t]$ und einer Signalintensität $P_c[t]$ basierend auf dem Zwangsvektor C berechnet wird, zu berechnen, wobei $W[t]^H C = 1$ und $W[t]^H$ ist die Transponierte und Komplexkonjugierte von $W[t]$.

5. Objektinformationserhaltevorrichtung nach einem der Ansprüche 1-4, wobei der Amplitudenmodulator die Amplitudenmodulation unter Verwendung des Modulationsverhältnisses, das durch eine Funktion, die sich mit der Zeit ändert, korrigiert ist, durchführt.

6. Objektinformationserhaltevorrichtung nach Anspruch 5, wobei der Amplitudenmodulator das Modulationsverhältnis unter Verwendung einer monoton steigenden Funktion korrigiert.

7. Objektinformationserhaltevorrichtung nach Anspruch 5, wobei der Amplitudenmodulator das Modulationsverhältnis gemäß einer linearen Interpolationsformel korrigiert, die einen Parameter, der sich mit der Zeit ändert, enthält.

8. Objektinformationserhaltevorrichtung nach einem der Ansprüche 3-7, wobei

die Vielzahl von Empfangselementen in einer Dimension angeordnet ist und das Empfangssignal an jeweiligen Positionen erzeugt, an denen die Elemente aufgrund ihrer mechanischen Verschiebung in eine Richtung, die die Richtung der Anordnung schneidet, erzeugt;

der adaptive Strahlformer und der Verzögerungs- und Summierungsstrahlformer ein Ausgabesignal durch Durchführen eines Strahlformens auf einem Empfangssignal an jeder der Positionen erzeugen, und der Amplitudenmodulator eine Amplitudenmodulation an jeder der Positionen durchführt; und

ein Strahlformen in einer Richtung, die die Richtung der Anordnung schneidet, an einer Vielzahl von Positionen unter Verwendung eines Signals, das durch den Amplitudenmodulator erzeugt und ausgegeben wird, durchgeführt wird.

9. Objektinformationserhaltevorrichtung nach einem der Ansprüche 1-8, wobei das adaptive Strahlformen ein DCMP Verfahren ist.

10. Objektinformationserhaltevorrichtung nach einem der Ansprüche 1-9, wobei die akustische Welle, die von dem Objekt propagiert, eine Echowelle einer Ultraschallwelle, die zu dem Objekt transmittiert wird, ist.

11. Objektinformationserhaltevorrichtung nach einem der Ansprüche 1-9, wobei die akustische Welle, die von dem Objekt propagiert, eine fotoakustische Welle, die beim Bestrahlen einer elektromagnetischen Welle auf das Objekt erzeugt wird, ist.

12. Objektinformationserhalteverfahren mit:

einem Schritt des Empfangens einer akustischen Welle, die von einem Objekt propagiert, durch eine Vielzahl von Empfangselementen und Umwandeln der akustischen Welle in ein Empfangssignal, das ein elektrisches Signal ist;

einem adaptiven Strahlformschritt des Durchführens eines adaptiven Strahlformens zum Anpassen einer Empfangsrichtungsrichtigkeit basierend auf einem Zwangsvektor gemäß dem Empfangssignal beim Verwenden des Empfangssignals;

einem Verzögerungs- und Summierungsstrahlformungsschritt des Durchführens eines Verzögerungs- und Summierungsstrahlformens mit einer voreingestellten Richtungsrichtigkeit beim Verwenden des Empfangssignals;

einem Berechnungsschritt des Berechnens eines Modulationsverhältnisses;

einem Amplitudenmodulationsschritt des Durchführens einer Amplitudenmodulation beim Verwenden eines Ausgabesignals in dem adaptiven Strahlformungsschritt oder dem Verzögerungs- und Summierungsstrahlformungsschritt unter Verwendung des Modulationsverhältnisses, um eine Amplitudenmodulation auf dem Ausgabesignal des anderen durchzuführen; und

einem Erzeugungsschritt des Erzeugens von Bilddaten des Inneren des Objekts auf der Basis des amplitudenmodulierten Signals,

dadurch gekennzeichnet, dass

der Berechnungsschritt das Modulationsverhältnis als ein Abschwächungsverhältnis einer Ausgabe von dem Verzögerungs- und Summierungsstrahlformer auf der Basis eines Ausgabesignals von dem adaptiven Strahlformer und einer Signalintensität, die unter Verwendung des Zwangsvektors ausgearbeitet wird, berechnet.

Revendications

1. Appareil d'acquisition d'informations d'objet, comprenant :

un dispositif de formation de faisceau adaptatif (9, 10, 11, 12, 13) configuré pour effectuer une formation adaptative de faisceau de réglage de directivité de réception sur la base d'un vecteur de contrainte en fonction d'un signal de réception lors de l'utilisation du signal de réception, où le signal de réception est un signal électrique converti à partir d'une onde acoustique reçue ;

un dispositif de formation de faisceau par retard et sommation (24) configuré pour effectuer une formation de faisceau par retard et sommation ayant une directivité prédéfinie lors de l'utilisation du signal de réception ;

un circuit de calcul (21, 22, 23) configuré pour calculer un rapport de modulation,

un modulateur d'amplitude (25) configuré pour utiliser un signal de sortie de l'un du dispositif de formation de faisceau adaptatif et du dispositif de formation de faisceau par retard et sommation, pour effectuer une modulation d'amplitude sur un signal de sortie de l'autre des dispositifs de formation de faisceau en utilisant le rapport de

modulation ; et

un générateur (16) configuré, sur la base d'un signal délivré en sortie par le modulateur d'amplitude, pour générer des données d'image à l'intérieur de l'objet,

caractérisé en ce que

le circuit de calcul (21, 22, 23) est configuré pour calculer le rapport de modulation en tant que rapport d'atténuation d'une sortie provenant du dispositif de formation de faisceau par retard et sommation sur la base d'un signal de sortie provenant du dispositif de formation de faisceau adaptatif et d'une intensité de signal calculée en utilisant le vecteur de contrainte.

2. Appareil d'acquisition d'informations d'objet selon la revendication 1, dans lequel le modulateur d'amplitude effectue une modulation d'amplitude sur un signal de sortie provenant du dispositif de formation de faisceau par retard et sommation en utilisant un signal de sortie provenant du dispositif de formation de faisceau adaptatif.

3. Appareil d'acquisition d'informations d'objet selon l'une des revendications 1 et 2, comprenant en outre une pluralité d'éléments de réception (5) configurés pour recevoir l'onde acoustique qui se propage à partir d'un objet, et configurés pour convertir l'onde acoustique en le signal de réception.

4. Appareil d'acquisition d'informations d'objet selon les revendications 1 à 3, dans lequel le circuit de calcul (21, 22, 23) est configuré pour calculer le rapport de modulation en utilisant une intensité de signal de sortie $P_w[t]$ provenant du dispositif de formation de faisceau adaptatif calculée sur la base d'une matrice de corrélation complexe A et d'un vecteur de pondération optimal $W[t]$ et une intensité de signal $P_c[t]$ sur la base du vecteur de contrainte C , où $W[t]^H C = 1$, et $W[t]^H$ représente la matrice transposée conjuguée complexe de $W[t]$.

5. Appareil d'acquisition d'informations d'objet selon l'une des revendications 1 à 4, dans lequel le modulateur d'amplitude effectue la modulation d'amplitude en utilisant le rapport de modulation corrigé par une fonction qui varie en fonction du temps.

6. Appareil d'acquisition d'informations d'objet selon la revendication 5, dans lequel le modulateur d'amplitude corrige le rapport de modulation en utilisant une fonction croissante monotone.

7. Appareil d'acquisition d'informations d'objet selon la revendication 5, dans lequel le modulateur d'amplitude corrige le rapport de modulation selon une formule d'interpolation linéaire qui comporte un paramètre qui varie en fonction du temps.

8. Appareil d'acquisition d'informations d'objet selon l'une quelconque des revendications 3 à 7, dans lequel la pluralité d'éléments de réception est disposée en réseau de manière unidimensionnelle, et génère le signal de réception à des positions respectives où les éléments sont atteints en raison de leur déplacement mécanique dans une direction qui coupe la direction de la disposition en réseau ; le dispositif de formation de faisceau adaptatif et le dispositif de formation de faisceau par retard et sommation génèrent un signal de sortie en effectuant une formation de faisceau sur un signal de réception à chacune des positions, et le modulateur d'amplitude effectue une modulation d'amplitude à chacune des positions ; et la formation de faisceau dans une direction qui coupe la direction de la disposition en réseau est effectuée à une pluralité de positions en utilisant un signal généré et délivré en sortie par le modulateur d'amplitude.

9. Appareil d'acquisition d'informations d'objet selon l'une quelconque des revendications 1 à 8, dans lequel la formation adaptative de faisceau est un procédé DCMP.

10. Appareil d'acquisition d'informations d'objet selon l'une quelconque des revendications 1 à 9, dans lequel l'onde acoustique qui se propage à partir de l'objet est une onde d'écho d'une onde ultrasonore qui est transmise à l'objet.

11. Appareil d'acquisition d'informations d'objet selon l'une quelconque des revendications 1 à 9, dans lequel l'onde acoustique qui se propage à partir de l'objet est une onde photo-acoustique qui est générée lors de l'irradiation d'une onde électromagnétique sur l'objet.

12. Procédé d'acquisition d'informations d'objet, comprenant :

une étape qui consiste à recevoir, par une pluralité d'éléments de réception, une onde acoustique qui se propage à partir d'un objet, et à convertir l'onde acoustique en un signal de réception qui est un signal électrique ;

une étape de formation adaptative de faisceau qui consiste à effectuer une formation adaptative de faisceau de réglage de directivité de réception sur la base d'un vecteur de contrainte en fonction du signal de réception lors de l'utilisation du signal de réception ;

une étape de formation de faisceau par retard et sommation qui consiste à effectuer une formation de faisceau par retard et sommation ayant une directivité prédéfinie lors de l'utilisation du signal de réception ;

une étape de calcul qui consiste à calculer un rapport de modulation ;

une étape de modulation d'amplitude qui consiste à effectuer une modulation d'amplitude lors de l'utilisation d'un signal de sortie dans l'une de l'étape de formation adaptative de faisceau et de l'étape de formation de faisceau par retard et sommation en utilisant le rapport de modulation, afin d'effectuer une modulation d'amplitude sur un signal de sortie de l'autre ; et

une étape de génération qui consiste, sur la base du signal modulé en amplitude, à générer des données d'image à l'intérieur de l'objet,

caractérisé en ce que

l'étape de calcul calcule le rapport de modulation en tant que rapport d'atténuation d'une sortie provenant du dispositif de formation de faisceau par retard et sommation sur la base d'un signal de sortie provenant du dispositif de formation de faisceau adaptatif et d'une intensité de signal calculée en utilisant le vecteur de contrainte.

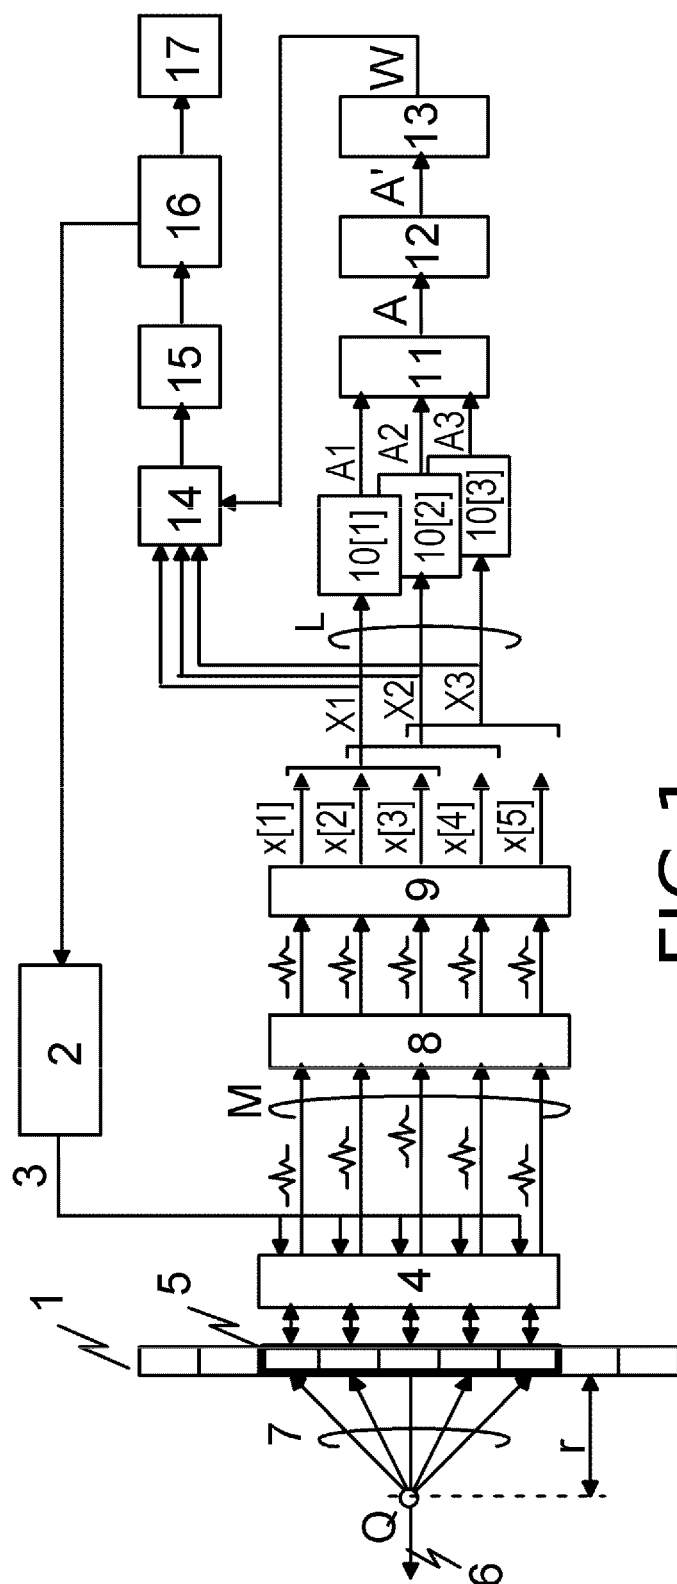


FIG. 1

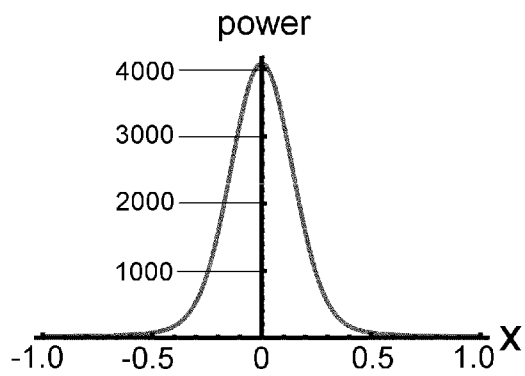


FIG. 2A

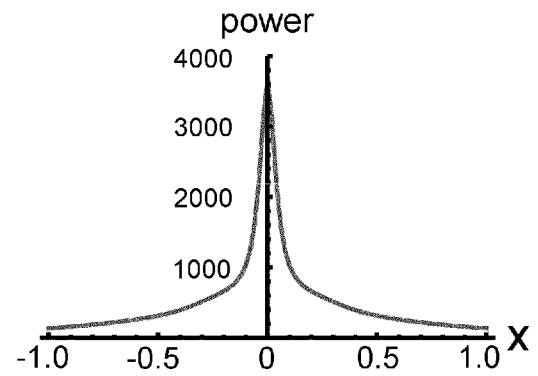


FIG. 2B

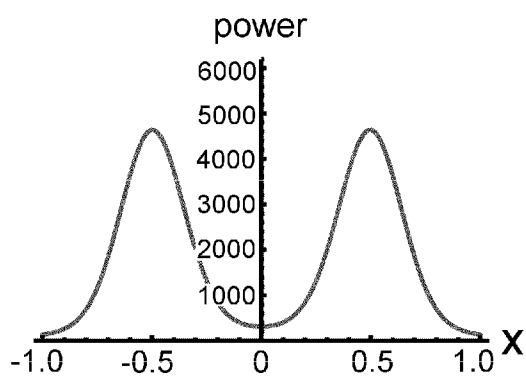


FIG. 2C

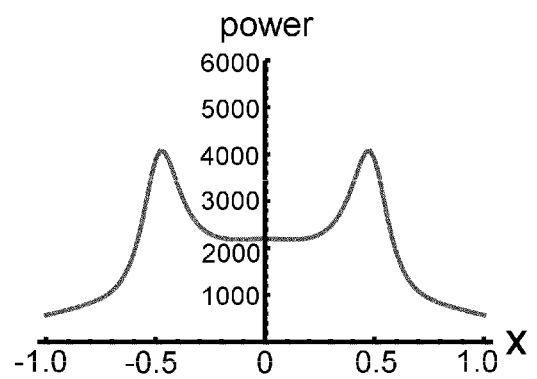
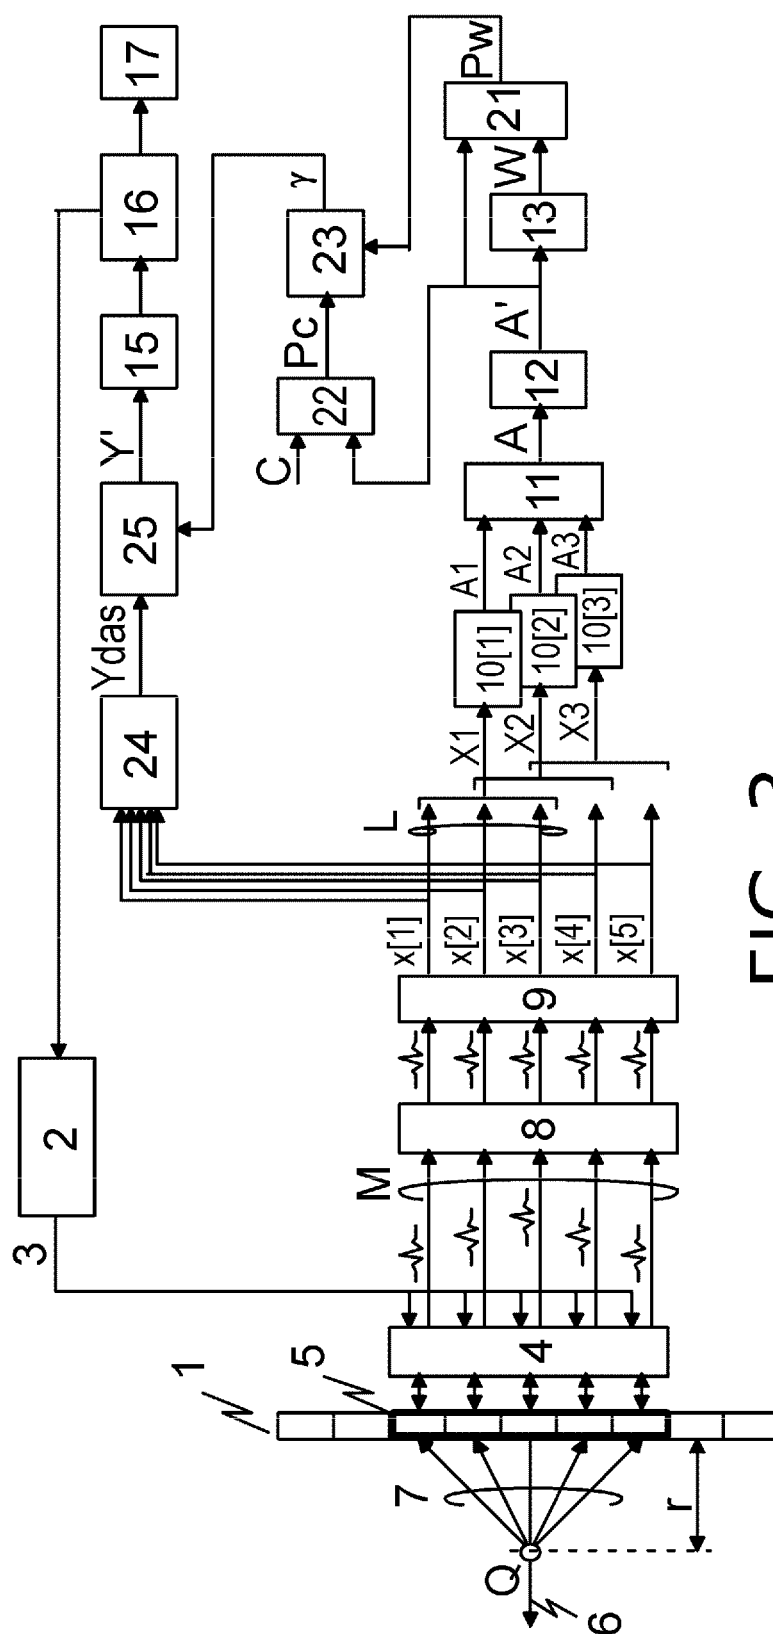


FIG. 2D



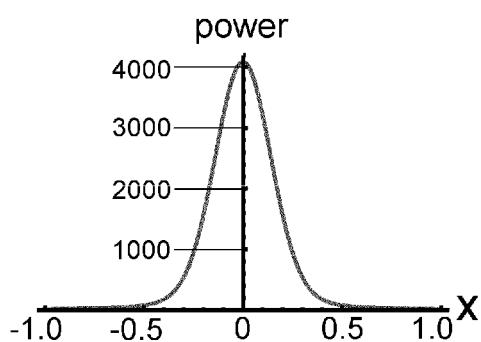


FIG. 4A

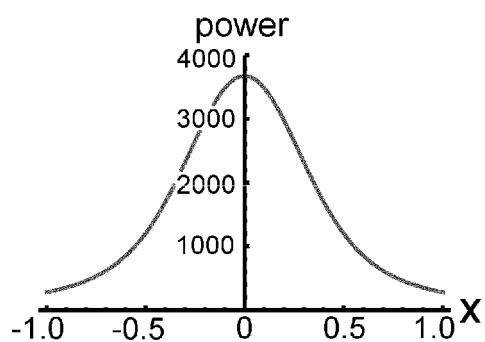


FIG. 4B

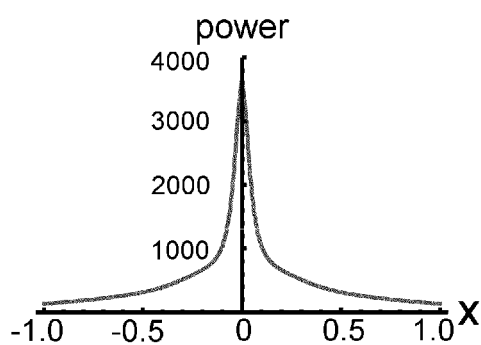


FIG. 4C

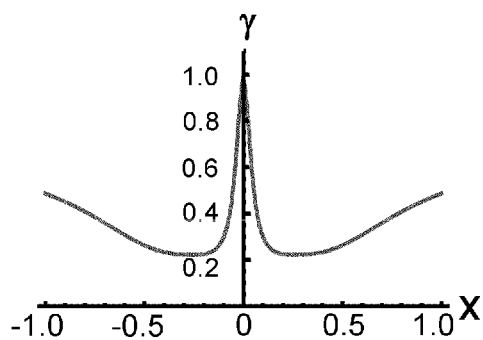


FIG. 4D

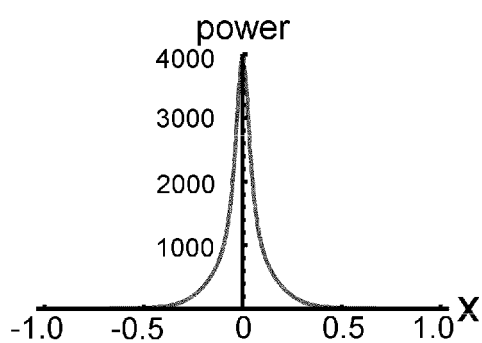


FIG. 4E

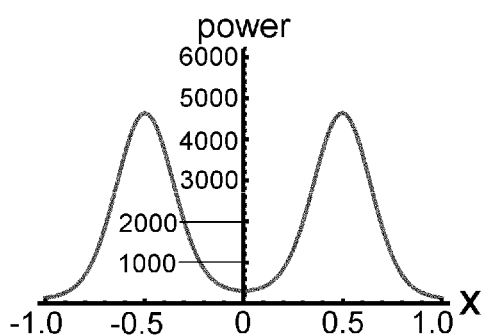


FIG. 5A

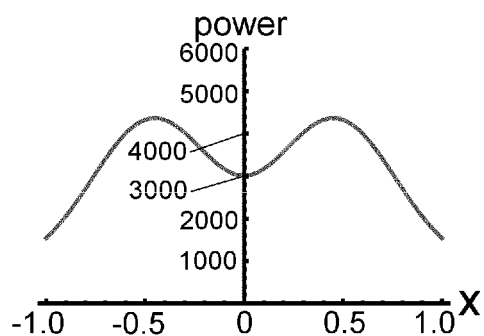


FIG. 5B

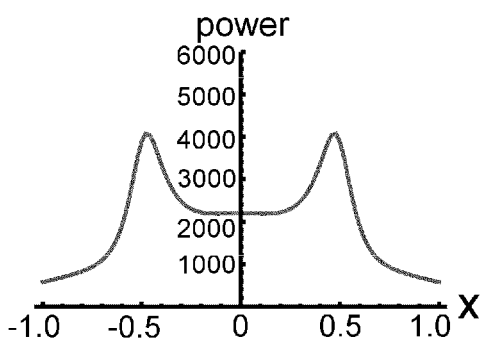


FIG. 5C

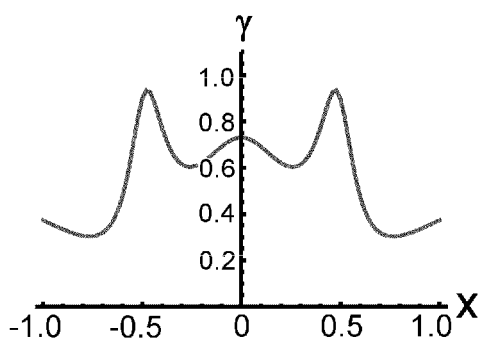


FIG. 5D

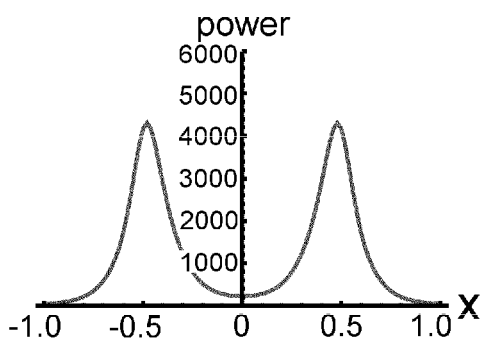


FIG. 5E

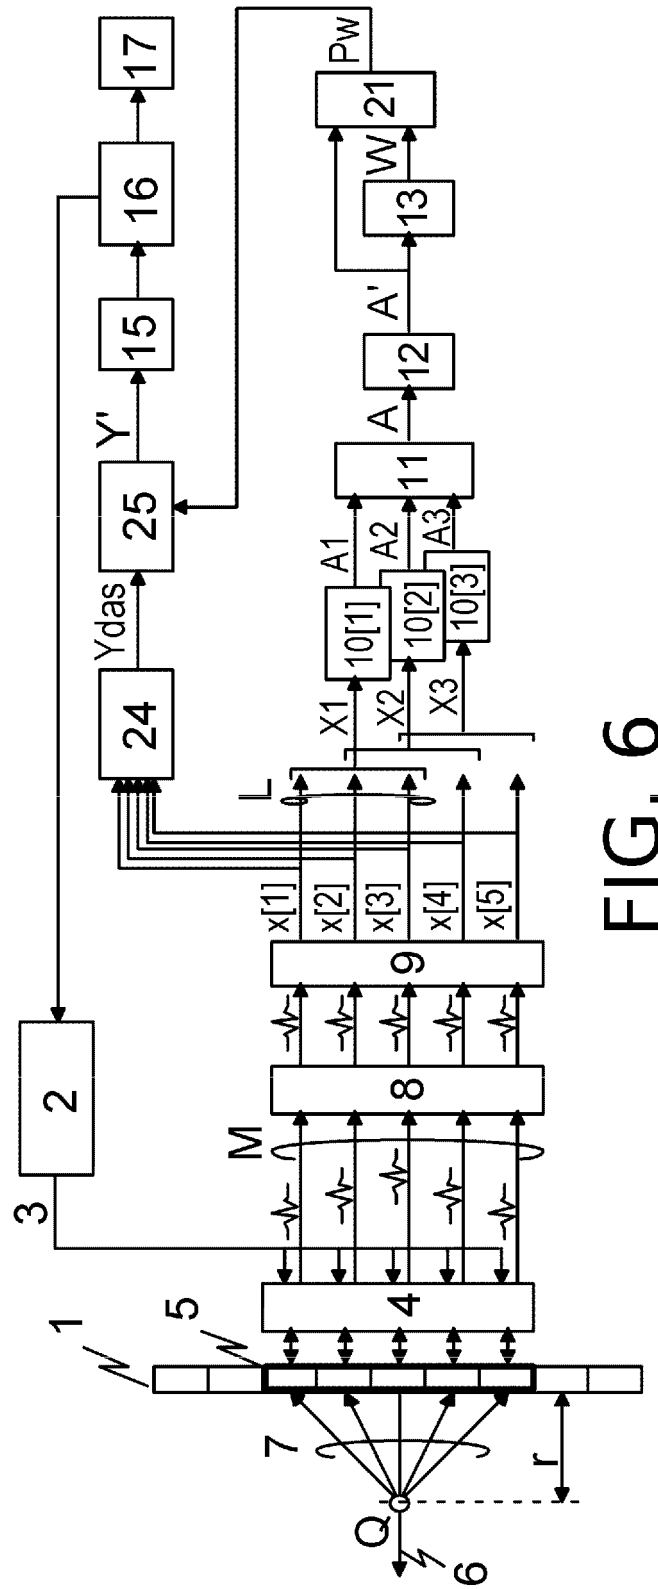


FIG. 6

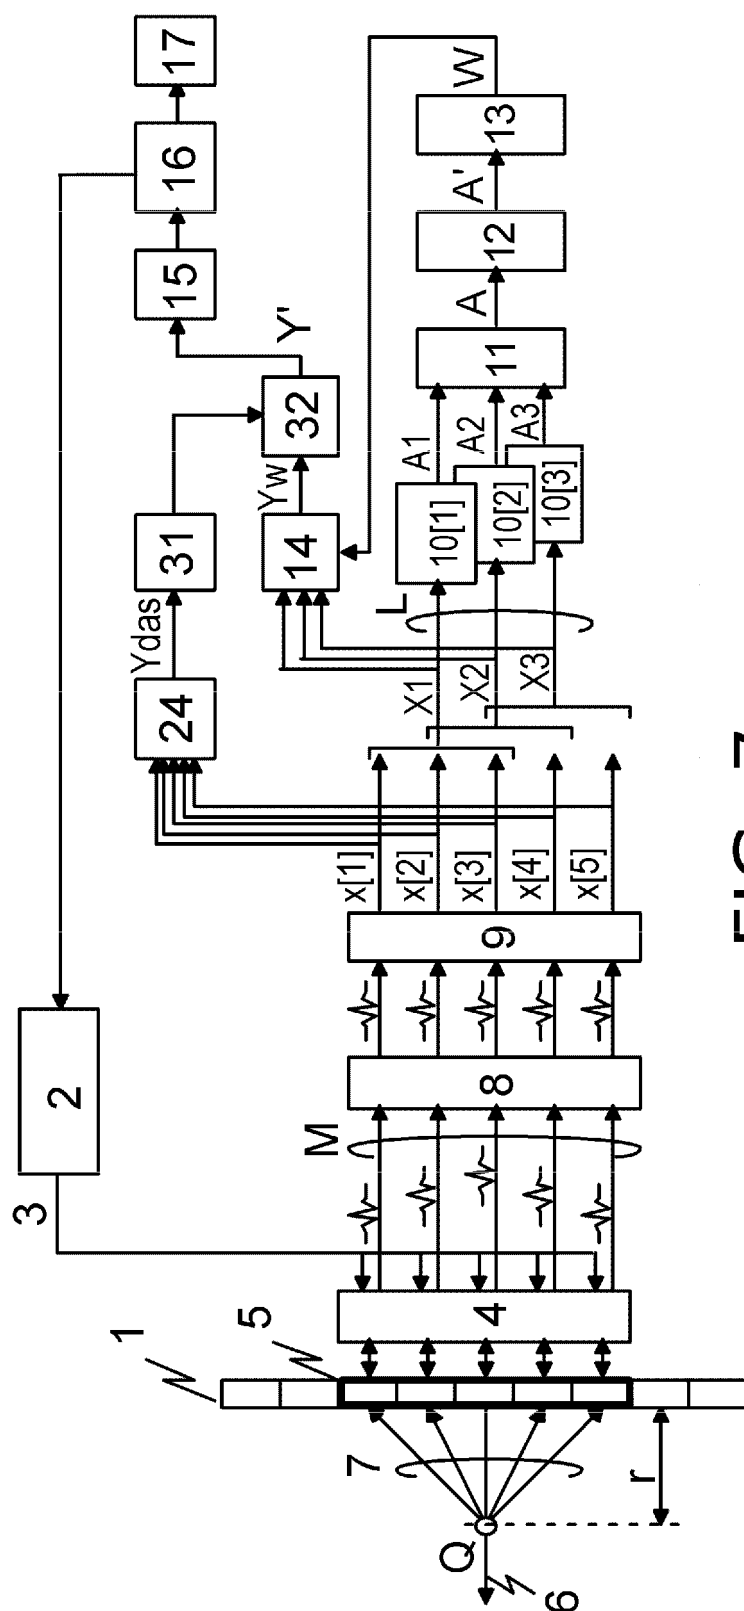


FIG. 7


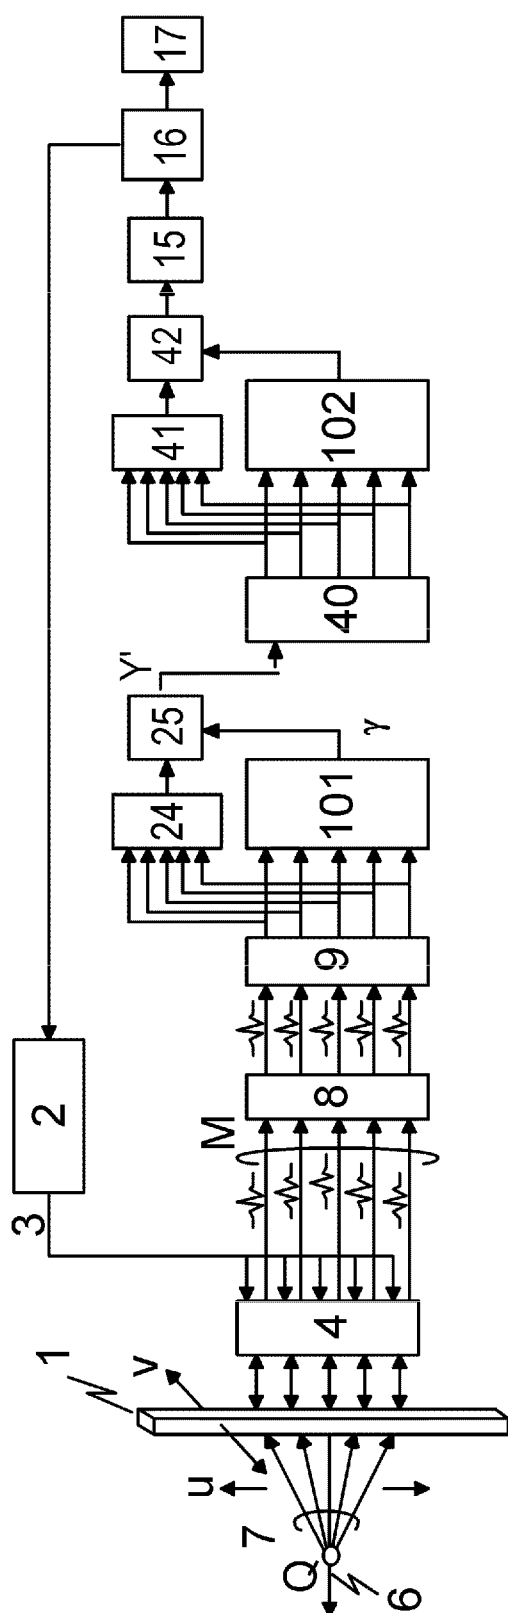


FIG. 8

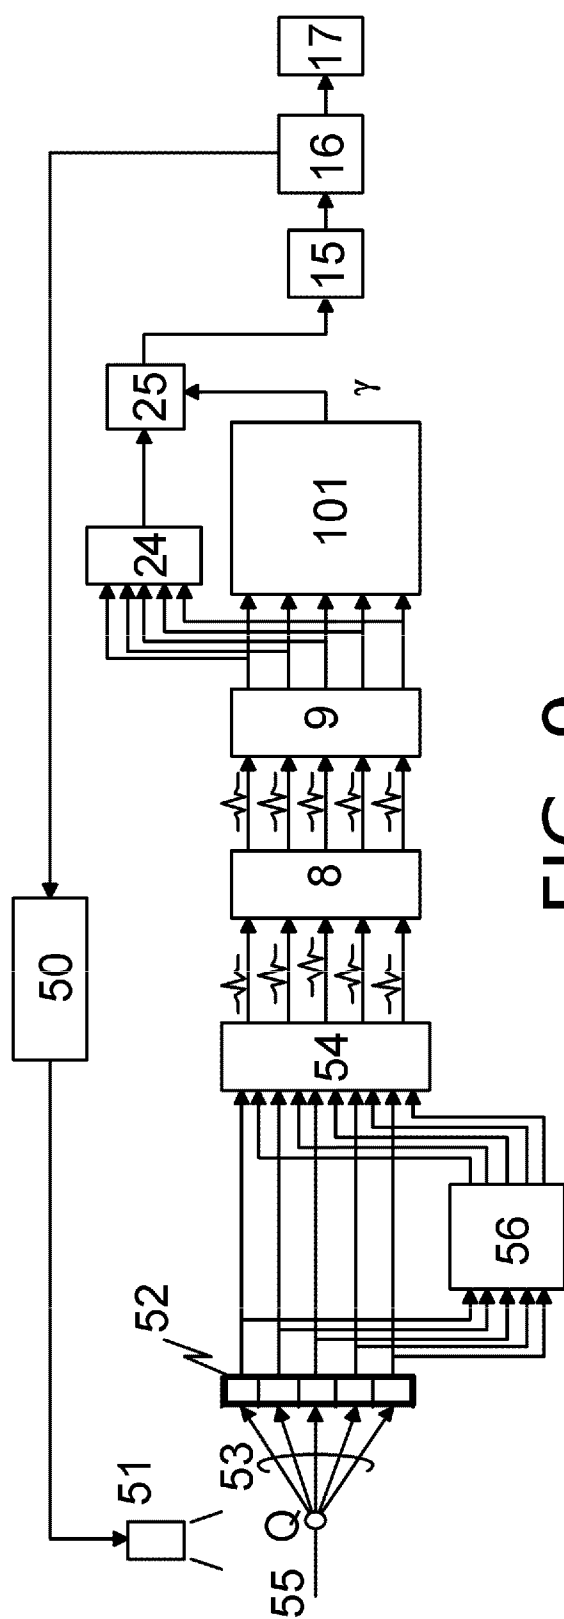

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20030065262 A [0005]
- US 6798380 B [0005]
- JP 2010200926 A [0005]

Non-patent literature cited in the description

- **J. F. SYNNEVAG et al.** Adaptive Beamforming Applied to Medical Ultrasound Imaging. *IEEE Trans. ULTRASONIC, FERROELECTRICS, AND FREQUENCY CONTROL*, August 2007, vol. 54 (8 [0003] [0006]
- **ASL B M et al.** Minimum variance beamforming combined with adaptive coherence weighting applied to medical ultrasound imaging. *IEEE TRANSACTIONS ON ULTRASONICS, FERROELECTRICS AND FREQUENCY CONTROL*, September 2009, vol. 56 (9), 1923-1931 [0007]

专利名称(译)	用于超声成像的超声成像设备和方法		
公开(公告)号	EP2700976B1	公开(公告)日	2019-03-13
申请号	EP2013180189	申请日	2013-08-13
[标]申请(专利权)人(译)	佳能株式会社		
申请(专利权)人(译)	佳能株式会社		
当前申请(专利权)人(译)	佳能株式会社		
[标]发明人	YODA HARUO		
发明人	YODA, HARUO		
IPC分类号	G01S7/52 G01S15/89 G10K11/34 A61B5/00 A61B8/00 A61B8/08		
代理机构(译)	TBK		
优先权	2012183971 2012-08-23 JP		
其他公开文献	EP2700976A1		
外部链接	Espacenet		

摘要(译)

提供一种超声成像设备，包括：多个接收元件（5），其接收从物体（Q）传播的声波（7），并且将声波（7）转换为接收信号；自适应波束形成器（8-13），其根据使用接收信号的接收信号执行调整接收方向性的自适应波束形成；延迟求和波束形成器（8,9,24），其在使用接收信号时执行具有预设方向性的延迟求和波束形成；幅度调制器（25），其使用自适应波束形成器（8-13）和延迟求和波束形成器（8,9,24）之一的一个输出信号，对另一个的输出信号执行幅度调制。波束形成器；发生器（15,16），基于由振幅调制器（25）输出的信号，在物体内部产生图像数据。

$$X_j[t] = \begin{pmatrix} x[j,t] \\ x[j+1,t] \\ \vdots \\ x[j+L-1,t] \end{pmatrix}, \quad j=1,2,\dots,M-L+1 \quad (1)$$