



(11) **EP 1 795 952 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
13.06.2007 Bulletin 2007/24

(51) Int Cl.:
G02F 1/13357^(2006.01) G02F 1/13^(2006.01)
G02B 5/00^(2006.01)

(21) Application number: **06256261.6**

(22) Date of filing: **08.12.2006**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK YU

- **Kim, Tae Soo**
c/o Legal & IP Team
Yongin-si
Gyeonggi-do (KR)
- **Bae, Kyu Han**
c/o Legal & IP Team
Yongin-si
Gyeonggi-do (KR)
- **Han, Kyu Seob**
c/o Legal & IP Team
Yongin-si
Gyeonggi-do (KR)

(30) Priority: **08.12.2005 KR 20050119868**


(71) Applicant: **Samsung SDI Co., Ltd.**
Suwon-si,
Gyeonggi-do (KR)

(74) Representative: **Mouteney, Simon James**
Marks & Clerk
90 Long Acre
London WC2E 9RA (GB)

(72) Inventors:
• **Kim, Sung Hwan**
c/o Legal & IP Team
Yongin-si
Gyeonggi-do (KR)

(54) **Portable display device**

(57) A portable display device including a liquid crystal display panel (108), a backlight assembly having a light source for supplying light to the liquid crystal display panel, a mold frame (116) included in the backlight assembly, the mold frame formed with a step unit such that the liquid crystal display panel can be mounted in the mold frame, and a light fence (105) located in the step unit, the light fence screening light supplied from the light source to the liquid crystal display panel.

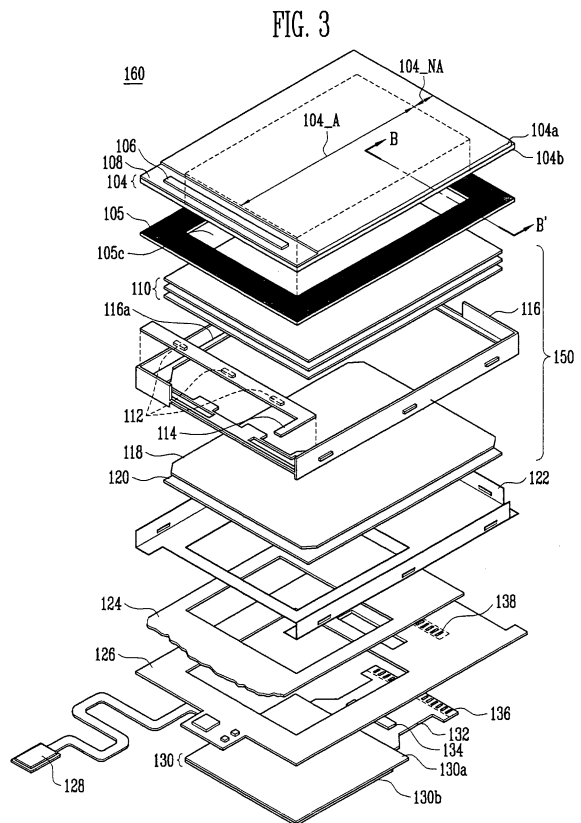

EP 1 795 952 A1

Description

BACKGROUND

1. Field of the Invention

[0001] The present invention relates to a portable display device, and more particularly to a portable display device having improved light leakage prevention.

2. Discussion of Related Art

[0002] Recently, various flat panel display devices have been developed having reduced weight and size. Exemplary flat panel display devices include a liquid crystal display, a field emission display, a plasma display panel, a light emitting display, etc.

[0003] Liquid crystal displays in particular have become popular as an alternative to cathode ray tubes due to their small size, light weight, and low power consumption. Such devices may be used in large-sized monitors and televisions as well as mobile phones and personal digital assistants (PDAs).

[0004] FIG. 1 is an exploded prospective view of a conventional portable display device. FIG. 1 shows a dual display device used in a mobile phone and the like and mounted with at least one liquid crystal display. FIG. 2 is an assembled sectional view taken along line A-A' of FIG. 1.

[0005] Referring to FIGs. 1 and 2, the conventional portable display device 60 includes a liquid crystal display panel 4, a backlight assembly 50, a bottom chassis 22, a first printed circuit board 24, a second printed circuit board 26, and a light-emitting display panel 30.

[0006] The liquid crystal display panel 4, displays predetermined images using a first substrate 4a, a second substrate 4b and a liquid crystal (not shown) injected between the first substrate 4a and the second substrate 4b.

[0007] The second substrate 4b includes a plurality of thin film transistors (TFT) arranged in matrix form. A source electrode of the TFT is connected to a data line, and a gate electrode thereof is connected to a scan line. A drain electrode of the TFT is connected to a pixel electrode made of transparent indium tin oxide (ITO), a conductive material. The TFTs are turned on when the scan line is supplied with a scan signal, and the TFTs supply a data signal from the data line to the pixel electrode.

[0008] An integrated circuit 6 is inserted on one side of the second substrate 4b, and the data signal and scan signal are supplied from the integrated circuit 6. A protective layer 8 is deposited around the integrated circuit 6.

[0009] The first substrate 4a is arranged facing the second substrate 4b. A common electrode made of ITO is deposited on the front surface of the first substrate 4a. The common electrode is applied with a predetermined voltage, and accordingly a predetermined electric field is generated between the common electrode and the pixel electrode. The array angle of the liquid crystal injected

between the first substrate 4a and the second substrate 4b varies with the electric field, and the optical transparency also varies according to the array angle to thereby display desired images. Upper and lower polarized light films (not shown) are provided in the upper and lower sides of the liquid crystal display panel 4.

[0010] The backlight assembly 50 includes a mold frame 16, LEDs 12, an LED substrate 14, a light guide plate 18, a reflective plate 20 and optical sheets 10.

10 [0011] The LEDs 12 emit an amount of light corresponding to a drive signal from the LED substrate 14. The light guide plate 18 supplies the light from the LEDs 12 to the liquid crystal display panel 4. That is, the light guide plate 18 supplies the light from its side surface to the liquid crystal display panel 4 located on its upper side.

15 [0012] The reflective plate 20 arranged on a back surface of the light guide plate 18 supplies incidence light from the light guide plate 18 back to the light guide plate 18. The optical sheets 10 enhance the brightness of light from the light guide plate 18 to supply the enhanced light to the liquid crystal display panel 4.

20 [0013] The LED substrate 14, which is connected to the first printed circuit board 24, supplies the drive signal to the LEDs 12 corresponding to control signal from the first printed circuit board 24. The LED substrate 14 mounted with LEDs 12 is received and fixed in the mold frame 6. Additionally, the liquid crystal display panel 4 and backlight assembly 50 are fixed and supported in the mold frame 16.

25 [0014] The bottom chassis 22 is fixed to the mold frame 16 on the lower side thereof. An opening is formed in a portion of the bottom chassis 22 such that a light emitting display panel 30 may be inserted therein.

30 [0015] The second printed circuit board 26 is supplied with a drive signal from a drive circuit (not shown) located in the mobile phone side by a mobile phone connector 28. The mobile phone connector 28 is fixed to another connector attached to the drive circuit located in the mobile phone side to be supplied with the drive signal from the drive circuit in the mobile phone side. The second printed circuit board 26 supplied with the drive signal generates various control signals corresponding to the drive signal.

35 [0016] The first printed circuit board 24 is connected to the second printed circuit board 26 through a first pad unit 38 formed in the second printed circuit board 26. The first printed circuit board 24 is connected to the integrated circuit 6 of the liquid crystal display panel 4 and LED substrate 14 by a flexible printed circuit board (not shown). The first printed circuit board 24 connected to the integrated circuit 6 and LED substrate 14 drives the integrated circuit 6 and LED substrate 14 corresponding to the control signals supplied from the second printed circuit substrate 26.

40 [0017] The light emitting display panel 30 includes a first substrate 30a and a second substrate 30b. Organic LEDs (not shown) are arranged on the first substrate 30a in matrix form. Organic LEDs generate a predetermined

amount of light corresponding to the amount of current supplied. The light emitting display panel 30 is connected to the second printed circuit board 26 by the second pad unit 36 of the flexible printed circuit board 32. An integrated circuit 34 is mounted on the flexible printed circuit board 32. The integrated circuit 34 allows the light emitting display panel 30 to display a predetermined image in response to the control signals supplied from the second printed circuit board 26.

[0018] However, the conventional portable display device 60 may allow light to leak into an undesired region. More specifically, since the light supplied from the backlight assembly 50 is emitted to the non-pixel regions of liquid crystal display panel 4, the light efficiency and the image quality of the conventional portable display device deteriorate. In addition, as shown in FIG.2, if debris P enters the backlight assembly 50 through a space between the liquid crystal display panel 4 and the mold frame 16, light is blocked and the image quality further deteriorate. Further, conventional portable display devices 60 have relatively weak mold frames since the panel 4 is mounted to and supported by the mold frame 16.

SUMMARY OF THE INVENTION

[0019] The present invention sets out to provide a portable display device which helps to enhance the light efficiency and to prevent light leakage. Additionally, the present invention sets out to provide a portable display device which helps to enhance the connection between the liquid crystal display panel and the mold frame and to prevent debris from entering the backlight assembly.

[0020] A first aspect of the invention provides a portable display device as set out in Claim 1. Preferred features are set out in Claims 2 to 9.

[0021] A second aspect of the invention provides a light fence for a display device as set out in Claim 10.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] Embodiments of the invention will be described, by way of example only, and with reference to the following drawings in which:-

[0023] FIG. 1 is an exploded prospective view of a conventional portable display device.

[0024] FIG. 2 is an assembled sectional view taken along line A-A' of FIG. 1.

[0025] FIG. 3 is an exploded prospective view of a portable display device having a light fence according to a first embodiment of the present invention.

[0026] FIG. 4 is an assembled sectional view taken along line B-B' of FIG. 3.

[0027] FIGS. 5A and 5B are perspective views of one side and its opposite side of a light fence according to the first embodiment of the present invention.

[0028] FIG. 6 is a sectional view of the application of the light fence according to a second embodiment of the present invention

[0029] FIGs. 7A and 7B are perspective views of one side and its opposite side of a light fence according to the second embodiment of the present invention.

DETAILED DESCRIPTION

[0030] Referring to FIGs. 3, 4, 5A and 5B, a portable display device 160 according to a first embodiment of the present invention includes a liquid crystal display panel 104, a backlight assembly 150, a bottom chassis 122, a first printed circuit board 124, a second printed circuit board 126, a light-emitting display panel 130, and a light fence 105 placed between the liquid crystal display panel 104 and the backlight assembly 150.

[0031] The liquid crystal display panel 104, displays predetermined images and includes a first substrate 104a, a second substrate 104b and a liquid crystal (not shown) injected between the first substrate 104a and the second substrate 104b.

[0032] The second substrate 104b includes a plurality TFTs arranged in matrix form. A source electrode of the TFT is connected to a data line, and a gate electrode thereof is connected to a scan line. A drain electrode of the TFT is connected to a pixel electrode made of transparent ITO. The TFTs are turned on when the scan line is supplied with a scan signal, and the TFTs supply a data signal from the data line to the pixel electrode.

[0033] An integrated circuit 106 is inserted on one side of the second substrate 104b, and the data signal and scan signal are supplied from the integrated circuit 106. A protective layer 108 is deposited around the integrated circuit 106.

[0034] The first substrate 104a is arranged facing the second substrate 104b. A common electrode made of ITO is applied on the front surface of the first substrate 104a. The common electrode is applied with a predetermined voltage, generating a predetermined electric field between the common electrode and the pixel electrode. The array angle of the liquid crystal injected between the first substrate 104a and the second substrate 104b varies with the electric field, and the optical transparency varies according to the array angle to thereby display desired images. Upper and lower polarized light films (not shown) are provided in the upper and lower sides, respectively, of the liquid crystal display panel 104.

[0035] The backlight assembly 150 includes a mold frame 116, LEDs 112, a LED substrate 114, a light guide plate 118, a reflective plate 120 and optical sheets 110.

[0036] The LEDs 112 emit a predetermined amount of light corresponding to a drive signal from the LED substrate 114. The light guide plate 118 supplies the light from the LEDs 112 to the liquid crystal display panel 104.

[0037] The reflective plate 120 which is arranged in the back surface of the light guide plate 118 supplies the incidence light from the light guide plate 118 back to the light guide plate 118 to improve optical efficiency.

[0038] The first optical sheets 110 enhance the uniformity and brightness of light from the light guide plate

118 to supply the enhanced light to the liquid crystal display panel 104.

[0039] The LED substrate 114 which is connected to the first printed circuit board 124 supplies the drive signal to the LEDs 112 corresponding to the control signal from the first printed circuit board 124.

[0040] The LED substrate 114 mounted with LEDs 112 is fixed to the mold frame 116. Additionally, the liquid crystal display panel 104 and backlight assembly 150 are fixed and supported by the mold frame 116. A step unit 116a for receiving the liquid crystal display panel 104 is formed on the inner side surface of the mold frame 116.

[0041] The bottom chassis 122 is fixed to the mold frame 116 underneath the mold frame. An opening is formed in a portion of the bottom chassis 122 such that a light emitting display panel 130 may be inserted therein.

[0042] The second printed circuit board 126 is supplied with a drive signal from a drive circuit (not shown) located in the mobile phone side by a mobile phone connector 128. The mobile phone connector 128 is fixed to another connector attached to the drive circuit located in the mobile phone side to be supplied with the drive signal from the drive circuit. The second printed circuit board 126 supplied with the drive signal generates various control signals corresponding to the drive signal.

[0043] The first printed circuit board 124 is connected to the second printed circuit board 126 through a first pad unit 138 formed in the second printed circuit board 126. The first printed circuit board 124 is connected to the integrated circuit 106 of the first liquid crystal display panel 104 and LED substrate 114 by a flexible printed circuit board (not shown). The first printed circuit board 124 connected to the integrated circuit 106 and LED substrate 114 drives the integrated circuit 106 and LED substrate 114 corresponding to the control signals supplied from the second printed circuit substrate 126.

[0044] The light emitting display panel 130 includes a first substrate 130a and a second substrate 130b. Organic LEDs (not shown) are arranged on the first substrate 130a in matrix form. The organic LEDs generate a predetermined amount of light corresponding to the amount of current supplied. The light emitting display panel 130 is connected to the second printed circuit board 126 by the second pad unit 136 of the flexible printed circuit board 132. An integrated circuit 134 is mounted on the flexible printed circuit board 132. The integrated circuit 134 lets the light emitting display panel 130 display a predetermined image in response to the control signals supplied from the second printed circuit board 126.

[0045] A light fence 105 is provided between the liquid crystal display panel 104 and the backlight assembly 150. For example, the light fence 105 may be placed on the step unit 116a of the mold frame 116 mounted with the liquid crystal display panel 104. In this case, the light fence 105 is placed between the liquid crystal display panel 104 and optical sheets 110 as shown in FIG. 4. Both sides of the light fence 105 may be opaque to increase the efficiency of the light fence 105 superimposed

on the non-pixel region 104_NA of the liquid crystal display panel 104 while surrounding the perimeter of the back surface of the liquid crystal display panel 104. An opening is formed in a predetermined part of the light fence 105 corresponding to the pixel region 104_A of the liquid crystal display panel 104. Thus, it is possible to prevent the light from being emitted into the non-pixel region 104_NA, thereby improving the image quality.

[0046] In addition, the light fence 105 may enhance the connection between the liquid crystal display panel 104 and the mold frame 116 since the light fence 105 is made of an adhesive member such as double-sided tape. The light fence 105 is attached with an inner opening to the liquid crystal panel 104 so that it surrounds the entire perimeter of the panel 104. For example, the light fence 105 may be attached in the shape of a flattened rectangular border frame to be superimposed on the non-pixel region 104_NA. When the light fence 105 is attached with an inner enclosed structure to the panel 104, debris P' is effectively screened from entering the backlight assembly 150. More specifically, although the debris P' may enter the space between the liquid crystal display panel 104 and the side surface of the mold frame 116, it is difficult for the debris to enter the backlight assembly 150 due to the light fence 105 formed of double-sided tape. Thus, it is possible to prevent image quality from being deteriorated due to the inflow of debris.

[0047] In an alternate embodiment as shown in FIGs. 6, 7A and 7B, the color of both sides of the light fence 105 may be different from each other to raise the brightness of pixel region 104_A by increasing the light efficiency. More specifically, a first surface 105a' of the light fence 105' may be opaque, such as black, and a second surface 105b' of the light fence 105' may be white or silver. However, the color of the second surface 105b' of the light fence 105' is not limited to white or silver, but may be any color.

[0048] The principle of preventing light leakage into the non-pixel region 104_NA by the light fence will be described below using the display device of FIG 4, but with the light fence embodiment shown in FIGs. 6, 7A and 7B.

[0049] A light leak occurs if light from the backlight assembly 150 is emitted into the non-pixel region 104_NA. For example, light leakage can occur when light is emitted from the LEDs 112 via the light sheets 110 to the non-pixel region 104_NA between the liquid crystal display panel 104 and the mold frame 116. When the light fence 105' is placed between the liquid crystal display panel 104 and the step unit 116a of mold frame 116, the first surface 105a' of light fence 105' being opaque and the second surface 105b' being a reflective color such as white or silver, light which directed to the non-pixel region 104_NA is reflected by the second surface 105b' of light fence 105' and is directed via the optical sheets 110 to the light guide plate 118. Thus, most of light supplied to the light guide plate 118 is supplied to the pixel region 104_A of the liquid crystal display panel 104. As such,

directing light into the pixel region 104_A instead of the non-pixel region 104_NA prevents light leakage and raises the light efficiency, improving the brightness of the pixel region 104_A. In addition, setting up the first surface 105a' of the light fence 105' as opaque reduces future light leaks. The second display panel may be set up as a light-emitting display panel 130, for instance, a liquid crystal display panel. In this case, light reflected from the light fence 105' to the light guide plate 118 is supplied to the second display panel, thus enhancing the brightness of the second display panel.

[0050] As described above, a portable display device according to the present invention may prevent light leakage and enhance light efficiency, improving image quality. In one embodiment, a light fence is placed between a liquid crystal display panel and the backlight assembly. In addition, a portable display device according to the present invention may enhance the connection between a liquid crystal display panel and a mold frame to prevent the deterioration of image quality due to debris by forming the light fence with an adhesive member such as double-sided tape.

[0051] Although embodiments of the present invention have been shown and described, it will be appreciated by those skilled in the art that changes might be made to these embodiments without departing from the principles of the invention, the scope of which is defined in the claims and their equivalents.

Claims

1. A portable display device comprising:
 - a display panel;
 - a backlight assembly having a light source for supplying light to the display panel and having a mold frame with a periphery step platform; and
 - a light fence mounted on the periphery step platform, the light fence supporting the display panel and screening at a periphery of the backlight assembly light supplied from the light source.
2. A portable display device as claimed in claim 1, wherein the light fence is superimposed over a non-pixel region of the display panel.
3. A portable display device as claimed in claim 1 or 2, wherein the light fence has an inner opening corresponding to a pixel region of the display panel.
4. A portable display device as claimed in any preceding claim , wherein the display panel is located on a first side of the light fence, and wherein at least one optical sheet is located on a second side of the light fence.
5. A portable display device as claimed in any preceding claim , wherein the light fence has a first planar surface; and a second planar surface; wherein the first planar surface and the second planar surface are opaque.
6. A portable display device as claimed in any one of claims 1 to 4, wherein the light fence has a first planar surface and a second planar surface; and wherein the first planar surface is a first color; and the second planar surface is a second color.
7. A portable display device as claimed in claim 6, wherein the first planar surface of the light fence is opaque, and the second planar surface is reflective.
8. A portable display device as claimed in any preceding claim , wherein the light fence is formed from double-sided tape.
9. A portable display device as claimed in any preceding claim , wherein the display panel is a liquid crystal display panel.
10. A light fence for a display device, the display device having a display panel with both a display area and a non-display area and a backlight assembly having a light source for supplying light to the display panel and having a mold frame with a periphery step platform, the light fence comprising:
 - a planar frame sized to conform to the display area and having an inner through-hole sized to correspond to at least a portion of the non-display area, the planar frame being mountable on the step unit and having a first planar surface and a second planar surface, both the first planar surface and the second planar surface being opaque, or the first planar surface being opaque and the second planar surface being reflective.

FIG. 1
(PRIOR ART)

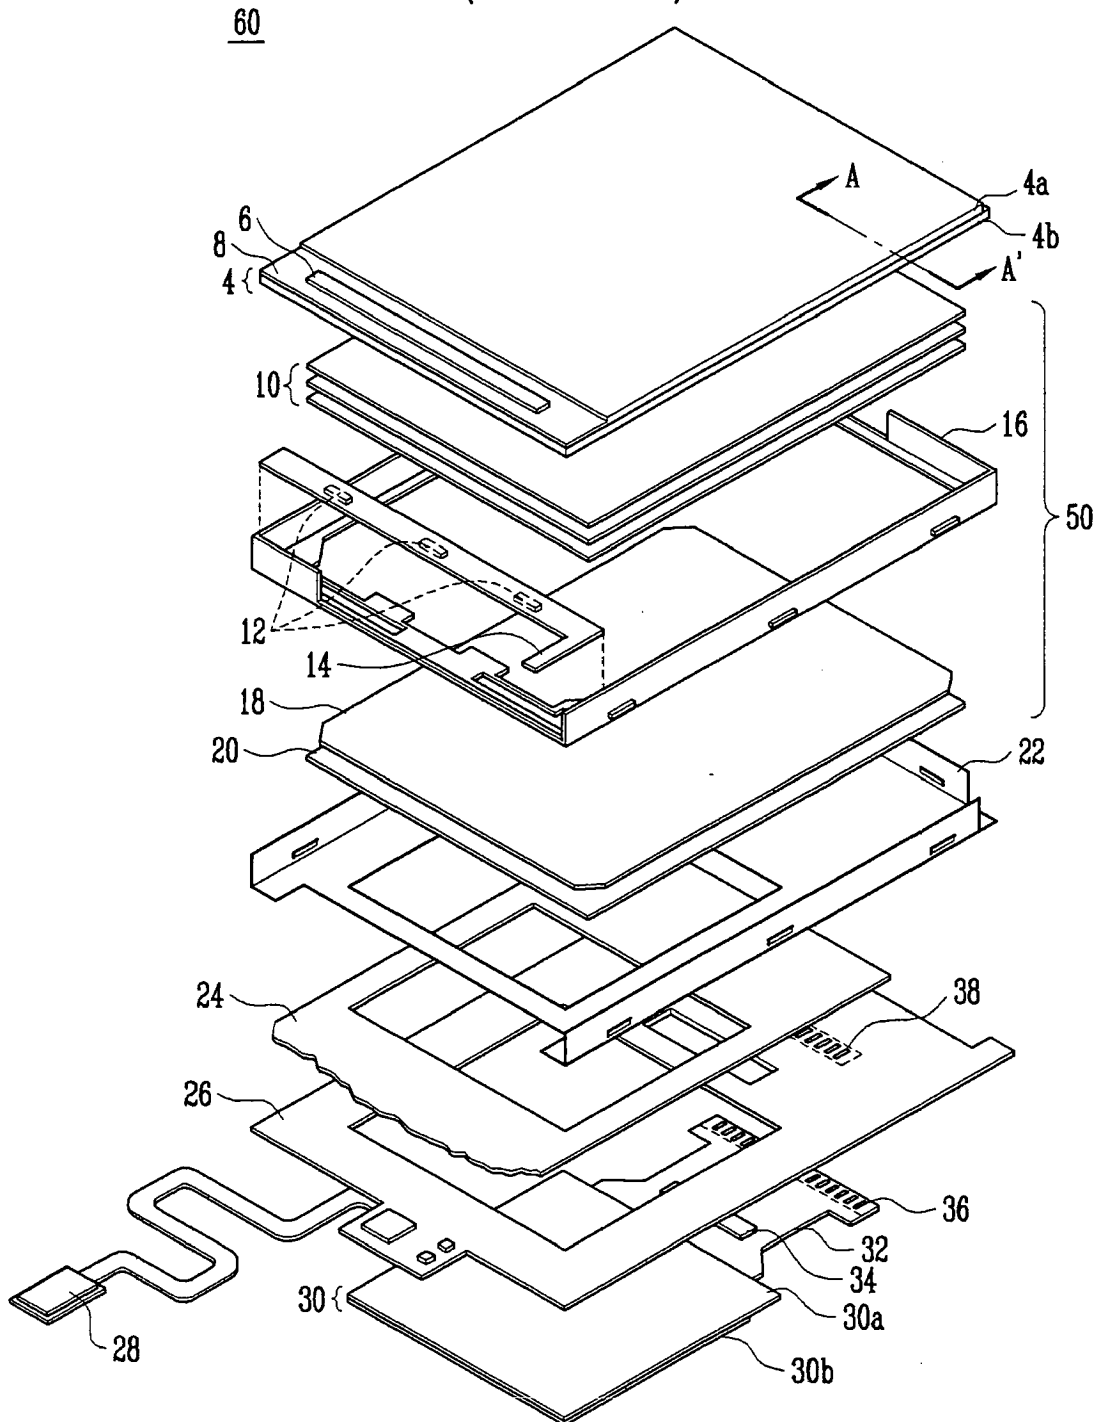


FIG. 2
(PRIOR ART)

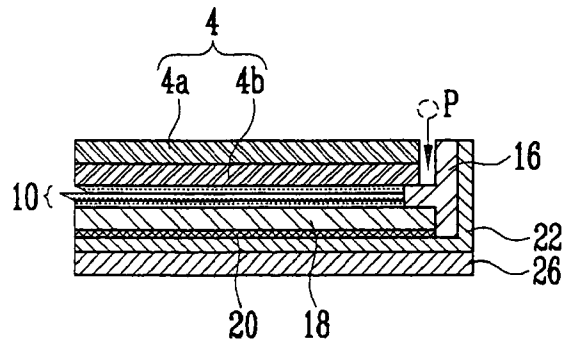


FIG. 3

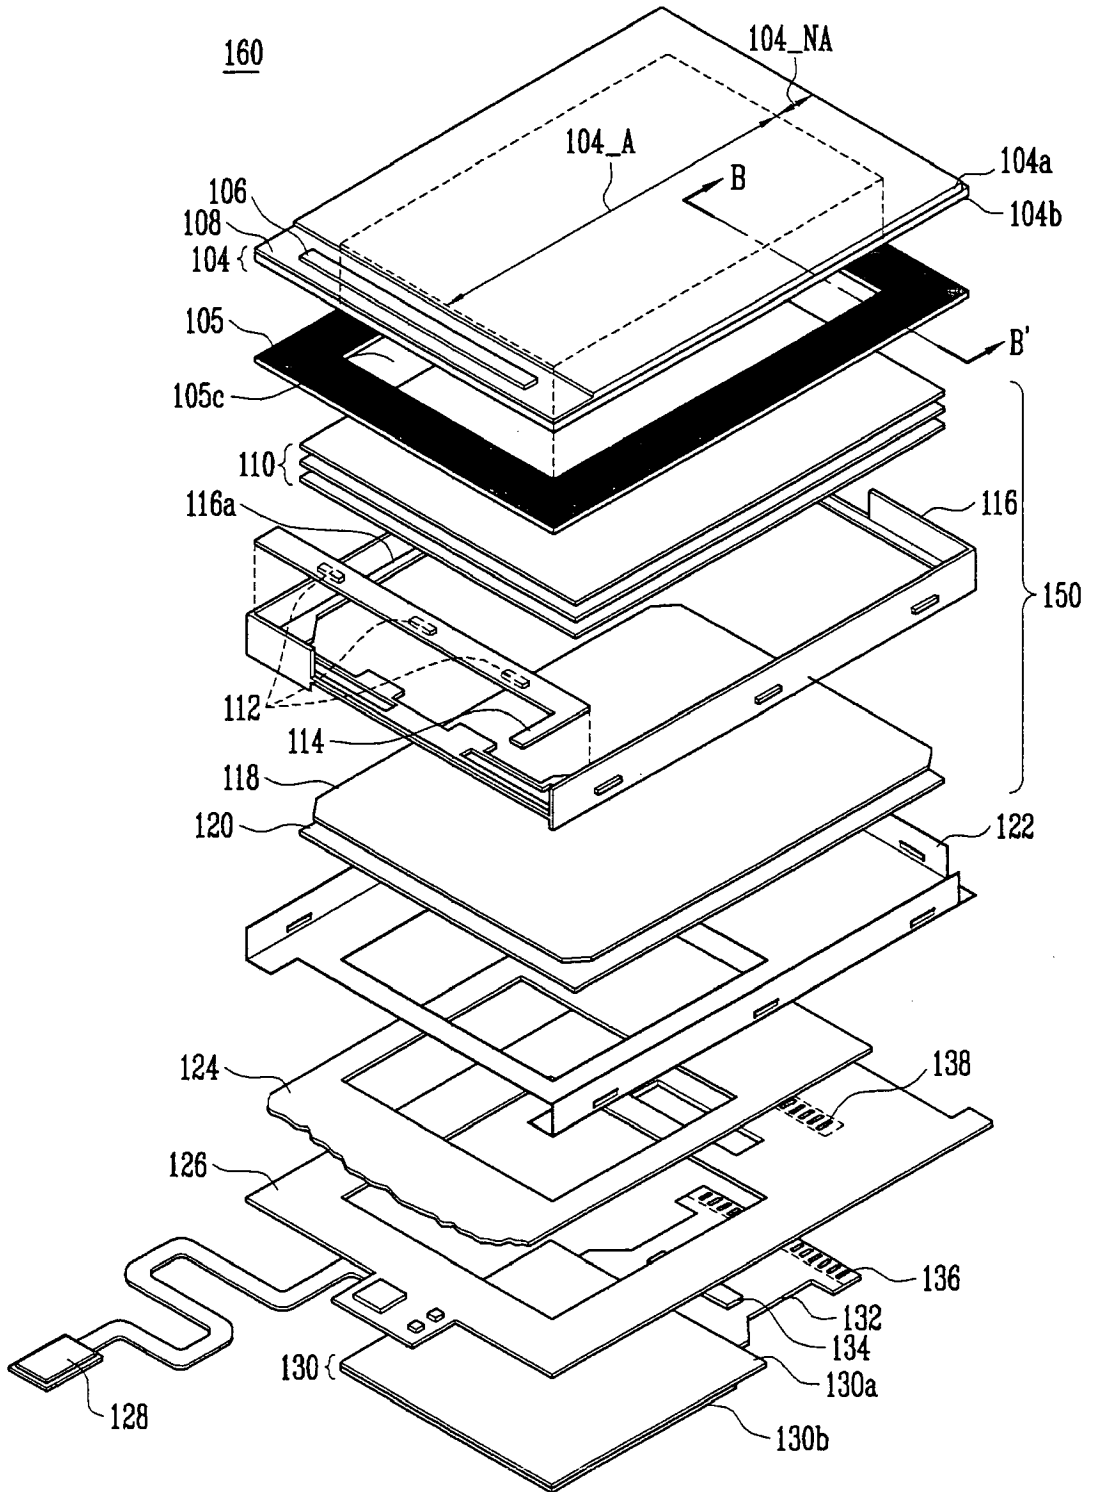


FIG. 4

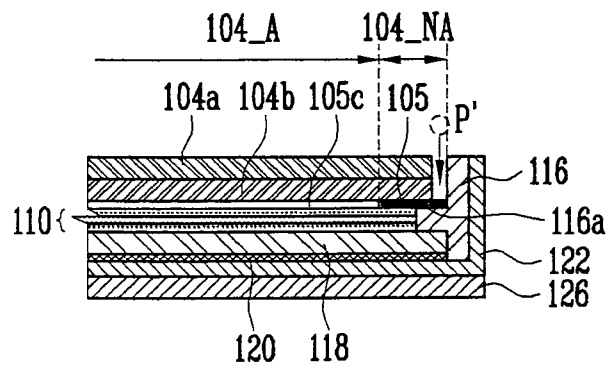


FIG. 5A

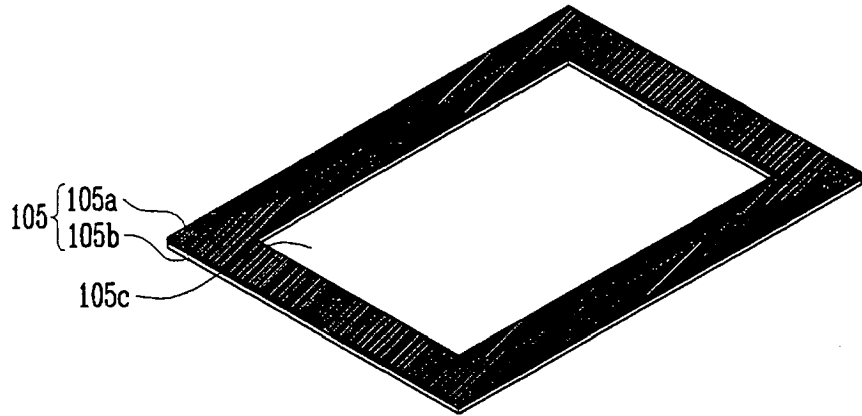


FIG. 5B

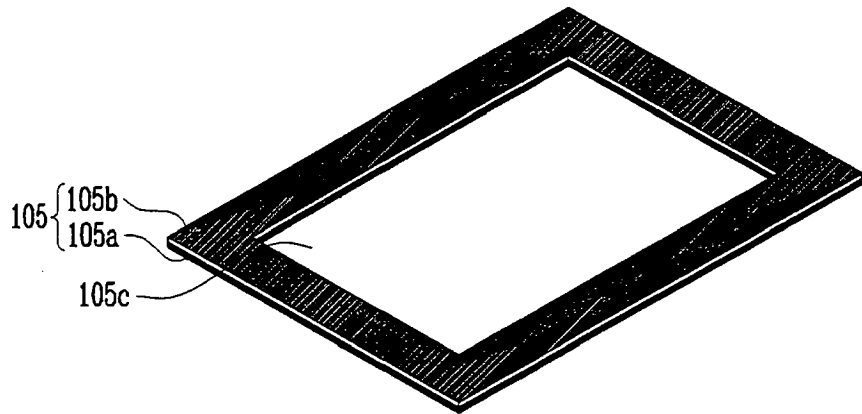


FIG. 6

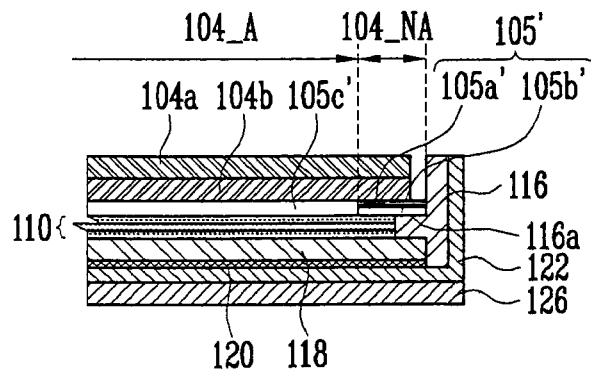


FIG. 7A


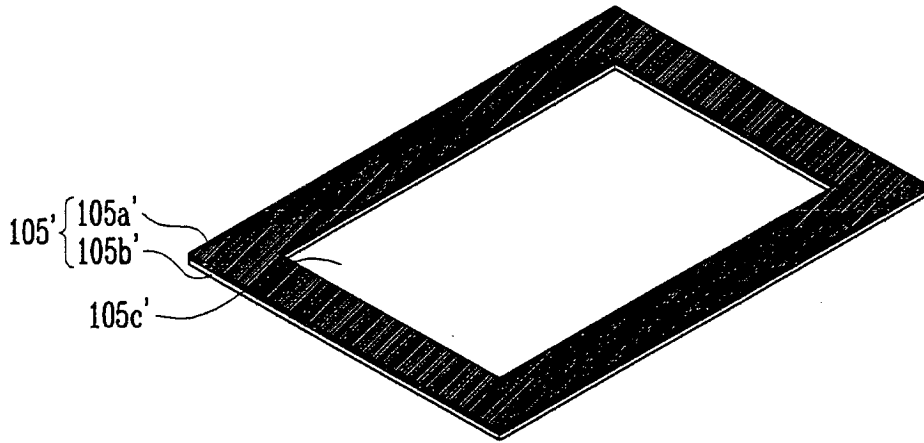


FIG. 7B



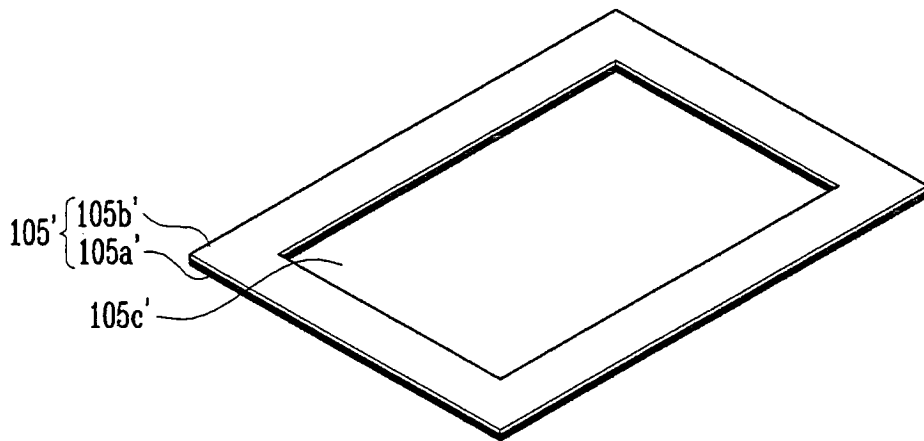

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	JP 2002 098945 A (SEIKO EPSON CORP) 5 April 2002 (2002-04-05)	1-6,8-10	INV. G02F1/13357 G02F1/13 G02B5/00
Y	* abstract * * figures 1,3,5,6 *	7	
X	JP 2005 024774 A (OPTREX CORP) 27 January 2005 (2005-01-27)	1-4,9,10	
X	JP 2004 354796 A (OPTREX KK) 16 December 2004 (2004-12-16)	1-4,9,10	
Y	JP 2004 062060 A (SONY CORP) 26 February 2004 (2004-02-26)	7	
A	JP 2002 040954 A (YOSHIDA INDUSTRY CO) 8 February 2002 (2002-02-08)	1	TECHNICAL FIELDS SEARCHED (IPC) G02F
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 2 May 2007	Examiner Gill, Richard
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 25 6261

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-05-2007

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 2002098945	A	05-04-2002	NONE	

JP 2005024774	A	27-01-2005	NONE	

JP 2004354796	A	16-12-2004	NONE	

JP 2004062060	A	26-02-2004	NONE	

JP 2002040954	A	08-02-2002	NONE	

EPC FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

专利名称(译)	便携式显示设备		
公开(公告)号	EP1795952A1	公开(公告)日	2007-06-13
申请号	EP2006256261	申请日	2006-12-08
申请(专利权)人(译)	三星SDI CO. , LTD.		
当前申请(专利权)人(译)	三星SDI CO. , LTD.		
发明人	KIM, SUNG HWAN C/O LEGAL & IP TEAM KIM, TAE SOO C/O LEGAL & IP TEAM BAE, KYU HAN C/O LEGAL & IP TEAM HAN, KYU SEOB C/O LEGAL & IP TEAM		
IPC分类号	G02F1/13357 G02F1/13 G02B5/00		
CPC分类号	G02F1/133608 G02F1/133512 G02F2001/133317 G02F2001/133388		
优先权	1020050119868 2005-12-08 KR		
外部链接	Espacenet		

摘要(译)

一种便携式显示装置，包括液晶显示面板（108），具有用于向液晶显示面板提供光的光源的背光组件，包括在背光组件中的模框（116），形成有台阶的模框单元使得液晶显示面板可以安装在模框中，并且光栅（105）位于台阶单元中，光栅屏蔽光从光源提供给液晶显示面板。

