



(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.09.2009 Bulletin 2009/36

(51) Int Cl.:
G02F 1/1343 (2006.01) **G02F 1/1335** (2006.01)
G02F 1/1362 (2006.01)

(21) Application number: 09001552.0

(22) Date of filing: 28.03.2007

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**
Designated Extension States:
AL BA HR MK RS

(30) Priority: 21.07.2006 JP 2006199667

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
07740092.7 / 2 045 655

(71) Applicant: **Sharp Kabushiki Kaisha**
Osaka-shi, Osaka 545-8522 (JP)

(72) Inventor: **Nishida, Kenji**
Shiga 520-0054 (JP)

(74) Representative: **Müller - Hoffmann & Partner**
Patentanwälte
Innere Wiener Strasse 17
81667 München (DE)


Remarks:

This application was filed on 04-02-2009 as a divisional application to the application mentioned under INID code 62.

(54) Area-division type transreflective active matrix LCD with both IPS and FFS electrode configurations in a pixel

(57) The application discloses an active matrix liquid crystal display which is of the area-division transreflective type. This horizontal electric field switching display can provide a bright display in both reflective and transmissive display modes without having a multi-gap structure. It can also reduce the difference in response time between the reflective and the transmissive regions. The display device of the present invention includes a pair of substrates; a display medium interposed between the substrates; and a pixel having a reflective region for the reflective display mode and a transmissive region for the transmissive display mode, wherein the display device includes a pixel electrode and a common electrode on one of the substrates. A voltage is applied to the display medium between the pixel electrode and the common electrode, each of which is provided with a slit, the slit being the space between the fingers of the comb-shaped electrode portions of the pixel and common electrodes. The pixel electrode is provided with slits only in the reflective region, the pixel electrode being continuous in the transmissive region, whereas the common electrode is provided with slits in both reflective and transmissive regions. Hence, the electrode configurations in the reflective and transmissive regions correspond to IPS (in-plane switching) and FFS (fringe field switching) arrangements respectively. This allows an independent setting of the horizontal electric field in the two regions.

Fig.1

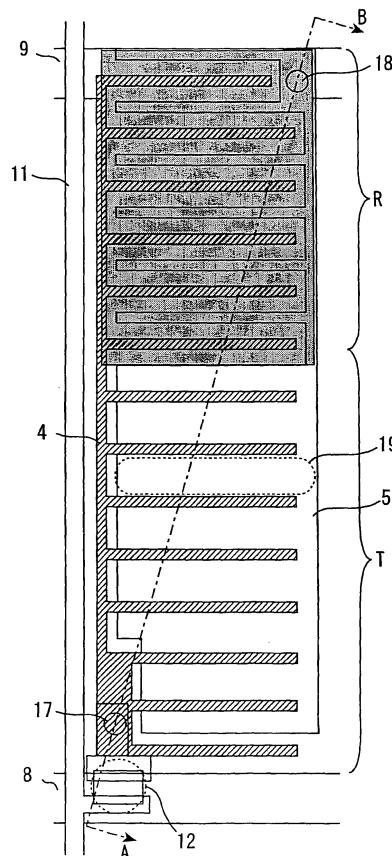

Description

TECHNICAL FIELD

[0001] The present invention relates to a display device. More specifically, the present invention relates to a display device preferably used in a liquid crystal display in accordance with In Plane Switching (IPS) mode or Fringe Field Switching (FFS) mode.

BACKGROUND ART

[0002] Display devices such as a liquid crystal display device have been widely used in electronics such as a monitor, a projector, a cellular phone, and a personal digital assistant (PDA). Reflective, transmissive, and transflective display devices are mentioned as a display type of the liquid crystal display devices. Under relatively dark environments such as indoor environment, the transmissive liquid crystal display device which provides display using light from a backlight is mainly used. Under relatively bright environments such as outdoor environment, the reflective liquid crystal display device which provides display using external light is mainly used. The transflective liquid crystal display device can provide both of transmissive display and reflective display, and mainly provides transmissive display under indoor environments and provides reflective display under outdoor environments. Therefore, such a transflective liquid crystal display device can provide display with high qualities under any environments regardless of indoor or outdoor environments, and it has been widely equipped with mobile equipment such as a cellular phone, a PDA, and a digital camera. According to the transflective liquid crystal display device, for example, a Vertical Alignment (VA) mode is used as display mode. The VA mode is a mode in which a liquid crystal molecule is aligned to be vertical to the substrate surface when a voltage is not applied and display is carried out by tilting the liquid crystal molecule by application of a voltage.

[0003] However, according to the transflective liquid crystal display device, reflective light passes through the liquid crystal layer twice, but transmissive light passes through the liquid crystal layer only once. Therefore, if a cell gap is designed to be optimal for reflective light, the transmittance of the transmissive light is about 1/2 of the optimal value. As a solution for this, a method in which the reflective region and the transmissive region are formed to have different cell gaps to form a multi-gap structure, and the thickness of the liquid crystal layer in the reflective region is decreased is mentioned (for example, refer to Patent Document 1). However, this method needs to form irregularities on the substrate, which complicates the structure on the substrate. Further, the production steps of the substrate need to be performed with high accuracy. Therefore, such a method has room for improvement. In addition, there is room for improvement also in that the response time of the liquid crystal

molecule is different between the reflective region and the transmissive region.

[0004] IPS mode and FFS mode have been known as display mode of the liquid crystal display device, in addition to the VA mode. According to the IPS and FFS modes, liquid crystal is operated by a horizontal electric field generated by a pair of electrodes for driving the liquid crystal, formed on one substrate. According to these systems, the liquid crystal molecule moves in the horizontal direction (in the direction parallel to the substrate), which widens the viewing angle. A transflective liquid crystal display device in IPS mode is disclosed (for example, refer to Patent Document 2). This device in IPS mode also has a multi-gap structure, and it fails to solve the above-mentioned problems.

[Patent Document 1]

Japanese Kokai Publication No. Hei-11-242226

[Patent Document 2]

Japanese Kokai Publication No. 2005-338264

20

DISCLOSURE OF INVENTION

[0005] The present invention has been made in view of the above-mentioned state of the art. The present invention has an object to provide a display device which can provide bright display by both of reflective display and transmissive display without having a multi-gap structure and which can reduce a difference in response time between the reflective region and the transmissive region.

[0006] The present inventor made various investigations on a display device which can provide bright display by both of reflective display and transmissive display without having a multi-gap structure. The inventor noted an arrangement relationship between a pixel electrode and a common electrode in the reflective region and the transmissive region. The inventor found the followings. If, in the horizontal electric field mode such as IPS mode and FFS mode, each of the pixel electrode and the common electrode is provided with a slit; the pixel electrode is provided with the slit in the reflective region and the transmissive region; and the common electrode is provided with the slit substantially only in the reflective region, an intensity of the electric field generated between the pixel electrode and the common electrode in the reflective region can be made smaller than that in the transmissive region without forming the multi-gap structure. As a result, light use efficiency in the reflective display and the transmissive display can be adjusted. As a result, the above-mentioned problems have been admirably solved, leading to completion of the present invention.

[0007] That is, the present invention is a display device including: a pair of substrates; a display medium interposed between the pair of substrates; and a pixel having a reflective region for performing reflective display and a transmissive region for performing transmissive display, wherein the display device includes a pixel electrode and a common electrode on one of the pair of substrates, a

voltage is applied to the display medium through the pixel electrode and the common electrode, each of the pixel electrode and the common electrode is provided with a slit, the pixel electrode is provided with the slit in the reflective region and the transmissive region, and the common electrode is provided with the slit in the reflective region (hereinafter, also referred to as the first display device).

The present invention is mentioned in more detail below.

[0008] The first display device of the present invention includes a pair of substrates, a display medium interposed between the pair of substrates, and a pixel having a reflective region for performing reflective display and a transmissive region for performing transmissive display. In the present invention, the kinds of the substrate and the display medium are not especially limited. For example, according to an active matrix liquid crystal display device, the following embodiment is mentioned. The active matrix liquid crystal display device includes: an active matrix substrate and a color filter substrate as a pair of substrates; and a liquid crystal layer interposed between these substrates as the display medium, wherein on the active matrix substrate, scanning wirings and signal wirings are arranged to be intersect with each other, and at each intersection, a TFT that is a switching element is arranged, and on the color filter substrate, color layers of red (R), green (G), and blue (B) are arranged in each pixel. The liquid crystal display device generally includes a polarizer, a backlight and the like, outside the substrates. The reflective display is a mode in which display is performed by reflecting light outputted from a front light arranged on the display surface side or external light, inside the display device. The transmissive display is a mode in which display is performed by transmitting light outputted from the backlight. The size of the reflective region and the transmissive region and the proportion of those regions in the pixel are not especially limited. The display device of the present invention is a transreflective display device because the reflective region and the transmissive region are arranged in one pixel.

[0009] The display device of the present invention includes a pixel electrode and a common electrode on one of the substrates, and a voltage is applied to the display medium through the above-mentioned pixel electrode and the above-mentioned common electrode. If a voltage is applied to the pair of electrodes that is the pixel electrode and the common electrode, a horizontal electric field parallel to the substrate is generated in the display medium near the pixel electrode and the common electrode. This electric field controls the display medium.

[0010] In the present invention, each of the pixel electrode and the common electrode is provided with a slit; the pixel electrode is provided with the slit in the reflective region and the transmissive region; and the common electrode is provided with the slit in the reflective region. That is, substantially only in the reflective region, the common electrode is provided with the slit. In this case, the common electrode may be provided with the slit also in

the transmissive region as long as the operation and effects of the present invention can be exhibited. Further, an embodiment in which the common electrode is formed over the entire transmissive region is preferable. In the present description, the "common electrode is formed over the entire transmissive region" means that there is no region where the common electrode is not formed on the transmissive region. Thus, according to the display device of the present invention, the pixel electrode and

the common electrode are configured in accordance with IPS mode in the reflective region, and in the transmissive region, the pixel electrode and the common electrode are configured in accordance with FFS mode. In the present description, the "IPS mode" means an embodiment in which the slit of the pixel electrode and the slit of the common electrode are arranged to engage with each other. Further, the "FFS mode" means an embodiment in which one of the pixel electrode and the common electrode is provided with the slit and the other is not substantially provided with the slit. If a voltage is applied to such a pair of electrodes that are the pixel electrode and the common electrode, a horizontal electric field is generated between the pixel electrode and the common electrode. This intensity of the electric field is decreased as the distance between the pixel electrode and the common electrode is increased. The distance between the pixel electrode and the common electrode in the region having an IPS mode configuration can be easily increased than that in the region having FFS mode configuration because of the configuration of the liquid crystal display device. Accordingly, the configuration of the pixel electrode and the common electrode in the reflective region is in accordance with IPS mode and that in the transmissive region is in accordance with FFS mode, and thereby the intensity of the electric field generated between the pixel electrode and the common electrode in the reflective region can be made smaller than that of the electric field generated between the pixel electrode and the common electrode in the transmissive region. The alignment degree of the liquid crystal varies depending on the electric field intensity, and therefore, by using this feature, use efficiency of light which passes through the liquid crystal can be adjusted. The shape of the slit of the pixel electrode and the common electrode is not especially limited as long as a certain width is secured. In addition, the pixel electrode and the common electrode are formed in different layers with an insulating film and the like therebetween because one pixel has both of the IPS mode structure and the FFS mode structure.

[0011] As a preferable embodiment of the above-mentioned common electrode, an embodiment in which the common electrode has a comb-tooth shape in the reflective region may be mentioned, for example. If the common electrode has a comb-tooth shape, a high-density horizontal electric field can be generated between the pixel electrode and the common electrode, and hence, the display medium can be controlled with high accuracy.

[0012] The following embodiments are mentioned as

a preferable embodiment of a slit provided for the common electrode. An embodiment in which the slit of the common electrode is entirely surrounded by the common electrode; an embodiment in which the slit of the common electrode has a rectangular shape; an embodiment in which the slit of the common electrode has a rectangular shape having one bent part; an embodiment in which the slit of the common electrode has a zig-zag shape; an embodiment in which the slit of the common electrode has a circular arc shape; and an embodiment in which the slit of the common electrode has a meandering shape. According to such embodiments, a high-density horizontal electric field can be generated between the pixel electrode and the common electrode, and hence, the display medium can be controlled with high accuracy.

[0013] As a preferable embodiment of the above-mentioned pixel electrode, an embodiment in which the pixel electrode has a comb-tooth shape may be mentioned, for example. Similarly to the above-mentioned common electrode, if the pixel electrode has a comb-tooth shape, a high-density horizontal electric field can be generated, and hence, the display medium can be controlled with high accuracy.

[0014] The following embodiments are mentioned as a preferable embodiment of a slit provided for the pixel electrode. An embodiment in which the slit of the pixel electrode is entirely surrounded by the pixel electrode; an embodiment in which the slit of the pixel electrode has a rectangular shape; an embodiment in which the slit of the pixel electrode has a rectangular shape having one bent part; an embodiment in which the slit of the pixel electrode has a zig-zag shape; an embodiment in which the slit of the pixel electrode has a circular arc shape; and an embodiment in which the slit of the pixel electrode has a meandering shape. According to such embodiments, a high-density horizontal electric field can be generated, similarly to the above-mentioned common electrode, and hence, the display medium can be controlled with high accuracy.

[0015] As another preferable embodiment of the above-mentioned slit provided for the pixel electrode, an embodiment in which the slit of the pixel electrode has substantially the same shape as a shape of the slit of the common electrode. According to such an embodiment, the intensity of the electric field generated at each part where the slit of the common electrode is engaged with the slit of the pixel electrode can be made uniform and as a result, alignment of the liquid crystal can be uniformly controlled. In the present embodiment, the term "the same" means that the same enough to uniform substantially the electric field intensity generated at each part (unless display qualities are influenced), that is, substantially the same.

[0016] As another preferable embodiment of the above-mentioned slit provided for the pixel electrode, an embodiment in which a width of the slit of the pixel electrode in the reflective region is larger than a width of the slit of the pixel electrode in the transmissive region is

mentioned. The intensity of the electric field generated between the pixel electrode and the common electrode can be decreased also by increasing the distance between the pixel electrode and the common electrode.

5 Thus, if this embodiment is adopted in combination with the embodiment of the present invention, the intensity of the electric field generated between the pixel electrode and the common electrode in the reflective region can be more effectively made smaller than that in the transmissive region.

[0017] An embodiment in which a shield electrode is arranged between the pixel electrode and the common electrode in the reflective region is mentioned as a preferable embodiment of the first display device. In the

15 present description, the "shield electrode" means an electrode which is positioned between the pixel electrode and the common electrode to change a difference in electric potential between the pixel electrode and the common electrode. Due to the shield electrode arranged between the pixel electrode and the common electrode, the electric potential difference generated between the pixel electrode and the common electrode is smaller than that in the case that no shield electrode is arranged. If this

20 embodiment is adopted in combination with the embodiment of the present invention, the intensity of the electric field generated between the pixel electrode and the common electrode in the reflective region can be more effectively made smaller than that in the transmissive region.

25 The material for the shield electrode is not especially limited as long as it has conductivity. A transparent material is particularly preferable. A metal oxide such as indium tin oxide (ITO) is preferably used. The size and shape of the shield electrode are not especially limited as long as it can be arranged between the pixel electrode and the common electrode.

30 **[0018]** It is preferable that the shield electrode is connected to ground. If the shield electrode is connected to ground, a voltage applied to the shield electrode can be maintained at 0V. Further, if the shield electrode is connected to ground and thereby an electric potential of the shield electrode is 0V, an electric potential difference between the pixel electrode and the common electrode can be effectively decreased.

[0019] The present invention is also a display device 45 including: a pair of substrates; a display medium interposed between the pair of substrates; and a pixel having a reflective region for performing reflective display and a transmissive region for performing transmissive display, wherein the display device includes a pixel electrode and

50 a common electrode on one of the pair of substrates, a voltage is applied to the display medium through the pixel electrode and the common electrode, each of the pixel electrode and the common electrode is provided with a slit, the pixel electrode is provided with the slit in the reflective region, and the common electrode is provided with the slit in the reflective region and the transmissive region (hereinafter, also referred to as the second display device). Thus, the second display device of the present

invention, in which the common electrode is provided with a slit in both of the reflective region and the transmissive region and the pixel electrode is provided with a slit substantially only in the reflective region can exhibit the same effects as in the first display device of the present invention, in which the pixel electrode is provided with a slit in both of the reflective region and the transmissive region and the common electrode is provided with a slit substantially only in the reflective region. Also in the second display device of the present invention, it is preferable that the pixel electrode is formed over the entire transmissive region. The shape of the slit of the pixel electrode and the common electrode is not especially limited as long as a certain width is secured. In addition, the pixel electrode and the common electrode are formed in different layers with an insulating film and the like therebetween because one pixel has both of the IPS mode structure and the FFS mode structure.

[0020] As a preferable embodiment of the above-mentioned pixel electrode, an embodiment in which the pixel electrode has a comb-tooth shape in the reflective region may be mentioned, for example. Further, the following embodiments are mentioned as a preferable embodiment of a slit provided for the pixel electrode. An embodiment in which the slit of the pixel electrode is entirely surrounded by the pixel electrode; an embodiment in which the slit of the pixel electrode has a rectangular shape; an embodiment in which the slit of the pixel electrode has a rectangular shape having one bent part; an embodiment in which the slit of the pixel electrode has a zig-zag shape; an embodiment in which the slit of the pixel electrode has a circular arc shape; and an embodiment in which the slit of the pixel electrode has a meandering shape.

Further, as a preferable embodiment of the above-mentioned common electrode, an embodiment in which the common electrode has a comb-tooth shape may be mentioned, for example. Further, the following embodiments are mentioned as a preferable embodiment of a slit provided for the common electrode. An embodiment in which the slit of the common electrode is entirely surrounded by the common electrode; an embodiment in which the slit of the common electrode has a rectangular shape; an embodiment in which the slit of the common electrode has a rectangular shape having one bent part; an embodiment in which the slit of the common electrode has a zig-zag shape; an embodiment in which the slit of the common electrode has a circular arc shape; and an embodiment in which the slit of the common electrode has a meandering shape. Thus, the preferable embodiments of the second display device of the present invention are mentioned. These embodiments are not mentioned in more detail because, in these embodiments, the common electrode and the pixel electrode in the preferable embodiments of the first display device of the present invention are just replaced with the pixel electrode and the common electrode, respectively.

[0021] As a preferable embodiment of the above-men-

tioned slit provided for the common electrode, an embodiment in which the slit of the common electrode has substantially the same shape as a shape of the slit of the pixel electrode. According to such an embodiment, the

5 intensity of the electric field generated at each part where the slit of the common electrode is engaged with the slit of the pixel electrode can be made uniform and as a result, alignment of the liquid crystal can be uniformly controlled.

10 **[0022]** As a preferable embodiment of the above-mentioned slit provided for the common electrode, an embodiment in which a width of the slit of the common electrode in the reflective region is larger than a width of the slit of the common electrode in the transmissive region

15 is mentioned. According to such an embodiment, the intensity of the electric field generated between the pixel electrode and the common electrode in the reflective region can be more effectively made smaller than that in the transmissive region, similarly to the first display device of the present invention.

20 **[0023]** An embodiment in which a shield electrode is arranged between the pixel electrode and the common electrode in the reflective region is mentioned as a preferable embodiment of the second display device. According to such an embodiment, the intensity of the electric field generated between the pixel electrode and the common electrode in the reflective region can be more effectively made smaller than that in the transmissive region, similarly to the first display device of the present invention.

25 Further, it is preferable that the shield electrode is connected to ground. According to such an embodiment, the voltage adjustment can be more easily performed.

EFFECT OF THE INVENTION

30 **[0024]** The display device of the present invention can provide bright display by both of the reflective display and the transmissive display without having a multi-gap structure. In addition, because of the absence of the multi-gap structure, the difference in response time of the liquid crystal molecule between the reflective region and the transmissive region can be decreased.

BEST MODES FOR CARRYING OUT THE INVENTION

40 **[0025]** The present invention is mentioned in more detail below with reference to the following Embodiments, but the present invention is not limited to only these Embodiments.

45 "Embodiment 1"

[0026] Embodiment 1 shows a liquid crystal display device in accordance with one embodiment of the first display device of the present invention. Fig. 1 is a planar view schematically showing one pixel constituting the liquid crystal display device in Embodiment 1. Fig. 2 is a schematic view showing a cross section taken along

dashed line A-B in Fig. 1. The liquid crystal display device in accordance with Embodiment 1 includes the first substrate 1, the second substrate 2, and a liquid crystal layer 3 interposed between these substrates, as shown in Fig. 2. The second substrate 2 includes a pixel electrode 4 and a common electrode 5, and a voltage is applied to the liquid crystal layer 3 through the pixel electrode 4 and the common electrode 5.

[0027] The first substrate 1 includes a color filter layer 6 and the first alignment film 7 on the liquid crystal layer 3 side in this order. A glass substrate can be used as the first substrate 1, for example. The color filter layer 6 includes red, green, and blue regions which are arranged in a repeating pattern. The color filter layer 6 may be composed of regions of four or more colors. Irregularities attributed to the color filter layer 6 may be flattened by a resin layer for flattening, and the like. The first alignment film 7 determines an alignment direction of the liquid crystal layer 3 near the first alignment film 7.

[0028] The second substrate 2 includes a scanning wiring 8, a common wiring (reflector) 9, the first insulating layer 10, a signal wiring 11, a thin film transistor 12, the second insulating layer 13, a common electrode 5, and the third insulating layer 15 on the liquid crystal layer 3 side, and further includes the pixel electrode 4 and the second alignment film 16 on the liquid crystal layer 3 side. A glass substrate can be used as the second substrate 2, similarly to the first substrate 1. The scanning wiring 8 and the signal wiring 11 are formed in different layers with the first insulating layer 10 therebetween. Further, the scanning wiring 8 and the signal wiring 11 are perpendicular to each other. The thin film transistor 12 is positioned near the intersection of the scanning wiring 8 with the signal wiring 11. The thin film transistor 12 has an inverted staggered structure. A gate electrode is connected to the scanning wiring 8; a source electrode is connected to the signal wiring 11; and a drain electrode is connected to the pixel electrode 4 through the first contact hole 17. A channel part of the thin film transistor 12 is formed of an amorphous silicon layer. The common wiring 9 is parallel to the scanning wiring 8 and it is connected to the common electrode 5 through the second contact hole 18.

[0029] The pixel electrode 4 has a comb-tooth shape in the entire pixel, and the comb tooth (projection part) is linearly formed. The pixel electrode has a rectangular slit 19 parallel to the scanning wiring 8. In contrast, the common electrode 5 has a comb-tooth shape in the reflective region R, but it is formed over the entire transmissive region T. Further, the common electrode 5 is positioned in a layer lower than the pixel electrode 4 with the third insulating layer 15 therebetween. The pixel electrode 4 and the common electrode 5 are transparent electrodes made of ITO (Indium Tin Oxide). The slit of the common electrode 5 has substantially the same shape as a shape of the slit of the pixel electrode 4. According to such a liquid crystal display device in Embodiment 1, a voltage is applied to the pixel electrode 4 and the com-

mon electrode 5, and thereby a horizontal electric field is generated in the liquid crystal layer 3, which brings a change in alignment in the liquid crystal layer 3. Thus, light which passes through the liquid crystal layer 3 is controlled.

[0030] The common wiring 9 protrudes to the display region side and reflects reflective light 20, as shown in Fig. 2. Transmissive light 21 from a backlight passes through the transmissive region T. According to Embodiment 1, the wirings such as the common wiring 9 are used as a reflector, which provides an effect of decreasing production steps. The common wiring 9 is formed of aluminum with a high reflectance, and thereby brighter reflective display is obtained. Instead of the common wiring 9, a reflector made of aluminum or a silver alloy, and the like, may be additionally formed. In Embodiment 1, as shown in Fig. 2, the transmissive region T and the reflective region R are arranged in such a way that a boundary between the transmissive region T and the reflective region R is parallel to the short side of the pixel in order to shorten the boundary.

[0031] According to Embodiment 1, the pixel electrode 4 and the common electrode 5 are formed of the same material between the transmissive region T and the reflective region R. However, the reflective region R has an IPS mode structure and the transmissive region T has a FFS mode structure. In such an embodiment, even if the pixel electrode 4 and the common electrode 5 are formed of the same material, a voltage which is applied to the liquid crystal layer 3 is different in intensity between the transmissive region T and the reflective region R. Accordingly, both of the reflective display and the transmissive display can be performed without providing the liquid crystal layer 3 with a multi-gap structure by additionally forming a step-forming layer in the reflective region R. The second alignment film 16 is further provided on the liquid crystal layer 3 side of the pixel electrode 4. The second alignment film 16 determines the alignment direction of the liquid crystal layer 3 near the second alignment film 16.

[0032] Figs. 3, 4, and 5 each show an arrangement relationship among the polarizer, the retarder, and the liquid crystal molecule. Fig. 3 shows an arrangement relationship among the polarizer, the retarder, and the liquid crystal molecule under no voltage application. Fig. 4 shows an arrangement relationship among the polarizer, the retarder, and the liquid crystal molecule in the reflective region under voltage application. Fig. 5 shows an arrangement relationship among the polarizer, the retarder, and the liquid crystal molecule in the transmissive region under voltage application.

[0033] According to Embodiment 1, as shown in Fig. 2, the first polarizer 22 is arranged on the side opposite to the liquid crystal layer 3 of the first substrate 1, and the second polarizer 23 is arranged on the side opposite to the liquid crystal layer 3 of the second substrate 2. The first and second polarizers 22 and 23 are arranged in such a way that a transmission axis 26 of the first polarizer

22 is perpendicular to a transmission axis 27 of the second polarizer 23. The first retarder 24 is arranged between the first substrate 1 and the first polarizer 22. The second retarder 25 is arranged between the second substrate 2 and the second polarizer 23.

[0034] As shown in Fig. 3, the first retarder 24 has a retardation of 1/4 wavelength, and the phase delay axis 28 is set to make an angle of 45° with the alignment direction of the liquid crystal molecule 30 in the clockwise direction. The transmission axis 26 of the first polarizer 22 is set to be parallel to the alignment direction of the liquid crystal molecule 30. The second retarder 25 has a retardation of 1/4 wavelength. The second retarder 25 is arranged in such a way that the phase delay axis 29 is perpendicular to the phase delay axis 28 of the first retarder 24.

[0035] In the reflective region R, if a voltage of less than a threshold is applied to the pixel electrode 4 and the common electrode 5, a stacked body composed of the liquid crystal layer 3, the first polarizer 22 and the first retarder 24 functions as a circular polarizer. A linear polarized light which has passed through the first polarizer 22 is converted into a circularly-polarized light after passing through the first retarder 24. Then, the circularly-polarized light is reflected by the reflector and converted into a counter-rotating circularly-polarized light. When entering the first polarizer 22 again, the light is converted into a linear polarized light whose oscillation direction is vertical to the transmission axis 26 of the first polarizer 22. Therefore, the linear polarized light is absorbed by the first polarizer 22 and dark display is obtained. If a voltage more than a threshold is applied to the pixel electrode 4 and the common electrode 5, as shown in Fig. 4, the alignment of the liquid crystal molecule 30 is changed by a specific angle θ in the clockwise direction. As a result, incident light is reflected by the reflector 14, and then when entering the first polarizer 22 again, the light is converted into linear polarized light whose oscillation direction is parallel to the transmission axis of the first polarizer 22. Therefore, the light is not absorbed by the first polarizer 22 and bright display is obtained.

[0036] In the transmissive region T, the first retarder 24 is perpendicular to the second retarder 25. Therefore, a retardation in the normal direction of the first substrate 1 is zero, and the display in this direction is not influenced. If a voltage of less than a threshold is applied to the pixel electrode 4 and the common electrode 5, the long axis of the liquid crystal molecule 30 is perpendicular to the transmission axis 27 of the second polarizer 23. Therefore, the linear polarized light which has passed through the second polarizer 23 is a linear polarized light vertical to the transmission axis 26 of the first polarizer 22. Therefore, the light is absorbed by the first polarizer 22, and dark display is obtained. If a voltage of more than a threshold is applied to the pixel electrode 4 and the common electrode 5, as shown in Fig. 5, the alignment of the liquid crystal molecule 30 is changed by a specific angle θ in the clockwise direction. When entering the first po-

larizer 22, the light is converted into a linear polarized light whose oscillation direction is parallel to the transmission axis 26 of the first polarizer 22. Therefore, the light is not absorbed by the first polarizer 22, and bright display is obtained.

[0037] The first and second retarders 24 and 25 are made of a material which hardly shows wavelength dispersion of refractive index, for example, a norbornene material (product of JSR Corp. , trade name: ARTON).

5 10 In such a case, darker display which is less colored can be obtained.

[0038] Thus-prepared transreflective liquid crystal display panel is connected to a driving device, and a back-light is arranged on the back face of the panel, for example. Thus, a transreflective liquid crystal display device is completed.

[0039] A modified embodiment of Embodiment 1 is mentioned below.

According to the present embodiment, the comb tooth (projection part) of the pixel electrode 4 and the common electrode 5 may not have a linear shape shown in Fig. 1. For example, it may have a shape shown in Figs. 6 to 11. According to the comb-tooth-shaped electrode 31 (either or both of the pixel electrode 4 and the common electrode 5) shown in Fig. 6, the comb tooth has a V shape which has one bent part at the middle of the comb tooth, like a broken line. The slit of the comb-tooth-shaped electrode 31 has a rectangular shape having one bent part. The comb tooth of the comb-tooth-shaped electrode 32 shown in Fig. 7 has two bent parts, like a broken line. The entire of the comb tooth has a substantially V shape. The slit of the comb-tooth-shaped electrode 32 has a rectangular shape having two bent parts.

20 25 30 35 With regard to the comb-tooth-shaped electrode 33 shown in Fig. 8, the comb tooth has three bent parts, like a broken line. The entire of the comb tooth has a shape composed of two substantially V shapes. The slit of the comb-tooth-shaped electrode 33 has a rectangular shape having three bent parts, that is, a zig-zag shape.

40 45 With regard to the comb-tooth-shaped electrode 34 shown in Fig. 9, the comb tooth has a circular-arc shape which has a curved part at the middle of the comb tooth. The slit of the comb-tooth-shaped electrode 34 also has a circular-arc shape. With regard to the comb-tooth-

50 55 shaped electrode 35 shown in Fig. 10, the comb tooth has a circular-arc shape which has three curved parts. The entire of the comb tooth has a shape composed of two substantially V shapes. The slit of the comb-tooth-shaped electrode 35 has a meandering shape. The pixel electrode 4 may not have a comb-tooth shape and it may have a shape shown in Fig. 11, in which a rectangular slit 36 is entirely surrounded by the pixel electrode.

[0040] Fig. 12 is a schematic view showing the pixel electrode 4 and the common electrode 5 in Embodiment 1. Fig. 12(a) is a planar view schematically showing the pixel electrode 4 and the common electrode 5. Figs. 12 (b) and 12(c) are schematic views each showing a cross section taken along dashed line C-D in Fig. 12(a). As

shown in Fig. 12 (a), the pixel electrode 4 is formed to have a comb-tooth shape in both of the transmissive region T and the reflective region R. Further, the common electrode is formed to have a comb-tooth shape in the reflective region R, but it is formed over the entire transmissive region T. The arrangement relationship of the cross section between the pixel electrode 4 and the common electrode 5 is not especially limited to the embodiment in which the pixel electrode 4 is formed in a layer closer to the liquid crystal layer 3 than the common electrode 5, as shown in Fig. 12(b). As shown in Fig. 12(c), the common electrode 5 may be formed in a layer closer to the liquid crystal layer 3 than the common electrode 4.

"Embodiment 2"

[0041] Embodiment 2 shows a liquid crystal display device in accordance with one embodiment of the first display device of the present invention. Fig. 13 is a planar view schematically showing the pixel electrode 4 and the common electrode 5 constituting the liquid crystal display device in accordance with Embodiment 2. The liquid crystal display device in Embodiment 2 is the same as that in Embodiment 1, except that as shown in Fig. 13, the width of the slit of the pixel electrode 4 in the reflective region R is larger than that of the slit of the pixel electrode 4 in the transmissive region T. The intensity of the electric field generated between the pixel electrode 4 and the common electrode 5 can be decreased also by increasing a distance between the pixel electrode 4 and the common electrode 5. Therefore, if this embodiment is adopted in combination with the embodiment in which one pixel has both of the FFS mode structure and the IPS mode structure, the intensity of the electric field generated between the pixel electrode 4 and the common electrode 5 can be more effectively decreased in the reflective region R than that in the transmissive region T.

"Embodiment 3"

[0042] Embodiment 3 shows a liquid crystal display device in accordance with one embodiment of the first display device of the present invention. Fig. 14 is a schematic view showing the pixel electrode 4 and the common electrode 5 constituting the liquid crystal display device in accordance with Embodiment 3. Fig. 14(a) is a planar view schematically showing the pixel electrode 4 and the common electrode 5. Fig. 14 (b) is a schematic view showing a cross section taken along dashed line E-F in Fig. 14(a). The liquid crystal display device in Embodiment 3 is the same as that in Embodiment 1, except that as shown in Fig. 14, the shield electrode 50 is arranged between the comb tooth of the pixel electrode 4 and the comb tooth of the common electrode 5 in the reflective region R. The shield electrode 50 is arranged in the reflective region R as shown in Fig. 14 (a), and further arranged between the layer where the pixel electrode 4 is arranged and the layer where the common electrode 5

is arranged as shown in Fig. 14(b). Thus, the intensity of the electric field generated between the pixel electrode 4 and the common electrode 5 can be decreased also by arranging the shield electrode 50 between the pixel electrode 4 and the common electrode 5. Therefore, if this embodiment is adopted in combination with the embodiment in which one pixel has both of the FFS mode structure and the IPS mode structure, the intensity of the electric field generated between the pixel electrode 4 and the common electrode 5 can be more effectively decreased in the reflective region R than that in the transmissive region T. In addition, it is preferable that the shield electrode 50 is connected to ground.

"Embodiment 4"

[0043] Embodiment 4 shows a liquid crystal display device in accordance with one embodiment of the second display device of the present invention. Fig. 15 is a planar view schematically showing the pixel electrode 4 and the common electrode 5 constituting the liquid crystal display device in accordance with Embodiment 4. According to Embodiment 4, as shown in Fig. 15, the common electrode 5 is formed to have a comb-tooth shape in the entire pixel. Further, the pixel electrode 4 is formed to have a comb-tooth shape in the region R, but it is formed over the entire transmissive region T. That is, according to Embodiment 4, the structure of the pixel electrode 4 and the structure of the common electrode 5 may be counterchanged in the above-mentioned embodiments. Even in such an embodiment, the effects of the present invention can be exhibited because the FFS mode structure and the IPS mode structure are formed in one pixel.

[0044] The present application claims priority under the Paris Convention and the domestic law in the country to be entered into national phase on Patent Application No. 2006-199667 filed in Japan on July 21, 2006, the entire contents of which are hereby incorporated by reference.

[0045] The term "or more" in the present description means that the value described (boundary value) is included.

BRIEF DESCRIPTION OF DRAWINGS

45

[0046]

[Fig. 1]

50 Fig. 1 is a planar view schematically showing one pixel constituting the liquid crystal display device in accordance with Embodiment 1.

[Fig. 2]

55 Fig. 2 is a schematic view showing a cross section taken along dashed line A-B shown in Fig. 1.

[Fig. 3]

Fig. 3 is a schematic view showing arrangement relationship among the polarizer, the retarder, and the liquid crystal molecule during no voltage application

in accordance with Embodiment 1.

[Fig. 4]

Fig. 4 is a schematic view showing arrangement relationship among the polarizer, the retarder, and the liquid crystal molecule in the reflective region during voltage application in accordance with Embodiment 1.

[Fig. 5]

Fig. 5 is a schematic view showing arrangement relationship among the polarizer, the retarder, and the liquid crystal molecule in the transmissive region during voltage application in accordance with Embodiment 1.

[Fig. 6]

Fig. 6 is a planar view schematically showing electrodes (the pixel electrode and the common electrode) in accordance with a modified embodiment (the rectangular slit has one bent part) of Embodiment 1.

[Fig. 7]

Fig. 7 is a planar view schematically showing electrodes (the pixel electrode and the common electrode) in accordance with a modified embodiment (the rectangular slit has two bent parts) of Embodiment 1.

[Fig. 8]

Fig. 8 is a planar view schematically showing electrodes (the pixel electrode and the common electrode) in accordance with a modified embodiment (the rectangular slit has three bent parts) of Embodiment 1.

[Fig. 9]

Fig. 9 is a planar view schematically showing electrodes (the pixel electrode and the common electrode) in accordance with a modified embodiment (the slit has a circular arc shape) of Embodiment 1.

[Fig. 10]

Fig. 10 is a planar view schematically showing electrodes (the pixel electrode and the common electrode) in accordance with a modified embodiment (the slit has a meandering shape) of Embodiment 1.

[Fig. 11]

Fig. 11 is a planar view schematically showing electrodes (the pixel electrode and the common electrode) in accordance with a modified embodiment (the slit is entirely surrounded by the electrodes) of Embodiment 1.

[Fig. 12]

Fig. 12 is a schematic view showing the pixel electrode and the common electrode (the slit has a rectangular shape) in accordance with Embodiment 1. Fig. 12(a) shows a schematic planar view. Figs. 12(b) and 12(c) are schematic views each showing a cross section taken along dashed line C-D in Fig. 12(a).

[Fig. 13]

Fig. 13 is a planar view schematically showing the pixel electrode and the common electrode constitut-

ing the liquid crystal display device in accordance with Embodiment 2.

[Fig. 14]

Fig. 14 is a schematic view showing the pixel electrode and the common electrode constituting the liquid crystal display device in accordance with Embodiment 3. Fig. 14 (a) is a schematic planar view. Fig. 14(b) is a schematic view showing a cross section taken along dashed line E-F in Fig. 14(a).

[Fig. 15]

Fig. 15 is a planar view schematically showing the pixel electrode and the common electrode constituting the liquid crystal display device in accordance with Embodiment 4.

EXPLANATION OF NUMERALS AND SYMBOLS

[0047]

- 1: The first substrate
- 2: The second substrate
- 3: Liquid crystal layer
- 4: Pixel electrode
- 5: Common electrode
- 6: Color filter layer
- 7: The first alignment film
- 8: Scanning wiring
- 9: Common wiring (reflector)
- 10: The first insulating layer
- 11: Signal wiring
- 12: Thin film transistor
- 13: The second insulating layer
- 15: The third insulating layer
- 16: The second alignment film
- 17: The first contact hole
- 18: The second contact hole
- 19: Slit
- 20: Reflective light
- 21: Transmissive light
- 22: The first polarizer
- 23: The second polarizer
- 24: The first retarder
- 25: The second retarder
- 26: Transmission axis of the first polarizer
- 27: Transmission axis of the second polarizer
- 28: Phase delay axis of the first retarder
- 29: Phase delay axis of the second retarder
- 30: Liquid crystal molecule
- 31: Comb-tooth-shaped electrode (the rectangular slit has one bent part)
- 32: Comb-tooth-shaped electrode (the rectangular slit has two bent parts)
- 33: Comb-tooth-shaped electrode (the rectangular slit has three bent parts)
- 34: Comb-tooth-shaped electrode (the slit has a circular arc shape)
- 35: Comb-tooth-shaped electrode (the slit has the same shape as the rectangular slit)

36: Electrode (the slit is entirely surrounded by the electrode)
 50: Shield electrode
 T: Transmissive region
 R: Reflective region

Further embodiments of the invention are:

[0048]

1. A display device comprising: a pair of substrates; a display medium interposed between the pair of substrates; and a pixel having a reflective region for performing reflective display and a transmissive region for performing transmissive display, wherein the display device includes a pixel electrode and a common electrode on one of the pair of substrates, a voltage is applied to the display medium through the pixel electrode and the common electrode, each of the pixel electrode and the common electrode is provided with a slit, the pixel electrode is provided with the slit in the reflective region and the transmissive region, and the common electrode is provided with the slit in the reflective region.

2. The display device according to item 1, wherein the common electrode is formed over the entire transmissive region.

3. The display device according to item 1, wherein the common electrode has a comb-tooth shape in the reflective region.

4. The display device according to item 1, wherein the slit of the common electrode is entirely surrounded by the common electrode.

5. The display device according to item 1, wherein the slit of the common electrode has a rectangular shape.

6. The display device according to item 1, wherein the slit of the common electrode has a rectangular shape having at least one bent part.

7. The display device according to item 1, wherein the slit of the common electrode has a zig-zag shape.

8. The display device according to item 1, wherein the slit of the common electrode has a circular arc shape.

9. The display device according to item 1, wherein the slit of the common electrode has a meandering shape.

10. The display device according to item 1, wherein the pixel electrode has a comb-tooth shape.

5

10

15

20

25

30

35

40

45

50

55

11. The display device according to item 1, wherein the slit of the pixel electrode is entirely surrounded by the pixel electrode.

12. The display device according to item 1, wherein the slit of the pixel electrode has a rectangular shape.

13. The display device according to item 1, wherein the slit of the pixel electrode has a rectangular shape having at least one bent part.

14. The display device according to item 1, wherein the slit of the pixel electrode has a zig-zag shape.

15. The display device according to item 1, wherein the slit of the pixel electrode has a circular arc shape.

16. The display device according to item 1, wherein the slit of the pixel electrode has a meandering shape.

17. The display device according to item 1, wherein the slit of the pixel electrode has substantially the same shape as a shape of the slit of the common electrode.

18. The display device according to item 1, wherein a width of the slit of the pixel electrode in the reflective region is larger than a width of the slit of the pixel electrode in the transmissive region.

19. The display device according to item 1, wherein a shield electrode is arranged between the pixel electrode and the common electrode in the reflective region.

20. The display device according to item 19, wherein the shield electrode is connected to ground.

21. A display device comprising: a pair of substrates; a display medium interposed between the pair of substrates; and a pixel having a reflective region for performing reflective display and a transmissive region for performing transmissive display, wherein the display device includes a pixel electrode and a common electrode on one of the pair of substrates, a voltage is applied to the display medium through the pixel electrode and the common electrode, each of the pixel electrode and the common electrode is provided with a slit, the pixel electrode is provided with the slit in the reflective region, and the common electrode is provided with the slit in the reflective region and the transmissive region.

22. The display device according to item 21, wherein the pixel electrode is formed over the entire transmissive region.

23. The display device according to item 21, wherein the pixel electrode has a comb-tooth shape in the reflective region.

24. The display device according to item 21, wherein the slit of the pixel electrode is entirely surrounded by the common electrode. 5

25. The display device according to item 21, wherein the slit of the pixel electrode has a rectangular shape. 10

26. The display device according to item 21, wherein the slit of the pixel electrode has a rectangular shape having at least one bent part.

27. The display device according to item 21, wherein the slit of the pixel electrode has a zig-zag shape.

28. The display device according to item 21, wherein the slit of the pixel electrode has a circular arc shape. 20

29. The display device according to item 21, wherein the slit of the pixel electrode has a meandering shape.

30. The display device according to item 21, wherein the common electrode has a comb-tooth shape.

31. The display device according to item 21, wherein the slit of the common electrode is entirely surrounded by the pixel electrode.

32. The display device according to item 21, wherein the slit of the common electrode has a rectangular shape. 35

33. The display device according to item 21, wherein the slit of the common electrode has a rectangular shape having at least one bent part.

34. The display device according to item 21, wherein the slit of the common electrode has a zig-zag shape.

35. The display device according to item 21, wherein the slit of the common electrode has a circular arc shape. 40

36. The display device according to item 21, wherein the slit of the common electrode has a meandering shape. 50

37. The display device according to item 21, wherein the slit of the common electrode has substantially the same shape as a shape of the slit of the pixel electrode.

38. The display device according to item 21, wherein a width of the slit of the common electrode in the

reflective region is larger than a width of the slit of the common electrode in the transmissive region.

39. The display device according to item 21, wherein a shield electrode is arranged between the pixel electrode and the common electrode in the reflective region.

40. The display device according to item 39, wherein the shield electrode is connected to ground.

Claims

15. 1. A display device comprising: a pair of substrates; a display medium interposed between the pair of substrates; and a pixel having a reflective region for performing reflective display and a transmissive region for performing transmissive display, wherein the display device includes a pixel electrode and a common electrode on one of the pair of substrates, a voltage is applied to the display medium through the pixel electrode and the common electrode, each of the pixel electrode and the common electrode is provided with a slit, the pixel electrode is provided with the slit in the reflective region, and the common electrode is provided with the slit in the reflective region and the transmissive region.

2. The display device according to Claim 1, wherein the pixel electrode is formed over the entire transmissive region.

3. The display device according to Claim 1, wherein the pixel electrode has a comb-tooth shape in the reflective region.

4. The display device according to Claim 1, wherein the slit of the pixel electrode is entirely surrounded by the common electrode.

5. The display device according to Claim 1, wherein the slit of the pixel electrode has a rectangular shape.

6. The display device according to Claim 1, wherein the slit of the pixel electrode has a rectangular shape having at least one bent part.

7. The display device according to Claim 1, wherein the slit of the pixel electrode has a zig-zag shape.

8. The display device according to Claim 1, wherein the slit of the pixel electrode has a circular arc shape.

9. The display device according to Claim 1, wherein the slit of the pixel electrode has a meandering

shape.

10. The display device according to Claim 1, wherein the common electrode has a comb-tooth shape. 5
11. The display device according to Claim 1, wherein the slit of the common electrode is entirely surrounded by the pixel electrode.
12. The display device according to Claim 1, wherein 10 the slit of the common electrode has a rectangular shape.
13. The display device according to Claim 1, wherein 15 the slit of the common electrode has a rectangular shape having at least one bent part.
14. The display device according to Claim 1, wherein the slit of the common electrode has a zig-zag shape. 20
15. The display device according to Claim 1, wherein the slit of the common electrode has a circular arc shape.
16. The display device according to Claim 1, wherein 25 the slit of the common electrode has a meandering shape.
17. The display device according to Claim 1, wherein the slit of the common electrode has substantially 30 the same shape as a shape of the slit of the pixel electrode.
18. The display device according to Claim 1, wherein a width of the slit of the common electrode in the reflective region is larger than a width of the slit of the common electrode in the transmissive region. 35
19. The display device according to Claim 1, wherein a shield electrode is arranged between the pixel electrode and the common electrode in the reflective region. 40
20. The display device according to Claim 19, wherein the shield electrode is connected to ground. 45

50

55

Fig. 1

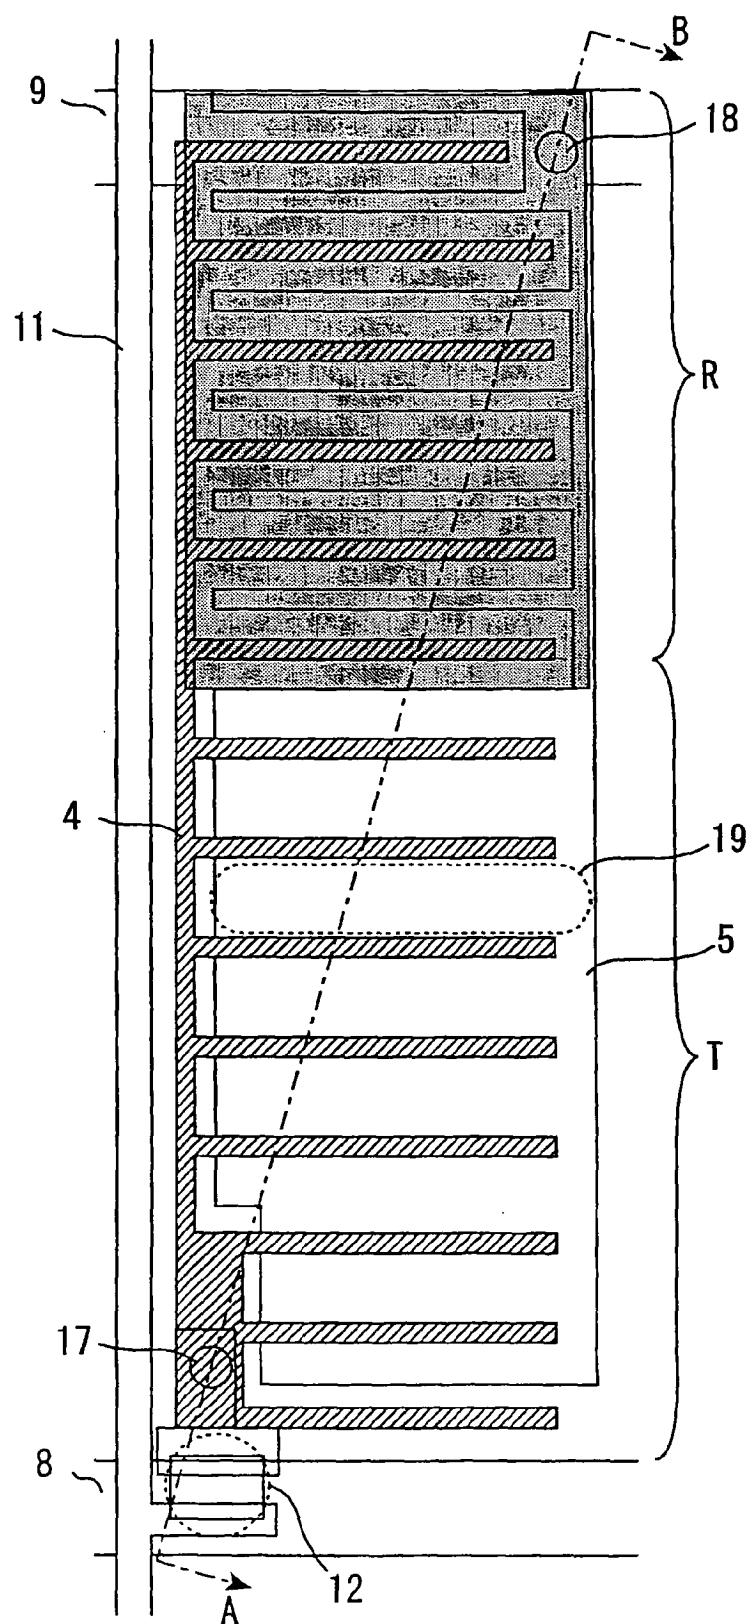


Fig.2

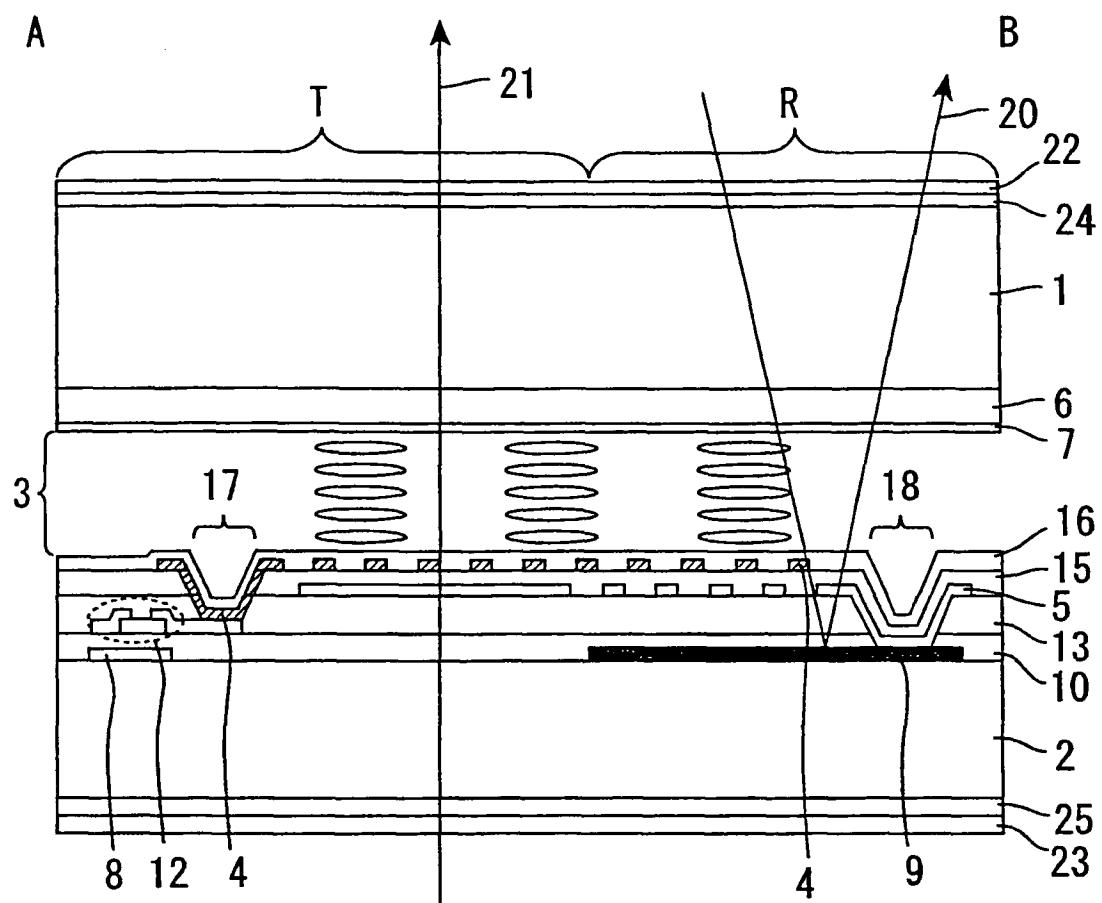


Fig.3

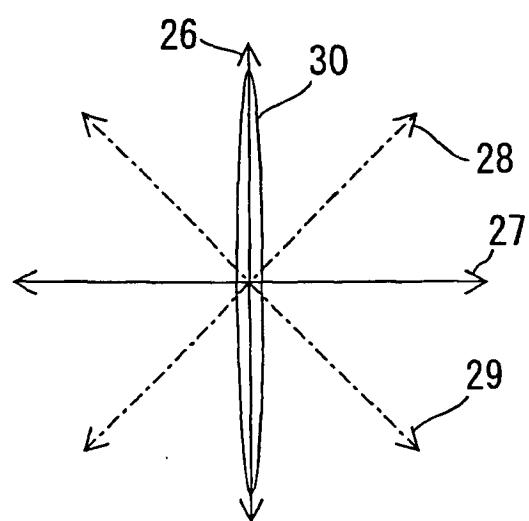


Fig.4

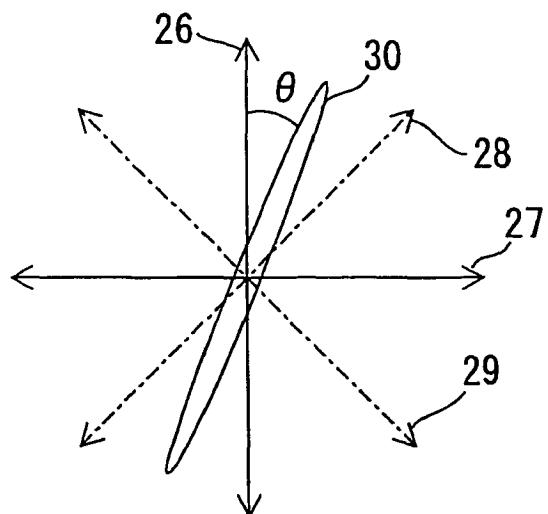


Fig.5

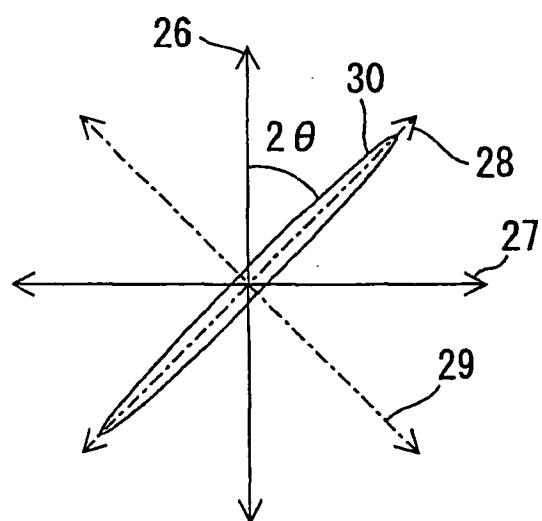


Fig.6

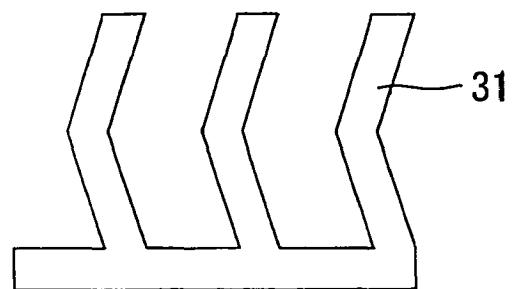


Fig.7

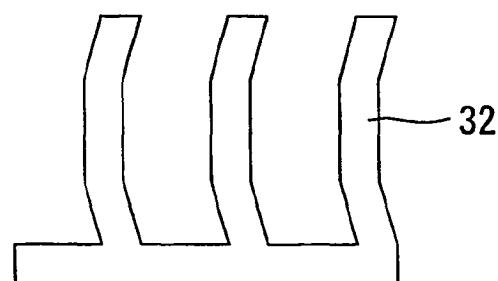


Fig.8

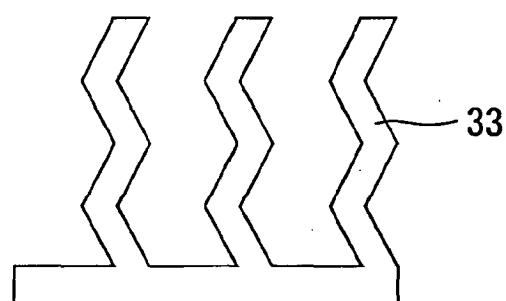


Fig.9

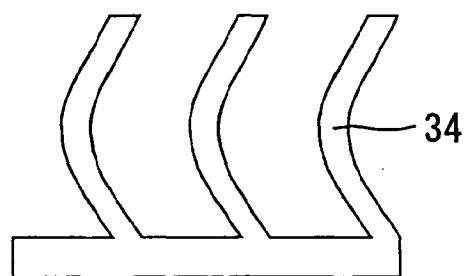


Fig.10

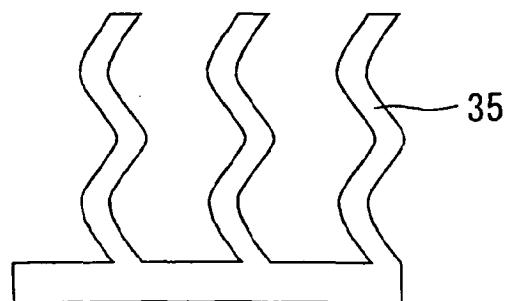


Fig.11

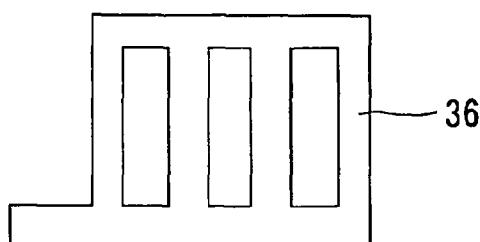


Fig.12

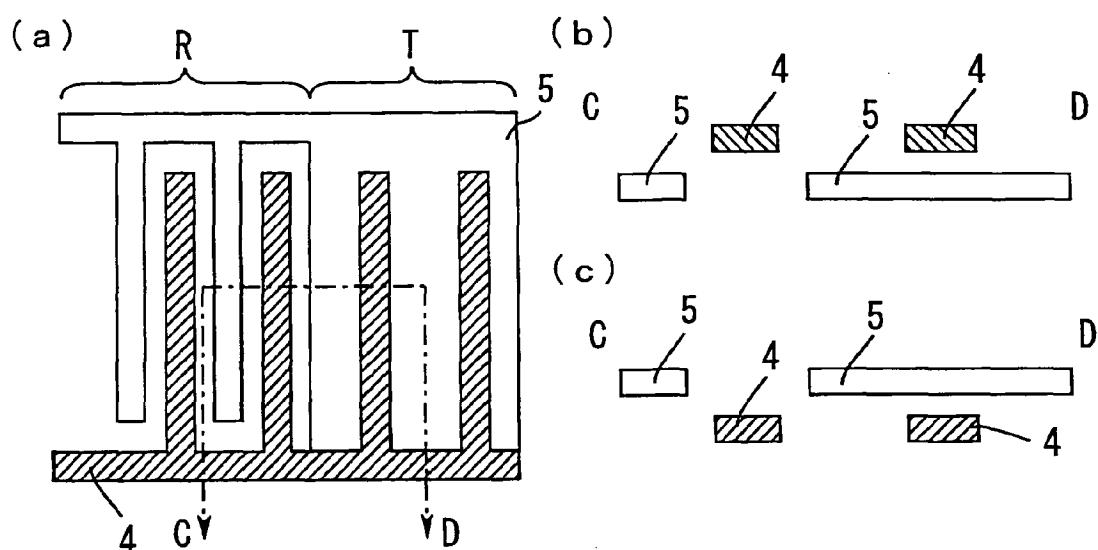


Fig.13

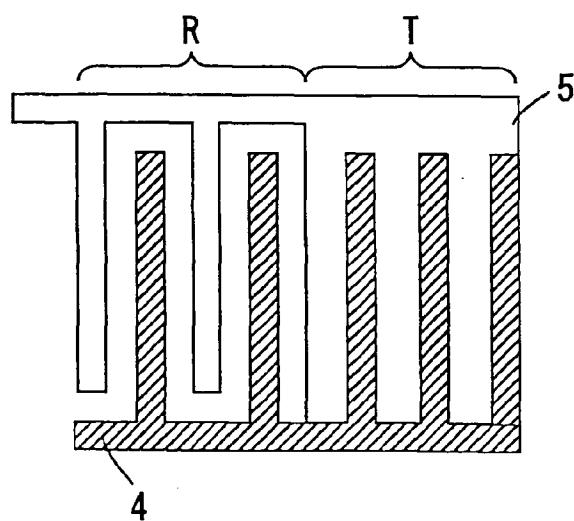


Fig.14


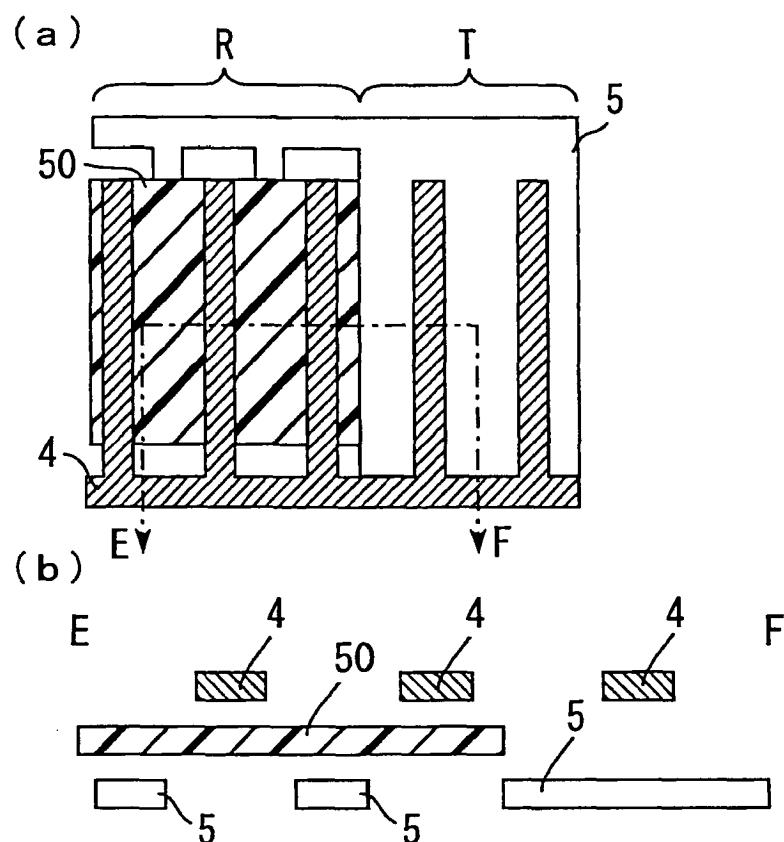


Fig.15



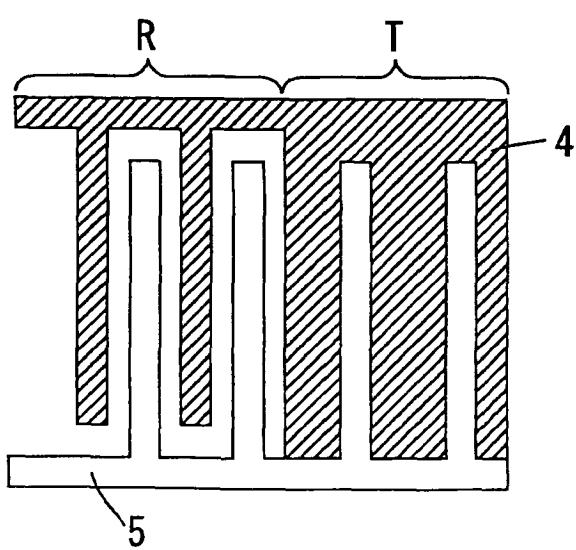

EUROPEAN SEARCH REPORT

Application Number
EP 09 00 1552

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (IPC)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
D, X	US 2005/264720 A1 (ITOU OSAMU [JP] ET AL) 1 December 2005 (2005-12-01) * paragraphs [0052], [0058], [0096] * * figures 1,2,9,13-15 * -----	1-20	INV. G02F1/1343 G02F1/1335
X	US 2005/243251 A1 (YANG CHIU-LIEN [TW] ET AL) 3 November 2005 (2005-11-03) * paragraphs [0024], [0025] * * figures 1-6 * * abstract * -----	1-3, 7-10, 14-17	ADD. G02F1/1362
A	WO 2005/006068 A (HITACHI DISPLAYS LTD [JP]; NAKAYOSHI YOSHIAKI [JP]; YANAGAWA KAZUHIKO) 20 January 2005 (2005-01-20) * figures 2,6a-6c,8 *	1-3	
P, A	-& US 2007/040978 A1 (NAKAYOSHI YOSHIAKI [JP] ET AL) 22 February 2007 (2007-02-22) * paragraphs [0002], [0090], [0091] * * paragraphs [0160] - [0162] * * paragraphs [0173] - [0176] * -----	1-3	
A	LIM Y J ET AL: "A SINGLE GAP TRANSFLECTIVE DISPLAY WITH SINGLE GAMMA CURVE IN THE FRINGE FIELD SWITCHING MODE" JAPANESE JOURNAL OF APPLIED PHYSICS, JAPAN SOCIETY OF APPLIED PHYSICS, TOKYO,JP, vol. 44, no. 50, 1 January 2005 (2005-01-01), pages L1532-L1534, XP001502544 ISSN: 0021-4922 *The whole document but especially figures 1(a) & (b).* -----	1-20	G02F
A	US 2005/083462 A1 (LIN CHING-HUAN [TW]) 21 April 2005 (2005-04-21) *Especially fig 4 and its associated description.* -----	1-20	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
2	Place of search Munich	Date of completion of the search 26 June 2009	Examiner Thomas, Kenneth
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 09 00 1552

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-06-2009

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 2005264720	A1	01-12-2005	JP	4223993 B2	12-02-2009	
			JP	2005338264 A	08-12-2005	
US 2005243251	A1	03-11-2005		NONE		
WO 2005006068	A	20-01-2005	CN	1802599 A	12-07-2006	
			CN	101393362 A	25-03-2009	
			JP	3971778 B2	05-09-2007	
			US	2007040978 A1	22-02-2007	
US 2007040978	A1	22-02-2007	CN	1802599 A	12-07-2006	
			CN	101393362 A	25-03-2009	
			WO	2005006068 A1	20-01-2005	
			JP	3971778 B2	05-09-2007	
US 2005083462	A1	21-04-2005	TW	594292 B	21-06-2004	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP HEI11242226 B [0004]
- JP 2005338264 A [0004]
- JP 2006199667 A [0044]

专利名称(译)	区域型半透半反式有源矩阵LCD，在像素中具有IPS和FFS电极配置		
公开(公告)号	EP2096489A1	公开(公告)日	2009-09-02
申请号	EP2009001552	申请日	2007-03-28
[标]申请(专利权)人(译)	夏普株式会社		
申请(专利权)人(译)	夏普株式会社		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	NISHIDA KENJI		
发明人	NISHIDA, KENJI		
IPC分类号	G02F1/1343 G02F1/1335 G02F1/1362		
CPC分类号	G02F1/137 G02F1/133555 G02F1/134363 G02F2001/134372		
优先权	2006199667 2006-07-21 JP		
外部链接	Espacenet		

摘要(译)

该申请公开了一种有源矩阵液晶显示器，它是区域半透反射型的。该水平电场切换显示器可以在反射和透射显示模式下提供明亮的显示，而不具有多间隙结构。它还可以减少反射区域和透射区域之间的响应时间差异。本发明的显示装置包括一对基板；介于基板之间的显示介质；以及具有用于反射显示模式的反射区域和用于透射显示模式的透射区域的像素，其中显示装置包括在其中一个基板上的像素电极和公共电极。一个在像素电极和公共电极之间的显示介质上施加电压，每个像素电极和公共电极设置有狭缝，该狭缝是像素的梳状电极部分的指状物和公共电极之间的空间。像素电极仅在反射区域中设置有狭缝，像素电极在透射区域中是连续的，而公共电极在反射和透射区域中都设置有狭缝。因此，反射和透射区域中的电极配置分别对应于IPS(面内切换)和FFS(边缘场切换)布置。这允许在两者中独立设置水平电场区域。

