



(11) **EP 3 167 807 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:

08.05.2019 Bulletin 2019/19

(21) Application number: **15819187.4**

(22) Date of filing: **13.03.2015**

(51) Int Cl.:

A61B 8/08 (2006.01)

(86) International application number:

PCT/KR2015/002450

(87) International publication number:

WO 2016/006790 (14.01.2016 Gazette 2016/02)

(54) **PORTABLE ULTRASONIC DIAGNOSTIC DEVICE AND METHOD OF IMPROVING POWER
EFFICIENCY OF SUCH A DEVICE**

TRAGBARES DIAGNOSTISCHE ULTRASCHALLVORRICHTUNG UND VERFAHREN ZUR
VERBESSERUNG DER ENERGIEEFFIZIENZ EINER SOLCHEN VORRICHTUNG

DISPOSITIF PORTABLE DE DIAGNOSTIC PAR ULTRASONS ET PROCÉDÉ D'AMÉLIORATION DE
L'EFFICACITÉ ÉNERGÉTIQUE D'UN TEL DISPOSITIF

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **08.07.2014 KR 20140085249**

(43) Date of publication of application:

17.05.2017 Bulletin 2017/20

(73) Proprietor: **Healcerion Co. Ltd.**

Seoul 152-848 (KR)

(72) Inventors:

- **RYU, Jeong Won**
Seoul 137-140 (KR)

• **CHOUNG, You Chan**

Seoul 122-807 (KR)

• **CHUNG, Wook Jin**

Seoul 135-950 (KR)

(74) Representative: **Brann AB**

P.O. Box 3690

Drottninggatan 27

103 59 Stockholm (SE)

(56) References cited:

WO-A1-2014/003404

JP-A- H07 236 640

JP-A- 2005 312 587

JP-A- 2006 141 465

JP-A- 2007 275 354

KR-A- 20090 111 552

KR-A- 20090 111 552

US-A1- 2011 077 517

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[Technical Field]

[0001] The present invention relates to a portable ultrasonic diagnostic apparatus, and more particularly, to a portable ultrasonic apparatus and a method of improving power efficiency of the ultrasonic diagnostic apparatus.

[Background Art]

[0002] With noninvasive and nondestructive properties, an ultrasonic diagnostic apparatus is generally used in the medical field to obtain information of the inside of a subject. Since it is possible to provide a high-resolution image of internal organs of the subject to a doctor with no surgical operations of directly incising and observing the subject, ultrasonic diagnostic systems are very importantly used in the medical field.

[0003] An ultrasonic diagnostic apparatus is a system which transmits an ultrasonic signal from a body surface of a subject toward a target portion inside the subject, extracts information from a reflected ultrasonic signal, and obtains an image of a section of soft tissue or a blood flow in a noninvasive manner.

[0004] Compared with other imaging diagnostic apparatuses such as an X-ray inspection apparatus, a computerized tomography (CT) scanner, a magnetic resonance image (MRI) scanner, and a nuclear medicine inspection apparatus, since having a small size, being cheap, being capable of displaying in real time, and having excellent safety without being exposed to X-rays, such ultrasonic diagnostic system described above is generally used to diagnose hearts, internal organs in an abdominal cavity, urinary systems, and genital organs.

[0005] Due to an alternating current (AC) power source to which power is constantly supplied, a power shortage does not occur in a typical ultrasonic diagnostic apparatus. However, recently, as portable ultrasonic diagnostic apparatuses using batteries with limited power as power sources have been used, technologies for providing a maximum amount of usage time by minimum power are needed.

[0006] WO 2014/003404 A1 discloses a mobile ultrasound diagnosis system, comprising a control unit configured to determine an ultrasonic wave measurement depth according to an input of the user, and to determine a parameter used by a time gain compensation unit based on the ultrasonic wave measurement depth.

[Disclosure of Invention]

[0007] The invention is defined in the appended claims.

[Technical Problem]

[0008] Existing portable ultrasonic diagnostic apparatuses

generate pulse signals with maximum voltages which are uniform regardless of depths for measurement and use pulse signals with the same maximum voltages when measurement is performed at shallower depths. Due to this, since high loads are applied to a battery end and a circuit portion, power efficiency is not high.

[0009] Therefore, it is an aspect of the present invention to provide a portable ultrasonic diagnostic apparatus capable of improving power efficiency by adjusting a voltage of a pulse signal depending on a depth for measurement and a method of improving power efficiency of the portable ultrasonic diagnostic apparatus.

[Technical Solution]

[0010] The present invention provides a portable ultrasonic diagnostic apparatus as defined in claim 1 and a method of improving power efficiency of a portable ultrasonic diagnostic apparatus as defined in claim 2.

[Advantageous Effects]

[0011] According to the present invention, there is provided an effect of providing power efficiency by adjusting a voltage of a pulse signal according to a depth for measurement.

[Brief Description of Drawings]

[0012]

FIG. 1 illustrates a configuration of a portable ultrasonic diagnostic apparatus according to one embodiment of the present invention.

FIG. 2 illustrates an example of a phantom that is measurable instead of a human body and displayed with supplied voltages according to measurement depths.

FIG. 3 illustrates one example of a measurement depth-voltage table.

FIG. 4 illustrates electric pulses with different voltages generated by a pulse generating portion 122 and echo signals according thereto.

FIG. 5 is a graph illustrating an example of amplification properties according to a reflection depth of a variable gain amplifier 123.

FIG. 6 is a graph which illustrates amplification properties adjusted according to a reflection depth of the variable gain amplifier 123 according to embodiments of the present invention and illustrates amplification properties when a measurement depth is 10 cm.

FIG. 7 is a graph which illustrates amplification properties adjusted according to a reflection depth of the variable gain amplifier 123 according to embodiments of the present invention and illustrates amplification properties when a measurement depth is 15 cm.

FIG. 8 is a graph which illustrates amplification properties adjusted according to a reflection depth of the variable gain amplifier 123 according to embodiments of the present invention and illustrates amplification properties when a measurement depth is 5 cm.

FIG. 9 is a flowchart illustrating a method of improving power efficiency of the portable ultrasonic diagnostic apparatus according to one embodiment of the present invention.

[Mode for Invention]

[0013] Hereinafter, exemplary embodiments of the present invention will be described in detail with reference to the drawings. In the following description and attached drawings, substantially identical components will be referred to as identical reference numerals and a repeated description thereof will be omitted. Also, in the description of the embodiments of the present invention, detailed explanations of well-known functions and components of the related art will be omitted when it is deemed that they may unnecessarily obscure the present disclosure.

[0014] FIG. 1 illustrates a configuration of a portable ultrasonic diagnostic apparatus according to one embodiment of the present invention. The portable ultrasonic diagnostic apparatus according to the embodiment includes an ultrasonic transducer 110, a main circuit portion 120, a battery 130, a measurement depth setting portion 150, and a compensation property adjusting portion 160.

[0015] The ultrasonic transducer 110 generates an ultrasonic pulse from an electric pulse applied from the main circuit portion 120 to inspect the inside of a subject, converts an ultrasonic echo signal which is reflected by the subject and returns into an electric signal, and transfers the electric signal to the main circuit portion 120. The ultrasonic transducer 110 may be formed of a piezoelectric element array module. The piezoelectric element array module may be configured to allow a large number, such as 64, 128, 192 and the like, of piezoelectric elements to be arranged in an array shape. As the piezoelectric elements, lead zirconate titanate (PZT) with high efficiency of electro-acoustic conversion may be used. As a voltage of an electric pulse for driving a piezoelectric element, a voltage of +100 V to -100 V may be used.

[0016] The main circuit portion 120 performs functions of generating an electric pulse to be applied to the ultrasonic transducer 110, generating an ultrasonic image by analyzing an echo signal received through the ultrasonic transducer 110, and transmitting the ultrasonic image to an external display device (not shown).

[0017] In detail, the main circuit portion 120 includes a transmitting and receiving portion 121, a pulse generating portion 122, a variable gain amplifier 123, an analog-digital (A/D) converter 124, a beam former 125, a processor 126, and a communication portion 127.

[0018] The transmitting and receiving portion 121 transmits an electric pulse generated by the pulse generating portion 122 to the ultrasonic transducer 110 and transmits an echo signal received through the ultrasonic transducer 110 to the variable gain amplifier 123. For example, the transmitting and receiving portion 121 may be formed of a switch configured to connect a TX circuit and the piezoelectric element array module when transmitting ultrasonic waves and to connect an RX circuit and the piezoelectric element array module when receiving ultrasonic echoes.

[0019] The pulse generating portion 122 generates electric pulses to be applied to the ultrasonic transducer 110 for generating ultrasonic waves. Here, the pulse generating portion 122 generates electric pulses with voltages corresponding to voltages supplied from a voltage supplying portion 140 that will be described below.

[0020] The variable gain amplifier 123 amplifies echo signals input from the ultrasonic transducer 110 and compensates for attenuation of the echo signals according to reflection depths. Since ultrasonic waves are absorbed into a human body due to properties thereof, signals that are reflected from a deep place and arrive late lose more energy in such a way that size thereof is reduced. Accordingly, as a reflection depth becomes deeper (that is, as an arrival time is later), echo signals should be compensated with larger values. Accordingly, the amplification properties of the variable gain amplifier 123 according to the reflection depth has a form that is increased according to a reflection depth or arrival time of a signal.

[0021] The A/D converter 124 converts an echo signal compensated for loss thereof by the variable gain amplifier 123 into a digital signal.

[0022] The beam former 125 performs TX beam forming and RX beam forming. TX beam forming is allowing the pulse generating portion 122 to generate adequate electric pulses using a parameter corresponding to the ultrasonic transducer 110, and for example, is delaying times of electric pulses depending on positions of piezoelectric elements to concentrate energy of ultrasonic waves on a focus at a certain distance when the ultrasonic waves are transmitted. RX beam forming is data-converting digital signals from the A/D converter 124 to be adequate for the ultrasonic transducer 110 transferring the data-converted digital signals to the processor 126, and for example, is time-delaying electric signals from piezoelectric elements according to positions and receiving times of the piezoelectric elements when ultrasonic echoes are received and generating ultrasonic data (scan data) by summing the time-delayed signals.

[0023] The processor 126 controls the beam former 125 to perform adequate beam forming at the ultrasonic transducer, generates an ultrasonic image using the scan data to transmit the ultrasonic image to an external display device through the communication portion 127 or transmits the scan data to the external display device through the communication portion 127, and controls each of the components of the portable ultrasonic diag-

nostic apparatus. The processor 126 may compress the scan data to reduce a bandwidth used for communication as necessary.

[0024] The communication portion 127 may use a wired or wireless communication type communication module for transmitting and receiving data with the external display device. The wired communication type may include a wired with cable such as a universal serial bus (USB) cable and the like. The wireless communication type may include one of Bluetooth, wireless USB, wireless local area network (LAN), wireless fidelity (WiFi), Zigbee, and Infrared data association (IrDA).

[0025] The external display device configured to display an ultrasonic image using the ultrasonic image or the scan data transmitted through the communication portion 127 may be, for example, a personal computer (PC), a smart phone, a table PC, personal digital assistants (PDA) and the like.

[0026] According to the embodiment, the portable ultrasonic diagnostic apparatus may include a display portion (not shown) thereof for displaying the ultrasonic image generated by the processor 126. In this case, the communication portion 127 configured to transmit ultrasonic images or scan data to the outside may be not provided.

[0027] The battery 130 supplies power for operations of the portable ultrasonic diagnostic apparatus, including power necessary for the pulse generating portion 122 to generate electric pulses.

[0028] Generally, since a uniform maximum voltage (for example, 100 V) is supplied to the pulse generating portion 122 regardless of a measurement depth, the pulse generating portion 122 generates electric pulse signals with uniform maximum voltages (for example, a peak to peak value of +100 V to - 100 V). However, in the embodiment of the present invention, a measurement depth for measurement is set and a voltage adjusted according to the set measurement depth is supplied to the pulse generating portion 122, thereby improving power efficiency. When the measurement depth for measurement is determined, since data at a position deeper than the measurement depth is actually unnecessary, it is unnecessary to supply maximum voltage.

[0029] The measurement depth setting portion 150 sets a measurement depth for measuring a subject. The measurement depth may be received from a user. The portable ultrasonic diagnostic apparatus may include a user interface for inputting the measurement depth. Depending on the embodiments, when the user inputs a portion for diagnosis, symptom, or purpose, a measurement depth may be set according to predetermined references corresponding thereto.

[0030] The voltage supplying portion 140 generates a voltage according to a measurement depth set by the measurement depth setting portion 150 and supplies the voltage to the pulse generating portion 122. Here, the voltage supplying portion 140 supplies a lower voltage as a measurement depth is shallower and supplies a

higher voltage as a measurement depth is deeper. For example, a direct current (DC)-DC converter may be used as the voltage supplying portion 140. In this case, supplied voltages may be adjusted by modulating pulse widths by the DC-DC converter. According to the embodiment of the present invention, since the pulse generating portion 122 does not always supply uniform maximum voltage but supplies voltages lower than the maximum voltage according to set measurement depths, loads applied to a battery end and a circuit portion become reduced, thereby increasing power efficiency.

[0031] FIG. 2 illustrates an example of a phantom that is measurable instead of a human body and displayed with supplied voltages according to measurement depths. Referring to FIG. 2, when a maximum measurement depth is 20 cm and a set measurement depth is 20 cm that is the maximum measurement depth, a maximum voltage of 100 V is supplied. However, when a set measurement depth is shallower than 20 cm, a voltage of 75 V, 50 V, or 25 V is supplied as shown in the drawing.

[0032] To allow the voltage supplying portion 140 to supply a voltage adjusted according to a set measurement depth, a measurement depth-voltage table that indicates voltages according to measurement depths in a memory (not shown) of the portable ultrasonic diagnostic apparatus. The processor 126 controls the voltage supplying portion 140 by referring to the measurement depth-voltage table, thereby adjusting supplied voltages. FIG. 3 illustrates one example of the measurement depth-voltage table described above. Referring to FIG. 3, supplied voltages corresponding to measurement depths 3 cm to 20 cm are shown. Here, excluding of 1 to 2 cm is because interesting areas in an ultrasonic image are generally places positioned at depths of 3 cm or below from the skin of a human body. Since areas at depths of 1 to 2 cm are mainly subcutaneous fat including skin, they do not have significant information for clinical diagnosis.

[0033] Referring to FIG. 1 again, the pulse generating portion 122 generates electric pulses with voltages corresponding to voltages supplied from the voltage supplying portion 140. For example, the pulse generating portion 122 generates electric pulse signals with a peak to peak value of +100 V to -100 V when a voltage of 100 V is supplied from the voltage supplying portion 140 and generates electric pulse signals with a peak to peak value of +50 V to 50 V when a voltage of 50 V is supplied.

[0034] When the pulse generating portion 122 generates electric pulse signals of different voltages depending on set measurement depths as described above, a level of an ultrasonic signal emitted to a subject through the ultrasonic transducer 110 is changed. Accordingly, a level of an echo signal input from the ultrasonic transducer 110 is also changed.

[0035] FIG. 4 illustrates electric pulses with different voltages generated by the pulse generating portion 122 and echo signals according thereto. Referring to FIG. 4, when a voltage of an electric pulse is reduced, a level of an echo signal according thereto is also reduced. Ac-

cordingly, it is necessary to compensate for the reduced level of the echo signal as described above.

[0036] For this, in the embodiment of the present invention, amplification properties according to a reflection depth of the variable gain amplifier 123 are allowed to be adjusted according to a measurement depth set by the measurement depth setting portion 150. Referring to FIG. 1, the compensation property adjusting portion 160 adjusts amplification properties according to the reflection depth (that is, an arrival time of a signal) of the variable gain amplifier 123 depending on a measurement depth set through the measurement depth setting portion 150. Adjusting of the amplification properties of the variable gain amplifier 123 may be, for example, achieved by configuring some of elements forming the variable gain amplifier 123 with variable elements and adequately adjusting element values of variable elements. Although the compensation property adjusting portion 160 is shown as a separate component from the variable gain amplifier 123 in FIG. 1, the compensation property adjusting portion 160 may be a component included in the variable gain amplifier 123.

[0037] FIG. 5 is a graph illustrating an example of the amplification properties of the variable gain amplifier 123 according to the reflection depth when a uniform maximum voltage (for example, 100 V) is supplied to the pulse generating portion 122 regardless of measurement depth. Referring to FIG. 5, the amplification properties have a maximum gain G_{max} at a maximum depth of 20 cm and have a form in which a gain is linearly increased according to reflection depth. Although it is shown as an example that the gain is linearly increased according to the reflection depth in FIG. 5, the gain may be increased like an exponential function or a logarithmic function according to attenuation properties in a human body.

[0038] In the embodiment of the present invention, to compensate for a level of an echo signal that is reduced as a voltage of an electric pulse generated by the pulse generating portion 122 is reduced, the amplification properties of the variable gain amplifier 123 according to the reflection depth may be adjusted, for example, as shown in FIGS. 6 to 8. FIGS. 6, 7, and 8 illustrate amplification properties when set measurement depths are 10 cm, 15 cm, and 5 cm, respectively.

[0039] Referring to FIGS. 6 to 8, amplification properties are adjusted to have a maximum gain G_{max} at a set measurement depth and have a greater gain when a reflection depth is deeper within a range below the set measurement depth, that is, to allow a gain to be gradually increased according to a reflection depth within a range below the set measurement depth and have the maximum gain G_{max} at the set measurement depth.

[0040] Referring to FIG. 6, the amplification properties have a maximum gain G_{max} at a set measurement depth of 10 cm and have a form in which a gain is gradually increased according to a reflection depth within a range below 10 cm.

[0041] Referring to FIG. 3, a voltage of an electric pulse

generated by the pulse generating portion 122 is a peak to peak value of +100 V to -100 V when the set measurement depth is 20 cm and an echo signal reflected at the reflection depth of 10 cm is amplified with a gain of $1/2 G_{max}$ through the variable gain amplifier 123. Since the voltage generated by the pulse generating portion 122 is reduced to be with a peak to peak value of +50 V to -50 V when the set measurement depth is 10 cm, a level of the echo signal is reduced to half. However, since the gain at the reflection depth of 10 cm is the maximum gain G_{max} according to adjustment of the amplification properties, the level of the echo signal amplified by the variable gain amplifier 123 is identical to a case in which a voltage of an electric pulse is a peak to peak value of +100 V to -100 V.

[0042] Referring to FIG. 7, the amplification properties have a maximum gain G_{max} at a set measurement depth of 15 cm and have a form in which a gain is gradually increased according to a reflection depth within a range below 15 cm.

[0043] Referring to FIG. 3, a voltage of an electric pulse generated by the pulse generating portion 122 is a peak to peak value of +100 V to -100 V when the set measurement depth is 20 cm and an echo signal reflected at the reflection depth of 15 cm is amplified with a gain of $3/4 G_{max}$ through the variable gain amplifier 123. Since the voltage generated by the pulse generating portion 122 is reduced to be with a peak to peak value of +75V to -75V when the set measurement depth is 15 cm, a level of the echo signal is reduced to 75%. However, since the gain at the reflection depth of 15 cm is the maximum gain G_{max} according to adjustment of the amplification properties, the level of the echo signal amplified by the variable gain amplifier 123 is identical to a case in which a voltage of an electric pulse is a peak to peak value of +100 V to -100 V.

[0044] Referring to FIG. 8, the amplification properties have a maximum gain G_{max} at a set measurement depth of 5 cm and have a form in which a gain is gradually increased according to a reflection depth within a range below 5 cm.

[0045] Referring to FIG. 3, a voltage of an electric pulse generated by the pulse generating portion 122 is a peak to peak value of +100 V to -100 V when the set measurement depth is 20 cm and an echo signal reflected at the reflection depth of 5 cm is amplified with a gain of $1/4 G_{max}$ through the variable gain amplifier 123. Since the voltage generated by the pulse generating portion 122 is reduced to be with a peak to peak value of +25V to -25V when the set measurement depth is 5 cm, a level of the echo signal is reduced to 25%. However, since the gain at the reflection depth of 5 cm is the maximum gain G_{max} according to adjustment of the amplification properties, the level of the echo signal amplified by the variable gain amplifier 123 is identical to a case in which a voltage of an electric pulse is a peak to peak value of +100 V to -100 V.

[0046] Although it is shown as an example that the gain

is linearly increased according to the reflection depth to the set measurement depth in FIGS. 6 to 8, the gain may be increased like an exponential function or a logarithmic function according to attenuation properties in a human body.

[0047] FIG. 9 is a flowchart illustrating a method of improving power efficiency of the portable ultrasonic diagnostic apparatus according to one embodiment of the present invention. The method of improving power efficiency according to the embodiment includes operations performed by the portable ultrasonic diagnostic apparatus described. Accordingly, even content omitted below but related to the portable ultrasonic diagnostic apparatus will be also applied to the method of improving power efficiency according to the embodiment.

[0048] In operation 710, the measurement depth setting portion 150 sets a measurement depth for measuring a subject.

[0049] In operation 720, the voltage supplying portion 140 sets a voltage to be supplied to the pulse generating portion 122 according to the set measurement depth.

[0050] In operation 730, the compensation property adjusting portion 160 adjusts amplification properties of the variable gain amplifier 123 according to a reflection depth according to the set measurement depth.

[0051] In operation 740, the voltage supplying portion 140 generates and supplies the set voltage to the pulse generating portion 122.

[0052] In operation 750, the pulse generating portion 122 generates an electric pulse of a voltage corresponding to the supplied voltage.

[0053] In operation 760, the ultrasonic transducer 110 generates an ultrasonic pulse from the electric pulse and emits the ultrasonic pulse to the inside of the subject.

[0054] In operation 770, the ultrasonic transducer 110 converts an ultrasonic echo reflected and received from the inside of the subject into an electric signal.

[0055] In operation 780, the variable gain amplifier 123 amplifies an echo signal that is a converted electric signal according to the amplification properties adjusted in operation 730 and compensates for attenuation according to the reflection depth.

[0056] In operation 790, the A/D converter 124 converts the echo signal compensated for loss thereof by the variable gain amplifier 123 into a digital signal.

[0057] The exemplary embodiments of the present invention have been described above. It should be understood by one of ordinary skill in the art that the disclosed embodiments should be considered not in a limitative point of view but in a descriptive point of view. The scope of the present invention is defined by the claims not by the above description.

Claims

1. A portable ultrasonic diagnostic apparatus comprising:

a measurement depth setting portion (150) configured to set a measurement depth for measurement based on an input received by the user; a voltage supplying portion (140) configured to supply a voltage to be applied to a pulse generating portion (122) according to the set measurement depth, wherein the voltage supplying portion is configured to supply a lower voltage when the set measurement depth is shallower and to supply a higher voltage when the set measurement depth is deeper; and the pulse generating portion (122) configured to generate an electric pulse to be applied to an ultrasonic transducer (110) to generate an ultrasonic wave and generate an electric pulse of a voltage corresponding to the voltage supplied from the voltage supplying portion (140); a variable gain amplifier (123) configured to compensate for attenuation according to a reflection depth by amplifying an echo signal input from the ultrasonic transducer (110); and a compensation property adjusting portion (160) configured to adjust amplification properties of the variable gain amplifier (123) according to the reflection depth, wherein the compensation property adjusting portion (160) is configured to adjust the amplification properties to have a certain maximum gain at the set measurement depth and to have a form in which the gain is increased according to the reflection depth within the range below the set measurement depth.

2. A method of improving power efficiency of a portable ultrasonic diagnostic apparatus, comprising:

setting by means of a measurement depth setting portion (150) a measurement depth for measurement based on an input received by the user; supplying by means of a voltage supplying portion (140) a voltage according to the set measurement depth to a pulse generating portion which generates an electric pulse to be applied to an ultrasonic transducer, wherein a lower voltage is supplied when the set measurement depth is shallower and a higher voltage is supplied when the set measurement depth is deeper; and generating an electric pulse, by means of the pulse generating portion (122), according to the supplied voltage; compensating for attenuation according to a reflection depth by amplifying an echo signal input from the ultrasonic transducer (110) using a variable gain amplifier (123); and adjusting by means of a compensation property adjusting portion (160) amplification properties

of the variable gain amplifier (123) according to the reflection depth,
 wherein the compensation property adjusting portion (160) is configured to adjust the amplification properties to have a certain maximum gain at the set measurement depth and to have a form in which the gain is increased according to the reflection depth within the range below the set measurement depth.

Patentansprüche

1. Tragbares Ultraschall-Diagnosegerät, umfassend:

einen Messtiefen-Einstellabschnitt (150), der dazu konfiguriert ist, eine Messtiefe für Messung auf Basis einer Eingabe, die vom Benutzer empfangen wird, einzustellen;
 einen Spannungszuführabschnitt (140), der dazu konfiguriert ist, gemäß der eingestellten Messtiefe eine Spannung zuzuführen, die an einen Impulserzeugungsabschnitt (122) angelegt werden soll, wobei der Spannungszuführabschnitt dazu konfiguriert ist, eine niedrigere Spannung zuzuführen, wenn die eingestellte Messtiefe flacher ist, und eine höhere Spannung zuzuführen, wenn die eingestellte Messtiefe tiefer ist; und
 den Impulserzeugungsabschnitt (122), der dazu konfiguriert ist, einen elektrischen Impuls zu erzeugen, der an einen Ultraschallwandler (110) angelegt werden soll, um eine Ultraschallwelle zu erzeugen, und einen elektrischen Impuls einer Spannung zu erzeugen, die der vom Spannungszuführabschnitt (140) zugeführten Spannung entspricht;
 einen Verstärker mit variabler Verstärkung (123), der dazu konfiguriert ist, Dämpfung gemäß einer Reflexionstiefe durch Verstärken eines Echosignals, das vom Ultraschallwandler (110) eingegeben wird, zu kompensieren; und einen Kompensationseigenschaften-Justierabschnitt (160), der dazu konfiguriert ist, Verstärkungseigenschaften des Verstärkers mit variabler Verstärkung (123) gemäß der Reflexionstiefe zu justieren,
 wobei der Kompensationseigenschaften-Justierabschnitt (160) dazu konfiguriert ist, die Verstärkungseigenschaften so zu justieren, dass sie bei der eingestellten Messtiefe eine gewisse maximale Verstärkung aufweisen, und dass sie eine Form aufweisen, bei der die Verstärkung gemäß der Reflexionstiefe innerhalb des Bereichs unterhalb der eingestellten Messtiefe erhöht wird.

2. Verfahren zum Verbessern der Leistungseffizienz

eines tragbaren Ultraschall-Diagnosegeräts, umfassend:

Einstellen, mittels eines Messtiefen-Einstellabschnitts (150), einer Messtiefe für Messung auf Basis einer Eingabe, die vom Benutzer empfangen wird;
 Zuführen, mittels eines Spannungszuführabschnitts (140), einer Spannung gemäß der eingestellten Messtiefe zu einem Impulserzeugungsabschnitt, der einen elektrischen Impuls erzeugt, welcher an einen Ultraschallwandler angelegt werden soll, wobei eine niedrigere Spannung zugeführt wird, wenn die eingestellte Messtiefe flacher ist, und eine höhere Spannung zugeführt wird, wenn die eingestellte Messtiefe tiefer ist; und
 Erzeugen, mittels des Impulserzeugungsabschnitts (122), eines elektrischen Impulses gemäß der zugeführten Spannung;
 Kompensieren von Dämpfung gemäß einer Reflexionstiefe durch Verstärken eines Echosignals, das vom Ultraschallwandler (110) eingegeben wird, unter Verwendung eines Verstärkers mit variabler Verstärkung (123); und
 Justieren, mittels eines Kompensationseigenschaften-Justierabschnitts (160), von Verstärkungseigenschaften des Verstärkers mit variabler Verstärkung (123) gemäß der Reflexionstiefe,
 wobei der Kompensationseigenschaften-Justierabschnitt (160) dazu konfiguriert ist, die Verstärkungseigenschaften so zu justieren, dass sie bei der eingestellten Messtiefe eine gewisse maximale Verstärkung aufweisen, und dass sie eine Form aufweisen, bei der die Verstärkung gemäß der Reflexionstiefe innerhalb des Bereichs unterhalb der eingestellten Messtiefe erhöht wird.

Revendications

1. Appareil de diagnostic à ultrasons portable comprenant :

une partie de réglage de profondeur de mesure (150) configurée pour régler une profondeur de mesure pour une mesure sur la base d'une entrée reçue par l'utilisateur ;
 une partie de fourniture de tension (140) configurée pour fournir une tension à appliquer à une partie génératrice d'impulsions (122) selon la profondeur de mesure réglée, où la partie de fourniture de tension est configurée pour fournir une tension inférieure lorsque la profondeur de mesure réglée est moins profonde et pour fournir une tension supérieure lorsque la profondeur


de mesure réglée est plus profonde ; et
la partie génératrice d'impulsions (122) configurée pour générer une impulsion électrique à appliquer à un transducteur à ultrasons (110) afin de générer une onde ultrasonore et générer une impulsion électrique d'une tension correspondant à la tension fournie par la partie de fourniture de tension (140) ;
un amplificateur à gain variable (123) configuré pour compenser l'atténuation en fonction d'une profondeur de réflexion en amplifiant un signal d'écho entré par le transducteur à ultrasons (110) ; et
une partie d'ajustement de propriété de compensation (160) configurée pour ajuster les propriétés d'amplification de l'amplificateur à gain variable (123) en fonction de la profondeur de réflexion,
dans lequel la partie d'ajustement de propriété de compensation (160) est configurée pour ajuster les propriétés d'amplification afin d'avoir un certain gain maximal à la profondeur de mesure réglée et d'avoir une forme dans laquelle le gain est augmenté selon la profondeur de réflexion dans la plage située en dessous de la profondeur de mesure réglée.

2. Procédé d'amélioration de l'efficacité énergétique d'un appareil de diagnostic à ultrasons portable, comprenant :


établir au moyen d'une partie de réglage de profondeur de mesure (150) une profondeur de mesure pour une mesure sur la base d'une entrée reçue par l'utilisateur ;
fournir au moyen d'une partie d'alimentation en tension (140) une tension en fonction de la profondeur de mesure réglée à une partie génératrice d'impulsions générant une impulsion électrique à appliquer à un transducteur à ultrasons, où une tension inférieure est fournie lorsque la profondeur de mesure réglée est moins profonde et une tension supérieure est fournie lorsque la profondeur de mesure réglée est plus profonde ; et
générer une impulsion électrique au moyen de la partie génératrice d'impulsions (122), en fonction de la tension fournie ;
compenser l'atténuation en fonction d'une profondeur de réflexion en amplifiant un signal d'écho entré par le transducteur à ultrasons (110) en utilisant un amplificateur à gain variable (123) ; et
ajuster au moyen d'une partie d'ajustement de propriété de compensation (160) les propriétés d'amplification de la profondeur de l'amplificateur à gain variable (123) en fonction de la profondeur de réflexion,

dans lequel la partie d'ajustement de propriété de compensation (160) est configurée pour ajuster les propriétés d'amplification afin d'avoir un certain gain maximal à la profondeur de mesure réglée et d'avoir une forme dans laquelle le gain est augmenté en fonction de la profondeur de réflexion dans la plage située en dessous de la mesure de profondeur réglée.

【Fig.1】

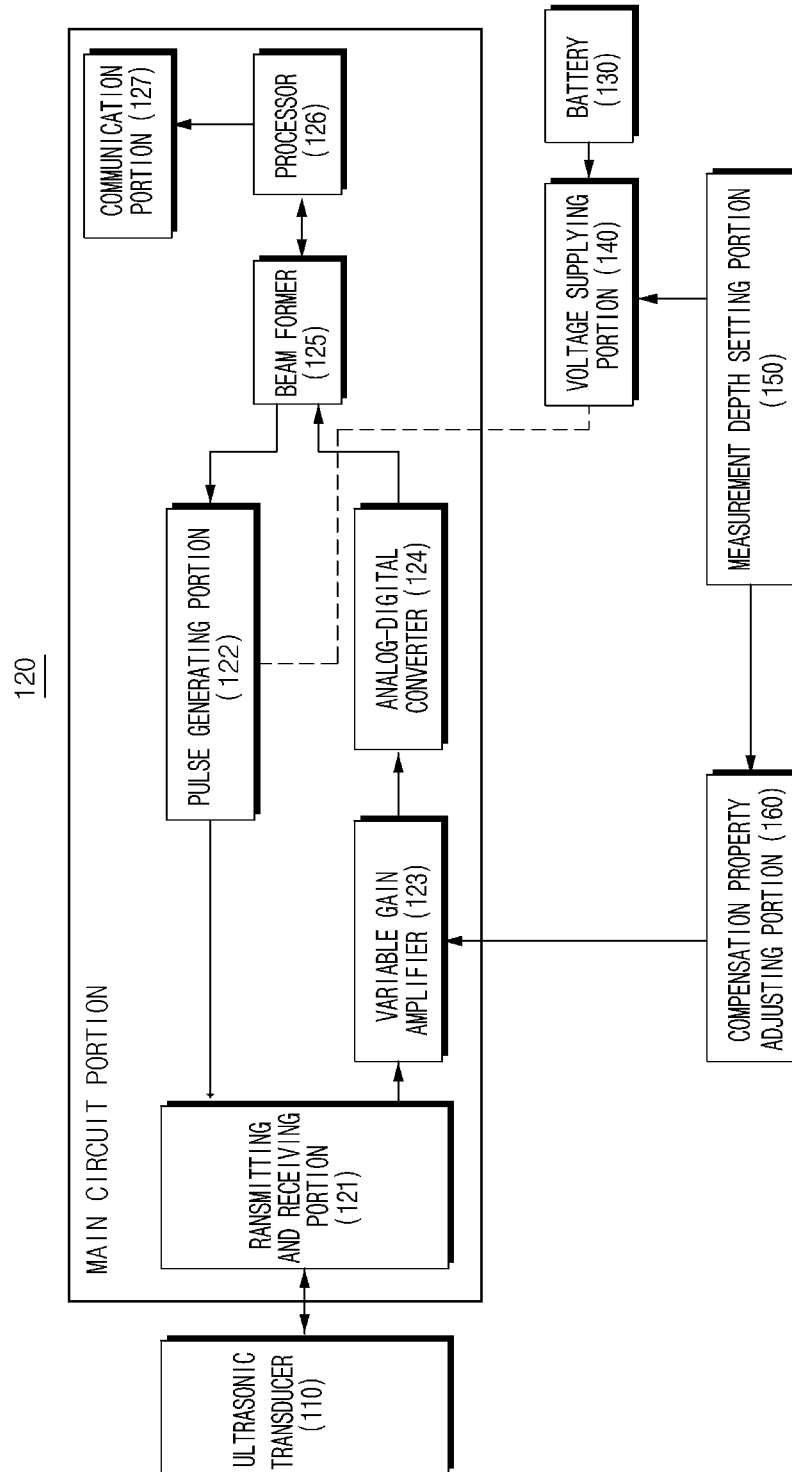


【Fig.2】

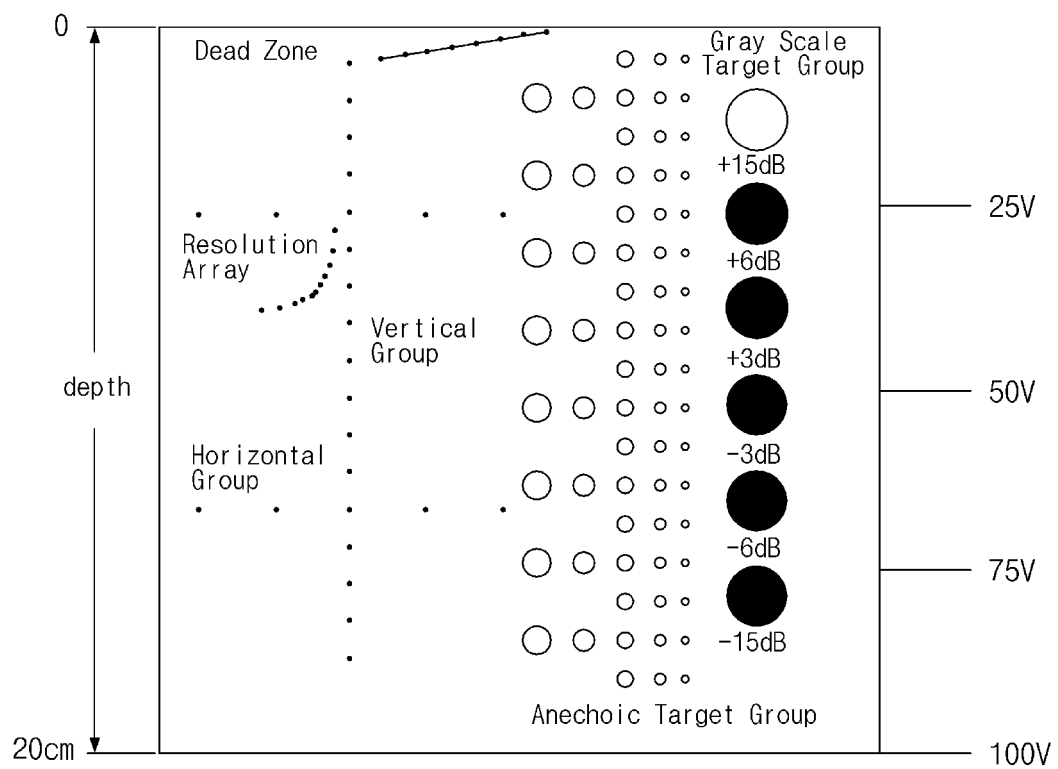


【Fig.3】

MEASUREMENT DEPTH (cm)	VOLTAGE (V)
3	15
4	20
5	25
6	30
7	35
8	40
9	45
10	50
11	55
12	60
13	65
14	70
15	75
16	80
17	85
18	90
19	95
20	100


【Fig.4】

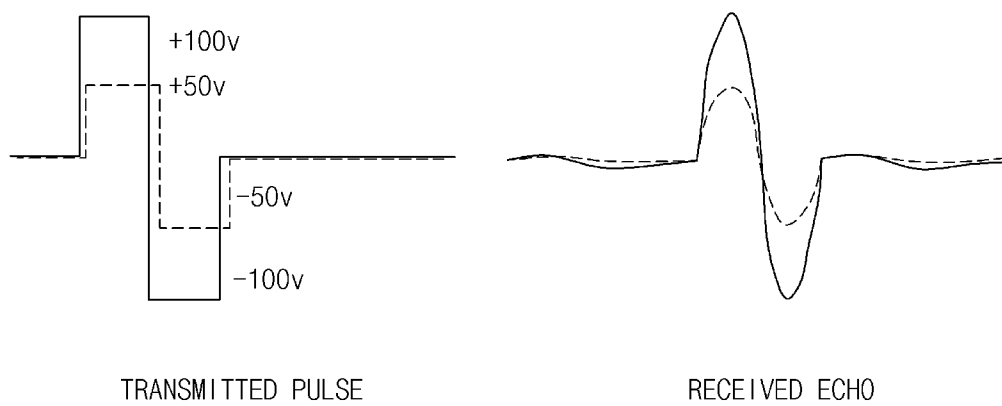


【Fig.5】

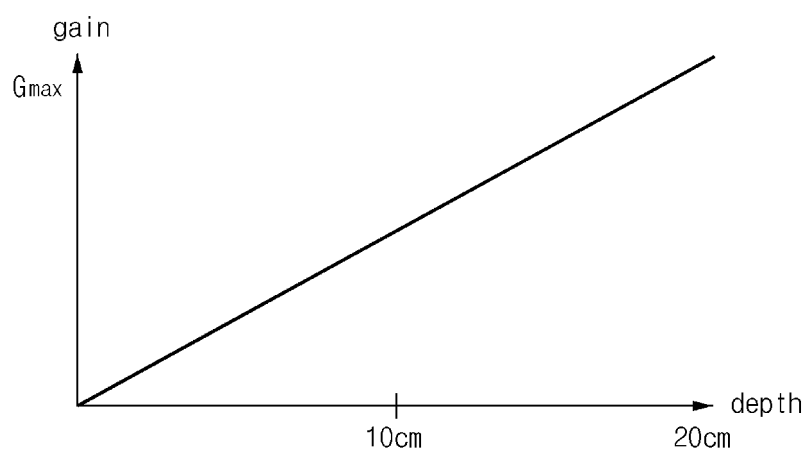


【Fig.6】

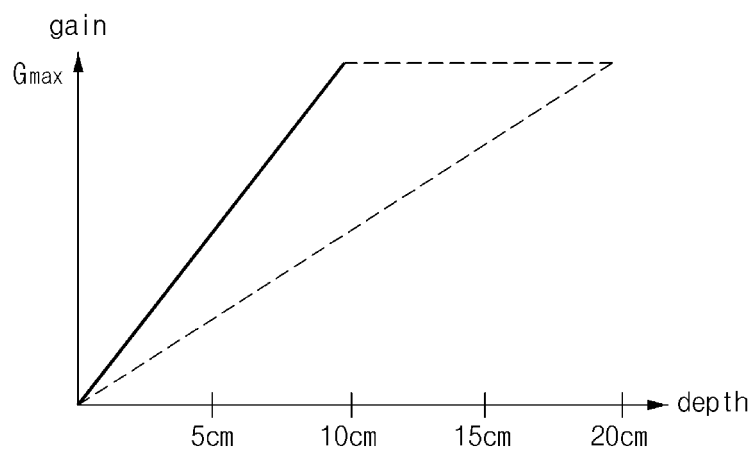


【Fig.7】

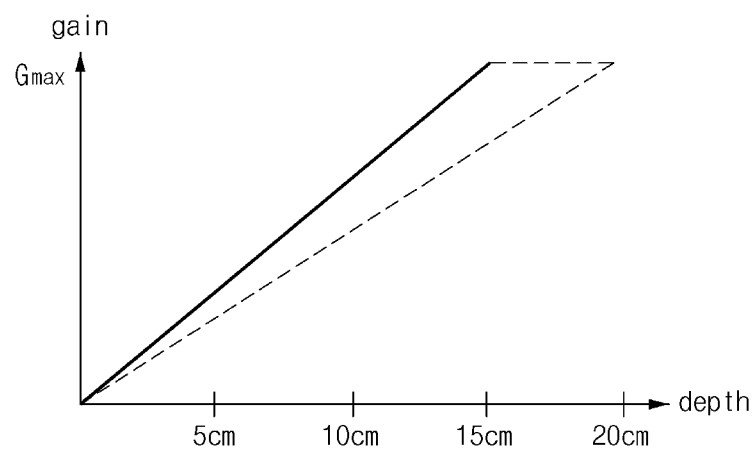

【Fig.8】

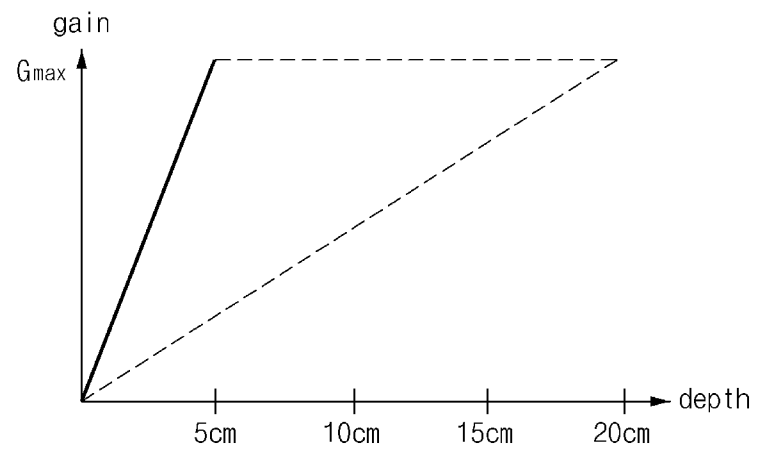

【Fig.9】

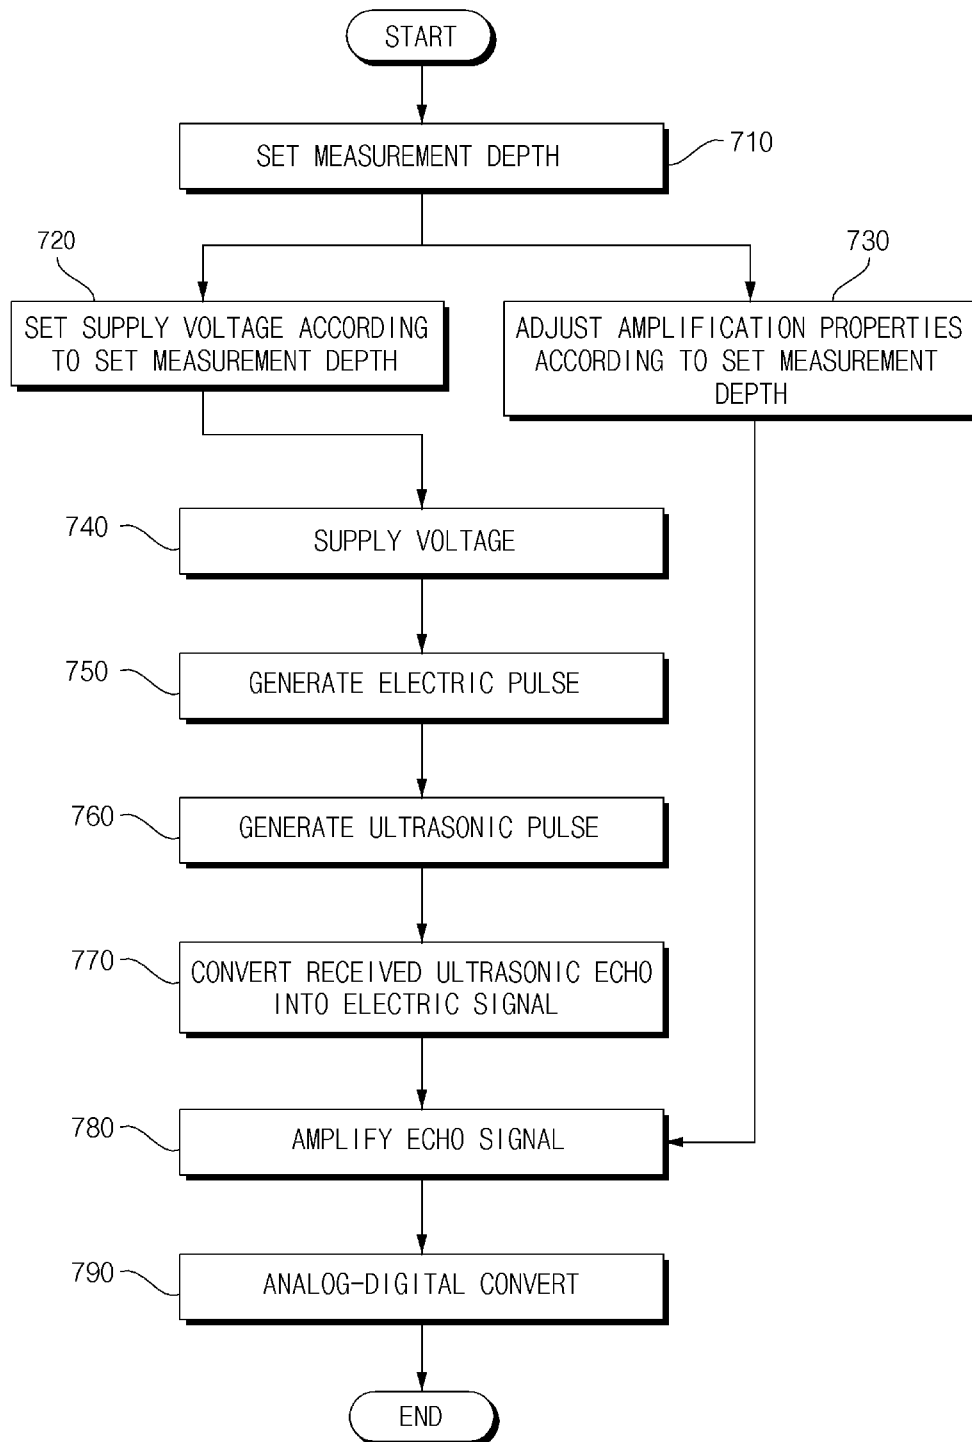

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2014003404 A1 [0006]

专利名称(译)	便携式超声波诊断装置和提高这种装置的功率效率的方法		
公开(公告)号	EP3167807B1	公开(公告)日	2019-05-08
申请号	EP2015819187	申请日	2015-03-13
[标]申请(专利权)人(译)	和赛仑有限公司		
申请(专利权)人(译)	healcerion有限公司		
当前申请(专利权)人(译)	healcerion有限公司		
[标]发明人	RYU JEONG WON CHOUNG YOU CHAN CHUNG WOOK JIN		
发明人	RYU, JEONG WON CHOUNG, YOU CHAN CHUNG, WOOK JIN		
IPC分类号	A61B8/08		
CPC分类号	A61B8/4427 A61B8/08 A61B8/14 A61B8/4483 A61B8/54 A61B8/56 A61B8/585		
优先权	1020140085249 2014-07-08 KR		
其他公开文献	EP3167807A4 EP3167807A1		
外部链接	Espacenet		

摘要(译)

根据本发明的便携式超声波诊断装置包括：测量深度设定单元，用于设定要测量的测量深度；电压供应单元，用于根据设定的测量深度提供施加到脉冲发生单元的电压，其中设定的测量深度越小，所提供的电压越小；脉冲发生单元，用于产生要施加到超声换能器的电脉冲以产生超声波，其中产生的电脉冲是与从电压供应单元提供的电压相对应的电压的电脉冲。

【 Fig. 1 】

