



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
03.07.2013 Bulletin 2013/27

(51) Int Cl.:
A61B 8/00 (2006.01)
A61B 8/08 (2006.01)
A61B 8/06 (2006.01)
G01S 15/89 (2006.01)

(21) Application number: **12184235.5**

(22) Date of filing: **13.09.2012**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventors:
• **Kim, Min Woo**
135-851 Seoul (KR)
• **Kang, Woo Hyun**
135-851 Seoul (KR)

(30) Priority: **27.12.2011 KR 20110143854**

(74) Representative: **Schmid, Wolfgang**
Lorenz & Kollegen
Patentanwälte Partnerschaftsgesellschaft
Alte Ulmer Strasse 2
89522 Heidenheim (DE)


(71) Applicant: **Samsung Medison Co., Ltd.**
Gangwon-do 250-870 (KR)

(54) **Providing motion mode image in ultrasound system**

(57) There are provided embodiments for providing a motion mode image corresponding to a motion of a target object. In one embodiment, by way of non-limiting example, an ultrasound system comprises: a user input unit configured to receive input information for setting a region of interest on a brightness mode image; and a processing unit configured to form the brightness mode image based on first ultrasound data corresponding to a

target object and form vector information of the target object based on second ultrasound data corresponding to the target object, the processing unit being further configured to form a motion mode image including at least one of a brightness motion mode image and a color motion mode image based on the first ultrasound data and the vector information corresponding to the region of interest.

FIG. 1

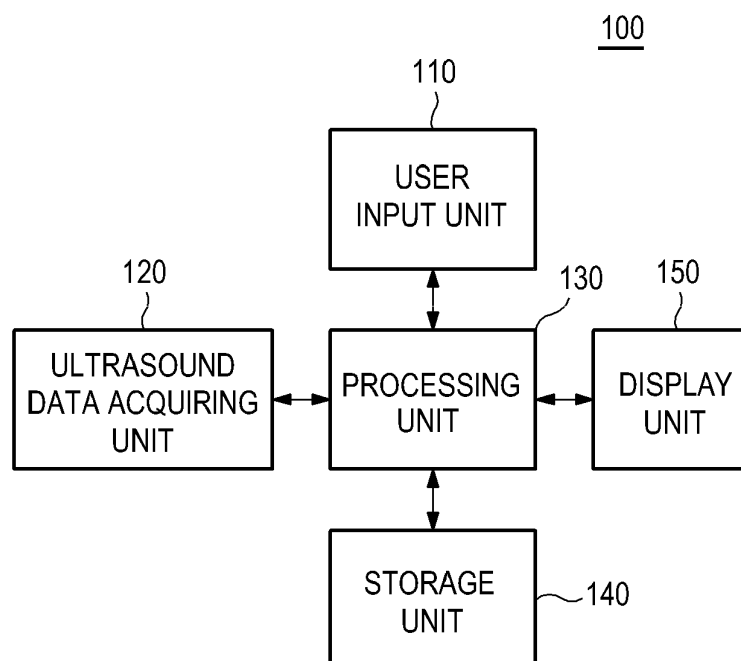

Description

CROSS-REFERENCE TO RELATED APPLICATION

- 5 **[0001]** The present application claims priority from Korean Patent Application No. 10-2011-0143854 filed on December 27, 2011.

TECHNICAL FIELD

- 10 **[0002]** The present disclosure generally relates to ultrasound systems, and more particularly to providing a motion mode image in an ultrasound system.

BACKGROUND

- 15 **[0003]** An ultrasound system has become an important and popular diagnostic tool since it has a wide range of applications. Specifically, due to its non-invasive and non-destructive nature, the ultrasound system has been extensively used in the medical profession. Modern high-performance ultrasound systems and techniques are commonly used to produce two-dimensional or three-dimensional ultrasound images of internal features of target objects (e.g., human organs).

- 20 **[0004]** The ultrasound system provides ultrasound images of various modes including a brightness mode image representing reflection coefficients of ultrasound signals (i.e., ultrasound echo signals) reflected from a target object of a living body with a two-dimensional image, a Doppler mode image representing velocity of a moving target object with spectral Doppler by using a Doppler effect, a color Doppler mode image representing velocity of the moving target object with colors by using the Doppler effect, an elastic image representing mechanical characteristics of tissues before and
25 after applying compression thereto, etc.

- [0005]** The ultrasound system transmits ultrasound signals to the living body including a moving target object (e.g., blood flow) and receives ultrasound signals (i.e., ultrasound echo signals) from the living body. The ultrasound system further forms the color Doppler mode image representing velocities of the target object with colors based on the ultrasound echo signals. The color Doppler image is used to diagnose disease of a blood vessel, a heart and the like. However,
30 the color Doppler image does not represent an accurate motion of the target object since the respective colors in the color Doppler image indicate the velocity of the target object, which moves forward in a transmission direction of the ultrasound signals and backward in the transmission direction of the ultrasound signals.

- [0006]** To resolve this problem, vector Doppler methods capable of obtaining motion (i.e., velocity and direction) of the target object are used. A cross beam-based method of the vector Doppler methods acquires velocity components
35 of the target object from at least two different directions, and combines the velocity components to form vector information including two-dimensional or three-dimensional direction information and velocity information.

SUMMARY

- 40 **[0007]** There are provided embodiments for providing a motion mode image corresponding to the motion of a target object.

- [0008]** In one embodiment, by way of non-limiting example, an ultrasound system comprises: a user input unit configured to receive input information for setting a region of interest on a brightness mode image; and a processing unit configured to form the brightness mode image based on first ultrasound data corresponding to a target object, and form
45 vector information of the target object based on second ultrasound data corresponding to the target object, the processing unit being further configured to form a motion mode image including at least one of a brightness motion mode image and a color motion mode image based on the first ultrasound data and the vector information corresponding to the region of interest.

- [0009]** In another embodiment, there is provided a method of providing a motion mode image, comprising: a) forming
50 a brightness mode image based on first ultrasound data corresponding to a target object; b) forming vector information of the target object based on second ultrasound data corresponding to the target object; c) receiving input information for setting a region of interest on the brightness mode image; and d) forming a motion mode image including at least one of a brightness motion mode image and a color motion mode image based on the first ultrasound data and the vector information corresponding to the region of interest.

- 55 **[0010]** The Summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This Summary is not intended to identify key or essential features of the claimed subject matter, nor is it intended to be used in determining the scope of the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

- 5 FIG. 1 is a block diagram showing an illustrative embodiment of an ultrasound system.
 FIG. 2 is a schematic diagram showing an example of a brightness mode image and a region of interest.
 FIG. 3 is a block diagram showing an illustrative embodiment of an ultrasound data acquiring unit.
 FIGS. 4 to 7 are schematic diagrams showing examples of transmission directions and reception directions.
 FIG. 8 is a schematic diagram showing an example of sampling data and pixels of an ultrasound image.
 10 FIGS. 9 to 12 are schematic diagrams showing examples of performing a receiving beam-forming.
 FIG. 13 is a schematic diagram showing an example of setting weights.
 FIG. 14 is a schematic diagram showing an example of setting a sampling data set.
 FIG. 15 is a flow chart showing a process of forming a motion mode image.
 FIG. 16 is a schematic diagram showing an example of the transmission directions, the reception directions, the
 15 vector information and an over-determined problem.
 FIGS. 17 and 18 are schematic diagrams showing examples of motion mode images.

DETAILED DESCRIPTION

- 20 **[0012]** A detailed description may be provided with reference to the accompanying drawings. One of ordinary skill in the art may realize that the following description is illustrative only and is not in any way limiting.
- [0013]** Referring to FIG. 1, an ultrasound system 100 in accordance with an illustrative embodiment is shown. As depicted therein, the ultrasound system 100 includes a user input unit 110.
- [0014]** The user input unit 110 is configured to receive input information from a user. In one embodiment, the input
 25 information includes first input information for setting a first region of interest ROI on a brightness mode image BI, as shown in FIG. 2. The first region of interest ROI includes a color box for obtaining vector information corresponding to motion (i.e., velocity and direction) of a target object. The input information further includes second input information for setting a second region of interest VML on the brightness mode image BI, as shown in FIGS. 17 and 18. The second region of interest VML is a region of interest for obtaining a motion mode image. The second region of interest VML is
 30 a straight line or a curve. However, it should be noted herein that the second region of interest VML may not be limited thereto. The motion mode image is an image for representing how biological information of the target object varies with time based on at least one of vector information and ultrasound data of the target object. In FIG. 2, a reference numeral BV represents a blood vessel. The user input unit 110 includes a control panel, a track ball, a mouse, a keyboard and the like.
- [0015]** The ultrasound system 100 further includes an ultrasound data acquiring unit 120. The ultrasound data acquiring unit 120 is configured to transmit ultrasound signals to a living body. The living body includes moving target objects (e.g., blood vessel, heart, blood flow, etc.). The ultrasound data acquiring unit 120 is further configured to receive ultrasound signals (i.e., ultrasound echo signals) from the living body to acquire ultrasound data corresponding to an ultrasound image.
- [0016]** FIG. 3 is a block diagram showing an illustrative embodiment of the ultrasound data acquiring unit. Referring to FIG. 3, the ultrasound data acquiring unit 120 includes an ultrasound probe 310.
- [0017]** The ultrasound probe 310 includes a plurality of elements 311 (see FIG. 4) for reciprocally converting between ultrasound signals and electrical signals. The ultrasound probe 310 is configured to transmit the ultrasound signals to the living body. The ultrasound signals transmitted from the ultrasound probe 310 are plane wave signals that the
 45 ultrasound signals are not focused at a focusing point or focused signals that the ultrasound signals are focused at the focusing point. However, it should be noted herein that the ultrasound signals may not be limited thereto. The ultrasound probe 310 is further configured to receive the ultrasound echo signals from the living body to output electrical signals (hereinafter, referred to as "reception signals"). The reception signals are analog signals. The ultrasound probe 310 includes a convex probe, a linear probe and the like.
- [0018]** The ultrasound data acquiring unit 120 further includes a transmitting section 320. The transmitting section 320 is configured to control the transmission of the ultrasound signals. The transmitting section 320 is further configured to generate electrical signals (hereinafter, referred to as "transmission signals") in consideration of the elements 311.
- [0019]** In one embodiment, the transmitting section 320 is configured to generate transmission signals (hereinafter, referred to as "brightness mode transmission signals") for obtaining the brightness mode image BI in consideration of
 55 the elements 311. Thus, the ultrasound probe 310 is configured to convert the brightness mode transmission signals provided from the transmitting section 320 into the ultrasound signals, transmit the ultrasound signals to the living body, and receive the ultrasound echo signals from the living body to output reception signals (hereinafter, referred to as "brightness mode reception signals").

[0020] The transmitting section 320 is further configured to generate transmission signals (hereinafter, referred to as "Doppler mode transmission signals") corresponding to an ensemble number in consideration of the elements 311 and at least one transmission direction of the ultrasound signals (i.e., transmission beam). Thus, the ultrasound probe 310 is configured to convert the Doppler mode transmission signals provided from the transmitting section 320 into the ultrasound signals, transmit the ultrasound signals to the living body in the at least one transmission direction, and receive the ultrasound echo signals from the living body to output reception signals (hereinafter, referred to as "Doppler mode reception signals"). The ensemble number represents the number of transmitting and receiving the ultrasound signals to/from a target object.

[0021] As one example, the transmitting section 320 is configured to generate the Doppler mode transmission signals corresponding to the ensemble number in consideration of a transmission direction T_x and the elements 311, as shown in FIG. 4. The transmission direction is one direction in the range of a direction (0 degree) perpendicular to a longitudinal direction of the elements 311 to a maximum steering direction of the transmission beam.

[0022] As another example, the transmitting section 320 is configured to generate first Doppler mode transmission signals corresponding to the ensemble number in consideration of a first transmission direction T_{x1} and the elements 311, as shown in FIG. 5. Thus, the ultrasound probe 310 is configured to convert the first Doppler mode transmission signals provided from the transmitting section 320 into the ultrasound signals, transmit the ultrasound signals to the living body in the first transmission direction T_{x1} , and receive the ultrasound echo signals from the living body to output first Doppler mode reception signals. The transmitting section 320 is further configured to generate second Doppler mode transmission signals corresponding to the ensemble number in consideration of a second transmission direction T_{x2} and the elements 311, as shown in FIG. 5. Thus, the ultrasound probe 310 is configured to convert the second Doppler mode transmission signals provided from the transmitting section 320 into the ultrasound signals, transmit the ultrasound signals to the living body in the second transmission direction T_{x2} , and receive the ultrasound echo signals from the living body to output second Doppler mode reception signals. In FIG. 5, a reference numeral PRI represents a pulse repeat interval.

[0023] In another embodiment, the transmitting section 320 is configured to generate the brightness mode transmission signals for obtaining the brightness mode image BI in consideration of the elements 311. Thus, the ultrasound probe 310 is configured to convert the brightness mode transmission signals provided from the transmitting section 320 into the ultrasound signals, transmit the ultrasound signals to the living body, and receive the ultrasound echo signals from the living body to output the brightness mode reception signals.

[0024] The transmitting section 320 is further configured to generate the Doppler mode transmission signals corresponding to the ensemble number in consideration of the at least one transmission direction and the elements 311. Thus, the ultrasound probe 310 is configured to convert the Doppler mode transmission signals provided from the transmitting section 320 into the ultrasound signals, transmit the ultrasound signals to the living body, and receive the ultrasound echo signals from the living body to output the Doppler mode reception signals. The ultrasound signals are transmitted in an interleaved transmission scheme. The interleaved transmission scheme will be described below in detail.

[0025] For example, the transmitting section 320 is configured to generate the first Doppler mode transmission signals in consideration of the first transmission direction T_{x1} and the elements 311, as shown in FIG. 6. Thus, the ultrasound probe 310 is configured to convert the first Doppler mode transmission signals provided from the transmitting section 320 into the ultrasound signals, and transmit the ultrasound signals to the living body in the first transmission direction T_{x1} . Thereafter, the transmitting section 320 is further configured to generate the second Doppler mode transmission signals in consideration of the second transmission direction T_{x2} and the elements 311, as shown in FIG. 6. Thus, the ultrasound probe 310 is configured to convert the second Doppler mode transmission signals provided from the transmitting section 320 into the ultrasound signals, and transmit the ultrasound signals to the living body in the second transmission direction T_{x2} . The ultrasound probe 310 is further configured to receive the ultrasound echo signals (i.e., ultrasound echo signals corresponding to first Doppler mode transmission signals) from the living body to output the first Doppler mode reception signals. The ultrasound probe 310 is also configured to receive the ultrasound echo signals (i.e., ultrasound echo signals corresponding to second Doppler mode transmission signals) from the living body to output the second Doppler mode reception signals.

[0026] Thereafter, the transmitting section 320 is configured to generate the first Doppler mode transmission signals based on the pulse repeat interval, as shown in FIG. 6. Thus, the ultrasound probe 310 is configured to convert the first Doppler mode transmission signals provided from the transmitting section 320 into the ultrasound signals, and transmit the ultrasound signals to the living body in the first transmission direction T_{x1} . The transmitting section 320 is further configured to generate the second Doppler mode transmission signals based on the pulse repeat interval, as shown in FIG. 6. Thus, the ultrasound probe 310 is configured to convert the second Doppler mode transmission signals provided from the transmitting section 320 into the ultrasound signals, and transmit the ultrasound signals to the living body in the second transmission direction T_{x2} . The ultrasound probe 310 is further configured to receive the ultrasound echo signals (i.e., ultrasound echo signals corresponding to first Doppler mode transmission signals) from the living body to output the first Doppler mode reception signals. The ultrasound probe 310 is also configured to receive the ultrasound

echo signals (i.e., ultrasound echo signals corresponding to second Doppler mode reception signals) from the living body to output the second Doppler mode reception signals.

[0027] As described above, the transmitting section 320 is configured to generate the first Doppler mode transmission signals and the second Doppler mode transmission signals corresponding to the ensemble number.

[0028] In yet another embodiment, the transmitting section 320 is configured to generate the brightness mode transmission signals for obtaining the brightness mode image BI in consideration of the elements 311. Thus, the ultrasound probe 310 is configured to convert the brightness mode transmission signals provided from the transmitting section 320 into the ultrasound signals, transmit the ultrasound signals to the living body, and receive the ultrasound echo signals from the living body to output the brightness mode reception signals.

[0029] The transmitting section 320 is further configured to generate the Doppler mode transmission signals corresponding to the ensemble number in consideration of the at least one transmission direction and the elements 311. Thus, the ultrasound probe 310 is configured to convert the Doppler mode transmission signals provided from the transmitting section 320 into the ultrasound signals, transmit the ultrasound signals to the living body, and receive the ultrasound echo signals from the living body to output the Doppler mode reception signals. The ultrasound signals are transmitted according to the pulse repeat interval.

[0030] For example, the transmitting section 320 is configured to generate the first Doppler mode transmission signals in consideration of the first transmission direction Tx_1 and the elements 311 based on the pulse repeat interval, as shown in FIG. 7. As such, the ultrasound probe 310 is configured to convert the first Doppler mode transmission signals provided from the transmitting section 320 into the ultrasound signals, transmit the ultrasound signals to living body in the first transmission direction Tx_1 , and receive the ultrasound echo signals from the living body to output the first Doppler mode reception signals. The transmitting section 320 is further configured to generate the second Doppler mode transmission signals in consideration of the second transmission direction Tx_2 and the elements 311 based on the pulse repeat interval, as shown in FIG. 7. Thus, the ultrasound probe 310 is configured to convert the second Doppler mode transmission signals provided from the transmitting section 320 into the ultrasound signals, transmit the ultrasound signals to the living body in the second transmission direction Tx_2 , and receive the ultrasound echo signals from the living body to output the second Doppler mode reception signals.

[0031] As described above, the transmitting section 320 is configured to generate the first Doppler mode transmission signals and the second Doppler mode transmission signals corresponding to the ensemble number based on the pulse repeat interval.

[0032] Referring back to FIG. 3, the ultrasound data acquiring unit 120 further includes a receiving section 330. The receiving section 330 is configured to perform an analog-digital conversion upon the reception signals provided from the ultrasound probe 310 to form sampling data of the reception signals. The receiving section 330 is further configured to perform a reception beam-forming upon the sampling data in consideration of the elements 311 to form reception-focused data. The reception beam-forming will be described below in detail.

[0033] In one embodiment, the receiving section 330 is configured to perform the analog-digital conversion upon the brightness mode reception signals provided from the ultrasound probe 310 to form sampling data (hereinafter, referred to as "brightness mode sampling data"). The receiving section 330 is further configured to perform the reception beam-forming upon the brightness mode sampling data to form reception-focused data (hereinafter, referred to as "brightness mode reception-focused data").

[0034] The receiving section 330 is further configured to perform the analog-digital conversion upon the Doppler mode reception signals provided from the ultrasound probe 310 to form sampling data (hereinafter, referred to as "Doppler mode sampling data"). The receiving section 330 is further configured to perform the reception beam-forming upon the Doppler mode sampling data to form reception-focused data (hereinafter, referred to as "Doppler mode reception-focused data") corresponding to the at least one reception direction of the ultrasound echo signals (i.e., reception beam).

[0035] As one example, the receiving section 330 is configured to perform the analog-digital conversion upon the Doppler mode reception signals provided from the ultrasound probe 310 to form the Doppler mode sampling data. The receiving section 330 is further configured to perform the reception beam-forming upon the Doppler mode sampling data to form first Doppler mode reception-focused data corresponding to the first reception direction Rx_1 and second Doppler mode reception-focused data corresponding to the second reception direction Rx_2 , as shown in FIG. 4.

[0036] As another example, the receiving section 330 is configured to perform the analog-digital conversion upon the first Doppler mode reception signals provided from the ultrasound probe 310 to form first Doppler mode sampling data corresponding to the first transmission direction Tx_1 , as shown in FIG. 5. The receiving section 330 is further configured to perform the reception beam-forming upon the first Doppler mode sampling data to form the first Doppler mode reception-focused data corresponding to the first reception direction Rx_1 . The receiving section 330 is also configured to perform the analog-digital conversion upon the second Doppler mode reception signals provided from the ultrasound probe 310 to form second Doppler mode sampling data corresponding to the second transmission direction Tx_2 , as shown in FIG. 5. The receiving section 330 is further configured to perform the reception beam-forming upon the second Doppler mode sampling data to form the second Doppler mode reception-focused data corresponding to the second

reception direction Rx_2 . If the reception direction is perpendicular to the elements 311 of the ultrasound probe 310, then an aperture size of being capable of receiving the ultrasound signals can be a maximum value.

[0037] The reception beam-forming is described with reference to the accompanying drawings.

[0038] In one embodiment, the receiving section 330 is configured to perform the analog-digital conversion upon the reception signals provided through a plurality of channels CH_k , wherein $1 \leq k \leq N$, from the ultrasound probe 310 to form sampling data $S_{i,j}$, wherein the i and j are a positive integer, as shown in FIG. 8. The sampling data $S_{i,j}$ are stored in a storage unit 140. The receiving section 330 is further configured to detect pixels corresponding to the sampling data based on positions of the elements 311 and orientation of pixels $P_{a,b}$, wherein $1 \leq a \leq M$, $1 \leq b \leq N$, of the ultrasound image UI with respect to the elements 311. That is, the receiving section 330 selects the pixels that the respective sampling data are used as pixel data thereof, during the reception beam-forming based on the positions of the elements 311 and the orientation of the respective pixels of the ultrasound image UI with respect to the elements 311. The receiving section 330 is further configured to cumulatively assign the sampling data corresponding to the selected pixels as the pixel data.

[0039] For example, the receiving section 330 is configured to set a curve (hereinafter, referred to as "reception beam-forming curve") $CV_{6,3}$ for selecting pixels that the sampling data $S_{6,3}$ are used as the pixel data thereof, during the reception beam-forming based on the positions of the elements 311 and the orientation of the respective pixels of the ultrasound image UI with respect to the elements 311, as shown in FIG. 9. The receiving section 330 is further configured to detect the pixels $P_{3,1}, P_{3,2}, P_{4,2}, P_{4,3}, P_{4,4}, P_{4,5}, P_{4,6}, P_{4,7}, P_{4,8}, P_{4,9}, \dots, P_{3,N}$ corresponding to the reception beam-forming curve $CV_{6,3}$ from the pixels $P_{a,b}$ of the ultrasound image UI, wherein $1 \leq a \leq M$, $1 \leq b \leq N$. That is, the receiving section 330 selects the pixels $P_{3,1}, P_{3,2}, P_{4,2}, P_{4,3}, P_{4,4}, P_{4,5}, P_{4,6}, P_{4,7}, P_{4,8}, P_{4,9}, \dots, P_{3,N}$ on which the reception beam-forming curve $CV_{6,3}$ passes among the pixels $P_{a,b}$ of the ultrasound image UI. The receiving section 330 is further configured to assign the sampling data $S_{6,3}$ to the selected pixels $P_{3,1}, P_{3,2}, P_{4,2}, P_{4,3}, P_{4,4}, P_{4,5}, P_{4,6}, P_{4,7}, P_{4,8}, P_{4,9}, \dots, P_{3,N}$, as shown in FIG. 10.

[0040] Thereafter, the receiving section 330 is configured to set a reception beam-forming curve $CV_{6,4}$ for selecting pixels that the sampling data $S_{6,4}$ are used as the pixel data thereof during the reception beam-forming based on the positions of the elements 311 and the orientation of the respective pixels of the ultrasound image UI with respect to the elements 311, as shown in FIG. 11. The receiving section 330 is further configured to detect the pixels $P_{2,1}, P_{3,1}, P_{3,2}, P_{4,2}, P_{4,3}, P_{4,4}, P_{5,4}, P_{5,5}, P_{5,6}, P_{5,7}, P_{5,8}, P_{4,9}, P_{5,9}, \dots, P_{4,N}, P_{3,N}$ corresponding to the reception beam-forming curve $CV_{6,4}$ from the pixels $P_{a,b}$ of the ultrasound image UI. That is, the receiving section 330 selects the pixels $P_{2,1}, P_{3,1}, P_{3,2}, P_{4,2}, P_{4,3}, P_{4,4}, P_{5,4}, P_{5,5}, P_{5,6}, P_{5,7}, P_{5,8}, P_{4,9}, P_{5,9}, \dots, P_{4,N}, P_{3,N}$ on which the reception beam-forming curve $CV_{6,4}$ passes among the pixels $P_{a,b}$ of the ultrasound image UI. The receiving section 330 is also configured to assign the sampling data $S_{6,4}$ to the Selected pixels $P_{2,1}, P_{3,1}, P_{3,2}, P_{4,2}, P_{4,3}, P_{4,4}, P_{5,4}, P_{5,5}, P_{5,6}, P_{5,7}, P_{5,8}, P_{4,9}, P_{5,9}, \dots, P_{4,N}, P_{3,N}$, as shown in FIG. 12. In this way, the respective sampling data, which are used as the pixel data, are cumulatively assigned to the pixels as the pixel data.

[0041] The receiving section 330 is configured to perform the reception beam-forming (i.e., summing) upon the sampling data which are cumulatively assigned to the respective pixels $P_{a,b}$ of the ultrasound image UI to form the reception-focused data.

[0042] In another embodiment, the receiving section 330 is configured to perform the analog-digital conversion upon the reception signals provided through the plurality of channels CH_k from the ultrasound probe 310 to form the sampling data $S_{i,j}$, as shown in FIG. 8. The sampling data $S_{i,j}$ are stored in the storage unit 140. The receiving section 330 is further configured to detect pixels corresponding to the sampling data based on the positions of the elements 311 and the orientation of the pixels of the ultrasound image UI with respect to the elements 311. That is, the receiving section 330 selects the pixels that the respective sampling data are used as the pixel data thereof during the reception beam-forming based on the positions of the elements 311 and the orientation of the respective pixels of the ultrasound image UI with respect to the elements 311. The receiving section 330 is configured to cumulatively assign the sampling data corresponding to the selected pixels as the pixel data. The receiving section 330 is further configured to determine pixels existing in the same column among the selected pixels. The receiving section 330 is also configured to set weights corresponding to the respective determined pixels. The receiving section 330 is further configured to apply the weights to the sampling data of the respective pixels.

[0043] For example, the receiving section 330 is configured to set the reception beam-forming curve $CV_{6,3}$ for selecting pixels that the sampling data $S_{6,3}$ are used as the pixel data thereof during the reception beam-forming based on the positions of the elements 311 and the orientation of the respective pixels of the ultrasound image UI with respect to the elements 311, as shown in FIG. 9. The receiving section 330 is further configured to detect the pixels $P_{3,1}, P_{3,2}, P_{4,2}, P_{4,3}, P_{4,4}, P_{4,5}, P_{4,6}, P_{4,7}, P_{4,8}, P_{4,9}, \dots, P_{3,N}$ corresponding to the reception beam-forming curve $CV_{6,3}$ from the pixels $P_{a,b}$ of the ultrasound image UI. That is, the receiving section 330 selects the pixels $P_{3,1}, P_{3,2}, P_{4,2}, P_{4,3}, P_{4,4}, P_{4,5}, P_{4,6}, P_{4,7}, P_{4,8}, P_{4,9}, \dots, P_{3,N}$ on which the reception beam-forming curve $CV_{6,3}$ passes among the pixels $P_{a,b}$ of the ultrasound image UI. The receiving section 330 is further configured to assign the sampling data $S_{6,3}$ to the selected pixels $P_{3,1}, P_{3,2}, P_{4,2}, P_{4,3}, P_{4,4}, P_{4,5}, P_{4,6}, P_{4,7}, P_{4,8}, P_{4,9}, \dots, P_{3,N}$, as shown in FIG. 10. The receiving section 330 is further configured to determine pixels $P_{3,2}$ and $P_{4,2}$ which exist in the same column among the selected pixels $P_{3,1}, P_{3,2}, P_{4,2}, P_{4,3}, P_{4,4}$,

$P_{4,5}, P_{4,6}, P_{4,7}, P_{4,8}, P_{4,9}, \dots, P_{3,N}$. The receiving section 330 is further configured to calculate a distance W_1 from a center of the determined pixel $P_{3,2}$ to the reception beam-forming curve $CV_{6,3}$ and a distance W_2 from a center of the determined pixel $P_{4,2}$ to the reception beam-forming curve $CV_{6,3}$, as shown in FIG. 13. The receiving section 330 is also configured to set a first weight α_1 corresponding to the pixel $P_{3,2}$ based on the distance W_1 and a second weight α_2 corresponding to the pixel $P_{4,2}$ based on the distance W_2 . The first weight α_1 and the second weight α_2 are set to be in proportion to or in inverse proportion to the calculated distances. The receiving section 330 is further configured to apply the first weight α_1 to the sampling data $S_{6,3}$ assigned to the pixel $P_{3,2}$ and to apply the second weight α_2 to the sampling data $S_{6,3}$ assigned to the pixel $P_{4,2}$. The receiving section 330 is configured to perform the above process upon the remaining sampling data.

[0044] The receiving section 330 is configured to perform the reception beam-forming upon the sampling data which are cumulatively assigned to the respective pixels $P_{a,b}$ of the ultrasound image UI to form the reception-focused data.

[0045] In yet another embodiment, the receiving section 330 is configured to perform the analog-digital conversion upon the reception signals provided through the plurality of channels CH_k from the ultrasound probe 310 to form the sampling data $S_{i,j}$, as shown in FIG. 8. The sampling data $S_{i,j}$ are stored in the storage unit 140. The receiving section 330 is further configured to set a sampling data set for selecting pixels that the sampling data $S_{i,j}$ are used as the pixel data thereof during the reception beam-forming.

[0046] For example, the receiving section 330 is configured to set the sampling data $S_{1,1}, S_{1,4}, \dots, S_{1,t}, S_{2,1}, S_{2,4}, \dots, S_{2,t}, \dots, S_{p,1}$ as the sampling data set (denoted by a box) for selecting the pixels that the sampling data $S_{i,j}$ are used as the pixel data thereof during the reception beam-forming, as shown in FIG. 14.

[0047] The receiving section 330 is further configured to detect the pixels corresponding to the respective sampling data of the sampling data set based on the positions of the elements 311 and the orientation of the respective pixels of the ultrasound image UI with respect to the elements 311. That is, the receiving section 330 selects the pixels that the respective sampling data of the sampling data set are used as the pixel data thereof during the reception beam-forming based on the positions of the elements 311 and the orientation of the respective pixels of the ultrasound image UI with respect to the elements 311. The receiving section 330 is further configured to cumulatively assign the sampling data to the selected pixels in the same manner as the above embodiments. The receiving section 330 is further configured to perform the reception beam-forming upon the sampling data, which are cumulatively assigned to the respective pixels of the ultrasound image UI to form the reception-focused data.

[0048] In yet another embodiment, the receiving section 330 is configured to perform a down-sampling upon the reception signals provided through the plurality of channels CH_k from the ultrasound probe 310 to form down-sampling data. As described above, the receiving section 330 is further configured to detect the pixels corresponding to the respective sampling data based on the positions of the elements 311 and the orientation of the respective pixels of the ultrasound image UI with respect to the elements 311. That is, the receiving section 330 selects the pixels that the respective sampling data are used as the pixel data thereof during the reception beam-forming based on the positions of the elements 311 and the orientation of the pixels of the ultrasound image UI with respect to the elements 311. The receiving section 330 is further configured to cumulatively assign the respective sampling data to the selected pixels in the same manner as the above embodiments. The receiving section 330 is further configured to perform the reception beam-forming upon the sampling data, which are cumulatively assigned to the respective pixels of the ultrasound image UI to form the reception-focused data.

[0049] However, it should be noted herein that the reception beam-forming may not be limited thereto.

[0050] Referring back to FIG. 3, the ultrasound data acquiring unit 120 further includes an ultrasound data forming section 340. The ultrasound data forming section 340 is configured to form the ultrasound data corresponding to the ultrasound image based on the reception-focused data provided from the receiving section 330. The ultrasound data forming section 340 is further configured to perform a signal process (e.g., gain control, etc.) upon the reception-focused data.

[0051] In one embodiment, the ultrasound data forming section 340 is configured to form ultrasound data (hereinafter, referred to as "brightness mode ultrasound data") corresponding to the brightness mode image based on the brightness mode reception-focused data provided from the receiving section 330. The brightness mode ultrasound data include radio frequency data.

[0052] The ultrasound data forming section 340 is further configured to form ultrasound data (hereinafter, referred to as "Doppler mode ultrasound data") corresponding to the region of interest ROI based on the Doppler mode reception-focused data provided from the receiving section 330. The Doppler mode ultrasound data include in-phase/quadrature data. However, it should be noted herein that the Doppler mode ultrasound data may not be limited thereto.

[0053] For example, the ultrasound data forming section 340 forms first Doppler mode ultrasound data based on the first Doppler mode reception-focused data provided from the receiving section 330. The ultrasound data forming section 340 further forms second Doppler mode ultrasound data based on the second Doppler mode reception-focused data provided from the receiving section 330.

[0054] Referring back to FIG. 1, the ultrasound system 100 further includes a processing unit 130 in communication

with the user input unit 110 and the ultrasound data acquiring unit 120. The processing unit 130 includes a central processing unit, a microprocessor, a graphic processing unit and the like.

[0055] FIG. 15 is a flow chart showing a process of forming the motion mode image. The processing unit 130 is configured to form the brightness mode image BI based on the brightness mode ultrasound data provided from the ultrasound data acquiring unit 120, at step S 1502 in FIG. 15. The brightness mode image BI is displayed on a display unit 150.

[0056] The processing unit 130 is configured to set the first region of interest ROI on the brightness mode image BI based on the input information (i.e., first input information) provided from the user input unit 110, at step S 1504 in FIG. 15. Thus, the ultrasound data acquiring unit 120 is configured to transmit the ultrasound signals to the living body and receive the ultrasound echo signals from the living body to acquire the Doppler mode ultrasound data in consideration of the first region of interest ROI.

[0057] The processing unit 130 is configured to form the vector information based on the Doppler mode ultrasound data provided from the ultrasound data acquiring unit 120, at step S 1506 in FIG. 15. That is, the processing unit 130 forms the vector information corresponding to motion (i.e., velocity and direction) of the target object based on the Doppler mode ultrasound data.

[0058] Generally, when the transmission direction of the ultrasound signals is equal to the reception direction of the ultrasound echo signals and a Doppler angle is θ , the following relationship is established:

$$X \cos \theta = \frac{C_0 f_d}{2 f_0} \quad (1)$$

[0059] In Equation 1, X represents a reflector velocity (i.e., velocity of a target object), C_0 represents a sound speed in the living body, f_d represents a Doppler shift frequency, and f_0 represents an ultrasound frequency.

[0060] The Doppler shift frequency f_d is calculated by the difference between a frequency of the ultrasound signals (i.e., transmission beam) and a frequency of the ultrasound echo signals (i.e., reception beam). Also, the velocity component $X \cos \theta$ projected to the transmission direction is calculated by Equation 1.

[0061] When the transmission direction of the ultrasound signals (i.e., transmission beam) is different from the reception direction of the ultrasound echo signals (i.e., reception beam), the following relationship is established:

$$X \cos \theta_T + X \cos \theta_R = \frac{C_0 f_d}{f_0} \quad (2)$$

[0062] In Equation 2, θ_T represents an angle between the ultrasound signals (i.e., transmission beam) and the blood flow, and θ_R represents an angle between the ultrasound echo signals (i.e., reception beam) and the blood flow.

[0063] FIG. 16 is a schematic diagram showing an example of the transmission directions, the reception directions, the vector information and an over-determined problem. Referring to FIG. 16, when the ultrasound signals (i.e., transmission beam) are transmitted in a first direction D1 and the ultrasound echo signals (i.e., reception beam) are received in the first direction D1, the following relationship is established:

$$\vec{\alpha_1} \vec{X} = \alpha_{11} x_1 + \alpha_{12} x_2 = y_1 = X \cos \theta \quad (3)$$

[0064] In Equation 3, $\vec{\alpha_1} = (\alpha_{11}, \alpha_{12})$ represents a unit vector of the first direction D1, $\vec{X} = (x_1, x_2)$ represents variables, and y_1 is calculated by Equation 1.

[0065] When the ultrasound signals (i.e., transmission beam) are transmitted in a second direction D2 and the ultrasound echo signals (i.e., reception beam) are received in a third direction D3, the following relationship is established:

$$(\alpha_{21} + \alpha_{31})x_1 + (\alpha_{22} + \alpha_{32})x_2 = (y_2 + y_3) = X \cos \theta_2 + X \cos \theta_3 \quad (4)$$

[0066] Equations 3 and 4 are set to assume two-dimensional environment. Further, Equations 3 and 4 are expanded to three-dimensional environment. That is, when expanding Equations 3 and 4 to the three-dimensional environment, the following relationship is established:

$$\alpha_{11}x_1 + \alpha_{12}x_2 + \alpha_{13}x_3 = y \quad (5)$$

[0067] In the case of the two-dimensional environment (i.e., two-dimensional vector), at least two equations are required to calculate the variables x_1 and x_2 . For example, when the ultrasound signals (i.e., transmission beam) are transmitted in the third direction D3 and the ultrasound echo signals (i.e., reception beam) are received in the second direction D2 and a fourth direction D4 as shown in FIG. 16, the following equations are established:

$$\begin{aligned} (\alpha_{31} + \alpha_{21})x_1 + (\alpha_{32} + \alpha_{22})x_2 &= (y_3 + y_2) \\ (\alpha_{31} + \alpha_{41})x_1 + (\alpha_{32} + \alpha_{42})x_2 &= (y_3 + y_4) \end{aligned} \quad (6)$$

[0068] The vector $\vec{X} = (x_1, x_2)$ is calculated by the equations of Equation 6.

[0069] When the reception beam-forming is performed in at least two angles (i.e., at least two reception directions), at least two equations are obtained and represented as the over-determined problem, as shown in FIG. 16. The over-determined problem is solved by a pseudo inverse method, a weighted least square method and the like based on noise characteristics added to the Doppler shift frequency. The over-determined problem is well known in the art. Thus, it has not been described in detail so as not to unnecessarily obscure the present disclosure.

[0070] That is, $M \times N$ equations are obtained by M transmission directions and the reception beam-forming of N reception directions at every transmission.

[0071] Referring back to FIG. 15, the processing unit 130 is configured to set the second region of interest VML on the brightness mode image BI based on the input information (i.e., second input information) provided from the user input unit 110, at step S 1508 in FIG. 15.

[0072] The processing unit 130 is configured to extract brightness mode ultrasound data and vector information corresponding to the second region of interest VML from the brightness mode ultrasound data and the vector information, at step S1510 in FIG. 15. The processing unit 130 is configured to form the motion mode image based on the extracted brightness mode ultrasound data and vector information, at step S 1512 in FIG. 15.

[0073] As one example, the processing unit 130 forms a brightness motion mode image based on the extracted brightness mode ultrasound data, as shown in FIG. 17. The methods of forming the brightness motion mode image are well known in the art. Thus, they have not been described in detail so as not to unnecessarily obscure the present disclosure. The processing unit 130 further forms a color motion mode image VI_1 for representing the velocity and the direction of the target object as colors based on the extracted vector information, as shown in FIG. 17. The methods of forming the color motion mode image are well known in the art. Thus, they have not been described in detail so as not to unnecessarily obscure the present disclosure. The processing unit 130 further forms the motion mode image based on at least one of the brightness motion mode image and the color motion mode image. That is, the processing unit 130 forms the motion mode image including the at least one of the brightness motion mode image and the color motion mode image.

[0074] As another example, the processing unit 130 forms the brightness motion mode image based on the extracted brightness mode ultrasound data, as shown in FIG. 18. The processing unit 130 further forms the color motion mode image VI_2 for representing the velocity and the direction of the target object as color vectors based on the extracted vector information, as shown in FIG. 18. The processing unit 130 further forms the motion mode image based on at least one of the brightness motion mode image and the color motion mode image. That is, the processing unit 130 forms the motion mode image including the at least one of the brightness motion mode image and the color motion mode image.

[0075] Optionally, the processing unit 130 is configured to form a Doppler mode image based on the vector information. The Doppler mode image includes a vector Doppler image or a color Doppler image. However, it should be noted herein

that the Doppler mode image may not be limited thereto.

[0076] Referring back to FIG. 1, the ultrasound system 100 further includes the storage unit 140. The storage unit 140 stores the ultrasound data (i.e., brightness mode ultrasound data and Doppler mode ultrasound data) acquired by the ultrasound data acquiring unit 120. The storage unit 140 further stores the vector information formed by the processing unit 130.

[0077] The ultrasound system 100 further includes the display unit 150. The display unit 150 is configured to display the brightness mode image formed by the processing unit 130. The display unit 150 is further configured to display the motion mode image formed by the processing unit 130.

[0078] Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the scope of the principles of this disclosure. More particularly, numerous variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

Claims

1. An ultrasound system, comprising:

a user input unit configured to receive input information for setting a region of interest on a brightness mode image; and
a processing unit configured to form the brightness mode image based on first ultrasound data corresponding to a target object and form vector information of the target object based on second ultrasound data corresponding to the target object, the processing unit being further configured to form a motion mode image including at least one of a brightness motion mode image and a color motion mode image based on the first ultrasound data and the vector information corresponding to the region of interest.

2. The ultrasound system of Claim 1, wherein the processing unit is configured to form the vector information corresponding to a velocity and a direction of the target object in consideration of at least one transmission direction and at least one reception direction corresponding to the at least one transmission direction.

3. The ultrasound system of Claim 2, wherein the processing unit is configured to:

extract first ultrasound data and vector information corresponding to the region of interest from the first ultrasound data and the vector information;
form the brightness motion mode image based on the extracted first ultrasound data; and
form the color motion mode image based on the extracted vector information.

4. The ultrasound system of Claim 3, wherein the processing unit is configured to form the color motion mode image for representing the velocity and the direction of the target object as colors based on the extracted vector information.

5. The ultrasound system of Claim 3, wherein the processing unit is configured to form the color motion mode image for representing the velocity and the direction of the target object as color vectors including colors and arrows based on the extracted vector information.

6. The ultrasound system of Claim 1, further comprising:

an ultrasound data acquiring unit configured to transmit ultrasound signals to a living body including the target object in at least one transmission direction and receive ultrasound echo signals from the living body in at least one reception direction to acquire the second ultrasound data corresponding to the at least one reception direction.

7. A method of providing a motion mode image, comprising:

a) forming a brightness mode image based on first ultrasound data corresponding to a target object;
b) forming vector information of the target object based on second ultrasound data corresponding to the target object;

- c) receiving input information for setting a region of interest on the brightness mode image; and
- d) forming a motion mode image including at least one of a brightness motion mode image and a color motion mode image based on the first ultrasound data and the vector information corresponding to the region of interest.

5 **8.** The method of Claim 7, wherein the step b) comprises:

forming the vector information corresponding to a velocity and a direction of the target object in consideration of at least one transmission direction and at least one reception direction corresponding to the at least one transmission direction.

10 **9.** The method of Claim 8, wherein the step d) comprises:

extracting first ultrasound data and vector information corresponding to the region of interest from the first ultrasound data and the vector information;

15 forming the brightness motion mode image based on the extracted first ultrasound data;

and

forming the color motion mode image based on the extracted vector information.

20 **10.** The method of Claim 9, wherein the step d) comprises:

forming the color motion mode image for representing the velocity and the direction of the target object as colors based on the extracted vector information.

25 **11.** The method of Claim 12, wherein the step d) comprises:

forming the color motion mode image for representing the velocity and the direction of the target object as color vectors including colors and arrows based on the extracted vector information.

30 **12.** The method of Claim 7, further comprising:

transmitting ultrasound signals to a living body including the target object in at least one transmission direction and receiving the ultrasound echo signals from the living body in at least one reception direction to acquire the second ultrasound data, prior to performing the step b).

FIG. 1

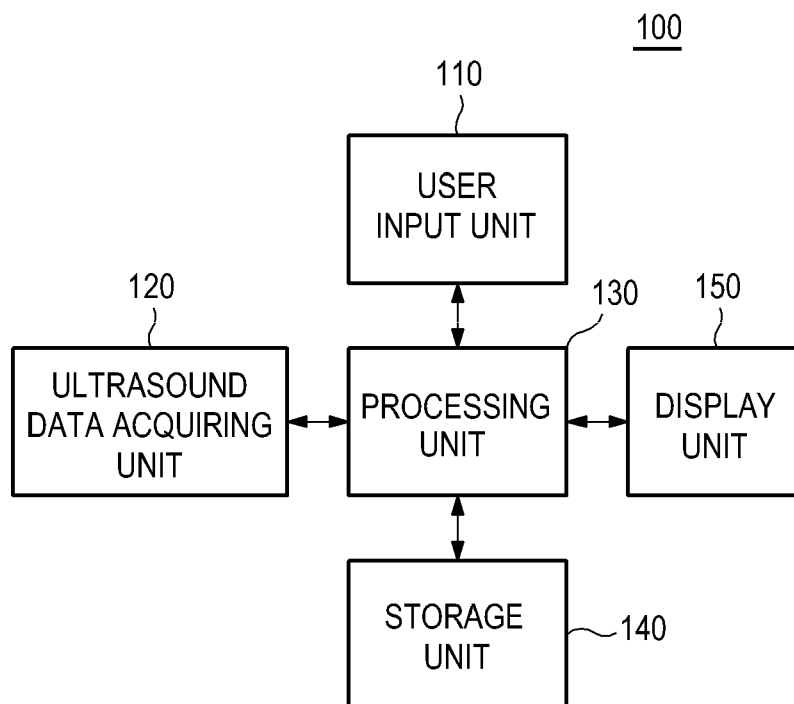


FIG. 2

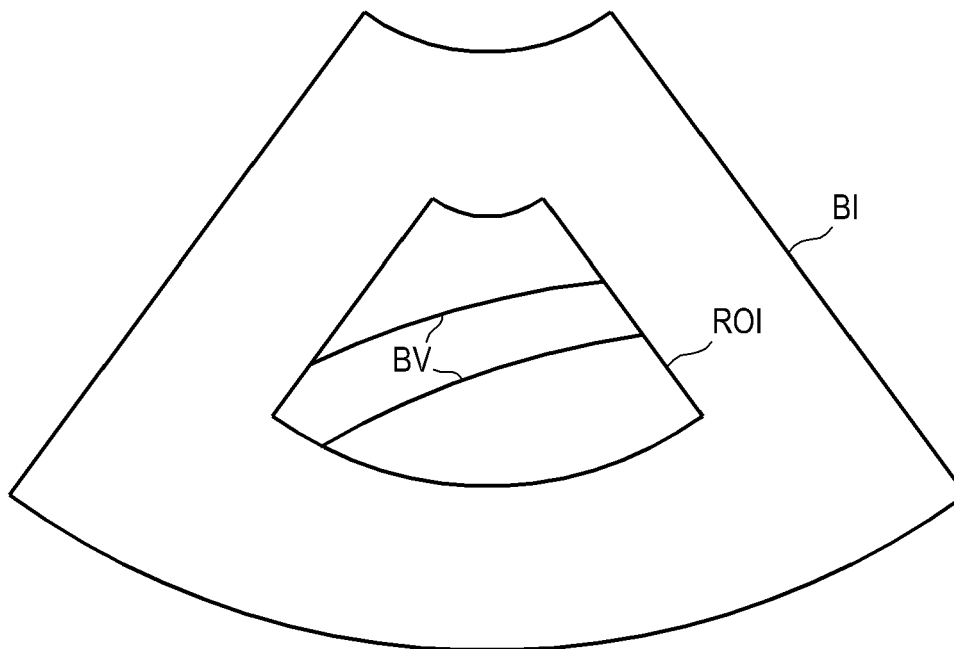


FIG. 3

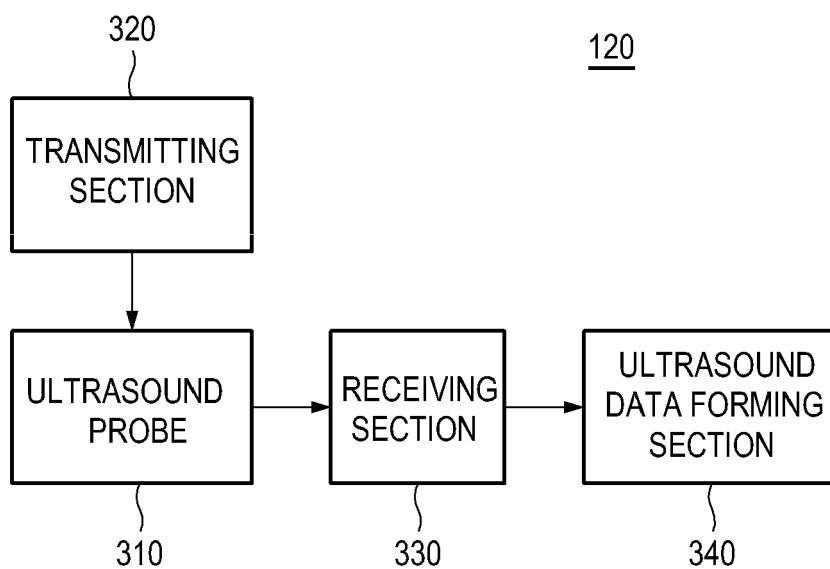


FIG. 4

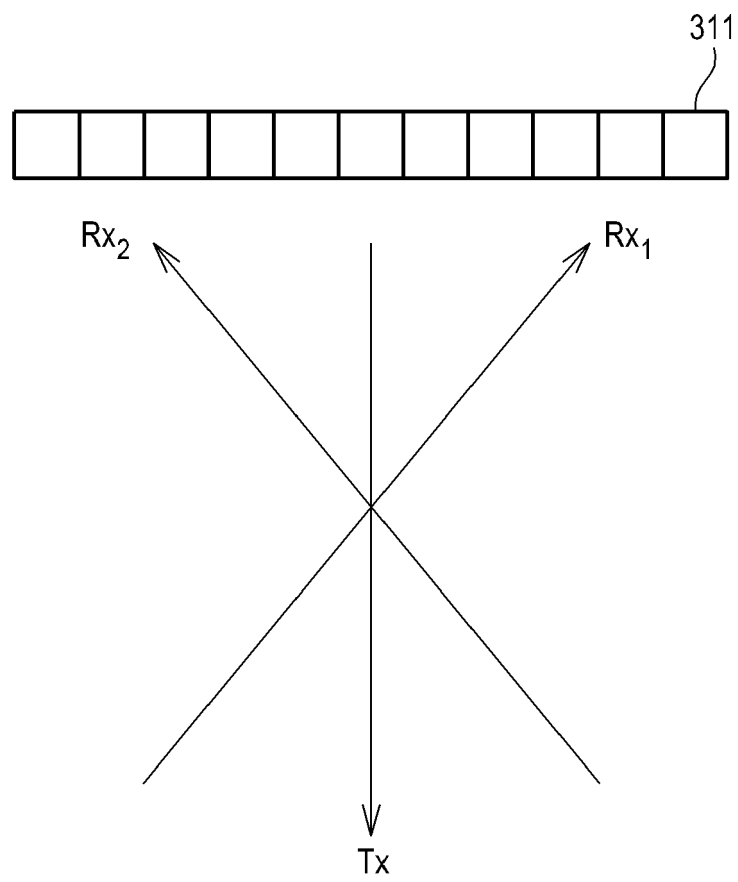


FIG. 5

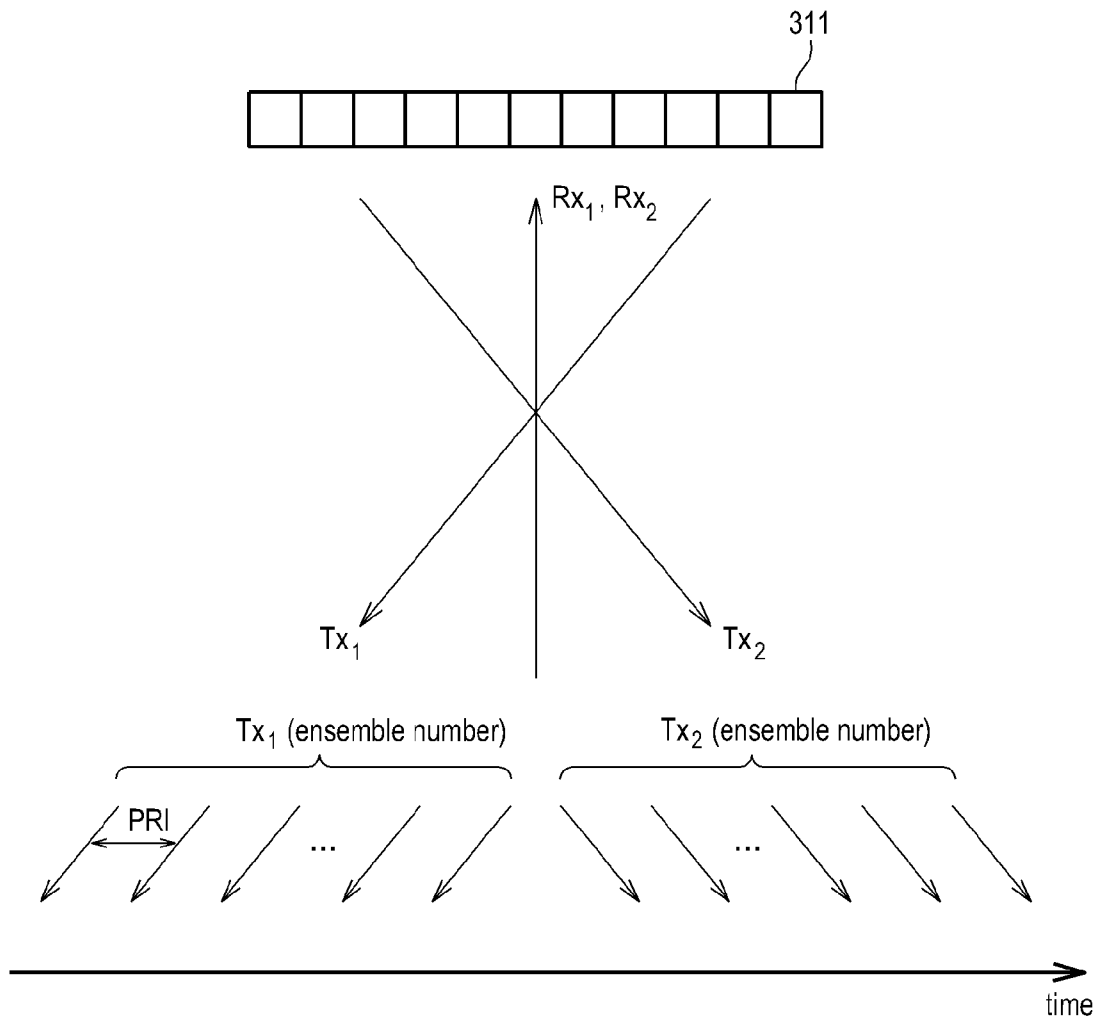


FIG. 6

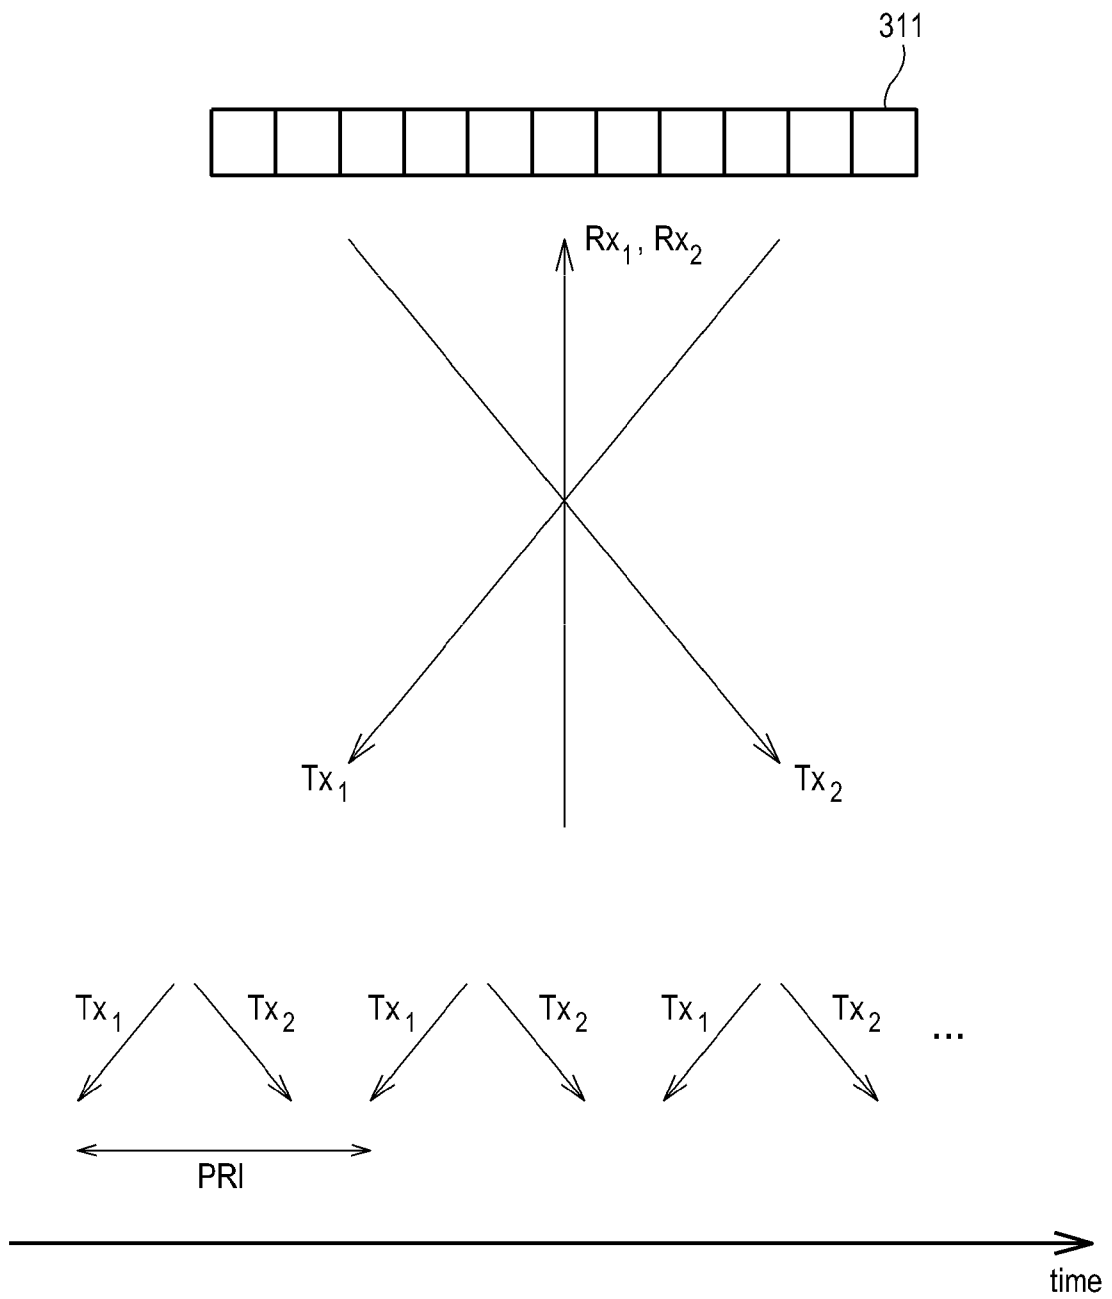


FIG. 7

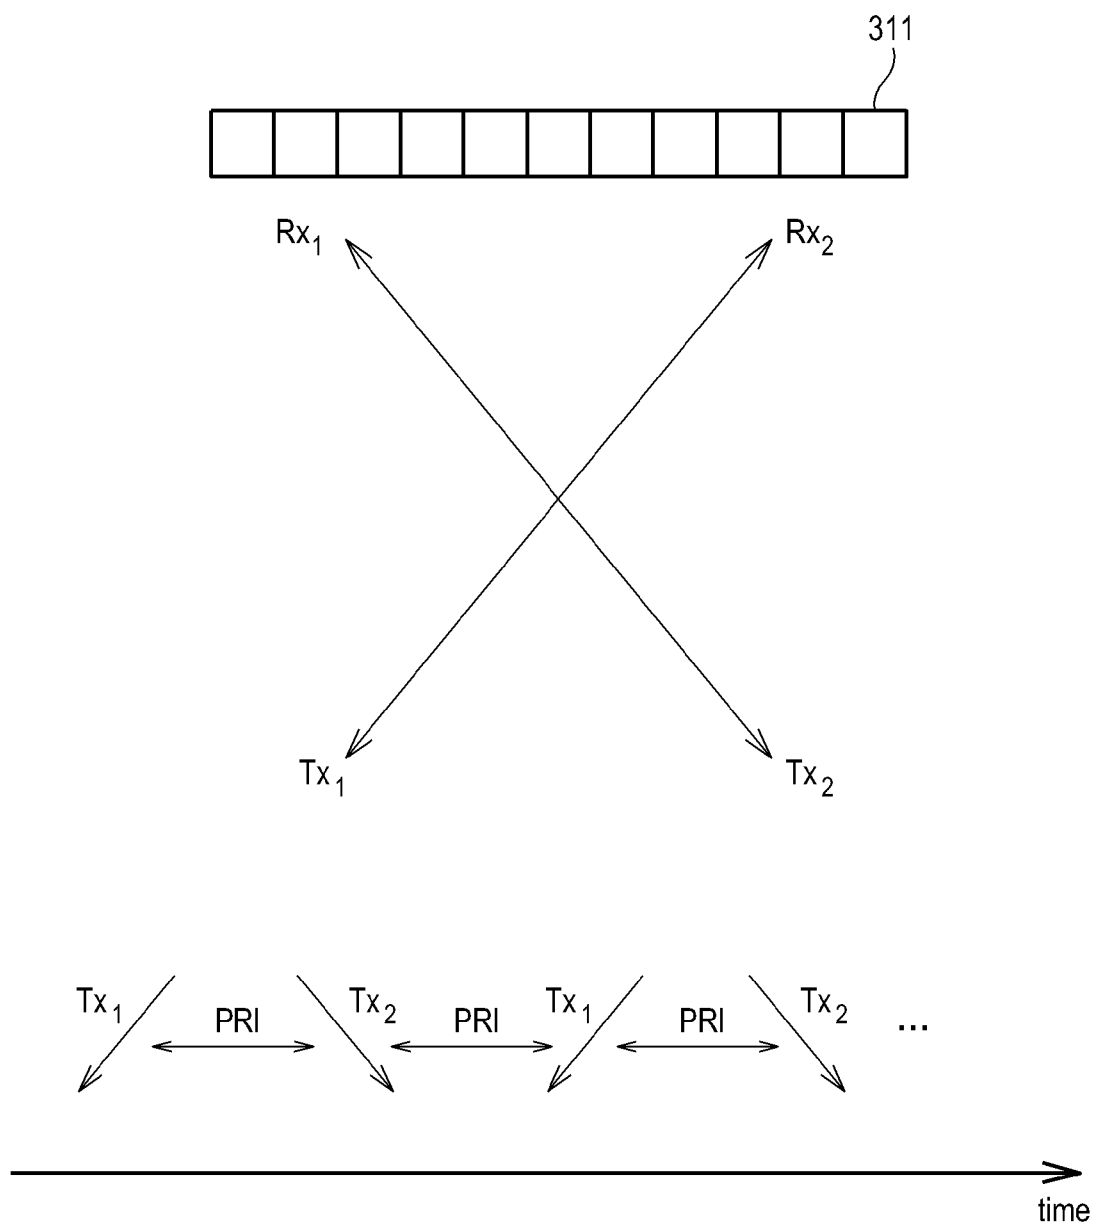


FIG. 8

$S_{1,t}$	$S_{2,t}$	$S_{3,t}$	$S_{4,t}$	$S_{5,t}$	$S_{6,t}$	$S_{7,t}$	$S_{8,t}$	$S_{9,t}$	$S_{10,t}$	$S_{11,t}$	...	$S_{p,t}$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
$S_{1,6}$	$S_{2,6}$	$S_{3,6}$	$S_{4,6}$	$S_{5,6}$	$S_{6,6}$	$S_{7,6}$	$S_{8,6}$	$S_{9,6}$	$S_{10,6}$	$S_{11,6}$	...	$S_{p,6}$
$S_{1,5}$	$S_{2,5}$	$S_{3,5}$	$S_{4,5}$	$S_{5,5}$	$S_{6,5}$	$S_{7,5}$	$S_{8,5}$	$S_{9,5}$	$S_{10,5}$	$S_{11,5}$	...	$S_{p,5}$
$S_{1,4}$	$S_{2,4}$	$S_{3,4}$	$S_{4,4}$	$S_{5,4}$	$S_{6,4}$	$S_{7,4}$	$S_{8,4}$	$S_{9,4}$	$S_{10,4}$	$S_{11,4}$	...	$S_{p,4}$
$S_{1,3}$	$S_{2,3}$	$S_{3,3}$	$S_{4,3}$	$S_{5,3}$	$S_{6,3}$	$S_{7,3}$	$S_{8,3}$	$S_{9,3}$	$S_{10,3}$	$S_{11,3}$	...	$S_{p,3}$
$S_{1,2}$	$S_{2,2}$	$S_{3,2}$	$S_{4,2}$	$S_{5,2}$	$S_{6,2}$	$S_{7,2}$	$S_{8,2}$	$S_{9,2}$	$S_{10,2}$	$S_{11,2}$	...	$S_{p,2}$
$S_{1,1}$	$S_{2,1}$	$S_{3,1}$	$S_{4,1}$	$S_{5,1}$	$S_{6,1}$	$S_{7,1}$	$S_{8,1}$	$S_{9,1}$	$S_{10,1}$	$S_{11,1}$	...	$S_{p,1}$
CH_1	CH_2	CH_3	CH_4	CH_5	CH_6	CH_7	CH_8	CH_9	CH_{10}	CH_{11}	...	CH_p

$P_{1,1}$	$P_{1,2}$	$P_{1,3}$	$P_{1,4}$	$P_{1,5}$	$P_{1,6}$	$P_{1,7}$	$P_{1,8}$	$P_{1,9}$	...	$P_{1,N}$
$P_{2,1}$	$P_{2,2}$	$P_{2,3}$	$P_{2,4}$	$P_{2,5}$	$P_{2,6}$	$P_{2,7}$	$P_{2,8}$	$P_{2,9}$	...	$P_{2,N}$
$P_{3,1}$	$P_{3,2}$	$P_{3,3}$	$P_{3,4}$	$P_{3,5}$	$P_{3,6}$	$P_{3,7}$	$P_{3,8}$	$P_{3,9}$	...	$P_{3,N}$
$P_{4,1}$	$P_{4,2}$	$P_{4,3}$	$P_{4,4}$	$P_{4,5}$	$P_{4,6}$	$P_{4,7}$	$P_{4,8}$	$P_{4,9}$	...	$P_{4,N}$
$P_{5,1}$	$P_{5,2}$	$P_{5,3}$	$P_{5,4}$	$P_{5,5}$	$P_{5,6}$	$P_{5,7}$	$P_{5,8}$	$P_{5,9}$	...	$P_{5,N}$
$P_{6,1}$	$P_{6,2}$	$P_{6,3}$	$P_{6,4}$	$P_{6,5}$	$P_{6,6}$	$P_{6,7}$	$P_{6,8}$	$P_{6,9}$	...	$P_{6,N}$
$P_{7,1}$	$P_{7,2}$	$P_{7,3}$	$P_{7,4}$	$P_{7,5}$	$P_{7,6}$	$P_{7,7}$	$P_{7,8}$	$P_{7,9}$	...	$P_{7,N}$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
$P_{M,1}$	$P_{M,2}$	$P_{M,3}$	$P_{M,4}$	$P_{M,5}$	$P_{M,6}$	$P_{M,7}$	$P_{M,8}$	$P_{M,9}$	...	$P_{M,N}$

UI

FIG. 9

$S_{1,t}$	$S_{2,t}$	$S_{3,t}$	$S_{4,t}$	$S_{5,t}$	$S_{6,t}$	$S_{7,t}$	$S_{8,t}$	$S_{9,t}$	$S_{10,t}$	$S_{11,t}$	...	$S_{p,t}$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
$S_{1,6}$	$S_{2,6}$	$S_{3,6}$	$S_{4,6}$	$S_{5,6}$	$S_{6,6}$	$S_{7,6}$	$S_{8,6}$	$S_{9,6}$	$S_{10,6}$	$S_{11,6}$	...	$S_{p,6}$
$S_{1,5}$	$S_{2,5}$	$S_{3,5}$	$S_{4,5}$	$S_{5,5}$	$S_{6,5}$	$S_{7,5}$	$S_{8,5}$	$S_{9,5}$	$S_{10,5}$	$S_{11,5}$	...	$S_{p,5}$
$S_{1,4}$	$S_{2,4}$	$S_{3,4}$	$S_{4,4}$	$S_{5,4}$	$S_{6,4}$	$S_{7,4}$	$S_{8,4}$	$S_{9,4}$	$S_{10,4}$	$S_{11,4}$	...	$S_{p,4}$
$S_{1,3}$	$S_{2,3}$	$S_{3,3}$	$S_{4,3}$	$S_{5,3}$	$S_{6,3}$	$S_{7,3}$	$S_{8,3}$	$S_{9,3}$	$S_{10,3}$	$S_{11,3}$	...	$S_{p,3}$
$S_{1,2}$	$S_{2,2}$	$S_{3,2}$	$S_{4,2}$	$S_{5,2}$	$S_{6,2}$	$S_{7,2}$	$S_{8,2}$	$S_{9,2}$	$S_{10,2}$	$S_{11,2}$	...	$S_{p,2}$
$S_{1,1}$	$S_{2,1}$	$S_{3,1}$	$S_{4,1}$	$S_{5,1}$	$S_{6,1}$	$S_{7,1}$	$S_{8,1}$	$S_{9,1}$	$S_{10,1}$	$S_{11,1}$	...	$S_{p,1}$
CH_1	CH_2	CH_3	CH_4	CH_5	CH_6	CH_7	CH_8	CH_9	CH_{10}	CH_{11}	...	CH_p

$P_{1,1}$	$P_{1,2}$	$P_{1,3}$	$P_{1,4}$	$P_{1,5}$	$P_{1,6}$	$P_{1,7}$	$P_{1,8}$	$P_{1,9}$	...	$P_{1,N}$
$P_{2,1}$	$P_{2,2}$	$P_{2,3}$	$P_{2,4}$	$P_{2,5}$	$P_{2,6}$	$P_{2,7}$	$P_{2,8}$	$P_{2,9}$	...	$P_{2,N}$
$P_{3,1}$	$P_{3,2}$	$P_{3,3}$	$P_{3,4}$	$P_{3,5}$	$P_{3,6}$	$P_{3,7}$	$P_{3,8}$	$P_{3,9}$	...	$P_{3,N}$
$P_{4,1}$	$P_{4,2}$	$P_{4,3}$	$P_{4,4}$	$P_{4,5}$	$P_{4,6}$	$P_{4,7}$	$P_{4,8}$	$P_{4,9}$	...	$P_{4,N}$
$P_{5,1}$	$P_{5,2}$	$P_{5,3}$	$P_{5,4}$	$P_{5,5}$	$P_{5,6}$	$P_{5,7}$	$P_{5,8}$	$P_{5,9}$	...	$P_{5,N}$
$P_{6,1}$	$P_{6,2}$	$P_{6,3}$	$P_{6,4}$	$P_{6,5}$	$P_{6,6}$	$P_{6,7}$	$P_{6,8}$	$P_{6,9}$	...	$P_{6,N}$
$P_{7,1}$	$P_{7,2}$	$P_{7,3}$	$P_{7,4}$	$P_{7,5}$	$P_{7,6}$	$P_{7,7}$	$P_{7,8}$	$P_{7,9}$	...	$P_{7,N}$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
$P_{M,1}$	$P_{M,2}$	$P_{M,3}$	$P_{M,4}$	$P_{M,5}$	$P_{M,6}$	$P_{M,7}$	$P_{M,8}$	$P_{M,9}$	...	$P_{M,N}$

CV_{6,3}

UI

FIG. 10

$S_{6,3}$	$S_{6,3}$									$S_{6,3}$
	$S_{6,3}$	$S_{6,3}$	$S_{6,3}$	$S_{6,3}$	$S_{6,3}$	$S_{6,3}$	$S_{6,3}$	$S_{6,3}$	...	

UI

FIG. 11

$S_{1,t}$	$S_{2,t}$	$S_{3,t}$	$S_{4,t}$	$S_{5,t}$	$S_{6,t}$	$S_{7,t}$	$S_{8,t}$	$S_{9,t}$	$S_{10,t}$	$S_{11,t}$	...	$S_{p,t}$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
$S_{1,6}$	$S_{2,6}$	$S_{3,6}$	$S_{4,6}$	$S_{5,6}$	$S_{6,6}$	$S_{7,6}$	$S_{8,6}$	$S_{9,6}$	$S_{10,6}$	$S_{11,6}$	...	$S_{p,6}$
$S_{1,5}$	$S_{2,5}$	$S_{3,5}$	$S_{4,5}$	$S_{5,5}$	$S_{6,5}$	$S_{7,5}$	$S_{8,5}$	$S_{9,5}$	$S_{10,5}$	$S_{11,5}$	...	$S_{p,5}$
$S_{1,4}$	$S_{2,4}$	$S_{3,4}$	$S_{4,4}$	$S_{5,4}$	$S_{6,4}$	$S_{7,4}$	$S_{8,4}$	$S_{9,4}$	$S_{10,4}$	$S_{11,4}$	...	$S_{p,4}$
$S_{1,3}$	$S_{2,3}$	$S_{3,3}$	$S_{4,3}$	$S_{5,3}$	$S_{6,3}$	$S_{7,3}$	$S_{8,3}$	$S_{9,3}$	$S_{10,3}$	$S_{11,3}$	...	$S_{p,3}$
$S_{1,2}$	$S_{2,2}$	$S_{3,2}$	$S_{4,2}$	$S_{5,2}$	$S_{6,2}$	$S_{7,2}$	$S_{8,2}$	$S_{9,2}$	$S_{10,2}$	$S_{11,2}$	...	$S_{p,2}$
$S_{1,1}$	$S_{2,1}$	$S_{3,1}$	$S_{4,1}$	$S_{5,1}$	$S_{6,1}$	$S_{7,1}$	$S_{8,1}$	$S_{9,1}$	$S_{10,1}$	$S_{11,1}$	...	$S_{p,1}$
CH_1	CH_2	CH_3	CH_4	CH_5	CH_6	CH_7	CH_8	CH_9	CH_{10}	CH_{11}	...	CH_p

$P_{1,1}$	$P_{1,2}$	$P_{1,3}$	$P_{1,4}$	$P_{1,5}$	$P_{1,6}$	$P_{1,7}$	$P_{1,8}$	$P_{1,9}$	...	$P_{1,N}$
$P_{2,1}$	$P_{2,2}$	$P_{2,3}$	$P_{2,4}$	$P_{2,5}$	$P_{2,6}$	$P_{2,7}$	$P_{2,8}$	$P_{2,9}$	...	$P_{2,N}$
$P_{3,1}$	$P_{3,2}$	$P_{3,3}$	$P_{3,4}$	$P_{3,5}$	$P_{3,6}$	$P_{3,7}$	$P_{3,8}$	$P_{3,9}$	...	$P_{3,N}$
$P_{4,1}$	$P_{4,2}$	$P_{4,3}$	$P_{4,4}$	$P_{4,5}$	$P_{4,6}$	$P_{4,7}$	$P_{4,8}$	$P_{4,9}$	...	$P_{4,N}$
$P_{5,1}$	$P_{5,2}$	$P_{5,3}$	$P_{5,4}$	$P_{5,5}$	$P_{5,6}$	$P_{5,7}$	$P_{5,8}$	$P_{5,9}$	...	$P_{5,N}$
$P_{6,1}$	$P_{6,2}$	$P_{6,3}$	$P_{6,4}$	$P_{6,5}$	$P_{6,6}$	$P_{6,7}$	$P_{6,8}$	$P_{6,9}$	...	$P_{6,N}$
$P_{7,1}$	$P_{7,2}$	$P_{7,3}$	$P_{7,4}$	$P_{7,5}$	$P_{7,6}$	$P_{7,7}$	$P_{7,8}$	$P_{7,9}$	...	$P_{7,N}$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
$P_{M,1}$	$P_{M,2}$	$P_{M,3}$	$P_{M,4}$	$P_{M,5}$	$P_{M,6}$	$P_{M,7}$	$P_{M,8}$	$P_{M,9}$	...	$P_{M,N}$

CV_{6,4}

UI

FIG. 12

$S_{6,4}$										
$S_{6,3}$ $S_{6,4}$	$S_{6,3}$ $S_{6,4}$									$S_{6,3}$ $S_{6,4}$
	$S_{6,3}$ $S_{6,4}$	$S_{6,3}$ $S_{6,4}$	$S_{6,3}$ $S_{6,4}$	$S_{6,3}$	$S_{6,3}$	$S_{6,3}$	$S_{6,3}$	$S_{6,3}$ $S_{6,4}$	...	
			$S_{6,4}$	$S_{6,4}$	$S_{6,4}$	$S_{6,4}$	$S_{6,4}$	$S_{6,4}$		

UI

FIG. 13

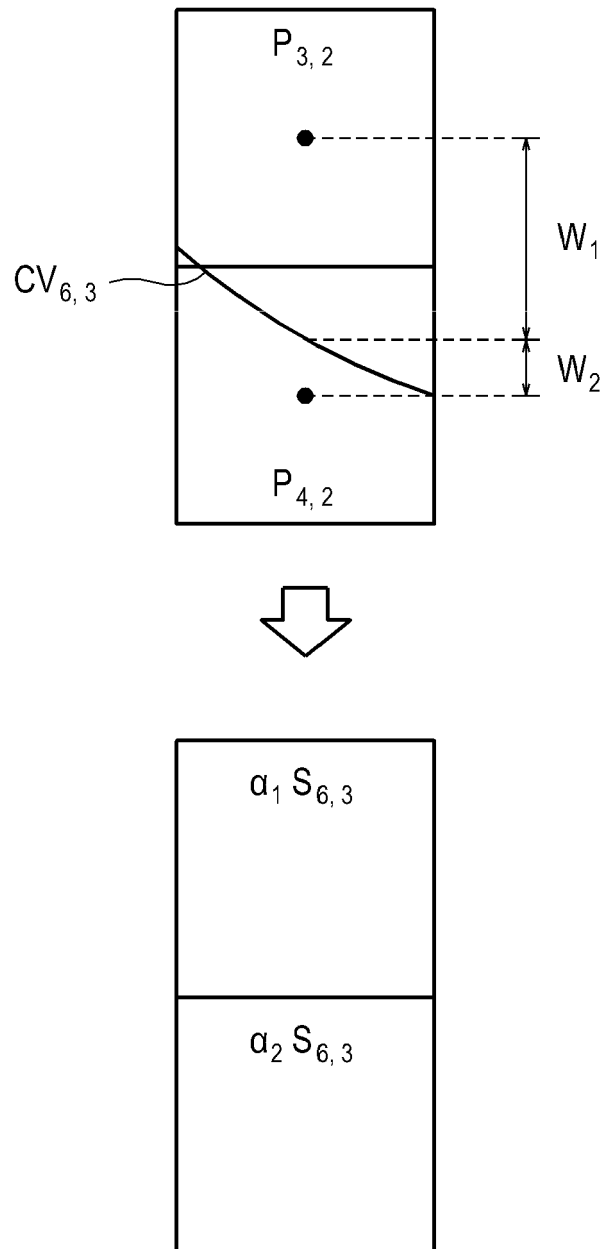


FIG. 14

$S_{1,t}$	$S_{2,t}$	$S_{3,t}$	$S_{4,t}$	$S_{5,t}$	$S_{6,t}$	$S_{7,t}$	$S_{8,t}$	$S_{9,t}$	$S_{10,t}$	$S_{11,t}$	...	$S_{p,t}$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
$S_{1,6}$	$S_{2,6}$	$S_{3,6}$	$S_{4,6}$	$S_{5,6}$	$S_{6,6}$	$S_{7,6}$	$S_{8,6}$	$S_{9,6}$	$S_{10,6}$	$S_{11,6}$	...	$S_{p,6}$
$S_{1,5}$	$S_{2,5}$	$S_{3,5}$	$S_{4,5}$	$S_{5,5}$	$S_{6,5}$	$S_{7,5}$	$S_{8,5}$	$S_{9,5}$	$S_{10,5}$	$S_{11,5}$	...	$S_{p,5}$
$S_{1,4}$	$S_{2,4}$	$S_{3,4}$	$S_{4,4}$	$S_{5,4}$	$S_{6,4}$	$S_{7,4}$	$S_{8,4}$	$S_{9,4}$	$S_{10,4}$	$S_{11,4}$	...	$S_{p,4}$
$S_{1,3}$	$S_{2,3}$	$S_{3,3}$	$S_{4,3}$	$S_{5,3}$	$S_{6,3}$	$S_{7,3}$	$S_{8,3}$	$S_{9,3}$	$S_{10,3}$	$S_{11,3}$	...	$S_{p,3}$
$S_{1,2}$	$S_{2,2}$	$S_{3,2}$	$S_{4,2}$	$S_{5,2}$	$S_{6,2}$	$S_{7,2}$	$S_{8,2}$	$S_{9,2}$	$S_{10,2}$	$S_{11,2}$	...	$S_{p,2}$
$S_{1,1}$	$S_{2,1}$	$S_{3,1}$	$S_{4,1}$	$S_{5,1}$	$S_{6,1}$	$S_{7,1}$	$S_{8,1}$	$S_{9,1}$	$S_{10,1}$	$S_{11,1}$	...	$S_{p,1}$
CH_1	CH_2	CH_3	CH_4	CH_5	CH_6	CH_7	CH_8	CH_9	CH_{10}	CH_{11}	...	CH_p

$P_{1,1}$	$P_{1,2}$	$P_{1,3}$	$P_{1,4}$	$P_{1,5}$	$P_{1,6}$	$P_{1,7}$	$P_{1,8}$	$P_{1,9}$	...	$P_{1,N}$
$P_{2,1}$	$P_{2,2}$	$P_{2,3}$	$P_{2,4}$	$P_{2,5}$	$P_{2,6}$	$P_{2,7}$	$P_{2,8}$	$P_{2,9}$	...	$P_{2,N}$
$P_{3,1}$	$P_{3,2}$	$P_{3,3}$	$P_{3,4}$	$P_{3,5}$	$P_{3,6}$	$P_{3,7}$	$P_{3,8}$	$P_{3,9}$	...	$P_{3,N}$
$P_{4,1}$	$P_{4,2}$	$P_{4,3}$	$P_{4,4}$	$P_{4,5}$	$P_{4,6}$	$P_{4,7}$	$P_{4,8}$	$P_{4,9}$	...	$P_{4,N}$
$P_{5,1}$	$P_{5,2}$	$P_{5,3}$	$P_{5,4}$	$P_{5,5}$	$P_{5,6}$	$P_{5,7}$	$P_{5,8}$	$P_{5,9}$	...	$P_{5,N}$
$P_{6,1}$	$P_{6,2}$	$P_{6,3}$	$P_{6,4}$	$P_{6,5}$	$P_{6,6}$	$P_{6,7}$	$P_{6,8}$	$P_{6,9}$	...	$P_{6,N}$
$P_{7,1}$	$P_{7,2}$	$P_{7,3}$	$P_{7,4}$	$P_{7,5}$	$P_{7,6}$	$P_{7,7}$	$P_{7,8}$	$P_{7,9}$	...	$P_{7,N}$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
$P_{M,1}$	$P_{M,2}$	$P_{M,3}$	$P_{M,4}$	$P_{M,5}$	$P_{M,6}$	$P_{M,7}$	$P_{M,8}$	$P_{M,9}$	...	$P_{M,N}$

UI

FIG. 15

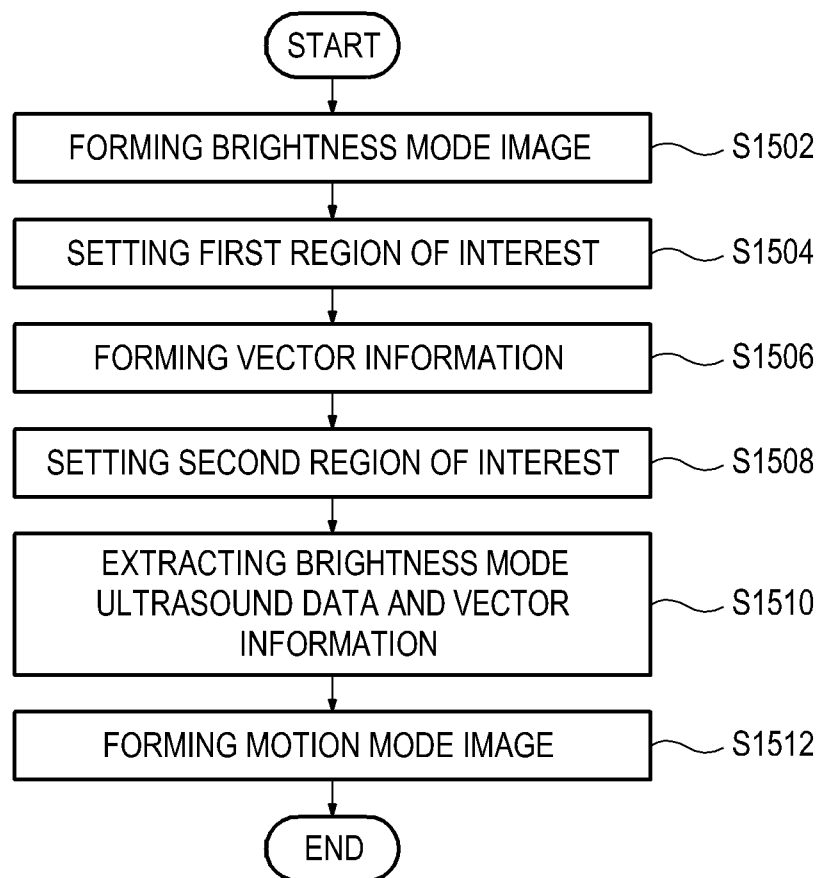


FIG. 16

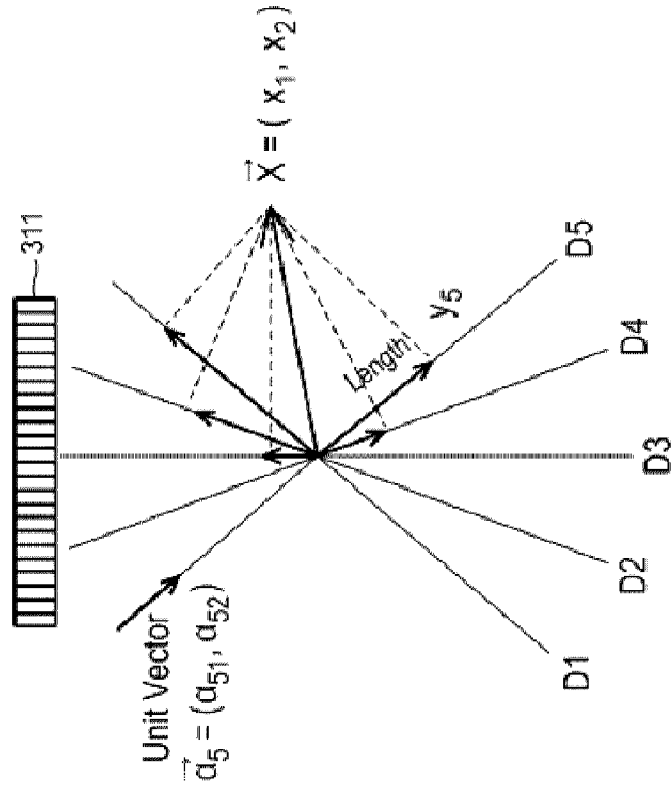
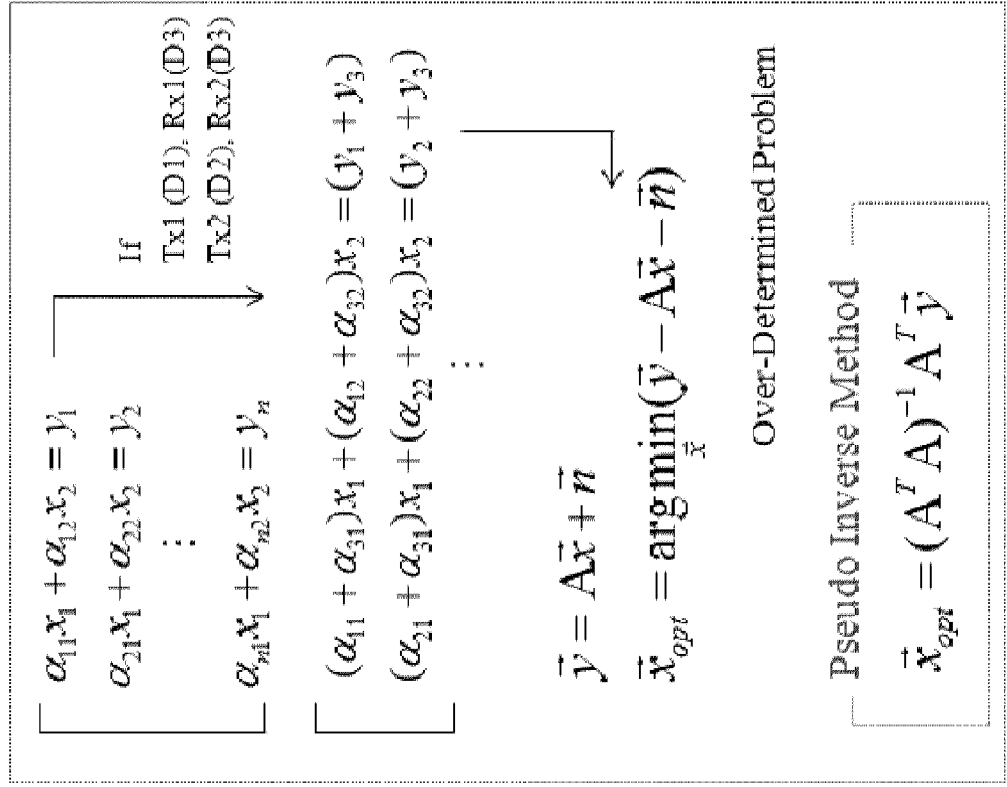


FIG. 17


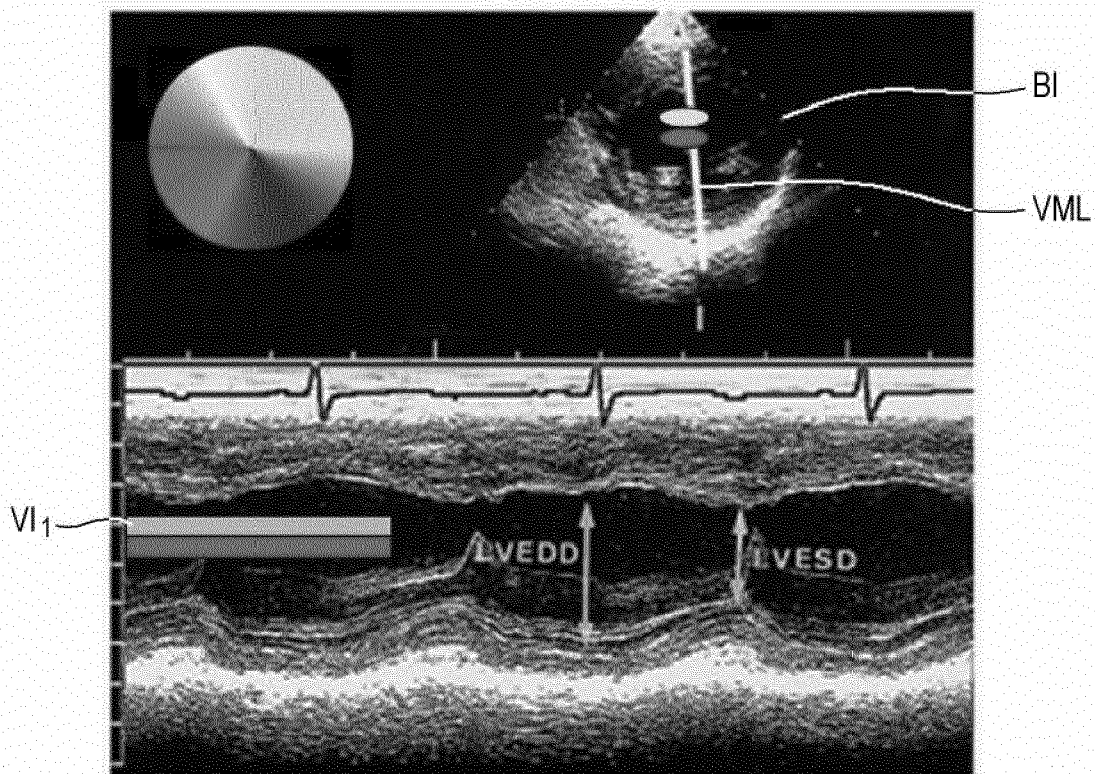


FIG. 18



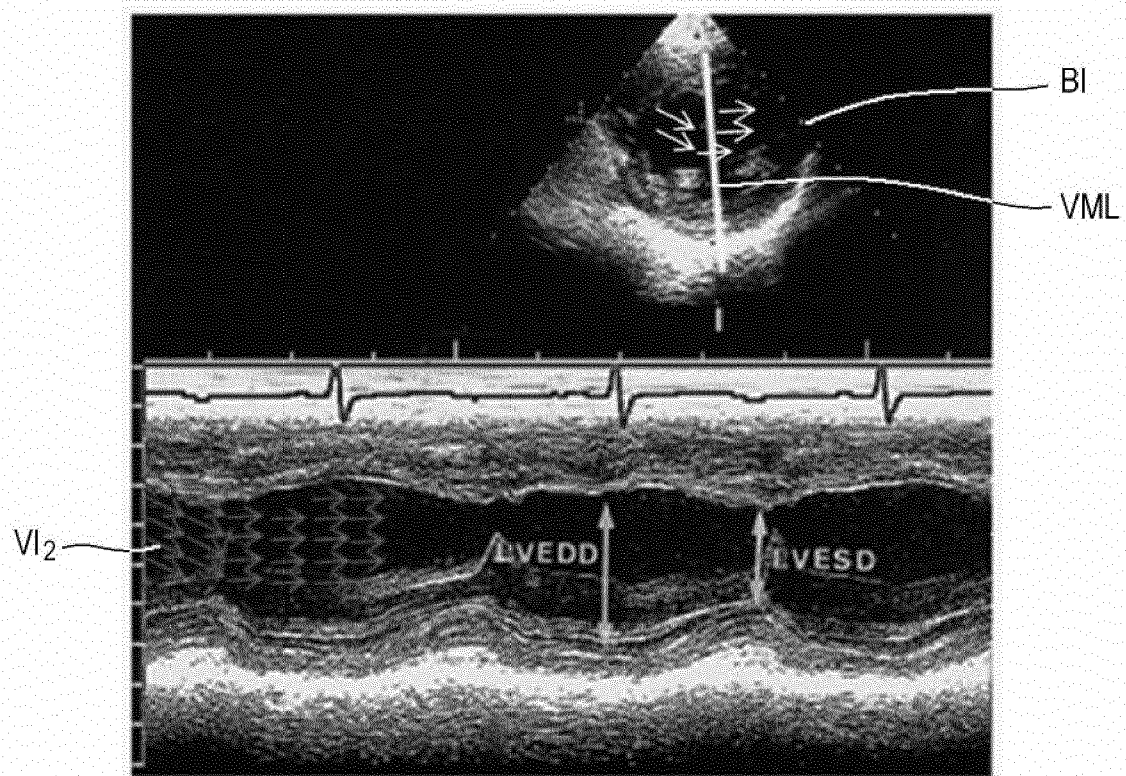

EUROPEAN SEARCH REPORT

Application Number
EP 12 18 4235

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 2 264 483 A2 (MEDISON CO LTD [KR]) 22 December 2010 (2010-12-22) * abstract * * figures 1-8 * * paragraph [0013] - paragraph [0033] * -----	1-12	INV. A61B8/00 A61B8/06 A61B8/08 G01S15/89
A	MADS MOLLER PEDERSEN ET AL: "Arterial secondary blood flow patterns visualized with vector flow ultrasound", ULTRASONICS SYMPOSIUM (IUS), 2011 IEEE INTERNATIONAL, IEEE, 18 October 2011 (2011-10-18), pages 1242-1245, XP032230409, DOI: 10.1109/ULTSYM.2011.0306 ISBN: 978-1-4577-1253-1 * abstract * * figures 1-4 * * Section II. Methods * -----	4,5,10, 11	
A	PASTORELLI A ET AL: "A Real-Time 2-D Vector Doppler System for Clinical Experimentation", IEEE TRANSACTIONS ON MEDICAL IMAGING, IEEE SERVICE CENTER, PISCATAWAY, NJ, US, vol. 27, no. 10, 10 October 2008 (2008-10-10), pages 1515-1524, XP011229452, ISSN: 0278-0062, DOI: 10.1109/TMI.2008.927337 * abstract * * figures 1-14 * * Section II. Materials and Methods * -----	1-12	TECHNICAL FIELDS SEARCHED (IPC) A61B G01S
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 11 April 2013	Examiner Moehrs, Sascha
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 3
EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 18 4235

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-04-2013

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
EP 2264483	A2	22-12-2010	EP 2264483 A2	22-12-2010
			JP 2010274120 A	09-12-2010
			US 2010305440 A1	02-12-2010

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020110143854 [0001]

专利名称(译)	在超声系统中提供运动模式图像		
公开(公告)号	EP2609866A1	公开(公告)日	2013-07-03
申请号	EP2012184235	申请日	2012-09-13
[标]申请(专利权)人(译)	三星麦迪森株式会社		
申请(专利权)人(译)	三星MEDISON CO. , LTD.		
当前申请(专利权)人(译)	三星MEDISON CO. , LTD.		
[标]发明人	KIM MIN WOO KANG WOO HYUN		
发明人	KIM, MIN WOO KANG, WOO HYUN		
IPC分类号	A61B8/00 A61B8/06 A61B8/08 G01S15/89		
代理机构(译)	SCHMID , WOLFGANG		
优先权	1020110143854 2011-12-27 KR		
外部链接	Espacenet		

摘要(译)

提供了用于提供与目标对象的运动相对应的运动模式图像的实施例。在一个实施例中，作为非限制性示例，超声系统包括：用户输入单元，被配置为接收用于在亮度模式图像上设置感兴趣区域的输入信息；处理单元，用于基于与目标对象对应的第一超声数据形成亮度模式图像，并基于与目标对象对应的第二超声数据形成目标对象的矢量信息，处理单元还用于形成运动模式图像包括基于第一超声数据和对应于感兴趣区域的矢量信息的亮度运动模式图像和彩色运动模式图像中的至少一个。

FIG. 1

