



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
02.12.2015 Bulletin 2015/49

(51) Int Cl.:
A61B 8/00 (2006.01)

(21) Application number: **13872771.4**

(86) International application number:
PCT/JP2013/077249

(22) Date of filing: **07.10.2013**

(87) International publication number:
WO 2014/115377 (31.07.2014 Gazette 2014/31)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventor: **MIYAKI, Hironaka**
Tokyo 151-0072 (JP)

(74) Representative: **Gunzelmann, Rainer**
Wuesthoff & Wuesthoff
Patentanwälte PartG mbB
Schweigerstraße 2
81541 München (DE)


(30) Priority: **23.01.2013 JP 2013010539**

(71) Applicant: **OLYMPUS CORPORATION**
Shibuya-ku
Tokyo 151-0072 (JP)

(54) **ULTRASONIC OBSERVATION DEVICE, METHOD FOR OPERATING ULTRASONIC OBSERVATION DEVICE, AND PROGRAM FOR OPERATING ULTRASONIC OBSERVATION DEVICE**

(57) An ultrasonic observation apparatus includes: a first conversion unit configured to convert an ultrasonic signal, which is a time domain signal, received by a transmitting and receiving unit, into a frequency domain signal; a regression analysis unit configured to calculate a regression expression for the frequency domain signal converted by the first conversion unit; an attenuation correction coefficient calculation unit configured to calculate an attenuation correction coefficient based on first-order coefficients in the regression expressions at two points or more having different reception depths; an attenuation correction processing unit configured to perform attenuation correction processing on the frequency domain signal based on the attenuation correction coefficient calculated by the attenuation correction coefficient calculation unit; a second conversion unit configured to convert the frequency domain signal, on which the attenuation correction processing has been performed by the attenuation correction processing unit, into a second time domain signal; and an image data generation unit configured to generate ultrasonic image data based on the second time domain signal.

FIG.1

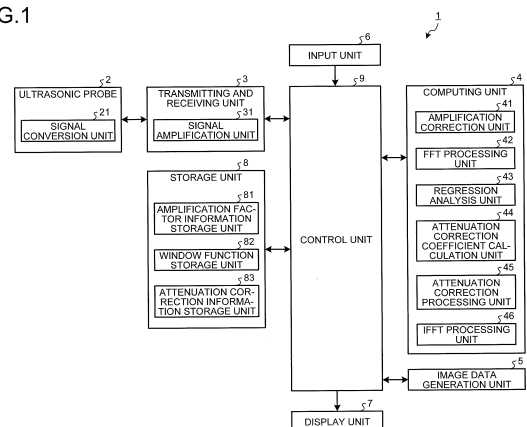

Description

Field

5 **[0001]** The present invention relates to an ultrasonic observation apparatus for observing tissues of a specimen using ultrasonic waves, an operation method of the ultrasonic observation apparatus, and an operation program of the ultrasonic observation apparatus.

Background

10 **[0002]** As an examination technique for breast cancer and the like using ultrasonic waves, a technique called ultrasonic elastography has been known (for example, see Patent Literature 1). Ultrasonic elastography is a technique utilizing the fact that stiffness of cancer or a tumor tissue inside a living body differs depending on the progress state of a disease and each living body. In this technique, in a state where an examined portion is pressed from the outside, a quantity of distortion and a degree of elasticity of the examined portion are measured using ultrasonic waves, and the measurement result is displayed in an image as a tomographic image.

15 **[0003]** As an ultrasonic wave is attenuated in a living body, it is important to know the quantity of attenuation or the attenuation correction coefficient when an examination is conducted. As a technique of correcting attenuation caused by propagation of an ultrasonic wave, STC (Sensitivity Time Control) correction which changes an amplification factor according to a propagation distance has been known (for example, see Patent Literature 2). This technique is to change the amplification factor of a signal according to a reception depth, and is not able to correct attenuation depending on a frequency. For this reason, in an area having a large reception depth and distant from the ultrasonic transducer, a high-frequency component is attenuated and the spatial resolution is reduced.

20 **[0004]** Meanwhile, a technique for performing correction depending on the frequency of a signal is also known (for example, see Patent Literature 3). In this technique, after performing fast Fourier transform (FFT) on a received signal, attenuation correction is performed so as to conform with a given frequency spectrum, and then inverse fast Fourier transform (IFFT) is performed.

25 **[0005]** Further, there is also a technique in which, with respect to a signal on which FFT has been performed, an inverse number is obtained for each frequency, and a spectrum, which increases or decreases in an inverse pattern of that of a measurement signal, is obtained as a spectrum of a correction coefficient, and after multiplying the correction coefficient with the measured frequency spectrum of the signal, IFFT is performed (for example, see Patent Literature 4).

Citation List

35 Patent Literature

[0006]

40 Patent Literature 1: Japanese Laid-open Patent Publication No. 2004-135929
 Patent Literature 2: Japanese Laid-open Patent Publication No. 8-131435
 Patent Literature 3: Japanese Laid-open Patent Publication No. 9-173334
 Patent Literature 4: Japanese Laid-open Patent Publication No. 10-33529

Summary

45 Technical Problem

[0007] In the technique disclosed in Patent Literature 3, however, the attenuation correction is only performed so as to conform with a given frequency spectrum. Therefore, the attenuation that has been performed on the received signal is not always reflected in real time, and the spectrum is not always appropriate in accordance with a measurement result.

50 **[0008]** The technique disclosed in Patent Literature 4 is provided to correct reciprocating dispersibility of an ultrasonic probe but not to correct attenuation depending on a frequency of a signal.

[0009] The present invention has been made in view of the foregoing, and an object of the invention is to provide an ultrasonic observation apparatus, an operation method of the ultrasonic observation apparatus, and an operation program of the ultrasonic observation apparatus that are able to perform appropriate attenuation correction in real time based on the measurement result.

55

Solution to Problem

[0010] In order to solve the above described problems and achieve the object, an ultrasonic observation apparatus according to the invention includes: a transmitting and receiving unit configured to transmit an ultrasonic signal, which is a time domain signal, to a specimen, and receive the ultrasonic signal reflected from the specimen; a first conversion unit configured to convert the ultrasonic signal received by the transmitting and receiving unit into a frequency domain signal; a regression analysis unit configured to calculate a regression expression for the frequency domain signal converted by the first conversion unit; an attenuation correction coefficient calculation unit configured to calculate an attenuation correction coefficient based on first-order coefficients in the regression expressions at two points or more having different reception depths; an attenuation correction processing unit configured to perform attenuation correction processing on the frequency domain signal based on the attenuation correction coefficient calculated by the attenuation correction coefficient calculation unit; a second conversion unit configured to convert the frequency domain signal, on which the attenuation correction processing has been performed by the attenuation correction processing unit, into a second time domain signal; and an image data generation unit configured to generate ultrasonic image data based on the second time domain signal.

[0011] According to the ultrasonic observation apparatus of the invention, in the above-described invention, the attenuation correction coefficient is obtained by dividing a difference between the first-order coefficients at two points constituting a pair by a difference between the reception depths at the two points.

[0012] According to the ultrasonic observation apparatus of the invention, in the above-described invention, the attenuation correction processing unit is configured to perform the attenuation correction processing on the frequency domain signal of a larger one of the reception depths at the two points used for calculating the attenuation correction coefficient, by applying the attenuation correction coefficient calculated based on the reception depths at the two points.

[0013] In the above-described invention, the ultrasonic observation apparatus according to the invention further includes a band limitation correction unit configured to perform correction to limit a frequency band to a given frequency band to thereby reduce contribution of a frequency component outside the given frequency band, after correction by the attenuation correction processing unit and before conversion by the second conversion or after conversion by the second conversion unit.

[0014] According to the ultrasonic observation apparatus of the invention, in the above-described invention, the image data generation unit is configured to generate the ultrasonic image data based on amplitude information of the second time domain signal.

[0015] An operation method according to the invention is an operation method of an ultrasonic observation apparatus that transmits ultrasonic waves to a specimen and receives the ultrasonic waves reflected from the specimen. The method includes: a first converting step of converting the received ultrasonic signal into a frequency domain signal by a first conversion unit; a regression analysis step of calculating a regression expression for the frequency domain signal by a regression analysis unit; an attenuation correction coefficient calculating step of calculating an attenuation correction coefficient by an attenuation correction coefficient calculation unit, based on first-order coefficients in the regression expressions at two points or more having different reception depths; an attenuation correction processing step of performing attenuation correction processing on the frequency domain signal based on the attenuation correction coefficient, using an attenuation correction processing unit; a second converting step of converting the frequency domain signal, on which the attenuation correction processing has been performed in the attenuation correction step, into a second time domain signal, using a second conversion unit; and an image data generating step of generating ultrasonic image data based on the second time domain signal, using an image data generation unit.

[0016] An operation program according to the invention is an operation program of an ultrasonic observation apparatus that transmits ultrasonic waves to a specimen and receives the ultrasonic waves reflected from the specimen. The program causes the ultrasonic observation apparatus to execute: a first converting step of converting the received ultrasonic signal into a frequency domain signal by a first conversion unit; a regression analysis step of calculating a regression expression for the frequency domain signal by a regression analysis unit; an attenuation correction coefficient calculating step of calculating an attenuation correction coefficient by an attenuation correction coefficient calculation unit, based on first-order coefficients in the regression expressions at two points or more having different reception depths; an attenuation correction processing step of performing attenuation correction processing on the frequency domain signal based on the attenuation correction coefficient, using an attenuation correction processing unit; a second converting step of converting the frequency domain signal, on which the attenuation correction processing has been performed in the attenuation correction step, into a second time domain signal, using a second conversion unit; and an image data generating step of generating ultrasonic image data based on the second time domain signal, using an image data generation unit.

Advantageous Effects of Invention

[0017] According to the invention, it is possible to provide an ultrasonic observation apparatus, an operation method of the ultrasonic observation apparatus, and an operation program of the ultrasonic observation apparatus that are able to perform appropriate attenuation correction in real time based on the measurement result.

Brief Description of Drawings

[0018]

FIG. 1 is a block diagram illustrating a configuration of an ultrasonic observation apparatus according to a first embodiment of the present invention.

FIG. 2 is a diagram illustrating a relationship between a reception depth and an amplification factor of an echo signal in amplification processing performed by a signal amplification unit of the ultrasonic observation apparatus according to the first embodiment of the present invention.

FIG. 3 is a diagram illustrating a relationship between a reception depth and an amplification factor in amplification processing performed by an amplification correction unit of the ultrasonic observation apparatus according to the first embodiment of the present invention.

FIG. 4 is a flowchart illustrating the outline of processing performed by the ultrasonic observation apparatus according to the first embodiment of the present invention.

FIG. 5 is a flowchart illustrating the outline of FFT processing performed by an FFT processing unit of the ultrasonic observation apparatus according to the first embodiment of the present invention.

FIG. 6 is a diagram schematically illustrating a data array of a single acoustic ray to be processed by the ultrasonic observation apparatus according to the first embodiment of the present invention.

FIG. 7 is a diagram illustrating an exemplary frequency spectrum calculated by the FFT processing unit of the ultrasonic observation apparatus according to the first embodiment of the present invention.

FIG. 8 is a diagram schematically illustrating attenuation correction coefficient calculation processing performed by an attenuation correction coefficient calculation unit of the ultrasonic observation apparatus according to the first embodiment of the present invention.

FIG. 9 is a diagram illustrating the outline of attenuation correction processing performed by an attenuation correction processing unit of the ultrasonic observation apparatus according to the first embodiment of the present invention.

FIG. 10 is a block diagram illustrating a configuration of an ultrasonic observation apparatus according to a second embodiment of the present invention.

FIG. 11 is a frequency spectral curve and an approximate curve thereof calculated by an ultrasonic observation apparatus according to another embodiment of the present invention.

Description of Embodiments

[0019] Hereinafter, modes for carrying out the present invention (hereinafter referred to as "embodiment") will be described with reference to the accompanying drawings.

(First Embodiment)

[0020] FIG. 1 is a block diagram illustrating a configuration of an ultrasonic observation apparatus according to a first embodiment of the present invention. An ultrasonic observation apparatus 1 illustrated in the drawing is an apparatus for observing a specimen to be diagnosed using ultrasonic waves.

[0021] The ultrasonic observation apparatus 1 includes an ultrasonic probe 2 which outputs ultrasonic pulses to the outside and receives ultrasonic echoes reflected outside, a transmitting and receiving unit 3 which transmits and receives electrical signals to/from the ultrasonic probe 2, a computing unit 4 which performs arithmetic operation on electrical echo signals obtained by converting ultrasonic echoes, an image data generation unit 5 which generates image data corresponding to electrical echo signals obtained by converting ultrasonic echoes, an input unit 6 which is realized using interfaces such as a keyboard, a mouse, a touch panel, and the like, and accepts inputs of various types of information, a display unit 7 which is realized by a display panel formed of liquid crystal, organic EL, or the like, and displays various types of information including images generated by the image data generation unit 5, a storage unit 8 which stores various types of information including window functions to be used for frequency analysis, and a control unit 9 which controls operation of the ultrasonic observation apparatus 1.

[0022] The ultrasonic probe 2 includes a signal conversion unit 21 which converts an electrical pulse signal received from the transmitting and receiving unit 3 into an ultrasonic pulse (acoustic pulse signal), and converts an ultrasonic

echo reflected on an outside specimen into an electrical echo signal. The ultrasonic probe 2 may be a probe which allows an ultrasonic transducer to perform scanning mechanically, or a probe which allows a plurality of ultrasonic transducers to perform scanning electronically.

[0023] The transmitting and receiving unit 3 is electrically connected to the ultrasonic probe 2, and transmits pulse signals to the ultrasonic probe 2 and receives echo signals, which are reception signals, from the ultrasonic probe 2. Specifically, the transmitting and receiving unit 3 generates pulse signals based on a preset waveform and transmission timing, and transmits the generated pulse signals to the ultrasonic probe 2.

[0024] The transmitting and receiving unit 3 includes a signal amplification unit 31 which amplifies echo signals. Specifically, the signal amplification unit 31 performs STC correction in which an echo signal having a larger reception depth is amplified with a higher amplification factor. FIG. 2 is a diagram illustrating a relationship between the reception depth of an echo signal and the amplification factor. A reception depth z illustrated in FIG. 2 is a quantity calculated based on an elapsed period of time from the point of time when reception of an ultrasonic wave begins. As illustrated in FIG. 2, if the reception depth z is smaller than a threshold z_{th} , an amplification factor β (dB) increases linearly from β_0 to β_{th} ($>\beta_0$) with an increase in the reception depth z . Further, if the reception depth z is equal to or larger than the threshold z_{th} , the amplification factor β takes a constant value β_{th} . The value of the threshold z_{th} is a value at which an ultrasonic signal received from a specimen is attenuated almost completely so that noise becomes dominant. More generally, if the reception depth z is smaller than the threshold z_{th} , it is only necessary that the amplification factor β increases monotonically with an increase in the reception depth z .

[0025] The transmitting and receiving unit 3 performs processing such as filtering and the like on an echo signal amplified by the signal amplification unit 31, and then performs A/D conversion to thereby generate and output a digital RF signal of a time domain. It is noted that, in the case where the ultrasonic probe 2 is a probe which allows a plurality of ultrasonic transducers to perform scanning electronically, the transmitting and receiving unit 3 includes a multi-channel circuit for beam synthesis corresponding to the ultrasonic transducers.

[0026] The computing unit 4 includes an amplification correction unit 41 which performs amplification correction for making the amplification factor constant, independent of the reception depth, on a digital RF signal output from the transmitting and receiving unit 3, an FFT processing unit 42 which performs fast Fourier transform (FFT) on the digital RF signal, on which amplification correction has been performed, to thereby obtain a signal of a frequency domain (frequency spectrum), a regression analysis unit 43 which performs regression analysis on the signal on which FFT has been performed by the FFT processing unit 42, an attenuation correction coefficient calculation unit 44 which calculates an attenuation correction coefficient based on the result of regression analysis performed by the regression analysis unit 43, an attenuation correction processing unit 45 which performs attenuation correction of the signal, on which FFT has been performed, using the attenuation correction coefficient calculated by the attenuation correction coefficient calculation unit 44, and an IFFT processing unit 46 which performs inverse fast Fourier transform (IFFT) on the signal, on which attenuation correction has been performed by the attenuation correction processing unit 45, to thereby obtain a signal of a time domain.

[0027] FIG. 3 is a diagram illustrating a relationship between the reception depth and the amplification factor in amplification processing performed by the amplification correction unit 41. As illustrated in FIG. 3, the amplification factor β (dB) in the amplification processing performed by the amplification correction unit 41 takes a maximum value $\beta_{th}-\beta_0$ when the reception depth z is zero, decreases linearly until the reception depth z reaches the threshold z_{th} from zero, and takes zero when the reception depth z is equal to or larger than the threshold z_{th} . By performing amplification correction on a digital RF signal by the amplification correction unit 41 using the amplification factor determined in this way, an effect of STC correction by the signal amplification unit 31 is offset, whereby a signal having a constant amplification factor β_{th} can be output. It is noted that the relationship between the reception depth z and the amplification factor β performed by the amplification correction unit 41 varies depending on the relationship between the reception depth and the amplification factor in the signal amplification unit 31, of course.

[0028] The FFT processing unit 42 calculates a signal of a frequency domain, that is, a frequency spectrum, by performing FFT on an FFT data group including a given amount of data, with respect to each acoustic ray (line data) to be processed. The FFT processing unit 42 corresponds to a first conversion unit which converts an ultrasonic signal received by the transmitting and receiving unit 3 into a frequency domain signal. The calculation result of FFT is obtained as a complex number, and is stored in the storage unit 8. A frequency spectrum shows a different tendency depending on the tissue characterization of a specimen. This is because a frequency spectrum is correlated with the size, density, acoustic impedance, and the like of the specimen as a scatterer which scatters ultrasonic waves.

[0029] The regression analysis unit 43 performs regression analysis on each spectrum having an intensity $I(f)$, where the frequency spectrum of the reception depths z at two or more points (distances from the ultrasonic transducer provided to the ultrasonic probe 2) calculated by the FFT processing unit 42 is represented by the intensity $I(f,z)$ and the phase $\phi(f,z)$ (" f " represents a frequency), to thereby calculates a regression expression which is a linear expression. The first-order coefficient of the regression expression (hereinafter referred to as "slope") is correlated with the size of the attenuation correction coefficient of an ultrasonic wave. Accordingly, as the attenuation correction coefficient is larger, a

change of the slope with respect to a propagation distance of the ultrasonic wave becomes larger.

[0030] The attenuation correction coefficient calculation unit 44 calculates an attenuation correction coefficient of an ultrasonic wave using the slopes of the regression expressions extracted by the regression analysis unit 43, and the reception depths at two or more points with which the regression expressions are calculated. Specifically, assuming that the slope of the regression expression of the frequency spectrum at a reception depth z_1 is a_1 and the slope of the regression expression of the frequency spectrum at a reception depth z_2 is a_2 , the attenuation correction coefficient calculation unit 44 calculates an attenuation correction coefficient α between the two points z_1 and z_2 ($z_2 > z_1$) from the following expression (1) :

$$\alpha = (a_1 - a_2) / (z_2 - z_1) \quad \cdots (1)$$

[0031] As obvious from Expression (1), the attenuation correction coefficient α corresponds to an average attenuation correction coefficient between the two points. Here, the reception depths z_1 and z_2 in Expression (1) can be calculated based on the reception times of echo signals. It is noted that a difference $z_2 - z_1$ between the reception depths of the two points is preferably almost similar to the wavelength of the ultrasonic wave (approximately several mm, for example) output by the ultrasonic probe 2.

[0032] The attenuation correction processing unit 45 performs attenuation correction processing of the frequency spectrum based on the attenuation correction coefficient calculated by the attenuation correction coefficient calculation unit 44. Specifically, the attenuation correction processing unit 45 corrects the intensity $I(f, z_1)$ excluding the phase component of the frequency spectrum of the reception depth z_1 as follows:

$$I'(f, z_1) = I(f, z_1) + 2\alpha(z_1) z_1 f \quad \cdots (2)$$

[0033] Here, $\alpha(z_1)$ in right-hand side is given by α of Expression (1), for example.

[0034] The IFFT processing unit 46 performs IFFT processing on the frequency spectrum corrected by the attenuation correction processing unit 45 to thereby obtain a signal of a time domain (second time domain signal). The IFFT processing unit 46 corresponds to a second conversion unit which converts the frequency domain signal, on which attenuation correction has been performed by the attenuation correction processing unit 45, into a second time domain signal. The second time domain signal is an ultrasonic signal on which attenuation correction has been performed corresponding to the reception depth and the frequency. Accordingly, it is possible to obtain an ultrasonic signal in which a high-frequency component is also restored, which is different from the processing which only increases the amplification factor of a signal as in the conventional art.

[0035] The image data generation unit 5 performs signal processing on the real part of the second time domain signal, on which attenuation correction has been performed by the computing unit 4, using well-known art such as filter processing, logarithmic compression, gain processing, contrast processing, and the like. The image data generation unit 5 also performs decimation of data and the like corresponding to the data step width determined depending on the image display range in the display unit 7, to thereby generate ultrasonic image data. The ultrasonic image data corresponds to data on which attenuation correction depending on the frequency is performed on B mode image data which is a grayscale image, in which the values of R (red), G (green), and B (blue) being variables when an RGB color system is adopted as a color space are conformed.

[0036] The storage unit 8 includes an amplification factor information storage unit 81 which stores information of amplification factors to be referred to when the signal amplification unit 31 and the amplification correction unit 41 perform amplification processing, a window function storage unit 82 which stores at least one of window functions such as Hamming, Hanning, and Blackman as a window function to be used in FFT processing performed by the FFT processing unit 42, and an attenuation correction information storage unit 83 which stores the attenuation correction coefficient α calculated by the attenuation correction coefficient calculation unit 44, along with the slopes a_1 and a_2 and the reception depths z_1 and z_2 in Expression (1).

[0037] The storage unit 8 is realized using a ROM in which an operation program of the ultrasonic observation apparatus according to the first embodiment, a program for activating a specified OS, and the like have been stored in advance, a RAM in which operation parameters of various types of processing, data, and the like are stored, and the like.

[0038] The control unit 9 is realized using a CPU and the like, and collectively controls operation of the ultrasonic observation apparatus 1. The control unit 9 reads, from the storage unit 8, information and various types of programs including the operation program of the ultrasonic observation apparatus described above stored in the storage unit 8, to thereby perform arithmetic processing related to an operation method of the ultrasonic observation apparatus according to the first embodiment.

[0039] It is noted that the operation program of the ultrasonic observation apparatus according to the first embodiment may be recorded on a computer readable recording medium such as a hard disk, a flash memory, a CD-ROM, a DVD-ROM, or a flexible disk so as to be made available widely.

[0040] FIG. 4 is a flowchart illustrating the outline of processing by the ultrasonic observation apparatus 1 having the configuration described above. In FIG. 4, the ultrasonic observation apparatus 1 first measures a new specimen by the ultrasonic probe 2 (step S1).

[0041] Subsequently, the signal amplification unit 31 which has received an echo signal from the ultrasonic probe 2 amplifies the echo signal (step S2). At this step, the signal amplification unit 31 performs amplification (STC correction) based on the relationship between the amplification factor and the reception depth illustrated in FIG. 2.

[0042] Then, the amplification correction unit 41 performs correction on the signal output from the transmitting and receiving unit 3 so as to make the amplification factor constant independent of the reception depth (step S3). At this step, the amplification correction unit 41 performs amplification correction based on the relationship between the amplification factor and the reception depth illustrated in FIG. 3, for example.

[0043] Subsequently, the FFT processing unit 42 performs FFT processing on the signal on which amplification correction has been performed (step S4). FIG. 5 is a flowchart illustrating the outline of the FFT processing performed by the FFT processing unit 42. Hereinafter, the FFT processing performed by the FFT processing unit 42 will be described in detail with reference to FIG. 5.

[0044] First, the FFT processing unit 42 sets a counter k , for identifying an acoustic ray to be analyzed, to be k_0 (step S21).

[0045] Subsequently, the FFT processing unit 42 sets an initial value $Z^{(k)}_0$ of a data position (corresponding to a reception depth) $Z^{(k)}$ representing a series of data group (FFT data group) acquired for FFT operation (step S22). FIG. 6 is a diagram schematically illustrating a data array of a single acoustic ray. In an acoustic ray SR_k illustrated in the drawing, a rectangle in white or black means a single piece of data. The acoustic ray SR_k is discretized at time intervals corresponding to a sampling frequency (e.g., 50 MHz) in A/D conversion performed by the transmitting and receiving unit 3. Although FIG. 6 illustrates a case where the first data position in the acoustic ray SR_k is set to be the initial value $Z^{(k)}_0$, the position of the initial value can be set arbitrary.

[0046] Then, the FFT processing unit 42 acquires the FFT data group at the data position $Z^{(k)}$ (step S23), and applies the window function stored in the window function storage unit 82 to the acquired FFT data group (step S24). In this way, by applying the window function to the FFT data group, it is possible to avoid the FFT data group becoming discontinuous at the boundary, and to prevent generation of artifacts.

[0047] Subsequently, the FFT processing unit 42 determines whether or not the FFT data group at the data position $Z^{(k)}$ is a normal data group (step S25). Here, the FFT data group must have the number of data of a power of two. Hereinafter, the number of data of the FFT data group is assumed to be 2^n (n is a positive integer). The FFT data group being normal means the data position $Z^{(k)}$ is at the 2^{n-1} th position from the front in the FFT data group. In other words, the FFT data group being normal means that $2^{n-1}-1$ ($=N$) pieces of data are located in front of the data position $Z^{(k)}$, and 2^{n-1} ($=M$) pieces of data are located behind the data position $Z^{(k)}$. In the case illustrated in FIG. 6, both the FFT data groups F_2 and F_3 are normal, provided that $n=4$ ($N=7$, $M=8$) in FIG. 6.

[0048] As a result of determination at step S25, if the FFT data group at the data position $Z^{(k)}$ is normal (step S25: Yes), the FFT processing unit 42 proceeds to step S27 described below.

[0049] As a result of the determination at step S25, if the FFT data group at the data position $Z^{(k)}$ is abnormal (step S25: No), the FFT processing unit 42 generates a normal FFT data group by inserting zero data for the shortfall (step S26). The window function has been applied to the FFT data group determined as abnormal at step S25 before adding zero data. Therefore, even if zero data is inserted in the FFT data group, data discontinuity will not occur. After step S26, the FFT processing unit 42 proceeds to step S27 described below.

[0050] At step S27, the FFT processing unit 42 performs FFT operation using the FFT data group to thereby acquire a frequency spectrum which is a complex number (step S27).

[0051] Subsequently, the FFT processing unit 42 changes the data position $Z^{(k)}$ by a step width D (step S28). The step width D is assumed to be stored in advance in the storage unit 8. FIG. 6 illustrates an exemplary case where $D=15$. It is desirable that the step width D is equal to the data step width to be used when the image data generation unit 5 generates B mode image data. However, if it is desirable to reduce the operation amount in the FFT processing unit 42, a value larger than the data step width used by the image data generation unit 5 may be set.

[0052] Then, the FFT processing unit 42 determines whether or not the data position $Z^{(k)}$ is larger than a maximum value $Z^{(k)}_{\max}$ in the acoustic ray SR_k (step S29). If the data position $Z^{(k)}$ is larger than the maximum value $Z^{(k)}_{\max}$ (step S29: Yes), the FFT processing unit 42 increments the counter k by one (step S30). On the other hand, if the data position $Z^{(k)}$ is the maximum value $Z^{(k)}_{\max}$ or smaller (step S29: No), the FFT processing unit 42 returns to step S23. In this way, the FFT processing unit 42 performs FFT operation on the $\{(Z^{(k)}_{\max}-Z^{(k)}_0)/D\}+1$ FFT data groups, with respect to the acoustic ray SR_k . In this example, $[X]$ represents a maximum integer not exceeding X .

[0053] After step S30, the FFT processing unit 42 determines whether or not the counter k is larger than a maximum

value $k_{\max}$ (step 31). If the counter k is larger than $k_{\max}$ (step S31: Yes), the FFT processing unit 42 ends the series of FFT processing. On the other hand, if the counter k is $k_{\max}$ or smaller (step S31: No), the FFT processing unit returns to step S22.

[0054] It is noted that while, in this example, it is the premise that the FFT processing unit 42 performs FFT processing on the entire area where a ultrasonic signal is received, it is possible to accept an setting input of a particular area of concern by the input unit 6 beforehand and perform FFT processing in the area of concern.

[0055] FIG. 7 is a diagram illustrating an exemplary frequency spectrum calculated by the FFT processing unit 42. In FIG. 7, the horizontal axis f shows a frequency and the vertical axis I shows intensity. A frequency spectral curve C_1 illustrated in FIG. 7 gives an intensity spectrum excluding a phase component at a data position (reception depth) $Z^{(k)}$. It is noted that in the first embodiment, a curve and a straight line including a set of discrete points. This is also the same even in the embodiments described below. A frequency band is determined based on the frequency band of the ultrasonic probe 2, the frequency band of a pulse signal transmitted by the transmitting and receiving unit 3, and the like. In the case illustrated in FIG. 7, the frequency band is a band between the lower limit frequency f_L and the upper limit frequency f_H . Specific values of the lower limit frequency f_L and the upper limit frequency f_H of the frequency spectrum in this case are $f_L=3$ MHz and $f_H=10$ MHz, for example. It is noted that at a point where the reception depth is larger than a given value among the points on the acoustic ray, the upper limit value of the frequency band may be set to a value smaller than the upper limit frequency f_H . Further, the frequency band illustrated in FIG. 7 is merely an example. Another value in the proximity of the upper limit frequency f_H may be set as an upper limit value, while another value in the proximity of the lower limit frequency f_L may be set as a lower limit value. The straight line L_1 illustrated in FIG. 7 will be described below.

[0056] Further description will be continued by returning to the flowchart of FIG. 4. Subsequent to the FFT processing at step S4 described above, the regression analysis unit 43 performs regression analysis on the frequency spectrum calculated by the FFT processing unit 42 to thereby extract a parameter of the regression expression (step S5). Specifically, the regression analysis unit 43 calculates a regression expression (linear expression) of a frequency spectrum having a frequency band $f_L < f < f_H$ by regression analysis to thereby extract slope "a". The straight line L_1 illustrated in FIG. 7 is a regression line obtained by performing regression analysis processing on the frequency spectral curve C_1 by the regression analysis unit 43 at this step S5.

[0057] Then, the attenuation correction coefficient calculation unit 44 calculates the attenuation correction coefficient α according to Expression (1) described above (step S6). FIG. 8 is a diagram schematically illustrating attenuation correction coefficient calculation processing performed by the attenuation correction coefficient calculation unit 44. The acoustic ray SR illustrated in FIG. 8 shows three points P, Q, and R adjacent to each other along the direction of the reception depth on a single acoustic ray from which attenuation correction coefficients are calculated. It is assumed that the reception depths of the points P, Q, and R are z_P , z_Q , and z_R , respectively ($z_P < z_Q < z_R$). It is also assumed that the slopes of the approximate straight lines of the frequency spectrums at the points P, Q, and R are a_P , a_Q , and a_R , respectively. In this example, the attenuation correction coefficient $\alpha(z_Q)$ at the point Q is calculated by substituting the reception depth z_Q and the slope a_Q of itself, and the reception depth z_P and the slope a_P of the point P which is adjacent thereto and has a smaller reception depth than that of itself, into Expression (1) as follows:

$$\alpha(z_Q) = (a_P - a_Q) / (z_Q - z_P) \quad \cdots (3)$$

Similarly, the attenuation correction coefficient $\alpha(z_R)$ at the point R is calculated by substituting the reception depth z_R and the slope a_R of itself, and the reception depth z_Q and the slope a_Q of the point Q which is adjacent thereto and has a smaller reception depth than that of itself, into Expression (1) as follows:

$$\alpha(z_R) = (a_Q - a_R) / (z_R - z_Q) \quad \cdots (4)$$

The attenuation correction coefficients calculated by the attenuation correction coefficient calculation unit 44 in this way are stored in the attenuation correction information storage unit 83.

[0058] Subsequently, the attenuation correction processing unit 45 performs attenuation correction processing based on the attenuation correction coefficients calculated by the attenuation correction coefficient calculation unit 44 (step S7). FIG. 9 is a diagram illustrating the outline of attenuation correction processing performed by the attenuation correction processing unit 45. The attenuation correction processing unit 45 performs attenuation correction on the frequency spectrum using Expression (3). Specifically, the intensity spectrum $I(f, z)$ is corrected according to the following Expression (5):

$$I'(f, z) = I(f, z) + 2\alpha(z)zf \cdots (5)$$

Thereby, a frequency spectral curve C_2 after the attenuation correction is obtained.

[0059] It is noted that when calculating the attenuation correction coefficient at the point Q in FIG. 8, the data positions and the slopes of the point Q and the point R may be used. As shown above, when calculating an attenuation correction coefficient of a point, the way of selecting a point other than oneself is not limited to those described above.

[0060] Then, the IFFT processing unit 46 performs IFFT processing on the frequency spectrum after the attenuation correction (step S8). Specifically, the IFFT processing unit 46 performs IFFT processing on a complex number which is obtained by adding the phase component of the frequency spectrum before correction to the intensity spectrum $I'(f, z)$ of Expression (5). Thereby, an ultrasonic signal of a time domain, on which attenuation correction dependent on the frequency has been performed, is obtained.

[0061] Subsequently, the image data generation unit 5 generates image data based on the ultrasonic signal of a frequency domain on which attenuation correction has been performed by the computing unit 4 (step S9).

[0062] The display unit 7 displays an image corresponding to the image data generated by the image data generation unit 5 (step S10).

[0063] According to the first embodiment of the present invention described above, attenuation correction processing on the signal, on which FFT processing was performed, is performed using the attenuation correction coefficients calculated based on the first-order coefficients in the regression expressions of two or more points having different reception depths. Subsequently, ultrasonic image data is generated based on the time domain signal obtained by performing IFFT processing. Thereby, it is possible to perform appropriate attenuation correction in real time based on the measurement result.

[0064] Further, according to the first embodiment, by correcting attenuation dependent on the frequency, it is possible to display an ultrasonic image having good spatial resolution even in an area distant from the ultrasonic probe.

[0065] It is noted that while, in the first embodiment, attenuation correction coefficients are calculated using two points on a single acoustic ray, more generally, attenuation correction coefficients may be calculated using a plurality of points on a single acoustic ray. For example, in the case of using three points, there are three ways of combining two points among the three points. In that case, it is only necessary that the attenuation correction coefficient calculation unit 44 first calculates an attenuation correction coefficient between adjacent two points based on Expression (1), and then calculates an average value of the two attenuation correction coefficients calculated, as a final attenuation correction coefficient. Further, in the case of using three points, it is possible that the attenuation correction coefficient calculation unit 44 calculates attenuation correction coefficients with respect to all of the combinations of two points which can be obtained from the three points, and calculates an average value as a final attenuation correction coefficient.

(Second Embodiment)

[0066] FIG. 10 is a block diagram illustrating a configuration of an ultrasonic observation apparatus according to a second embodiment of the present invention. An ultrasonic observation apparatus 101 illustrated in the drawing is different in the configuration of a computing unit 102, compared with the ultrasonic observation apparatus 1. Therefore, elements having similar functions as those of the elements of the ultrasonic observation apparatus 1 are denoted by the same reference signs.

[0067] The computing unit 102 includes a band limitation correction unit 103, in addition to the configuration included in the computing unit 4 (the amplification correction unit 41, the FFT processing unit 42, the regression analysis unit 43, the attenuation correction coefficient calculation unit 44, the attenuation correction processing unit 45, and the IFFT processing unit 46) of the ultrasonic observation apparatus 1.

[0068] The band limitation correction unit 103 performs correction to limit the frequency band to thereby reduce contribution of frequency components outside the given frequency band, with respect to the frequency spectrum on which correction has been performed by the attenuation correction processing unit 45. As such a correction, the band limitation correction unit 103 performs processing to replace unnecessary spectral intensity with zero, in a frequency component outside the given frequency band, for example. This processing can be performed by applying a specified window function to the frequency spectrum, for example.

[0069] According to the second embodiment of the present invention described above, in addition to an advantageous effect similar to that of the first embodiment described above, it is possible to prevent noise of a high-frequency component from being emphasized excessively due to attenuation correction.

[0070] It is noted that in the second embodiment, the attenuation may be performed by multiplying a specified weight, instead of replacing unnecessary spectral intensity with zero.

[0071] Further, in the second embodiment, the band limitation correction unit 103 may attenuate unnecessary spectral

intensity with respect to the ultrasonic signal of a time domain obtained by performing IFFT processing by the IFFT processing unit 46.

(Other Embodiments)

[0072] While modes for carrying out the present invention have been described, the present invention is not limited to the two embodiments described above. FIG. 11 is a diagram illustrating a frequency spectral curve calculated by an ultrasonic observation apparatus according to another embodiment of the present invention, and a regression curve obtained by performing regression analysis on the frequency spectral curve. In FIG. 11, a curve C_{31} is a regression curve of a frequency spectral curve C_3 (assumed to have a reception depth z_3), and a curve C_{41} is a regression curve of a frequency spectral curve C_4 (assumed to have a reception depth z_4 ($>z_3$)).

[0073] On the assumption that attenuation along with propagation of an ultrasonic wave is proportional to the reception depth and the frequency, respectively, in a difference between an expression of the frequency spectral curve C_3 , that is, $I_3(f) = C_{30} + C_{31}f + C_{32}f^2 + \dots$ and an expression of the frequency spectral curve C_4 , that is, $I_4(f) = C_{40} + C_{41}f + C_{42}f^2 + \dots$, a first-order term becomes dominant.

$$I_3(f) - I_4(f) \sim (C_{31} - C_{41})f \quad \dots \quad (6)$$

[0074] Accordingly, an attenuation correction coefficient α between the reception depth z_3 and the reception depth z_4 can be defined as follows:

$$\alpha = (C_{31} - C_{41}) / (z_4 - z_3) \quad \dots \quad (7)$$

[0075] In this way, according to the invention, even in the case where the frequency spectrum cannot be approximated by a linear expression, it is possible to calculate an attenuation correction coefficient accurately and easily by performing regression analysis using a more general polynomial.

[0076] Further, according to the invention, in general, as for an image generated based on amplitude information, it is possible to obtain an advantageous effect similar to that described above by performing frequency-dependent attenuation correction. Such an image includes an A mode image, a C mode image, and a three-dimensional display image.

[0077] Further, in the present invention, tissue characterization of a body tissue may be determined using an attenuation correction coefficient calculated by the attenuation correction coefficient calculation unit. This is because, in the case where the observation target is a body tissue, it is known that an attenuation correction coefficient of an ultrasonic wave has a relation with the tissue characterization of the body tissue.

[0078] As obvious from the above description, the present invention may include various embodiments within the scope not deviating from the technical concept described in the claims.

Reference Signs List

[0079]

- 1, 101 ultrasonic observation apparatus
- 2 ultrasonic probe
- 3 transmitting and receiving unit
- 4, 102 computing unit
- 5 image data generation unit
- 6 input unit
- 7 display unit
- 8 storage unit
- 9 control unit
- 21 signal conversion unit
- 31 signal amplification unit
- 41 amplification correction unit
- 42 FFT processing unit
- 43 regression analysis unit
- 44 attenuation correction coefficient calculation unit

45 attenuation correction processing unit
 46 IFFT processing unit
 81 amplification factor information storage unit
 82 window function storage unit
 5 83 attenuation correction information storage unit
 103 band limitation correction unit

Claims

1. An ultrasonic observation apparatus comprising:

a transmitting and receiving unit configured to transmit an ultrasonic signal, which is a time domain signal, to a specimen, and receive the ultrasonic signal reflected from the specimen;
 a first conversion unit configured to convert the ultrasonic signal received by the transmitting and receiving unit into a frequency domain signal;
 a regression analysis unit configured to calculate a regression expression for the frequency domain signal converted by the first conversion unit;
 an attenuation correction coefficient calculation unit configured to calculate an attenuation correction coefficient based on first-order coefficients in the regression expressions at two points or more having different reception depths;
 an attenuation correction processing unit configured to perform attenuation correction processing on the frequency domain signal based on the attenuation correction coefficient calculated by the attenuation correction coefficient calculation unit;
 a second conversion unit configured to convert the frequency domain signal, on which the attenuation correction processing has been performed by the attenuation correction processing unit, into a second time domain signal;
 and
 an image data generation unit configured to generate ultrasonic image data based on the second time domain signal.

2. The ultrasonic observation apparatus according to claim 1, wherein the attenuation correction coefficient is obtained by dividing a difference between the first-order coefficients at two points constituting a pair by a difference between the reception depths at the two points.

3. The ultrasonic observation apparatus according to claim 2, wherein the attenuation correction processing unit is configured to perform the attenuation correction processing on the frequency domain signal of a larger one of the reception depths at the two points used for calculating the attenuation correction coefficient, by applying the attenuation correction coefficient calculated based on the reception depths at the two points.

4. The ultrasonic observation apparatus according to any one of claims 1 to 3, further comprising a band limitation correction unit configured to perform correction to limit a frequency band to a given frequency band to thereby reduce contribution of a frequency component outside the given frequency band, after correction by the attenuation correction processing unit and before conversion by the second conversion or after conversion by the second conversion unit.

5. The ultrasonic observation apparatus according to any one of claims 1 to 4, wherein the image data generation unit is configured to generate the ultrasonic image data based on amplitude information of the second time domain signal.

6. An operation method of an ultrasonic observation apparatus that transmits ultrasonic waves to a specimen and receives the ultrasonic waves reflected from the specimen, the method comprising:

a first converting step of converting the received ultrasonic signal into a frequency domain signal by a first conversion unit;
 a regression analysis step of calculating a regression expression for the frequency domain signal by a regression analysis unit;
 an attenuation correction coefficient calculating step of calculating an attenuation correction coefficient by an attenuation correction coefficient calculation unit, based on first-order coefficients in the regression expressions at two points or more having different reception depths;
 an attenuation correction processing step of performing attenuation correction processing on the frequency

domain signal based on the attenuation correction coefficient, using an attenuation correction processing unit;
a second converting step of converting the frequency domain signal, on which the attenuation correction processing has been performed in the attenuation correction step, into a second time domain signal, using a second conversion unit; and
an image data generating step of generating ultrasonic image data based on the second time domain signal, using an image data generation unit.

7. An operation program of an ultrasonic observation apparatus that transmits ultrasonic waves to a specimen and receives the ultrasonic waves reflected from the specimen, the program causing the ultrasonic observation apparatus to execute:

a first converting step of converting the received ultrasonic signal into a frequency domain signal by a first conversion unit;
a regression analysis step of calculating a regression expression for the frequency domain signal by a regression analysis unit;
an attenuation correction coefficient calculating step of calculating an attenuation correction coefficient by an attenuation correction coefficient calculation unit, based on first-order coefficients in the regression expressions at two points or more having different reception depths;
an attenuation correction processing step of performing attenuation correction processing on the frequency domain signal based on the attenuation correction coefficient, using an attenuation correction processing unit;
a second converting step of converting the frequency domain signal, on which the attenuation correction processing has been performed in the attenuation correction step, into a second time domain signal, using a second conversion unit; and
an image data generating step of generating ultrasonic image data based on the second time domain signal, using an image data generation unit.

FIG.1

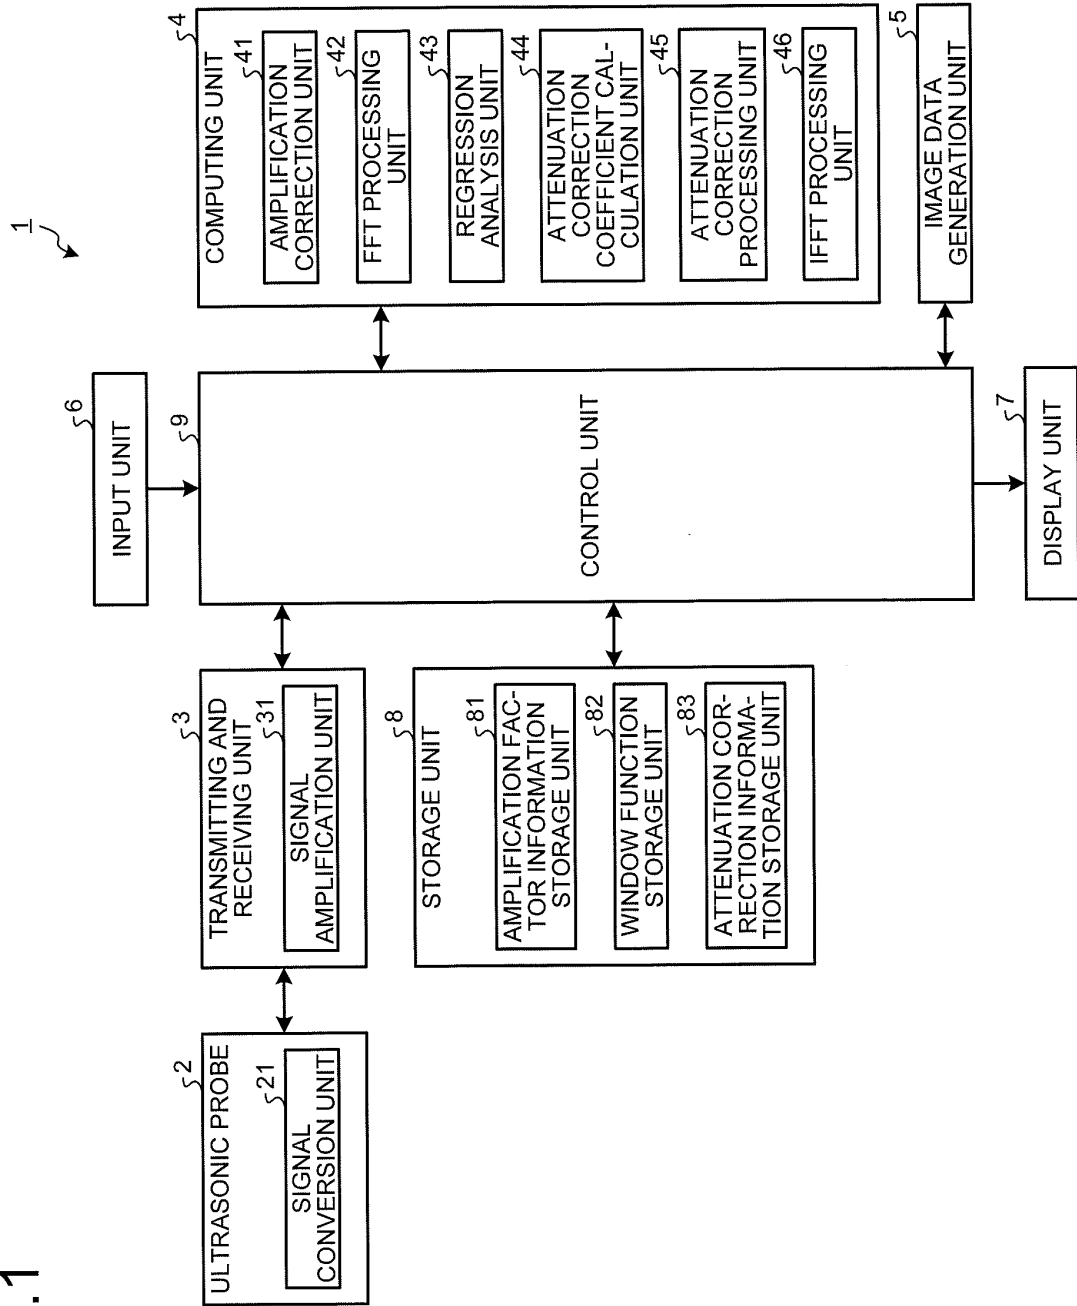


FIG.2

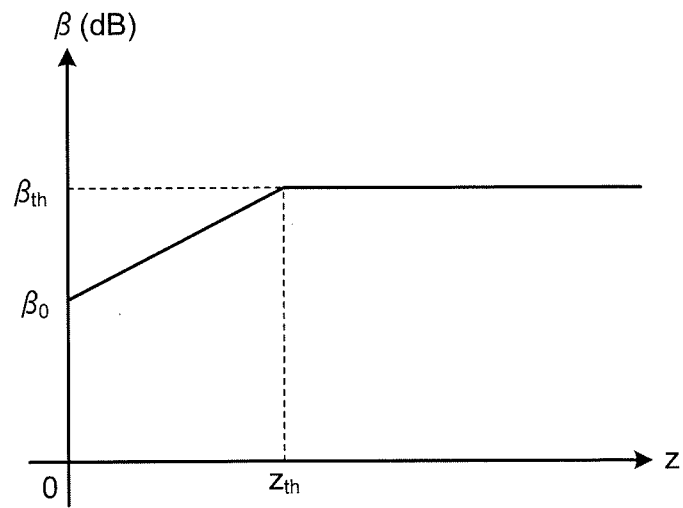


FIG.3

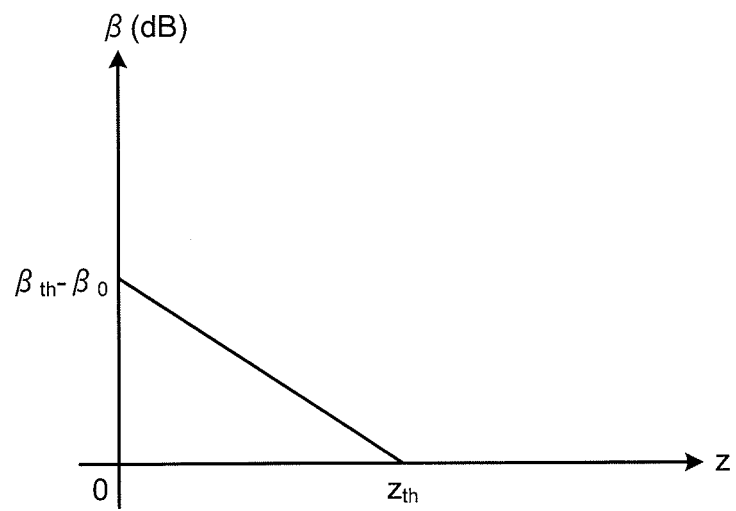


FIG.4

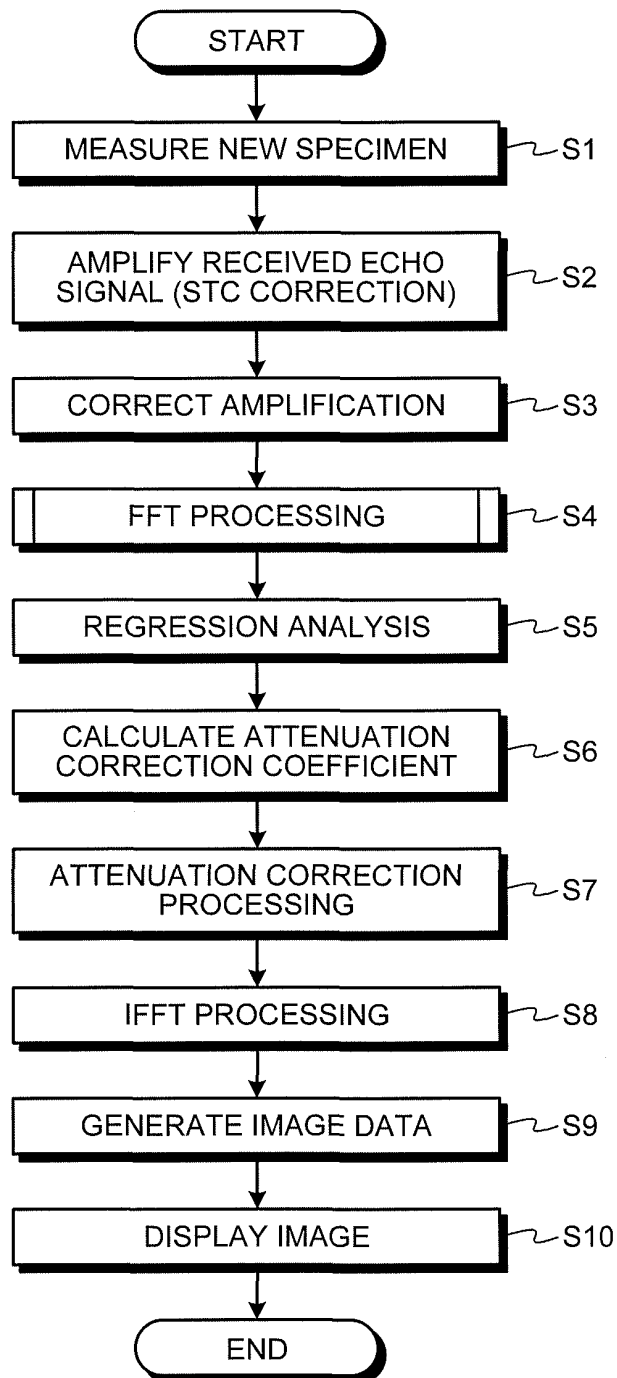


FIG.5

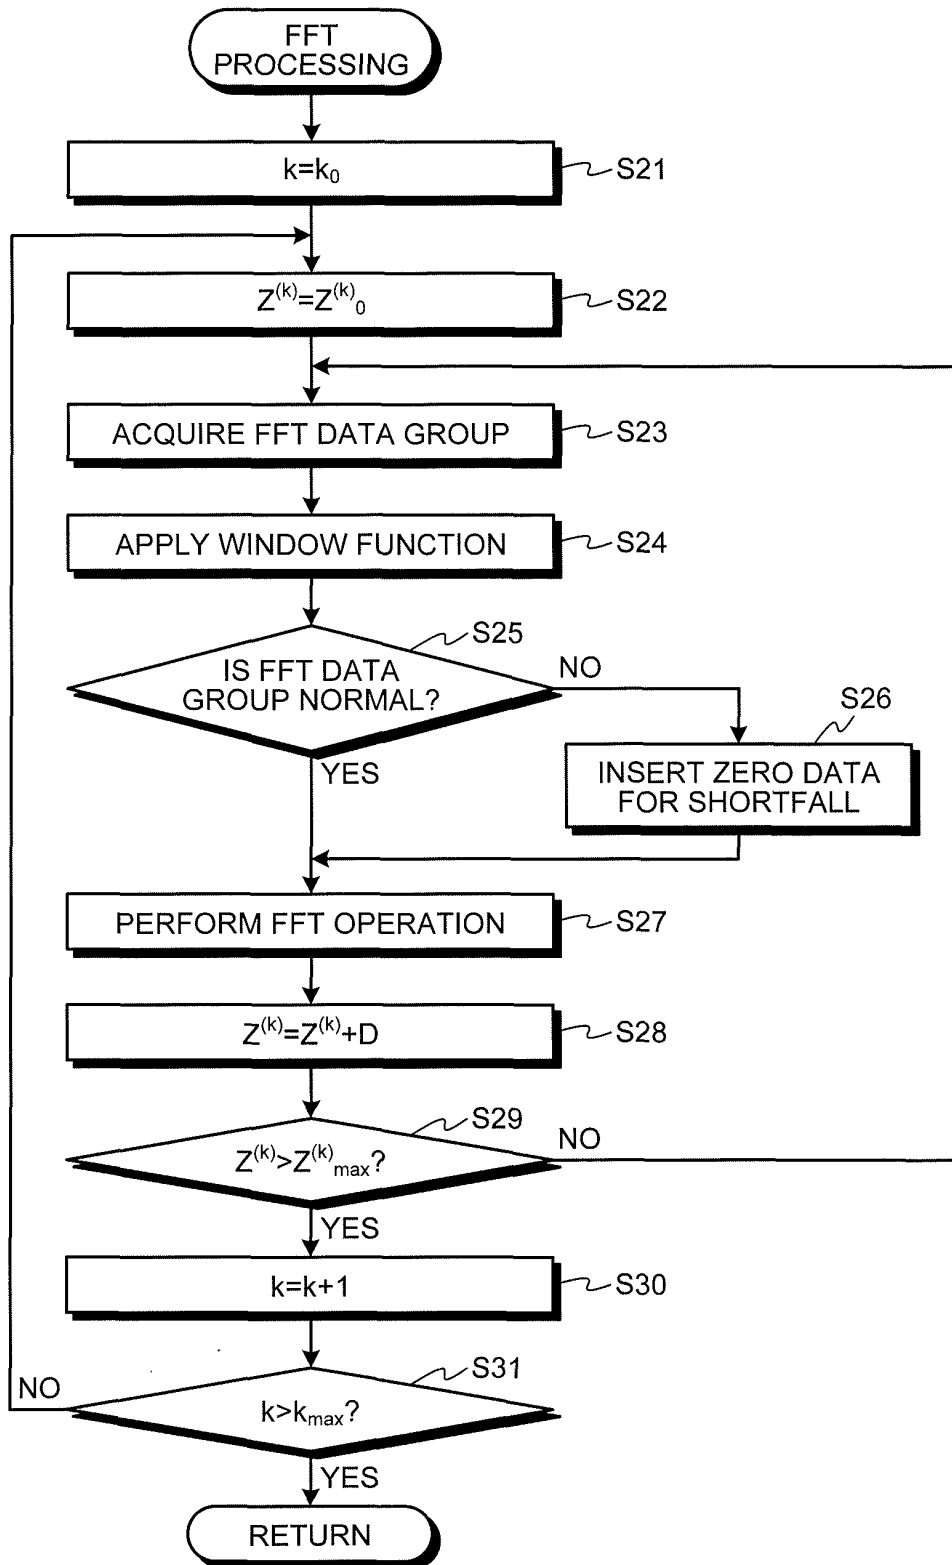


FIG.6

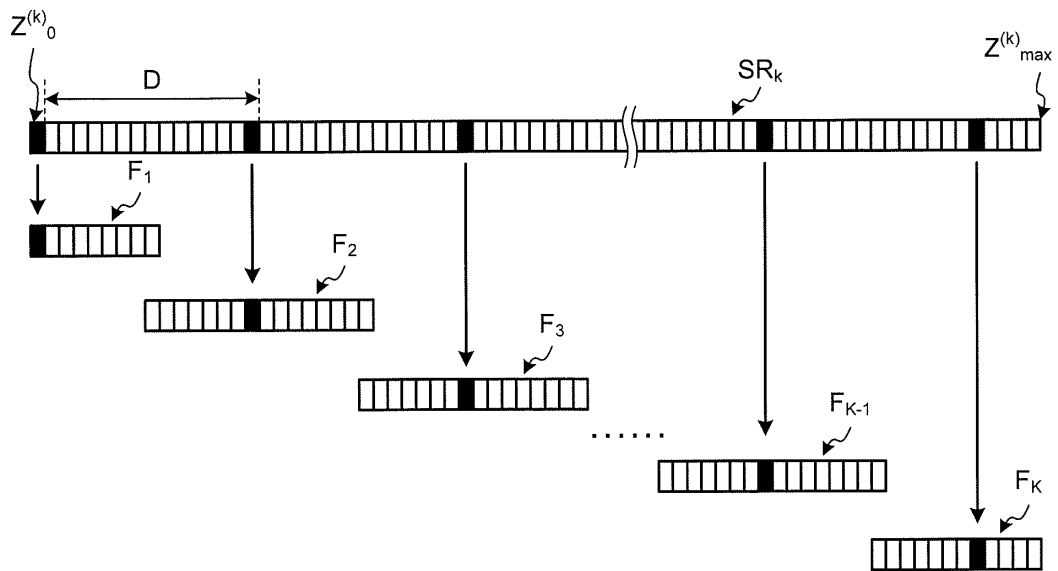


FIG.7

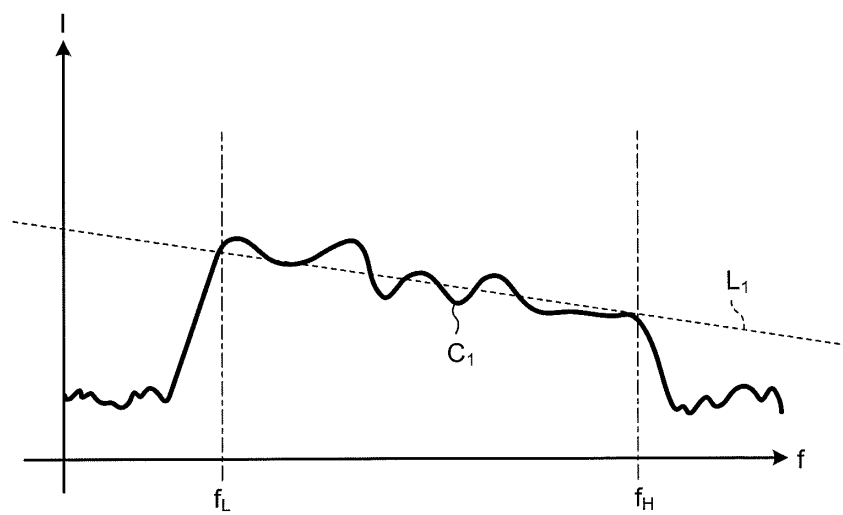


FIG.8

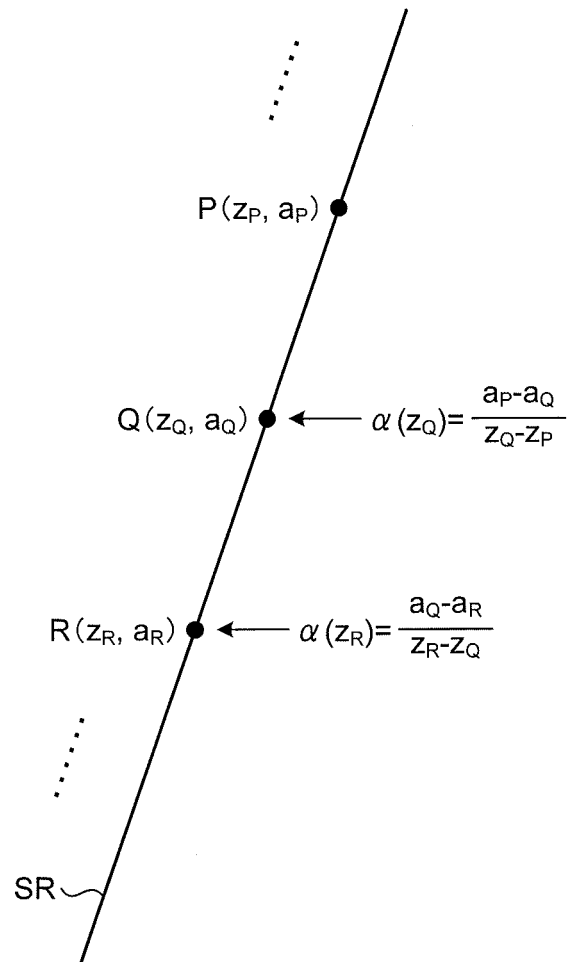
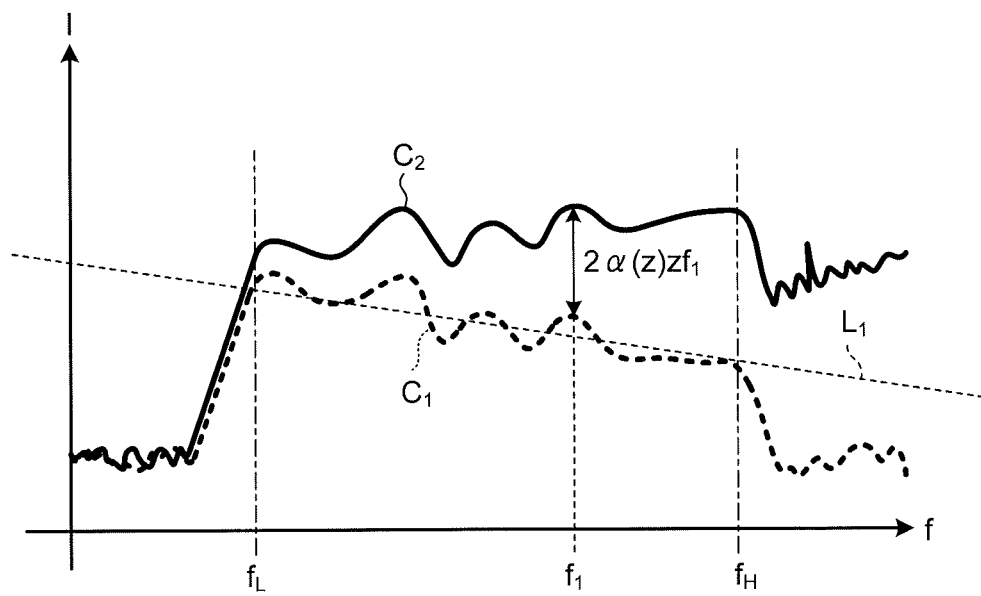


FIG.9




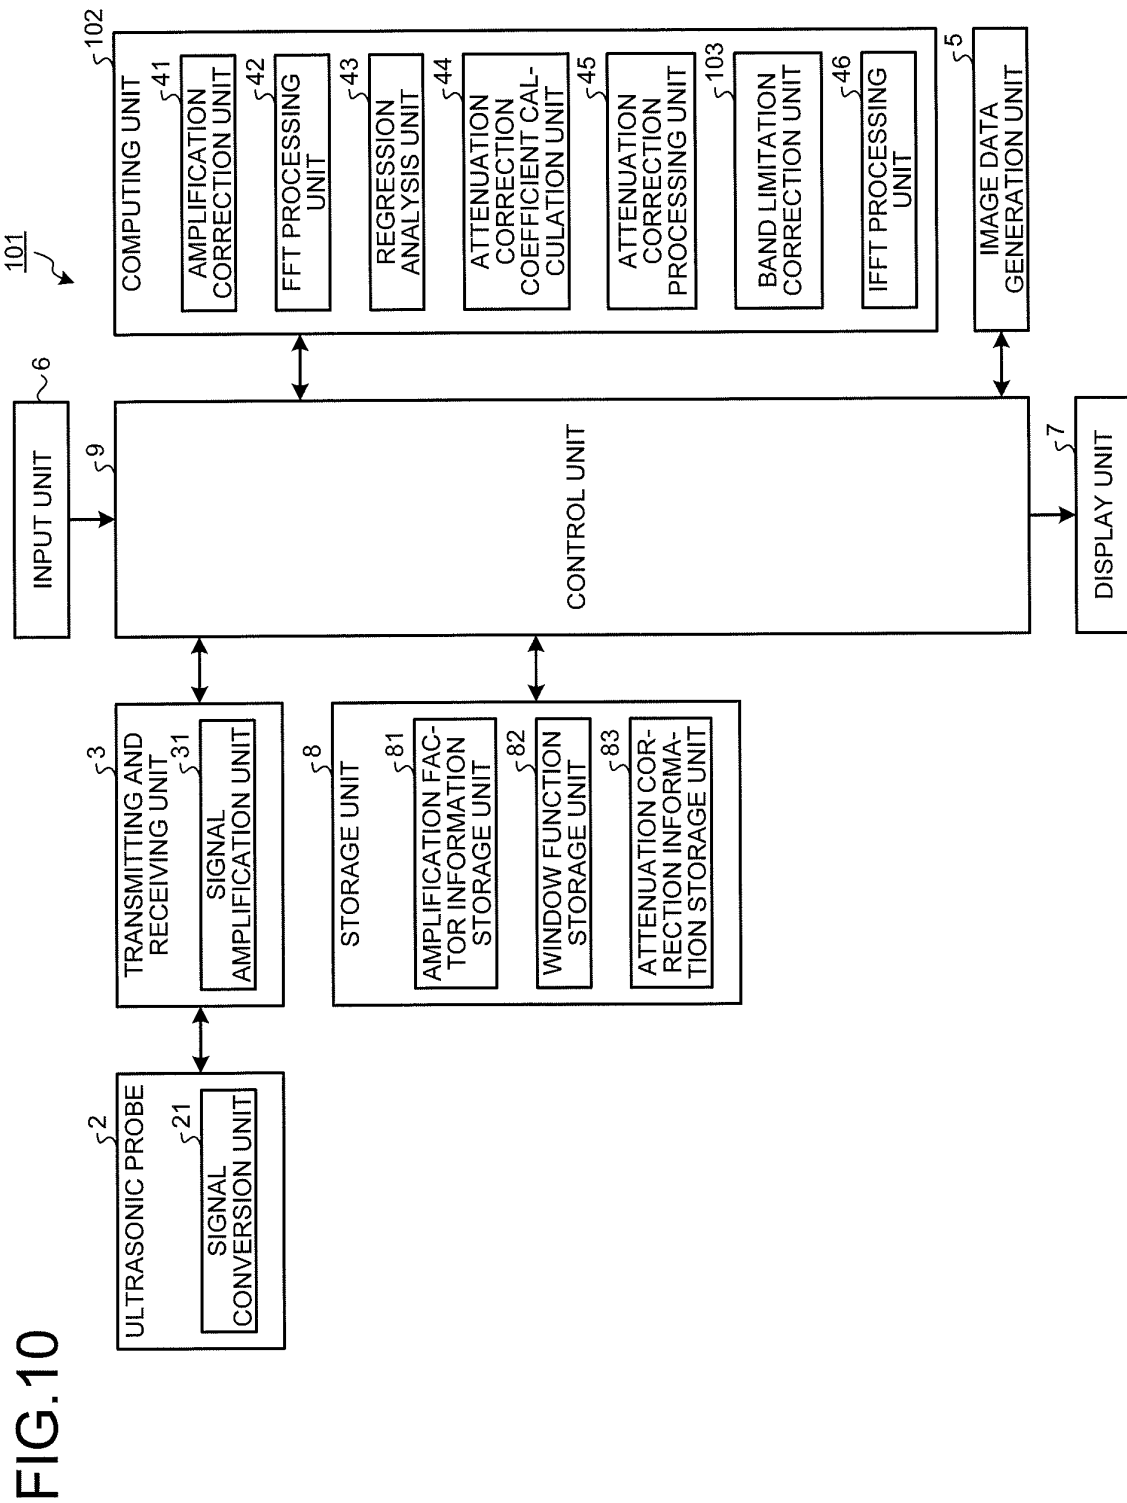


FIG.11

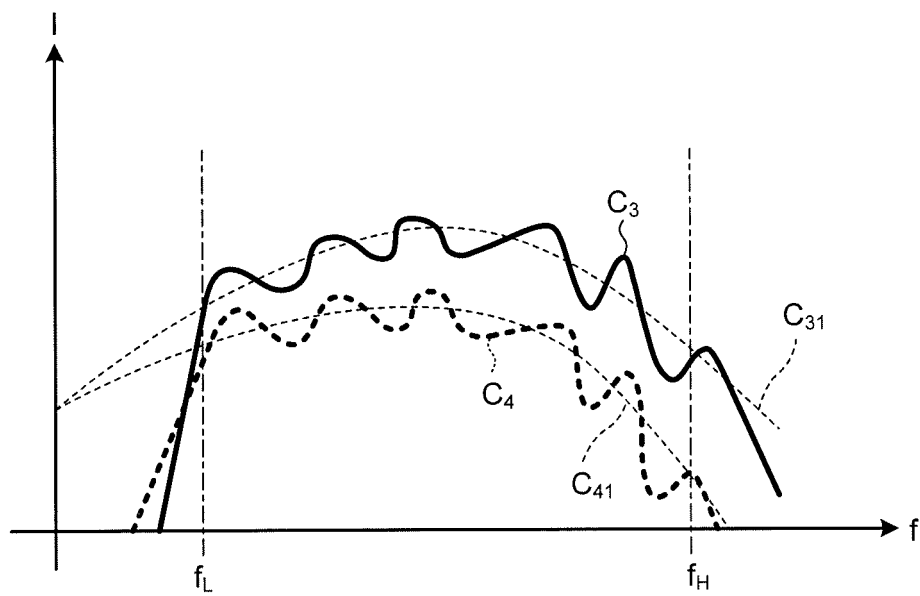

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2013/077249

A. CLASSIFICATION OF SUBJECT MATTER

A61B8/00(2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B8/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2013
 Kokai Jitsuyo Shinan Koho 1971-2013 Toroku Jitsuyo Shinan Koho 1994-2013

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2012/133878 A1 (Olympus Medical Systems Corp.), 04 October 2012 (04.10.2012), paragraphs [0040] to [0046], [0051] to [0053], [0081] to [0083], [0091], [0099], [0100], [0117], [0118]; fig. 4, 5, 7, 8, 19, 24 & JP 5114609 B2 & US 2013/0113938 A1 & EP 2591729 A1 & CN 102958447 A	1, 4-7
X	WO 2012/063929 A1 (Olympus Medical Systems Corp.), 18 May 2012 (18.05.2012), paragraphs [0035] to [0040], [0068], [0069], [0083], [0087], [0091], [0092]; fig. 8 to 10, 14, 16 & US 2013/0030296 A1 & EP 2599441 A1 & CN 103153195 A	1, 4-7

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
28 October, 2013 (28.10.13)Date of mailing of the international search report
05 November, 2013 (05.11.13)Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2013/077249

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2012/063976 A1 (Olympus Medical Systems Corp.), 18 May 2012 (18.05.2012), paragraphs [0038] to [0042], [0069], [0070], [0083], [0095] to [0097]; fig. 8 to 10, 14, 22 & JP 5054254 B2 & US 2012/0310087 A1 & EP 2548512 A1 & CN 102802536 A	1, 4-7
A	JP 10-33529 A (GE Yokogawa Medical Systems, Ltd.), 10 February 1998 (10.02.1998), entire text; all drawings (Family: none)	1-7

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2004135929 A [0006]
- JP 8131435 A [0006]
- JP 9173334 A [0006]
- JP 10033529 A [0006]

专利名称(译)	超声波观察装置，超声波观察装置的操作方法，超声波观察装置的操作程序		
公开(公告)号	EP2949273A4	公开(公告)日	2016-11-09
申请号	EP2013872771	申请日	2013-10-07
[标]申请(专利权)人(译)	奥林巴斯株式会社		
申请(专利权)人(译)	OLYMPUS CORPORATION		
当前申请(专利权)人(译)	OLYMPUS CORPORATION		
[标]发明人	MIYAKI HIRONAKA		
发明人	MIYAKI, HIRONAKA		
IPC分类号	A61B8/00 G01N29/46		
CPC分类号	G01S7/52017 A61B8/14 A61B8/5207 A61B8/5269 G01N29/46 G01N2291/02475 G01S7/52033 G01S7/52036 G01S15/02		
优先权	2013010539 2013-01-23 JP		
其他公开文献	EP2949273A1		
外部链接	Espacenet		

摘要(译)

一种超声波观测装置，包括：第一转换单元，被配置为将由发送和接收单元接收的作为时域信号的超声信号转换为频域信号；回归分析单元，用于计算第一转换单元转换的频域信号的回归表达式；衰减校正系数计算单元，被配置为基于具有不同接收深度的两个点或更多个点处的回归表达式中的一阶系数来计算衰减校正系数；衰减校正处理单元，被配置为基于由衰减校正系数计算单元计算的衰减校正系数对频域信号执行衰减校正处理；第二转换单元，被配置为将已经由衰减校正处理单元执行了衰减校正处理的频域信号转换为第二时域信号；图像数据生成单元，被配置为基于第二时域信号生成超声图像数据。