



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
12.03.2014 Bulletin 2014/11

(51) Int Cl.:
G09G 3/36 (2006.01)

(21) Application number: **12779578.9**

(86) International application number:
PCT/CN2012/074995

(22) Date of filing: **02.05.2012**

(87) International publication number:
WO 2012/149893 (08.11.2012 Gazette 2012/45)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

- **XU, Wei**
Shanghai 201108 (CN)
- **XU, Lihua**
Shanghai 201108 (CN)

(30) Priority: **04.05.2011 CN 201110113997**

(74) Representative: **Dantz, Jan Henning et al**
Loesenbeck - Specht - Dantz
Patent- und Rechtsanwälte
Am Zwinger 2
33602 Bielefeld (DE)

(72) Inventors:
• **XING, Liang**
Shanghai 201108 (CN)

(54) **BACKLIGHT CONTROL METHOD AND DEVICE, AND 3D DISPLAY SYSTEM**

(57) A backlight control method and apparatus and a 3D display system are disclosed, and the method includes: dividing correspondingly a backlight source and a liquid crystal panel into N horizontal row sections, respectively; preprocessing 3D data images to obtain respectively first images and second images of left and right eyes output in a complementary format, which preserve odd and even row section images of original left-eye and right-eye images, and scanning the first images and second images of the left and right eyes sequentially

from top to bottom according to the format and sequential order of the outputted images; and after an image preserving an odd or even row section is scanned, controlling the backlight of the row section to be turned on and then turned off until a next image preserving the odd or even row section starts to be scanned, and repeating this process until the scanning ends. With the invention, dynamic control is performed on the row sections of the backlight source in cooperation with image processing and display to achieve a crosstalk-free 3D effect and reduce power consumption of both the backlight source and the system.

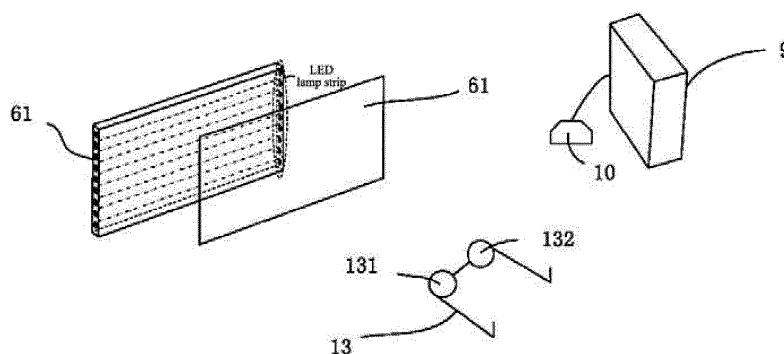


Fig.10

Description

[0001] This application claims priority from Chinese Patent Application No. 201110113997.8, filed with the Chinese Patent Office on May 4, 2011 and entitled "Backlight control method, apparatus and 3D display system", which is herein incorporated by reference in its entirety.

Field of the Invention

[0002] The present invention relates to the field of 3D display technologies and, more particularly, to a backlight control method, apparatus and a 3D display system based on such apparatus.

Background of the Invention

[0003] Along with the continuous development of modern sciences and technologies, 3D (three dimensional) display technologies also develop rapidly. The 3D display technologies make use of the principle of human binocular parallax, in which the left and right eyes of a person receive different images respectively, and then the brain superposes the images and regenerates image information to constitute an image with a stereoscopic direction effect of front-back, up-down, left-right, far-near, etc., so that a viewer may watch a film or a video with highly realistic effect. In order to achieve such a stereoscopic effect on a flat display, the left-eye and right-eye images have to be separated. At present, the 3D display technologies are used in cooperation with 3D glasses. Particularly, there are three solutions which use color separation, light separation and time division methods to be used in cooperation with the 3D glasses.

[0004] Recently, time division method is most widely used, and it generally relates to an active shutter-based 3D display approach in which left-eye and right-eye images are alternately displayed in a temporal sequence and also an infrared synchronization signal transmitter and shutter glasses cooperate therewith to present a stereoscopic image. The structure of a system using the active shutter-based 3D display approach is illustrated in Fig. 1, and generally includes a display device, a computer, an infrared transmitter and shutter glasses. In this approach, the display device displays 3D data at a frame frequency of 120Hz. Particularly 60 frames of left-eye images and 60 frames of right-eye images are alternately displayed in a temporal sequence, and since each frame includes data refresh time and data hold time (T in Fig. 2 represents the time of one frame of data), i.e., Vertical Blanking Interval (VBI) time in Fig. 2, the left eyeglass L of the shutter glasses is open (the open state represents a state at which light can be transmitted) when refreshing of data of the left eye (L1, L2, etc., in Fig. 2) is finished, that is, when the data hold time (VBI) arrives after each image frame of the left eye has been scanned; and similarly, the right eyeglass R of the shutter glasses is open when the data hold time (VBI) arrives after each frame

of image of the right eye (R1, R2, etc., in Fig. 2) has been scanned (as illustrated in Fig. 2, response time T_{on} of liquid crystals when the eyeglass is open and response time T_{off} of the liquid crystals when the eyeglass is closed are included); and the shutter glasses are synchronized with the display device in timing sequence through the infrared transmitter in cooperation with an infrared receiver integrated on the shutter glasses. This approach can separate the left-eye images to achieve the 3D effect.

[0005] However, since the eyeglasses of the shutter glasses typically include a liquid crystal display, and the response of liquid crystals requires time (on the order of ms), it has to take a certain period of time for the eyeglasses to be open or closed completely; and in the foregoing approach, the shutter glasses are open only in the VBI time and thus there is a greatly shortened time for response remaining for the liquid crystals, and there is a loss of brightness because the opening of the eyeglasses is delayed due to the response time required for the liquid crystals; and there is a delay in closing the eyeglasses due to the response time required for the liquid crystals, so that the left-eye and right-eye images may be visible at the same time to a viewer, thus resulting in a problem of considerable crosstalk between the left-eye and right-eye images, tending to cause a residual image and lowering the effect of a dynamic image.

[0006] Furthermore, the following drawbacks may result from the shutter glasses constituted of the liquid crystal display as required in the foregoing solution: firstly, the cumbersome glasses may make the observer uncomfortable after wearing the glasses for a long period of time and may be further inconvenient particularly to those with nearsighted glasses; secondly, the glasses are electronic devices with rechargeable lithium battery and therefore release electromagnetic radiation, and furthermore the battery is at a risk of explosion; thirdly, when the glasses are signal-synchronized through the infrared receiver with the infrared transmitter connected to the computer, an infrared signal may be interrupted if the propagation path of the signal is hindered, thus degrading the display effect; and fourthly, the glasses are costly, have a short service period of time and a low drop number, are easily damaged and have high usage cost. A 3D display system in the prior art for which the shutter glasses are required is further costly due to the foregoing drawbacks of the glasses.

Summary of the Invention

[0007] In view of this, the invention provides a backlight control method and apparatus and a 3D display system so as to overcome the problems in the prior art of crosstalk between left-eye and right-eye images, a residual image, reduced power consumption of the system and an decreased cost of the system, all of which may occur because shutter glasses can not be open and closed rapidly due to a time response required by liquid crystals to respond.

[0008] In order to attain the foregoing object, the invention provides the following technical solutions:

[0009] A backlight control method includes:

obtaining and preprocessing 3D data images to output, in a complementary format, a first left-eye image, a second left-eye image, a first right-eye image and a second right-eye image preserving odd and even row sections of original left-eye and right-eye images, wherein each image is one frame of image;

scanning sequentially the obtained first and second left-eye images and first and second right-eye images according to a backlight source and a liquid crystal panel of which horizontal row sections are pre-divided and according to the format and sequential order in which the images are output; and

after scanning a row section of an image frame, controlling an initialized backlight of the row section to be turned on and then turned off until a same row section of a next image frame starts to be scanned, and repeating the scanning until all images are scanned.

[0010] Preferably after scanning the row section of the image frame, the method specifically includes:

after scanning the row section of the image frame, controlling the initialized backlight of the row section to be turned on; or

after scanning the row section of the preserved image frame, controlling the initialized backlight of the row section to be turned on with a delay time t ,

the delay time t satisfying the expression $t \leq (N-1)/N \cdot T$, wherein T represents a time period of one frame, and N represents the number of horizontal row sections into which the backlight source and the liquid crystal panel are divided.

[0011] Preferably the backlight source and the liquid crystal panel each are correspondingly divided into N horizontal row sections, N being a number greater than or equal to 3.

[0012] Preferably each of the 3D data images includes a left-eye image and a right-eye image, and the process of obtaining and preprocessing the 3D data images to output, in the complementary format, the first left-eye image, the second left-eye image, the first right-eye image and the second right-eye image preserving odd and even row sections of original left-eye and right-eye images includes:

splitting the left-eye image to obtain the first left-eye image preserving the odd or even row section image and the second left-eye image complementary to the

odd or even row section image of the first left-eye image, wherein row sections in the first left-eye image and the second left-eye image, of which images are not preserved are black pictures; and

splitting, in the same way, the right-eye image to obtain the first right-eye image and the second right-eye image with complementary odd and even row section images, wherein the row sections preserved in the first right-eye image are complementary in format to the row sections preserved in the second left-eye image.

[0013] Preferably the process of scanning sequentially the obtained first and second left-eye images and first and second right-eye images according to the backlight source and the liquid crystal panel of which horizontal row sections are pre-divided and according to the format and sequential order in which the images are output includes:

determining that the images are obtained in an order of firstly the left-eye images and then the right-eye images or firstly the right-eye images and then the left-eye images,

wherein the left-eye images include the first left-eye image preserving the odd row section image and the second left-eye image preserving complementarily the even row section image; and the right-eye images include the first right-eye image and the second right-eye image preserving the odd and even row section images consistently with the split left-eye images, wherein each image is one frame of image; and

scanning each frame of image sequentially from the top to the bottom until all images are scanned.

[0014] Preferably the process of scanning sequentially the obtained first and second left-eye images and first and second right-eye images according to the backlight source and the liquid crystal panel of which horizontal row sections are pre-divided and according to the format and sequential order in which the images are output includes:

determining that the images are obtained in an order of firstly the left-eye images and then the right-eye images or firstly the right-eye images and then the left-eye images,

wherein the left-eye images include the first left-eye image preserving the even row section image and the second left-eye image preserving complementarily the odd row section image; and the right-eye images include the first right-eye image and the second right-eye image preserving the odd and even row section images consistently with the split left-

eye images, wherein each image is one frame of image; and

scanning each frame of image sequentially from the top to the bottom until all images are scanned.

[0015] Preferably the method further includes: controlling in cooperation with a pair of shutter glasses a left eyeglass of the pair of shutter glasses to be open and a right eyeglass to be closed when the scanning image is the left-eye image; and controlling the right eyeglass of the pair of shutter glasses to be open and the left eyeglass to be closed when the scanning image is the right-eye image.

[0016] Preferably the method further includes:

scanning the images in cooperation with an active polarization light valve; and

controlling the active polarization light valve to be open when the scanning image is the left-eye image; and

controlling the active polarization light valve to be closed when the scanning image is the right-eye image; or

controlling the active polarization light valve to be open when the scanning image is the right-eye image; and

controlling the active polarization light valve to be closed when the scanning image is the left-eye image.

[0017] Preferably when a one frame of image is the second left-eye image preserving the odd row sections, a next frame of image is the first right-eye image; and after a first odd row section of the second left-eye image is scanned, controlling the initialized backlight of the row section to be turned on and then turned off until a first odd row section of the first right-eye image starts to be scanned, and repeating until all the images are scanned.

[0018] A backlight control apparatus includes:

an obtaining unit configured to obtain and preprocess 3D data images to output, in a complementary format, a first left-eye image, a second left-eye image, a first right-eye image and a second right-eye image preserving odd and even row sections of original left-eye and right-eye images, wherein each image is one frame of image;

a scanning control unit configured to scan sequentially the obtained first and second left-eye images and first and second right-eye images according to a backlight source and a liquid crystal panel of which horizontal row sections are pre-divided and accord-

ing to the format and sequential order in which the images are output; and

a backlight control unit configured, after a row section of an image frame is scanned, to control an initialized backlight of the row section to be turned on and then turned off until a same row section of a next image frame starts to be scanned, and to repeat the scanning until all images are scanned.

[0019] Preferably the backlight control apparatus includes:

a preprocessing unit configured to preprocess the obtained 3D data images to generate and output, in the complementary format, the first left-eye image, the second left-eye image, the first right-eye image and the second right-eye image preserving the odd and even row sections of the original left-eye and right-eye images, wherein each image is one frame of image; and

a pre-dividing unit configured to correspondingly divide the backlight source and the liquid crystal panel in a display device into N horizontal row sections, respectively, wherein N represents a number greater than or equal to 3.

[0020] Preferably the scanning control unit includes:

a determining module configured to determine the format and sequential order in which the obtained first and second left-eye and right-eye images are output; and

a scanning control module configured to scan each frame of image sequentially in a top to bottom manner in the order determined by the determining module according to the backlight source and the liquid crystal panel of which the horizontal row sections are pre-divided.

[0021] Preferably the backlight control apparatus further includes:

a first backlight control unit, in cooperation with a pair of shutter glasses, configured to control a left eyeglass of the pair of shutter glasses to be open and a right eyeglass to be closed when the scanning image is the left-eye image; and to control the right eyeglass of the pair of shutter glasses to be open and the left eyeglass to be closed when the scanning image is the right-eye image.

[0022] Preferably the backlight control apparatus further includes:

a second backlight control unit, in cooperation with

an active polarization light valve, configured to control the active polarization light valve to be open or closed alternately when the left-eye image and the right-eye image are scanned, respectively.

[0023] A 3D display system includes a display device and 3D glasses, wherein the system further comprises the backlight control apparatus according to claim 9 and the backlight control apparatus processes and displays 3D images in the backlight control method according to claim 1.

[0024] As can be apparent from the foregoing technical solutions, the invention discloses over the prior art a backlight control method and apparatus and a 3D display system, where a backlight source and a liquid crystal panel are configured with row sections, and in a process of scanning the liquid crystal panel, dynamic control is performed on the row sections of the backlight source in cooperation with image processing and display to thereby achieve a crosstalk-free 3D effect while lowering the power consumption of the system, and dynamic control is performed on the row sections of the backlight source to thereby lower a response speed of liquid crystals as required for shutter glasses, and shutter glasses with liquid crystals in a TN pattern can be adopted to thereby lower usage cost of both the shutter glasses and the system.

[0025] Furthermore the backlight control method and apparatus according to the embodiments of the invention can also be applicable in compatibility with both shutter glasses and an active polarization 3D system to thereby gain a wider applicability scope of the method.

Brief Description of the Drawings

[0026] In order to make the technical solutions in the embodiments of the invention or in the prior art more apparent, the drawings required to be used in describing the embodiments or the prior art will be introduced briefly, and obviously the drawings described herein are merely illustrative of certain embodiments of the invention, and those ordinarily skilled in the art can further derive other drawings from the provided drawings without inventive effort.

Fig.1 is a schematic structural diagram of an active shutter-based 3D display system in the prior art;

Fig.2 is a schematic diagram of an operation principle of the active shutter-based 3D display system in the prior art;

Fig.3 is a schematic structural diagram of a backlight control apparatus according to an embodiment of the invention;

Fig.4 is a schematic structural diagram of a display device according to an embodiment of the invention;

Fig.5 is a schematic structural diagram of row sections of a backlight source and a liquid crystal panel according to an embodiment of the invention;

Fig.6 is a schematic structural diagram of a backlight source with a light source type being an LED according to an embodiment of the invention;

Fig.7 is a schematic structural diagram of a backlight source with a light source type being an array of CCFL tubes according to an embodiment of the invention;

Fig.8 is a flow chart of a backlight control method according to an embodiment of the invention;

Fig.9 is a schematic diagram of a scheme to preprocess 3D data images according to an embodiment of the invention;

Fig.10 is a schematic structural diagram of a 3D display system according to an embodiment of the invention;

Fig.11 is a schematic diagram of a sequence to process and display 3D images in the system illustrated in Fig. 10 according to an embodiment of the invention;

Fig.12 is a timing diagram of backlight control in the system illustrated in Fig.10 according to an embodiment of the invention;

Fig. 3 is a contrast timing diagram of backlight control of shutter glasses in the system illustrated in Fig. 10 according to an embodiment of the invention and that in the prior art;

Fig. 14 is a schematic structural diagram of a 3D display system according to an embodiment of the invention;

Fig.15 is an optics principle diagram of an active polarization 3D system according to an embodiment of the invention; and

Fig.16 is a timing diagram of backlight control in the system illustrated in Fig. 13 according to an embodiment of the invention.

Detailed Description of the Embodiments

[0027] For the sake of reference and clarity, definitions or abbreviations of technical terms used hereinafter are provided below:

3D: Three-Dimensional;

TFT: Thin Film Transistor;

TN pattern: Twisted Nematic pattern;

VBI: Vertical Blanking Interval; and

LED: Light Emitting Diode.

[0028] The technical solutions in the embodiments of the present invention are described below clearly and fully with reference to the drawings in the embodiments of the invention, and obviously the embodiments described herein are merely a part of the embodiments of the invention, but not all the embodiments of the invention. Based on the presented embodiments of the invention, all other embodiments obtained by those ordinarily skilled in the art without inventive effort are included in the scope of the invention.

[0029] The embodiments of the present invention disclose a backlight control method and apparatus and a 3D display system incorporating the backlight control method and apparatus. A backlight source and a liquid crystal panel each are divided into a plurality of row sections, and dynamic control is performed on the row sections of the backlight source in cooperation with image processing and display to thereby achieve a crosstalk-free 3D effect while lowering the power consumption of the system, and the row sections of the backlight source are dynamically controlled to thereby lower a response speed of liquid crystals as required by shutter glasses, and shutter glasses with liquid crystals in a TN pattern can be used to enable a lower usage cost of both the shutter glasses and the system. Furthermore, the backlight control method and apparatus according to the embodiments of the invention can also be applicable in compatibility with both shutter glasses and an active polarization 3D system to thereby gain a wider applicability scope thereof. The invention will be described below in details in connection with the embodiments thereof.

First Embodiment

[0030] Referring to Fig.3, which is a schematic structural diagram of a backlight control apparatus according to an embodiment of the invention, the apparatus mainly includes a preprocessing unit 1, a pre-dividing unit 2, an obtaining unit 3, a scanning control unit 4 and a backlight control unit 5.

[0031] The preprocessing unit 1 is generally configured to preprocess obtained 3D data images to generate and output, in a complementary format, a first left-eye image, a second left-eye image, a first right-eye image and a second right-eye image preserving odd and even row sections of original left-eye and right-eye images, where each image is one frame of image.

[0032] The pre-dividing unit 2 is generally configured to divide correspondingly a backlight source 61 and a crystal liquid panel 62 in a display device 6 respectively

into N horizontal row sections.

[0033] The display device 6 as illustrated in Fig.4 includes the backlight source 61 and the crystal liquid panel 62. As illustrated in Fig.5, the backlight source 61 and the crystal liquid panel 62 each are divided correspondingly into N horizontal row sections, where N represents a number greater than or equal to 3, that is, $N \geq 3$. Particularly the width of each row section of the crystal liquid panel 62 (in the Y direction) can be consistent with that of a pixel in the X row, and the number of pixels located in the X row is greater than or equal to 1.

[0034] It shall be noted that the crystal liquid panel 62 may not be really divided in physical sense into N row sections, that is, the crystal liquid panel 62 is not physically modified. In a backlight control process according to an embodiment of the invention, TFTs of the liquid crystal panel are controlled in an original row scanning pattern to be turned on and off to refresh display data. Thus, the crystal liquid panel 62 can be controlled per a row section without any modification to its physical architecture.

[0035] The backlight source 61 can be divided into N row sections in combination with the structural design of the backlight source to thereby control the backlight of each of the N row sections to be turned on and off separately.

[0036] In an embodiment of the invention, the structure of the backlight source 61 can be any structure which enables the backlight source to be controlled by a row section, and such structures may include, but will not be limited to, a straight-down backlight source and a side-light backlight source, and the type of light source on the backlight source 61 in an embodiment of the invention may include but will not be limited to a Light Emitting Diode (LED), a Cold Cathode Fluorescent Lamp (CCFL), a Hot Cathode Fluorescent Lamp (HCFL), an External Electrode Fluorescent Lamp (EEFL) and an Organic Light Emitting Diode (OLED), etc.

[0037] Fig.6 and Fig.7 illustrate two feasible structures of the backlight source, where in the structure illustrated in Fig.6, two LED lamp strips or one LED lamp strip (there is a higher requirement on light guidance plates in the case of one LED lamp strip) with incident light being Y side-directed are used, and the backlight is controlled dynamically per row section in cooperation with an arranged network of light guidance plates, that is, the backlight corresponding to each row section is controlled separately to be turned on and off; and in the structure illustrated in Fig.7, straight-down CCFL tubes are used to control the backlight per row section to control separately the backlight of each row section to be turned on and off.

[0038] The obtaining unit 3 is generally configured to obtain 3D data images processed by the preprocessing unit 1, that is, to obtain the first left-eye image, the second left-eye image, the first right-eye image and the second right-eye image, of the odd and even row sections of the original left-eye and right-eye images, output in the complementary format, where each image is one frame of

image.

[0039] Since each of the 3D data images includes left-eye images and right-eye images, the preprocessing operation performed in the preprocessing unit 1 is to split the left-eye and right-eye images into corresponding two images. Specifically, the left-eye image is split into two images, where the first image is the first left-eye image preserving the odd (or even) row section image of the original left-eye image, and the other row sections of this image are black pictures; and the second image is the second left-eye image preserving the even (or odd) row section image of the original left-eye image, and the other row sections of this image are black pictures, and the combination of the first left-eye image with the second left-eye image can recover the original left-eye image.

[0040] Similarly, the right-eye image is split into the first right-eye image and the second right-eye image correspondingly preserving the odd (or even) row section image of the original right-eye image. However, it shall be noted that when the left-eye and right-eye images are processed in the same way, the displayed row sections of the first image resulting from splitting the right-eye (left-eye) image shall be complementary in format to those of the second image resulting from splitting the left-eye (right-eye) image, that is, if the second left-eye image preserves the even row sections of the original left-eye image, then the first right-eye image shall preserve the odd row sections of the original right-eye image.

[0041] The scanning control unit 4 is generally configured to scan sequentially the obtained first and second left-eye and right-eye images according to the backlight source and the liquid crystal panel of which horizontal row sections are pre-divided and to the format and sequential order in which the images are output, and particularly includes a determining module 41 and a scanning control module 42.

[0042] The determining module 41 is configured to determine the format and sequential order in which the first and second left-eye and right-eye images obtained in the obtaining unit 3 are output.

[0043] The scanning control module 42 is configured to scan each frame of image sequentially from the top to the bottom in the order determined by the determining module 41 according to the backlight source and the liquid crystal panel of which the horizontal row sections are pre-divided.

[0044] In the process of using the backlight control apparatus, the scanning control unit 4 therein is arranged on the liquid crystal panel 62 of the display device 6 and enabled in the process of scanning the images per row in the liquid crystal panel 62.

[0045] The backlight control unit 5 is configured, in the scanning process by the scanning control unit 4 and after a row section of one frame of image is scanned, i.e., after a odd or even row section image is preserved, to control the backlight of the row section to be turned on and then turned off until the same row section of a next frame of image starts to be scanned, i.e., turned off until a next

image preserving the odd row sections or the even row sections starts to be scanned, and to repeat this process until the scanning process ends. It shall be noted that the same row section of the next frame of image may not necessarily be a row section with a display picture.

[0046] Since an operation mode of the backlight control apparatus according to the embodiment of the invention relates to the output format of the 3D data images (the obtained splitting format after processing) and the sequential order of obtaining the left-eye and right-eye images, either the left-eye images or the right-eye images can be scanned firstly.

[0047] An example will be disclosed as follows:

[0048] The 3D data images are displayed by scanning firstly the left-eye image and then the right-eye image sequentially.

[0049] The left-eye image is split into two images which are respectively the first left-eye image obtained by preserving the odd row section image of the original left-eye image and the second left-eye image obtained by preserving the even row section image of the original left-eye image. The right-eye image is split into two images, where the first image is obtained by preserving the odd row sections of the original right-eye image and the second image is obtained by preserving the even row sections of the original right-eye image.

[0050] When the scanning control unit 4 starts scanning control, an initial state of the backlight source 61 is all turned off, and the scanning control unit 4 arranged on the liquid crystal panel 62 controls the scanning start with the first row of the first left-eye image, because the liquid crystal panel 62 operates in a row scanning mode and the liquid crystal panel 62 and the backlight source 61 are divided consistently into N row sections.

[0051] When performing the scanning, firstly the first left-eye image is scanned, then the second left-eye image, the first right-eye image and the second right-eye image are scanned sequentially, then the first left-eye image is scanned again, and this sequential scanning process is then repeated.

[0052] In the scanning process from the top to the bottom in the liquid crystal panel 62, the backlight source 61 is concurrently controlled dynamically so that for images preserving the odd row sections of the original left-eye and right-eye images (e.g., L1 and R1 illustrated in Fig. 9), the backlight of a first odd row section of a first frame of image is turned on after the row section is scanned, until the same row section of the second frame of image subsequent thereto, i.e., a first odd row section starts to be scanned, and then the backlight corresponding to the first odd row section of the first frame of image is turned off; and for images preserving the even row sections of the original left-eye and right-eye images (e.g., L2 and R2 illustrated in Fig. 9), the backlight of a first even row section of a first frame of image is turned on after the row section is scanned, until the same row section of a second frame of image subsequent thereto, i.e., a first even row section of the second frame of image, starts to be

scanned, and then the backlight corresponding to the first even row section of the first frame of image is turned off.

[0053] In summary, after a row section of a frame of image is scanned, the initialized backlight of the row section is controlled to be turned on and then turned off until the same row section of a next frame of image starts to be scanned, and this process is repeated sequentially until all the images are scanned. It shall be noted that the same row section of the next frame of image may not necessarily be a row section with a display picture.

[0054] In backlight control by the foregoing apparatus according to the embodiment of the invention, the backlight source is controlled dynamically per row section to lower the power consumption of the backlight source and the system and also display the 3D images without any crosstalk.

[0055] Furthermore, the foregoing apparatus according to the embodiment of the invention further includes a first backlight control unit which can be used in cooperation with a pair of shutter glasses and which is generally configured to control a left eyeglass of the shutter glasses to be open and a right eyeglass to be closed when the scanning image is the left-eye image; and to control the right eyeglass of the shutter glasses to be open and the left eyeglass to be closed when the scanning image is the right-eye image.

[0056] For cooperation with a 3D display system with an active polarization light valve, the apparatus according to the embodiment of the invention further includes a second backlight control unit generally configured to control the active polarization light valve in the 3D display system to be open when the scanning image is the left-eye image and to control the active polarization light valve to be closed when the scanning image is the right-eye image; or to control the active polarization light valve in the 3D display system to be open when the scanning image is the right-eye image and to control the active polarization light valve in the 3D display system to be closed when the scanning image is the left-eye image.

[0057] With various settings in the foregoing backlight control apparatus according to the embodiment of the invention, the backlight source can be controlled dynamically per row section, the 3D images can be displayed without any crosstalk and the power consumption of the backlight source can be lowered, and also the backlight control apparatus can be compatible with both the shutter glasses and the active polarization 3D system to thereby gain a wider applicability scope thereof.

Second Embodiment

[0058] The backlight control apparatus has been described in details in the above embodiment of the invention, and based upon this apparatus, the invention further discloses a backlight control method of a backlight control apparatus, and referring to Fig.8 illustrating a flow chart of a backlight control method according to an embodi-

ment of the invention, the method mainly includes the following steps:

[0059] At step S101, a backlight source and a crystal liquid panel are divided correspondingly into N horizontal row sections respectively.

[0060] At step S102, each of the 3D data images to be displayed is preprocessed to respectively obtain a first left-eye image, a second left-eye image, a first right-eye image and a second right-eye image preserving odd and even row section images of original left-eye and right-eye images, output in a complementary format, where each image is one frame of image.

[0061] In preprocessing of the 3D data images in the step S102, since a 3D data image includes a left-eye image and a right-eye image, in fact, the left-eye image and the right-eye image are processed respectively to split the left-eye and right-eye images respectively into two images, that is, to obtain the first left-eye image and the second left-eye image, output in the complementary format, preserving the original left-eye image as well as the first right-eye image and the second right-eye image in the similar splitting way, and the obtained left-eye second image and first right-eye image are complementary in format. It shall be noted that each image resulting from splitting is one frame of image.

[0062] At step S103, the first left-eye and right-eye images and the second left-eye and right-eye images corresponding to the left-eye and right-eye images are sequentially scanned starting from the top to the bottom of the liquid crystal panel according to the backlight source and the liquid crystal panel of which the horizontal row sections are pre-divided and according to the obtained format and sequential order in which the first images and the second images of the left and the right eyes are output.

[0063] At step S104, after a row section of a frame of image is scanned, an initialized backlight of the row section is controlled to be turned on and then turned off until the same row section of a next frame of image starts to be scanned, and this process is repeated sequentially until all the images are scanned, where the same row section of the next frame of image may not necessarily be a row section with a display picture.

[0064] It shall be noted that an initial state of the backlight source is all-off when the step S104 is performed for scanning.

[0065] Furthermore, the control of the backlight source, i.e., a period of time for which the backlight is turned on, in the scanning process generally involves the following two scenarios:

[0066] In a first scenario, after a row section of the frame of preserved image is scanned, the initialized backlight of the row section is controlled to be turned on immediately, that is, the backlight source corresponding to the row section is turned on directly.

[0067] In a second scenario, after a row section of the frame of preserved image is scanned, the initialized backlight of the row section is controlled, after a delay time t,

to be turned on, that is, the backlight source corresponding to the row section is turned on after the predetermined delay time t .

[0068] The above predetermined delay time, i.e., the delay time t , is defined by the following expression:

$$t \leq (N-1)/N * T;$$

[0069] Where T represents a period of one frame, and N represents the number of horizontal row sections into which the backlight source and the liquid crystal panel are divided.

[0070] The step S105 is to repeat the step S104 until all the images, i.e., the first left-eye and right-eye images and the second left-eye and right-eye images corresponding to the left-eye and right-eye images, are scanned.

[0071] With the backlight control method according to the embodiment of the invention, dynamic control per row section is used in cooperation with image processing and display processes to reduce residual images and achieve a crosstalk-free 3D effect while lowering the power consumption of both the backlight source and the system.

[0072] It shall be noted that the 3D data images including the left-eye and right-eye images are preprocessed to obtain respectively the first images and the second images preserving complementarily the original left-eye and right-eye images in an output format of the odd and even row section images, and the scanning process is performed in the determined sequential order, and since the first images and the second images of the left-eye and right-eye images are output in different formats and obtained in different sequential orders, they will be described respectively below.

[0073] In preprocessing of the 3D data images, the left-eye image is split into two images as follows:

[0074] The first left-eye image preserves the odd row section image of the original left-eye image, and the other row sections thereof are black pictures, and the second left-eye image preserves the even row section image of the original left-eye image, and the other row sections thereof are black pictures; and the right-eye image is split in the same way as splitting the left-eye image, and the displayed row sections of the first right-eye image resulting from splitting are complementary in format to those of the second left-eye image. The foregoing first images and second images of the left and right eyes constitute together the original left-eye and right-eye images, and firstly the first images and then the second images are displayed in the scanning and display processes. Reference can be made to Fig.9 for a specific format where L represents an image frame of a left-eye image, $L1$ represents the first left-eye image, $L2$ represents the second left-eye image, R represents an image frame of a right-eye image, $R1$ represents the first right-eye image, $R2$

represents the second right-eye image, and Section represents the row number.

[0075] When the images are obtained in an order of firstly the left-eye image and then the right-eye image:

[0076] The first left-eye image, the second left-eye image, the first right-eye image and the second right-eye image are scanned sequentially.

[0077] In an initial state, all the backlight sources are in turn-off state, and the liquid crystal panel is ready to scan starting with the first left-eye image preserving the odd row section image, and after a first odd row section of the first left-eye image is scanned, the backlight corresponding to the odd row section is controlled to be turned on and then turned off until a first odd row section of the second left-eye image subsequent thereto starts to be scanned, and this process is repeated to perform the scanning.

[0078] When the second left-eye image preserving the even row section image is scanned, in the same way, after a first even row section of the second left-eye image is scanned, the backlight corresponding to the even row section is controlled to be turned on and then turned off until a first even row section of the first right-eye image subsequent thereto starts to be scanned, and this process is repeated until the first right-eye image starts to be scanned.

[0079] The backlights corresponding to the odd and even row sections of the first right-eye image and the second right-eye image are controlled repeatedly in the same backlight control way until the left-eye and right-eye images are already scanned.

[0080] When the images are obtained in an order of firstly the right-eye image and then the left-eye image:

[0081] The first right-eye image, the second right-eye image, the first left-eye image and the second left-eye image are scanned sequentially.

[0082] In an initial state, all the backlight sources are in turn-off state, and the liquid crystal panel is ready to scan starting with the first right-eye image preserving the odd row section image, and after a first odd row section of the first right-eye image is already scanned, the backlight corresponding to the odd row section is controlled to be turned on and then turned off until a first odd row section of the second right-eye image subsequent thereto starts to be scanned, and this process is repeated to perform the scanning.

[0083] When the second right-eye image preserving the even row section image is scanned, in the same way, after a first even row section of the second right-eye image is already scanned, the backlight corresponding to the even row section is controlled to be turned on and then turned off until a first even row section of the first left-eye image subsequent thereto starts to be scanned, and this process is repeated until the first left-eye image starts to be scanned.

[0084] The backlights corresponding to the odd and even row sections of the first left-eye image and the second left-eye image are controlled repeatedly in the same

backlight control way until the left-eye and right-eye images are already scanned.

[0085] In preprocessing of the 3D data images, the left-eye image is split into two images as follows:

[0086] The first left-eye image preserves the even row section image of the original left-eye image, and the other row sections thereof are black pictures, and the second left-eye image preserves the odd row section image of the original left-eye image, and the other row sections thereof are black pictures; and the right-eye image is split in the same way as splitting the left-eye image, and the displayed row sections of the first right-eye image resulting from splitting are complementary in format to those of the second left-eye image. The foregoing first images and second images of the left and right eyes constitute together the original left-eye and right-eye images, and firstly the first images and then the second images are displayed in the scanning and display processes.

[0087] When the images are obtained in an order of firstly the left-eye image and then the right-eye image:

[0088] The first left-eye image, the second left-eye image, the first right-eye image and the second right-eye image are scanned sequentially.

[0089] In an initial state, all the backlight sources are in an turn-off state, and the liquid crystal panel is ready to scan starting with the first left-eye image preserving the even row section image, and after a first even row section of the first left-eye image is already scanned, the backlight corresponding to the even row section is controlled to be turned on and then turned off until a first even row section of the second left-eye image subsequent thereto starts to be scanned, and this process is repeated to perform the scanning.

[0090] When the second left-eye image preserving the odd row section image is scanned, in the same way, after a first odd row section of the second left-eye image is already scanned, the backlight corresponding to the odd row section is controlled to be turned on and then turned off until a first odd row section of the first right-eye image subsequent thereto starts to be scanned, and this process is repeated to perform the scanning.

[0091] The backlights corresponding to the odd and even row sections of the first right-eye image and the second right-eye image are controlled repeatedly in the same backlight control way until the left-eye and right-eye images are already scanned.

[0092] When the images are obtained in an order of firstly the right-eye image and then the left-eye image:

[0093] The first right-eye image, the second right-eye image, the first left-eye image and the second left-eye image are scanned sequentially.

[0094] In an initial state, all the backlight sources are in turn-off state, and the liquid crystal panel is ready to scan starting with the first right-eye image preserving the even row section image, and after a first even row section of the first right-eye image is already scanned, the backlight corresponding to the even row section is controlled to be turned on and then turned off until a first even row

section of the second right-eye image subsequent thereto starts to be scanned, and this process is repeated to perform the scanning.

[0095] When the second right-eye image preserving the odd row section image is scanned, in the same way, after a first odd row section of the second right-eye image is already scanned, the backlight corresponding to the odd row section is controlled to be turned on and then turned off until a first odd row section of the first left-eye image subsequent thereto starts to be scanned, and this process is repeated to perform the scanning.

[0096] The backlights corresponding to the odd and even row sections of the first left-eye image and the second left-eye image are controlled repeatedly in the same backlight control way until the left-eye and right-eye images are already scanned.

[0097] It shall be noted that when the scanning proceeds from one image to another image, if the last row section of the preceding image preserves the odd or even row section image, then the backlight corresponding to the last row section of the preceding image is controlled to be turned off before the first row section of the succeeding image preserving the odd or even row section image starts to be scanned.

[0098] In the foregoing embodiment of the invention, the 3D data images are preprocessed, and the backlights corresponding to the left-eye and right-eye images resulting from different splitting approaches are controlled in the scanning process, that is, the invention performs dynamic control on the row sections of the backlight source in cooperation with image processing and display to thereby reduce residual images and achieve a crosstalk-free 3D effect while lowering the power consumption of both the backlight source and the system.

[0099] Furthermore, in the process of achieving a crosstalk-free 3D effect in the backlight control approach in the foregoing embodiment of the invention, for cooperation with shutter glasses, the left eyeglass of the shutter glasses is controlled to be open and the right eyeglass is controlled to be closed when the scanning image is the left-eye image; and the right eyeglass of the shutter glasses is controlled to be open and the left eyeglass is controlled to be closed when the scanning image is the right-eye image.

[0100] Furthermore, in the process of achieving a crosstalk-free 3D effect in the backlight control approach in the foregoing embodiment of the invention, for cooperation with an active polarization light valve in a 3D display system, the active polarization light valve is controlled to be open when the scanning image is the left-eye image, and the active polarization light valve is controlled to be closed when the scanning image is the right-eye image. Alternatively, the active polarization light valve in the 3D display system is controlled to be open when the scanning image is the right-eye image, and the active polarization light valve in the 3D display system is controlled to be closed when the scanning image is the left-eye image.

[0101] With the foregoing method according to the embodiment of the invention, dynamic control is performed on the row sections of the backlight source to thereby lower a response speed of liquid crystals as required for shutter glasses, and shutter glasses with liquid crystals in a TN pattern can be used in cooperation with reception of 3D images to thereby facilitate a lowered usage cost of both the shutter glasses and the system. Furthermore, the backlight control method and apparatus according to the embodiments of the invention can also be applicable in compatibility with both shutter glasses and an active polarization 3D system to thereby gain a wider applicability scope thereof.

[0102] Based upon the backlight control apparatus and method described above in details in the embodiments of the invention, the invention further discloses a 3D display system which mainly includes a display device, 3D glasses and the backlight control apparatus disclosed in the above embodiment, where the backlight control apparatus processes and displays 3D images in the backlight control method disclosed above in the embodiment of the invention. To further detail the description, the system will be described below in embodiments thereof.

[0103] An example is disclosed as follows:

[0104] As illustrated in Fig. 10, a 3D display system according to an embodiment of the invention includes, in part, a backlight control apparatus, a computer 9, an infrared transmitter 10 and shutter glasses 13 (including a left eyeglass 131 and a right eyeglass 132).

[0105] A display device 6 in the backlight control apparatus includes a backlight source 61 and a liquid crystal panel 62, and the backlight source 61 is an LED backlight source having following characteristics: two LED lamp strips with incident light being Y side-directed are used, and the backlight is controlled per row section in cooperation with a network arrangement of light guidance plates to separately control the backlight corresponding to each row section to be turned on and off.

[0106] In this example, the backlight source 61 is divided into three row sections, and accordingly, the liquid crystal panel 62 is also divided correspondingly into three row sections.

[0107] A display card of the computer 9 is configured to output a signal of processed 3D data images to the liquid crystal panel 62; the infrared transmitter 10 is configured to transmit a frame frequency synchronization signal of the images to the shutter glasses 13; and the shutter glasses 13 are integrated with an infrared signal receiver thereon through which the synchronization signal of the infrared transmitter is received, so that the backlight control apparatus controls the left and right eyeglasses to be open and closed.

[0108] Since an operation mode of backlight control relates to the output format of the 3D data images and the sequential order of obtaining the left-eye and right-eye images, either the left-eye images or the right-eye images can be scanned firstly.

[0109] In this example, taking Fig. 11 as an example

(the reference character "A" represents the unprocessed 3D data images, and the reference character "B" represents the processed 3D data images), firstly the left-eye image and then the right-eye image among the 3D data images are displayed, and the displayed images are then sequentially scanned and backlight-controlled repeatedly.

[0110] As can be seen from Fig. 11, the left-eye image is split into two images (L1, L2), where L1 is obtained by preserving the odd row section image of the original left-eye image and L2 is obtained by preserving the even row section image of the original left-eye image. Also the right-eye image is split into two images (R1, R2), where R1 is obtained by preserving the odd row section image of the original right-eye image and R2 is obtained by preserving the even row section image of the original right-eye image.

[0111] In an initial state, the backlight source is all turn-off, and the liquid crystal panel 62 scans starting with the first row of the first left-eye image L1, and then the second left-eye image L2, the first right-eye image R1 and the second right-eye image R2 are scanned sequentially; and next the first left-eye image L1 is scanned again, and this scanning process is repeated until all images have been scanned. The liquid crystal panel 62 scans from the top to the bottom, and the backlight control apparatus controls the backlight to be turned on and off in the scanning process in the timing diagram as illustrated in Fig. 12:

[0112] After the first row section of the L1 image has been scanned, the backlight of the first row section is turned on and then turned off until the first row section of the L2 image starts to be scanned; after the third row section of the L1 image is already scanned, the backlight of the third row section is turned on and then turned off until the third row section of the L2 image starts to be scanned; after the second row section of the L2 image is already scanned, the backlight of the second row section is turned on and then turned off until the second row section of the R1 image starts to be scanned; after the first row section of the R1 image is scanned, the backlight of the first row section is turned on again and then turned off again until the first row section of the R2 image starts to be scanned; after the third row section of the R1 image is already scanned, the backlight of the third row section is turned on and then turned off until the third row section of the R2 image starts to be scanned; and after the second row section of the R2 image is already scanned, the backlight of the second row section is turned on and then turned off until the second row section of the first left-eye image (not illustrated in figure) of the next subsequent frame starts to be scanned. In the process of scanning the images, the backlight is controlled by performing dynamic control on the row sections of the backlight source repeatedly in the foregoing timing sequence.

[0113] The shutter glasses 13 in the 3D display system according to the embodiment is open and closed in the timing sequence as illustrated in Fig. 12: the left eyeglass is open (on) at the starting time of the L1 frame and then

closed (off) until the end of the L2 frame; and the right eyeglass is open (on) at the starting time of the R1 frame and then closed (off) until the end of the R2 frame.

[0114] Control of the shutter glasses in the backlight control method above according to the embodiment of the invention is compared with that in the prior art as illustrated in Fig. 13. Conventional shutter glasses are open (on) only in the period of VBI, and there is a very short response time left for liquid crystals. There is a loss of brightness because opening of the eyeglasses is delayed due to the response time required for the liquid crystals; and there is a delay in closing (off) the eyeglasses due to the response time required for the liquid crystals. The left-eye and right-eye images may be visible at the same time to a viewer, thus resulting in considerable crosstalk.

[0115] In the system according to the embodiment of the present invention, the shutter glasses can be open (on) once the first frame of the left eye or the right eye starts and then closed (off) until the second frame of the left eye or the right eye ends to significantly lower the requirement on the response time of the liquid crystals. Liquid crystals in a TN pattern can thus be used for the shutter glasses according to the embodiment of the invention to achieve opening and closing of the shutter glasses, and a crosstalk-free 3D display effect can also be ensured without requiring the use of quickly responding liquid crystals to reduce or eliminate crosstalk between the left-eye and right-eye images.

[0116] Further comparing with the prior art techniques, the present invention can lower power consumption and also improve the effect of displaying a dynamic image under dynamic backlight control through scanning.

[0117] Another example is disclosed as follows:

[0118] As illustrated in Fig. 14, a 3D display system according to this embodiment of the invention mainly includes a backlight control apparatus, an active polarization light valve 14, a valve control system 15, a computer 9 and polarization glasses 16 (including a left eyeglass 161 and a right eyeglass 162).

[0119] A display device 6 in the backlight control apparatus includes a backlight source 61 and a liquid crystal panel, where the structure of backlight source 61 is a straight-down CCFL backlight source in cooperation with diffusion plates and diffusion sheets to control separately the backlight corresponding to each row section to be turned on and off.

[0120] In this example, the backlight source 61 is divided into three row sections, and thus the liquid crystal panel 62 is also divided correspondingly into three row sections. Referring to Fig. 15, the liquid crystal panel includes a lower polarized plate 121 and an upper polarized plate 122. The polarization direction of the upper polarized plate is 45°.

[0121] The active polarization light valve 14 is fitted closely on the upper polarized plate 122 for acting as an active polarization rotator to actively control the polarization state of emergent light. The active polarization light

valve 14 can alternatively be replaced by another device capable of actively controlling polarization rotation or rotating light, but is not limited to the liquid crystal light valve mentioned in this example. Thus, the liquid crystal light valve can be replaced by liquid crystal light valves, lithium niobate photoelectric modulators, Faraday rotators and the like in various structures but is not limited thereto.

[0122] The liquid crystal light valve in this example structurally includes upper and lower substrates with a liquid crystal layer sandwiched therebetween, and when there is no potential difference between the upper and lower substrates, the light valve is in a closed (off) state, and at this time the polarization direction of transmitted light is the same as the polarization direction of the upper polarized plate (as illustrated with C in Fig. 15); and when there is a potential difference between the upper and lower substrates of the light valve, the light valve is in an open (on) state, and at this time the polarization direction of transmitted light is orthogonal to the polarization direction of the upper polarized plate (as illustrated with D in Fig. 15). The polarization directions of the left and right eyeglasses of the polarization glasses 16 correspond respectively to the polarization states of the transmitted light when the light valve is closed and open.

[0123] A display card of the computer 9 is configured to output a signal of processed 3D data images to the liquid crystal panel 62. The light valve control system 15 is configured to receive a frame frequency synchronization signal of the images from the liquid crystal panel 62 and transmitting the signal to the active polarization light valve, so that the backlight control apparatus controls the light valve to be open and closed in the timing sequence as illustrated in Fig. 16. At this time a crosstalk-free 3D image can be seen through the polarization glasses.

[0124] A specific operation principle is described as follows:

[0125] In this example, the split images in the preceding example are taken as an example, that is, as illustrated in Fig. 11 (the reference character "A" represents the unprocessed 3D data images, and the reference character "B" represents the processed 3D data images), firstly the left-eye image and then the right-eye image among the 3D data images are displayed and sequentially scanned and backlight-controlled repeatedly.

[0126] As can be seen from Fig. 11, the left-eye image is split into two images (L1, L2), where L1 is obtained by preserving the odd row section image of the original left-eye image and L2 is obtained by preserving the even row section image of the original left-eye image. Also the right-eye image is split into two images (R1, R2), where R1 is obtained by preserving the odd row section image of the original right-eye image and R2 is obtained by preserving the even row section image of the original right-eye image.

[0127] In an initial state, the backlight source is all turned off, and the liquid crystal panel scans starting with the first row of the first left-eye image L1, and then the second left-eye image L2, the first right-eye image R1

and the second right-eye image R2 are scanned sequentially; and next the first left-eye image L1 is scanned again, and this process is repeated until the scanning ends. The liquid crystal panel scans from the top to the bottom, and the backlight control apparatus controls the backlight to be turned on and off in the scanning process in the timing diagram as illustrated in Fig. 16: after the first row section of the L1 image is already scanned, the backlight of the first row section is turned on and then turned off until the first row section of the L2 image starts to be scanned; after the third row section of the L1 image is already scanned, the backlight of the third row section is turned on and then turned off until the third row section of the L2 image starts to be scanned; after the second row section of the L2 image is already scanned, the backlight of the second row section is turned on and then turned off until the second row section of the R1 image starts to be scanned; after the first row section of the R1 image is scanned, the backlight of the first row section is turned on again and then turned off again until the first row section of the R2 image starts to be scanned; after the third row section of the R1 image is already scanned, the backlight of the third row section is turned on and then turned off until the third row section of the R2 image starts to be scanned; and after the second row section of the R2 image is already scanned, the backlight of the second row section is turned on and then turned off until the second row section of the first left-eye image (not illustrated) of the next subsequent frame starts to be scanned. In the process of scanning the images, the backlight is controlled by performing dynamic control on the row sections of the backlight source repeatedly in the foregoing timing sequence.

[0128] The active polarization light valve 14 in the 3D display system according to this embodiment is open and closed in the timing sequence as illustrated in Fig. 16: the light valve is in a closed (off) state at the starting time of the L1 frame and then turned into an open (on) state until the end of the L2 frame, that is, the light valve is open (on) at the starting time of the R1 frame and then closed (off) until the end of the R2 frame, and a crosstalk-free 3D image can be viewed using a pair of polarization glasses.

[0129] As compared with the prior art, this example based on the foregoing described backlight control method according to the embodiment of the invention can be combined with a CCFL backlight source and an active polarization 3D system, and the use of inexpensive polarization glasses can further lower the system costs and usage costs of a user, and furthermore the polarization glasses are characterized as to provide energy saving, environment protection, light weight, a high drop number, etc., which are superior to shutter glasses and thus can further extend the applicability scope of the system and have the characteristic of wide applicability.

[0130] The respective embodiments have been described progressively in the specification, each of the embodiments has laid an emphasis on its difference(s) from

the other embodiments, and mutual reference can be made to the description of the same or similar part(s) between the respective embodiments. For the apparatus according to the embodiment, it has been described briefly because it corresponds to the method according to the embodiment, and reference can be made to the description of the method for the relevant part(s).

[0131] The foregoing description of the disclosed embodiments enables those skilled in the art to practice or use the invention. Numerous modifications to these embodiments will be obvious to those skilled in the art, and the general principle defined herein can be embodied in other embodiments without departing from the spirit or scope of the invention. Accordingly the invention will not be limited to these embodiments illustrated herein but shall conform to the broadest scope consistent with the principle and novel characteristics disclosed herein.

Claims

1. A backlight control method, comprising:

obtaining and preprocessing 3D data images to output, in a complementary format, a first left-eye image, a second left-eye image, a first right-eye image and a second right-eye image preserving odd and even row sections of original left-eye and right-eye images, wherein each image is one frame of image;
scanning sequentially the obtained first and second left-eye images and first and second right-eye images according to a backlight source and a liquid crystal panel of which horizontal row sections are pre-divided and according to the format and sequential order in which the images are output; and
after scanning a row section of an image frame, controlling an initialized backlight of the row section to be turned on and then turned off until a same row section of a next image frame starts to be scanned, and repeating the scanning until all images are scanned.

2. The method according to claim 1, wherein after scanning the row section of the image frame, the method specifically comprises:

after scanning the row section of the image frame, controlling the initialized backlight of the row section to be turned on; or
after scanning the row section of the preserved image frame, controlling the initialized backlight of the row section to be turned on with a delay time t ,
the delay time t satisfying the expression $t \leq (N-1)/N \cdot T$, wherein T represents a time period of one frame, and N represents the number of hor-

horizontal row sections into which the backlight source and the liquid crystal panel are divided.

3. The method according to claim 1, wherein the backlight source and the liquid crystal panel each are correspondingly divided into N horizontal row sections, N being a number greater than or equal to 3.

4. The method according to claim 1, wherein each of the 3D data images includes a left-eye image and a right-eye image, and the process of obtaining and preprocessing the 3D data images to output, in the complementary format, the first left-eye image, the second left-eye image, the first right-eye image and the second right-eye image preserving odd and even row sections of original left-eye and right-eye images comprises:

splitting the left-eye image to obtain the first left-eye image preserving the odd or even row section image and the second left-eye image complementary to the odd or even row section image of the first left-eye image, wherein row sections in the first left-eye image and the second left-eye image, of which images are not preserved are black pictures; and

splitting, in the same way, the right-eye image to obtain the first right-eye image and the second right-eye image with complementary odd and even row section images, wherein the row sections preserved in the first right-eye image are complementary in format to the row sections preserved in the second left-eye image.

5. The method according to any one of claims 1 to 4, wherein the process of scanning sequentially the obtained first and second left-eye images and first and second right-eye images according to the backlight source and the liquid crystal panel of which horizontal row sections are pre-divided and according to the format and sequential order in which the images are output comprises:

determining that the images are obtained in an order of firstly the left-eye images and then the right-eye images or firstly the right-eye images and then the left-eye images, wherein the left-eye images include the first left-eye image preserving the odd row section image and the second left-eye image preserving complementarily the even row section image; and the right-eye images include the first right-eye image and the second right-eye image preserving the odd and even row section images consistently with the split left-eye images, wherein each image is one frame of image; and scanning each frame of image sequentially from the top to the bottom until all images are

scanned.

6. The method according to any one of claims 1 to 4, wherein the process of scanning sequentially the obtained first and second left-eye images and first and second right-eye images according to the backlight source and the liquid crystal panel of which horizontal row sections are pre-divided and according to the format and sequential order in which the images are output comprises:

determining that the images are obtained in an order of firstly the left-eye images and then the right-eye images or firstly the right-eye images and then the left-eye images, wherein the left-eye images include the first left-eye image preserving the even row section image and the second left-eye image preserving complementarily the odd row section image; and the right-eye images include the first right-eye image and the second right-eye image preserving the odd and even row section images consistently with the split left-eye images, wherein each image is one frame of image; and scanning each frame of image sequentially from the top to the bottom until all images are scanned.

7. The method according to any one of claims 1 to 4, further comprising: controlling in cooperation with a pair of shutter glasses a left eyeglass of the pair of shutter glasses to be open and a right eyeglass to be closed when the scanning image is the left-eye image; and controlling the right eyeglass of the pair of shutter glasses to be open and the left eyeglass to be closed when the scanning image is the right-eye image.

8. The method according to any one of claims 1 to 4, further comprising:

scanning the images in cooperation with an active polarization light valve; and controlling the active polarization light valve to be open when the scanning image is the left-eye image; and controlling the active polarization light valve to be closed when the scanning image is the right-eye image; or controlling the active polarization light valve to be open when the scanning image is the right-eye image; and controlling the active polarization light valve to be closed when the scanning image is the left-eye image.

9. The method according to any one of claims 1 to 4, wherein when a one frame of image is the second

left-eye image preserving the odd row sections, a next frame of image is the first right-eye image; and after a first odd row section of the second left-eye image is scanned, controlling the initialized backlight of the row section to be turned on and then turned off until a first odd row section of the first right-eye image starts to be scanned, and repeating until all the images are scanned.

10. A backlight control apparatus, comprising:

an obtaining unit configured to obtain and preprocess 3D data images to output, in a complementary format, a first left-eye image, a second left-eye image, a first right-eye image and a second right-eye image preserving odd and even row sections of original left-eye and right-eye images, wherein each image is one frame of image;

a scanning control unit configured to scan sequentially the obtained first and second left-eye images and first and second right-eye images according to a backlight source and a liquid crystal panel of which horizontal row sections are pre-divided and according to the format and sequential order in which the images are output; and

a backlight control unit configured, after a row section of an image frame is scanned, to control an initialized backlight of the row section to be turned on and then turned off until a same row section of a next image frame starts to be scanned, and to repeat the scanning until all images are scanned.

11. The apparatus according to claim 10, further comprising:

a preprocessing unit configured to preprocess the obtained 3D data images to generate and output, in the complementary format, the first left-eye image, the second left-eye image, the first right-eye image and the second right-eye image preserving the odd and even row sections of the original left-eye and right-eye images, wherein each image is one frame of image; and a pre-dividing unit configured to correspondingly divide the backlight source and the liquid crystal panel in a display device into N horizontal row sections, respectively, wherein N represents a number greater than or equal to 3.

12. The apparatus according to claim 10 or 11, wherein the scanning control unit comprises:

a determining module configured to determine the format and sequential order in which the obtained first and second left-eye and right-eye im-

ages are output; and

a scanning control module configured to scan each frame of image sequentially in a top to bottom manner in the order determined by the determining module according to the backlight source and the liquid crystal panel of which the horizontal row sections are pre-divided.

13. The apparatus according to claim 10 or 11, further comprising:

a first backlight control unit, in cooperation with a pair of shutter glasses, configured to control a left eyeglass of the pair of shutter glasses to be open and a right eyeglass to be closed when the scanning image is the left-eye image; and to control the right eyeglass of the pair of shutter glasses to be open and the left eyeglass to be closed when the scanning image is the right-eye image.

14. The apparatus according to claim 10 or 11, further comprising:

a second backlight control unit, in cooperation with an active polarization light valve, configured to control the active polarization light valve to be open or closed alternately when the left-eye image and the right-eye image are scanned, respectively.

15. A 3D display system comprising a display device and 3D glasses, wherein the system further comprises the backlight control apparatus according to claim 9 and the backlight control apparatus processes and displays 3D images in the backlight control method according to claim 1.

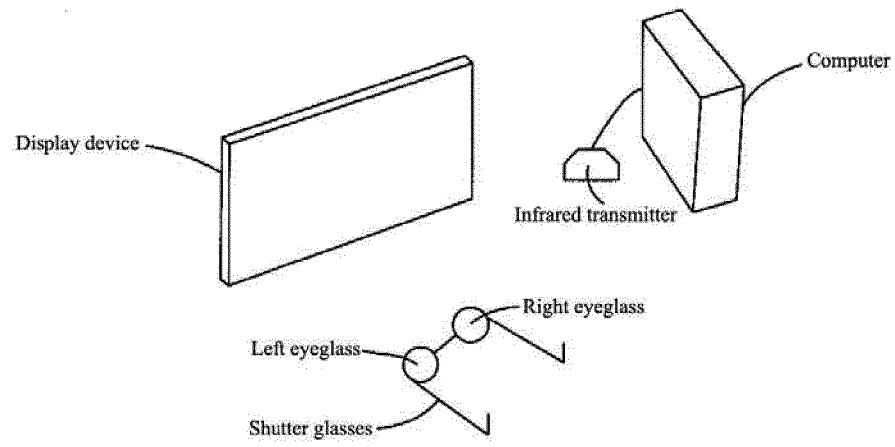


Fig.1

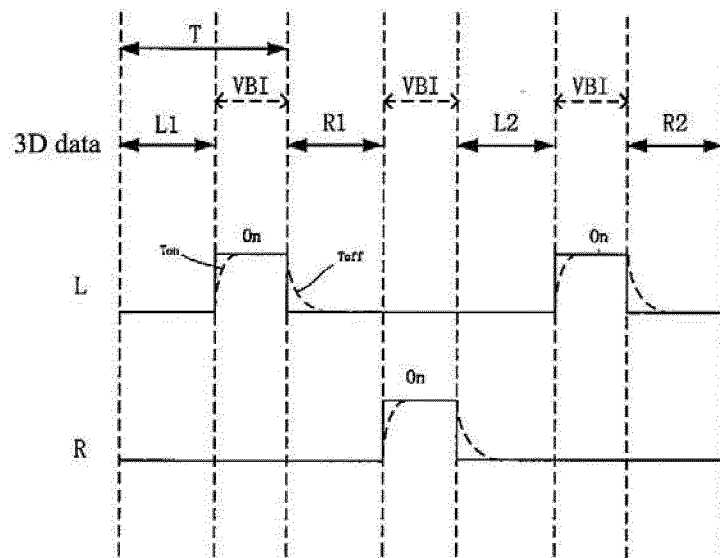


Fig.2

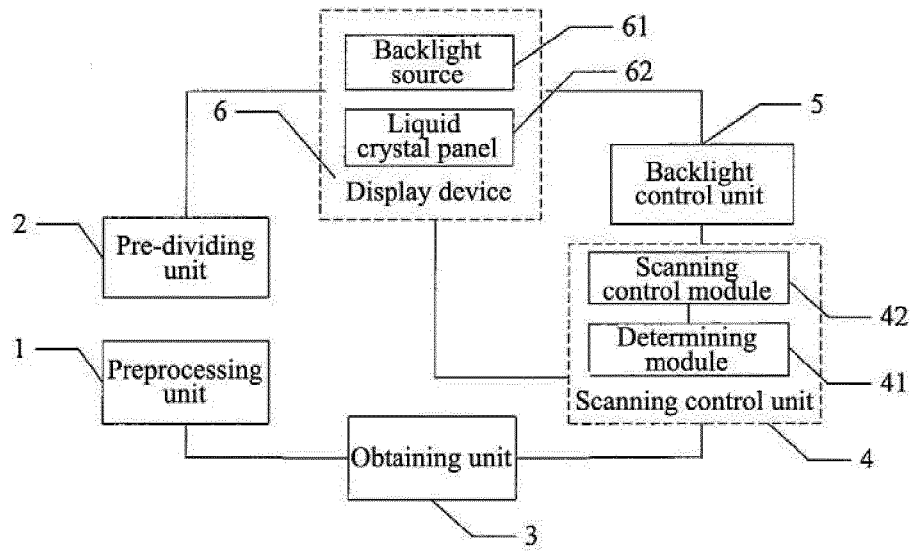


Fig.3

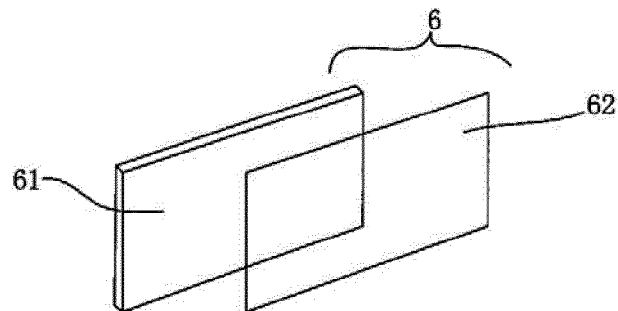


Fig.4

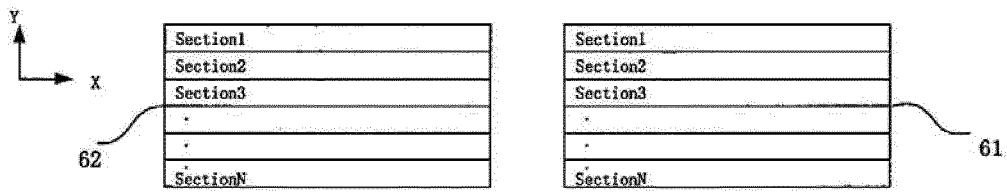


Fig.5

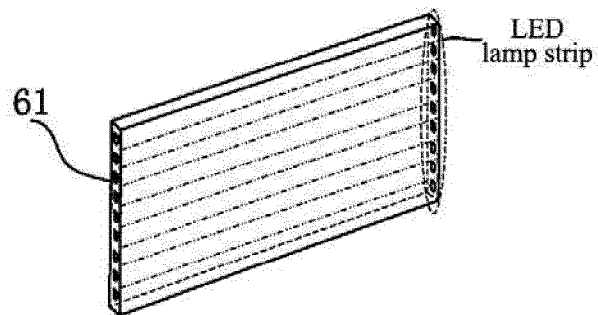


Fig.6

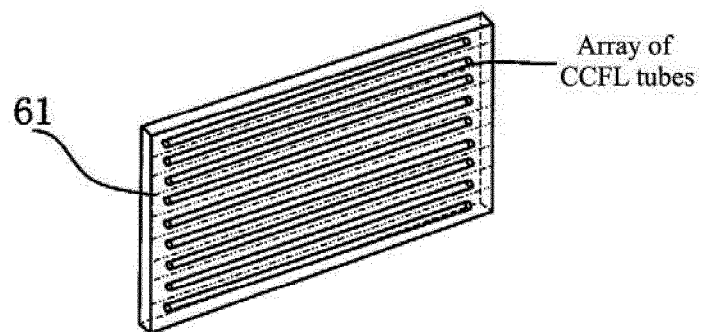


Fig.7

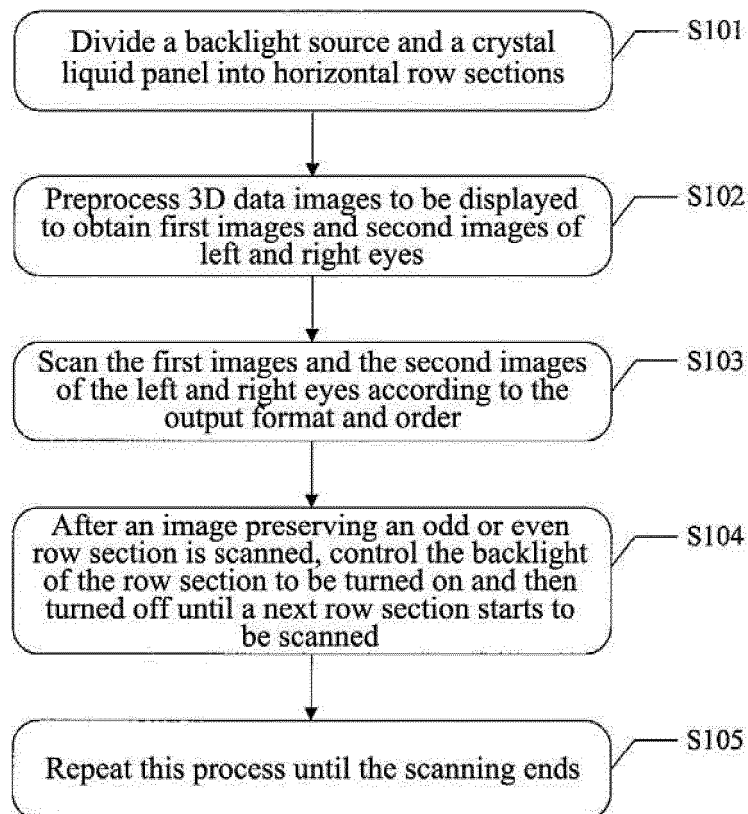


Fig.8

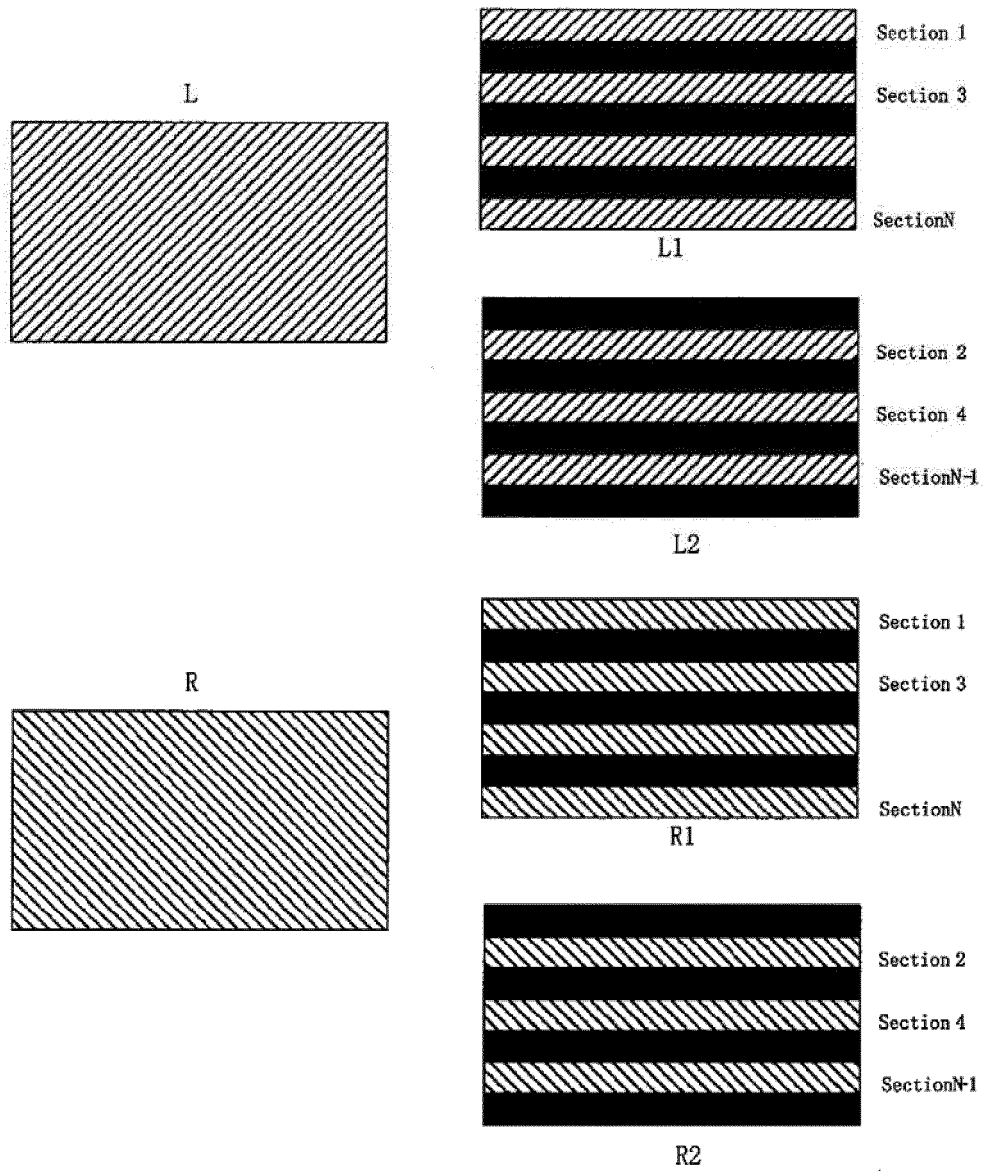


Fig.9

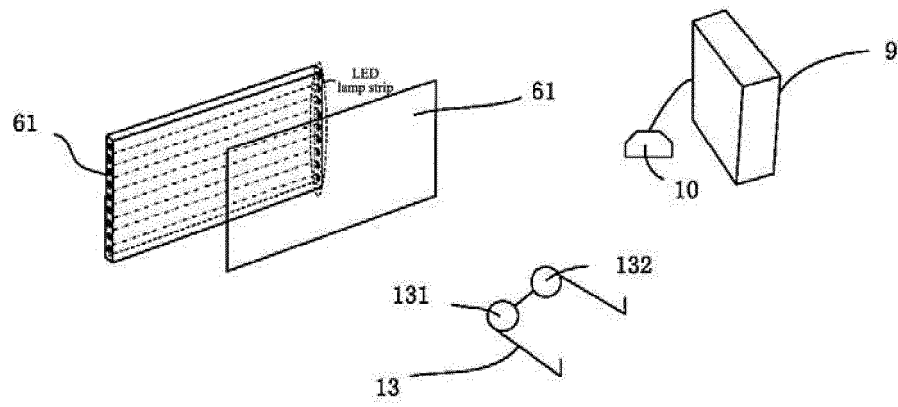


Fig.10

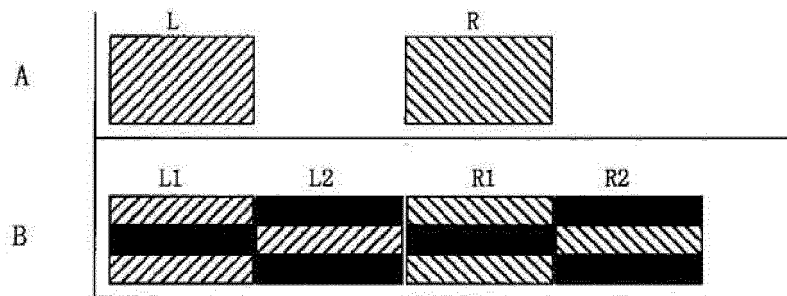


Fig.11

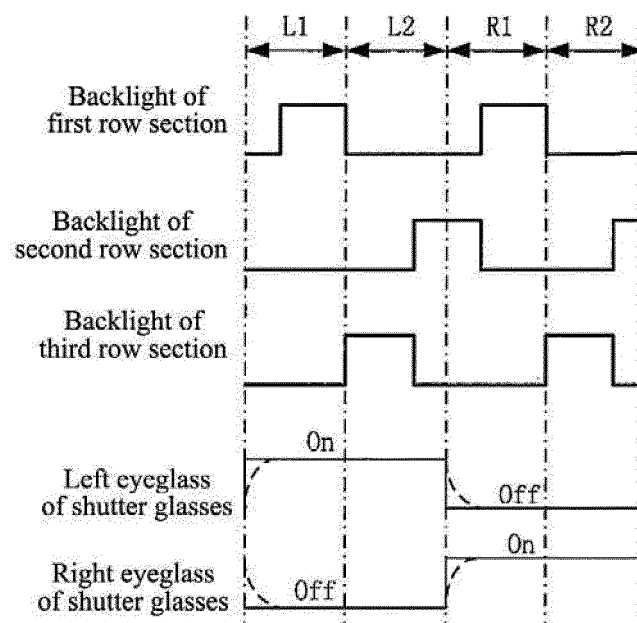


Fig.12

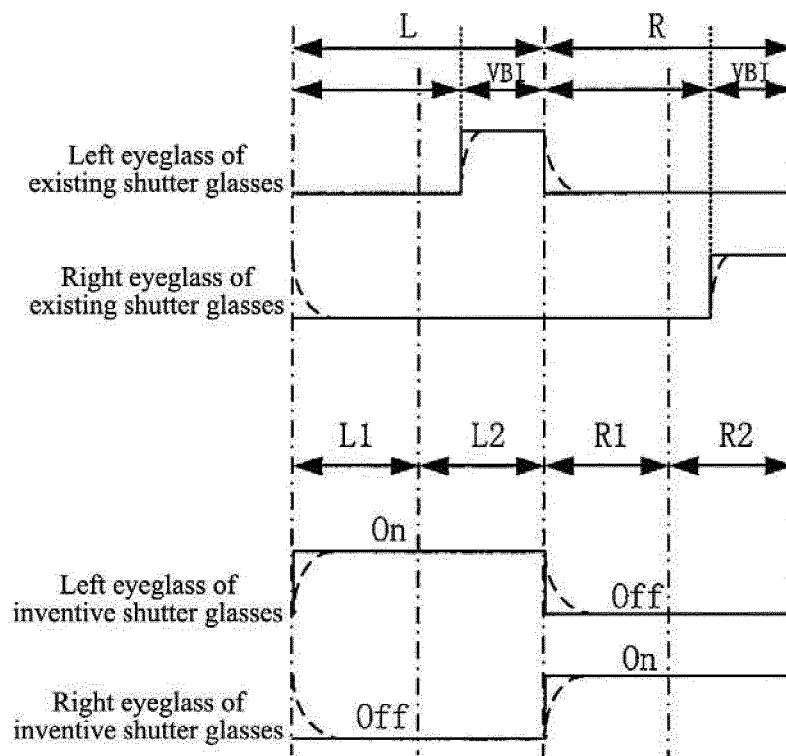


Fig.13

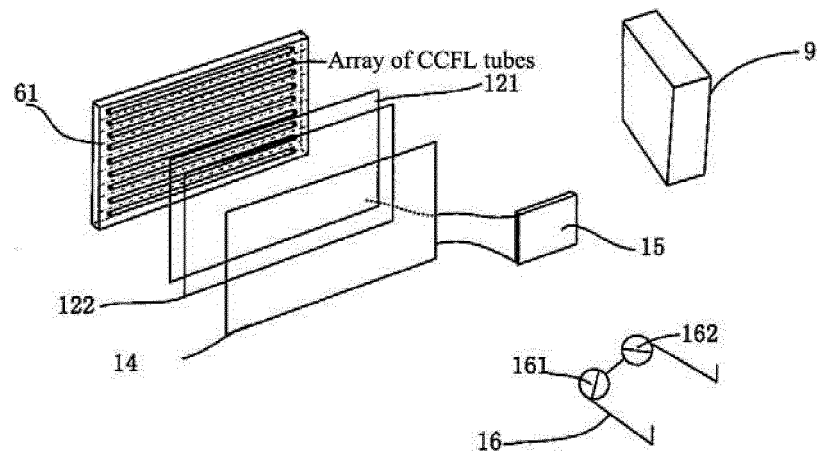


Fig.14

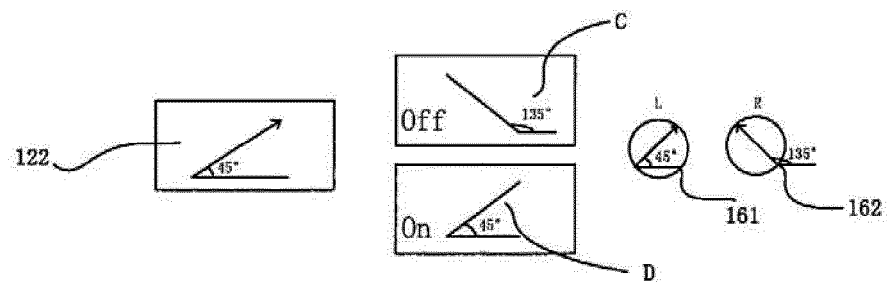


Fig.15

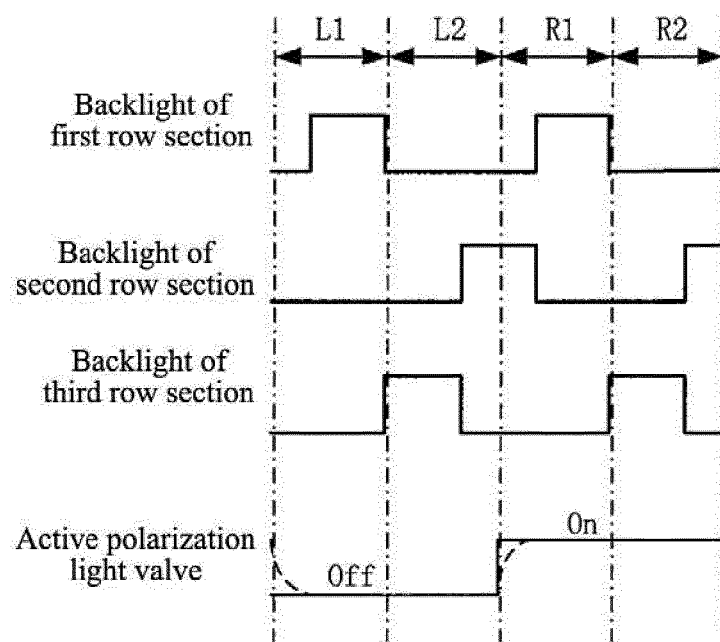


Fig.16

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN2012074995

A. CLASSIFICATION OF SUBJECT MATTER

G09G3/36 (2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC:G09G3/36,G02F1/133+

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNABS,CNTXT,VEN:SETEREOSXOPIC,3D,THREE DIMENSION??,TRIDIMENSION??,ODD

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO2010032927A2 (SAMSUNG ELECTRONICS CO LTD) 25 Mar. 2010 (25.03.2010) description, paragraphs 92-102, figures 3,8A,8B	1-15
A	CN101697595A (QINGDAO HISENSE ELECTRIC CO LTD et al.) 21 Apr. 2010 (21.04.2010) description, paragraphs 0091-0119, figures 7,8	1-15
A	CN101650922A (QINGDAO HISENSE ELECTRIC CO LTD) 17 Feb. 2010 (17.02.2010) description, page 5,last paragraph to page 6,paragraph 5, figures 5A,5B	1-15

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
“A” document defining the general state of the art which is not considered to be of particular relevance	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
“E” earlier application or patent but published on or after the international filing date	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	“&” document member of the same patent family
“O” document referring to an oral disclosure, use, exhibition or other means	
“P” document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
06 Jul. 2012 (06.07.2012)

Date of mailing of the international search report
02 Aug. 2012 (02.08.2012)

Name and mailing address of the ISA
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No. (86-10)62019451

Authorized officer
LIU, Chang
Telephone No. (86-10) 62085774

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2012074995

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
WO2010032927A2	25.03.2010	WO2010032927A3	24.06.2010
		EP2327228A2	01.06.2011
		US2010066820A1	18.03.2010
		CN102130386A	17.08.2011
		JP2012503218W	02.02.2012
		KR20100032284A	25.03.2010
		MX2011002842A	28.04.2011
CN101697595A	21.04.2010	CN101697595B	06.04.2011
CN101650922A	17.02.2010	CN101650922B	05.10.2011

Form PCT/ISA/210 (patent family annex) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201110113997 [0001]

专利名称(译)	背光控制方法和装置，以及3D显示系统		
公开(公告)号	EP2706524A1	公开(公告)日	2014-03-12
申请号	EP2012779578	申请日	2012-05-02
[标]申请(专利权)人(译)	上海中航光电子有限公司		
申请(专利权)人(译)	上海中航光电科技LTD.		
当前申请(专利权)人(译)	上海中航光电科技LTD.		
[标]发明人	XING LIANG XU WEI XU LIHUA		
发明人	XING, LIANG XU, WEI XU, LIHUA		
IPC分类号	G09G3/36 G09G3/00 G09G3/34		
CPC分类号	G09G3/003 G09G3/342 G09G2310/0224 G09G2310/0237 G09G2310/024 G09G2320/0209 G09G2330/021 G02B30/34 G02F1/133602		
优先权	201110113997.8 2011-05-04 CN		
其他公开文献	EP2706524B1 EP2706524A4		
外部链接	Espacenet		

摘要(译)

本发明公开了一种背光控制方法，装置和3D显示系统，该方法包括：将相应的背光源和液晶面板分别分为N个水平行部分；预处理3D数据图像以分别获得以互补格式输出的左眼和右眼的第一图像和第二图像，其保留原始左眼图像和右眼图像的奇数和偶数行部分图像，并扫描第一图像和第二图像根据输出图像的格式和顺序，从左到右依次排列左眼和右眼；并且在扫描保留奇数或偶数行部分的图像之后，控制行部分的背光打开然后关闭，直到开始扫描保留奇数或偶数行部分的下一图像，并重复该过程直到扫描结束。利用本发明，与图像处理和显示相结合，对背光源的行部分进行动态控制，以实现无串扰的3D效果，并降低背光源和系统的功耗。

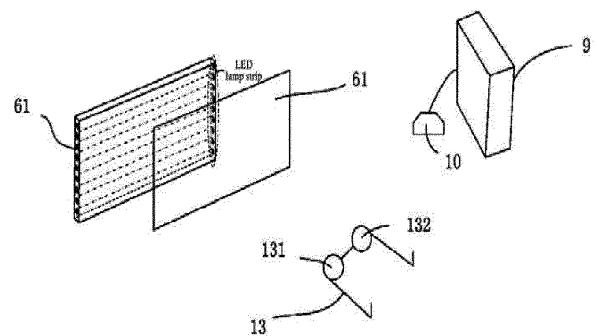


Fig.10