

(19)



(11)

EP 3 131 087 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
27.05.2020 Bulletin 2020/22

(51) Int Cl.:
G09G 3/36^(2006.01) G09G 3/20^(2006.01)

(21) Application number: **16159106.0**

(22) Date of filing: **08.03.2016**

(54) METHOD AND DEVICE FOR REDUCING DISPLAY BRIGHTNESS

VERFAHREN UND VORRICHTUNG ZUR REDUZIERUNG DER DISPLAYHELLIGKEIT

PROCÉDÉ ET DISPOSITIF DE RÉDUCTION DE LA LUMINOSITÉ D'UN AFFICHAGE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **13.08.2015 CN 201510498535**

(43) Date of publication of application:
15.02.2017 Bulletin 2017/07

(73) Proprietor: **Xiaomi Inc.
Beijing 100085 (CN)**

(72) Inventors:
• **LI, Guosheng
100085 Haidian District (CN)**

• **LIU, Anyu
100085 Haidian District (CN)**
• **ZHANG, Yuan
100085 Haidian District (CN)**

(74) Representative: **Sadler, Peter Frederick
Reddie & Grose LLP
The White Chapel Building
10 Whitechapel High Street
London E1 8QS (GB)**

(56) References cited:
**CN-A- 104 700 786 US-A1- 2007 229 435
US-A1- 2013 249 955**

EP 3 131 087 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**TECHNICAL FIELD**

- 5 **[0001]** The present disclosure generally relates to the field of displays, and more particularly, to a method and device for reducing display brightness.

BACKGROUND

- 10 **[0002]** Mobile terminals, such as smart phones and tablet computers are widely used.
[0003] When a mobile terminal is used at night, a display content of the mobile terminal may be glaring because of dark ambient light. Display brightness of a liquid crystal display screen may be reduced by regulating brightness of a backlight. However, in case of very dark ambient light, the display content of the liquid crystal display screen may still be glaring even though the brightness of the backlight is maximally reduced.
- 15 **[0004]** US 2007/229435 A1 relates to an organic light emitting display device and a driving method for the same.
[0005] CN 104700786 A relates to a method and device for adjusting display brightness.
[0006] US 2013/249955 A1 relates to an apparatus generating gray scale voltage for organic light emitting diode display device and a generating method thereof.

SUMMARY

- [0007]** For solving the problem of incapability in meeting a requirement on ambient light by regulating brightness of a backlight in case of dark ambient light, the present disclosure provides a method and device for reducing display brightness. The technical solutions are implemented as follows.
- 25 **[0008]** According to a first aspect of the present disclosure, a method for reducing display brightness is provided, which may include: acquiring a transformed gamma curve, wherein the transformed gamma curve is a gamma curve obtained by reducing a grayscale voltage in an initial gamma curve according to a preset ratio and the preset ratio is smaller than 1 and more than 0; querying a corresponding grayscale voltage in the transformed gamma curve according to a grayscale pixel value of a pixel to be displayed; and at a scanning moment corresponding to the pixel, outputting the grayscale voltage to a data line corresponding to the pixel in a liquid crystal display screen. Before the step of
- 30 acquiring a transformed gamma curve, the method may further include: calculating the transformed gamma curve according to the initial gamma curve and the preset ratio; and storing the transformed gamma curve. The step of calculating the transformed gamma curve according to the initial gamma curve and the preset ratio may include: multiplying a maximum grayscale pixel value by the preset ratio to obtain a target grayscale pixel value N_x ; querying a grayscale voltage corresponding to the target grayscale pixel value N_x in the initial gamma curve, and setting the grayscale voltage as a grayscale voltage V_{max} corresponding to a maximum grayscale pixel value N_{max} set as N_x ; querying a brightness value B_{max} corresponding to the grayscale voltage V_{max} in a brightness-voltage curve; measuring a brightness value B_n corresponding to a grayscale pixel value N according to the following formula: $(N/N_{max})^{(gamma\ value)} = (B_n/B_{max})$; querying a grayscale voltage corresponding to the brightness value B_n in the brightness-voltage curve as a grayscale voltage
- 40 corresponding to the grayscale pixel value N ; and obtaining the transformed gamma curve according to the grayscale voltage corresponding to the grayscale pixel value N and the grayscale voltage corresponding to the maximum grayscale pixel value N_{max} , wherein the brightness-voltage curve may include a corresponding relationship between brightness and a grayscale voltage, and a value range of N is $[0, N_{max})$.
- [0009]** A scanning moment corresponding to a pixel may refer to a moment at which the pixel is being refreshed.
- 45 **[0010]** Optionally, the step of acquiring a transformed gamma curve may include: reading, according to a current night display level, the transformed gamma curve corresponding to the current night display level; wherein different night display levels correspond to different transformed gamma curves, and different transformed gamma curves correspond to different preset ratios.
- [0011]** Optionally, the gamma value may be 2.2.
- 50 **[0012]** According to a second aspect of the present disclosure, a device for reducing display brightness is provided, which may include: an acquisition module configured to acquire a transformed gamma curve, wherein the transformed gamma curve is a gamma curve obtained by reducing a grayscale voltage in an initial gamma curve according to a preset ratio and the preset ratio is smaller than 1 and more than 0; a querying module configured to query a corresponding grayscale voltage in the transformed gamma curve according to a grayscale pixel value of a pixel to be displayed; and an output module configured to, at a scanning moment corresponding to the pixel, output the grayscale voltage to a data line corresponding to the pixel in a liquid crystal display screen. The device may further include: a calculation module configured to calculate the transformed gamma curve according to the initial gamma curve and the preset ratio; and a storage module configured to store the transformed gamma curve. The calculation module may include: a target sub-
- 55

module, configured to multiply a maximum grayscale pixel value by the preset ratio to obtain a target grayscale pixel value N_x ; a first querying sub-module, configured to query a grayscale voltage corresponding to the target grayscale pixel value N_x in the initial gamma curve, and set the grayscale voltage as a grayscale voltage V_{max} corresponding to a maximum grayscale pixel value N_{max} set to N_x ; a second querying sub-module, configured to query a brightness value B_{max} corresponding to the grayscale voltage V_{max} in a brightness-voltage curve; a measurement sub-module, configured to measure a brightness value B_n corresponding to a grayscale pixel value N according to the following formula: $(N/N_{max})^{(gamma\ value)} = (B_n/B_{max})$; a third querying sub-module, configured to query a grayscale voltage corresponding to the brightness value B_n in the brightness-voltage curve as a grayscale voltage corresponding to the grayscale pixel value N ; and a transformation sub-module, configured to obtain the transformed gamma curve according to the grayscale voltage corresponding to the grayscale pixel value N and the grayscale voltage corresponding to the maximum grayscale pixel value N_{max} , wherein the brightness-voltage curve may include a corresponding relationship between brightness and a grayscale voltage, and a value range of N is $[0, N_{max})$.

[0013] Optionally, the acquisition module may further include: a reading sub-module configured to read, according to the night display level, the transformed gamma curve corresponding to the current night display level; wherein different night display levels correspond to different transformed gamma curves, and different transformed gamma curves correspond to different preset ratios.

[0014] Optionally, the gamma value may be 2.2.

[0015] According to a third aspect of the present disclosure, a device for reducing display brightness is provided, which may include: a processor; and a memory configured to store executable instructions of the processor, wherein the processor may be configured to: acquire a transformed gamma curve, wherein the transformed gamma curve is a gamma curve obtained by reducing a grayscale voltage in an initial gamma curve according to a preset ratio and the preset ratio is smaller than 1 and more than 0; query a corresponding grayscale voltage in the transformed gamma curve according to a grayscale pixel value of a pixel to be displayed; and output, at a scanning moment corresponding to the pixel, the grayscale voltage to a data line corresponding to the pixel in a liquid crystal display screen.

[0016] The following technical effects will be achieved by the technical solutions provided by the present disclosure:

[0017] The transformed gamma curve is acquired, the corresponding grayscale voltage in the transformed gamma curve is queried according to the grayscale pixel value of the pixel to be displayed, and the queried grayscale voltage is output to the data line corresponding to the pixel in the liquid crystal display screen at the scanning moment corresponding to the pixel, so that the problem of incapability in meeting the requirement on the ambient light by regulating the brightness of the backlight or a background color of a User Interface (UI) in case of extremely dark ambient light is solved, and the effect of reducing the brightness of the screen by reducing the grayscale voltage of the pixel in the liquid crystal display screen in case of extremely dark ambient light is achieved.

[0018] It should be understood that the above general description and detailed description below are only exemplary and explanatory and not intended to limit the present disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate embodiments consistent with the invention and, together with the description, serve to explain the principles of the invention.

Fig. 1 is a structure diagram of an array substrate on a Thin Film Transistor Liquid Crystal Display (TFT-LCD), according to an embodiment.

Fig. 2 is a flow chart of a method for reducing display brightness, according to an exemplary embodiment.

Fig. 3 is a flow chart of another method for reducing display brightness, according to an exemplary embodiment.

Fig. 4 is a flow chart of calculating a transformed gamma curve, according to an exemplary embodiment.

Fig. 5 is a block diagram of a device for reducing display brightness, according to an exemplary embodiment.

Fig. 6A is a block diagram of another device for reducing display brightness, according to an exemplary embodiment.

Fig. 6B is a block diagram of a calculation module, according to an exemplary embodiment.

Fig. 7 is a block diagram of a device for reducing display brightness, according to an exemplary embodiment.

DETAILED DESCRIPTION

[0020] The schematic embodiments are described here in detail, and examples are shown in the drawings. Unless specified otherwise, the same numbers in different drawings represent the same or similar elements. Implementations described in the following schematic embodiments do not represent all implementations consistent with the present disclosure. On the contrary, they are only examples of apparatus and methods consistent with some aspects of the present disclosure in the attached claims.

[0021] If a mobile terminal is in a normal display mode, when a user is in an environment with an extremely low light intensity value, the mobile terminal may reduce brightness of a screen by reducing a grayscale voltage of a corresponding liquid crystal unit in the liquid crystal display screen, thereby achieving brightness suitable for eyes to watch.

[0022] The present disclosure is described by taking a mobile terminal as an example. The mobile terminal at least includes a liquid crystal display screen, and the liquid crystal display screen includes a backlight, TFT switching elements, liquid crystal units and the like. The liquid crystal display screen is configured to display an output content of the mobile terminal; the backlight is configured to control brightness of the liquid crystal display screen; and the TFT switching element is configured to control grayscale voltages of the corresponding liquid crystal units in the liquid crystal display screen.

[0023] The grayscale voltages in the liquid crystal display screen refer to drain voltages, connected with data lines in a data driver chip, of each liquid crystal unit.

[0024] Fig. 1 is a structure diagram of an array substrate on a TFT-LCD, according to an embodiment. The array substrate includes $m \times n$ liquid crystal units 1, a scanning driver chip 2, m scanning lines 21, a data driver chip 3 and n data lines 31.

[0025] The liquid crystal units 1 are arranged to form an array with m rows and n columns. Each liquid crystal unit 1 includes: a liquid crystal pixel electrode 11 and a TFT switching element. Each TFT switching element includes a source 12, a gate 13 and a drain 14. The liquid crystal pixel electrodes 11 are connected with the sources 12 in the TFT switching elements. The liquid crystal pixel electrodes 11 may be red liquid crystal pixel electrodes R, green liquid crystal pixel electrodes G or blue liquid crystal pixel electrodes B.

[0026] The scanning driver chip 2 includes m scanning pins, and each scanning pin is connected with one scanning line 21. The liquid crystal units 1 of each row correspond to one scanning line 21, and the scanning lines 21 are connected with the drains 13 in the liquid crystal units 1 of the corresponding rows.

[0027] The data driver chip 3 includes n data pins, and each data pin is connected with one data line 31. The liquid crystal units 1 of each column correspond to one data line 31, and the data lines 31 are connected with the drains 14 of the liquid crystal units 1 of the corresponding columns.

[0028] When the array substrate operates, the data lines 31 are configured to transmit video data signals in the data driver chip 3 to the drains 14 of the TFT switching elements so as to control voltages of the liquid crystal pixel electrodes 11.

[0029] When the liquid crystal display screen works, for a frame of picture, pixels in the picture correspond to the liquid crystal units 1 in the liquid crystal display screen. Each pixel has its own grayscale pixel value, for example, the first pixel has a grayscale pixel value of 244 and the second pixel has a grayscale pixel value of 243, and a value range of each grayscale pixel value is $[0, 255]$.

[0030] Taking a pixel as an example, the liquid crystal unit 1 corresponding to each pixel has a corresponding scanning line 21 and a data line 31 in a liquid crystal driver circuit. The scanning driver chip 2 controls the scanning lines 21 to be connected row by row, and when the scanning line 21 corresponding to the pixel is connected, the data driver chip 3 outputs a grayscale voltage corresponding to the pixel to the data line 31 corresponding to the pixel, and stores the corresponding grayscale voltage to the liquid crystal pixel electrode 11 in the liquid crystal unit 1 corresponding to the pixel. The grayscale voltage is obtained by querying a preset gamma curve, and the gamma curve is a corresponding relationship between a grayscale pixel value and a grayscale voltage.

[0031] For an 8-bit panel, it represents grayscale pixel values 0-255 (256 in total), each grayscale pixel value in the grayscale pixel values 0-255 corresponds to a grayscale voltage. Taking each grayscale pixel value and the grayscale voltage corresponding to the grayscale pixel value as a point, then 256 points should be obtained, and the 256 points are drawn into a curve, i.e. a gamma curve.

[0032] The present disclosure provides a transformed gamma curve, and the transformed gamma curve is calculated according to a preset ratio and an initial gamma curve. The transformed gamma curve may reduce overall brightness of a liquid crystal display panel, thereby realizing low-brightness display of the liquid crystal display panel. Reference will now be made to the following embodiment.

[0033] Fig. 2 is a flow chart of a method for reducing display brightness, according to an exemplary embodiment. In this embodiment, the method for reducing the display brightness is applied to a mobile terminal including a liquid crystal display screen. The method for reducing the display brightness may include the following steps:

Step 201: acquiring a transformed gamma curve, wherein the transformed gamma curve is a gamma curve obtained by reducing a grayscale voltage in an initial gamma curve according to a preset ratio and the preset ratio is smaller than 1 and more than 0;

Step 202: querying a corresponding grayscale voltage in the transformed gamma curve according to a grayscale pixel value of a pixel to be displayed; and

Step 203: at a scanning moment corresponding to the pixel, outputting the grayscale voltage to a data line corresponding to the pixel in a liquid crystal display screens.

[0034] According to the method for reducing the display brightness, the transformed gamma curve is acquired, the corresponding grayscale voltage in the transformed gamma curve is queried according to the grayscale pixel value of the pixel to be displayed, and the queried grayscale voltage is output to the data line corresponding to the pixel in the liquid crystal display screen at the scanning moment corresponding to the pixel, so that the problem of incapability in meeting a requirement on ambient light by regulating brightness of a backlight or a background color of a UI in case of extremely dark ambient light is solved, and the effect of reducing the brightness of the screen by reducing the grayscale voltage of the pixel in the liquid crystal display screen in case of extremely dark ambient light is achieved.

[0035] Fig. 3 is a flow chart of another method for reducing display brightness, according to an exemplary embodiment. In this embodiment, the method for reducing the display brightness is applied to a mobile terminal including a liquid crystal display screen. The method for reducing the display brightness may include the following steps:

Step 301: acquiring a light intensity value of current ambient light.

[0036] The light intensity value of the current ambient light refers to light intensity of the current ambient light.

[0037] Optionally, the mobile terminal acquires the light intensity value of the current ambient light via a built-in light intensity sensor; and

In this embodiment, an acquisition manner for the light intensity value of the ambient light will not be limited.

[0038] Step 302: reading a current night display level according to the light intensity value of the current ambient light.

[0039] Different light intensity values of the ambient light correspond to different night display levels. If the light intensity value of the ambient light is $0-501x$, the terminal is in a night display mode, wherein $1x$ is unit of light intensity. The light intensity values of the ambient light are divided in to 5 intervals, with every 10 forming an interval, and the intervals of the light intensity values of the ambient light correspond to night display levels. For example, a corresponding relationship between a light intensity value and a night display level is shown in Table 1:

Table 1

Interval of light intensity value	Night display level
(40-50)	Level 1
(30-40)	Level 2
(20-30)	Level 3
(10-20)	Level 4
(0-10)	Level 5

[0040] If the light intensity value of the current ambient light is 25, it can be seen from the corresponding relationship in Table 1 that the night display level of the mobile terminal is at level 3. When the brightness of the ambient light is lower, the night display level will be higher.

[0041] Step 303: reading, according to a current night display level, the transformed gamma curve corresponding to the current night display level.

[0042] Different night display levels correspond to different transformed gamma curves, and different transformed gamma curves correspond to different preset ratios.

[0043] The mobile terminal is pre-stored with a plurality of transformed gamma curves, and each gamma curve corresponds to a night display level.

[0044] Since each transformed gamma curve is obtained by transforming an initial gamma curve according to a preset ratio, different transformed gamma curves correspond to their own preset ratios.

[0045] There is a corresponding relationship between a night display level and a preset ratio of a transformed gamma curve. When the liquid crystal display level is higher, the preset ratio of the transformed gamma curve corresponding to the liquid crystal display level will be lower.

[0046] For example, the corresponding relationship between the night display level and the preset ratio is shown in the following table:

Table 2

Night display level	Preset ratio
Level 1	85%
Level 2	75%
Level 3	65%

(continued)

Night display level	Preset ratio
Level 4	55%
Level 5	45%

[0047] According to the corresponding relationship in Table 2, the transformed gamma curve corresponding to level 1 is obtained by transforming the initial gamma curve according to the ratio of 85%; the transformed gamma curve corresponding to level 2 is obtained by transforming the initial gamma curve according to the ratio of 75%; the transformed gamma curve corresponding to level 3 is obtained by transforming the initial gamma curve according to the ratio of 65%; the transformed gamma curve corresponding to level 4 is obtained by transforming the initial gamma curve according to the ratio of 55%; and the transformed gamma curve corresponding to level 1 is obtained by transforming the initial gamma curve according to the ratio of 45%.

[0048] The mobile terminal determines, according to the current night display level, the gamma curve currently required to be used should be the transformed gamma curve corresponding to the current night display level.

[0049] For example, if the current night display level is level 2, the mobile terminal determines that the transformed gamma curve corresponding to level 2 should be the gamma curve currently required to be used. The gamma curve is obtained by transforming the initial gamma curve according to the ratio of 75%.

[0050] In this embodiment, the relationship between the light intensity value of the ambient light and the corresponding night display level in Table 1 and the relationship between the night display level and the preset ratio in Table 2 are only provided for illustrative purposes, and no special limits should be imposed on the two relationships in this embodiment.

[0051] Step 304: querying a corresponding grayscale voltage in the transformed gamma curve according to a grayscale pixel value of a pixel to be displayed.

[0052] When a frame of image is displayed, for each pixel to be displayed in the image, there is a corresponding grayscale pixel value.

[0053] The mobile terminal queries the grayscale voltage corresponding to the grayscale pixel value of the pixel to be displayed according to the transformed gamma curve.

[0054] Step 305: at a scanning moment corresponding to the pixel, outputting the grayscale voltage to a data line corresponding to the pixel in the liquid crystal display screen.

[0055] For a liquid crystal unit corresponding to each pixel, there is a scanning line and a data line in a liquid crystal driver circuit.

[0056] When the pixel is displayed, the liquid crystal driver circuit sends a scanning signal to the scanning line corresponding to the pixel, and simultaneously inputs the grayscale voltage corresponding to the pixel to the data line corresponding to the pixel, such that the pixel will have a display brightness corresponding to the grayscale voltage.

[0057] The grayscale voltage is a voltage reduced relative to an initial grayscale voltage, so that the display brightness of the liquid crystal display screen is reduced.

[0058] It should be appreciated that the transformed gamma curve is pre-stored in a memory, and it may be accessed by the mobile terminal. Meanwhile, the relationship between the light intensity value of the ambient light and the night display level and the relationship between the night display level and the preset ratio are also be preset, and no special limits should be imposed on the two relationships in this embodiment, and they may be autonomously set by those skilled in the art.

[0059] In view of the above, according to the method for reducing the display brightness in this embodiment, the light intensity value of the current ambient light is acquired, the current night display level is read according to the light intensity value of the current ambient light, the transformed gamma curve corresponding to the night display level is read according to the current night display level, the corresponding grayscale voltage in the transformed gamma curve is queried, and the queried grayscale voltage is output to the data line corresponding to the pixel in the liquid crystal display screen at the scanning moment corresponding to the pixel, so that the problem of incapability in meeting a requirement on the ambient light by regulating brightness of a backlight or a background color of a UI in case of extremely dark ambient light is solved, and the effect of reducing the brightness of the screen by reducing the grayscale voltage of the pixel in the liquid crystal display screen in case of extremely dark ambient light is achieved.

[0060] The embodiments shown in Figs. 2-3 involve acquisition of the transformed gamma curve pre-stored in the memory. The transformed gamma curve may be obtained by transformation according to the initial gamma curve and the preset ratio. As shown in Fig. 4, a transformation process includes:

Step 401: multiplying a maximum grayscale pixel value $N_{\max}$ by the preset ratio to obtain a target grayscale pixel value N_x .

[0061] For example, the maximum grayscale pixel value is 255, the preset ratio is 85%, and then the target grayscale pixel value 216 is obtained by $255 \times 85\%$.

[0062] Optionally, in this embodiment, if a numerical value obtained by multiplication of the maximum grayscale pixel value and the preset ratio is not an integer, an integer is obtained by rounding up or rounding down, and is determined as the target grayscale pixel value.

[0063] Step 402: querying a grayscale voltage corresponding to the target grayscale pixel value N_x in the initial gamma curve, and determining the grayscale voltage as a grayscale voltage V_{max} corresponding to the maximum grayscale pixel value N_{max} .

[0064] The grayscale voltage corresponding to the target grayscale pixel value is queried in the initial gamma curve according to the obtained target grayscale pixel value, the queried grayscale voltage corresponding to the target grayscale pixel value is determined as the grayscale voltage corresponding to the maximum grayscale pixel value, and then brightness corresponding to the maximum grayscale pixel value is converted into the preset ratio of original brightness.

[0065] For example, the maximum grayscale pixel value is 255, the preset ratio is 85%, and then the target grayscale pixel value 216 is obtained by rounding down according to $255 \times 85\% = 216.75$. An initial grayscale voltage 5v corresponding to the maximum grayscale pixel value 255 may be queried in the initial gamma curve, the grayscale voltage 4.7v corresponding to the target grayscale pixel value 216, and then the grayscale voltage 4.7v corresponding to the target grayscale pixel value 216 is determined as a new transformed grayscale voltage corresponding to the maximum grayscale pixel value 255. That is, the grayscale voltage corresponding to the maximum grayscale pixel value 255 is reduced from original 5v to transformed 4.7v.

[0066] Step 403: querying a brightness value B_{max} corresponding to the grayscale voltage V_{max} in a brightness-voltage curve.

[0067] The brightness-voltage curve includes a corresponding relationship between brightness and a grayscale voltage. For the same liquid crystal display screen, the brightness-voltage curve is constant, and for example, 1,024 grayscale voltages correspond to 1,024 brightness values.

[0068] The maximum brightness value B_{max} corresponding to the grayscale voltage V_{max} , i.e. the brightness value corresponding to 4.7v, is queried in the brightness-voltage curve.

[0069] Each brightness value B_n corresponding to another grayscale pixel value N is measured according to the queried maximum brightness value B_{max} and the following formula:

$$(N / N_{max})^{\gamma} \text{ gamma value} = B_n / B_{max}$$

[0070] Optionally, the gamma value is 2.2, and a value range of N is $[0, N_{max})$. For example, N may be 0, 1, 2, 3, 4, 5, 6 and up to 255.

[0071] Step 404: querying a grayscale voltage corresponding to the brightness value B_n in the brightness-voltage curve as a grayscale voltage corresponding to the grayscale pixel value N .

[0072] A grayscale voltage corresponding to each brightness value B_n , i.e. the grayscale voltage corresponding to the grayscale pixel value N , is queried in the brightness-voltage curve according to each measured brightness value B_n corresponding to the grayscale pixel value N .

[0073] Step 405: obtaining the transformed gamma curve according to the grayscale voltage corresponding to the grayscale pixel value N and the grayscale voltage corresponding to the maximum grayscale pixel value N_{max} .

[0074] By the abovementioned process, the grayscale voltages corresponding to the grayscale pixel values 0-255 may be calculated, and the transformed gamma curve may be obtained according to the grayscale voltages corresponding to these grayscale pixel values 0-255.

[0075] Optionally, the abovementioned process may be carried out by the mobile terminal, and may also be carried out by an external device and then stored in the mobile terminal. In the present disclosure, the entity for carrying out the abovementioned process will not be limited.

[0076] It should be appreciated that, other than reducing the grayscale voltage corresponding to the grayscale pixel value, reducing the display brightness according to the present disclosure may further include, for example, maximally reducing the brightness of the backlight, changing the background color of the UI into black or another dark color. Under the condition that the requirement on the current ambient light still cannot be met when the brightness of the backlight is maximally reduced, the embodiment may further reduce the display brightness.

[0077] A device embodiment of the present disclosure is described below, and may be configured to execute the method embodiment of the present disclosure. Undisclosed details in the device embodiment of the present disclosure may refer to the method embodiment of the present disclosure.

[0078] Fig. 5 is a block diagram of a device for reducing display brightness, according to an exemplary embodiment. In this embodiment, the device for reducing the display brightness may be applied to a mobile terminal including a liquid crystal display screen. The device for reducing the display brightness may include:

an acquisition module 510 configured to acquire a transformed gamma curve, wherein the transformed gamma curve is a gamma curve obtained by reducing a grayscale voltage in an initial gamma curve according to a preset ratio and the preset ratio is smaller than 1 and more than 0;
 a querying module 520 configured to query a corresponding grayscale voltage in the transformed gamma curve according to a grayscale pixel value of a pixel to be displayed; and
 an output module 530 configured to, at a scanning moment corresponding to the pixel, output the grayscale voltage to a data line corresponding to the pixel in a liquid crystal display screen.

[0079] In view of the above, according to the device for reducing the display brightness provided in this embodiment, the transformed gamma curve is acquired, the corresponding grayscale voltage in the transformed gamma curve is queried according to the grayscale pixel value of the pixel to be displayed, and the queried grayscale voltage is output to the data line corresponding to the pixel in the liquid crystal display screen at the scanning moment corresponding to the pixel, so that the problem of incapability in meeting a requirement on ambient light by regulating brightness of a backlight or a background color of a UI in case of extremely dark ambient light is solved, and the effect of reducing the brightness of the screen by reducing the grayscale voltage of the pixel in the liquid crystal display screen in case of extremely dark ambient light is achieved.

[0080] Fig. 6A is a block diagram of another device for reducing display brightness, according to an exemplary embodiment. In this embodiment, the device for reducing the display brightness may be applied to a mobile terminal including a liquid crystal display screen, for example. The device for reducing the display brightness may include:

a calculation module 610, configured to calculate a transformed gamma curve according to an initial gamma curve and a preset ratio, wherein

the module may, as shown in Fig. 6B, include the following module:

a target sub-module 611, configured to multiply a maximum grayscale pixel value $N_{\max}$ by the preset ratio to obtain a target grayscale pixel value N_x , wherein

[0081] Optionally, if the target grayscale pixel value obtained by multiplication of the maximum grayscale pixel value and the preset ratio is not an integer, the target grayscale pixel value may be rounded up or rounded down in the embodiment;

[0082] In order to obtain different brightness levels, the preset ratio may optionally be 85% or 75% or 70%, and a value of the preset ratio is not limited, and may be set according to a requirement of a user in the embodiment;

a first querying sub-module 612, configured to query a grayscale voltage corresponding to the target grayscale pixel value N_x in an initial gamma curve, and determine the grayscale voltage as a grayscale voltage $V_{\max}$ corresponding to the maximum grayscale pixel value $N_{\max}$;

a second querying sub-module 613, configured to query a brightness value $B_{\max}$ corresponding to the grayscale voltage $V_{\max}$ in a brightness-voltage curve.

[0083] The brightness-voltage curve includes a corresponding relationship between brightness and a grayscale voltage;

a measurement sub-module 614, configured to measure a brightness value B_n corresponding to a grayscale pixel value N according to the following formula:

$$(N / N_{\max})^{\hat{\gamma}} \text{gamma value} = B_n / B_{\max},$$

wherein

[0084] Optionally, the gamma value is 2.2 and a value range of N is $[0, N_{\max})$;

a third querying sub-module 615, configured to query a grayscale voltage corresponding to the brightness value B_n in the brightness-voltage curve as a grayscale voltage corresponding to the grayscale pixel value N ;

a transformation sub-module 616, configured to obtain the transformed gamma curve according to the grayscale voltage corresponding to the grayscale pixel value N and the grayscale voltage corresponding to the maximum grayscale pixel value $N_{\max}$;

a storage module 620, configured to store the transformed gamma curve;

an acquisition module 630, configured to acquire the transformed gamma curve, the transformed gamma curve being a gamma curve obtained by reducing the grayscale voltage in the initial gamma curve according to the preset ratio and the preset ratio being smaller than 1 and more than 0, wherein

the module may include the following modules:

a reading sub-module 630a, configured to read, according to the night display level, the transformed gamma curve corresponding to the current night display level,

wherein different night display levels correspond to different transformed gamma curves, and different transformed gamma curves correspond to different preset ratios;

a querying module 640, configured to query a corresponding grayscale voltage in the transformed gamma curve according to a grayscale pixel value of a pixel to be displayed; and

an output module 650, configured to, at a scanning moment corresponding to the pixel, output the grayscale voltage to a data line corresponding to the pixel in a liquid crystal display screen.

[0085] With respect to the devices in the above embodiments, the specific manners for performing operations for individual modules therein have been described in detail in the embodiments regarding the related methods, which will not be elaborated herein.

[0086] In view of the above, according to the device for reducing the display brightness in the embodiment, the transformed gamma curve is calculated according to the initial gamma curve and the preset ratio, the transformed gamma curve corresponding to the current night display level is read according to the current night display level, the corresponding grayscale voltage in the transformed gamma curve is queried according to the grayscale pixel value of the pixel to be displayed, and the queried grayscale voltage is output to the data line corresponding to the pixel in the liquid crystal display screen at the scanning moment corresponding to the pixel, so that the problem of incapability in meeting a requirement on ambient light by regulating brightness of a backlight or a background color of a UI in case of extremely dark ambient light is solved, and the effect of reducing the brightness of the screen by reducing the grayscale voltage of the pixel in the liquid crystal display screen in case of extremely dark ambient light is achieved.

[0087] Fig. 7 is a block diagram of a device for reducing display brightness, according to an exemplary embodiment. For example, the device 700 may be a mobile phone, a computer, a digital broadcast terminal, a messaging device, a gaming console, a tablet, a medical device, exercise equipment, a personal digital assistant and the like.

[0088] Referring to Fig. 7, the device 700 may include one or more of the following components: a processing component 702, a memory 704, a power component 706, a multimedia component 708, an audio component 710, an Input/Output (I/O) interface 712, a sensor component 714, and a communication component 716.

[0089] The processing component 702 typically controls overall operations of the device 700, such as the operations associated with display, telephone calls, data communications, camera operations, and recording operations. The processing component 702 may include one or more processors 718 to execute instructions to perform all or part of the steps in the abovementioned methods. Moreover, the processing component 702 may include one or more modules which facilitate interaction between the processing component 702 and the other components. For instance, the processing component 702 may include a multimedia module to facilitate interaction between the multimedia component 708 and the processing component 702.

[0090] The memory 704 is configured to store various types of data to support the operation of the device 700. Examples of such data include instructions for any applications or methods operated on the device 700, contact data, phonebook data, messages, pictures, video, etc. The memory 704 may be implemented by any type of volatile or non-volatile memory devices, or a combination thereof, such as a Static Random Access Memory (SRAM), an Electrically Erasable Programmable Read-Only Memory (EEPROM), an Erasable Programmable Read-Only Memory (EPROM), a Programmable Read-Only Memory (PROM), a Read-Only Memory (ROM), a magnetic memory, a flash memory, and a magnetic or optical disk.

[0091] The power component 706 provides power for various components of the device 700. The power component 706 may include a power management system, one or more power supplies, and other components associated with the generation, management and distribution of power for the device 700.

[0092] The multimedia component 708 includes a screen providing an output interface between the device 700 and the user. In some embodiments, the screen may include an LCD and a Touch Panel (TP). If the screen includes the TP, the screen may be implemented as a touch screen to receive an input signal from the user. The TP includes one or more touch sensors to sense touches, swipes and gestures on the TP. The touch sensors may not only sense a boundary of a touch or swipe action, but also sense a duration and pressure associated with the touch or swipe action. In some embodiments, the multimedia component 708 includes a front camera and/or a rear camera. The front camera and/or the rear camera may receive external multimedia data when the device 700 is in an operation mode, such as a photographing mode or a video mode. Each of the front camera and the rear camera may be a fixed optical lens system or have focusing and optical zooming capabilities.

[0093] The audio component 710 is configured to output and/or input an audio signal. For example, the audio component 710 includes a microphone (MIC), and the MIC is configured to receive an external audio signal when the device 700 is in the operation mode, such as a call mode, a recording mode and a voice recognition mode. The received audio signal may be further stored in the memory 704 or sent through the communication component 716. In some embodiments, the audio component 710 further includes a speaker configured to output the audio signal.

[0094] The I/O interface 712 provides an interface between the processing component 702 and a peripheral interface module, and the peripheral interface module may be a keyboard, a click wheel, a button and the like. The button may

include, but not limited to: a home button, a volume button, a starting button and a locking button.

[0095] The sensor component 714 includes one or more sensors configured to provide status assessment in various aspects for the device 700. For instance, the sensor component 714 may detect an on/off status of the device 700 and relative positioning of components, such as a display and small keyboard of the device 700, and the sensor component 714 may further detect a change in a position of the device 700 or a component of the device 700, presence or absence of contact between the user and the device 700, orientation or acceleration/deceleration of the device 700 and a change in temperature of the device 700. The sensor component 714 may include a proximity sensor configured to detect presence of an object nearby without any physical contact. The sensor component 714 may also include a light sensor, such as a Complementary Metal Oxide Semiconductor (CMOS) or Charge Coupled Device (CCD) image sensor, configured for use in an imaging application. In some embodiments, the sensor component 714 may also include an acceleration sensor, a gyroscope sensor, a magnetic sensor, a pressure sensor or a temperature sensor.

[0096] The communication component 716 is configured to facilitate wired or wireless communication between the device 700 and another device. The device 700 may access a communication-standard-based wireless network, such as a Wireless Fidelity (WiFi) network, a 2nd-Generation (2G) or 3rd-Generation (3G) network or a combination thereof. In an exemplary embodiment, the communication component 716 receives a broadcast signal or broadcast associated information from an external broadcast management system through a broadcast channel. In an exemplary embodiment, the communication component 716 further includes a Near Field Communication (NFC) module to facilitate short-range communication. For example, the NFC module may be implemented on the basis of a Radio Frequency Identification (RFID) technology, an Infrared Data Association (IrDA) technology, an Ultra-WideBand (UWB) technology, a Bluetooth (BT) technology and another technology.

[0097] In the exemplary embodiment, the device 700 may be implemented by one or more Application Specific Integrated Circuits (ASICs), Digital Signal Processors (DSPs), Digital Signal Processing Devices (DSPDs), Programmable Logic Devices (PLDs), Field Programmable Gate Arrays (FPGAs), controllers, micro-controllers, microprocessors or other electronic components, and is configured to execute the abovementioned methods.

[0098] In the exemplary embodiment, there is also provided a non-transitory computer-readable storage medium including an instruction, such as the memory 704 including an instruction, and the instruction may be executed by the processor 718 of the device 700 to implement the abovementioned methods. For example, the non-transitory computer-readable storage medium may be a ROM, a Random Access Memory (RAM), a Compact Disc Read-Only Memory (CD-ROM), a magnetic tape, a floppy disc, an optical data storage device and the like.

[0099] Other embodiments of the present disclosure will be apparent to those skilled in the art from consideration of the specification and practice of the present disclosure disclosed here. This application is intended to cover any variations, uses, or adaptations of the present disclosure following the general principles thereof and including such departures from the present disclosure as come within known or customary practice in the art. It is intended that the specification and examples be considered as exemplary only, with a true scope of the present disclosure being indicated by the following claims.

[0100] It will be appreciated that the present disclosure is not limited to the exact construction that has been described above and illustrated in the accompanying drawings, and that various modifications and changes may be made without departing from the scope thereof. It is intended that the scope of the present disclosure only be limited by the appended claims.

INDUSTRIAL APPLICABILITY

[0101] According to the present disclosure, the transformed gamma curve is acquired, the corresponding grayscale voltage in the transformed gamma curve is queried according to the grayscale pixel value of the pixel to be displayed, and the queried grayscale voltage is output to the data line corresponding to the pixel in the liquid crystal display screen at the scanning moment corresponding to the pixel, so that the problem of incapability in meeting the requirement on the ambient light by regulating the brightness of the backlight or a background color of a User Interface (UI) in case of extremely dark ambient light is solved, and the effect of reducing the brightness of the screen by reducing the grayscale voltage of the pixel in the liquid crystal display screen in case of extremely dark ambient light is achieved.

Claims

1. A method for reducing display brightness, the method comprising:

acquiring a transformed gamma curve, wherein the transformed gamma curve is a gamma curve obtained by reducing a grayscale voltage in an initial gamma curve according to a preset ratio and the preset ratio is smaller than 1 and more than 0 (201);

querying a corresponding grayscale voltage in the transformed gamma curve according to a grayscale pixel value of a pixel to be displayed (202); and
 at a scanning moment corresponding to the pixel, outputting the grayscale voltage to a data line corresponding to the pixel in a liquid crystal display screen (203),

wherein before the step of acquiring a transformed gamma curve, the method further comprises:

calculating the transformed gamma curve according to the initial gamma curve and the preset ratio; and
 storing the transformed gamma curve,

wherein the step of calculating the transformed gamma curve according to the initial gamma curve and the preset ratio comprises:

multiplying a maximum grayscale pixel value by the preset ratio to obtain a target grayscale pixel value N_x (401);

querying a grayscale voltage corresponding to the target grayscale pixel value N_x in the initial gamma curve, and setting the grayscale voltage as a grayscale voltage V_{max} corresponding to a maximum grayscale pixel value N_{max} set as N_x (402);

querying a brightness value B_{max} corresponding to the grayscale voltage V_{max} in a brightness-voltage curve (403);

measuring a brightness value B_n corresponding to a grayscale pixel value N according to the following formula:

$$(N/N_{max})^{(gamma\ value)} = (B_n/B_{max});$$

querying a grayscale voltage corresponding to the brightness value B_n in the brightness-voltage curve as a grayscale voltage corresponding to the grayscale pixel value N (404); and

obtaining the transformed gamma curve according to the grayscale voltage corresponding to the grayscale pixel value N and the grayscale voltage corresponding to the maximum grayscale pixel value N_{max} (405);

wherein the brightness-voltage curve comprises a corresponding relationship between brightness and a grayscale voltage, and a value range of N is $[0, N_{max}]$.

2. The method according to claim 1, wherein the step of acquiring a transformed gamma curve comprises:

reading, according to a current night display level, the transformed gamma curve corresponding to the current night display level (303);

wherein different night display levels correspond to different transformed gamma curves, and different transformed gamma curves correspond to different preset ratios.

3. The method according to claim 1, wherein the gamma value is 2.2.

4. A device for reducing display brightness, **characterized in that** the device comprising:

an acquisition module (510) configured to acquire a transformed gamma curve, wherein the transformed gamma curve is a gamma curve obtained by reducing a grayscale voltage in an initial gamma curve according to a preset ratio and the preset ratio is smaller than 1 and more than 0;

a querying module (520) configured to query a corresponding grayscale voltage in the transformed gamma curve according to a grayscale pixel value of a pixel to be displayed; and

an output module (530) configured to, at a scanning moment corresponding to the pixel, output the grayscale voltage to a data line corresponding to the pixel in a liquid crystal display screen,

wherein the device further comprises:

a calculation module (610) configured to calculate the transformed gamma curve according to the initial gamma curve and the preset ratio; and

a storage module (620) configured to store the transformed gamma curve,

wherein the calculation module (610) comprises:

a target sub-module (611) configured to multiply a maximum grayscale pixel value by the preset ratio to obtain a target grayscale pixel value N_x ;

a first querying sub-module (612) configured to query a grayscale voltage corresponding to the target grayscale pixel value N_x in the initial gamma curve, and set the grayscale voltage as a grayscale voltage V_{max} corresponding to a maximum grayscale pixel value N_{max} set as N_x ;

a second querying sub-module (613) configured to query a brightness value B_{max} corresponding to the grayscale voltage V_{max} in a brightness-voltage curve;

a measurement sub-module (614) configured to measure a brightness value B_n corresponding to a grayscale pixel value N according to the following formula:

$$(N/N_{max})^{(gamma\ value)} = (B_n/B_{max});$$

a third querying sub-module (615) configured to query a grayscale voltage corresponding to the brightness value B_n in the brightness-voltage curve as a grayscale voltage corresponding to the grayscale pixel value N ; and

a transformation sub-module (616) configured to obtain the transformed gamma curve according to the grayscale voltage corresponding to the grayscale pixel value N and the grayscale voltage corresponding to the maximum grayscale pixel value N_{max} ,

wherein the brightness-voltage curve comprises a corresponding relationship between brightness and a grayscale voltage, and a value range of N is $[0, N_{max}]$.

5. The device according to claim 4, wherein the acquisition module (630) further comprises:

a reading sub-module (630a) configured to read, according to the night display level, the transformed gamma curve corresponding to the current night display level;

wherein different night display levels correspond to different transformed gamma curves, and different transformed gamma curves correspond to different preset ratios.

6. The device according to claim 4, wherein the gamma value is 2.2.

7. A device for reducing display brightness, comprising:

a processor (718); and

a memory (704) configured to store executable instructions of the processor (718),

characterized in that the processor is configured to carry out the method of any of claims 1 to 3.

8. A computer program including instructions for executing the steps of a method for reducing display brightness according to any one of claims 1 to 3 when said program is executed by a computer.

9. A recording medium readable by a computer and having recorded thereon a computer program including instructions that when executed by a computing device cause it to carry out the steps of a method for reducing display brightness according to any one of claims 1 to 3.

Patentansprüche

1. Verfahren zum Reduzieren von Anzeigehelligkeit, wobei das Verfahren Folgendes beinhaltet:

Erfassen einer transformierten Gamma-Kurve, wobei die transformierte Gamma-Kurve eine Gamma-Kurve ist, die durch Reduzieren einer Graustufenspannung in einer anfänglichen Gamma-Kurve gemäß einem voreingestellten Verhältnis erhalten wird und das voreingestellte Verhältnis kleiner als 1 und größer als 0 ist (201);

Abfragen einer entsprechenden Graustufenspannung in der transformierten Gamma-Kurve gemäß einem Graustufenpixelwert eines anzuzeigenden Pixels (202); und

Ausgeben der Graustufenspannung, zu einem dem Pixel entsprechenden Abtastmoment, an eine Datenleitung entsprechend dem Pixel in einem Flüssigkristallanzeigeschirm (203),

wobei das Verfahren vor dem Schritt des Erfassens einer transformierten Gamma-Kurve ferner Folgendes

beinhaltet:

Berechnen der transformierten Gamma-Kurve gemäß der anfänglichen Gamma-Kurve und dem voreingestellten Verhältnis; und
 Speichern der transformierten Gamma-Kurve,

wobei der Schritt des Berechnens der transformierten Gamma-Kurve gemäß der anfänglichen Gamma-Kurve und dem voreingestellten Verhältnis Folgendes beinhaltet:

Multiplizieren eines maximalen Graustufenpixelwertes mit dem voreingestellten Verhältnis, um einen Ziel-Graustufenpixelwert N_x zu erhalten (401);
 Abfragen einer Graustufenspannung entsprechend dem Ziel-Graustufenpixelwert N_x in der anfänglichen Gamma-Kurve und Einstellen der Graustufenspannung als eine Graustufenpannung V_{max} entsprechend einem als N_x eingestellten maximalen Graustufenpixelwert N_{max} (402);
 Abfragen eines Helligkeitswertes B_{max} entsprechend der Graustufenpannung V_{max} in einer Helligkeits-Spannungs-Kurve (403);
 Messen eines Helligkeitswertes B_n entsprechend einem Graustufenpixelwert N gemäß der folgenden Formel:

$$(N/N_{max})^{(Gamma-Wert)} = (B_n/B_{max});$$

Abfragen einer Graustufenpannung entsprechend dem Helligkeitswert B_n in der Helligkeits-Spannungs-Kurve als eine Graustufenpannung entsprechend dem Graustufenpixelwert N (404); und
 Einholen der transformierten Gamma-Kurve gemäß der Graustufenpannung entsprechend dem Graustufenpixelwert N und der Graustufenpannung entsprechend dem maximalen Graustufenpixelwert N_{max} (405);
 wobei die Helligkeits-Spannungs-Kurve eine entsprechende Beziehung zwischen Helligkeit und Graustufenpannung umfasst und ein Wertebereich von N $[0, N_{max})$ ist.

2. Verfahren nach Anspruch 1, wobei der Schritt des Erfassens einer transformierten Gamma-Kurve Folgendes beinhaltet:

Ablesen, gemäß einem aktuellen Nachtanzeigepiegel, der transformierten Gamma-Kurve entsprechend dem aktuellen Nachtanzeigepiegel (303);
 wobei unterschiedliche Nachtanzeigepiegel unterschiedlichen transformierten Gamma-Kurven entsprechen und unterschiedliche transformierte Gamma-Kurven unterschiedlichen voreingestellten Verhältnissen entsprechen.

3. Verfahren nach Anspruch 1, wobei der Gamma-Wert 2,2 ist.

4. Gerät zum Reduzieren von Anzeigehelligkeit, **dadurch gekennzeichnet, dass** das Gerät Folgendes umfasst:

ein Erfassungsmodul (510), konfiguriert zum Erfassen einer transformierten Gamma-Kurve, wobei die transformierte Gamma-Kurve eine Gamma-Kurve ist, die durch Reduzieren einer Graustufenpannung in einer anfänglichen Gamma-Kurve gemäß einem voreingestellten Verhältnis erhalten wird und das voreingestellte Verhältnis kleiner als 1 und größer als 0 ist;
 ein Abfragemodul (520), konfiguriert zum Abfragen einer entsprechenden Graustufenpannung in der transformierten Gamma-Kurve gemäß einem Graustufenpixelwert eines anzuzeigenden Pixels; und
 ein Ausgabemodul (530), konfiguriert zum Ausgeben der Graustufenpannung, zu einem dem Pixel entsprechenden Abtastmoment, an eine Datenzeile entsprechend dem Pixel in einem Flüssigkristallanzeigeschirm, wobei das Gerät ferner Folgendes umfasst:

ein Rechenmodul (610), konfiguriert zum Berechnen der transformierten Gamma-Kurve gemäß der anfänglichen Gamma-Kurve und dem voreingestellten Verhältnis; und
 ein Speichermodul (620), konfiguriert zum Speichern der transformierten Gamma-Kurve, wobei das Rechenmodul (610) Folgendes umfasst:

ein Ziel-Submodul (611), konfiguriert zum Multiplizieren eines maximalen Graustufenpixelwertes mit dem voreingestellten Verhältnis, um einen Ziel-Graustufenpixelwert N_x zu erhalten;
 ein erstes Abfragesubmodul (612), konfiguriert zum Abfragen einer Graustufenspannung entsprechend dem Ziel-Graustufenpixelwert N_x in der anfänglichen Gamma-Kurve und zum Einstellen der Graustufen-
 5 Graustufenspannung als eine Graustufenpannung V_{max} entsprechend einem als N_x eingestellten maximalen Graustufenpixelwert N_{max} ;
 ein zweites Abfragesubmodul (613), konfiguriert zum Abfragen eines Helligkeitswertes B_{max} entsprechend der Graustufenpannung V_{max} in einer Helligkeits-Spannungs-Kurve;
 ein Messsubmodul (614), konfiguriert zum Messen eines Helligkeitswertes B_n entsprechend einem
 10 Graustufenpixelwert N gemäß der folgenden Formel:

$$(N/N_{max})^{(Gamma-Wert)} = (B_n/B_{max});$$

ein drittes Abfragesubmodul (615), konfiguriert zum Abfragen einer Graustufenpannung entsprechend dem Helligkeitswert B_n in der Helligkeits-Spannungs-Kurve als eine Graustufenpannung entsprechend dem Graustufenpixelwert N ; und
 ein Transformationssubmodul (616), konfiguriert zum Erhalten der transformierten Gamma-Kurve entsprechend der Graustufenpannung entsprechend dem Graustufenpixelwert N und der Graustufen-
 20 spannung entsprechend dem maximalen Graustufenpixelwert N_{max} ,

wobei die Helligkeits-Spannungs-Kurve eine entsprechende Beziehung zwischen Helligkeit und einer Graustufenpannung umfasst und ein Wertebereich von N $[0, N_{max})$ ist.

5 5. Gerät nach Anspruch 4, wobei das Erfassungsmodul (630) ferner Folgendes umfasst:

ein Ablesesubmodul (630a), konfiguriert zum Ablesen, gemäß dem Nachtanzeigepiegel, der transformierten Gamma-Kurve entsprechend dem aktuellen Nachtanzeigepiegel;
 wobei die unterschiedlichen Nachtanzeigepiegel unterschiedlichen transformierten Gamma-Kurven entsprechen und unterschiedliche transformierte Gamma-Kurven unterschiedlichen voreingestellten Verhältnissen entsprechen.
 30

6. Gerät nach Anspruch 4, wobei der Gamma-Wert 2,2 ist.

35 7. Gerät zum Reduzieren von Anzeigehelligkeit, das Folgendes umfasst:

einen Prozessor (718); und
 einen Speicher (704), konfiguriert zum Speichern von ausführbaren Befehlen des Prozessors (718),
dadurch gekennzeichnet, dass der Prozessor zum Durchführen des Verfahrens nach einem der Ansprüche
 40 1 bis 3 konfiguriert ist.

8. Computerprogramm, das Befehle zum Ausführen der Schritte eines Verfahrens zum Reduzieren von Anzeigehelligkeit nach einem der Ansprüche 1 bis 3 beinhaltet, wenn das genannte Programm von einem Computer ausgeführt wird.
 45

9. Aufzeichnungsmedium, das von einem Computer gelesen werden kann und auf dem ein Computerprogramm mit Befehlen aufgezeichnet ist, die bei Ausführung durch ein Computergerät bewirken, dass es die Schritte eines Verfahrens zum Reduzieren von Anzeigehelligkeit nach einem der Ansprüche 1 bis 3 durchführt.
 50

Revendications

1. Procédé de réduction d'une luminosité d'affichage, le procédé comprenant :

l'acquisition d'une courbe gamma transformée, la courbe gamma transformée étant une courbe gamme obtenue en réduisant une tension d'échelle de gris dans une courbe gamma initiale conformément à un rapport prédéfini et le rapport prédéfini étant inférieur à 1 et supérieur à 0 (201) ;

l'interrogation d'une tension d'échelle de gris correspondantes dans la courbe gamma transformée conformément à une valeur de pixel d'échelle de gris d'un pixel à afficher (202) ; et
à un moment de balayage correspondant au pixel, la production en sortie de la tension d'échelle de gris à destination d'une ligne de données correspondant au pixel dans un écran d'affichage à cristaux liquides (203),
le procédé comprenant en outre, avant l'étape d'acquisition d'une courbe gamma transformée :

le calcul de la courbe gamma transformée conformément à la courbe gamma initiale et au rapport prédéfini ;
et
la mémorisation de la courbe gamma transformée,

dans lequel l'étape de calcul de la courbe gamma transformée conformément à la courbe gamma initiale et au rapport prédéfini comprend :

la multiplication d'une valeur de pixel d'échelle de gris maximale par le rapport prédéfini pour obtenir une valeur de pixel d'échelle de gris cible N_x (401) ;
l'interrogation d'une tension d'échelle de gris correspondant à la valeur de pixel d'échelle de gris cible N_x dans la courbe gamma initiale, et l'établissement de la tension d'échelle de gris en tant que tension d'échelle de gris V_{max} correspondant à une valeur de pixel d'échelle de gris maximale N_{max} établie à N_x (402) ;
l'interrogation d'une valeur de luminosité B_{max} correspondant à la tension d'échelle de gris V_{max} dans une courbe luminosité-tension (403) ;
la mesure d'une valeur de luminosité B_n correspondant à une valeur de pixel d'échelle de gris N selon la formule suivante :

$$(N/N_{max})^{(valeur\ gamma)} = (B_n/B_{max}) ;$$

l'interrogation d'une tension d'échelle de gris correspondant à la valeur de luminosité B_n dans la courbe luminosité-tension en tant que tension d'échelle de gris correspondant à la valeur de pixel d'échelle de gris N (404) ; et
l'obtention de la courbe gamma transformée conformément à la tension d'échelle de gris correspondant à la valeur de pixel d'échelle de gris N et à la tension d'échelle de gris correspondant à la valeur de pixel d'échelle de gris maximale N_{max} (405) ;
dans lequel la courbe luminosité-tension comprend une relation correspondante entre la luminosité et une tension d'échelle de gris, et une plage de valeurs de N est $[0, N_{max}]$.

2. Procédé selon la revendication 1, dans lequel l'étape d'acquisition d'une courbe gamma transformée comprend :

la lecture, conformément à un niveau d'affichage nocturne courant, de la courbe gamma transformée correspondant au niveau d'affichage nocturne courant (303) ;
dans lequel différents niveaux d'affichage nocturne correspondent à différentes courbes gamma transformées, et différentes courbes gamma transformées correspondent à différents rapports prédéfinis.

3. Procédé selon la revendication 1, dans lequel la valeur gamme est 2,2.

4. Dispositif de réduction d'une luminosité d'affichage, **caractérisé en ce que** le dispositif comprend :

un module d'acquisition (510) configuré pour acquérir une courbe gamma transformée, la courbe gamma transformée étant une courbe gamme obtenue en réduisant une tension d'échelle de gris dans une courbe gamma initiale conformément à un rapport prédéfini et le rapport prédéfini étant inférieur à 1 et supérieur à 0 ;
un module d'interrogation (520) configuré pour interroger une tension d'échelle de gris conformément à une valeur de pixel d'échelle de gris d'un pixel à afficher ; et
un module de sortie (530) configuré pour, à un moment de balayage correspondant au pixel, produire en sortie la tension d'échelle de gris à destination d'une ligne de données correspondant au pixel dans un écran d'affichage à cristaux liquides,
le dispositif comprenant en outre :

un module de calcul (610) configuré pour calculer la courbe gamma transformée conformément à la courbe

gamma initiale et au rapport prédéfini ; et
un module de mémorisation (620) configuré pour mémoriser la courbe gamma transformée,

dans lequel le module de calcul (610) comprend :

un sous-module cible (611) configuré pour multiplier une valeur de pixel d'échelle de gris maximale par le rapport prédéfini pour obtenir une valeur de pixel d'échelle de gris cible N_x ;
un premier sous-module d'interrogation (612) configuré pour interroger une tension d'échelle de gris correspondant à la valeur de pixel d'échelle de gris cible N_x dans la courbe gamma initiale, et établir la tension d'échelle de gris en tant que tension d'échelle de gris V_{max} correspondant à une valeur de pixel d'échelle de gris maximale N_{max} établie à N_x ;
un deuxième sous-module d'interrogation (613) configuré pour interroger une valeur de luminosité B_{max} correspondant à la tension d'échelle de gris V_{max} dans une courbe luminosité-tension ;
un sous-module de mesure (614) configuré pour mesurer une valeur de luminosité B_n correspondant à une valeur de pixel d'échelle de gris N selon la formule suivante :

$$(N/N_{max})^{(valeur\ gamma)} = (B_n/B_{max}) ;$$

un troisième sous-module d'interrogation (615) configuré pour interroger une tension d'échelle de gris correspondant à la valeur de luminosité B_n dans la courbe luminosité-tension en tant que tension d'échelle de gris correspondant à la valeur de pixel d'échelle de gris N ; et
un sous-module de transformation (616) configuré pour obtenir la courbe gamma transformée conformément à la tension d'échelle de gris correspondant à la valeur de pixel d'échelle de gris N et à la tension d'échelle de gris correspondant à la valeur de pixel d'échelle de gris maximale N_{max} ,

dans lequel la courbe luminosité-tension comprend une relation correspondante entre la luminosité et une tension d'échelle de gris, et une plage de valeurs de N est $[0, N_{max}]$.

5. Dispositif selon la revendication 4, dans lequel le module d'acquisition (630) comprend en outre :

un sous-module de lecture (630a) configuré pour lire, conformément au niveau d'affichage nocturne courant, la courbe gamma transformée correspondant au niveau d'affichage nocturne courant ;
dans lequel différents niveaux d'affichage nocturne correspondent à différentes courbes gamma transformées, et différentes courbes gamma transformées correspondent à différents rapports prédéfinis.

6. Dispositif selon la revendication 4, dans lequel la valeur gamma est 2.2.

7. Dispositif de réduction d'une luminosité d'affichage, comprenant :

un processeur (718) ; et
une mémoire (704) configurée pour mémoriser des instructions exécutables du processeur (718),
caractérisé en ce que le processeur est configuré pour réaliser le procédé selon l'une quelconque des revendications 1 à 3.

8. Programme informatique comportant des instructions pour exécuter les étapes d'un procédé de réduction d'une luminosité d'affichage selon l'une quelconque des revendications 1 à 3 quand ledit programme est exécuté par un ordinateur.

9. Support d'enregistrement lisible par un ordinateur et sur lequel est enregistré un programme informatique comportant des instructions qui, à leur exécution par un dispositif informatique, amènent celui-ci à mettre en œuvre les étapes d'un procédé de réduction d'une luminosité d'affichage selon l'une quelconque des revendications 1 à 3.

Fig. 1

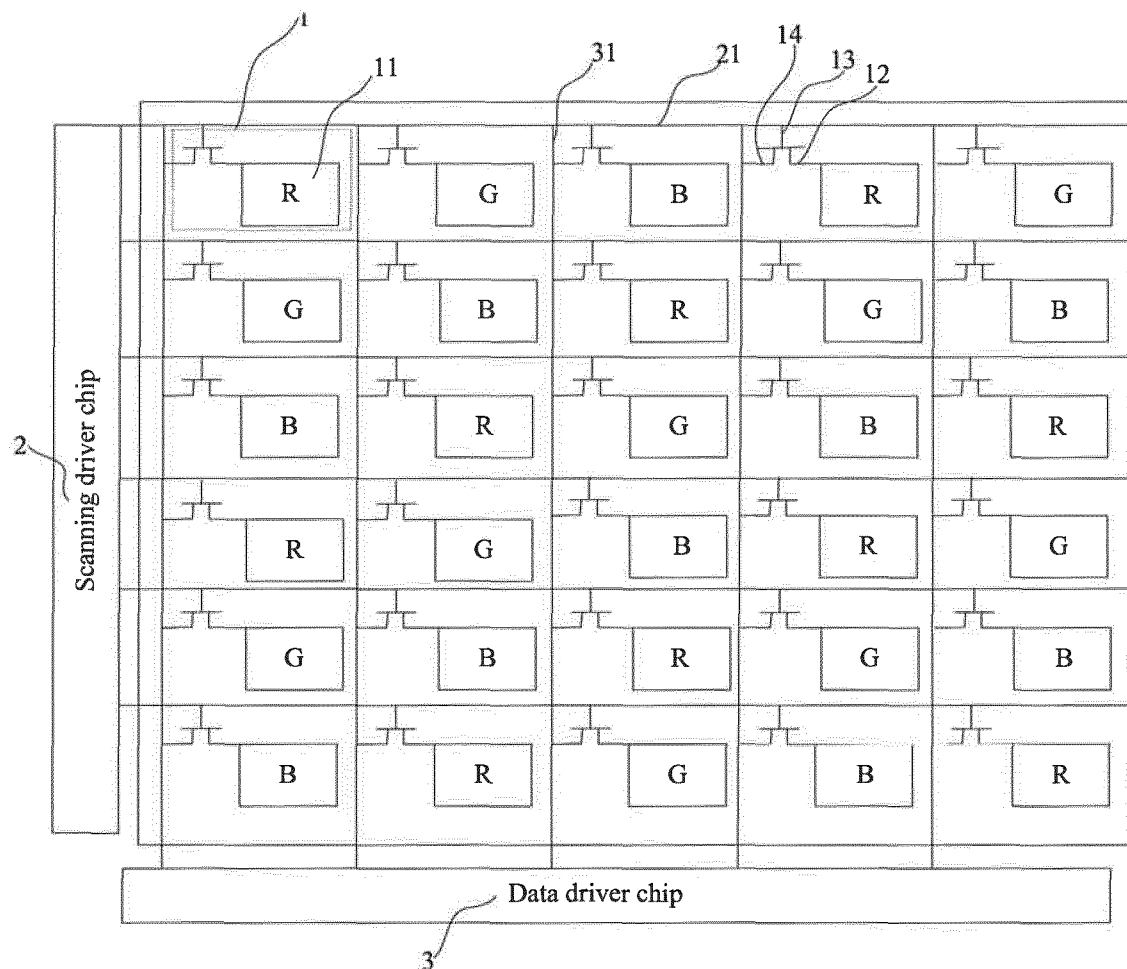


Fig. 2

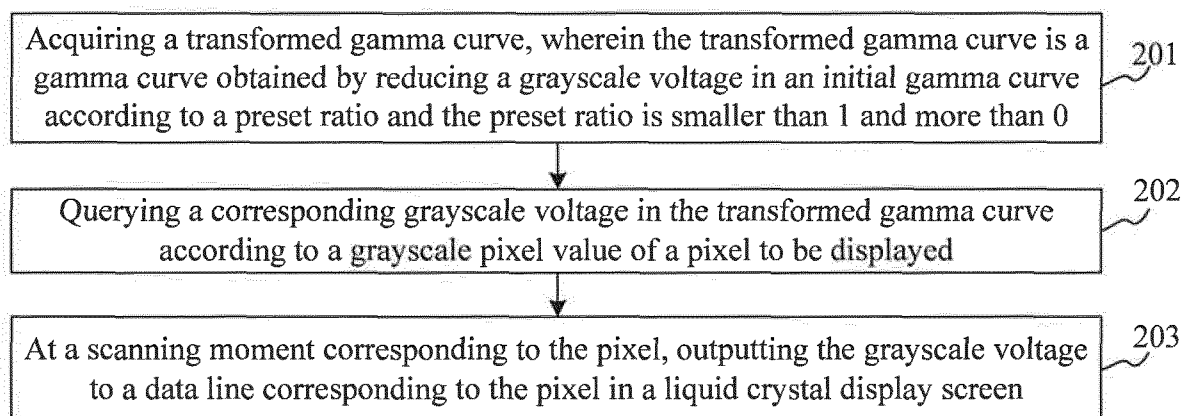


Fig. 3

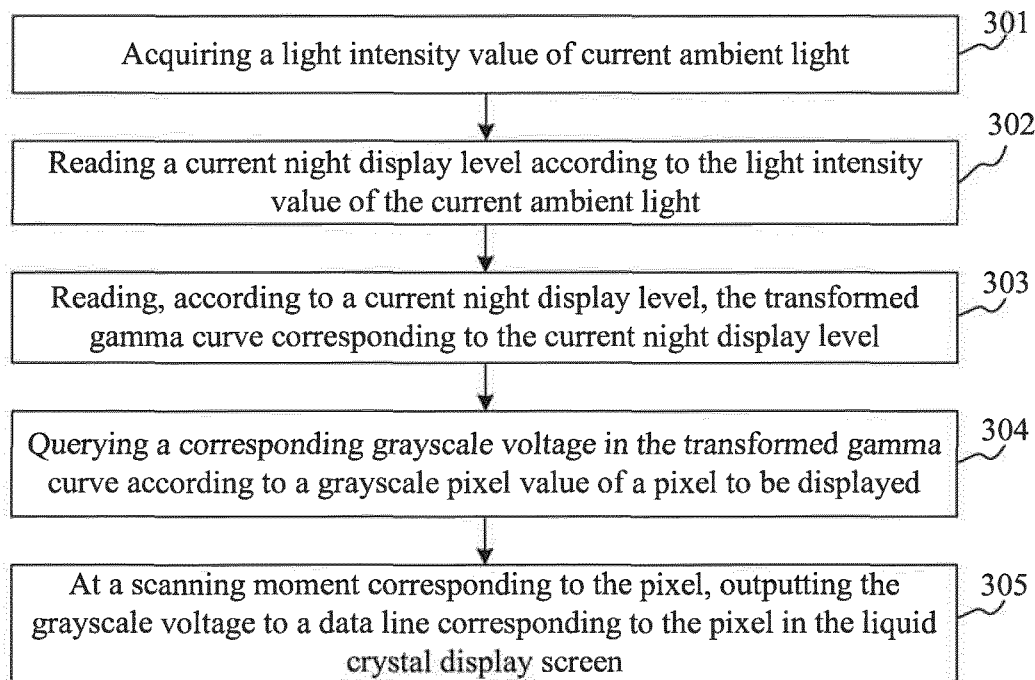


Fig. 4

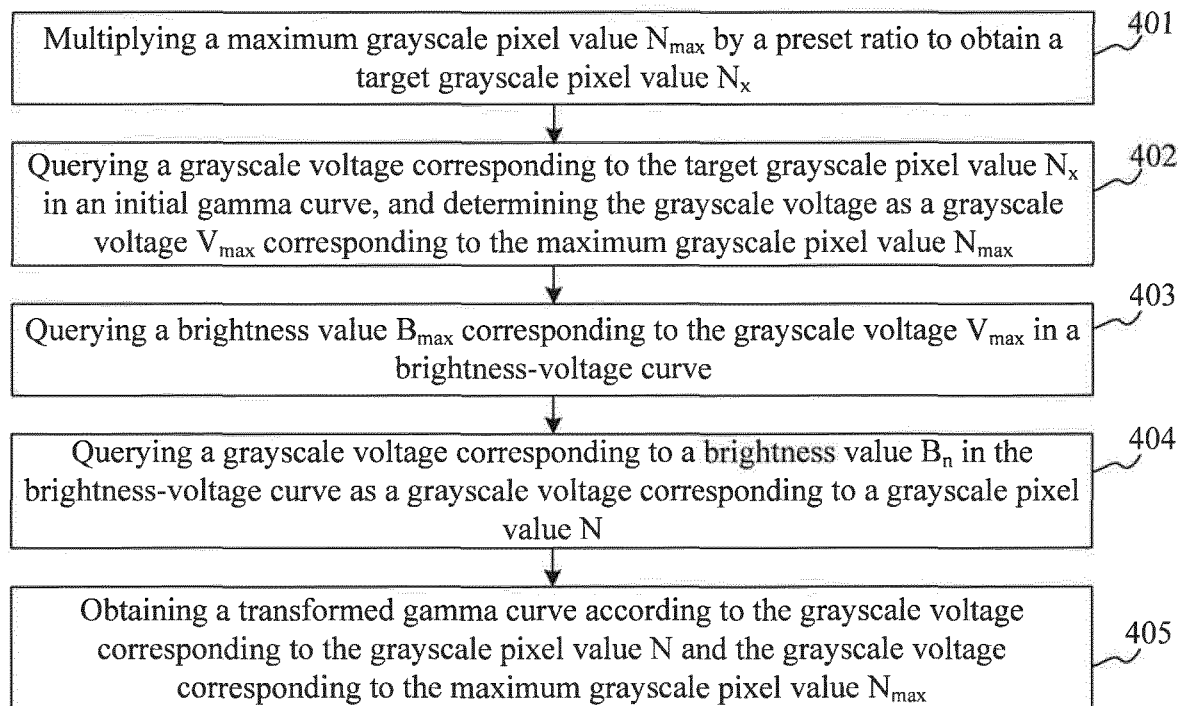


Fig. 5

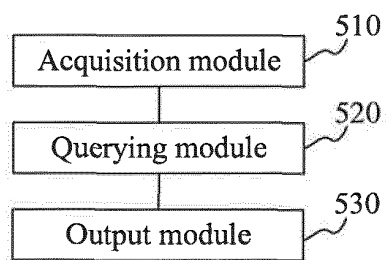


Fig. 6A

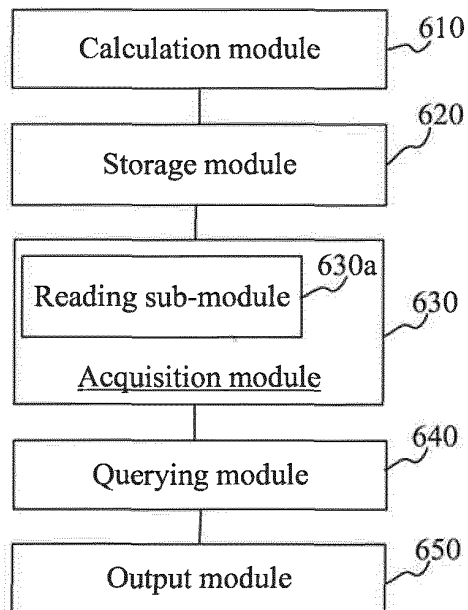


Fig. 6B


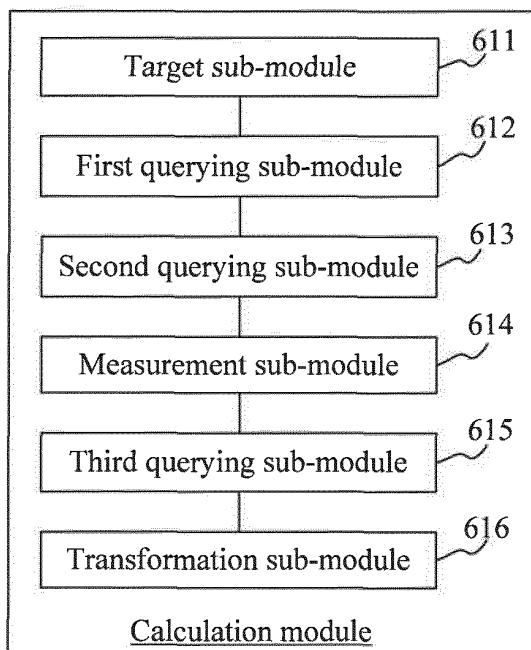


Fig. 7

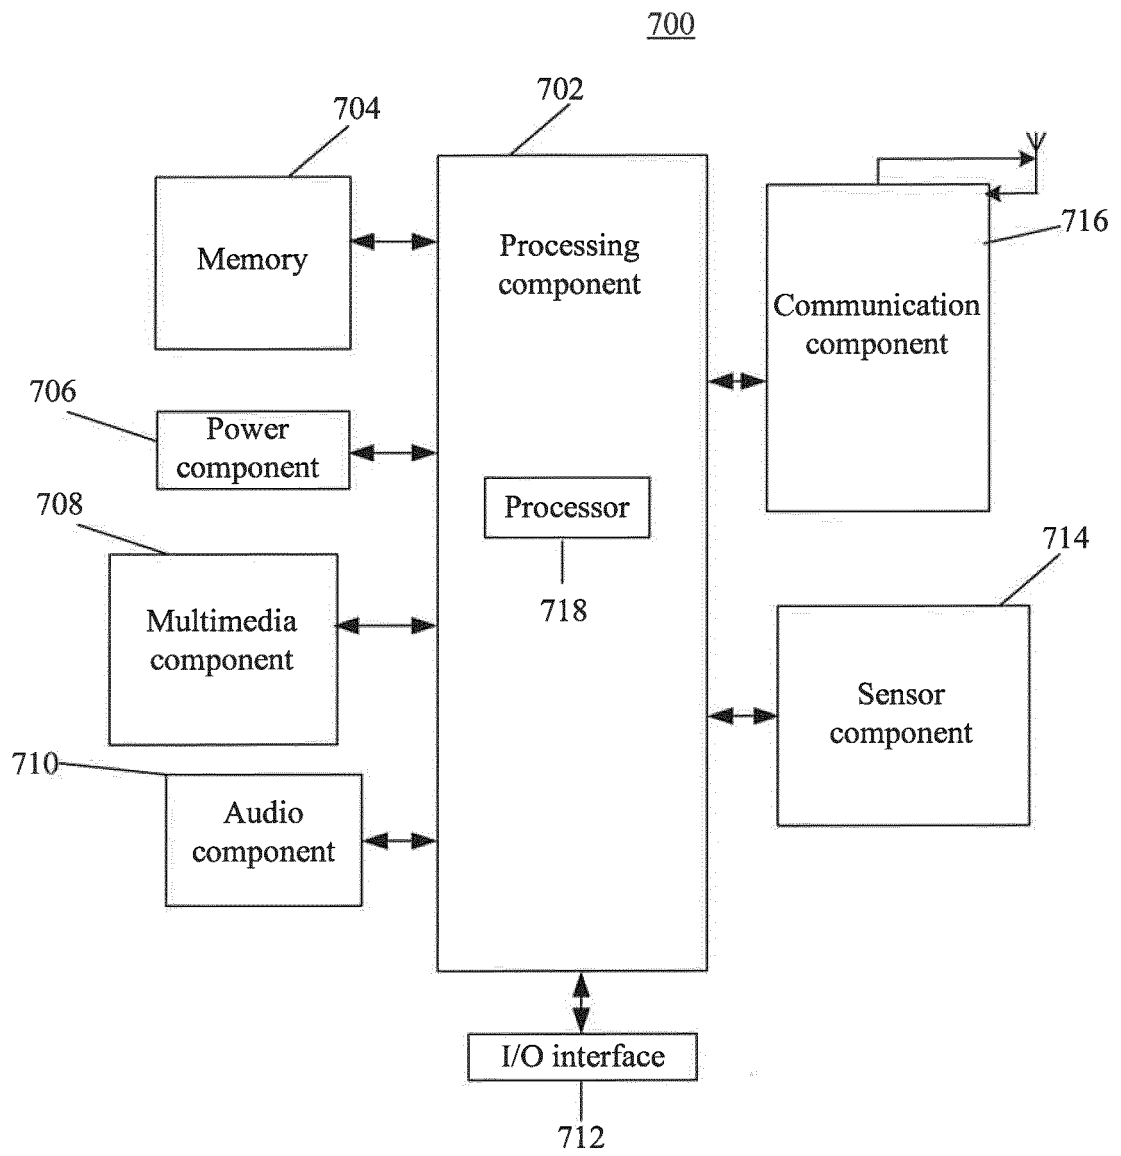

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2007229435 A1 [0004]
- CN 104700786 A [0005]
- US 2013249955 A1 [0006]

专利名称(译)	降低显示亮度的方法和装置		
公开(公告)号	EP3131087B1	公开(公告)日	2020-05-27
申请号	EP2016159106	申请日	2016-03-08
[标]申请(专利权)人(译)	小米科技有限责任公司		
申请(专利权)人(译)	小蜜INC.		
当前申请(专利权)人(译)	小蜜INC.		
[标]发明人	LI GUOSHENG LIU ANYU ZHANG YUAN		
发明人	LI, GUOSHENG LIU, ANYU ZHANG, YUAN		
IPC分类号	G09G3/36 G09G3/20		
CPC分类号	G09G3/2007 G09G3/3696 G09G2320/0626 G09G2320/0673 G09G2360/144 G09G3/3406 G09G3/36 G09G3/3688		
优先权	201510498535.0 2015-08-13 CN		
其他公开文献	EP3131087A1		
外部链接	Espacenet		

摘要(译)

本发明公开了一种降低显示器亮度的方法和装置，属于显示器技术领域。根据本发明，获取转换后的伽玛曲线，根据待显示像素的灰度像素值查询转换后的伽玛曲线中对应的灰度电压，并将查询到的灰度电压输出至对应的数据线。在对应于该像素的扫描时刻，该像素在液晶显示屏中。

$$(V/V_{max})^{\gamma} = B_n/B_{max}$$