



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
16.04.2003 Bulletin 2003/16

(51) Int Cl.⁷: **G09G 3/36**, G09G 3/20,
G02F 1/133

(21) Application number: **01930050.8**

(86) International application number:
PCT/JP01/03924

(22) Date of filing: **11.05.2001**

(87) International publication number:
WO 01/093239 (06.12.2001 Gazette 2001/49)

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(72) Inventor: **Naganuma, Tatumi**
Uedakoujyou Totoku Elec. Co. Ltd.
Ueda-shi, Nagano 386-0192 (JP)

(30) Priority: **31.05.2000 JP 2000162625**


(74) Representative: **Calderbank, Thomas Roger et al**
MEWBURN ELLIS
York House
23 Kingsway
London WC2B 6HP (GB)

(71) Applicant: **Totoku Electric Co., Ltd.**
Shinjuku-ku, Tokyo 169-0072 (JP)

(54) **NUMBER-OF-GRADATION-LEVELS DECREASING METHOD, IMAGE DISPLAYING METHOD, AND IMAGE DISPLAY**

(57) A liquid crystal display 200 comprises a 1024-to-1021 gray scale conversion calculator 1 for converting an image data $A_{(1024)}$ of 1024 gray levels (=10 bits) into an image data $Y_{(1021)}$ of 1021 gray levels, an adjusting four-level sample storage 22 and a random number generator circuit 3 for randomly selecting and releasing on the frame-by-frame basis a group of the adjusting four gray levels $\Delta 1p$ to $\Delta 4p$, $\Delta 1q$ to $\Delta 4q$, and $\Delta 1r$ to $\Delta 4r$ which is determined by the least two bits $Y_{(1021_d2)}$ of the image data $Y_{(1021)}$ of 1021 gray levels at each of segments (p.q.r) of one pixel, an adder 23

for sunning the upper eight bits $Y_{(1021_u8)}$ of the image data $Y_{(1021)}$ of 1021 gray levels and one group of the adjusting four gray levels to have three sets of image data of 256 gray levels $D1p$ to $D4p$, $D1q$ to $D4q$, and $D1r$ to $D4r$ which are then released in a sequence, and a 256 gray scale three-segment monochrome liquid crystal display panel 24. As the result, the apparatus needs no gray scale conversion table and can be minimized in the overall cost. Also, the image of which the number of gray levels is greater than that of a display panel can speciously be reproduced with explicitness.

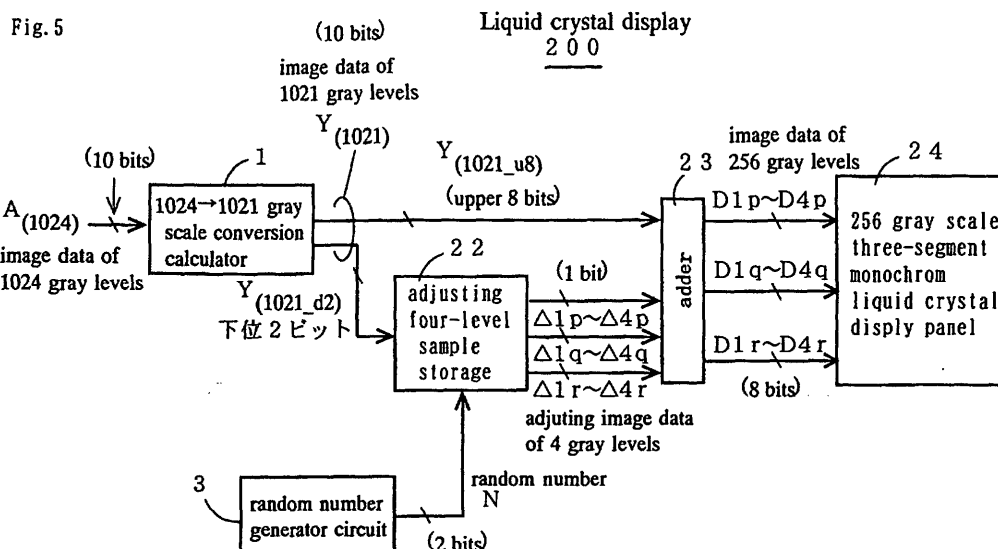

Description

Field of the Invention

[0001] The present invention relates to a gray scale reducing method, an image displaying method, and an image displaying apparatus. More specifically, it relates to a gray scale reducing method for favorably reducing the number of gray levels with no use of a gray scale conversion table and to a method and an apparatus for speciously reproducing a fine image of which the number of gray levels is greater than that of a display panel.

Background of the Invention

[0002] Fig. 9 is a block diagram of a conventional liquid crystal display.

[0003] The liquid crystal display 500 comprises a 1024-to-1021 gray scale conversion table 51 for converting an image data $A_{(1024)}$ of 1024 gray levels (=10 bits) received from, e.g., a computer (not shown) into an image data $Y_{(1021)}$ of 1021 gray levels, a 256 gray scale image data sample storage 2 where image data samples of 256 gray levels are stored as sets of four different 256 gray scale images (=8 bits) for speciously reproducing an image of 1021 gray levels, a random number generator circuit 3 for generating a random number N to select and release a set of image data D1 to D4 of 256 gray levels at each four frames in response to the image data $Y_{(1021)}$ of 1021 gray levels received from the 256 gray scale image data sample storage 2, and a 256 gray scale monochrome liquid crystal display panel 4 for displaying images of 256 gray levels determined by the 256 gray scale image data D1 to D4. The image to be reproduced shall be a monochrome image.

[0004] Fig. 10 is a diagram showing an arrangement of the 1024-to-1021 gray scale conversion table 51.

[0005] The image data $A_{(1024)}$ of 1024 gray levels stored at the (left) entry column consists of a binary 10-bit value ranging from "0000000000" and "0000000001" to "1111111111" equivalent from 0 to 1023 (of the decimal notation).

[0006] The image data $Y_{(1021)}$ of 1021 gray levels at the (right) entry column consists of a binary 10-bit value which corresponds to a 1024 gray scale image ranging from 0 to 1020 (of the decimal notation). As the gray levels are reduced by three, three entries of the 10-bit value are overlapped in the storage.

[0007] Fig. 11 is an explanatory view showing the principle of speciously reproducing an image of 1021 gray levels with the use of four frames of 256 gray levels.

[0008] It is assumed that the frames F1, F2, F3, and F4 are displayed at short intervals of 1/60 the second and their gray level of 256 gray scale at a given pixel is varied from L1, L2, and L3 to L4. The gray level 1 at the pixel is apparently equal to a level $(L1+L2+L3+L4)$ of the 1021 (=255×4+1) gray scale. When L1=63, L2=63,

L3=63, and L4=64, the level 253 of the 1021 gray scale can speciously be reproduced. This technique for reproducing an intermediate tone with the use of a series of frames is known as interframe error diffusion or Frame Rate Control.

[0009] Accordingly, as each set of the four different image data samples of 256 gray levels stored in the 256 gray scale image data sample storage 2 (Fig. 4) are equal to an image data $Y_{(1021)}$ of 1021 gray levels, they can speciously be reproduced as a 1021 gray scale monochrome image.

[0010] The random number N provided for selection of a set of the 256 gray scale image data samples is intended to minimize the generation of "flicker" and stripe noises which are derived from the regularity of a change in the gray level at each frame.

[0011] The conventional liquid crystal display 500 requires a memory for storage of 10 kilobits (=1024×10 bits) as the 1024-to-1021 gray scale conversion table 51 and will thus be increased in the overall cost.

[0012] Also, if the random number N is low in the accuracy (i.e. a particular pattern appears at very short intervals and its value is repeated at high frequency L the effect of "flicker" and stripe noises may increase thus all owing an observer to have an abnormal impression.

[0013] It is hence a first object of the present invention to provide a gray scale reducing method for favorably reducing the number of gray levels with no use of a gray scale conversion table.

[0014] It is a second object of the present invention to provide a method and an apparatus for speciously reproducing a fine image of which the number of gray levels is greater than that of a display panel.

Summary of the Invention

[0015] As a first aspect of the present invention, a gray scale reducing method is provided comprising a step of converting a bit stream input ($a_{\alpha-1}, a_{\alpha-2}, a_{\alpha-3}, \dots, a_0$) of 2^α gray levels expressed by $A = a_{\alpha-1} \times 2^{\alpha-1} + a_{\alpha-2} \times 2^{\alpha-2} + a_{\alpha-3} \times 2^{\alpha-3} + \dots + a_0 \times 2^0$ [$\alpha \geq 2$] into a bit stream output of $(2^\alpha - 2^{\alpha-\beta} + 1)$ gray levels expressed by $Y = a_{\alpha-1} \times 2^{\alpha-1} + a_{\alpha-2} \times 2^{\alpha-2} + a_{\alpha-3} \times 2^{\alpha-3} + \dots + a_0 \times 2^0$.

($a_{\alpha-1} \times 2^{\alpha-\beta-1} + a_{\alpha-2} \times 2^{\alpha-\beta-2} + \dots + a_\beta \times 2^0$) [$\alpha > \beta \geq 1$].

[0016] The gray scale reducing method of the first aspect enables a simple arithmetic operation of subtracting the upper $(\alpha-\beta)$ bits from the input A of 2^α gray levels as a bit stream ($a_{\alpha-1}, a_{\alpha-2}, a_{\alpha-3}, \dots, a_0$) to determine a bit stream output Y of $(2^\alpha - 2^{\alpha-\beta} + 1)$ gray levels with no use of any gray scale conversion table. Since the inputs A to be converted into the identical output Y are equally dispersed at $2^{\alpha-\beta-1}$ different locations, its conversion can be prevented from biasing and thus improved in the accuracy. More particularly, when $\alpha=10$ and $\beta=8$, a bit stream of 1024 (=2¹⁰) gray levels can accurately be converted into a bit stream of 1021 (=2¹⁰-2¹⁰⁻⁸+1) gray levels.

[0017] As a second aspect of the present invention, an image displaying method is provided comprising steps of converting an image data by the gray scale reducing method of the first aspect from a bit stream of 2^α gray levels to a bit stream of $(2^{\alpha-2^{\alpha-\beta}+1})$ gray levels, and speciously reproducing by interframe error diffusion a fine image of which the gray level is equal to that of the converted bit stream.

[0018] The image displaying method of the second aspect enables to speciously reproduce by interframe error diffusion an image of which the number of gray levels is favorably reduced by the gray scale reducing method of the first aspect.

[0019] As a third aspect of the present invention, an image displaying method is provided comprising a step of controlling the gray level in each of m segments ($m \geq 2$) of one pixel on the frame-by-frame basis to speciously reproduce with the use of plural frames an image of which the number of gray levels is greater than that of a display panel which is capable of varying the gray level in each segment.

[0020] The image displaying method of the third aspect enables to change the gray level at each segment of a single pixel for spatially modulating the luminance of the pixel in one frame, thus displaying the number of gray levels of the pixel which is greater than that of the segments. More particularly, when one pixel consists of three segments, the gray level in one or two of the three segments can be declined to be lower by one step than that of the other segments or segment to reproduce an intermediate tone at steps of $1/3$ the gray level. Accordingly, during the process of interframe error diffusion to speciously reproduce an image of which the number of gray levels is increased, the gray level of each pixel can be minimized in the difference between frames hence significantly attenuating the generation of "flicker" and stripe noises in the image.

[0021] As a fourth aspect of the present invention, an image displaying apparatus is provided comprising a gray scale reducing means for converting a bit stream ($a_{\alpha-1}, a_{\alpha-2}, a_{\alpha-3}, \dots, a_0$) of 2^α gray levels of image data expressed by $A = a_{\alpha-1} \times 2^{\alpha-1} + a_{\alpha-2} \times 2^{\alpha-2} + a_{\alpha-3} \times 2^{\alpha-3} + \dots + a_0 \times 2^0$ [$\alpha \geq 2$] into a bit stream of $(2^{\alpha-2^{\alpha-\beta}+1})$ gray levels of image data expressed by $Y = a_{\alpha-1} \times 2^{\alpha-1} + a_{\alpha-2} \times 2^{\alpha-2} + a_{\alpha-3} \times 2^{\alpha-3} + \dots + a_0 \times 2^0 - (a_{\alpha-1} \times 2^{\alpha-\beta-1} + a_{\alpha-2} \times 2^{\alpha-\beta-2} + \dots + a_\beta \times 2^0)$ [$\alpha > \beta \geq 1$], a displaying panel of which the number of gray levels for reproducing each frame of the image on a pixel-by-pixel basis is smaller than 2^α , and an image display controlling means for displaying on the display panel a series of images which have speciously been reproduced by interframe error diffusion and have corresponding gray levels determined by the converted bit streams.

[0022] The image displaying apparatus of the fourth aspect allows the image displaying method of the second aspect to be satisfactorily performed.

[0023] As a fifth aspect of the present invention, an image displaying apparatus is provided comprising a

displaying panel which is capable of varying the gray level in each of m segments ($m \geq 2$) of one pixel, and an image display controlling means for controlling the gray level of each segment on the frame-by-frame basis to speciously reproduce an image of which the number of gray levels is greater than that applicable in the segment at each frame.

[0024] The image displaying apparatus of the fifth aspect allows the image displaying method of the third aspect to be satisfactorily performed.

[0025] As a sixth aspect of the present invention, an image displaying apparatus is provided comprising a gray scale reducing means for converting a bit stream ($a_{\alpha-1}, a_{\alpha-2}, a_{\alpha-3}, \dots, a_0$) of 2^α gray levels of image data expressed by $A = a_{\alpha-1} \times 2^{\alpha-1} + a_{\alpha-2} \times 2^{\alpha-2} + a_{\alpha-3} \times 2^{\alpha-3} + \dots + a_0 \times 2^0$ [$\alpha \geq 2$] into a bit stream of $(2^{\alpha-2^{\alpha-\beta}+1})$ gray levels of image data expressed by $Y = a_{\alpha-1} \times 2^{\alpha-1} + a_{\alpha-2} \times 2^{\alpha-2} + a_{\alpha-3} \times 2^{\alpha-3} + \dots + a_0 \times 2^0 - (a_{\alpha-1} \times 2^{\alpha-\beta-1} + a_{\alpha-2} \times 2^{\alpha-\beta-2} + \dots + a_\beta \times 2^0)$ [$\alpha > \beta \geq 1$],

a displaying panel for reproducing 2^β gray levels in each of m segments ($m \geq 2$) of one pixel, a gray level calculating means for summing the upper β bits of the converted bit stream and an adjusting gray level predetermined for each segment by the lower $(\alpha-\beta)$ bits of the bit stream to determine the gray level in the segment at each of frames to be subjected to interframe error diffusion, and an image display controlling means for controlling the gray level in the segment of the display panel on the frame-by-frame basis.

[0026] The image displaying apparatus of the sixth aspect enables to change the gray level at each segment of a single pixel, hence minimizing the different in the gray level of the pixel between frames and significantly attenuating the generation of "flicker" and stripe noises in the image.

[0027] Also, the gray level of each segment of the frames can favorably be calculated by assigning a gray level of the upper β bits of the bit stream of $(2^{\alpha-2^{\alpha-\beta}+1})$ gray levels determined by the gray scale reducing method of the first aspect to the segment as the basic gray level in common with the segment of each of pixels at the frames to be subjected to interframe error diffusion and adding with an adjusting gray level predetermined and assigned to the lower $(\alpha-\beta)$ bits. This can require a less storage capacity of the gray level data as compared with preliminary storage of all the $(2^{\alpha-2^{\alpha-\beta}+1})$ gray levels of each segment, thus contributing the reduction of the overall cost.

[0028] As a seventh aspect of the present invention, the image displaying apparatus of the sixth aspect is modified further comprising an adjusting gray level sample storing means for saving samples of the adjusting gray level predetermined and assigned to each segment so that the average of gray levels of each pixel at the $2^{\alpha-\beta}$ frames for the error diffusion calculated by the gray scale reducing means is the upper β bits plus the least $(\alpha-\beta)$ bits $/ 2^{\alpha-\beta}$, and a randomly selecting and releasing means for randomly selecting and releasing any of the

samples of the adjusting gray level on the frame-by-frame basis.

[0029] The image displaying apparatus of the seventh aspect enables to randomly select and release on the frame-by-frame basis a sample of the adjusting gray levels assigned to the segments so that the average gray level of each pixel in $2^{\alpha-\beta}$ error diffusion frame s is equal to the upper β bits plus {the lower $(\alpha-\beta)$ bits/2 $^{\alpha-\beta}$ }, thus allowing each frame of the image of which the gray level is very close to the average gray level to be reproduced in case that a number of the error diffusion frames are aligned along the time base. The random selection is intended for minimizing the generation of "flicker" and stripe noises derived from the regularity of changes in the gray level of each segment.

[0030] More particularly, when $\alpha=10$ and $\beta=8$, the average gray level of each pixel in four of the error diffusion frames is equal to a sum of 256 gray levels expressed by the upper eight bits of a bit stream of 1021 gray levels and four gray levels expressed by the lower two bits/4 and can hence be favored to speciously reproduce an image of 1021 gray levels.

[0031] As an eighth aspect of the present invention, the image displaying apparatus of any of the fourth to seventh aspects is modified wherein the display panel is a monochrome liquid crystal display panel.

[0032] The image displaying apparatus of the eighth aspect enables to display an image on the monochrome liquid crystal display and can thus be favored to speciously reproduce a monochrome image of multiple gray levels through interframe error diffusion.

Brief Description of the Drawings

[0033]

Fig. 1 is a block diagram of a liquid crystal display apparatus showing a first embodiment of the present invention;

Fig. 2 is a table diagram showing the relationship between image data $A_{(1024)}$ of 1024 gray levels and image data $Y_{(1021)}$ of 1021 gray levels;

Fig. 3 is a graph showing a profile of the relationship between the image data $A_{(1024)}$ of 1024 gray levels and the image data $Y_{(1021)}$ of 1021 gray levels;

Fig. 4 is a table diagram showing an arrangement of a 256 gray scale conversion image data sample storage;

Fig. 5 is a block diagram of a liquid crystal display apparatus showing a second embodiment of the present invention;

Fig. 6 is an explanatory view of the display screen where each pixel consists of three segments;

Fig. 7 is a table diagram showing an arrangement of an adjusting four-level sample storage;

Fig. 8 is a table diagram showing an image data of 256 gray levels at each segment of the liquid crystal display apparatus shown in Fig. 5;

Fig. 9 is a block diagram showing a conventional liquid crystal display apparatus;

Fig. 10 is a table diagram showing a 1024-to-1021 gray scale conversion table in the liquid crystal display apparatus shown in Fig. 9; and

Fig. 11 is an explanatory view showing the principle of interframe error diffusion.

Best Modes for embodying the Invention

[0034] The present invention will be described in more detail in conjunction with some embodiments illustrated in their relevant drawings. The present invention is not limited to the embodiments.

First Embodiment

[0035] Fig. 1 is a block diagram of a liquid crystal display showing the first embodiment of the present invention.

[0036] The liquid crystal display 100 comprises a 1024-to-1021 gray scale conversion calculator 1 for converting an image data $A_{(1024)}$ of 1024 gray levels (=10 bits) received from, e.g., a computer (not shown) into an image data $Y_{(1021)}$ of 1021 gray levels, a 256 gray scale image data sample storage 2 where image data samples of 256 gray levels are stored as sets of four different 256 gray scale images (=8 bits) for speciously reproducing an image of 1021 gray levels, a random number generator circuit 3 for determining a random number N (two bits) to select and release a set of image data $D1$ to $D4$ of 256 gray levels at each four frames in response to the image data $Y_{(1021)}$ of 1021 gray levels received from the 256 gray scale image data sample storage 2, and a 256 gray scale monochrome liquid crystal display panel 4 for displaying images of 256 gray levels determined by the 256 gray scale image data $D1$ to $D4$. The image to be reproduced shall be a monochrome image.

[0037] The 1024-to-1021 gray scale conversion calculator 1 converts a stream of 1024 (=2¹⁰) gray scale bits ($a_9, a_8, a_7, \dots, a_0$) which represent an image data of 1024 gray levels denoted by $a_9 \times 2^9 + a_8 \times 2^8 + a_7 \times 2^7 + \dots + a_0 \times 2^0$ into a stream of 1021 (=2¹⁰-2¹⁰⁻⁸+1) gray scale bits which represent an image data of 1021 gray levels denoted by $a_9 \times 2^9 + a_8 \times 2^8 + a_7 \times 2^7 + \dots + a_0 \times 2^0 - (a_9 \times 2^1 + a_8 \times 2^0)$. More specifically, its output is equal to the stream of 1024 gray scale bits minus the upper two bits (a_9 and a_8).

[0038] For example, when the image data of 1024 gray levels is "0100000000" (256 of the decimal notation), its converted image data of 1021 gray levels is "0100000000"-01 or "0011111111" (255 of the decimal notation).

[0039] Also, when the image data of 1024 gray levels is "1000000000" (512 of the decimal notation), its converted image data of 1021 gray levels is "1000000000"-10 or "0111111110" (510 of the decimal

notation).

[0040] Moreover, when the image data of 1024 gray levels is "1100000000" (768 of the decimal notation), its converted image data of 1021 gray levels is "11 000 0000 0 "-"11" or "1011111101" (765 of the decimal notation).

[0041] Fig. 2 illustrates a relationship between the image data of 1024 gray levels and the image data of 1021 gray levels in the form of a table. Fig. 3 is a graphic diagram showing the relationship between the image data of 1024 gray levels and the image data of 1021 gray levels.

[0042] As shown, the upper two bits are $a_9=0$ and $a_8=0$ when the 1024 gray scale image data ranging from "0000000000" to "0011111111" (from 0 to 255 of the decimal notation) and thus $a_9 \times 2^1 + a_8 \times 2^0 = 0$ is established. Accordingly, the image data of 1021 gray levels is equal to the 1024 gray scale image data minus zero.

[0043] The upper two bits are $a_9=0$ and $a_8=1$ when the 1024 gray scale image data ranges from "0100000000" to "0111111111" (from 256 to 511 of the decimal notation) and thus established is $a_9 \times 2^1 + a_8 \times 2^0 = 1$. As the result, the image data of 1021 gray levels is equal to the 1024 gray scale image data minus one. The image data of 1021 gray levels is 255 at $A_{(1024)}=256$ (of the decimal notation) and this is equivalent to when the image data of 1024 gray level s is 255.

[0044] Also, the upper two bits are $a_9=1$ and $a_8=0$ when the 1024 gray scale image data ranges from "1000000000" to "1011111111" (from 512 to 767 of the decimal notation) and thus $a_9 \times 2^1 + a_8 \times 2^0 = 2$ is established. As the result, the image data of 1021 gray levels is equal to the 1024 gray scale image data minus two. The image data of 1021 gray levels is 510 at $A_{(1024)}=512$ (of the decimal notation) and this is equivalent to when the image data of 1024 gray levels is 511.

[0045] The upper two bits are $a_9=1$ and $a_8=1$ when the 1024 gray scale image data ranges from "1100000000" to "1111111111" (from 768 to 1023 of the decimal notation) and thus $a_9 \times 2^1 + a_8 \times 2^0 = 3$ is established. Accordingly, the image data of 1021 gray level s is equal to the 1024 gray scale image data minus three. The image data of 1021 gray levels is 765 at $A_{(1024)}=768$ (of the decimal notation) and this is equivalent to when the image data of 1024 gray levels is 767.

[0046] As described, a specific set of the 1024 gray scale image data to be overlapped when converted into the image data of 1021 gray levels are assigned to three equally spaced figures: 256, 512, and 768 (of the decimal notation). This allows the image to be reproduced at a more natural quality than when the set of the 1024 gray scale image data are converted into a single figure (for example, 1021 to 1023 of 1024 gray levels all converted into 1020 of 1021 gray levels).

[0047] Fig. 4 is a table showing an arrangement of the 256 gray scale image data sample storage 2.

[0048] The image data $Y_{(1021)}$ of 1021 gray levels

stored at the (left) entry column consists of a binary 10-bit value ranging from "0000000000" and "0000000001" to "1111111100" which represent 0 to 1020 (of the decimal notation).

[0049] Four groups of the 256 gray scale image data samples stored at the (right) four entry columns are determined by each of four random numbers N (equal to "00", "01", "10", "11") and so that the sum of samples at each group is equal to the image data $D_{(1021)}$ of 1021 gray levels and a difference between the groups is minimum. For example, for "0000000011" of the image data $D_{(1021)}$ of 1021 gray levels, four of the 256 gray scale image data samples are stored including "00000001", "00000001", "00000001", and "00000000".

[0050] The random number generator circuit 3 determines a random number N and selects and releases from the 256 gray scale image data sample storage 2 a corresponding set of four different image data samples of 256 gray levels D1 to D4 which correspond to the image data $Y_{(1021)}$ of 1021 gray levels.

[0051] The 256 gray scale monochrome liquid crystal display panel 4 displays the four image data D1 to D4 of 256 gray levels in a sequence to speciously reproduce an image of 1021 gray levels.

[0052] As described, the liquid crystal display 100 of the first embodiment allows its 1024-to-1021 gray scale conversion calculator 1 to perform an arithmetic operation for converting the image data $A_{(1024)}$ of 1024 gray levels into the image data $Y_{(1021)}$ of 1021 gray levels, thus eliminating the use of a memory which serves as the 1024-to-1021 gray scale conversion table (51 in Fig. 9) and minimizing the overall cost.

Second Embodiment

[0053] Fig. 5 is a block diagram of a liquid crystal display showing the second embodiment of the present invention.

[0054] The liquid crystal display 200 comprises a 1024-to-1021 gray scale conversion calculator 1 for converting an image data $A_{(1024)}$ of 1024 gray levels (=10 bits) into an image data $Y_{(1021)}$ of 1021 gray levels, an adjusting four-level sample storage 22 where four groups of four gray level samples determined by the least two bits $Y_{(1021_d2)}$ of the 1021 gray scale image data $Y_{(1021)}$ are stored for each of three segments (p, q, and r in Fig. 6) of one pixel, a random number generator circuit 3 for determining a random number N to select and release at each frame a group of the adjusting four gray levels $\Delta 1p$ to $\Delta 4p$ (for the segment p), $\Delta 1q$ to $\Delta 4q$ (for the segment q), and $\Delta 1r$ to $\Delta 4r$ (for the segment r) which is determined by the least two bits $Y_{(1021_d2)}$ and stored in the adjusting four-level sample storage 22, an adder 23 for summing the upper eight bits of the image data $Y_{(1021)}$ of 1021 gray levels and one group of the adjusting four gray levels $\Delta 1p$ to $\Delta 4p$, $\Delta 1q$ to $\Delta 4q$, and $\Delta 1r$ to $\Delta 4r$ of each segment to have three sets of image data of 256 gray levels D1p to D4p (for the seg-

ment p), D1q to D4q (for the segment q), and D1r to D4r (for the segment r) which are then released in a sequence, and a 256 gray scale three-segment monochrome liquid crystal display panel 24 for displaying images of 256 gray levels determined by the 256 gray scale image data D1p to D4p, D1q to D4q, and D1r to D4r. The images to be reproduced shall be monochrome images.

[0055] As shown in Fig. 6, each pixel G of the 256 gray scale three-segment monochrome liquid crystal display panel 24 consists of the three segments p, q, and r of which the gray level can separately be varied through 256 levels. The monochrome display panel 24 of this type may be implemented by a color liquid crystal display panel with no use of color filters for the three primary colors (red, green, and blue) at each pixel.

[0056] Fig. 7 is a diagram showing an arrangement of the adjusting four gray level sample storage 22.

[0057] The least two bits $Y_{(1021_d2)}$ stored in the (left) entry column are selected from "00", "01", "10", and "11".

[0058] The adjusting four-level samples are stored in the (right) twelve entry columns including a matrix of bits where the number of segments filled with is per twelve segments or a total of segments at each pixel of the four frames for interframe error diffusion is equal to the least two bits $Y_{(1021_d2)}/4$ and a difference in the gray level is minimized between the frames. For example, the segments are stored in four patterns of (p,q,r): (1,0,1), (0,1,0), (1,1,0), and (0,0,1), so that when the least two bits $Y_{(1021_d2)}$ are "10" (2 of the decimal notation), the segments filled with 1s are 2/4. A desired group of the adjusting four gray levels is determined at every frame from the random number N received from the random number generator circuit 3.

[0059] Fig. 8 is a table showing groups of image data of 256 gray levels D1p to D4p, D1q to D4q, and D1r to D4r for the segments p, q, and r which are released at the frame-by-frame basis from the adder 23.

[0060] When the image data $Y_{(1021)}$ of 1021 gray levels is expressed by "010000000" (256 of the decimal notation), the upper eight bits $Y_{(1021_u8)}$ is "01000000" (64 of the decimal notation) and the least two bits $Y_{(1021_d2)}$ is "00". Then the adjusting four-level sample storage 22 shown in Fig. 7 releases (p,q,r)=(0,0,0) of the adjusting four gray levels, allowing the image data of 256 gray levels D1p to D4p, D1q to D4q, and D1r to D4r to be 64, 64, and 64 respectively. As the result, an image of 1021 gray levels can speciously be reproduced at the level 256 ($=64 \times 4 + 0$).

[0061] When the image data $Y_{(1021)}$ of 1021 gray levels is expressed by "0100000001" (257 of the decimal notation), the upper eight bits $Y_{(1021_u8)}$ is "01000000" (64 of the decimal notation) and the least two bits $Y_{(1021_d2)}$ is "01". Then, a group of adjusting four gray levels released from the adjusting four-level sample storage 22 contains three is in the twelve segments (a sum of the segments of four pixels) in average although

the number of 1s may be determined by the random number N. Accordingly, an image of 1021 gray levels can speciously be reproduced at the level 257 ($=64 \times 4 + 1$).

[0062] When the image data $Y_{(1021)}$ of 1021 gray levels is expressed by "0100000010" (258 of the decimal notation), the upper eight bits $Y_{(1021_u8)}$ is "01000000" (64 of the decimal notation) and the least two bits $Y_{(1021_d2)}$ is "10". Then, a group of adjusting four gray levels released from the adjusting four-level sample storage 22 contains six is in the twelve segments in average although the number of 1s may be determined by the random number N. Accordingly, an image of 1021 gray levels can speciously be reproduced at the level 258 ($=64 \times 4 + 2$).

[0063] When the image data $Y_{(1021)}$ of 1021 gray levels is expressed by "0100000011" (259 of the decimal notation), the upper eight bits $Y_{(1021_u8)}$ is "01000000" (64 of the decimal notation) and the least two bits $Y_{(1021_d2)}$ is "11". Then, a group of adjusting four gray levels released from the adjusting four-level sample storage 22 contains nine is in the twelve segments in average although the number of 1s may be determined by the random number N. Accordingly, an image of 1021 gray levels can speciously be reproduced at the level 259 ($=64 \times 4 + 3$).

[0064] As described, the liquid crystal display 200 of this embodiment enables the spatial modulation for separately varying the gray level in the three segments of each pixel as well as the chronological modulation (interframe error diffusion) of the gray level between any two consecutive frames, hence declining a difference in the gray level of each pixel between the frames and minimizing the generation of "flicker" and stripe noises in the image. Also, its adjusting four-level sample storage 22 has a storage capacity of as small as 48 bits ($=3 \times 4 \times 4$) which is far smaller than the storage capacity (1021 $\times 8 \times 4$ bits) of the 256 gray scale image data sample storage 2 (Fig. 1), thus contributing to the reduction of the overall cost.

Industrial Applicability

[0065] The gray scale reducing method of the present invention enables the reduction of the number of gray levels with the use of a simple arithmetic operation, thus eliminating the use of a gray scale conversion table and minimizing the overall cost.

[0066] Also, the method and the apparatus for displaying an image of the present invention allows the reproduction of an image of which the number of gray levels is greater than that of a display panel to be implemented speciously but explicitly.

[0067] The present invention is particularly advantageous by converting the monochrome image data of 1024 gray levels into image data of 1021 gray levels and speciously reproducing a monochrome image of 1021 gray levels with the use of four frames of image data of

256 gray levels.

Claims

1. A gray scale reducing method comprising a step of:

converting a bit stream ($a_{\alpha-1}, a_{\alpha-2}, a_{\alpha-3}, \dots, a_0$) of 2^α gray levels expressed by input $A = a_{\alpha-1} \times 2^{\alpha-1} + a_{\alpha-2} \times 2^{\alpha-2} + a_{\alpha-3} \times 2^{\alpha-3} + \dots + a_0 \times 2^0$ [$\alpha \geq 2$] into a bit stream of $(2^\alpha - 2^{\alpha-\beta} + 1)$ gray levels expressed by output $Y = a_{\alpha-1} \times 2^{\alpha-1} + a_{\alpha-2} \times 2^{\alpha-2} + a_{\alpha-3} \times 2^{\alpha-3} + \dots + a_0 \times 2^0 - (a_{\alpha-1} \times 2^{\alpha-\beta-1} + a_{\alpha-2} \times 2^{\alpha-\beta-2} + \dots + a_\beta \times 2^0)$ [$\alpha > \beta \geq 1$].

2. An image displaying method comprising steps of:

converting an image data by the gray scale reducing method defined in claim 1 from a bit stream of 2^α gray levels to a bit stream of $(2^\alpha - 2^{\alpha-\beta} + 1)$ gray levels; and speciously reproducing by interframe error diffusion an image of which the gray level is equal to that of the converted bit stream.

3. An image displaying method comprising a step of controlling the gray level in each of m segments ($m \geq 2$) of one pixel on the frame-by-frame basis to speciously reproduce with the use of plural frames an image of which the number of gray levels is greater than that of a display panel which is capable of varying the gray level in each segment.

4. An image displaying apparatus comprising:

a gray scale reducing means for converting a bit stream ($a_{\alpha-1}, a_{\alpha-2}, a_{\alpha-3}, \dots, a_0$) of 2^α gray levels of image data expressed by $A = a_{\alpha-1} \times 2^{\alpha-1} + a_{\alpha-2} \times 2^{\alpha-2} + a_{\alpha-3} \times 2^{\alpha-3} + \dots + a_0 \times 2^0$ [$\alpha \geq 2$] into a bit stream of $(2^\alpha - 2^{\alpha-\beta} + 1)$ gray levels of image data expressed by $Y = a_{\alpha-1} \times 2^{\alpha-1} + a_{\alpha-2} \times 2^{\alpha-2} + a_{\alpha-3} \times 2^{\alpha-3} + \dots + a_0 \times 2^0 - (a_{\alpha-1} \times 2^{\alpha-\beta-1} + a_{\alpha-2} \times 2^{\alpha-\beta-2} + \dots + a_\beta \times 2^0)$ [$\alpha > \beta \geq 1$];

a displaying panel of which the number of gray levels for reproducing each frame of the image on a pixel-by-pixel basis is smaller than 2^α ; and an image display controlling means for displaying on the display panel a series of images which have speciously been reproduced by interframe error diffusion and have corresponding gray levels determined by the converted bit streams.

5. An image displaying apparatus comprising:

a displaying panel which is capable of varying

the gray level in each of m segments ($m \geq 2$) of one pixel; and an image display controlling means for controlling the gray level of each segment on the frame-by-frame basis to speciously reproduce an image of which the number of gray levels is greater than that applicable in the segment at each frame.

6. An image displaying apparatus comprising:

a gray scale reducing means for converting a bit stream ($a_{\alpha-1}, a_{\alpha-2}, a_{\alpha-3}, \dots, a_0$) of 2^α gray levels of image data expressed by $A = a_{\alpha-1} \times 2^{\alpha-1} + a_{\alpha-2} \times 2^{\alpha-2} + a_{\alpha-3} \times 2^{\alpha-3} + \dots + a_0 \times 2^0$ [$\alpha \geq 2$] into a bit stream of $(2^\alpha - 2^{\alpha-\beta} + 1)$ gray levels of image data expressed by $Y = a_{\alpha-1} \times 2^{\alpha-1} + a_{\alpha-2} \times 2^{\alpha-2} + a_{\alpha-3} \times 2^{\alpha-3} + \dots + a_0 \times 2^0 - (a_{\alpha-1} \times 2^{\alpha-\beta-1} + a_{\alpha-2} \times 2^{\alpha-\beta-2} + \dots + a_\beta \times 2^0)$ [$\alpha > \beta \geq 1$];

a displaying panel for reproducing 2^β gray levels in each of m segments ($m \geq 2$) of one pixel; a gray level calculating means for summing the upper β bits of the converted bit stream and an adjusting gray level predetermined for each segment by the lower $(\alpha - \beta)$ bits of the bit stream to determine the gray level in the segment at each of frames to be subjected to interframe error diffusion; and

an image display controlling means for controlling the gray level in the segment of the display panel on the frame-by-frame basis.

7. An image displaying apparatus according to claim 6, further comprising:

an adjusting gray level sample storing means for saving samples of the adjusting gray level predetermined and assigned to each segment so that the average of gray levels of each pixel at the $2^{\alpha-\beta}$ frames for the error diffusion calculated by the gray scale reducing means is the upper β bits plus the least $(\alpha - \beta)$ bits $/2^{\alpha-\beta}$; and a randomly selecting and releasing means for randomly selecting and releasing any of the samples of the adjusting gray level on the frame-by-frame basis.

8. An image displaying apparatus according to any of claims 4 to 7, wherein the display panel is a monochrome liquid crystal display panel.

Fig.1

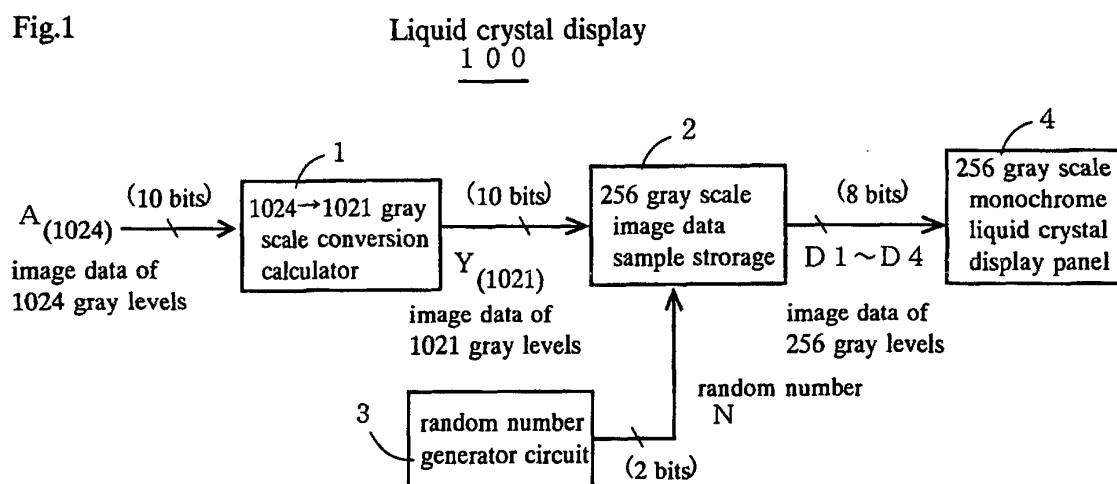


Fig.2

hexadecimal	image data of 1024 gray levels $A_{(1024)}$	$a_9 \times 2^1 + a_8 \times 2^0$	image data of 1021 gray levels $Y_{(1021)}$
0 ~ F F ...	0 ~ 2 5 5	0	$A_{(1024)}^{-0}$
1 0 0 ~ 1 F F ...	2 5 6 ~ 5 1 1	1	$A_{(1024)}^{-1}$
2 0 0 ~ 2 F F ...	5 1 2 ~ 7 6 7	2	$A_{(1024)}^{-2}$
3 0 0 ~ 3 F F ...	7 6 8 ~ 1 0 2 3	3	$A_{(1024)}^{-3}$

Fig.3

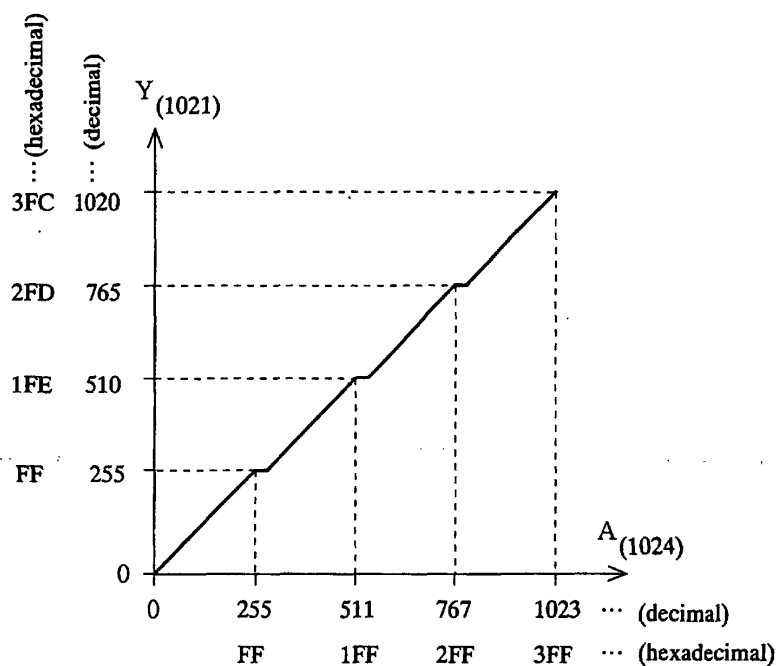


Fig.4

256 gray scale image data sample storage

2

256 gray scale image data samples				
random number image data of 1021 gray levels $Y_{(1021)}$	0 0	0 1	1 0	1 1
0 0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0 0 0 1	0 0 0 0 0 0 0 0 1	0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0 0 1 0	0 0 0 0 0 0 0 0 1	0 0 0 0 0 0 0 0 1	0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0
0 0 0 0 0 0 0 0 1 1	0 0 0 0 0 0 0 0 1	0 0 0 0 0 0 0 0 1	0 0 0 0 0 0 0 0 1	0 0 0 0 0 0 0 0 0
⋮	⋮	⋮	⋮	⋮
1 1 1 1 1 1 1 1 0 0	1 1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1 1
decimal ... 0 ~ 1 0 2 0	0 ~ 2 5 5	0 ~ 2 5 5	0 ~ 2 5 5	0 ~ 2 5 5
total 0 ~ 1 0 2 0				

Fig. 5

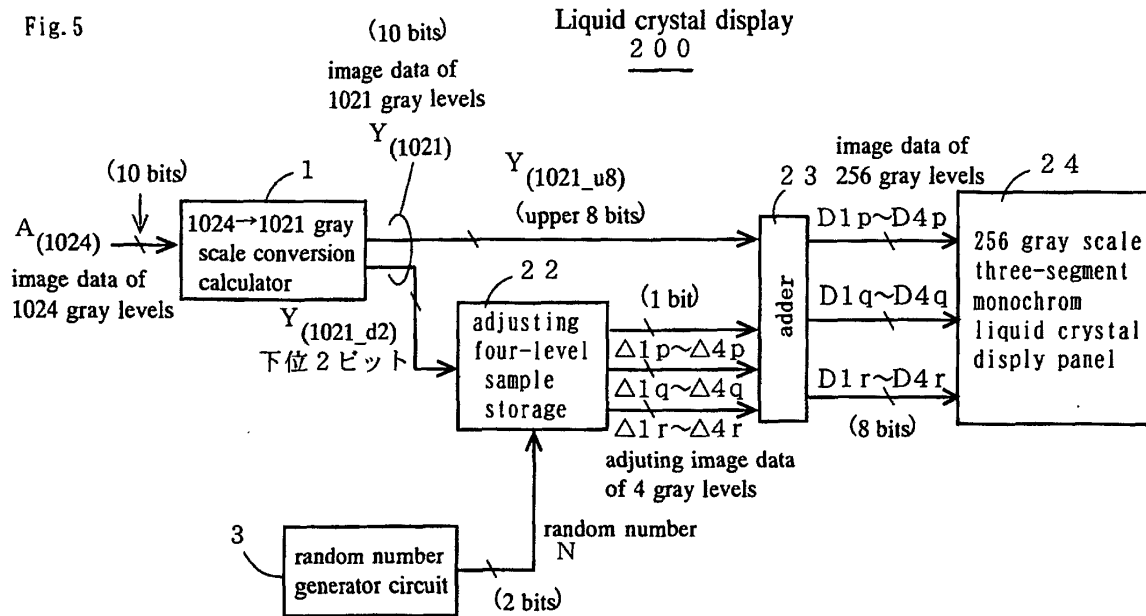


Fig. 6

256 gray scale three-segment
monochrom liquid crystal display panel
2 4

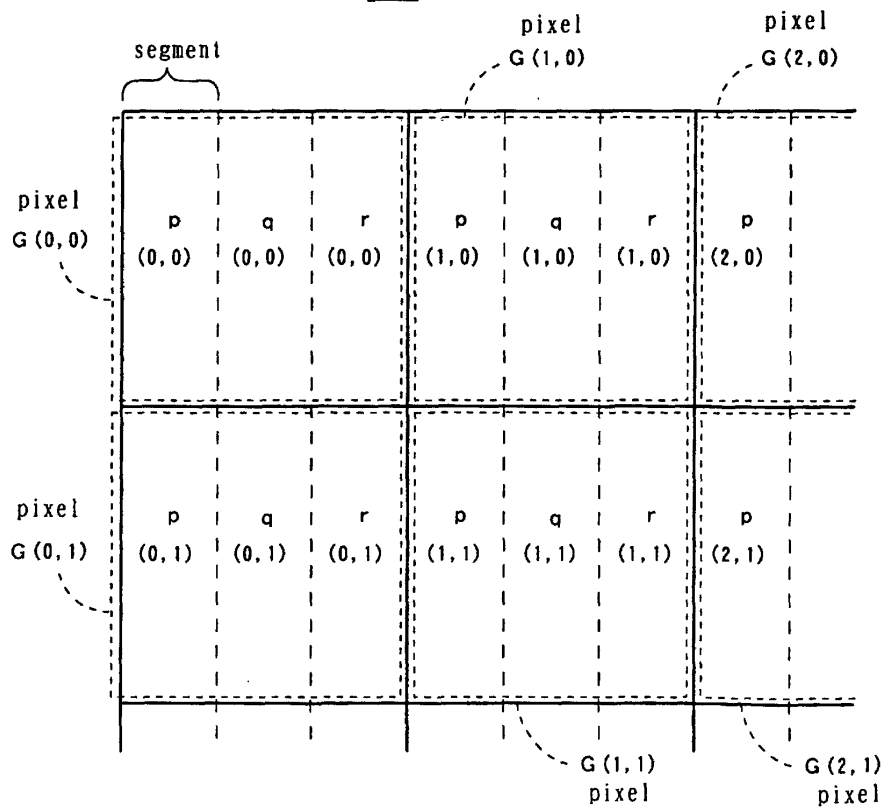


Fig.7 adjusting four gray level sample storage

2 2

adjusting four gray level sample												
random number N least segment two bits	00			01			10			11		
	p	q	r	p	q	r	p	q	r	p	q	r
00	0	0	0	0	0	0	0	0	0	0	0	0
01	0	0	1	0	1	0	1	0	0	0	0	0
10	1	0	1	0	1	0	1	1	0	0	0	1
11	1	1	0	1	0	1	0	1	1	1	1	1

Fig.8

segment frame	p	q	r	p	q	r	p	q	r	p	q	r
	p	q	r	p	q	r	p	q	r	p	q	r
frame F1 (D1p,D1q,D1r)	64	64	64	65	64	64	65	65	64	65	65	65
frame F2 (D2p,D2q,D2r)	64	64	64	64	65	64	65	64	65	65	65	64
frame F3 (D3p,D3q,D3r)	64	64	64	64	64	65	64	64	65	64	65	65
frame F4 (D4p,D4q,D4r)	64	64	64	64	64	64	65	64	64	65	65	64
gray level (1021 gray levels)	256 (=64×4+0)			257 (=64×4+1)			258 (=64×4+2)			259 (=64×4+3)		

Fig. 9


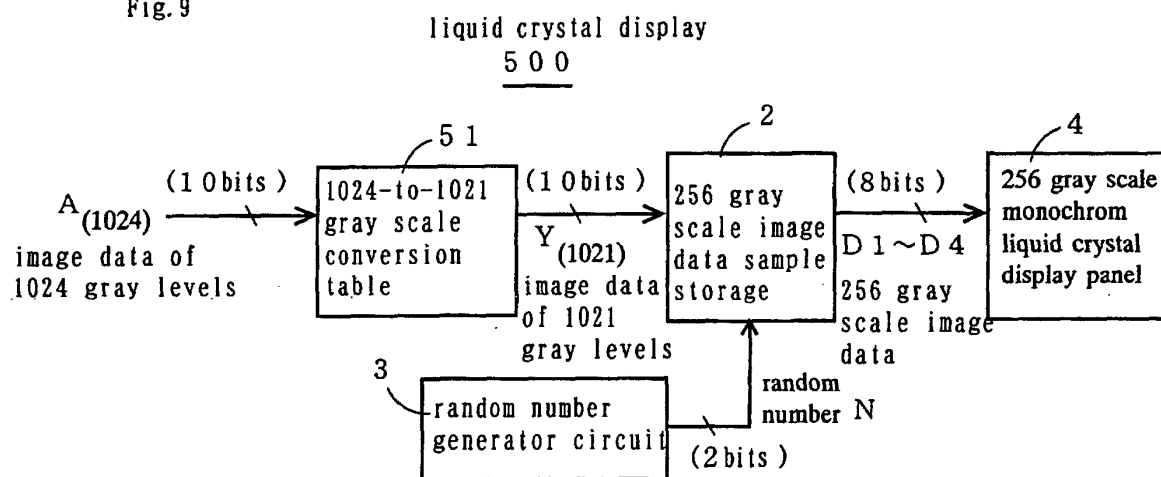


Fig. 10

1024-to-1021 gray scale
conversion table
5 1

decimal	image data of 1024 gray levels $A_{(1024)}$	image data of 1021 gray levels $Y_{(1021)}$	decimal
0	0 0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0 0	0
1	0 0 0 0 0 0 0 0 0 1	0 0 0 0 0 0 0 0 0 1	... 1
2 ...	0 0 0 0 0 0 0 0 1 0	0 0 0 0 0 0 0 0 1 0	... 2
3	0 0 0 0 0 0 0 0 1 1	0 0 0 0 0 0 0 0 1 1	... 3
	⋮	⋮	
1 0 2 3 ...	1 1 1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1 0 0	... 1 0 2 0

Fig.11

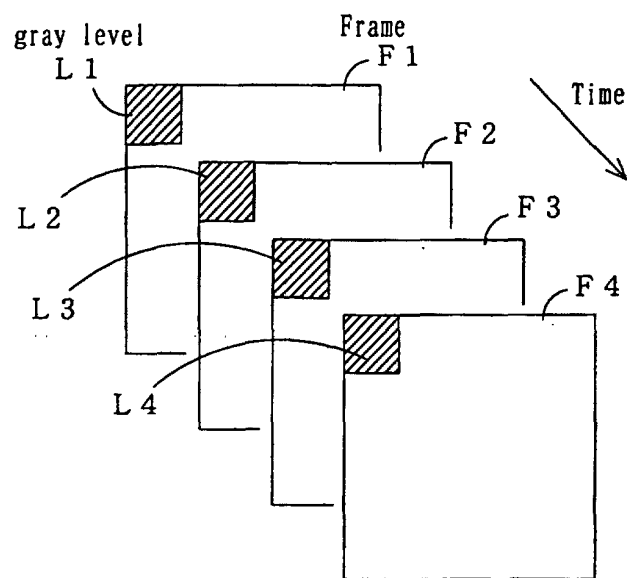

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/03924

A. CLASSIFICATION OF SUBJECT MATTER Int.Cl ⁷ G09G 3/36, 3/20, G02F1/133		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) Int.Cl ⁷ G09G 3/36, 3/20, G02F1/133		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1926-1996 Toroku Jitsuyo Shinan Koho 1994-2001 Kokai Jitsuyo Shinan Koho 1971-2001 Jitsuyo Shinan Toroku Koho 1996-2001		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 11-352954 A (Fuji Photo Film Co., Ltd.), 24 December, 1999 (24.12.99), Full text; Figs. 1 to 9 (Family: none)	3, 5, 8
A	JP 3-78790 A (Hitachi, Ltd.), 03 April, 1991 (03.04.91), page 5, lower right column, line 17 to page 6, lower right column, line 13; Fig. 6 (Family: none)	1, 2, 4, 6, 7
A	JP 7-244273 A (Optrex Corporation), 19 September, 1995 (19.09.95), Full text; Figs. 1, 2 (Family: none)	7
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to <i>understand the principle or theory underlying the invention</i> "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 07 August, 2001 (07.08.01)		Date of mailing of the international search report 21 August, 2001 (21.08.01)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)

专利名称(译)	灰度级数减少方法，图像显示方法和图像显示		
公开(公告)号	EP1302925A1	公开(公告)日	2003-04-16
申请号	EP2001930050	申请日	2001-05-11
[标]申请(专利权)人(译)	东京特殊电线株式会社		
申请(专利权)人(译)	TOTOKU ELECTRIC CO., LTD.		
当前申请(专利权)人(译)	TOTOKU ELECTRIC CO., LTD.		
发明人	NAGANUMA, TATUMI UEDAKOUJYOU TOTOKU ELEC. CO. LTD.		
IPC分类号	G09G3/20 G09G3/36 H04N5/66 G02F1/133		
CPC分类号	G09G3/3611 G09G3/2062 G09G2320/0247 G09G2340/0407		
优先权	2000162625 2000-05-31 JP		
外部链接	Espacenet		

摘要(译)

液晶显示器200包括1024到1021灰度转换计算器1，用于将1024灰度级(=10位)的图像数据A(1024)转换成1021灰度级的图像数据Y(1021)，调整四级样本存储器22和随机数发生器电路3，用于在逐帧的基础上随机选择和释放一组调整的四个灰度级 $\Delta 1p$ 到 $\Delta 4p$ ， $\Delta 1q$ 到 $\Delta 4q$ ，以及 $\Delta 1r$ 到 $\Delta 4r$ ，这是确定的。通过在一个像素的每个片段(pqr)处的1021个灰度级的图像数据Y(1021)的至少两个比特Y(1021_d2)，用于对图像数据的高八个比特Y(1021_u8)进行晒黑的加法器23 1021灰度级的Y(1021)和一组调整的4个灰度级具有256组灰度级的三组图像数据D1p到D4p，D1q到D4q和D1r到D4r，然后按顺序释放，并且一个256灰度级的单段液晶显示板24。结果，该装置不需要灰度转换表可以在总体成本中最小化。此外，可以明确地再现灰度级数大于显示面板的灰度级的图像。

