



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
08.07.2009 Bulletin 2009/28

(51) Int Cl.:
G09G 3/36^(2006.01)

(21) Application number: **08163613.6**

(22) Date of filing: **03.09.2008**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA MK RS

(72) Inventor: **Boiko, Evgueni**
Horley Row, Surrey RH6 8DH (GB)

(74) Representative: **Ertl, Nicholas Justin**
Elkington and Fife LLP
Prospect House
8 Pembroke Road
Sevenoaks
Kent TN13 1XR (GB)

(30) Priority: **31.12.2007 US 17809 P**

(71) Applicant: **TPO Displays Corp.**
Miao-Li County (TW)

(54) **Display driver method and apparatus**

(57) A method of providing an LCD overdrive drive scheme comprises measuring a stabilised transmission level of an LCD display pixel corresponding to a target drive level. An overdrive transmission level is measured corresponding to an overdrive drive level. The measured overdrive transmission level is compared with the measured stabilised transmission level to determine if the overdrive drive level is too high or too low. An iterative process then changes the overdrive drive level until a suitable overdrive drive level is found. This is used to derive overdrive drive scheme parameters which are stored in a memory of the LCD device.

This method enables an overdrive scheme to be determined during use of the device. It can therefore take account of temperature and display ageing, without the effects of these being modelled.

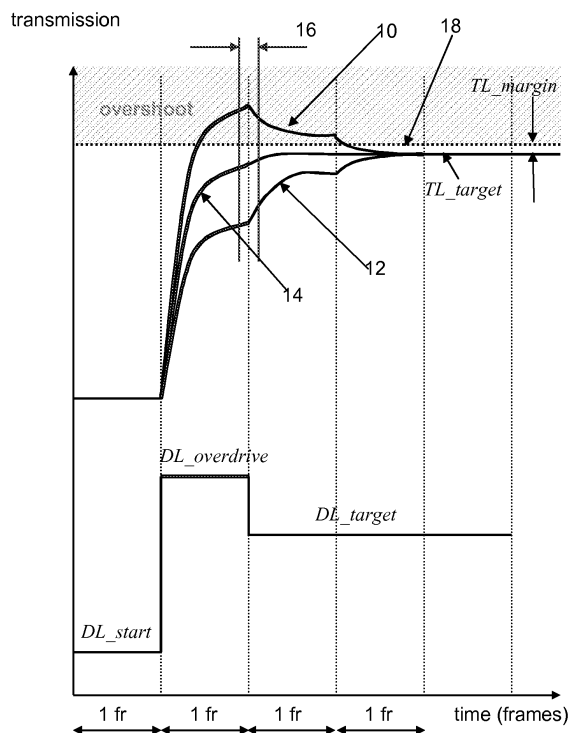


FIG. 1

Description

[0001] The invention relates to a driver for driving the pixels of a display panel. The invention also relates to a display module comprising such a driver, an apparatus comprising such a display module and a method of providing an LCD overdrive drive scheme.

[0002] LCD display modules are increasingly used for displaying motion pictures and TV signals. Fast moving objects within a picture are a challenge to an LCD display module.

[0003] The reason is the response time of the pixels of an LCD display module to a required change in luminance. An overdrive technique is known to improve the response time.

[0004] Without overdrive, when a luminance change of a pixel is required, a drive voltage is applied to the pixel such that a desired luminance will be reached in the end. The luminance of the pixel gradually changes from a starting luminance to the desired luminance. If motion pictures or TV signals have to be displayed, the required change in luminance needs to be achieved within a short time period, the so-called frame period. The frame period is the duration during which a single image of a motion picture or TV signal is supplied to the display module. During the frame period, all the pixels of the display panel are addressed once to receive a drive voltage.

[0005] When applying the drive voltage, necessary for achieving the desired luminance to the pixel, the actual luminance of the pixel lags behind the desired luminance, due to the inertia of the pixel. It may take several addressing periods until the desired luminance is achieved, causing blurred edges or ghost images.

[0006] To shorten the response time of a pixel, an overdrive voltage is applied. The level of the overdrive voltage exceeds the level of the drive voltage required to obtain the desired luminance in the end, and thus targets an overdrive luminance exceeding the desired luminance. When applying the overdrive voltage it usually takes several addressing periods until the overdrive luminance would be achieved. However, when the overdrive voltage is selected carefully, the luminance achieved at the end of a single addressing period is equal to the desired luminance.

[0007] Overdrive is recognised as a fundamental requirement for an AMLCD when good motion fidelity is expected. Single-frame LC response at 60Hz will not be sufficient in future because a number of driving schemes aimed at removing sample-and-hold motion artefacts rely on higher frame rates of 120Hz or more, thus increasing the need for overdrive.

[0008] With an overdrive technique, the desired luminance is reached within one addressing period and thus the response time of the pixel is artificially increased. The overdrive voltage required to achieve the desired luminance depends on the required luminance change and the starting luminance, and further depends on other variables, for example, on the type of display module and

the frame rate at which the display is operated. Therefore, the overdrive voltages usually are listed in Look Up Tables (LUTs).

[0009] Typically, a unique look-up table is needed for every AMLCD design and possibly adjustments are required batch to batch or even module to module. Furthermore the LUT must vary with ambient temperature and display frame rate if overdrive accuracy is to be maintained. At present, it is by no means clear how much overdrive inaccuracy is tolerable in many applications and therefore how much LUT data must be stored if a framerate-flexible and/or temperature-compensated system is to be implemented.

[0010] The standard approach to implementing overdrive is to measure LUT in the factory for each module design (batch, module) and store these in (EP)ROM in the AMLCD module or elsewhere in the system. This creates significant logistical challenges for the manufacturer and also forces a performance compromise because there is a need to trade off overdrive accuracy against the cost of ROM, temperature sensors etc. Thus, implementing overdrive as an integral part of an AMLCD module is a difficult logistical challenge for the module maker due to the specialist measurements that need to be performed for each new module design, possibly each new batch coming off the production line or even individually for each module. This is in addition to the challenge of storing enough measurement data to ensure sufficiently accurate overdrive for the application. The latter is more important for portable devices where the intended operating temperature range is likely to result in the requirement for temperature compensated overdrive.

[0011] According to the invention, there is provided a method of providing an LCD overdrive drive scheme, comprising:

- (i) measuring a stabilised transmission level of an LCD display pixel of an LCD device when a target drive level has resulted in the stabilised transmission level;
- (ii) measuring an overdrive transmission level of the display pixel at the end of a single frame after the application of an overdrive drive level;
- (iii) comparing the measured overdrive transmission level with the measured stabilised transmission level to determine if the overdrive drive level is too high or too low;
- (iv) if the overdrive drive level is too high or too low, changing the overdrive drive level and repeating steps (ii) and (iii) until a suitable overdrive drive level is found; and
- (v) using the suitable overdrive drive level found to derive overdrive drive scheme parameters and storing the parameters in a memory of the LCD device.

[0012] This method enables an overdrive scheme to be determined during use of the device. It can therefore

take account of temperature and display ageing, without the effects of these being modelled. Thus, the invention avoids the need for the module maker to understand fully the overdrive characteristics and maintain LUT measurement capability. The logistical effort to supply the correct LUTs with each new product, product update, or product batch is avoided. The overdrive accuracy is also provided automatically across a range of temperatures and frame rates.

[0013] The measurements are comparative, which reduces the accuracy requirements for the measurements.

[0014] The method can be implemented automatically and periodically or continuously in the background as part of normal operation of the AMLCD module, in a robust and simple way. Thus the logistical challenge is removed and a means to compensate for temperature variation is provided.

[0015] The transmission level can be measured by a light sensor (i.e. direct measurement) or derived from a measurement of LC capacitance (i.e. indirect measurement).

[0016] The LCD display pixel can comprise a dummy pixel (or row of pixels or multiple rows of pixels) of the LCD device. This means the method for deriving the overdrive parameters can be implemented without affecting the normal display function. Thus, the method can be performed during normal use of the display device as a background function using the dummy pixel(s).

[0017] The overdrive drive level can be determined to be too high if there is overshoot of the transmission level above a threshold which comprises the stabilised transmission level plus a predetermined amount. The overdrive drive level is determined to be too low if the transmission level is below the threshold. This enables a simple iterative process to be defined to look for the best overdrive level for the particular target drive level being tested. The suitable overdrive level can for example comprise the maximum overdrive drive level for which there is no overshoot above the threshold. The overdrive drive scheme parameters can comprise LUT parameters.

[0018] The invention also provides an LCD driver comprising:

- a processor; and
- a memory for storing overdrive drive scheme parameters,

wherein the processor is adapted to control a display pixel and a measuring means to:

- (i) measure a stabilised transmission level of the display pixel when a target drive level has resulted in the stabilised transmission level;
- (ii) measure an overdrive transmission level of the display pixel at the end of a single frame after the application of an overdrive drive level;
- (iii) compare the measured overdrive transmission level with the measured stabilised transmission level

to determine if the overdrive drive level is too high or too low;

(iv) if the overdrive drive level is too high or too low, change the overdrive drive level and repeat steps (ii) and (iii) until a suitable overdrive drive level is found; and

(v) use the suitable overdrive drive level found to derive overdrive drive scheme parameters for storage in the memory.

[0019] This driver can be used in an LCD device comprising a display panel and means for measuring a transmission level of an LCD display pixel.

[0020] The method of the invention can be implemented as a computer program.

[0021] Examples of the invention will now be described with reference to the accompanying drawings, in which:

Figure 1 shows pixel voltages and is used to explain the method of the invention;

Figure 2 is used to explain the iterative process of the method of the invention; and

Figure 3 shows the display driver and device of the invention.

[0022] The invention provides a method of providing an LCD overdrive drive scheme in which the suitable overdrive level is determined in use, and based on comparative measurements between the desired transmission level of the LC pixel and the transmission level provided by a sequence of test overdrive levels. This provides an iterative process for determining the suitable overdrive level, and which can compensate for temperature and frame rate without requiring detailed modelling of the effects of these parameters on the required overdrive scheme.

[0023] The method essentially provides overdrive drive scheme parameters, for example in the form of LUT values. The essence of the LUT measurement algorithm is explained with reference to Figures 1 and 2.

[0024] Figure 1 shows the voltage profile of a pixel voltage drive level "DL" as applied to the pixel when the gate line is turned on.

[0025] The drive level starts at a start value DL_start which represents the drive level during the previous frame, and is then held at an overdrive level DL_overdrive before being returned to the target level DL_target.

[0026] The first step of the process is to measure a stabilised transmission level of the LCD display pixel when the target drive level DL_target has resulted in the stabilised transmission level. The stabilised transmission level is shown as TL_target. This stabilised transmission level can for example be measured after the target drive level DL_target has been applied for a number of frames in succession.

[0027] An overdrive transmission level of the display pixel is then measured at the end of a single frame after the application of an overdrive drive level DL_overdrive.

The overdrive level is selected as a test overdrive value, that is somewhere within the maximum possible overdrive range. This overdrive level can be too high, so that there is significant overshoot in the resulting pixel transmission as shown by plot 10, or it not be strong enough so that the pixel transmission is still slow to respond, as shown by plot 12. A good overdrive profile is shown by plot 14, as the transmission level at the end of the single frame period is close to the desired transmission level TL_target. The measurement interval is shown as region 16.

[0028] The measured overdrive transmission level, measured during time interval 16, is compared with the measured stabilised transmission level TL_target to determine if the overdrive drive level is too high (plot 10) or too low (plot 12).

[0029] The overdrive drive level is determined to be too high if there is overshoot of the transmission level above a threshold 18 which comprises the stabilised transmission level T_target plus a predetermined amount TL_margin (the value of TL_margin may be zero if it is desired that the reached brightness never exceeds the target brightness). The overdrive drive level is determined to be too low if the transmission level is below the threshold 18. In this way, a simply binary comparison can be implemented to determine if the measured transmission level is too high or too low.

[0030] A suitable overdrive level can be determined to be the one with the maximum overdrive level DL_overdrive for which there is no overshoot above the threshold 18.

[0031] To find this suitable level, an iterative process can be followed, in which the overdrive level is varied, as explained with reference to Figure 2.

[0032] The left part 20 of Figure 2 shows the first overdrive test after determining the target transmission level TL_target.

[0033] The overdrive applied is the value "OD test" and it can be anywhere within the permissible overdrive range "poss. range", for example in the middle of the range.

[0034] If overshoot is detected, the bottom part of the overdrive range, below the OD test value, becomes the new range. This is because the previous overdrive level was too high. This is shown in plot 22. The next overdrive test, "New OD test" is at the mid point of the bottom part of the range, as shown.

[0035] If no overshoot was detected in test 20, the top part of the overdrive range becomes the new range as shown in plot 24.

[0036] This process repeats iteratively until the final range is indivisible, and therefore contains just 1 grey level, i.e. the finest resolution of the overdrive signal DL_overdrive.

[0037] The end result is that the maximum overdrive level DL_overdrive is found for which there is no overshoot above the threshold 18.

[0038] The overdrive values can be used to form a LUT, which can then be applied in know manner. The

LUT can provide overdrive levels for all start and finish transmission levels (i.e. all amounts of change in transmission level). This modelling can be achieved by obtaining suitable overdrive levels for all combinations of starting drive level (DL_start) and target drive level (DL_target), or by extrapolating between a smaller set.

[0039] The use of a subset LUT obtained by overdrive measurement, together with interpolation is the preferred method. This is because it speeds up the measurement greatly. The overdrive LUT generally implements a smoothly varying surface function, so simple linear interpolation is sufficient to extrapolate between values, and this is inexpensive in terms of chip area. This also reduces EEPROM or RAM requirement since only the subset LUT needs be stored and the interpolation can be performed on power-up (so that there is a partial LUT in EEPROM and a full LUT in RAM). The interpolation can even be provided in real time.

[0040] Dummy pixels can be used for the test method. A single dummy pixel could be used, but preferably a plurality of pixels, for example a row of pixels or even multiple rows of pixels, are used. This enables multiple overdrive iterative measurements to be obtained in parallel.

[0041] The description given above relates to a most basic variant of the algorithm. This can be elaborated to achieve better efficiency, accuracy etc. For example, the measurements could be averaged to increase accuracy, previously recorded LUT values could be used to limit the logical starting range etc. Thus, the algorithm can make use of already measured LUT values in order to arrive more quickly at the values still to be measured. This can speed up the rest of the measurements taken. In the simplest case, the possible range "poss. range" can be narrowed down more using the information contained in a partially measured LUT or LUT subset. A more advanced algorithm could in addition generate better starting guesses of the overdrive value, instead of simply selecting the value in the middle of the range.

[0042] The derived LUT can be stored in RAM (regenerated on power-up each time) or EEPROM (in which case a relative or absolute temperature sensor would be appropriate to ensure that an incorrect LUT is not applied on power-up when e.g. the temperature at last power-down was significantly different). A combination approach is also possible depending on application requirements.

[0043] The method can be applied as a continuous background measurement. This results in overdrive that is continually adapting to the ambient temperature, thus removing the need for other means of temperature compensation. Continuously averaging the LUT values results in the accuracy of the LUT improving over time.

[0044] The transmission can be measured directly using a light sensitive element and the backlight, or indirectly by measuring the capacitance of the liquid crystal which relates in a known way to the transmission.

[0045] Figure 3 shows a system 28 of the invention,

comprising an AMLCD having a display panel 30 with direct or indirect transmission sensing elements 32, connected via control and readout lines to a display driver integrated circuit 34 (x-Si, LTPS or other). The display driver circuit contains circuits that implement the overdrive, for example RAM and/or EEPROM memory 36 and circuits 38 that implement the algorithm described above for deriving the LUT to be stored in memory.

[0046] The transmission sensing elements 32 are associated with a dummy row or rows of pixels in this example.

[0047] The algorithm can be implemented by a processor which runs a computer program.

[0048] The algorithm can be implemented by routine hardware and software, and the transmission measurement can also be implemented using known techniques, for example using photodiodes for measuring a light level when a known backlight brightness is applied. The backlight can be segmented so that the part of the backlight behind the dummy pixels can be independently controlled. The light output from the dummy pixels can also be shielded from the viewer.

[0049] It is also possible to use normal pixels of the display for the overdrive algorithm, either as an operation during start-up or continuously during use of the display.

[0050] The invention is of particular interest for mobile devices, such as mobile phones, portable DVD players, MP4 players, screens for automotive applications, laptops, and also for LCDTVs.

[0051] Various modifications will be apparent to those skilled in the art.

Claims

1. A method of providing an LCD overdrive drive scheme, comprising:

- (i) measuring a stabilised transmission level of an LCD display pixel of an LCD device when a target drive level has resulted in the stabilised transmission level;
- (ii) measuring an overdrive transmission level of the display pixel at the end of a single frame after the application of an overdrive drive level;
- (iii) comparing the measured overdrive transmission level with the measured stabilised transmission level to determine if the overdrive drive level is too high or too low;
- (iv) if the overdrive drive level is too high or too low, changing the overdrive drive level and repeating steps (ii) and (iii) until a suitable overdrive drive level is found; and
- (v) using the suitable overdrive drive level found to derive overdrive drive scheme parameters and storing the parameters in a memory of the LCD device.

2. A method as claimed in claim 1, wherein the transmission level is measured by a light sensor.

3. A method as claimed in claim 1, wherein the transmission level is derived from a measurement of LC capacitance.

4. A method as claimed in any preceding claim, wherein the LCD display pixel comprises a dummy pixel of the LCD device.

5. A method as claimed in claim 4, wherein the method is performed during normal use of the display device as a background function using the dummy pixel.

6. A method as claimed in any preceding claim, wherein the overdrive drive level is determined to be too high if there is overshoot of the transmission level above a threshold which comprises the stabilised transmission level plus a predetermined amount.

7. A method as claimed in claim 6, wherein the overdrive drive level is determined to be too low if the transmission level is below the threshold.

8. A method as claimed in claim 6 or 7, wherein the suitable overdrive level comprises the maximum overdrive drive level for which there is no overshoot above the threshold.

9. A method as claimed in any preceding claim, wherein the overdrive drive scheme parameters comprises LUT parameters.

10. A method as claimed in any preceding claim, wherein the first overdrive level applied in step (ii) is selected taking into account existing overdrive drive scheme parameters.

11. An LCD driver comprising:

- a processor; and
- a memory for storing overdrive drive scheme parameters,

wherein the processor is adapted to control a display pixel and a measuring means to:

- (i) measure a stabilised transmission level of the display pixel when a target drive level has resulted in the stabilised transmission level;
- (ii) measure an overdrive transmission level of the display pixel at the end of a single frame after the application of an overdrive drive level;
- (iii) compare the measured overdrive transmission level with the measured stabilised transmission level to determine if the overdrive drive level is too high or too low;

(iv) if the overdrive drive level is too high or too low, change the overdrive drive level and repeat steps (ii) and (iii) until a suitable overdrive drive level is found; and

(v) use the suitable overdrive drive level found to derive overdrive drive scheme parameters for storage in the memory. 5

12. An LCD device comprising:

a display panel;
a display driver as claimed in claim 11; and
means for measuring a transmission level of an LCD display pixel. 10

13. A device as claimed in claim 12, wherein the means for measuring comprises a light sensor or an LC capacitance measurement device. 15

14. A device as claimed in claim 12 or 13, wherein the LCD display pixel comprises a dummy pixel. 20

15. A computer program comprising code means adapted to perform all of the steps of claim 1 when said program is run on a computer. 25

30

35

40

45

50

55

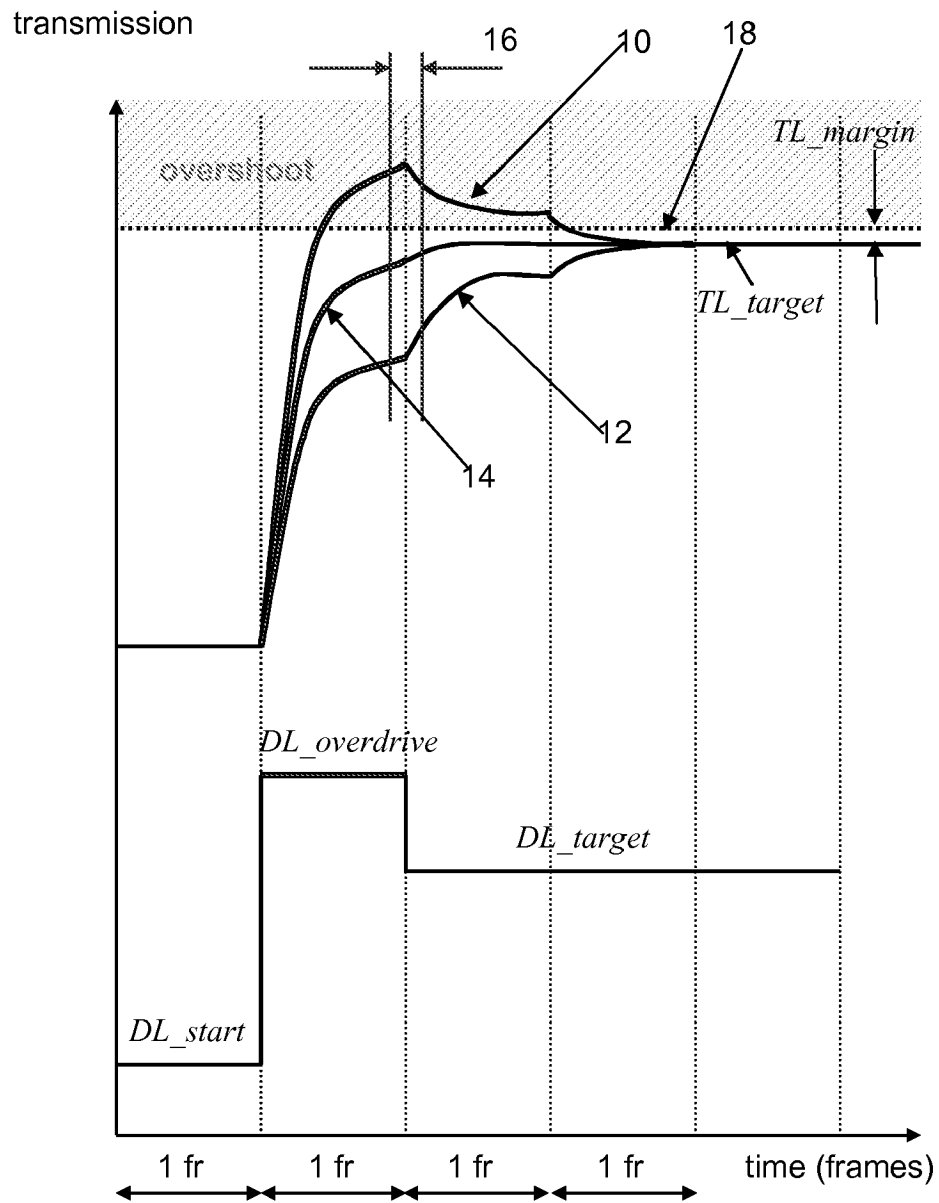


FIG. 1

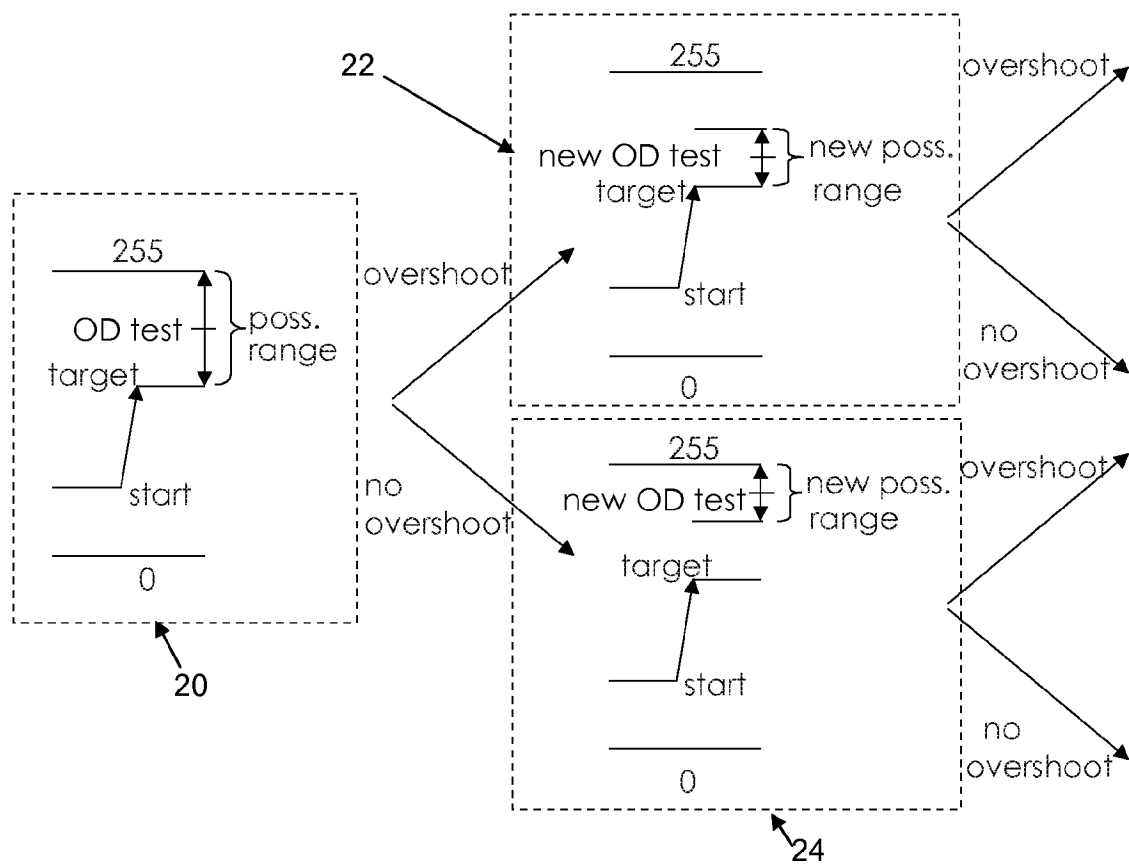


FIG. 2

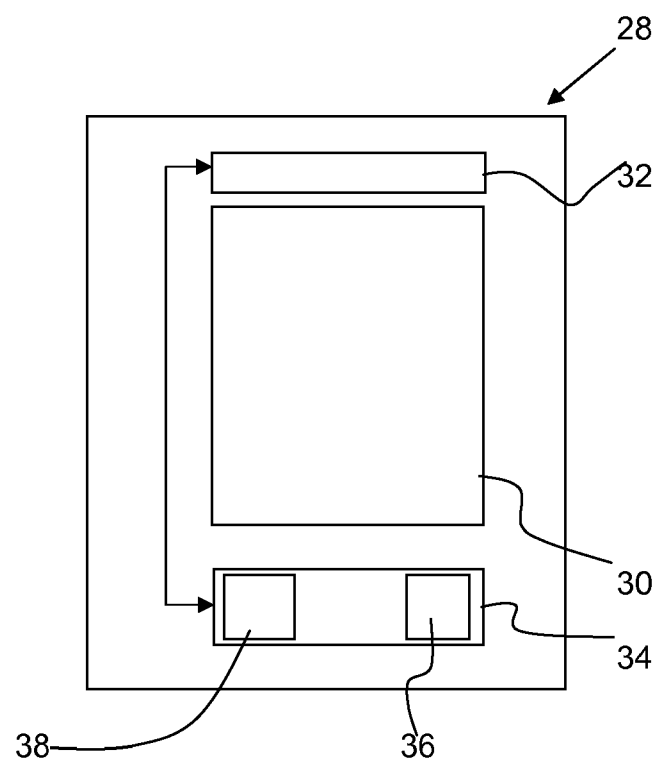


FIG. 3



EUROPEAN SEARCH REPORT

Application Number
EP 08 16 3613

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2006/044242 A1 (PARK BONG-IM [KR] ET AL) 2 March 2006 (2006-03-02)	1-3, 6-13, 15	INV. G09G3/36
Y	* the whole document *	4, 5, 14	
	* paragraphs [0002] - [0011]; figure 2 *		

A	WO 2007/026714 A (SHARP KK [JP]; NAKAGAWA KIYOSHI; YANAGI TOSHIHIRO; YAMATO ASAHI; KAWAS) 8 March 2007 (2007-03-08)	1-15	
	* the whole document *		

A	EP 1 486 945 A (SAMSUNG ELECTRONICS CO LTD [KR]) 15 December 2004 (2004-12-15)	1-15	
	* the whole document *		

A	WO 2006/063448 A (IGNIS INNOVATION INC [CA]; NATHAN AROKIA [CA]; CHAJI GHOLAMREZA REZA []) 22 June 2006 (2006-06-22)	1-15	
	* the whole document *		

Y	EP 1 729 280 A (SEMICONDUCTOR ENERGY LAB [JP]) 6 December 2006 (2006-12-06)	4, 5, 14	
	* the whole document *		

The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 23 February 2009	Examiner Bader, Arnaud
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

6
EPO FORM 1503 03.92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 08 16 3613

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-02-2009

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006044242 A1	02-03-2006	NONE	
-----	-----	-----	-----
WO 2007026714 A	08-03-2007	CN 101253544 A	27-08-2008
-----	-----	-----	-----
EP 1486945 A	15-12-2004	CN 1573451 A	02-02-2005
		JP 2005004203 A	06-01-2005
		US 2008191995 A1	14-08-2008
		US 2004252111 A1	16-12-2004
-----	-----	-----	-----
WO 2006063448 A	22-06-2006	EP 1836697 A1	26-09-2007
		JP 2008523448 T	03-07-2008
		KR 20070101275 A	16-10-2007
		US 2006158402 A1	20-07-2006
-----	-----	-----	-----
EP 1729280 A	06-12-2006	CN 1841476 A	04-10-2006
		US 2006221006 A1	05-10-2006
-----	-----	-----	-----

专利名称(译)	显示驱动方法和装置		
公开(公告)号	EP2077547A1	公开(公告)日	2009-07-08
申请号	EP2008163613	申请日	2008-09-03
[标]申请(专利权)人(译)	统宝光电股份有限公司		
申请(专利权)人(译)	TPO DISPLAYS CORP.		
当前申请(专利权)人(译)	TPO DISPLAYS CORP.		
[标]发明人	BOIKO EVGUENI		
发明人	BOIKO, EVGUENI		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3648 G09G2320/0252 G09G2320/0261 G09G2320/0285 G09G2320/041 G09G2320/043 G09G2340/16		
优先权	61/017809 2007-12-31 US		
外部链接	Espacenet		

摘要(译)

提供LCD过驱动驱动方案的方法包括测量对应于目标驱动电平的LCD显示像素的稳定传输电平。对应于过驱动驱动电平测量过驱动传输电平。将测量的过驱动传输电平与测量的稳定传输电平进行比较，以确定过驱动驱动电平是否过高或过低。然后，迭代过程改变过驱动驱动电平，直到找到合适的过驱动驱动电平。这用于导出存储在LCD设备的存储器中的过驱动驱动方案参数。该方法使得能够在使用设备期间确定过驱动方案。因此，它可以考虑温度和显示老化，而不会对这些效果进行建模。

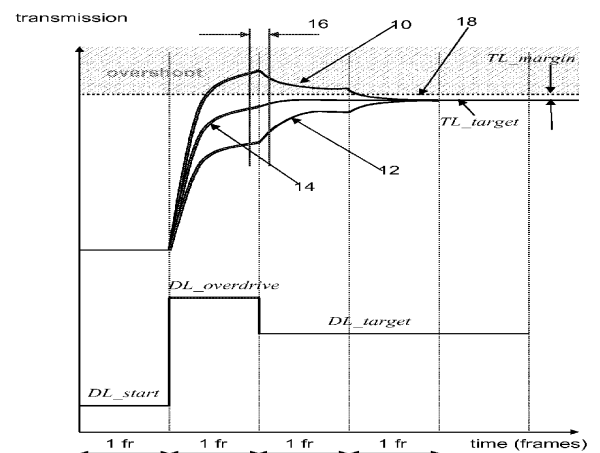


FIG. 1