



(11) **EP 2 273 482 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
26.10.2016 Bulletin 2016/43

(51) Int Cl.:
G09G 3/36 ^(2006.01) *G09G 3/34* ^(2006.01)

(21) Application number: **09742756.1**

(86) International application number:
PCT/JP2009/058667

(22) Date of filing: **08.05.2009**

(87) International publication number:
WO 2009/136632 (12.11.2009 Gazette 2009/46)

(54) **DISPLAY CONTROL DEVICE, METHOD, AND PROGRAM**

ANZEIGESTEUEVRORRICHTUNG, ANZEIGESTEUEERVERFAHREN UND
ANZEIGESTEUERPROGRAMM

DISPOSITIF, PROCÉDÉ ET PROGRAMME DE COMMANDE D’AFFICHAGE

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

(30) Priority: **08.05.2008 JP 2008122171**

(43) Date of publication of application:
12.01.2011 Bulletin 2011/02

(73) Proprietor: **Sony Corporation**
Tokyo 108-0075 (JP)

(72) Inventors:
• **INADA Tetsuji**
Tokyo 108-0075 (JP)
• **ASANO Mitsuyasu**
Tokyo 108-0075 (JP)
• **HIRAMATSU Takeshi**
Tokyo 108-0075 (JP)

• **NISHIDA Koji**
Tokyo 108-0075 (JP)

(74) Representative: **Delumeau, François Guy et al**
Cabinet Beau de Loménie
158, rue de l'Université
75340 Paris Cedex 07 (FR)

(56) References cited:
WO-A1-03/075257 JP-A- 10 161 629
JP-A- 2002 202 767 JP-A- 2004 279 503
JP-A- 2008 070 838 JP-A- 2008 096 521
US-A1- 2005 184 952 US-A1- 2007 002 081
US-A1- 2008 074 372

• **SID_JOURNALS, 1475 S. BASCOM AVE., STE.**
114, CAMPBELL, CA 95008-4006 USA, 15
December 2007 (2007-12-15), XP040426644,

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

5 **[0001]** The present invention relates to a display control apparatus and method, and a program, in particular, a display control apparatus and method, and a program which are suitable for use in cases where an image is displayed on a liquid crystal panel by using a plurality of backlights.

Background Art

10 **[0002]** In the related art, as a liquid crystal display apparatus using a transmission type liquid crystal panel, there has been proposed one which uses a plurality of backlights to vary the quantity of incident light for each display region on the liquid crystal panel, thereby achieving an increase in the dynamic range of the luminance of a displayed image (see, for example, Patent Document 1). That is, according to this liquid crystal display apparatus, the contrast of the displayed
15 image can be enhanced.

Prior Art Documents

Patent Documents

20 **[0003]** US 2008/0074372 describes an image display apparatus according to the preamble of claim 1. Patent Document 1: Japanese Unexamined Patent Application Publication No. 2007-322901. US 2005/0184952 describes another LCD apparatus.

25 Disclosure of Invention

Technical Problem

30 **[0004]** Incidentally, in the case where each of a plurality of backlights makes light incident on each corresponding display region on the liquid crystal panel in this way, as shown in Fig. 1, the light quantity to be emitted by each backlight can be found from the image signal of an image to be displayed.

[0005] That is, in Fig. 1, an image signal having the stepped waveform indicated by arrow A11 is inputted to a light emission quantity calculating section 11 and a division section 12. In the light emission quantity calculating section 11, the light quantity to be emitted by each single backlight is calculated on the basis of the image signal.

35 **[0006]** Here, since the size of each single backlight is larger than the size of pixels in the display region of the liquid crystal panel, the light quantity from the backlight is calculated from the pixel value, more specifically, the luminance value, of each pixel of an image displayed in the display region of the liquid crystal panel corresponding to the backlight. Also, as indicated by arrow A12, light from the backlight is made incident uniformly on each position of the display region of the liquid crystal panel.

40 **[0007]** It should be noted that in the waveforms indicated by arrow A11 to arrow A13 in Fig. 1, the horizontal direction indicates an image based on an image signal, or the position of a pixel in the display region of the liquid crystal panel which displays the image, and the vertical direction indicates luminance.

[0008] Also, in the division section 12, the supplied image signal is divided by the light quantity from the light emission quantity calculating section 11, thereby calculating the transmittance of light in the display region of the liquid crystal panel corresponding to the backlight.

45 **[0009]** Then, once the light quantity and the transmittance are calculated, the backlight emits light on the basis of the light quantity calculated by the light emission quantity calculating section 11, and makes the light incident on the liquid crystal panel. Also, the liquid crystal panel transmits light from the backlight at the transmittance calculated by the division section 12. Thus, substantially the same image as the image of an inputted image signal is displayed in the display
50 region of the liquid crystal panel.

[0010] However there are cases in which when the backlight emits light at the light quantity calculated by the light emission quantity calculating section 11, the luminance of light incident on the liquid crystal panel from the backlight is lower than the luminance necessary for displaying an image based on the inputted image signal.

55 **[0011]** That is, when the light quantity (luminance) of light indicated by arrow A12 is insufficient for displaying a predetermined region of the image indicated by arrow A11, the transmittance of each pixel in the display region of the liquid crystal panel which is found by the division section 12 exceeds 100% as indicated by arrow A13. In Fig. 1, the portion indicated by a dotted line of the transmittance of each pixel in the display region indicated by arrow A13 indicates a portion where the transmittance exceeds 100%.

[0012] For example, it is known that since the backlight and the liquid crystal panel differ in response speed during operation, and changing of the light quantity of light from the backlight and changing of the transmittance of the liquid crystal panel are not synchronized with each other, the image quality of an image deteriorates when the light quantity of light from the backlight changes abruptly. In particular, there are cases in which when the image to be displayed is a moving image, the light quantity of light from the backlight changes abruptly, and the image quality of the image noticeably deteriorates.

[0013] Accordingly, to suppress such deterioration in image quality, it is conceivable to apply cyclic processing to the light quantity calculated in the light emission quantity calculating section 11. In such a case, the light emission quantity calculating section 11 performs cyclic processing so as to calculate the final light quantity of a frame to be displayed from now on, on the basis of the light quantity of the frame of an image to be displayed from now on, and the light quantity of a frame immediately preceding the frame, thereby suppressing an abrupt change in light quantity.

[0014] However, since an abrupt change in light quantity is suppressed when cyclic processing is applied to the light quantity, there are cases when the final light quantity found by the cyclic processing, that is, the luminance of light from the backlight is lower than the luminance necessary for displaying the image to be displayed from now on.

[0015] When the light quantity of light from the backlight becomes insufficient as described above, in a part of the region on the image displayed on the liquid crystal panel, changes in luminance are lost and the image deteriorates in image quality. That is, since pixels in a liquid crystal panel cannot transmit light at a transmittance exceeding 100%, the luminances of images displayed by pixels whose calculated transmittances exceed 100% all become the same value.

[0016] As described above, in the case of displaying an image on a liquid crystal panel by using a backlight, there are cases where, depending on the inputted image signal, the light quantity of light radiated from the backlight is not controlled appropriately, and the image quality of a displayed image deteriorates.

[0017] The present invention has been made in view of the above circumstances, and makes it possible to suppress deterioration in image quality due to insufficient light quantity of light from the backlight.

Technical Solution

[0018] The invention provides display control apparatus according to claim 1.

[0019] The display control apparatus is provided with limiting means for setting an upper limit value of the correction value for the not-yet-displayed image when the not-yet-displayed image is a moving image, and setting the upper limit value as the correction value for the not-yet-displayed image when the correction value is larger than the upper limit value.

[0020] The display control apparatus is provided with motion detecting means for detecting motion from the not-yet-displayed image on the basis of the image signal, and the limiting means can be configured to set the upper limit value according to a motion amount of the motion detected from the not-yet-displayed image.

[0021] The limiting means is configured to set a lower limit value of the correction value for the not-yet-displayed image when the not-yet-displayed image is a still image, and set the lower limit value as the correction value for the not-yet-displayed image when the correction value is smaller than the lower limit value.

[0022] The limiting means is configured to cancel setting of the upper limit value and set the lower limit value, when the display image is a moving image and the correction value for the previous display image is larger than the upper limit value for the not-yet-displayed image, and the correction value changing means can be configured to decrease the correction value for the previous display image to obtain the correction value for the not-yet-displayed image.

[0023] The invention also provides a display control method according to claim 2 and a computer program according to claim 3.

[0024] According to the present invention, a backlight luminance is calculated on the basis of an image signal of a display image, the backlight luminance indicating a luminance of light which is made incident on a display panel that displays the display image by transmitting light, and which is radiated by a backlight. A correction value for correcting the backlight luminance of a previous display image, which is the display image displayed temporally before a not-yet-displayed image that is the display image to be displayed from now on, is increased to obtain the correction value for the not-yet-displayed image when the not-yet-displayed image is a moving image, and the correction value for the previous display image is decreased to obtain the correction value for the not-yet-displayed image when the not-yet-displayed image is a still image. The backlight luminance is corrected by adding the correction value that has been changed, to the backlight luminance of the not-yet-displayed image.

Advantageous Effects

[0025] According to an aspect of the present invention, an image can be displayed. In particular, according to an aspect of the present invention, deterioration in image quality due to insufficient light quantity of light from the backlight can be suppressed. Brief Description of Drawings

[0026]

[Fig. 1] Fig. 1 is a diagram showing the configuration of a liquid crystal display apparatus according to the related art.

[Fig. 2] Fig. 2 is a diagram showing a configuration example of an embodiment of a display apparatus to which the present invention is applied.

[Fig. 3] Fig. 3 is a diagram showing a more detailed configuration example of a display control section.

[Fig. 4] Fig. 4 is a diagram showing a more detailed configuration example of a correction value calculating section.

[Fig. 5] Fig. 5 is a flowchart illustrating a display process.

[Fig. 6] Fig. 6 is a flowchart illustrating a backlight luminance correcting process.

[Fig. 7] Fig. 7 is a diagram showing another configuration example of a correction value calculating section.

[Fig. 8] Fig. 8 is a flowchart illustrating a backlight luminance correcting process.

[Fig. 9] Fig. 9 is a diagram showing another configuration example of a backlight luminance calculating section.

[Fig. 10] Fig. 10 is a flowchart illustrating a backlight luminance correcting process.

[Fig. 11] Fig. 11 is a diagram showing a configuration example of a computer. Best Mode for Carrying Out the Invention

[0027] Hereinbelow, an embodiment to which the present invention is applied will be described with reference to the drawings.

[0028] Fig. 2 is a diagram showing a configuration example of an embodiment of a display apparatus to which the present invention is applied.

[0029] A display apparatus 61 includes display control section 81-1 to display control section 81-4, backlight control section 82-1 to backlight control section 82-4, backlight 83-1 to backlight 83-4, a liquid crystal panel control section 84, and a liquid crystal panel 85.

[0030] The display apparatus 61 is, for example, a liquid crystal display apparatus such as a liquid crystal display. An image signal of a display image to be displayed on the liquid crystal panel 85 is inputted to the display control section 81-1 to display control section 81-4 of the display apparatus 61.

[0031] On the basis of the inputted image signal, the display control section 81-1 to the display control section 81-4 calculate the light quantity of light to be radiated from the backlight 83-1 to the backlight 83-4, more specifically, a backlight luminance indicating the luminance of light, and supplies the backlight luminance to the backlight control section 82-1 to the backlight control section 82-4.

[0032] Also, on the basis of the image signal, with respect to each of display regions of the liquid crystal panel 85 on which much of light from each of the backlight 83-1 to the backlight 83-4 is incident, the display control section 81-1 to the display control section 81-4 calculate the transmittance of each pixel within the display region and supplies the transmittance to the liquid crystal panel control section 84. This transmittance takes a value between 0 and 1, for example.

[0033] It should be noted that a pixel in the display region of the liquid crystal panel 85 refers to a single cell that serves as a unit of image display, and is made up of each region that transmits each light of R, G, and B.

[0034] On the basis of the backlight luminance supplied from the display control section 81-1 to the display control section 81-4, the backlight control section 82-1 to the backlight control section 82-4 control the backlight 83-1 to the backlight 83-4 so as to emit light. Also, in accordance with the control of the backlight control section 82-1 to the backlight control section 82-4, the backlight 83-1 to the backlight 83-4 emit light, and makes the light incident on the liquid crystal panel 85.

[0035] The liquid crystal panel control section 84 causes the liquid crystal panel 85 to transmit light at the transmittance of each pixel, that is, aperture ratio, supplied from the display control section 81-1 to the display control section 81-4. The liquid crystal panel 85 transmits light incident on each pixel in the display region from the backlight 83-1 to the backlight 83-4, at the transmittance instructed from the liquid crystal panel control section 84, thereby displaying a display image.

[0036] It should be noted that hereinafter, each of the display control section 81-1 to the display control section 81-4 will be simply referred to as display control section 81 in cases where there is no need to individually differentiate between them, and each of the backlight control section 82-1 to the backlight control section 82-4 will be simply referred to as backlight control section 82 in cases where there is no need to individually differentiate between them. Also, hereinafter, each of the backlight 83-1 to the backlight 83-4 will be simply referred to as backlight 83 in cases where there is no need to individually differentiate between them.

[0037] In the display apparatus 61, the backlight 83 as a light source is placed on the back surface of the liquid crystal panel 85, and much of the light radiated from the backlight 83 is incident on the display region of the liquid crystal panel 85 opposed to the backlight 83. For example, much of the light radiating from the backlight 83-1 is incident on the portion of the liquid crystal panel 85 located diagonally above to the right in the drawing. Therefore, in the case of displaying an image such that the side of the liquid crystal panel 85 located diagonally above to the right is bright, and the other portion is dark, only the backlight 83-1 can be made to emit light at somewhat high luminance, and the other backlight 83-2 to backlight 83-4 can be made to emit light at relatively low luminance. This makes it possible to suppress consumption of power by the backlight 83. Also, the dynamic range of the luminance of a display image can be increased, and the contrast of the display image can be enhanced.

[0038] It should be noted that while the display apparatus 61 is provided with the transmission type liquid crystal panel 85, not only a liquid crystal panel but any kind of transmission type display panel that displays an image by transmitting light from the backlight 83 may be used.

[0039] Next, Fig. 3 is a diagram showing a more detailed configuration example of the display control section 81 in Fig. 2.

[0040] The display control section 81 includes a backlight luminance calculating section 121, a moving image determining section 122, a correction value calculating section 123, an addition section 124, an incidence luminance calculating section 125, and a division section 126.

[0041] An image signal inputted to the display control section 81 of the display apparatus 61 is supplied to the backlight luminance calculating section 121, the moving image determining section 122, and the division section 126 of the display control section 81. This image signal is, for example, the image signal of a moving image or still image.

[0042] The backlight luminance calculating section 121 calculates the backlight luminance of light to be radiated by the backlight 83, on the basis of the supplied image signal, and supplies the backlight luminance to the addition section 124.

[0043] For example, on the basis of an image signal, the backlight luminance calculating section 121 finds the maximum value of luminances of pixels in a region on a display image based on the image signal which is a region displayed in the display region of the liquid crystal panel 85 corresponding to the backlight 83. Then, on the basis of the maximum value found, the backlight luminance calculating section 121 finds the backlight luminance of light to be radiated by the backlight 83.

[0044] It should be noted that the display region of the liquid crystal panel 85 corresponding to the backlight 83 refers to a region which is obtained by virtually splitting the entire display region of the liquid crystal panel 85 and on which the majority of light from each single backlight 83 directly below the back surface of the liquid crystal panel 85 is incident.

[0045] For example, supposing that the display region of the liquid crystal panel 85 is virtually split in four, into upper right, upper left, lower left, and lower right regions in Fig. 2, display regions respectively corresponding to the backlight 83-1 to the backlight 83-4 are the upper right, upper left, lower left, and lower right regions on the display region. Hereinafter, a display region of the liquid crystal panel 85 corresponding to the backlight 83 will be also referred to as partial display region.

[0046] The moving image determining section 122 performs a moving image determining process on the basis of a supplied image signal, and determines whether or not the display image based on the supplied image signal is a moving image. For example, the moving image determining section 122 performs motion detection by using a display image to be displayed from now on, and a display image displayed on the liquid crystal panel 85 immediately before the display image, thereby identifying whether or not the display image of the supplied image signal is a moving image, or is a still image.

[0047] The moving image determining section 122 supplies image information indicating the result of determination by the moving image determining process, and motion information indicating the motion amount of the detected motion, to the correction value calculating section 123.

[0048] It should be noted that since display images are displayed in succession in the display apparatus 61, there are cases when, for example, after a moving image is displayed as a display image, a plurality of still images are sequentially displayed. In the following description, each of display images displayed in succession in the display apparatus 61 will be referred to as one frame, that is, one frame of image.

[0049] On the basis of the image information and the motion information supplied from the moving image determining section 122, the correction value calculating section 123 calculates a correction value for correcting the backlight luminance, and supplies the correction value, to the addition section 124. The addition section 124 adds the correction value from the correction value calculating section 123 to the backlight luminance from the backlight luminance calculating section 121, thereby correcting the backlight luminance. Also, the addition section 124 supplies the corrected backlight luminance to the backlight control section 82 and the incidence luminance calculating section 125.

[0050] On the basis of the backlight luminance supplied from the addition section 124, the incidence luminance calculating section 125 calculates a pixel incidence luminance indicating the luminance of light estimated to be incident on a pixel from the backlight 83, with respect to each pixel in the partial display region of the liquid crystal panel 85 corresponding to the backlight 83. That is, a pixel incidence luminance represents information indicating the luminance of light estimated to be incident on a pixel in the partial display region from the backlight 83, in the case when the backlight 83 emits light at the supplied backlight luminance.

[0051] For example, the incidence luminance calculating section 125 holds in advance a profile indicating how light radiated from the backlight 83 is diffused when the backlight 83 emits light.

[0052] Then, by using the held profile, the incidence luminance calculating section 125 finds the luminances of light estimated to be incident from the backlight 83 on individual pixels in the partial display region of the liquid crystal panel 85 corresponding to the backlight 85, when the backlight 83 emits light at the backlight luminance supplied from the addition section 124, and sets those pixel-by-pixel luminances as pixel incidence luminances.

[0053] Upon finding the pixel incidence luminances at individual pixels in the partial display region, the incidence luminance calculating section 125 supplies those pixel incidence luminances to the division section 126.

[0054] The division section 126 divides the signal value of a supplied image signal, more specifically a luminance found from the signal value (pixel value of a display image), by the pixel incidence luminances from the incidence luminance calculating section 125, thereby calculating the transmittances of individual pixels in the partial display region. Then, the division section 126 supplies the calculated pixel-by-pixel transmittances to the liquid crystal panel control section 84.

[0055] For example, let a targeted pixel in a partial display region be referred to as target pixel. Also, let the pixel incidence luminance of the target pixel be CL, the backlight luminance of the backlight 83 be BL, and the luminance of a pixel on a display image located at the same position as the target pixel, that is, a pixel on a display image in which an image displayed by the target pixel is displayed, be IL. Further, let the transmittance of light at the target pixel be T.

[0056] In this case, when the backlight 83 is made to emit light at backlight luminance BL, the luminance of light incident on the target pixel from the backlight 83, that is, the pixel incidence luminance of the target pixel is CL. Then, when the target pixel transmits, at transmittance T, the light of pixel incidence luminance CL incident from the backlight 83, the luminance of light radiated from the target pixel, that is, the luminance of the target pixel as perceived by the user looking at the liquid crystal panel 85 (hereinafter, also referred to as display luminance OL) is represented by pixel incidence luminance CL x transmittance T. If display luminance OL is equal to luminance IL of a pixel in a display image, the same image as the display image is displayed on the liquid crystal panel 85. Hence, supposing that display luminance OL and luminance IL are equal, Equation (1) below holds.

$$\text{Transmittance } T = (\text{luminance IL of a pixel in a display image}) / (\text{pixel incidence luminance CL}) \dots (1)$$

[0057] Therefore, the division section 126 can calculate appropriate transmittance T of the target pixel by dividing the signal value of an image signal representing the pixel value of a pixel in a display image corresponding to the target pixel, more specifically, luminance IL of the pixel in the display image, by pixel incidence luminance CL of the target pixel supplied from the incidence luminance calculating section 125.

[0058] Next, Fig. 4 is a block diagram showing a more detailed configuration example of the correction value calculating section 123 in Fig. 3.

[0059] The correction value calculating section 123 includes a changing section 151 and a limiting section 152.

[0060] A correction value for the display image of a frame that temporally immediately precedes a display image to be displayed from now on, is supplied to the changing section 151 from the limiting section 152, and image information is supplied to the changing section 151 from the moving image determining section 122. The changing section 151 changes the correction value from the limiting section 152 on the basis of the supplied image information, and supplies the changed correction value to the limiting section 152.

[0061] Image information and motion information are supplied to the limiting section 152 from the moving image determining section 122. On the basis of the supplied image information and motion information, the limiting section 152 sets a limiting value that serves as the upper limit or lower limit when limiting the correction value.

[0062] Specifically, when image information indicating that the display image to be displayed from now on is a moving image is supplied, the limiting section 152 sets an upper limit value of the correction value as a limiting value, in accordance with the motion amount indicated by the supplied motion information. Also, when image information indicating that the display image to be displayed from now on is a still image is supplied, the limiting section 152 sets a lower limit value of the correction value as a limiting value.

[0063] The limiting section 152 limits the correction value from the changing section 151 by the limiting value that has been set, thereby obtaining the final correction value. Also, the limiting section 152 supplies the final correction value to the changing section 151 and the addition section 124.

[0064] Incidentally, when the image signal of a display image is supplied to the display apparatus 61, and displaying of the display image is instructed, in response to the instruction, the display apparatus 61 starts a display process of displaying the display image. Hereinafter, the display process by the display apparatus 61 will be described with reference to the flowchart in Fig. 5.

[0065] In step S11, the backlight luminance calculating section 121 calculates the backlight luminance of the backlight 83 on the basis of an inputted image signal. Also, the backlight luminance calculating section 121 performs cyclic processing to correct the calculated backlight luminance, and supplies the corrected backlight luminance to the addition section 124.

[0066] That is, the backlight luminance calculating section 121 subtracts the backlight luminance of a frame to be displayed, from the backlight luminance of the temporally immediately preceding frame to find a difference in backlight luminance, and multiplies the difference by a cyclic coefficient that is set in advance. Then, the backlight luminance

calculating section 121 adds the difference multiplied by the cyclic coefficient, to the backlight luminance of the frame to be displayed, thereby correcting the backlight luminance.

[0067] By applying cyclic processing to the backlight luminance in this way, the backlight luminance does not change abruptly even when the luminance of a display image changes abruptly. That is, the backlight luminance changes gradually at a rate according to the cyclic coefficient. Thus, abrupt switching of displays can be mitigated, and deterioration in the image quality of an image which occurs due to an abrupt change in backlight luminance can be suppressed.

[0068] In step S12, the display control section 81 performs a backlight luminance correcting process to correct the backlight luminance calculated by the backlight luminance calculating section 121. The backlight luminance corrected by the backlight luminance correcting process is supplied to the backlight control section 82 and the incidence luminance calculating section 125 from the addition section 124. It should be noted that details of the backlight luminance correcting process will be described later.

[0069] In step S13, on the basis of the backlight luminance supplied from the addition section 124, the incidence luminance calculating section 125 calculates a pixel incidence luminance for each of pixels in the partial display region of the liquid crystal panel 85 corresponding to the backlight 83. The incidence luminance calculating section 125 supplies the calculated pixel incidence luminance to the division section 126.

[0070] In step S14, the division section 126 divides a supplied image signal by the pixel incidence luminance supplied from the incidence luminance calculating section 125, thereby finding the transmittance of a pixel for each of pixels in the partial display regions, and supplies the transmittance to the liquid crystal panel control section 84.

[0071] In step S15, on the basis of the backlight luminance supplied from the addition section 124, the backlight control section 82 causes the backlight 83 to emit light at the backlight luminance. Also, the backlight 83 emits light on the basis of control of the backlight control section 82, and makes light having the specified backlight luminance incident on the liquid crystal panel 85.

[0072] It should be noted that the processes in step S11 to step S14 described above are individually performed by each of the display control section 81-1 to the display control section 81-4. Also, the process in step S15 is performed individually by each of the backlight control section 82-1 to the backlight control section 82-4, and each of the backlight 83-1 to the backlight 83-4.

[0073] In step S16, the liquid crystal panel control section 84 controls the operation of the liquid crystal panel 85, on the basis of the transmittance for each pixel in the display region of the liquid crystal panel 85 which is supplied from the display control section 81, and changes the transmittance of each pixel.

[0074] In step S17, on the basis of control of the liquid crystal panel control section 84, the liquid crystal panel 85 changes the transmittance of each pixel in the display region to the "transmittance specified on a pixel-by-pixel basis, and transmits light incident from the backlight 83, thereby displaying a display image.

[0075] In step S18, the display apparatus 61 determines whether or not to end the display of the display image. For example, it is determined to end the display of the display image if ending of the display of the display image has been instructed by the user.

[0076] If it is determined in step S18 not to end the display of the display image, the processing returns to step S11, and the above-described processes are repeated. That is, the backlight luminance and the transmittance are found with respect to a display image of the next frame, and the display image is displayed.

[0077] In contrast, if it is determined in step S18 to end the display of the display image, each section of the display apparatus 61 ends a process being performed, and the display process ends.

[0078] In this way, when an image signal is supplied, the display apparatus 61 finds the backlight luminance and the transmittance and displays a display image.

[0079] According to the display apparatus 61, a correction value is found by the correction value calculating section 123, and a backlight luminance is corrected by the found correction value. By adding the correction value as a margin to the backlight luminance in this way, insufficiency of backlight luminance can be suppressed even when the luminance of a display image changes abruptly. As a result, deterioration in the image quality of the display image which occurs due to insufficient luminance can be prevented.

[0080] Next, referring to the flowchart in Fig. 6, a description will be given of a backlight luminance correcting process corresponding to the process in step S12 in Fig. 5.

[0081] In step S41, the moving image determining section 122 performs a moving image determining process on the basis of an inputted image signal. For example, the moving image determining section 122 detects the motion vector of a display image by block matching, the gradient method, or the like, on the basis of the display image of a frame to be displayed from now on, and the display image of a frame that temporally immediately precedes the frame. That is, the motion of an object on the display image is detected.

[0082] Then, on the basis of the result of motion detection from the display image, the moving image determining section 122 generates motion information indicating the motion amount of the detected motion, and also determines whether or not the display image is a moving image and generates image information indicating the determination result. For example, when the motion amount of a motion detected from a display image is equal to or less than a predetermined

threshold, it is determined that the display image is a still image, that is, not a moving image.

[0083] The moving image determining section 122 supplies the generated image information to the changing section 151 and the limiting section 152, and also supplies the generated motion information to the limiting section 152.

[0084] It should be noted that in the moving image determining process by the moving image determining section 122, the determination of whether or not a display image is a moving image may be made on the basis of a change in the difference in brightness (luminance) between the display images of two successive frames.

[0085] In step S42, the limiting section 152 sets a limiting value of the correction value on the basis of the image information and the motion information from the moving image determining section 122.

[0086] That is, when image information indicating that the display image to be displayed from now on is a still image is supplied, the limiting section 152 sets a lower limit value of the correction value as a limiting value. For example, in the case where 0 is set as a lower limit value, and the correction value is limited by this lower limit value, when the correction value is less than 0, the lower limit value "0" of the correction value is outputted as the limited correction value.

[0087] Also, when image information indicating that the display image to be displayed from now on is a moving image is supplied, the limiting section 152 sets an upper limit value of the correction value as a limiting value, in accordance with the motion amount indicated by the supplied motion information.

[0088] Specifically, if the motion amount indicated by the motion information is equal to or less than threshold MV that is set in advance, upper limit value UL1 is set as a limiting value, and if the motion amount indicated by the motion information is larger than threshold MV, upper limit value UL2 larger than upper limit value UL1 is set as a limiting value. That is, an upper limit value is set in accordance with the size of a change in display image with respect to the direction of time.

[0089] For example, in the case where upper limit value UL1 is set, and a correction value is limited by this upper limit value UL1, when the correction value is equal to or more than upper limit value UL1, the upper limit value "UL1" of the correction value is outputted as a limiting value.

[0090] Here, the reason why the upper limit value is set to the larger upper limit value UL2 in the case when a motion amount indicated by motion information is larger than threshold MV is that as the absolute value of the motion vector of a display image becomes larger, the display image changes more largely, and thus there is a high possibility that the backlight luminance will change largely. That is, by making the upper limit value larger, it is possible to prevent insufficiency of the light quantity of light from the backlight 83 which arises due to the correction value being limited by the upper limit value.

[0091] In step S43, the changing section 151 determines whether or not a predetermined time period that is set in advance has elapsed since a time that serves as a reference.

[0092] The changing section 151 changes the correction value at a predetermined time interval that is set in advance, in order to suppress an abrupt change in backlight luminance. For example, the changing section 151 counts the number of times display of a display image displayed on the liquid crystal panel 85 has switched, that is, the number of frames of the display image that is displayed, and updates the correction value every three frames as a predetermined time interval.

[0093] In such a case, the changing section 151 holds a counter indicating the number of frames of a display image that is displayed, and when display of the display image is started, increments the value of the counter every time the display image is displayed. Then, when three frames' worth of display image is displayed, and the value of the counter becomes "3", the changing section 151 determines that a predetermined time period that is set in advance has elapsed, and resets the value of the counter to "0" and counts the number of frames again. In this case, the time at which the value of the counter is reset to "0" is the time that serves as a reference when determining whether or not a predetermined time period has elapsed.

[0094] If it is determined in step S43 that a predetermined time period has not elapsed, that is, if the timing for updating the correction value has not been reached, the processing proceeds to step S48.

[0095] On the other hand, if it is determined in step S43 that a predetermined time period has elapsed; that is, if the timing for updating the correction value has been reached, the processing proceeds to step S44.

[0096] In step S44, on the basis of image information, the changing section 151 determines whether or not a moving image as a display image is to be displayed continuously from a time that serves as a reference.

[0097] For example, if image information indicative of a moving image is supplied from the moving image determining section 122, and a moving image has been displayed as a display image in three frames immediately preceding a frame to be displayed from now on, in step S44, it is determined that a moving image is to be displayed continuously. Here, whether or not a moving image has been displayed in the three immediately preceding frames is determined on the basis of, for example, image information that has been supplied up to this time.

[0098] If it is determined in step S44 that a moving image is to be displayed continuously, in step S45, the changing section 151 increases the correction value supplied from the limiting section 152 by a value set in advance, thereby changing the correction value. Then, the changing section 151 supplies the changed correction value to the limiting section 152, and thereafter the processing proceeds to step S49.

[0099] That is, in the case when a moving image is displayed continuously as a display image, if cyclic processing is applied to the backlight luminance, there is a fear that the change in backlight luminance cannot keep up when the luminance of light to be radiated by the backlight 83 increases abruptly due to a scene change or the like of the moving image, resulting in insufficient backlight luminance.

[0100] Accordingly, in the case when a moving image is displayed as a display image continuously for a predetermined time period, the changing section 151 increases the correction value added to the backlight luminance to thereby prevent deterioration in the image quality of the display image which occurs due to insufficient luminance of light from the backlight 83. That is, as a moving image is continuously displayed as a display image, the correction value gradually increases.

[0101] Also, if it is determined in step S44 that a moving image is not to be displayed continuously, in step S46, the changing section 151 determines whether or not a still image is to be displayed continuously as a display image from a time that serves as a reference.

[0102] For example, if image information indicative of a still image is supplied from the still image determining section 122, and a still image has been displayed as a display image in three frames immediately preceding a frame to be displayed from now on, in step S46, it is determined that a still image is to be displayed continuously.

[0103] If it is determined in step S46 that a still image is to be displayed continuously, in step S47, the changing section 151 decreases the correction value supplied from the limiting section 152 by a value set in advance, thereby changing the correction value. Then, the changing section 151 supplies the changed correction value to the limiting section 152, and thereafter the processing proceeds to step S49.

[0104] That is, in the case when a still image is displayed continuously as a display image, since an abrupt change in backlight luminance hardly occurs, there is hardly any fear of the light emission quantity from the backlight 83 becoming insufficient. Accordingly, in the case when a still image is displayed continuously as a display image for a predetermined time period, the changing section 151 decreases the correction value added to the backlight luminance. That is, as a still image is continuously displayed as a display image, the correction value gradually decreases. Thus, it is possible to prevent deterioration in the image quality of the display image which occurs due to insufficient luminance of light from the backlight 83, and also decrease the backlight luminance appropriately to thereby enhance the contrast of the display image.

[0105] Also, if it is determined in step S46 that a still image is not to be displayed continuously, that is, a moving image is displayed, and a still image is displayed as a display image during a predetermined time period, the processing proceeds to step S48.

[0106] If it is determined in step S46 that a still image is not to be displayed continuously, or if it is determined in step S43 that a predetermined time period has not elapsed, in step S48, the changing section 151 supplies the correction value supplied from the limiting section 152 to the limiting section 152 as it is. When the correction value is supplied from the changing section 151 to the limiting section 152, thereafter, the processing proceeds to step S49.

[0107] When the correction value is supplied from the changing section 151 to the limiting section 152 in step S45, step S47, or step S48, in step S49, the limiting section 152 performs a limiting process to limit the correction value supplied from the changing section 151.

[0108] That is, for example, if a lower limit value is set as the limiting value in the process in step S42, when the correction value from the changing section 151 is equal to or more than the lower limit value, the limiting section 152 supplies the correction value to the changing section 151 and the addition section 124 as it is. Also, when a lower limit value is set as the limiting value, and the correction value from the changing section 151 is less than the lower limit value, the limiting section 152 supplies the set lower limit value to the changing section 151 and the addition section 124 as the limited correction value.

[0109] Here, the reason for limiting the correction value so as not to become smaller than a lower limit value is to prevent a situation in which the correction value becomes too small and, as a result, the backlight luminance becomes unnecessarily small. In this way, by decreasing the correction value appropriately when a still image is displayed continuously, the contrast of the display image can be enhanced.

[0110] On the other hand, for example, if an upper limit value is set as the limiting value in the process in step S42, when the correction value from the changing section 151 is equal to or less than the upper limit value, the limiting section 152 supplies the correction value to the changing section 151 and the addition section 124 as it is. Also, when an upper limit value is set as the limiting value, and the correction value from the changing section 151 is larger than the upper limit value, the limiting section 152 supplies the set upper limit value to the changing section 151 and the addition section 124 as the limited correction value.

[0111] Here, the reason for limiting the correction value so as not to become larger than an upper limit value is to prevent a situation in which the correction value becomes too large, and the backlight luminance becomes unnecessarily large. In this way, by increasing the correction value appropriately when a moving image is displayed continuously, it is possible to prevent deterioration in the image quality of the display image which occurs due to insufficient light quantity of light from the backlight 83, and also prevent a situation in which the backlight luminance becomes too large, and the display image becomes too bright.

[0112] In step S50, the addition section 124 adds the correction value supplied from the limiting section 152 to the backlight luminance supplied from the backlight luminance calculating section 121, thereby correcting the backlight luminance. Then, the addition section 124 supplies the corrected backlight luminance to the backlight control section 82 and the incidence luminance calculating section 125, and the backlight luminance correcting process ends. The processing proceeds to step S13 in Fig. 5.

[0113] In this way, in the case when a moving image or a still image is displayed continuously as a display image for a predetermined time period, the display control section 81 changes the correction value every time the predetermined time period elapses.

[0114] In this way, by appropriately changing the correction value added to the backlight luminance every time a predetermined time period elapses, it is possible to enhance the contrast of the display image, and also prevent deterioration in the image quality of the display image which occurs due to insufficient light quantity (luminance) of light from the backlight 83.

[0115] For example, to present insufficiency of the light quantity of light from the backlight, it is also possible to add a correction value that is always constant to the backlight luminance. However, in such a case, the backlight luminance may become too large depending on the display image, resulting in a decrease in the contrast of the display image.

[0116] In contrast, in the display apparatus 61, in the case when a still image, which is relatively not prone to insufficient light quantity of light from the backlight 83, is displayed continuously as a display image, the correction value is decreased with time, thereby making it possible to prevent deterioration in the image quality of the display image while enhancing the contrast. Also, in the case when a still image is displayed as a display image, by setting a lower limit value of the correction value as a limiting value, it is possible to prevent the backlight luminance from becoming too small. As a result, deterioration in the image quality of the display image due to insufficient light quantity is prevented.

[0117] Further, in the case when a moving image, which is prone to insufficient light quantity of light from the backlight 83, is displayed continuously as a display image, the correction value is increased with time, thereby making it possible to prevent deterioration in the image quality of the display image. Also, in the case when a moving image is displayed as a display image, by setting an upper limit value of the correction value as a limiting value, it is possible to prevent the backlight luminance from becoming too large. As a result, deterioration in the contrast of the display image is suppressed.

[0118] It should be noted that in the foregoing, it has been described that the changing section 151 changes the correction value every time a predetermined time period elapses. However, the correction value may be updated whenever necessary, and either the updated correction value or the last outputted correction value may be selected and outputted.

[0119] In such a case, for example, the correction value calculating section 123 is configured as shown in Fig. 7. It should be noted that in Fig. 7, portions corresponding to those in the case in Fig. 4 are denoted by the same reference numerals, and description thereof is omitted as appropriate. That is, in the correction value calculating section 123 shown in Fig. 7, an output switching section 181 is further provided to the correction value calculating section 123 in Fig. 4.

[0120] The correction value outputted from the output switching section 181 last time as the final correction value, and the changed correction value outputted from the limiting section 152 are supplied to the output switching section 181. The output switching section 181 selects and outputs one of the two supplied correction values. That is, one of the changed correction value for a frame to be displayed from now on, and the final correction value for a frame that temporally immediately precedes the frame is outputted as the final correction value for the frame to be displayed from now on.

[0121] In the case where the correction value calculating section 123 is configured as shown in Fig. 7 as well, the display process described with reference to Fig. 5 is performed, and the display image is displayed.

[0122] Next, referring to the flowchart in Fig. 8, a description will be given of a backlight luminance correcting process corresponding to the process in step S12 in Fig. 5, in the case where the correction value calculating section 123 is configured as shown in Fig. 7. It should be noted that since the processes in step S81 and step S82 are the same as the processes in step S41 and step S42 in Fig. 6, description thereof is omitted.

[0123] In step S83, on the basis of image information supplied from the moving image determining section 122, the changing section 151 determines whether or not to display a moving image as a display image, that is, whether or not the display image to be displayed from now on is a moving image.

[0124] If it is determined in step S83 to display a moving image, in step S84, the changing section 151 increases the correction value supplied from the output switching section 181 by a value set in advance, thereby changing the correction value. Then, the changing section 151 supplies the changed correction value to the limiting section 152, and thereafter the processing proceeds to step S86.

[0125] In contrast, if it is determined in step S83 not to display a moving image, that is, if a still image is displayed as a display image, in step S85, the changing section 151 decreases the correction value supplied from the output switching section 181 by a value set in advance, thereby changing the correction value. Then, the changing section 151 supplies the changed correction value to the limiting section 152, and thereafter the processing proceeds to step S86.

[0126] When the correction value is changed in step S84 or step S85, in step S86, the control section 152 performs a limiting process to limit the correction value supplied from the changing section 151. It should be noted that since the

limiting process performed in step S86 is the same process as the limiting process performed in step S49 in Fig. 6, detailed description thereof is omitted.

[0127] When the limiting process is performed by the limiting section 152, the correction value obtained as a result is supplied from the limiting section 152 to the output switching section 181.

[0128] In step S87, the output switching section 181 determines whether or not a predetermined time period that is set in advance has elapsed since a time that serves as a reference.

[0129] The output switching section 181 switches outputs of a correction value so that the correction value is changed at a predetermined time interval that is set in advance, in order to suppress an abrupt change in backlight luminance. For example, the output switching section 181 counts the number of times display of a display image displayed on the liquid crystal panel 85 has switched, that is, the number of frames of the display image that is displayed, and switches outputs of a correction value so that the correction value supplied from the limiting section 152 is outputted every three frames as a predetermined time interval.

[0130] In such a case, the output switching section 181 holds a counter indicating the number of frames of a display image that is displayed, and when display of the display image is started, increments the value of the counter every time the display image is displayed. Then, when three frames' worth of display image is displayed, and the value of the counter becomes "3", the output switching section 181 determines that a predetermined time period that is set in advance has elapsed, and resets the value of the counter to "0" and counts the number of frames again.

[0131] If it is determined in step S87 that a predetermined time period has elapsed, that is, if the timing for updating the correction value has been reached, the processing proceeds to step S88.

[0132] In step S88, the output switching section 181 outputs the changed correction value, that is, the correction value supplied from the limiting section 152, as a correction value for the backlight luminance of a display image to be displayed from now on. The correction value outputted from the output switching section 181 is supplied to the output switching section 181, the changing section 151, and the addition section 124, and thereafter, the processing proceeds to step S90.

[0133] In contrast, if it is determined in step S87 that a predetermined time has not elapsed, that is, if the timing for updating the correction value has not been reached, the processing proceeds to step S89.

[0134] In step S89, the output switching section 181 outputs the same correction value as the correction value outputted last time, that is, the correction value outputted from the output switching section 181 and supplied to the output switching section 181 itself, as a correction value for the backlight luminance of a display image to be displayed from now on. The correction value outputted from the output switching section 181 is supplied to the output switching section 181, the changing section 151, and the addition section 124, and thereafter, the processing proceeds to step S90.

[0135] When the correction value is outputted in step S88 or step S89, the addition section 124 adds the correction value supplied from the output switching section 181 to the backlight luminance supplied from the backlight luminance calculating section 121, thereby correcting the backlight luminance. Then, the addition section 124 supplies the corrected backlight luminance to the backlight control section 82 and the incidence luminance calculating section 125, and the backlight luminance correcting process ends. The processing proceeds to step S13 in Fig. 5.

[0136] In this way, the display control section 81 changes the correction value at a predetermined time interval, in accordance with whether the display image is a moving image or is a still image.

[0137] In this way, by appropriately changing the correction value added to the backlight luminance at a predetermined time interval in accordance with whether the display image is a moving image or is a still image, it is possible to enhance the contrast of the display image, and also prevent deterioration in the image quality of the display image which occurs due to insufficient light quantity (luminance) of light from the backlight 83.

[0138] It should be noted that while the correction value changed in the changing section 151 is limited in the limiting section 152, there are cases in which when an upper limit value as a limiting value is changed from upper limit value UL2 to upper limit value UL1 that is smaller than upper limit value UL2, the changed correction value is limited by upper limit value UL1, and abruptly becomes small. When the correction value abruptly becomes small in this way, the backlight luminance also becomes abruptly small, and thus there is a fear that the image quality of the display image may deteriorate due to the abrupt change in backlight luminance.

[0139] Accordingly, if the correction value outputted last time is larger than the upper limit value set as a limiting value this time, that is, if the upper limit value as a limiting value is changed to a smaller upper limit value, the limiting value may be set anew so as to prevent an abrupt decrease in correction value.

[0140] In such a case, in the correction value calculating section 123, for example, as shown in Fig. 9, the control section 152 notifies the changing section 151 of the limiting value that has been set, and if the correction value from the output switching section 181 is larger than the upper limit value as a limiting value which is notified from the limiting section 152, the changing section 151 requests the limiting section 152 to set the limiting value again.

[0141] Then, the limiting section 152 sets the limiting value anew in accordance with the request from the changing section 151. That is, the limiting section 152 sets not an upper limit value but a lower limit value as the limiting value. Thus, an abrupt decrease in correction value is prevented. As a result, it is possible to prevent deterioration in the image quality of the display image which occurs due to an abrupt decrease in backlight luminance.

[0142] It should be noted that portions of the correction value calculating section 123 shown in Fig. 9 corresponding to those in the case in Fig. 7 are denoted by the same reference numerals, and description thereof is omitted as appropriate. That is, the correction value calculating section 123 in Fig. 9 differs from the correction value calculating section 123 in Fig. 7 in that the changing section 151 and the limiting section 152 mutually give and receive information.

[0143] In the case where the correction value calculating section 123 is configured as shown in Fig. 9 as well, the display process described with reference to Fig. 5 is performed, and the display image is displayed.

[0144] Next, referring to the flowchart in Fig. 10, a description will be given of a backlight luminance correcting process corresponding to the process in step S12 in Fig. 5, in the case where the correction value calculating section 123 is configured as shown in Fig. 9.

[0145] It should be noted that since the processes in step S121 and step S122 are the same as the processes in step S81 and step S82 in Fig. 8, description thereof is omitted. However, when a limiting value is set by the limiting section 152 in step S122, the set limiting value is supplied from the limiting section 152 to the changing section 151.

[0146] In step S123, on the basis of image information supplied from the moving image determining section 122, the changing section 151 determines whether or not to display a moving image as a display image, that is, whether or not the display image to be displayed from now on is a moving image.

[0147] If it is determined in step S123 to display a moving image, in step S124, the changing section 151 determines whether or not the last correction value, that is, the correction value supplied from the output switching section 181 is larger than an upper limit value as a limiting value which is supplied from the limiting section 152. That is, in the case when a moving image is displayed as a display image, an upper limit value according to the motion amount indicated by motion information is set as the limiting value. Thus, the last correction value and the upper limit value that has been set are compared with each other.

[0148] If it is determined in step S124 that the last correction value is not larger than the upper limit value, in step S125, the changing section 151 increases the correction value supplied from the output switching section 181 by a value set in advance, thereby changing the correction value. Then, the changing section 151 supplies the changed correction value to the limiting section 152, and thereafter the processing proceeds to step S128.

[0149] That is, if the last correction value is equal to or less than the newly set upper limit value, since the changed correction value does not decrease abruptly as it is limited by the upper limit value, the correction value is changed so that the last correction value increases by a value that is set in advance.

[0150] In contrast, if it is determined in step S124 that the last correction value is larger than the upper limit value, since there is a fear that the changed correction value decreases abruptly as it is limited by the upper limit value, the changing section 151 requests the limiting section 152 to set the limiting value again, and the processing proceeds to step S126.

[0151] In step S126, the limiting section 152 sets the limiting value anew in accordance with the request from the changing section 151. That is, the limiting section 152 cancels the setting of an upper limit value as a limiting value, and newly sets a lower limit value that is set in advance, as a limiting value. Thus, it is possible to prevent a situation in which the changed correction value is limited by an upper limit value that has been set up to this time, and decreases abruptly.

[0152] When the limiting value is set anew in step S126, thereafter, the processing proceeds to step S127.

[0153] Also, if it is determined in step S123 not to display a moving image, that is, if a still image is displayed as a display image, the processing proceeds to step S127.

[0154] When the limiting value is set anew in step S126, or when it is determined in step S123 not to display a moving image, in step S127, the changing section 151 decreases the correction value supplied from the output switching section 181 by a value set in advance, thereby changing the correction value. Then, the changing section 151 supplies the changed correction value to the limiting section 152, and thereafter the processing proceeds to step S128.

[0155] When the correction value is changed in step S125 or step S127, thereafter, the processes in step S128 to step S132 are performed. Since these processes are the same as the processes in step S86 to step S90 in Fig. 8, description thereof is omitted.

[0156] When the backlight luminance is corrected in step S132, the corrected backlight luminance is supplied from the addition section 124 to the backlight control section 82 and the incidence luminance calculating section 125, and the backlight luminance correcting process ends. The processing proceeds to step S13 in Fig. 5.

[0157] In this way, in the case when a moving image is displayed as a display image, if the last correction value is larger than an upper limit value as a limiting value that has been set, the display control section 81 sets the limiting value anew to prevent an abrupt decrease in correction value, and decreases the correction value. Thus, it is possible to prevent deterioration in the image quality of the display image which occurs due to an abrupt decrease in backlight luminance.

[0158] The series of processes described above can be either executed by hardware or executed by software. If the series of processes is to be executed by software, a program constituting the software is installed into a computer embedded in dedicated hardware, or into, for example, a general purpose personal computer that can execute various functions when installed with various programs, from a program-recording medium.

[0159] Fig. 11 is a block diagram showing a hardware configuration example of a computer that executes the above-described series of processes by a program.

[0160] In the computer, a CPU (Central Processing Unit) 501, a ROM (Read Only Memory) 502, and a RAM (Random Access Memory) 503 are connected to each other by a bus 504.

[0161] The bus 504 is further connected with an input/output interface 505. The input/output interface 505 is connected with an input section 506 made of a keyboard, a mouse, a microphone, or the like, an output section 507 made of a display, a speaker, or the like, a recording section 508 made of a hard disk, a non-volatile memory, or the like, a communication section 509 made of a network interface or the like, and a drive 510 that drives removal media 511 such as a magnetic disk, an optical disc, a magneto-optical disc, or a semiconductor memory.

[0162] In the computer configured as above, for example, the CPU 501 executes a program recorded in the recording section 508 by loading the program into the RAM 503 via the input/output interface 505 and the bus 504, thereby performing the above-described series of processes.

[0163] The program executed by the computer (CPU 501) is provided by, for example, being recorded on the removable media 511, which is packaged media made of a magnetic disk (including a flexible disk), an optical disc (such as a CD-ROM (Compact Disc-Read Only Memory) or a DVD (Digital Versatile Disc)), a magneto-optical disc, a semiconductor memory, or the like, or via a wired or wireless transmission medium, such as a local area network, the Internet, or digital satellite broadcast.

[0164] Then, the program can be installed into the recording section 508 via the input/output interface 505, by mounting the removable media 511 in the drive 510. Also, the program can be received by the communication section 509 via a wired or wireless transmission medium, and installed into the recording medium 508. Alternatively, the program can be installed into the ROM 502 or the recording section 508 in advance.

[0165] The program executed by the computer may be a program in which processes are performed in time series in the order described in this specification, or may be a program in which processes are performed in parallel or at necessary timing, such as when invoked.

[0166] It should be noted that an embodiment of the present invention is not limited to the above-described embodiment, but various modifications are possible without departing from the scope of the present invention.

Explanation of Reference Numerals

[0167] 61 display apparatus, 81-1 to 81-4, 81 display control section, 82-1 to 82-4, 82 backlight control section, 83-1 to 83-4, 83 backlight, 84 liquid crystal panel control section, 85 liquid crystal panel, 121 backlight luminance calculating section, 122 moving image determining section, 123 correction value calculating section, 124 addition section, 125 incidence luminance calculating section, 126 division section, 151 changing section, 152 limiting section, 181 output switching section

Claims

1. A display control apparatus for controlling a display apparatus (61) comprising a backlight (83) and a panel (85), the display control apparatus (81) comprising:

luminance calculating means (121) for

- calculating a backlight luminance of a frame to be displayed corresponding to a not-yet displayed image on the basis of an inputted image signal;
- subtracting the calculated backlight luminance of the frame to be displayed from a backlight luminance of the temporally immediately preceding frame to find a difference in backlight luminance; and
- adding the difference multiplied by a cyclic coefficient set in advance to the backlight luminance of the frame to be displayed, thereby obtaining a first backlight luminance (S11);

the display control apparatus (81) being **characterized by** further comprising:

motion detection means (122) for detecting motion on the basis of the inputted image signal, generating a motion amount for the frame to be displayed on the basis of the detected motion, and determining whether the not-yet-displayed image is a moving image or a still image on the basis of the motion amount (S81);
correction value changing means (151) for obtaining a correction value for the not-yet-displayed image by increasing by a value set in advance a limited correction value for the temporally immediately preceding frame when the not-yet-displayed image is a moving image (S84), and by decreasing by a value set in

advance the limited correction value for the temporally immediately preceding frame when the not-yet-displayed image is a still image (S85);

limiting means (152) for receiving from the motion detection means (122) the motion amount and the result of the determination and from the correction value changing means (151) the correction value and for determining a limited correction value for the not-yet-displayed image by performing the following steps:

when the result of the determination indicates that the not-yet-displayed image is a moving image, setting an upper limit value to a first value if the motion amount is equal to or less than a threshold and to a second value larger than the first value if the motion amount is larger than the threshold (S82) and determining the limited correction value by selecting the smaller of the upper limit value and the correction value,

when the result of the determination indicates that the not-yet-displayed image is a still image, setting a lower limit value and determining the limited correction value by selecting the greater of the lower limit value and the correction value; and

correcting means (124) for determining a second backlight luminance for the frame to be displayed by adding the limited correction value for the frame to be displayed to the first backlight luminance for the frame to be displayed (S90), the second backlight luminance indicating a luminance of light which is to be made incident on a display panel (85) that displays the display image by transmitting light, and which is to be radiated by the backlight (83),

2. A display control method for a display control apparatus according to Claim 1, the display control method comprising the steps of:

the luminance calculating means (121) calculating a backlight luminance of a frame to be displayed corresponding to a not-yet-displayed image on the basis of an inputted image signal; subtracting the calculated backlight luminance of the frame to be displayed from a backlight luminance of the temporally immediately preceding frame to find a difference in backlight luminance; and adding the difference multiplied by a cyclic coefficient set in advance to the backlight luminance of the frame to be displayed, thereby obtaining a first backlight luminance (S11);

the motion detection means (122) detecting motion on the basis of the inputted image signal, generating a motion amount for the frame to be displayed on the basis of the detected motion, and determining whether the not-yet-displayed image is a moving image or a still image on the basis of the motion amount (S81);

the correction value changing means (151) obtaining a correction value for the not-yet-displayed image by increasing by a value set in advance the limited correction value for the temporally immediately preceding frame when the not-yet-displayed image is a moving image (S84), and by decreasing by a value set in advance the limited correction value for the temporally immediately preceding frame when the not-yet-displayed image is a still image (S85);

the limiting means (152) receiving from the motion detection means (122) the motion amount and the result of the determination and from the correction value changing means (151) the correction value and determining a limited correction value for the not-yet-displayed image by performing the following steps:

when the result of the determination indicates that the not-yet-displayed image is a moving image, setting an upper limit value to a first value if the motion amount is equal to or less than a threshold and to a second value larger than the first value if the motion amount is larger than the threshold (S82) and determining the limited correction value by selecting the smaller of the upper limit value and the correction value, when the result of the determination indicates that the not-yet-displayed image is a still image, setting a lower limit value and determining the limited correction value by selecting the greater of the lower limit value and the correction value; and

the correcting means (124) determining a second backlight luminance for the frame to be displayed by adding the limited correction value for the frame to be displayed to the first backlight luminance for the frame to be displayed (S90), the second backlight luminance indicating a luminance of light which is to be made incident on a display panel (85) that displays the display image by transmitting light, and which is radiated by the backlight.

3. A computer program comprising software code adapted to perform the method of claim 2 when executed on a data processing system.

Patentansprüche

1. Anzeigesteuervorrichtung zum Steuern einer Anzeigevorrichtung (61), umfassend eine Hintergrundbeleuchtung (83) und ein Anzeigefeld (85), wobei die Anzeigesteuervorrichtung (81) umfasst:

ein Leuchtdichteberechnungsmittel (121) zum

- Berechnen einer Hintergrundbeleuchtungsleuchtdichte eines anzuzeigenden Frames, der einem noch nicht angezeigten Bild entspricht, auf Basis eines eingegebenen Bildsignals,
- Subtrahieren der berechneten Hintergrundbeleuchtungsleuchtdichte des anzuzeigenden Frames von einer Hintergrundbeleuchtungsleuchtdichte des zeitlich unmittelbar vorhergehenden Frames, um eine Differenz der Hintergrundbeleuchtungsleuchtdichte zu finden, und
- Addieren der Differenz, multipliziert mit einem im Voraus eingestellten zyklischen Koeffizienten, zu der Hintergrundbeleuchtungsleuchtdichte des anzuzeigenden Frames, wodurch man eine erste Hintergrundbeleuchtungsleuchtdichte erhält (S11),

wobei die Anzeigesteuervorrichtung (81) **dadurch gekennzeichnet ist, dass** sie ferner umfasst:

ein Bewegungsdetektiermittel (122) zum Detektieren von Bewegung auf Basis des eingegebenen Bildsignals, Erzeugen eines Bewegungsausmaßes für den anzuzeigenden Frame auf Basis der detektierten Bewegung und Bestimmen auf Basis des Bewegungsausmaßes, ob das noch nicht angezeigte Bild ein bewegtes Bild oder ein Standbild ist (S81),

ein Korrekturwertänderungsmittel (151) zum Erhalten eines Korrekturwerts für das noch nicht angezeigte Bild durch Erhöhen eines begrenzten Korrekturwerts für den zeitlich unmittelbar vorhergehenden Frame um einen im Voraus eingestellten Wert, wenn das noch nicht angezeigte Bild ein bewegtes Bild ist (S84), und durch Reduzieren des begrenzten Korrekturwerts für den zeitlich unmittelbar vorhergehenden Frame um einen im Voraus eingestellten Wert, wenn das noch nicht angezeigte Bild ein Standbild ist (S85),

ein Begrenzungsmittel (152) zum Empfangen des Bewegungsausmaßes und des Ergebnisses der Bestimmung von dem Bewegungsdetektiermittel (122) und des Korrekturwerts von dem Korrekturwertänderungsmittel (151) und zum Bestimmen eines begrenzten Korrekturwerts für das noch nicht angezeigte Bild durch Durchführen der folgenden Schritte:

wenn das Ergebnis der Bestimmung angibt, dass das noch nicht angezeigte Bild ein bewegtes Bild ist, Einstellen eines oberen Grenzwerts auf einen ersten Wert, wenn das Bewegungsausmaß kleiner gleich einer Schwelle ist, und auf einen zweiten Wert, der größer als der erste Wert ist, wenn das Bewegungsausmaß größer als die Schwelle ist (S82), und Bestimmen des begrenzten Korrekturwerts durch Wählen des kleineren aus der Gruppe umfassend den oberen Grenzwert und den Korrekturwert,

wenn das Ergebnis der Bestimmung angibt, dass das noch nicht angezeigte Bild ein Standbild ist, Einstellen eines unteren Grenzwerts und Bestimmen des begrenzten Korrekturwerts durch Wählen des größeren aus der Gruppe umfassend den unteren Grenzwert und den Korrekturwert, und

ein Korrekturmittel (124) zum Bestimmen einer zweiten Hintergrundbeleuchtungsleuchtdichte für den anzuzeigenden Frame durch Addieren des begrenzten Korrekturwerts für den anzuzeigenden Frame zu der ersten Hintergrundbeleuchtungsleuchtdichte für den anzuzeigenden Frame (S90), wobei die zweite Hintergrundbeleuchtungsleuchtdichte eine Leuchtdichte von Licht angibt, das zum Einfallen auf ein Anzeigefeld (85) gebracht werden soll, welches das Anzeigebild durch Durchlassen von Licht anzeigt, und das durch die Hintergrundbeleuchtung (83) abgestrahlt werden soll.

2. Anzeigesteuerverfahren für eine Anzeigesteuervorrichtung nach Anspruch 1, wobei das Anzeigesteuerverfahren folgende Schritte umfasst:

durch das Leuchtdichteberechnungsmittel (121), Berechnen einer Hintergrundbeleuchtungsleuchtdichte eines anzuzeigenden Frames, der einem noch nicht angezeigten Bild entspricht, auf Basis eines eingegebenen Bildsignals, Subtrahieren der berechneten Hintergrundbeleuchtungsleuchtdichte des anzuzeigenden Frames von einer Hintergrundbeleuchtungsleuchtdichte des zeitlich unmittelbar vorhergehenden Frames, um eine Differenz der Hintergrundbeleuchtungsleuchtdichte zu finden, und Addieren der Differenz, multipliziert mit einem im Voraus eingestellten zyklischen Koeffizienten, zu der Hintergrundbeleuchtungsleuchtdichte des anzuzeigenden Frames, wodurch man eine erste Hintergrundbeleuchtungsleuchtdichte erhält (S11),
 durch das Bewegungsdetektiermittel (122), Detektieren von Bewegung auf Basis des eingegebenen Bildsignals,

Erzeugen eines Bewegungsausmaßes für den anzuzeigenden Frame auf Basis der detektierten Bewegung und Bestimmen auf Basis des Bewegungsausmaßes, ob das noch nicht angezeigte Bild ein bewegtes Bild oder ein Standbild ist (S81),

durch das Korrekturwertänderungsmittel (151), Erhalten eines Korrekturwerts für das noch nicht angezeigte Bild durch Erhöhen des begrenzten Korrekturwerts für den zeitlich unmittelbar vorhergehenden Frame um einen im Voraus eingestellten Wert, wenn das noch nicht angezeigte Bild ein bewegtes Bild ist (S84), und durch Reduzieren des begrenzten Korrekturwerts für den zeitlich unmittelbar vorhergehenden Frame um einen im Voraus eingestellten Wert, wenn das noch nicht angezeigte Bild ein Standbild ist (S85),

durch das Begrenzungsmittel (152), Empfangen des Bewegungsausmaßes und des Ergebnisses der Bestimmung von dem Bewegungsdetektiermittel (122) und des Korrekturwerts von dem Korrekturwertänderungsmittel (151) und Bestimmen eines begrenzten Korrekturwerts für das noch nicht angezeigte Bild durch Durchführen der folgenden Schritte:

wenn das Ergebnis der Bestimmung angibt, dass das noch nicht angezeigte Bild ein bewegtes Bild ist, Einstellen eines oberen Grenzwerts auf einen ersten Wert, wenn das Bewegungsausmaß kleiner gleich einer Schwelle ist, und auf einen zweiten Wert, der größer als der erste Wert ist, wenn das Bewegungsausmaß größer als die Schwelle ist (S82), und Bestimmen des begrenzten Korrekturwerts durch Wählen des kleineren aus der Gruppe umfassend den oberen Grenzwert und den Korrekturwert,

wenn das Ergebnis der Bestimmung angibt, dass das noch nicht angezeigte Bild ein Standbild ist, Einstellen eines unteren Grenzwerts und Bestimmen des begrenzten Korrekturwerts durch Wählen des größeren aus der Gruppe umfassend den unteren Grenzwert und den Korrekturwert, und,

durch das Korrekturmittel (124), Bestimmen einer zweiten Hintergrundbeleuchtungsleuchtdichte für den anzuzeigenden Frame durch Addieren des begrenzten Korrekturwerts für den anzuzeigenden Frame zu der ersten Hintergrundbeleuchtungsleuchtdichte für den anzuzeigenden Frame (S90), wobei die zweite Hintergrundbeleuchtungsleuchtdichte eine Leuchtdichte von Licht angibt, das auf zum Einfallen auf ein Anzeigefeld (85) gebracht werden soll, welches das Anzeigebild durch Durchlassen von Licht anzeigt, und das durch die Hintergrundbeleuchtung abgestrahlt werden soll.

3. Computerprogramm, umfassend Softwarecode, der dazu ausgebildet ist, das Verfahren nach Anspruch 2 durchzuführen, wenn er auf einem Datenverarbeitungssystem ausgeführt wird.

Revendications

1. Appareil de commande d'affichage pour commander un appareil d'affichage (61) comprenant un rétroéclairage (83) et un panneau (85), l'appareil de commande d'affichage (81) comprenant :

des moyens de calcul de luminance (121) pour

- calculer une luminance de rétroéclairage d'une trame devant être affichée correspondant à une image pas encore affichée sur la base d'un signal d'image entré ;
- soustraire la luminance de rétroéclairage calculée de la trame devant être affichée à une luminance de rétroéclairage de la trame immédiatement précédente temporellement pour obtenir une différence de luminance de rétroéclairage ; et
- additionner la différence multipliée par un coefficient cyclique défini à l'avance à la luminance de rétroéclairage de la trame devant être affichée, de manière à obtenir une première luminance de rétroéclairage (S11) ;

l'appareil de commande d'affichage (81) étant **caractérisé en ce qu'il** comprend en outre :

un moyen de détection de mouvement (122) pour détecter un mouvement sur la base du signal d'image entré, générer une quantité de mouvement pour la trame devant être affichée sur la base du mouvement détecté, et déterminer si l'image pas encore affichée est une image animée ou une image fixe sur la base de la quantité de mouvement (S81) ;

un moyen de changement de valeur de correction (151) pour obtenir une valeur de correction pour l'image pas encore affichée par augmentation, d'une valeur définie à l'avance, d'une valeur de correction limitée pour la trame immédiatement précédente temporellement lorsque l'image pas encore affichée est une image animée (S84), et par diminution, d'une valeur définie à l'avance, de la valeur de correction limitée

pour la trame immédiatement précédente temporellement lorsque l'image pas encore affichée est une image fixe (S85) ;

un moyen de limitation (152) pour recevoir, depuis le moyen de détection de mouvement (122), la quantité de mouvement et le résultat de la détermination et, depuis le moyen de changement de valeur de correction (151), la valeur de correction et pour déterminer une valeur de correction limitée pour l'image pas encore affichée par conduite des étapes suivantes :

lorsque le résultat de la détermination indique que l'image pas encore affichée est une image animée, définition d'une valeur de limite supérieure à une première valeur si la quantité de mouvement est égale ou inférieure à un seuil et à une deuxième valeur supérieure à la première valeur si la quantité de mouvement est supérieure au seuil (S82) et détermination de la valeur de correction limitée par sélection de la plus faible parmi la valeur de limite supérieure et la valeur de correction, lorsque le résultat de la détermination indique que l'image pas encore affichée est une image fixe, définition d'une valeur de limite inférieure et détermination de la valeur de correction limitée par sélection de la plus élevée parmi la valeur de limite inférieure et la valeur de correction ; et un moyen de correction (124) pour déterminer une deuxième luminance de rétroéclairage pour la trame devant être affichée par addition de la valeur de correction limitée pour la trame devant être affichée à la première luminance de rétroéclairage pour la trame devant être affichée (S90), la deuxième luminance de rétroéclairage indiquant une luminance de lumière qui doit être rendue incidente sur un panneau d'affichage (85) qui affiche l'image d'affichage par transmission de lumière, et qui doit être irradiée par le rétroéclairage (83).

2. Procédé de commande d'affichage pour un appareil de commande d'affichage selon la revendication 1, le procédé de commande d'affichage comprenant les étapes suivantes :

le moyen de calcul de luminance (121) calcule une luminance de rétroéclairage d'une trame devant être affichée correspondant à une image pas encore affichée sur la base d'un signal d'image entré ; soustrait la luminance de rétroéclairage calculée de la trame devant être affichée à une luminance de rétroéclairage de la trame immédiatement précédente temporellement pour obtenir une différence de luminance de rétroéclairage ; et additionne la différence multipliée par un coefficient cyclique défini à l'avance à la luminance de rétroéclairage de la trame devant être affichée, de manière à obtenir une première luminance de rétroéclairage (S11) ;

le moyen de détection de mouvement (122) détecte un mouvement sur la base du signal d'image entré, génère une quantité de mouvement pour la trame devant être affichée sur la base du mouvement détecté, et détermine si l'image pas encore affichée est une image animée ou une image fixe, sur la base de la quantité de mouvement (S81) ;

le moyen de changement de valeur de correction (151) obtient une valeur de correction pour l'image pas encore affichée par augmentation, d'une valeur définie à l'avance, de la valeur de correction limitée pour la trame immédiatement précédente temporellement lorsque l'image pas encore affichée est une image animée (S84), et par diminution, d'une valeur définie à l'avance, de la valeur de correction limitée pour la trame immédiatement précédente temporellement lorsque l'image pas encore affichée est une image fixe (S85) ;

le moyen de limitation (152) reçoit depuis le moyen de mouvement de mouvement (122) la quantité de mouvement et le résultat de la détermination et depuis le moyen de changement de valeur de correction (151) la valeur de correction et détermine une valeur de correction limitée pour l'image pas encore affichée en effectuant les étapes suivantes :

lorsque le résultat de la détermination indique que l'image pas encore affichée est une image animée, définition d'une valeur de limite supérieure à une première valeur si la quantité de mouvement est égale ou inférieure à un seuil et à une deuxième valeur supérieure à la première valeur si la quantité de mouvement est supérieure au seuil (S82) et détermination de la valeur de correction limitée par sélection de la plus faible parmi la valeur de limite supérieure et la valeur de correction,

lorsque le résultat de la détermination indique que l'image pas encore affichée est une image fixe, définition d'une valeur de limite inférieure et détermination de la valeur de correction limitée par sélection de la plus élevée parmi la valeur de limite inférieure et la valeur de correction ; et

le moyen de correction (124) détermine une deuxième luminance de rétroéclairage pour la trame devant être affichée par addition de la valeur de correction limitée pour la trame devant être affichée à la première luminance de rétroéclairage pour la trame devant être affichée (S90), la deuxième luminance de rétroéclairage indiquant une luminance d'éclairage qui doit être rendue incidente sur un panneau d'affichage (85) qui affiche l'image affichée par transmission de lumière, et qui est rayonnée par le rétroéclairage.

3. Programme informatique comprenant un code logiciel adapté pour conduire le procédé de la revendication 2 lorsqu'il est exécuté sur un système de traitement de données.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

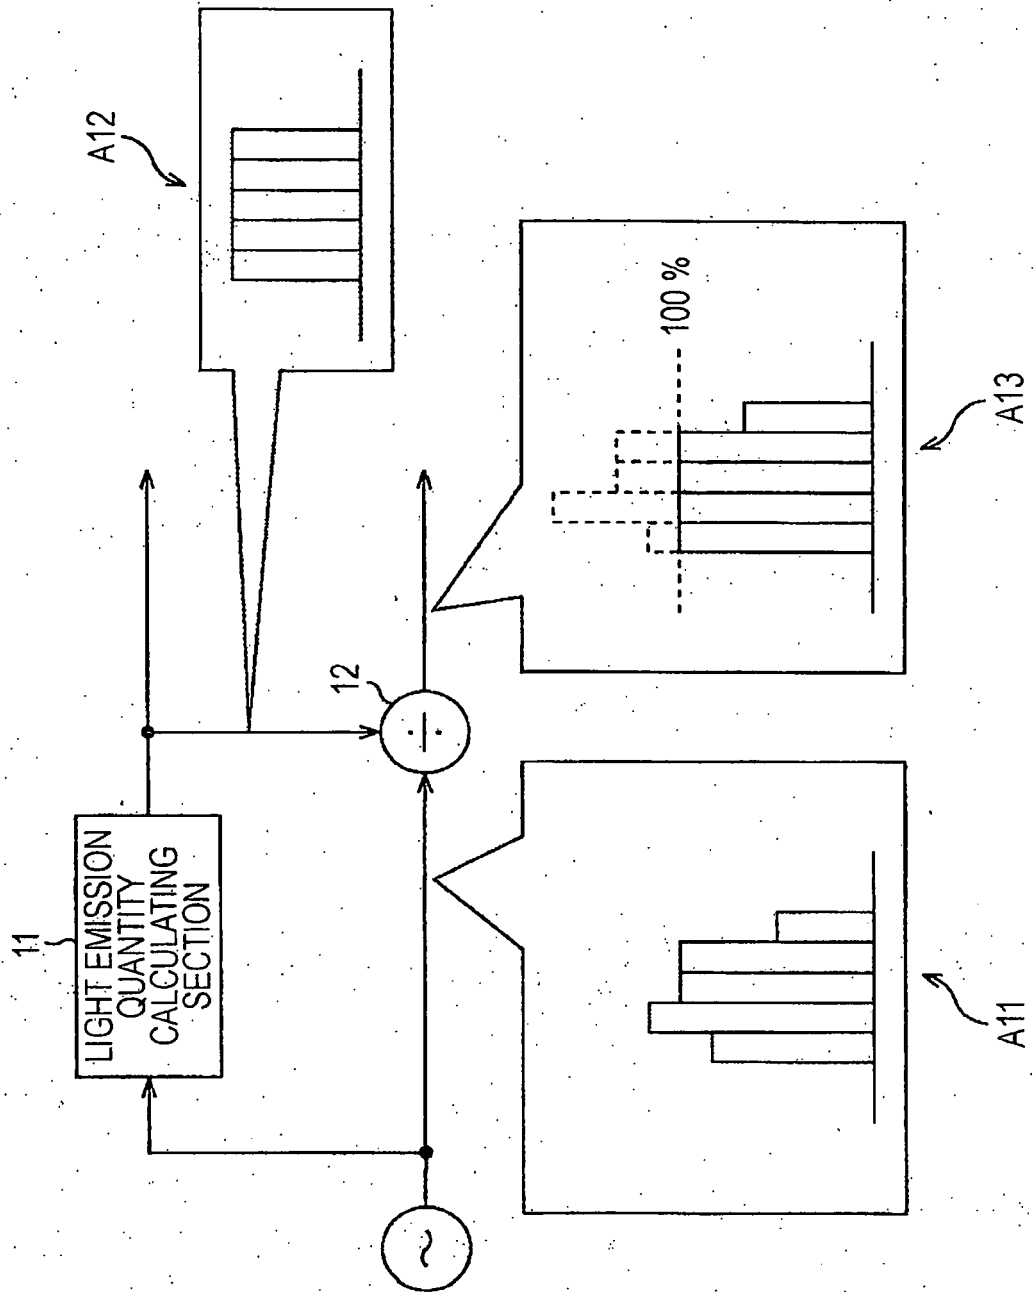


FIG. 2

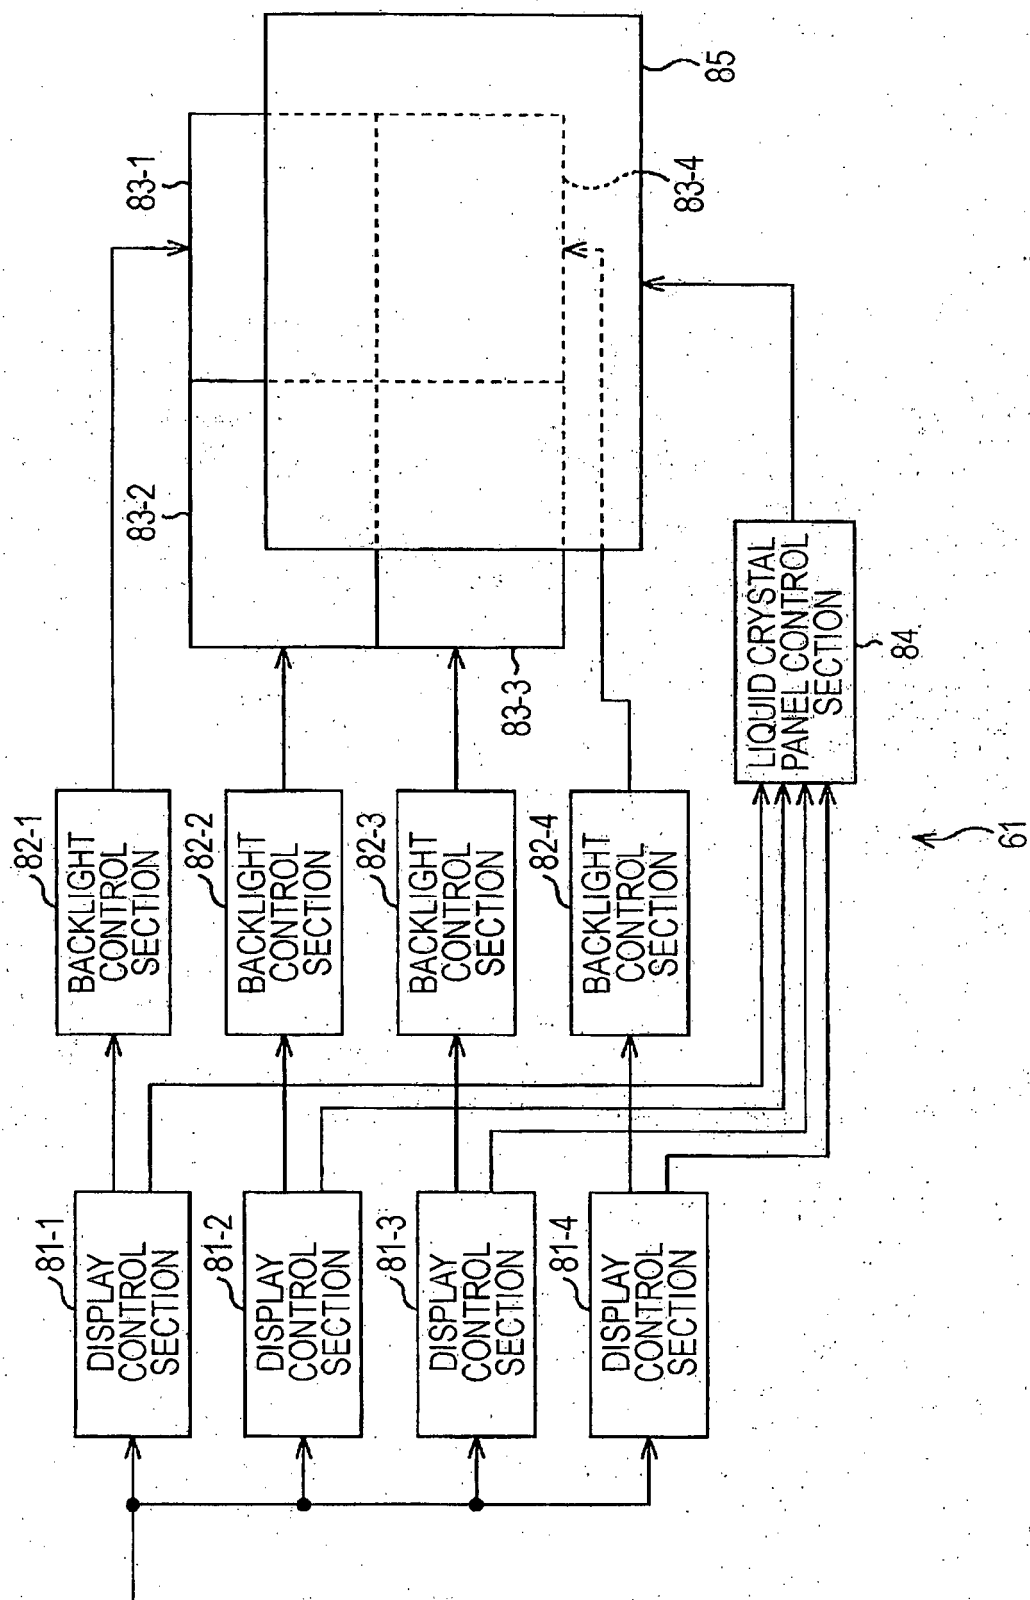


FIG. 3

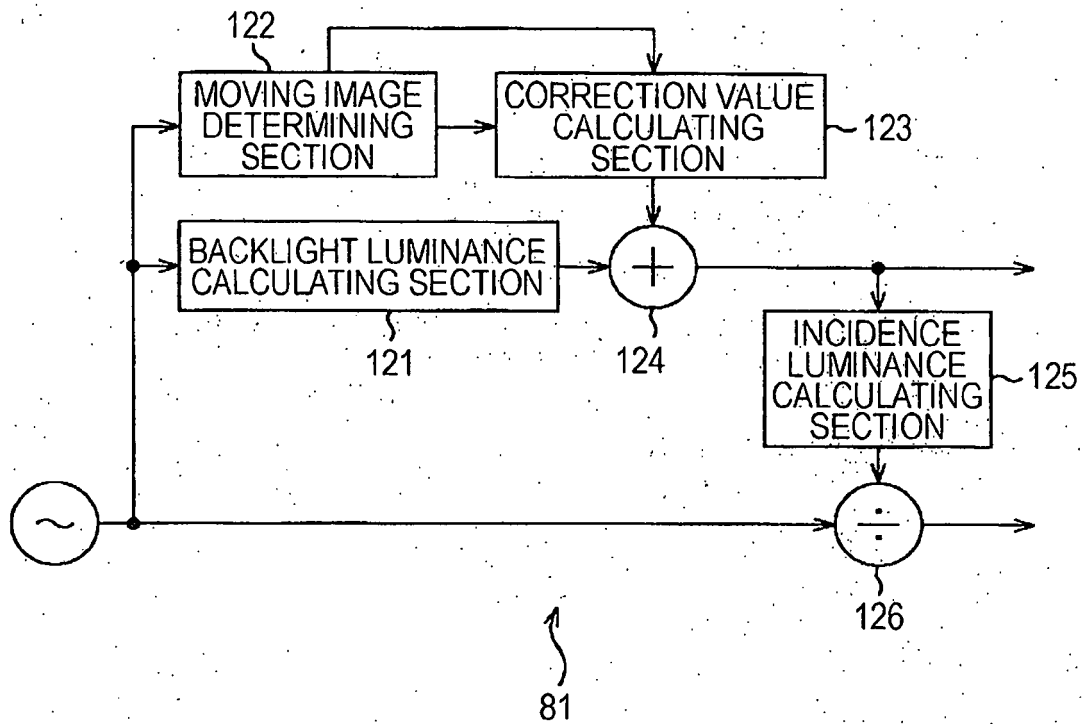


FIG. 4

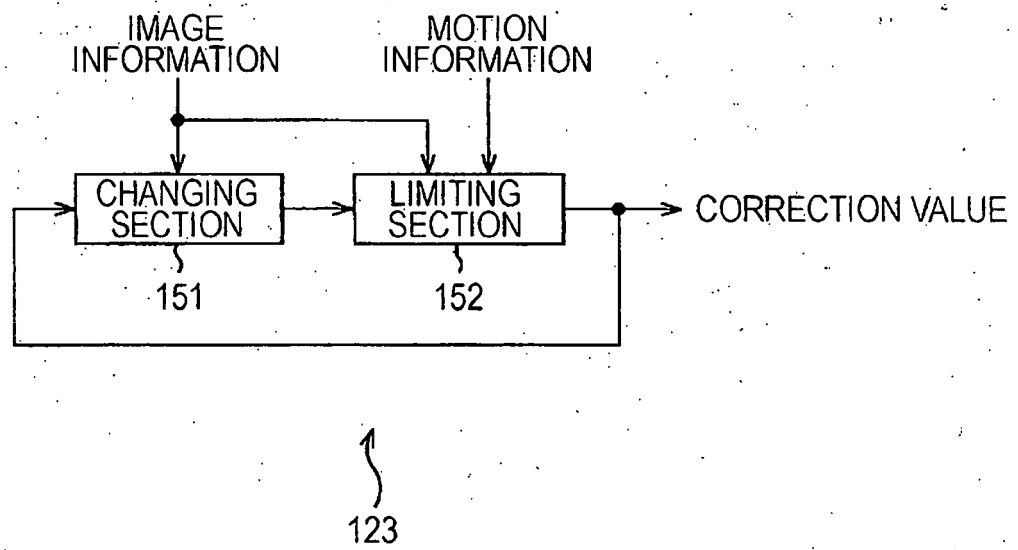


FIG. 5

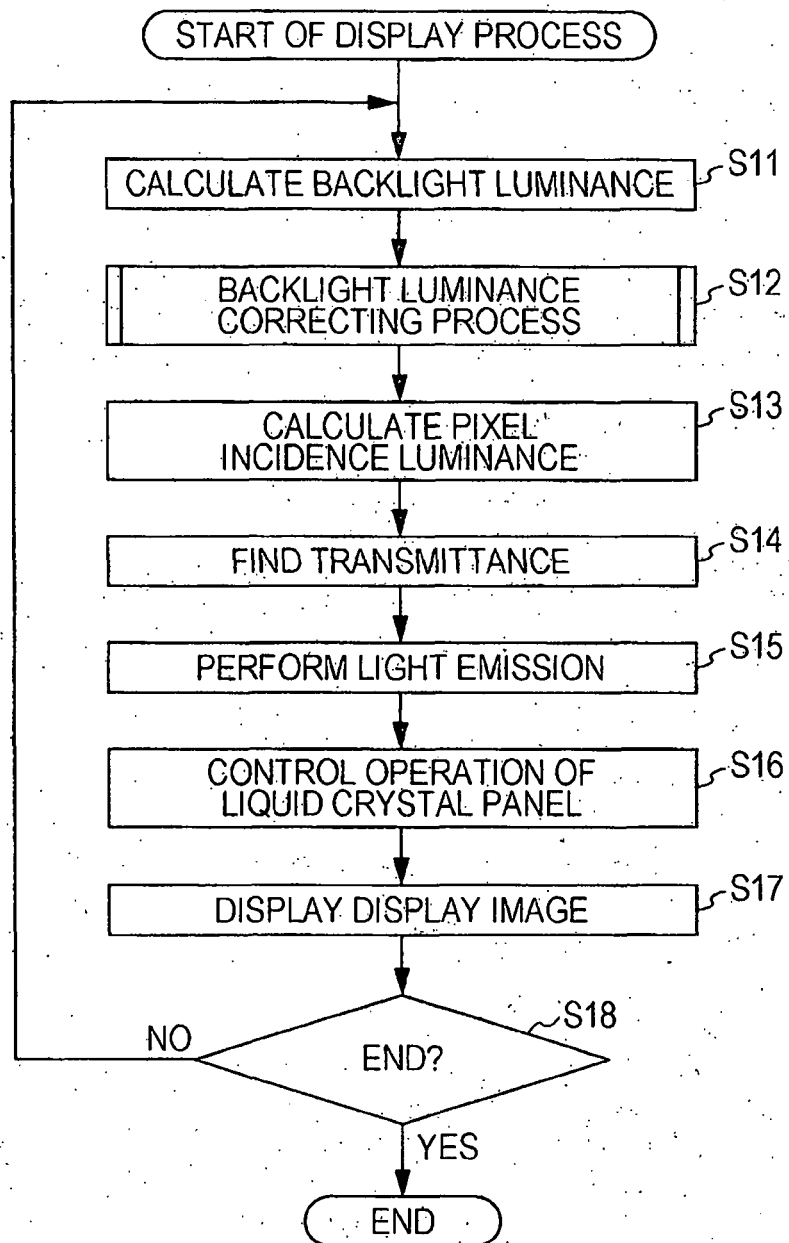


FIG. 6

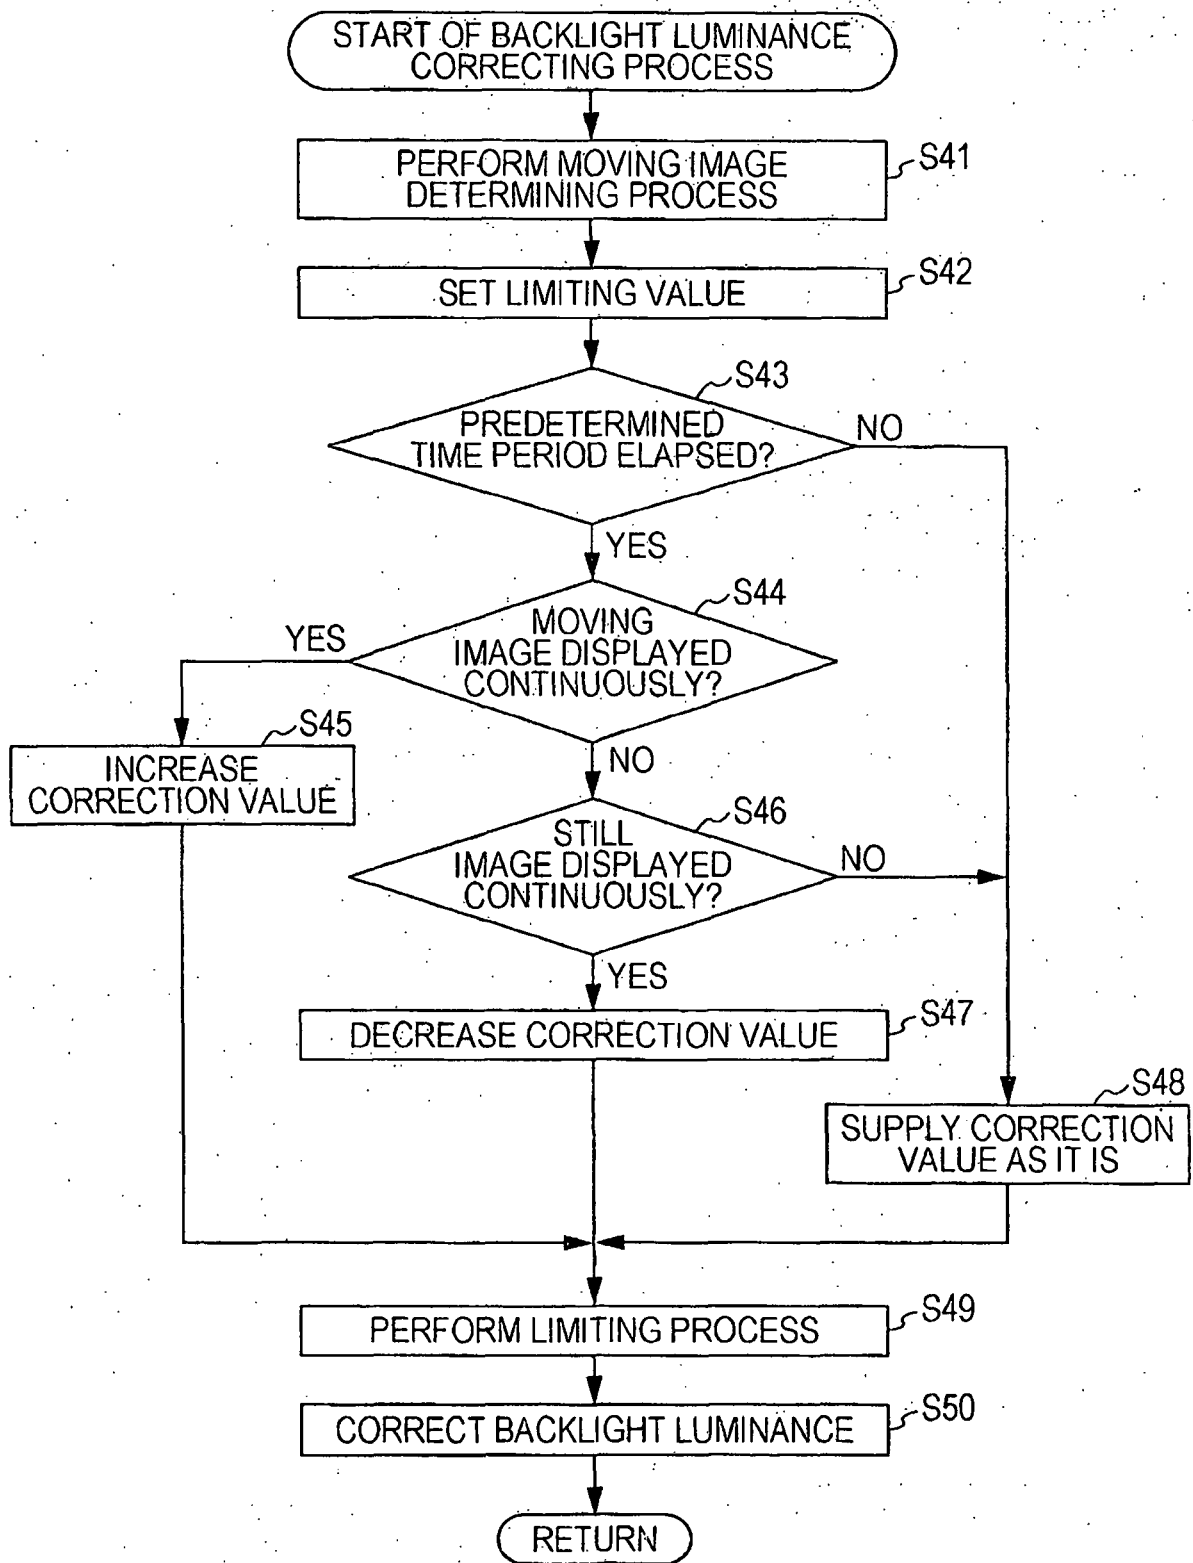


FIG. 7

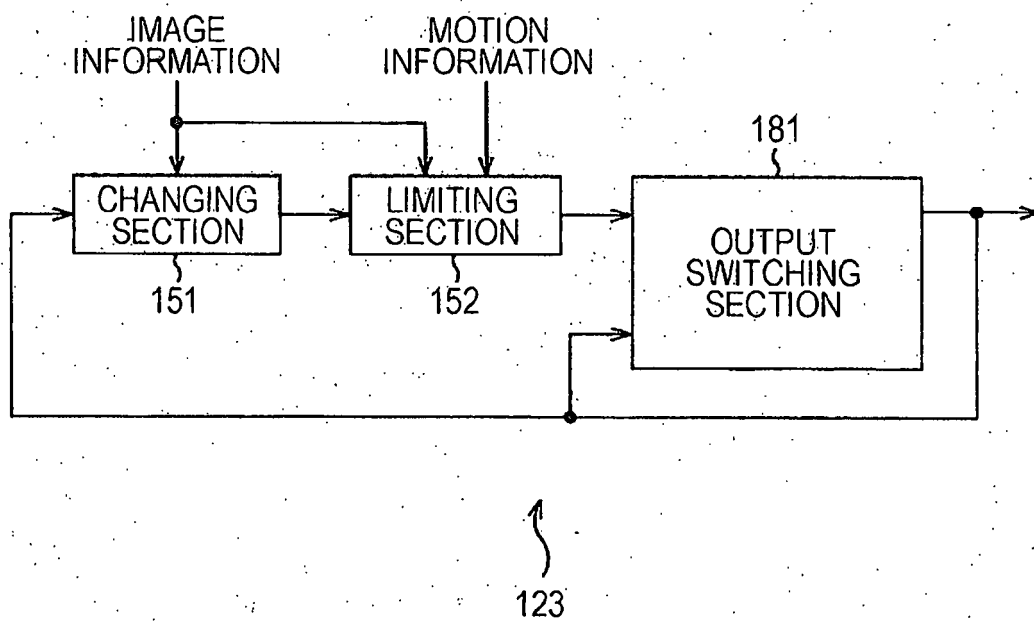


FIG. 8

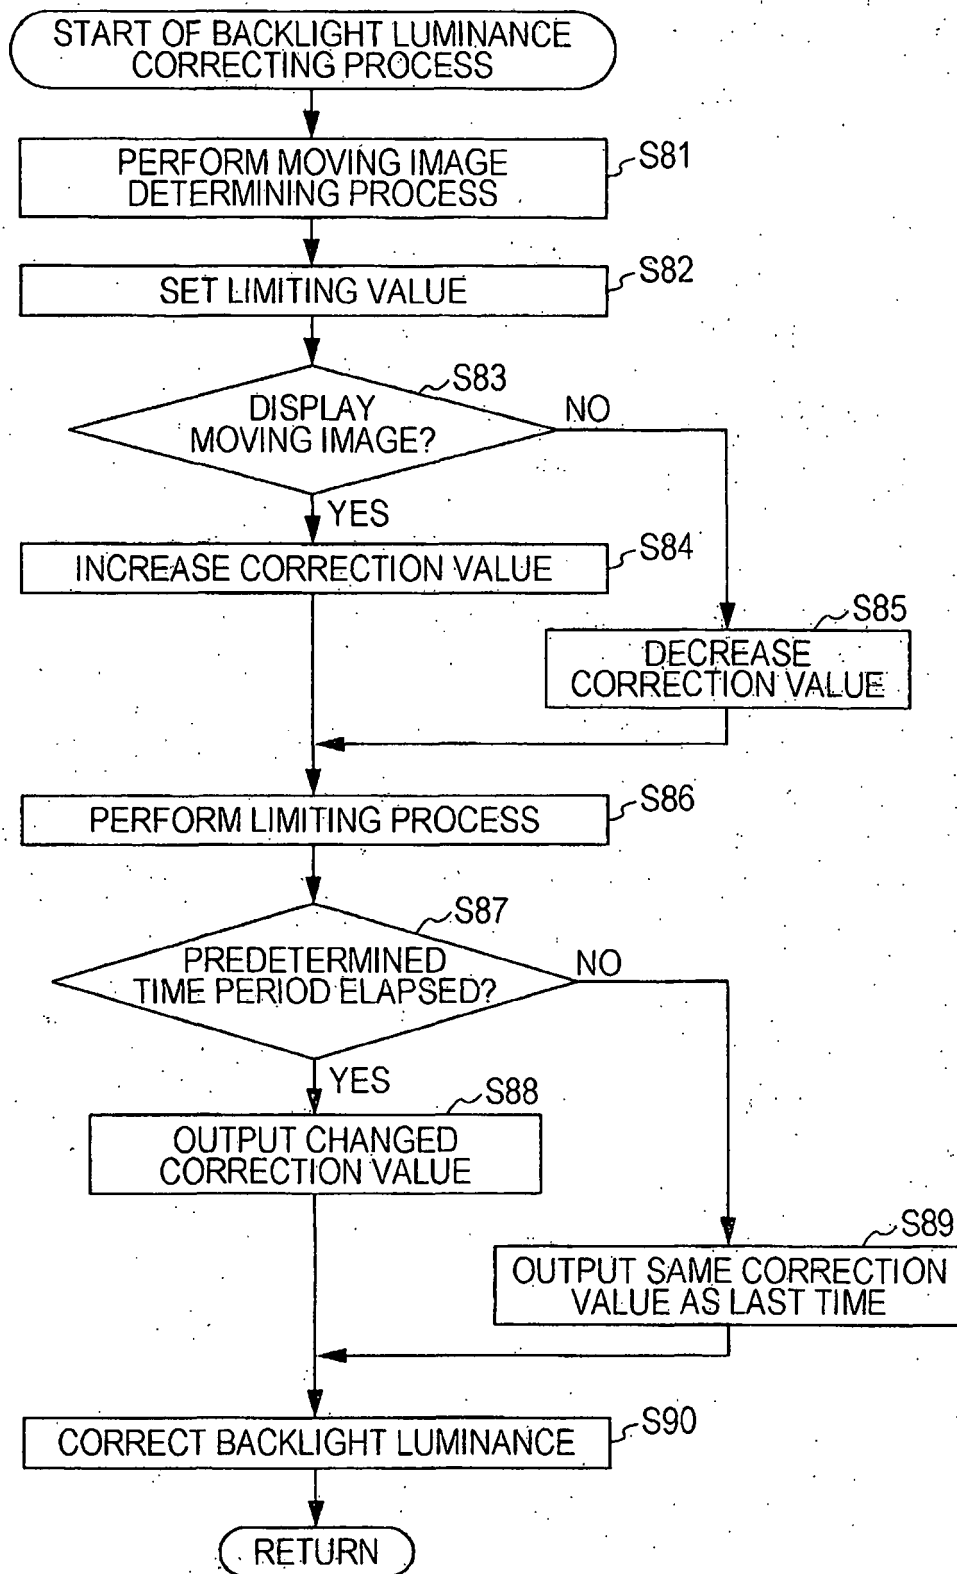


FIG. 9

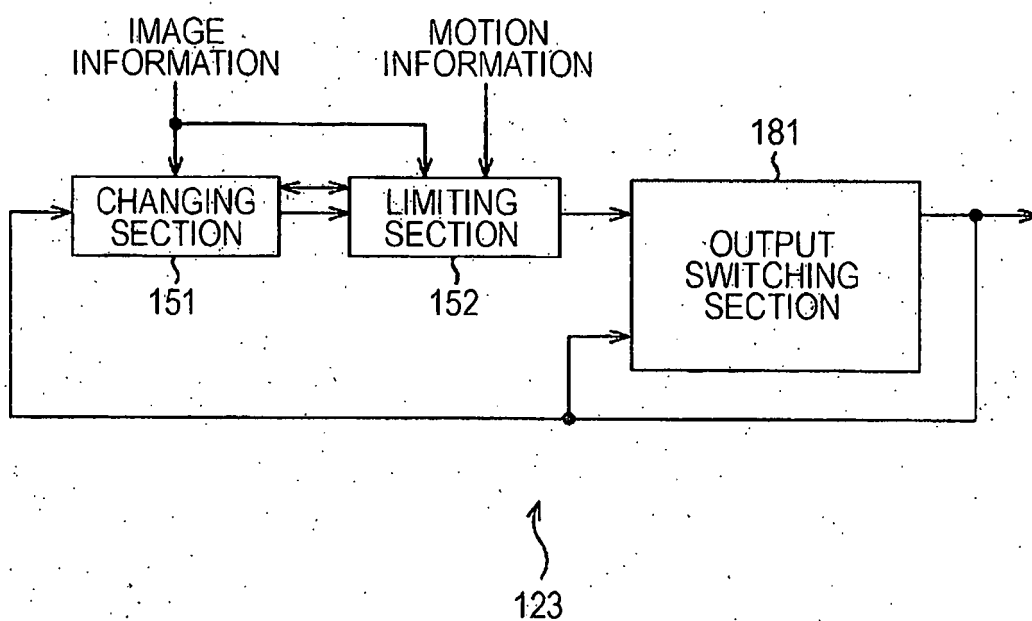


FIG. 10


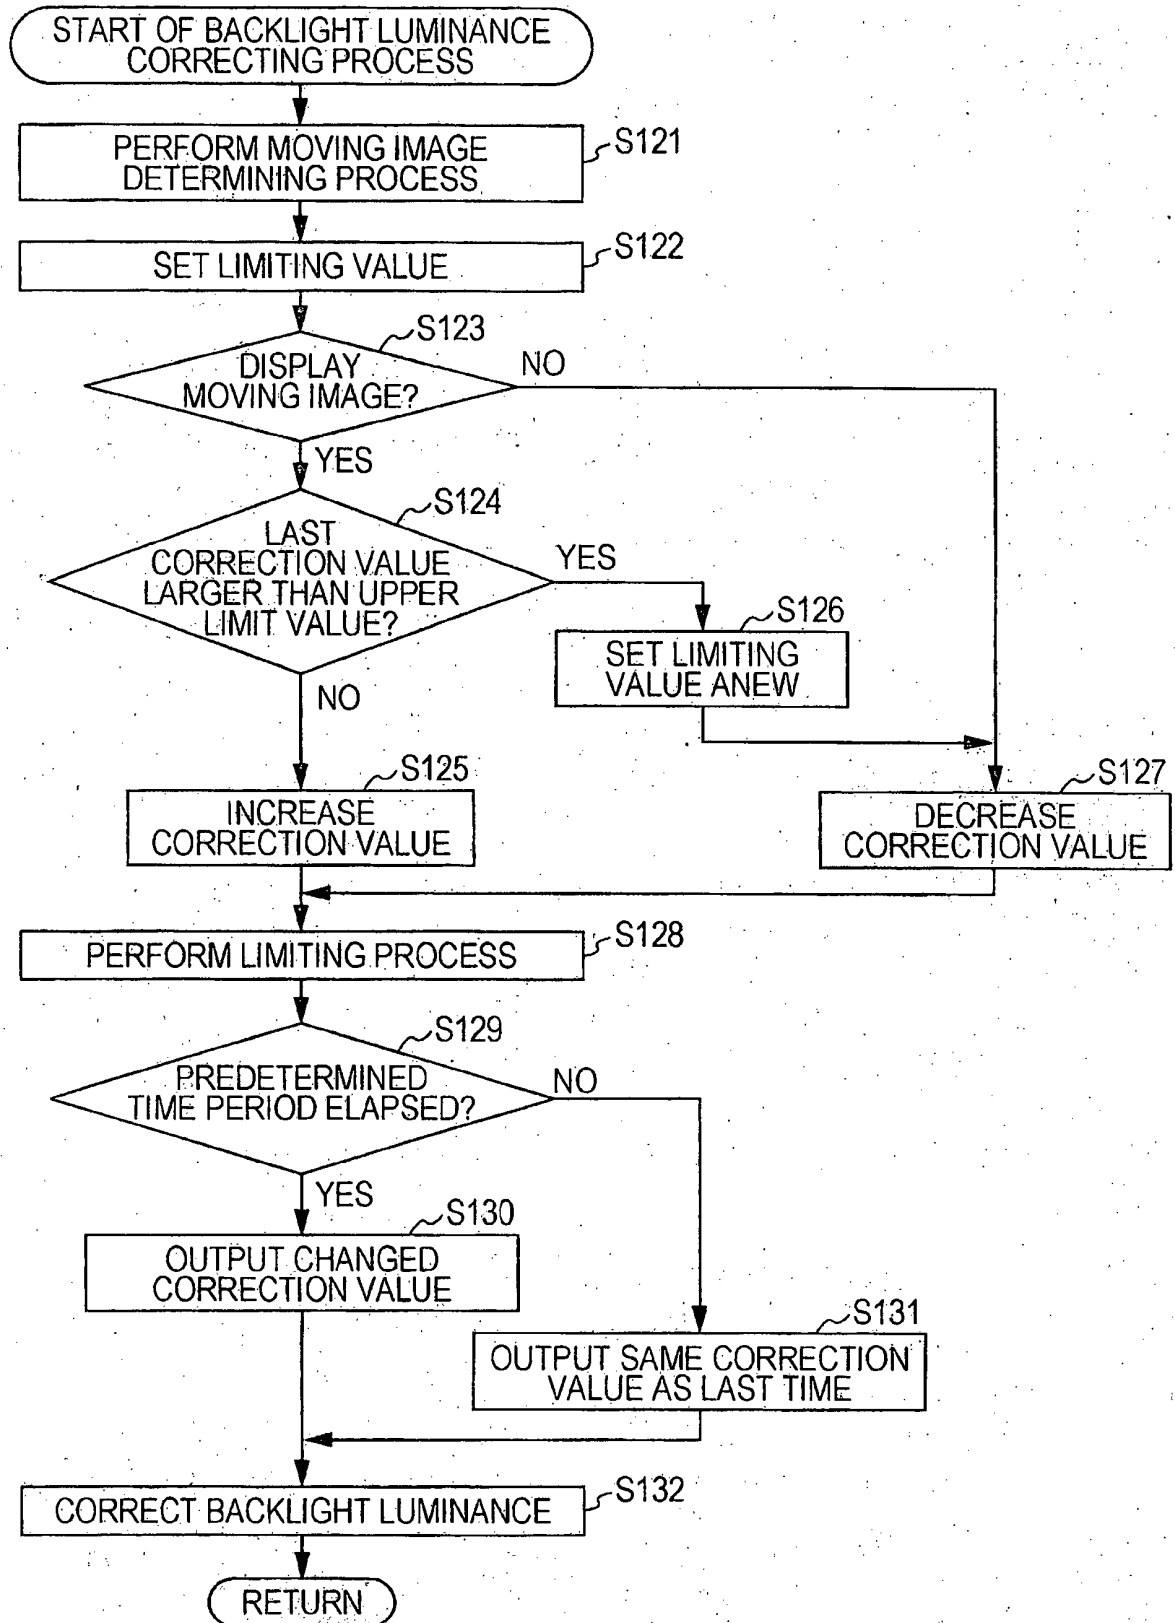


FIG. 11

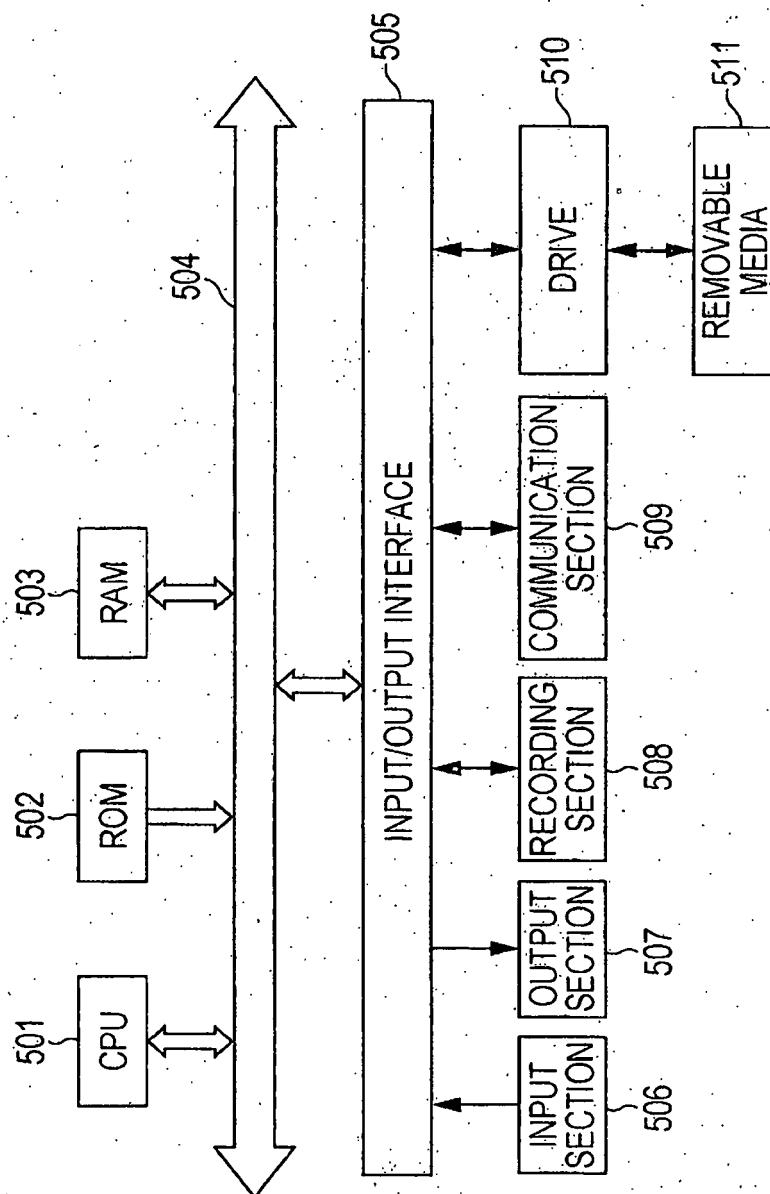

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20080074372 A [0003]
- JP 2007322901 A [0003]
- US 20050184952 A [0003]

专利名称(译)	显示控制设备，方法和程序		
公开(公告)号	EP2273482B1	公开(公告)日	2016-10-26
申请号	EP2009742756	申请日	2009-05-08
[标]申请(专利权)人(译)	索尼公司		
申请(专利权)人(译)	索尼公司		
当前申请(专利权)人(译)	索尼公司		
[标]发明人	INADA TETSUJI ASANO MITSUYASU HIRAMATSU TAKESHI NISHIDA KOJI		
发明人	INADA TETSUJI ASANO MITSUYASU HIRAMATSU TAKESHI NISHIDA KOJI		
IPC分类号	G09G3/36 G09G3/34		
CPC分类号	G09G3/3426 G09G2320/0247 G09G2320/0261 G09G2320/0646 G09G2320/0653 G09G2320/103 G09G2340/16 G09G2360/16		
优先权	2008122171 2008-05-08 JP		
其他公开文献	EP2273482A1 EP2273482A4		
外部链接	Espacenet		

摘要(译)

显示控制装置和方法以及程序技术领域本发明涉及一种显示控制装置和方法，以及能够防止由于来自背光的光的亮度不足而导致的图像质量劣化的程序。背光亮度计算部分（121）基于显示图像的图像信号找到由背光照射的光的背光亮度。运动图像确定部分（122）基于图像信号确定显示图像是否是运动图像。校正值计算部分（123）将最后校正值增加预定值以在显示图像是运动图像时获得新校正值，并且将最后校正值减小预定值以获得新校正值。显示图像是静止图像。加法部分（124）将校正值加到背光亮度上以校正背光亮度。本发明可以应用于液晶显示装置。

$$\text{Transmittance } T = (\text{luminance } L \text{ of a pixel in a display image}) / (\text{pixel incidence})$$

$$\text{luminance } Q_{(1)} \dots (1)$$