



(11) **EP 2 352 060 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
15.05.2013 Bulletin 2013/20

(51) Int Cl.:
G02F 1/1337 ^(2006.01) **C08F 2/44** ^(2006.01)
C08F 20/00 ^(2006.01) **C08G 73/10** ^(2006.01)

(21) Application number: **09821712.8**

(86) International application number:
PCT/JP2009/002862

(22) Date of filing: **23.06.2009**

(87) International publication number:
WO 2010/047011 (29.04.2010 Gazette 2010/17)

(54) **ORIENTATION FILM, ORIENTATION FILM MATERIAL, LIQUID CRYSTAL DISPLAY HAVING ORIENTATION FILM, AND METHOD FOR FORMING THE SAME**

ORIENTIERUNGSFILM, ORIENTIERUNGSFILMMATERIAL, FLÜSSIGKRISTALLANZEIGE MIT DEM ORIENTIERUNGSFILM UND HERSTELLUNGSVERFAHREN DAFÜR

FILM D'ORIENTATION, MATÉRIAU POUR FILM D'ORIENTATION, AFFICHEUR À CRISTAUX LIQUIDES COMPORTANT LEDIT FILM D'ORIENTATION, ET PROCÉDÉ DE FABRICATION ASSOCIÉ

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

(30) Priority: **21.10.2008 JP 2008271376**

(43) Date of publication of application:
03.08.2011 Bulletin 2011/31

(73) Proprietor: **Sharp Kabushiki Kaisha
Osaka-shi, Osaka 545-8522 (JP)**

(72) Inventors:
• **MIZUSAKI, Masanobu
Osaka 545-8522 (JP)**

• **NAKANISHI, Yohei
Osaka 545-8522 (JP)**

(74) Representative: **Müller - Hoffmann & Partner
Patentanwälte
Innere Wiener Strasse 17
81667 München (DE)**

(56) References cited:
**EP-A1- 1 507 161 JP-A- 6 202 118
JP-A- 6 202 118 JP-A- 7 101 904
JP-A- 7 101 904 JP-A- 9 185 066
JP-A- 9 185 066 JP-A- 2003 261 511
JP-A- 2007 304 509 JP-A- 2009 132 718**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 352 060 B1

Description**TECHNICAL FIELD**

5 **[0001]** The present invention relates to an alignment film, an alignment film material, and a liquid crystal display device having the alignment film, as well as methods of forming the same.

BACKGROUND ART

10 **[0002]** Liquid crystal display devices are used not only as small-sized display devices, e.g., the display sections of mobile phones, but also as large-sized television sets. Liquid crystal display devices of the TN (Twisted Nematic) mode, which have often been used conventionally, have relatively narrow viewing angles. In recent years, however, liquid crystal display devices with wide viewing angles have been produced, e.g., the IPS (In-Plane Switching) mode and the VA (Vertical Alignment) mode. Among such modes with wide viewing angles, the VA mode is adopted in a large number
15 of liquid crystal display devices because of an ability to realize a high contrast ratio.

15 **[0003]** A liquid crystal display device includes an alignment film which defines an alignment direction of liquid crystal molecules in its neighborhood. In a VA-mode liquid crystal display device, an alignment film causes liquid crystal molecules to be aligned substantially perpendicularly to its principal face. Generic alignment films are made of polyimide, which has advantages in terms of thermal resistance, solvent resistance, hygroscopicity, and so on.

20 **[0004]** As one kind of VA mode, the MVA (Multi-domain Vertical Alignment) mode is known, under which a plurality of liquid crystal domains are created in one pixel region. An MVA-mode liquid crystal display device includes alignment regulating structures provided on the liquid-crystal-layer side of at least one of a pair of opposing substrates, between which a vertical-alignment type liquid crystal layer is interposed. The alignment regulating structures may be linear slits (apertures) or ribs (protruding structures) that are provided on electrodes, for example. The alignment regulating structures provide alignment regulating forces from one side or both sides of the liquid crystal layer, thus creating a plurality
25 of liquid crystal domains (typically four liquid crystal domains) with different alignment directions, whereby the viewing angle characteristics are improved.

30 **[0005]** As another kind of VA mode, the CPA (Continuous Pinwheel Alignment) mode is also known. In a generic liquid crystal display device of the CPA mode, pixel electrodes of a highly symmetrical shape are provided, and on a counter electrode, protrusions are provided corresponding to the centers of liquid crystal domains. These protrusions are also referred to as rivets. When a voltage is applied, in accordance with an oblique electric field which is created with the counter electrode and a highly symmetrical pixel electrode, liquid crystal molecules take an inclined alignment of a radial shape. Moreover, the inclined alignment of the liquid crystal molecules are stabilized due to the alignment regulating forces of side slopes of the rivets. Thus, the liquid crystal molecules in one pixel are aligned in a radial shape, thereby
35 improving the viewing angle characteristics.

35 **[0006]** Unlike in TN-mode liquid crystal display devices in which the pretilt direction of liquid crystal molecules is defined by an alignment film, alignment regulating forces in an MVA-mode liquid crystal display device are applied to the liquid crystal molecules by linear slits or ribs. Therefore, depending on distances from the slits and ribs, the alignment regulating forces for the liquid crystal molecules within a pixel region will differ, thus resulting in differing response speeds of the liquid crystal molecules within the pixel. Similarly, also in the CPA mode, the response speeds of the liquid crystal molecules will differ within the pixel, and the differences in response speed will become more outstanding as the pixel electrodes increase in size. Furthermore, in a VA-mode liquid crystal display device, the light transmittance in the regions in which slits, ribs, or rivets are provided is low, thus making it difficult to realize a high luminance.

40 **[0007]** In order to avoid the above problems, use of an alignment film for applying alignment regulating forces to liquid crystal molecules in a VA-mode liquid crystal display device is also known, such that the liquid crystal molecules will tilt from the normal direction of a principal face of the alignment film in the absence of an applied voltage (see, for example, Patent Documents 1 and 2).

45 **[0008]** In the liquid crystal display device disclosed in Patent Document 1, the alignment film is subjected to an alignment treatment such as rubbing. The alignment film aligns the liquid crystal molecules so that the liquid crystal molecules will be aligned with a tilt from the normal direction of its principal face even in the absence of an applied voltage, whereby an improved response speed is realized. Furthermore, since the alignment film defines the pretilt azimuth of liquid crystal molecules so that the liquid crystal molecules within one pixel will be symmetrically aligned, the viewing angle characteristics are improved. In a liquid crystal display device disclosed in Patent Document 1, four liquid crystal domains are formed in a liquid crystal layer in accordance with a combination of two alignment regions of a first alignment film and two alignment regions of a second alignment film, whereby a wide viewing angle is realized.

50 **[0009]** An alignment film disclosed in Patent Document 2 is made of a photosensitive material having a photoreactive functional group as a side chain, and by obliquely radiating light onto this alignment film, a pretilt is conferred so that the liquid crystal molecules will be inclined from the normal direction of a principal face of the alignment film in the absence

of an applied voltage. An alignment film to which a pretilt is conferred through such a photo-alignment treatment may also be referred to as a photo-alignment film. In the photo-alignment film disclosed in Patent Document 2, fluctuations in the pretilt angle are controlled to 1° or less, by using an alignment film material which includes a bonded structure of photoreactive functional groups.

[0010] An alignment film which is made of one polymer may not attain adequate characteristics. Therefore, use of two different polymers to form an alignment film is under study (see Patent Document 3 and Non-Patent Document 1).

[0011] An alignment film disclosed in Patent Document 3 includes a main layer which is made of a first polymer having a large molecular weight and/or polarity, and a surface layer which is made of a second polymer having a small molecular weight and/or polarity. As the first polymer, a material including an aromatic (e.g., SE7690 manufactured by NISSAN CHEMICAL INDUSTRIES, LTD.), which hardly gives rise to any internal DC bias voltage, is used. On the other hand, the second polymer, which is a material that undergoes a large change in the pretilt angle in response to ultraviolet irradiation, is a cyclobutane-type polymer material. In Patent Document 3, SE7210 manufactured by NISSAN CHEMICAL INDUSTRIES, LTD. is used as the second polymer.

[0012] Non-Patent Document 1 discloses an alignment film including a lower layer whose main component is polyamic acid and an upper layer whose main component is polyimide. In Non-Patent Document 1, isolation into the two layers of the upper layer and the lower layer is achieved by appropriately setting a pre-bake temperature and time.

JP 07 101 904 describes a biphenyl methacrylate derivative and a polymer dispersion type liquid crystal display element using it.

CITATION LIST

PATENT LITERATURE

[0013] [Patent Document 1] Japanese Laid-Open Patent Publication No. 11-352486

[Patent Document 2] The pamphlet of International Publication No. 2006/121220

[Patent Document 3] Japanese Laid-Open Patent Publication No. 8-334771

NON-PATENT LITERATURE

[0014] [Non-Patent Document 1] Mu-Sun Kwak et al., "Observation of Hybrid Type Alignment Film in TFT-LCD", Proceedings of 2007 Japanese Liquid Crystal Society Annual meeting, September 2007, PA03, p138

SUMMARY OF INVENTION

TECHNICAL PROBLEM

[0015] Generally speaking, when a liquid crystal display device keeps displaying the same pattern for a long time, the previous pattern may remain even after the displayed image is changed. Such a phenomenon is also called image sticking. For example, after displaying white in a partial region of the screen and black in another region for a long time, if the entire liquid crystal panel is caused to display the same intermediate gray scale level, the region previously displaying white may appear slightly brighter than the region previously displaying black.

[0016] One cause of such image sticking is charge accumulation. The amount of charge accumulated in the region which was displaying black is different from the amount of charge accumulated in the region which was displaying white, and an electric field occurs because impurity ions in the liquid crystal accumulate at the interface between the alignment film and the liquid crystal layer. Therefore, when entirely switched to the same gray scale level, different voltages are applied to the layers of liquid crystal in the respective regions which were displaying white and black, thus being perceived as image sticking.

[0017] Note that image sticking caused by such charge accumulation can be somewhat suppressed by applying voltages of inverted polarities to the respective pixels. Therefore, an image sticking caused by charge accumulation is also called DC image sticking. The driving which involves applying voltages of inverted polarities for the sake of suppressing DC image sticking is also called polarity inversion driving. In actuality, even with polarity inversion driving, it is difficult to apply voltages of completely symmetric polarities and thus a resultant image sticking may be perceived as flickering.

[0018] Moreover, image sticking will also occur when minute changes in the pretilt angle occur. When the pretilt angle changes, the V-T characteristics are affected, and thus the transmittance will vary even if the same voltage is applied. Since the applied voltage when displaying white is different from the applied voltage when displaying black, the amount of change in the tilt angle will vary depending on the applied voltage. When later entirely switched to the same gray scale level, image sticking may be perceived due to changes in the tilt angle. Such image sticking cannot be suppressed

even by performing polarity inversion driving, and is also called AC image sticking.

[0019] The present invention has been made in view of the above problems, and an objective thereof is to provide an alignment film which suppresses image sticking caused by changes in the pretilt angle, an alignment film material for forming the aforementioned alignment film, and a liquid crystal display device having the alignment film, as well as methods of forming the same.

SOLUTION TO PROBLEM


[0020] An alignment film material according to the present invention is an alignment film material comprising: a precursor of a first polyimide; at least one of a second polyimide and a precursor thereof, the second polyimide being different from the first polyimide; and a vinyl-type monomer having a vinyl group, wherein the vinyl-type monomer is represented by general formula (1) P1-A1-(Z1-A2)_n-P2 (in general formula (1), P1 and P2 are, independently, acrylate, methacrylate, acrylamide or methacrylamide; A1 and A2 represent, independently, 1,4-phenylene, 1,4-cyclohexane or 2,5-thiophene, or naphthalene-2,6-diyl or anthracene-2,7-diyl; at least one of A1 and A2 is substituted by at least one fluorine group; and Z1 is a -COO- group, a -OCO- group, a -O- group, a -CONH- group or a single bond, where n is 0 or 1).

[0021] In one embodiment, the vinyl-type monomer is a bifunctional monomer having a symmetric structure.

[0022] In one embodiment, the vinyl-type monomer is a dimethacrylate monomer.


























[0023] In one embodiment, the vinyl-type monomer is represented by structural formula (1a).

[Formula 1]

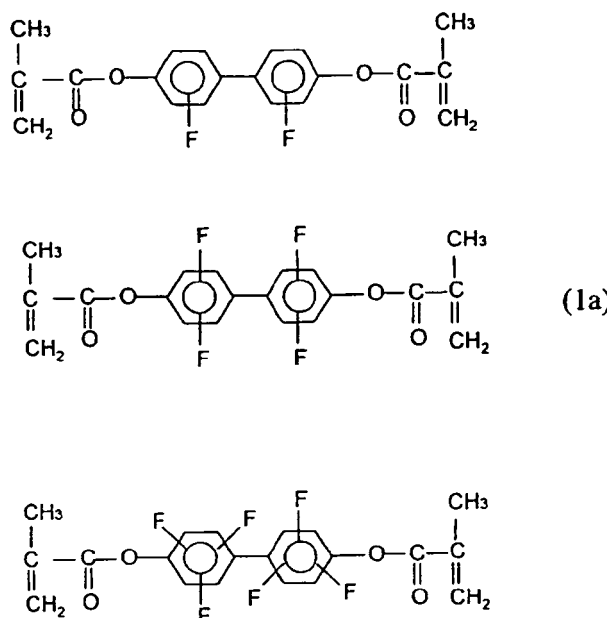

[0024] In one embodiment, the precursor of the first polyimide is represented by general formula (2).























[Formula 2]

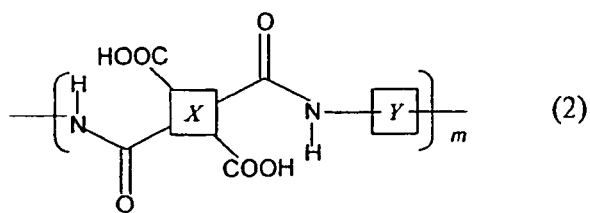


[0025] In one embodiment, a side chain of the precursor of the first polyimide does not have any vertical alignment groups.

[0026] In one embodiment, the precursor of the second polyimide is represented by general formula (3); and

[Formula 3]

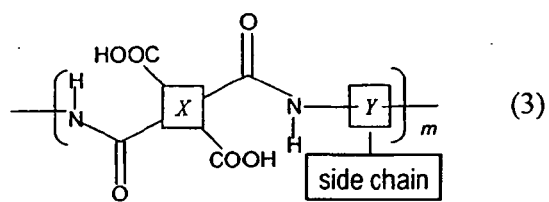


45 the second polyimide is represented by general formula (3').

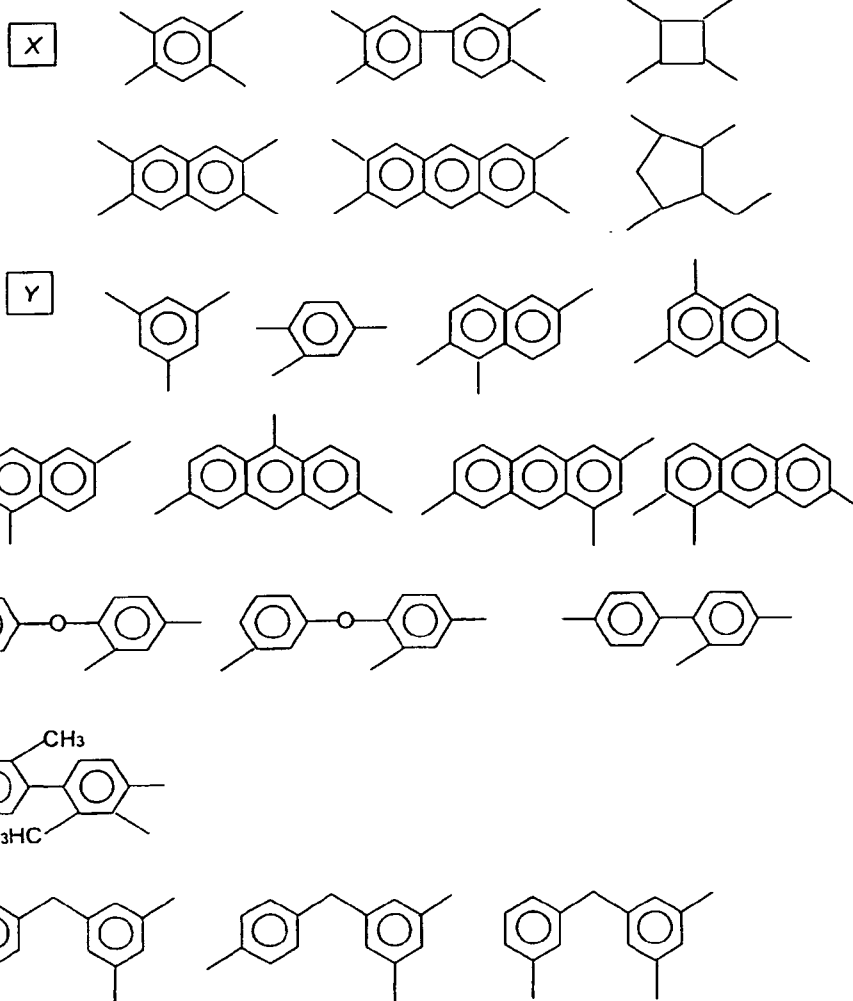

[0030] In one embodiment, at least one of the second polyimide and the precursor thereof has a side chain represented by general formula (4).

[Formula 5]



[0031] In one embodiment, at least one of the second polyimide and the precursor thereof has a side chain including a vertical alignment group.

[0032] In one embodiment, a concentration of the vinyl-type monomer on the basis of the alignment film material is no less than 2wt% and no more than 20wt%.

[0033] An alignment film according to the present invention is an alignment film comprising: a first polyimide; a second polyimide different from the first polyimide; and a polyvinyl compound resulting from polymerization of a vinyl-type monomer, wherein the vinyl-type monomer is represented by general formula (1) P1-A1-(Z1-A2)n-P2 (in general formula (1), P1 and P2 are, independently, acrylate, methacrylate, acrylamide or methacrylamide; A1 and A2 represent, independently, 1,4-phenylene, 1,4-cyclohexane or 2,5-thiophene, or naphthalene-2,6-diyl or anthracene-2,7-diyl; at least one of A1 and A2 is substituted by at least one fluorine group; and Z1 is a -COO- group, a -OCO- group, a -O-group, a -CONH- group or a single bond, where n is 0 or 1).

[0034] In one embodiment, the alignment film has a first alignment layer containing the first polyimide and a second alignment layer containing the second polyimide.

[0035] In one embodiment, the polyvinyl compound is present within the second alignment layer and on a surface of the second alignment layer.

[0036] A liquid crystal display device according to the present invention is a liquid crystal display device comprising: an active matrix substrate having a pixel electrode; a counter substrate having a counter electrode; and a vertical-alignment type liquid crystal layer provided between the active matrix substrate and the counter substrate, wherein, at least one of the active matrix substrate and the counter substrate further includes an alignment film provided on the liquid crystal layer side; the alignment film includes a first polyimide, a second polyimide different from the first polyimide, and a polyvinyl compound resulting from polymerization of a vinyl-type monomer; and the vinyl-type monomer is represented by general formula (1) P1-A1-(Z1-A2)n-P2 (in general formula (1), P1 and P2 are, independently, acrylate, methacrylate, acrylamide or methacrylamide; A1 and A2 represent, independently, 1,4-phenylene, 1,4-cyclohexane or 2,5-thiophene, or naphthalene-2,6-diyl or anthracene-2,7-diyl; at least one of A1 and A2 is substituted by at least one fluorine group; and Z1 is a -COO-group, a -OCO- group, a -O- group, a -CONH- group or a single bond, where n is 0 or 1).

[0037] In one embodiment, the alignment film has a first alignment layer containing the first polyimide and a second alignment layer containing the second polyimide.

[0038] In one embodiment, the second alignment layer is provided so as to be closer to the liquid crystal layer than is the first alignment layer; and the polyvinyl compound is present within the second alignment layer and on a surface of the second alignment layer.

[0039] In one embodiment, the alignment film regulates liquid crystal molecules in the liquid crystal layer so that the liquid crystal molecules are inclined with respect to a normal direction of a principal face of the alignment film in the absence of an applied voltage.

[0040] In one embodiment, the liquid crystal display device has a plurality of pixels; and in each of the plurality of pixels, the liquid crystal layer has a plurality of liquid crystal domains having respectively different reference alignment azimuths.

[0041] In one embodiment, the plurality of liquid crystal domains are four liquid crystal domains.

[0042] A method of forming an alignment film according to the present invention comprises the steps of: providing an alignment film material containing a precursor of a first polyimide, at least one of a second polyimide and a precursor thereof, and a vinyl-type monomer, the second polyimide being different from the first polyimide; applying the alignment film material; and heating the alignment film material so that at least a portion of the precursor of the first polyimide is imidized into the first polyimide and that the vinyl-type monomer is polymerized to form a polyvinyl compound.

[0043] In one embodiment, in the step of providing the alignment film material, the vinyl-type monomer is represented by general formula (1) P1-A1-(Z1-A2)n-P2 (in general formula (1), P1 and P2 are, independently, acrylate, methacrylate, acrylamide or methacrylamide; A1 and A2 represent, independently, 1,4-phenylene, 1,4-cyclohexane or 2,5-thiophene, or naphthalene-2,6-diyl or anthracene-2,7-diyl; at least one of A1 and A2 is substituted by at least one fluorine group; and Z1 is a -COO- group, a -OCO- group, a -O- group, a -CONH- group or a single bond, where n is 0 or 1).

[0044] In one embodiment, after the step of heating, a fraction of imide units of the second polyimide is greater than

a fraction of imide units of the first polyimide.

[0045] In one embodiment, the step of applying the alignment film material comprises a step of performing the application of the alignment film material by a printing technique, an ink jet technique, or a spin coating technique.

ADVANTAGEOUS EFFECTS OF INVENTION

[0046] According to the present invention, image sticking caused by changes in the pretilt angle can be suppressed.

BRIEF DESCRIPTION OF DRAWINGS

[0047]

[FIG. 1] A schematic cross-sectional view of an embodiment of an alignment film according to the present invention.

[FIG. 2] (a) is a schematic diagram of an embodiment of a liquid crystal display device according to the present invention; and (b) is a schematic diagram of a liquid crystal panel of the liquid crystal display device of the present embodiment.

[FIG. 3] A graph showing a relationship between the thickness of an alignment layer and the density of a fluorine group existing in the side chain of polyimide.

[FIG. 4] (a) to (c) are schematic diagrams each illustrating a production method of the liquid crystal display device of the present embodiment.

[FIG. 5] (a) is a schematic diagram of an alignment film of the liquid crystal display device of the present embodiment; (b) is a schematic diagram of the alignment film; and (c) is a schematic diagram showing alignment directions of liquid crystal molecules in the centers of liquid crystal domains.

[FIG. 6] (a) is a schematic diagram showing an alignment state of liquid crystal molecules in a liquid crystal display device of Example 1-1; and (b) is a schematic diagram showing alignment treatment directions for the first and second alignment films as viewed from the viewer's side.

[FIG. 7] A schematic diagram showing alignment treatment directions for the first and second alignment films as viewed from the viewer's side, in a liquid crystal display device of Example 4.

[FIG. 8] A schematic diagram showing alignment treatment directions for the first and second alignment films as viewed from the viewer's side, in a liquid crystal display device of Example 5.

DESCRIPTION OF EMBODIMENTS

[0048] Hereinafter, with reference to the drawings, an embodiment of an alignment film, alignment film material, and liquid crystal display device having the alignment film according to the present invention will be described.

[0049] FIG. 1 shows a schematic diagram of an alignment film 100 of the present embodiment. The alignment film 100 contains a first polyimide p1, a second polyimide p2, and a polyvinyl compound pv. The alignment film 100 is isolated into the two layers of a first alignment layer 102 containing the first polyimide p1 and a second alignment layer 104 containing the second polyimide p2. The main component of the first alignment layer 102 is the first polyimide p1, whereas the main component of the second alignment layer 104 is the second polyimide p2. The first polyimide p1 is one that has small fluctuations in its electrical characteristics after voltage application. The second polyimide p2 is one that leads to greatly varying pretilt angles of liquid crystal molecules depending on the alignment treatment.

[0050] The second alignment layer 104 is located on an upper side of the first alignment layer 102. Generally speaking, the second alignment layer 104 is thinner than the first alignment layer 102. Moreover, the alignment film 100 does not need to be completely isolated into two layers as illustrated.

[0051] In the alignment film 100, the main chains of the first and second polyimides p1 and p2 align in essentially one direction. The main chain or the side chain of the second polyimide p2 may have a photoreactive functional group. The photoreactive functional group may be one of a cinnamate group, a chalcone group, a tolan group, a coumarin group, and an azobenzene group, for example. Alternatively, the side chain of the second polyimide p2 may have a vertical alignment group. The first and second polyimides p1 and p2 are formed through imidization (polymerization) of different polyimide precursors.

[0052] The polyvinyl compound pv of the alignment film 100 of the present embodiment has a fluorine group, such that the polyvinyl compound pv is formed through polymerization of a vinyl-type monomer having a fluorine group. The polyvinyl compound pv is present within the second alignment layer 104 and on the surface of the second alignment layer 104. The polymerization is performed by applying heat or light to the vinyl-type monomer.

[0053] The alignment film 100 is formed as follows. First, an alignment film material is provided. The alignment film material is obtained by allowing the precursor of the first polyimide p1, at least one of the second polyimide p2 and the precursor thereof, and a vinyl-type monomer having a fluorine group to be dissolved in a solvent. The concentration of

the vinyl-type monomer on the basis of the alignment film material is no less than 2wt% and no more than 20wt%.

[0054] The fraction of imide units of the second polyimide **p2** in the alignment film material may be between 0% and 100%. It is considered that, the lower the fraction of imide units of the first polyimide **p1** is, the higher the effect of suppressing residual DC voltage is.


[0055] In the alignment film material, it is preferable that the fraction of imide units of the second polyimide **p2** is higher than the fraction of imide units of the first polyimide **p1**. For example, a precursor of a polyimide for horizontal alignment having a fraction of imide units of 0%, and a polyimide for vertical alignment having a fraction of imide units which is higher than 0% and its precursor may be provided, and these may be dissolved in a solvent; and furthermore, a vinyl-type monomer having a fluorine group may be dissolved in the solvent. Note that the concentration of the second polyimide and the precursor thereof is lower than the concentration of the precursor of the first polyimide.

[0056] Application of the alignment film material is performed by a printing technique, an ink jet technique, or a spin coating technique. Next, the solvent is removed from the alignment film material. For example, the solvent is removed through a heat treatment. The heat treatment also allows the precursor of the first polyimide **p1** to imidize into the first polyimide **p1** and the precursor of the second polyimide **p2** to imidize into the second polyimide **p2**. At this time, isolation into the two layers occurs, such that the first alignment layer **102** containing the first polyimide **p1** and the second alignment layer **104** containing the second polyimide **p2** are formed. Note that, it is preferable also in the alignment film **100** that the fraction of imide units of the second polyimide **p2** is higher than the fraction of imide units of the first polyimide **p1**.

[0057] Moreover, the heat treatment allows the vinyl-type monomer to polymerize, whereby the polyvinyl compound **pv** is formed. Since the vinyl-type monomer has a fluorine group, due to surface tension of the fluorine group, the polyvinyl compound **pv** is formed within the second alignment layer **104** and on the surface of the second alignment layer **104**. Thus, since the polyvinyl compound **pv** is present on the surface of the alignment film **100** and the neighborhood thereof, changes in the pretilt angle of the liquid crystal molecules can be efficiently suppressed.

[0058] Herein, the vinyl-type monomer is a polyfunctional monomer having a plurality of vinyl groups ($\text{CH}_2=\text{CH}-$), and the polyvinyl compound **pv** is a polymerization product of the polyfunctional monomer. For example, the polyfunctional monomer is dimethacrylate, diacrylate, diacrylamide, or dimethacrylamide. The vinyl groups of such a polyfunctional monomer are parts of methacrylate groups, acrylate groups, acrylamide groups, or methacrylamide groups, for example.

[0059] The vinyl-type monomer is represented by general formula (1).



[0060] In general formula (1), P1 and P2 are, independently, acrylate, methacrylate, acrylamide or methacrylamide; A1 and A2 represent, independently, 1,4-phenylene, 1,4-cyclohexane or 2,5-thiophene, or naphthalene-2,6-diyl or anthracene-2,7-diyl; at least one of A1 and A2 is substituted by at least one fluorine group; and Z1 is a -COO-group, a -OCO- group, a -O- group, a -CONH- group or a single bond, where n is 0 or 1.

[0061] Thus, since the polyfunctional monomer has a plurality of vinyl groups, the polyvinyl compound **pv** which is formed through polymerization of the polyfunctional monomer has a three-dimensional network structure. Moreover, this polyfunctional monomer has two or more directly-bonded ring structures or one or more condensed ring structures between the plurality of vinyl groups, and has a low degree of freedom with respect to deformation, such that the polyvinyl compound is unlikely to deform under stress. By containing the polyvinyl compound **pv** as such, the alignment film **100** is structurally stabilized, whereby fluctuations of the alignment characteristics are suppressed.

[0062] Moreover, in the present embodiment, formation of the two alignment layers **102** and **104** is performed altogether at one time, via application of an alignment film material obtained by mixing different polyimide precursors and a heat treatment. As a result, the processing steps and time for forming the alignment film **100** can be abbreviated.

[0063] Hereinafter, with reference to FIG. 2, a liquid crystal display device **200** having alignment films **110** and **120** according to the present embodiment will be described. FIG. 2(a) shows a schematic diagram of the liquid crystal display device **200**. The liquid crystal display device **200** includes a liquid crystal panel **300**, a driving circuit **350** for driving the liquid crystal panel **300**, and a control circuit **360** for controlling the driving circuit **350**. Although not shown, the liquid crystal display device **200** may include a backlight as necessary.

[0064] As shown in FIG. 2(b), the liquid crystal panel **300** includes an active matrix substrate **220** having the first alignment film **110**, a counter substrate **240** having the second alignment film **120**, and a liquid crystal layer **260** provided between the active matrix substrate **220** and the counter substrate **240**. The active matrix substrate **220** further includes a first insulative substrate **222** and pixel electrodes **224**, such that the first alignment film **110** covers the pixel electrodes **224**. Moreover, the counter substrate **240** further includes a second insulative substrate **242** and a counter electrode **244**, such that the second alignment film **120** covers the counter electrode **244**. The liquid crystal layer **260** is interposed between the active matrix substrate **220** and the counter substrate **240**. For example, the first and the second insulative substrates **222** and **242** are transparent glass substrates.

[0065] The liquid crystal display device **200** includes pixels composing a matrix of a plurality of rows and a plurality of

columns. On the active matrix substrate **220**, at least one switching element (e.g., thin film transistor (Thin Film Transistor: TFT))(not shown in the figure) is provided for each pixel, and the active matrix substrate **220** is also referred to a TFT substrate. In the present specification, a "pixel" refers to the smallest unit that expresses a specific gray scale level in displaying; in the case of multicolor displaying, a "pixel" corresponds to a unit that expresses a gray scale level of each of R, G, and B, for example, and is also referred to as a dot. A combination of an R pixel, a G pixel, and a B pixel composes a single color displaying pixel. A "pixel region" refers to a region of the liquid crystal panel **300** that corresponds to a "pixel" in displaying.

[0066] Although not shown, a polarizer is provided on each of the active matrix substrate **220** and the counter substrate **240**. Therefore, the two polarizers are disposed so as to oppose each other with the liquid crystal layer **260** interposed therebetween. The transmission axes (polarization axes) of the two polarizers are positioned so as to be orthogonal to each other, such that one of them extends along the horizontal direction (row direction), whereas the other extends along the vertical direction (column direction).

[0067] The first alignment film **110** contains the first polyimide **p1**, the second polyimide **p2**, and the polyvinyl compound **pv**. The first alignment film **110** is isolated into the two layers of the first alignment layer **112** containing the first polyimide **p1** and the second alignment layer **114** containing the second polyimide **p2**. The second alignment layer **114** is located on the liquid crystal layer **260** side of the first alignment layer **112**.

[0068] Similarly, the second alignment film **120** contains the first polyimide **p1**, the second polyimide **p2**, and the polyvinyl compound **pv**, and the second alignment film **120** is isolated into the two layers of a first alignment layer **122** containing the first polyimide **p1** and a second alignment layer **124** containing the second polyimide **p2**. The second alignment layer **124** is located on the liquid crystal layer **260** side of the first alignment layer **122**.

[0069] The first polyimide **p1** is formed by imidizing the precursor thereof. Also, the second polyimide **p2** is formed by imidizing the precursor thereof. The polyvinyl compound **pv** is formed through polymerization of a vinyl-type monomer. The polymerization is performed by applying heat or light to the vinyl-type monomer.

[0070] The first alignment film **110** is made of an alignment film material. The alignment film material is obtained by allowing the precursor of the first polyimide **p1**, the second polyimide **p2** and/or the precursor thereof, and the vinyl-type monomer to be dissolved in a solvent, for example. For example, after applying the alignment film material onto the pixel electrodes **224**, a heat treatment is performed to evaporate the solvent and effect imidization and polymerization, whereby the first alignment film **110** containing the first polyimide **p1**, the second polyimide **p2**, and the polyvinyl compound **pv** is formed. The heat treatment is performed twice at different temperatures, for example. Similarly, after applying the alignment film material onto the counter electrode **244**, a heat treatment is performed to evaporate the solvent and effect imidization and polymerization, whereby the second alignment film **120** containing the first polyimide **p1**, the second polyimide **p2**, and the polyvinyl compound **pv** is formed.

[0071] The liquid crystal layer **260** contains a nematic liquid crystal material (liquid crystal molecules **262**) having negative dielectric anisotropy. The first alignment film **110** and the second alignment film **120** are each treated so that the pretilt angle of the liquid crystal molecules **262** is less than 90° with respect to the surface of the vertical alignment film. The pretilt angle of the liquid crystal molecules **262** is an angle between principal faces of the first alignment film **110** and the second alignment film **120** and the major axis of each liquid crystal molecule **262** that is regulated in a pretilt direction.

[0072] Although the liquid crystal layer **260** is of a vertical-alignment type, due to the second alignment layers **114** and **124** containing the second polyimide **p2**, the liquid crystal molecules **262** in their neighborhood are slightly inclined from the normal directions of the principal faces of the first and second alignment films **110** and **120**. The pretilt angle is within a range from 85° to 89.7°, for example. The pretilt angle is measured by a crystal rotation technique, for example. The side chain of the second polyimide **p2** defines the pretilt direction of the liquid crystal molecules **262**. In the following description, this component may also be referred to as a pretilt-angle-exhibiting component.


























[0073] Note that the pretilt azimuth of the liquid crystal molecules **262** introduced by the first alignment film **110** is different from the pretilt azimuth of the liquid crystal molecules **262** introduced by the second alignment film **120**. For example, the pretilt azimuth of the liquid crystal molecules **262** introduced by the first alignment film **110** intersects, at 90°, the pretilt azimuth of the liquid crystal molecules **262** introduced by the second alignment film **120**. Herein, no chiral agent is added to the liquid crystal layer **260**, so that, when a voltage is applied across the liquid crystal layer **260**, the liquid crystal molecules within the liquid crystal layer **260** take a twist alignment in accordance with the alignment regulating forces from the first and second alignment films **110** and **120**. However, a chiral agent may be added to the liquid crystal layer **260** as necessary. In combination with polarizers which are placed in crossed Nicols, the liquid crystal layer **260** performs displaying in a normally black mode.

[0074] Moreover, each of the first and second alignment films **110** and **120** may have a plurality of alignment regions for each pixel. For example, a portion of the first alignment film **110** may be masked, and after a predetermined region of the first alignment film **110** is irradiated with light from a certain direction, another region which was not irradiated with light may be irradiated with light from a different direction. Furthermore, the second alignment film **120** may be similarly formed. In this manner, regions that confer different alignment regulating forces can be formed in each of the first and

second alignment films 110 and 120.




[0075] For example, the first polyimide p1 is represented by general formula (2').

[Formula 6]

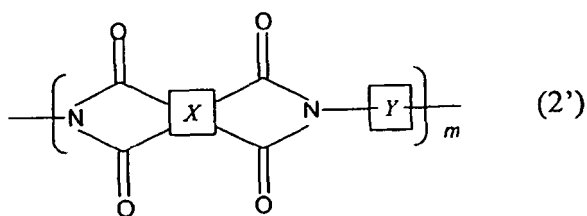























[0076] More specifically, the first polyimide p1 is represented by structural formula (2a').

[Formula 7]

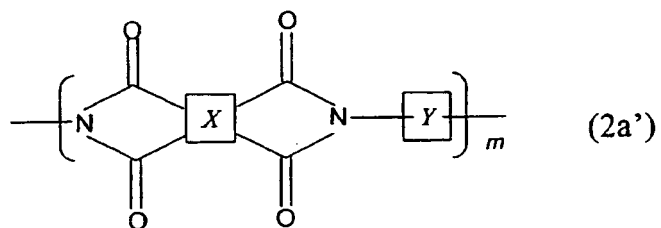

[0077] For example, the second polyimide **p2** is represented by general formula (3').


[Formula 8]

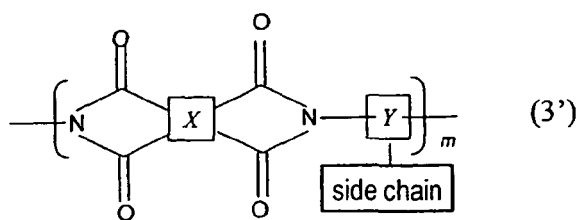

[0078] Note that the side chain of the second polyimide **p2** may contain a fluorine atom. When the side chain contains a fluorine atom, the aforementioned image sticking is suppressed to a certain extent.

[0079] Moreover, the second polyimide **p2** may contain a photoreactive functional group. In this case, a dimerization site is formed through light irradiation. The second alignment layers **114** and **124** containing the second polyimide **p2** as such may also be referred to as a photo-alignment layer. For example, the second polyimide **p2** may have a photoreactive functional group in its side chain, and the side chain of the second polyimide **p2** is represented by general formula (4).

[Formula 9]

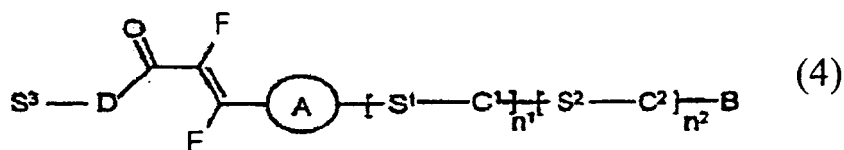

[0080] Herein, A represents pyrimidine-2,5-diyl, pyridine-2,5-diyl, 2,5-thiophenylene, 2,5-furanylene, 1,4-or 2,6-naphthylene, or phenylene, optionally substituted by a group selected from fluorine, chlorine, and cyano, or by a C₁₋₁₈ cyclic, linear chain, or branched alkyl residue (which is optionally substituted by one cyano group or one or more halogen atoms, where one or more non-adjacent -CH₂- groups of the alkyl are optionally replaced by a group Q).

[0081] B is a linear or branched alkyl residue which is unsubstituted, mono-substituted by cyano or halogen, or poly-substituted by halogen, having 3 to 18 carbon atoms (where one or more non-adjacent CH₂ groups may independently be replaced by a group Q).

[0082] C¹ and C² each independently of the other represent an aromatic or alicyclic group (which is unsubstituted or substituted by fluorine, chlorine, cyano, or by a cyclic, linear, or branched alkyl residue (which is unsubstituted, mono-substituted by cyano or halogen, or poly-substituted by halogen, having 1 to 18 carbon atoms and where one or more non-adjacent CH₂ groups may independently be replaced by a group Q)). D represents an oxygen atom or NR¹- (where R¹ represents a hydrogen atom or lower alkyl).





[0083] S¹ and S² each independently of the other represent a single covalent bond or a spacer unit. S³ represents a spacer unit.

[0084] Q represents a group selected from -O-, -CO-, -COO-, -O-CO-, -Si(CH₃)₂-O-Si(CH₃)₂-, -NR¹-, -NR¹-CO-, -CO-NR¹-, -NR¹-CO-O-, -O-CO-NR¹-, -NR¹-CO-NR¹-, -CH=CH-, -C≡C-, and -O-CO-O- (where R¹ represents a hydrogen atom or lower alkyl). E and F each independently of the other represent hydrogen, fluorine, chlorine, cyano, alkyl optionally substituted by fluorine having carbon atoms 1 to 12 (where optionally one or more non-adjacent CH₂ groups are replaced by -O-, -CO-O-, -O-CO- and/or -CH=CH-).

[0085] Note that it is preferable that A includes an aromatic compound; B includes fluorocarbon; D includes at least one or more hydrocarbon groups; and E and F include hydrogen atoms.

[0086] Specifically, the second polyimide **p2** is represented by structural formula (3a').






[Formula 10]

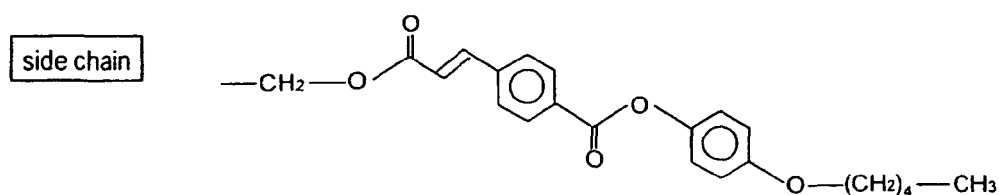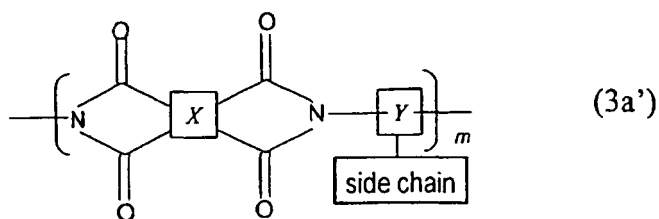

[0087] In this case, by irradiating the first or second alignment film **110**, **120** with light from an oblique direction with respect to the normal direction of its principal face, an alignment regulating force is applied to the second polyimide **p2** such that the liquid crystal molecules **262** are aligned so as to be inclined from the normal directions of the principal faces of the first and second alignment films **110** and **120** in the absence of an applied voltage. The second polyimide **p2** represented by structural formula (3a') is also referred to as a photo-alignable polyimide, and such a treatment is also referred to as a photo-alignment treatment. Since a photo-alignment treatment is performed without involving any contact, static electricity will not occur due to friction as in a rubbing treatment, and thus the production yield can be improved.


[0088] Although the above description illustrates that the second polyimide **p2** has a photoreactive functional group, and that a photo-alignment treatment is performed as an alignment treatment, the present invention is not limited thereto. The side chain of the second polyimide **p2** may have a vertical alignment group, and a rubbing treatment or an ion beam irradiation may be performed as an alignment treatment. For example, the second polyimide **p2** may be represented by structural formula (3b').

[Formula 11]

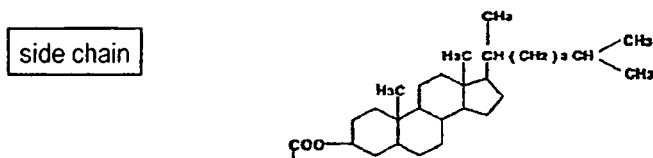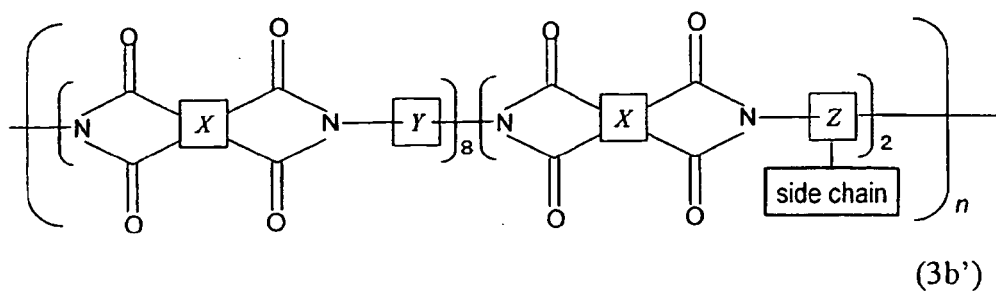

[0089] The second polyimide **p2** has a side chain including a vertical alignment group, and the second polyimide **p2** is also referred to as a vertical-alignment type polyimide. After forming the first and second alignment films **110** and **120**, the first and second alignment films **110** and **120** may be subjected to a rubbing treatment or an ion beam irradiation, whereby a pretilt can be conferred to the liquid crystal molecules **262**.


[0090] The polyvinyl compound **pv** is obtained by polymerizing a vinyl-type monomer. The vinyl-type monomer is represented by general formula (1).



[0091] In general formula (1), P1 and P2 are, independently, acrylate, methacrylate, acrylamide or methacrylamide; A1 and A2 represent, independently, 1,4-phenylene, 1,4-cyclohexane or 2,5-thiophene, or naphthalene-2,6-diyl or anthracene-2,7-diyl; at least one of A1 and A2 is substituted by at least one fluorine group; and Z1 is a -COO-group, a -OCO- group, a -O- group, a -CONH- group or a single bond, where n is 0 or 1.

[0092] The vinyl-type monomer is represented by structural formula (1a), for example.

[Formula 12]

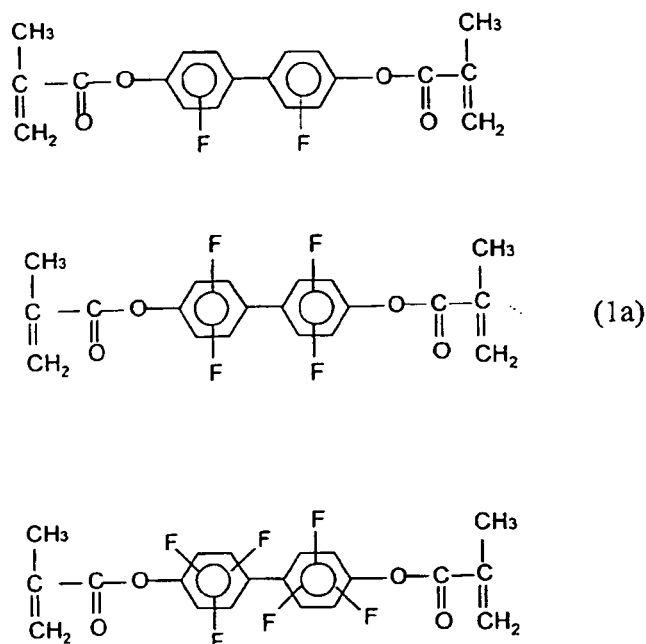

[0093] The vinyl-type monomer represented by structural formula (1a) is biphenyldimethacrylate. The main chain of the vinyl-type monomer may have two ring structures, and each of the two ring structures may be substituted by a fluorine group. Alternatively, one ring structure may have one, two, or three fluorine groups. Moreover, it is preferable that the vinyl-type monomer is a bifunctional monomer having a symmetric structure.

[0094] Note that both of the second polyimide **p2** and the polyvinyl compound **pv** are present in the interior and on the surface of the second alignment layer **114** of the first alignment film **110**. However, on the first alignment layer **112**, the first polyimide **p1** is present, but not the polyvinyl compound **pv**. Similarly, both of the second polyimide **p2** and the polyvinyl compound **pv** are present in the interior and on the surface of the second alignment layer **124** of the second alignment film **120**. However, on the first alignment layer **122**, the first polyimide **p1** is present, but not the polyvinyl compound **pv**.

[0095] Thus, since the polyvinyl compound **pv** is present on the surface of the first and second alignment films **110** and **120** as well as the neighborhood thereof, the first and second alignment films **110** and **120** are structurally stabilized; changes in the alignment function are suppressed; and the pretilt angle of the liquid crystal molecules **262** in the liquid crystal layer **260** is maintained. When the vinyl-type monomer is a monofunctional monomer, the resultant polymerization product, i.e., a long linear polymer, is liable to deformation, and therefore changes in the alignment function cannot be sufficiently suppressed. On the other hand, when the vinyl-type monomer is a polyfunctional monomer, its polymerization product can sufficiently suppress changes in the alignment function. Note that the alignment films **110** and **120** contain not only the polyvinyl compound **pv** but also the polyimides **p1** and **p2**, and thus the thermal resistance, solvent resistance, hygroscopicity, and other characteristics of the alignment films **110** and **120** are not substantially deteriorated as compared to those of a generic alignment film which is made only of polyimide.

[0096] The concentration of the polyvinyl compound **pv** is much higher at the surface of the first and second alignment films **110** and **120** than in the interior of the first and second alignment films **110** and **120**. The concentration of the polyvinyl compound **pv** is measured by, for example, time of flight-secondary ion mass spectrometry (TOF-SIMS) or X-ray photoelectron spectroscopy (XPS). In the case of XPS, for example, an apparatus manufactured by ULVAC-PHI, INCORPORATED may be used to analyze the atoms in the depth direction while etching with C60.

[0097] As mentioned earlier, since the vinyl-type monomer has a fluorine group, due to surface tension of the fluorine group, the polyvinyl compound **pv** is present on the surface of the second alignment layers **114** and **124** as well as the neighborhood thereof. Thus, since the polyvinyl compound **pv** is present on the surface of the first and second alignment films **110** and **120** as well as the neighborhood thereof, changes in the pretilt angle of the liquid crystal molecules **262** can be efficiently suppressed.

[0098] In the case where the side chain of the second polyimide and its precursor includes a fluorine group, the amount of polyvinyl compound that is formed on the surface of the first and second alignment films as well as the neighborhood thereof would be considerably reduced if the vinyl-type monomer did not have a fluorine group, due to low surface

tension. However, since the vinyl-type monomer has a fluorine group, the polyvinyl compound **pv** is formed at the surface of the first and second alignment films **110** and **120** even if the side chain of the second polyimide and its precursor includes a fluorine group. Note that, while the side chain of the second polyimide may have a fluorine group, preferably the fluorine group in the side chain of the second polyimide is as little as possible, from the standpoint of suppressing changes in the pretilt angle.

[0099] As another technique of suppressing image sticking caused by changes in the pretilt angle, Polymer Sustained Alignment Technology (hereinafter referred to as "PSA technique") is known. In the PSA technique, the pretilt direction of the liquid crystal molecules is controlled by a polymerization product that is generated by irradiating the polymerizable compound with an active energy ray (e.g., ultraviolet light) while applying a voltage across a liquid crystal layer in which a small amount of polymerizable compound (e.g., a photopolymerizable monomer) is mixed.

[0100] Now, differences between an alignment sustaining layer which is formed by a generic PSA technique and the polyvinyl compound **pv** in the alignment films **110** and **120** of the liquid crystal display device **200** of the present embodiment will be described.

[0101] In the PSA technique, the alignment sustaining layer exists on the alignment film, and when the liquid crystal panel is disassembled to analyze the surface of the active matrix substrate or the counter substrate by TOF-SIMS or XPS, ions or atoms derived from the polymerizable component will be detected at the outermost surface of the substrate. On the other hand, in the display device **200** of the present embodiment, the polyvinyl compound **pv** is contained in the alignment films **110** and **120**, and when the liquid crystal panel is disassembled to similarly analyze the surface of the active matrix substrate **220** or the counter substrate **240**, not only ions or atoms derived from the polyvinyl compound **pv** but also ions or atoms derived from the second polyimide **p2** of the second alignment layers **114** and **124** will be detected, indicative that the second polyimide **p2** and the polyvinyl compound **pv** are present at the surface of the active matrix substrate **220**, and also that the second polyimide **p2** and the polyvinyl compound **pv** are present at the surface of the counter substrate **240**.

[0102] Moreover, in the PSA technique, polymerization product is formed through light irradiation after producing a liquid crystal panel having an alignment film, whereas in the liquid crystal display device **200** of the present embodiment, the polyvinyl compound **pv** is contained in the first and second alignment films **110** and **120**, and the polyvinyl compound **pv** is formed before the active matrix substrate **220** and the counter substrate **240** are attached together. Therefore, even if the active matrix substrate **220** and the counter substrate **240** is to be attached together in a different place from the place where the active matrix substrate **220** and the counter substrate **240** were produced, there is no need to effect formation of the polyvinyl compound at the place where they are attached together, thus facilitating the production of the liquid crystal display device **200**.

[0103] Moreover, in the PSA technique, the voltage holding ratio will be lowered if any unreacted monomer remains in the liquid crystal layer. Therefore, in the PSA technique, ultraviolet irradiation must be performed for a long time in order to reduce the remaining monomer. On the other hand, in the liquid crystal display device **200** of the present embodiment, a polymerization product for suppressing changes in the pretilt angle is formed in the alignment films, thus suppressing lowering of the voltage holding ratio and making it possible to omit irradiation ultraviolet over a long time.

[0104] In the liquid crystal display device **200** of the present embodiment, as described above, the alignment films **110** and **120** contain the polyvinyl compound **pv**, which fixes the pretilt direction of the liquid crystal molecules **262**. This is presumably because the polyvinyl compound **pv** suppresses deformation of the pretilt-angle-exhibiting component, whereby the alignment direction of the liquid crystal molecules **262** introduced by the second polyimide **p2** is maintained in a direction which is essentially vertical to the principal faces of the alignment films **110** and **120**. Moreover, the polyvinyl compound **pv** stabilizes the impurities and the like which have occurred due to damage during the alignment treatment, thus suppressing generation of impurity ions and occurrence of image sticking.

[0105] In the liquid crystal display device **200** of the present embodiment, the vinyl-type monomer represented by general formula (1) above is introduced in the alignment film material, and film formation is conducted with a usual method, as a result of which the polyvinyl compound **pv** occurring through polymerization of the vinyl-type monomer exists on the liquid crystal layer **260** side of the first and second alignment films **110** and **120**. Therefore, the pretilt angle of the liquid crystal molecules **262** can be stabilized, and it is possible to maintain a high voltage holding ratio and a low residual DC voltage, thereby preventing image sticking. Since there is no need to perform photopolymerization after introducing the liquid crystal material unlike in the PSA technique, production with simple steps is possible, and the problem of a lowered voltage holding ratio due to any monomer remaining in the liquid crystal material is prevented.

[0106] For reference sake, a result of taking an X-ray photoelectron spectroscopy (X-ray Photoelectron Spectroscopy: XPS) measurement of an alignment film formed by using an alignment film material in which the first polyimide and the second polyimide having a fluorine group in its side chain were mixed, without adding any vinyl monomer thereto, is shown in FIG. 3. Since the fluorine group is present near the surface within the alignment film, it is understood that the second polyimide is present at the alignment film surface, more so than is the first polyimide.

[0107] From the standpoint of suppressing residual DC voltage, it is preferable that the alignment films **110** and **120** have a high resistance. The reason is that, if the alignment films **110** and **120** have a high resistance, the voltage applied

to the alignment films **110** and **120** increases relative to the voltage between the pixel electrodes **224** and the counter electrode **244**, whereby the voltage applied across the liquid crystal layer **260** decreases, and the concentration of impurities accumulated at the interfaces between the liquid crystal layer **260** and alignment films **110** and **120** decreases. In the alignment films **110** and **120**, it is particularly preferable that the first alignment layers **112** and **122**, which mainly contribute to suppression of residual DC voltage in particular, have a high resistance.


























[0108] Hereinafter, with reference to FIG. **4**, a production method for the liquid crystal display device **200** will be described.

[0109] First, as shown in FIG. **4(a)**, the pixel electrodes **224** are formed on the first insulative substrate **222**. Although not shown in FIG. **4(a)**, TFTs and wiring lines and the like that are connected thereto are provided between the first insulative substrate **222** and the pixel electrodes **224**. Next, the first alignment film **110** covering the pixel electrodes **224** is formed.

[0110] Formation of the first alignment film **110** is performed as follows. First, an alignment film material is prepared. The alignment film material is obtained (as a mixture) by allowing the precursor of the first polyimide **p1** and at least one of the second polyimide **p2** and the precursor thereof, and the vinyl-type monomer to be dissolved in a solvent.




[0111] For example, the precursor of the first polyimide **p1** is represented by general formula (2).

[Formula 13]

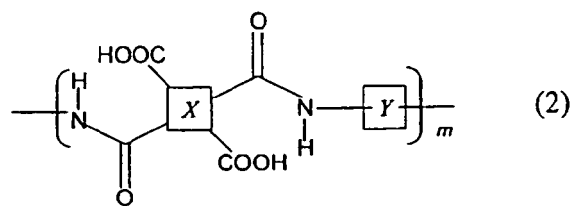























[0112] More specifically, the precursor of the first polyimide **p1** is represented by structural formula (2a).

[Formula 14]

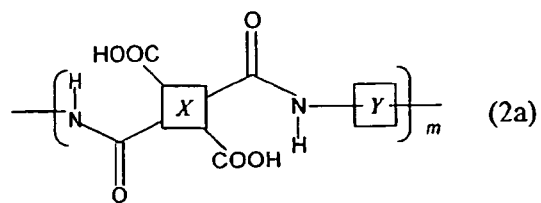



[0113] For example, the second polyimide **p2** is represented by general formula (3').

[Formula 15]

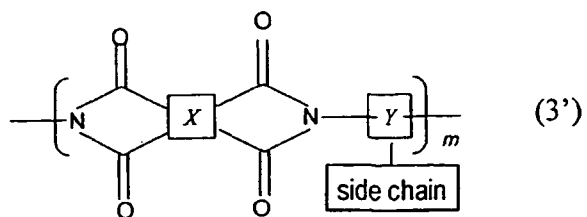


[0114] The precursor (polyamic acid) of the second polyimide **p2** is represented by general formula (3).

[Formula 16]

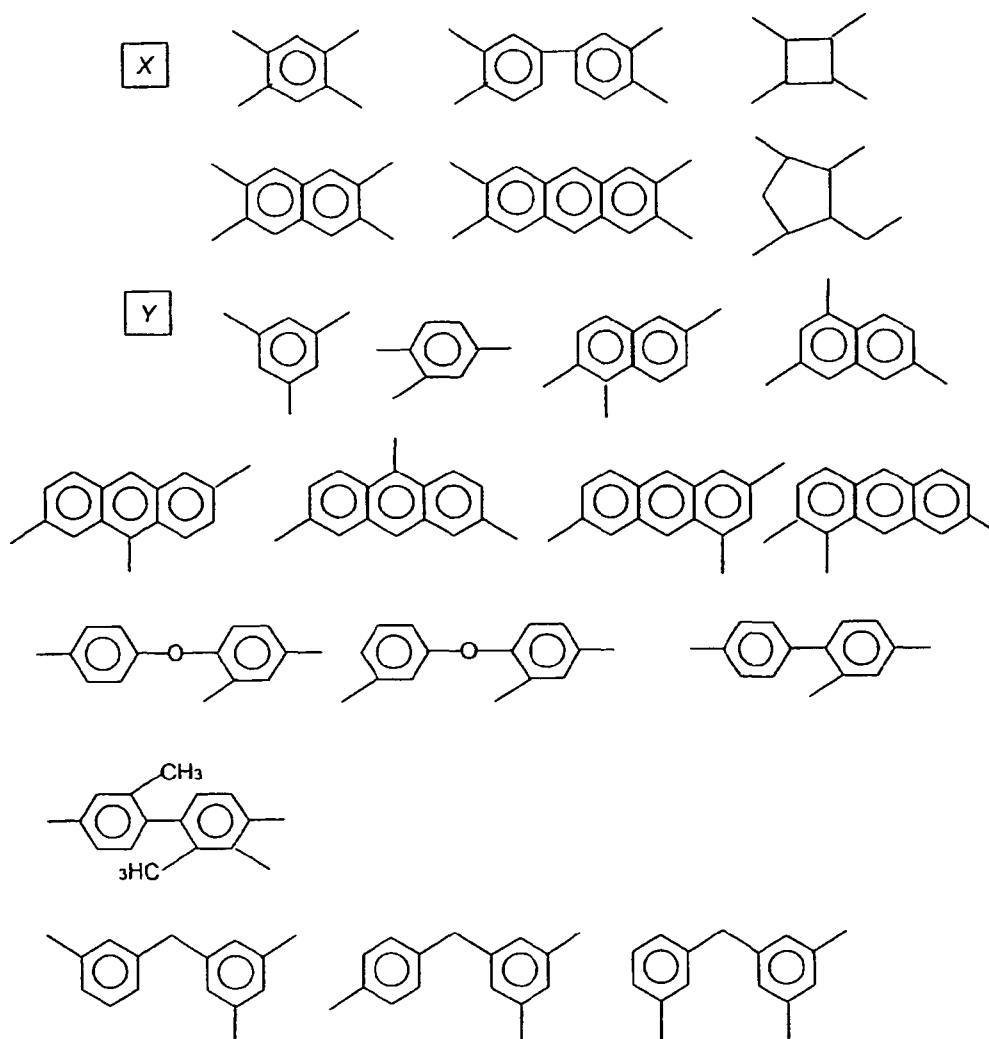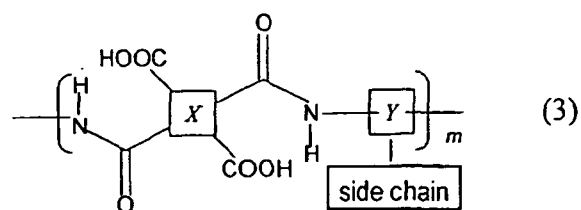

[0115] The side chain of the second polyimide **p2** and/or the precursor thereof is represented by general formula (4).

[Formula 17]



[0116] A represents pyrimidine-2,5-diyl, pyridine-2,5-diyl, 2,5-thiophenylene, 2,5-furanylene, 1,4-or 2,6-naphthylene,

or phenylene, optionally substituted by a group selected from fluorine, chlorine, and cyano, or by a C₁₋₁₈ cyclic, linear, or branched alkyl residue (which is optionally substituted by one cyano group or one or more halogen atoms, where one or more non-adjacent -CH₂- groups of the alkyl are optionally replaced by a group Q).

[0117] B is a linear or branched alkyl residue which is unsubstituted, mono-substituted by cyano or halogen, or poly-substituted by halogen, having 3 to 18 carbon atoms (where one or more non-adjacent CH₂ groups may independently be replaced by a group Q).

[0118] C¹ and C² each independently of the other represent an aromatic or alicyclic group (which is unsubstituted or substituted by fluorine, chlorine, cyano, or by a cyclic, linear, or branched alkyl residue (which is unsubstituted, mono-substituted by cyano or halogen, or poly-substituted by halogen, having 1 to 18 carbon atoms and where one or more non-adjacent CH₂ groups may independently be replaced by a group Q)). D represents an oxygen atom or -NR¹- (where R¹ represents a hydrogen atom or lower alkyl).

[0119] S¹ and S² each independently of the other represent a single covalent bond or a spacer unit. S³ represents a spacer unit.






[0120] Q represents a group selected from -O-, -CO-, -COO-, -O-CO-, -Si(CH₃)₂-O-Si(CH₃)₂-, -NR¹-, -NR¹-CO-, -CO-NR¹-, -NR¹-CO-O-, -O-CO-NR¹-, -NR¹-CO-NR¹-, -CH=CH-, -C≡C-, and -O-CO-O- (where R¹ represents a hydrogen atom or lower alkyl). E and F each independently of the other represent hydrogen, fluorine, chlorine, cyano, alkyl optionally substituted by fluorine having carbon atoms 1 to 12 (where optionally one or more non-adjacent CH₂ groups are replaced by -O-, -CO-O-, -O-CO- and/or -CH=CH-).

[0121] Herein, it is preferable that A includes an aromatic compound; B includes fluorocarbon; D includes at least one or more hydrocarbon groups; and E and F include hydrogen atoms.

[0122] Note that the side chain of the second polyimide **p2** may contain a fluorine atom. When the side chain of the second polyimide **p2** contains a fluorine atom, the aforementioned image sticking is suppressed to a certain extent






[0123] Moreover, the second polyimide **p2** may have a cinnamate group as a photoreactive functional group. In this case, a dimerization site is formed in the side chain through light irradiation. Specifically, the second polyimide **p2** is represented by formula (3a').

[Formula 18]

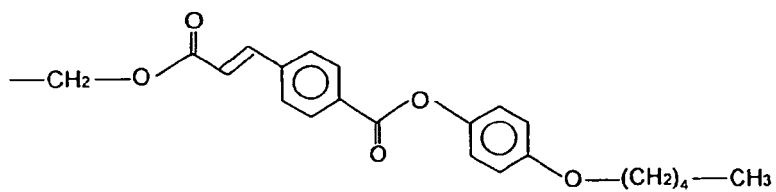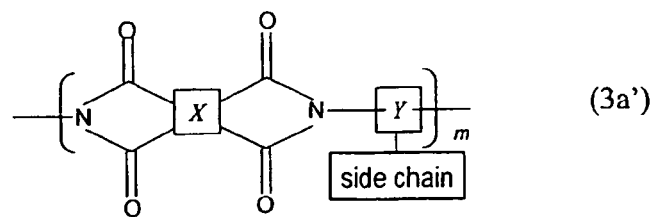

[0124] The precursor thereof is represented by formula (3a).

[Formula 19]


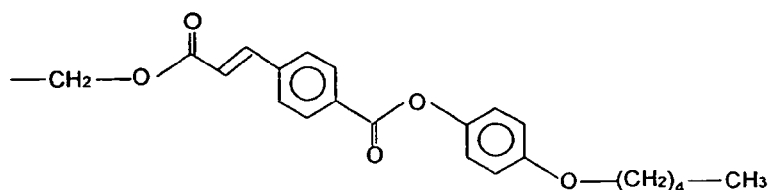



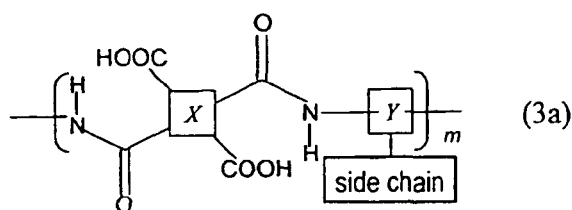


[0125] Note that the ratio between the precursor of the first polyimide **p1** and the second polyimide **p2** and the precursor thereof is, in ratio by weight, on the order of 50%:50% to 80%:20%. Note that the vinyl-type monomer does not form a covalent bond with the precursor of the first polyimide **p1** or the second polyimide **p2** or the precursor thereof.

[0126] Thus, the alignment film material contains the precursor (polyamic acid) of the first polyimide **p1** and the second polyimide **p2** and the precursor thereof (polyamic acid). Herein, the second polyimide **p2** and the precursor thereof have a photoreactive functional group as represented by structural formulae (3a') and (3a), whereas the precursor of the first polyimide **p1** does not have any photoreactive functional groups, as represented by structural formula (2a).







[0127] Alternatively, the second polyimide **p2** may have a vertical alignment group in its side chain. For example, the precursor of the second polyimide **p2** may be represented by structural formula (3b').

[Formula 20]

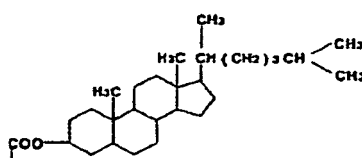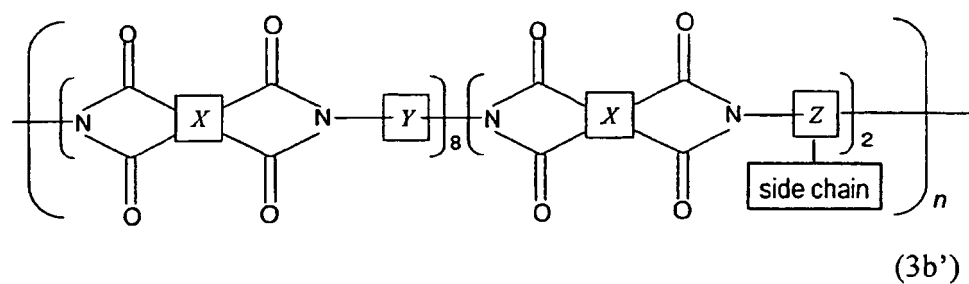

[0128] The precursor of the second polyimide **p2** may be represented by structural formula (3b).

[Formula 21]

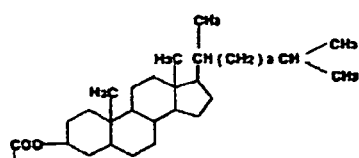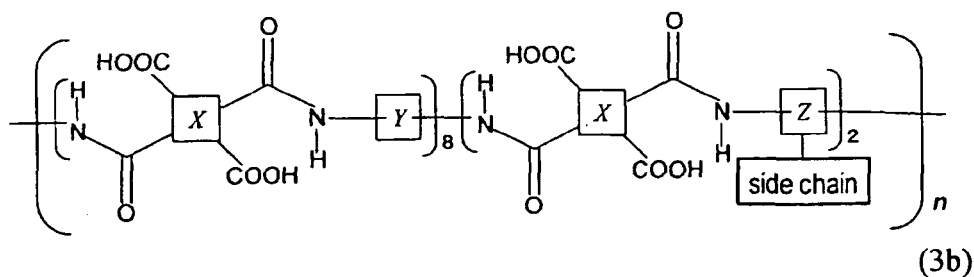


[0129] In the alignment film material, the fraction of imide units of the second polyimide **p2** is e.g. approximately 50%, but the first polyimide **p1** is not imidized but remains as the precursor in the alignment film material, with a fraction of imide units of 0%.

[0130] Note that, if an alignment film is formed by applying an alignment film material onto an electrode by a printing technique, ink jet technique, or spin coating technique without mixing a vinyl-type monomer thereto, a first alignment layer whose main component is the first polyimide will be formed above, and a second alignment layer whose main component is the second polyimide will be formed below (i.e., the liquid crystal layer side).

[0131] In the present embodiment, as described above, the alignment film material contains a vinyl-type monomer. The vinyl-type monomer may have two or more directly-bonded ring structures or one or more condensed ring structures, for example. For example, a methacrylate-type monomer, an acrylate-type monomer, a methacrylamide-type monomer, or an acrylamide-type monomer is used as the vinyl-type monomer.

[0132] The vinyl-type monomer is represented by general formula (1) $P1-A1-(Z1-A2)_n-P2$ (in general formula (1), **P1** and **P2** are, independently, acrylate, methacrylate, acrylamide or methacrylamide; **A1** and **A2** represent, independently, 1,4-phenylene, 1,4-cyclohexane or 2,5-thiophene, or naphthalene-2,6-diyl or anthracene-2,7-diyl; at least one of **A1** and **A2** is substituted by at least one fluorine group; and **Z1** is a -COO- group, a -OCO- group, a -O- group, a -CONH- group or a single bond, where *n* is 0 or 1). For example, the vinyl-type monomer is represented by structural formula (1a).

[Formula 22]

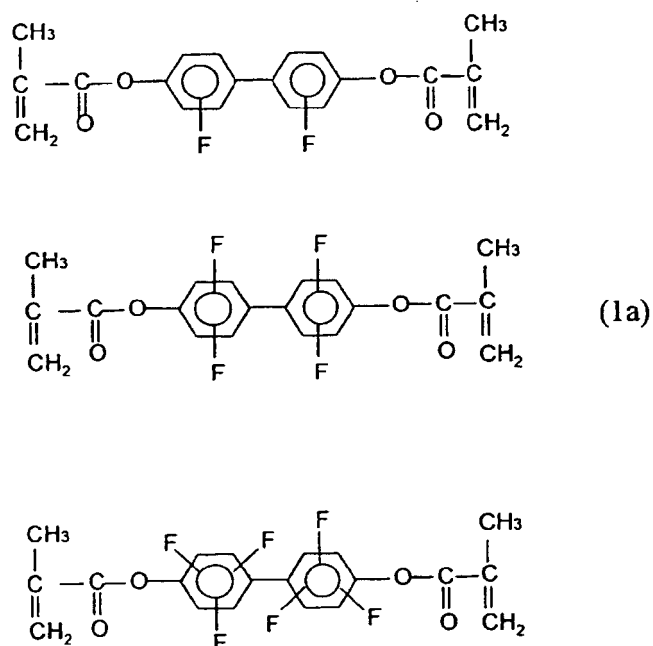

[0133] Herein, the monomer has a symmetrically-bound fluorine group(s) in the two benzene rings.

[0134] Moreover, the solvent contains γ -butyrolactone and N-methylpyrrolidone (NMP), for example. The concentration of the vinyl-type monomer on the basis of the alignment film material is no less than 2wt% and no more than 20wt%, for example.

[0135] Next, the alignment film material is applied on the pixel electrodes **224**, and a heat treatment is conducted to form the first alignment film **110**. As the heat treatment, for example, two heat treatments may be performed at different temperatures. Specifically, after performing a first heat treatment, a second heat treatment is performed at a higher temperature than that of the first heat treatment. The first heat treatment removes most of the solvent. In the following description, what remains after the solvent has been substantially removed will be referred to as an alignment film. Moreover, through the subsequent second heat treatment, imidization and polymerization progress, whereby the alignment film is stabilized. The first heat treatment is also referred to as a pre-bake, and the second heat treatment a full bake. Through the heat treatment, the polyamic acid is imidized, whereby the first and second polyimides **p1** and **p2** are formed.

[0136] Also through the heat treatment, the vinyl-type monomer is polymerized to form the polyvinyl compound **pv**. Thus, the first alignment film **110** is formed. The polyvinyl compound **pv**, which contains a fluorine group, is present on the surface of the first alignment film **110** as well as the neighborhood thereof. The polyvinyl compound **pv** does not form a covalent bond with the first polyimide **p1** or the second polyimide **p2**.

[0137] The heat treatment increases the fraction of imide units of the first and second polyimides **p1** and **p2**. For example, the fraction of imide units of the second polyimide **p2** is approximately 70% to 80%, and the fraction of imide units of the first polyimide **p1** is approximately 40% to 50%. Thus, even after the heat treatment, the fraction of imide units of the second polyimide **p2** is higher than the fraction of imide units of the first polyimide **p1**.

[0138] Next, the first alignment film **110** is subjected to an alignment treatment. The alignment treatment may be performed after the first heat treatment, or after the second heat treatment. For example, the alignment treatment is performed by irradiating the first alignment film **110** with light. For example, light of wavelengths in the range of no less than 250 nm and no more than 400 nm is radiated onto the first alignment film **110** at an irradiation dose of no less than 20 mJ/cm² and no more than 200 mJ/cm², from a direction which is inclined from the normal direction of the principal face of the first alignment film **110**. If the irradiation dose increases from 200 mJ/cm², the alignment film may deteriorate so that the voltage holding ratio and the like may be lowered. Moreover, the irradiation angle of light may be in the range of no less than 5° and no more than 85°, and preferably no less than 40° and no more than 60°, from the normal direction of the principal face of the first alignment film **110**. Note that, when the irradiation angle is small, it becomes difficult to confer a pretilt angle; when the irradiation angle is too large, it takes more time to confer the same pretilt. Moreover, light may be unpolarized light, linearly polarized light, elliptically polarized light, or circularly polarized light. However, linearly polarized light is to be used in the case where a cinnamate group is used as the photoreactive functional group.

Alternatively, a rubbing treatment or an ion beam irradiation may be performed for the first alignment film **110** as the alignment treatment.

[0139] As shown in FIG. 4(b), the counter electrode **244** is formed on the second insulative substrate **242**. Moreover, an alignment film material is provided. This alignment film material may be similar to that of the first alignment film **110**.

[0140] Next, the alignment film material is applied on the counter electrode **244**, and a heat treatment is conducted to form the second alignment film **120**. As the heat treatment, for example, two heat treatments may be performed at different temperatures. Through the heat treatment, the first and second polyimides **p1** and **p2** due to solvent evaporation and imidization, and the vinyl-type monomer is polymerized to form the polyvinyl compound **pv**. Next, the second alignment film **120** formed in this manner is subjected to an alignment treatment. The alignment treatment is performed in a similar manner to the first alignment film **110**.

[0141] Next, as shown in FIG. 4(c), the active matrix substrate **220** and the counter substrate **240** are attached together so that the first alignment film **110** and the second alignment film **120** oppose each other. In the present specification, before formation of the liquid crystal layer, the active matrix substrate and the counter substrate attached together will be referred to as a "vacant panel".

[0142] Next, a liquid crystal material is provided, and the liquid crystal material is introduced between the first alignment film **110** and the second alignment film **120** of the vacant panel, thus forming the liquid crystal layer **260**. As described above, the first and second alignment films **110** and **120** have been subjected to an alignment treatment, and thus the liquid crystal molecules **262** are aligned so as to be inclined from the normal directions of the principal faces of the first and second alignment films **110** and **120** even in the absence of an applied voltage. Moreover, the polyvinyl compound **pv** maintains the alignment of the liquid crystal molecules **262**, whereby image sticking is suppressed. The liquid crystal panel **300** is produced in this manner. Thereafter, the driving circuit **350** and the control circuit **360** shown in FIG. 2(a) are mounted on the liquid crystal panel **300**, whereby the liquid crystal display device **200** is produced.

[0143] In the aforementioned PSA technique, polymerization product is formed under an applied voltage. In the case where ultraviolet for polymer formation purposes is radiated while thus applying a voltage, a complex fabrication apparatus is required in which a device for applying a voltage across the liquid crystal panel and a device for radiating ultraviolet light are integrated. Moreover, since ultraviolet light irradiation is performed after a voltage is applied across the liquid crystal panel for a long time for obtaining a predetermined alignment, this fabrication apparatus needs to be used for a long time. Moreover, when forming the liquid crystal layer of a liquid crystal panel through dropwise application of a liquid crystal material, generally speaking, a plurality of liquid crystal panels are simultaneously produced by using a large-sized mother glass substrate, and thereafter each liquid crystal panel is cut out from the large-sized mother glass substrate. In this case of simultaneously producing a plurality of liquid crystal panels, a design must be adopted such that special wiring lines are formed on the mother glass substrate for allowing a voltage to be simultaneously applied to the plurality of liquid crystal panels.

[0144] Moreover, in the case where a liquid crystal panel of a particularly large size is to be produced, it is difficult to uniformly apply a voltage across the liquid crystal layer in the respective pixels. If ultraviolet light irradiation is performed with non-uniform voltages being applied, there will be fluctuations in the pretilt angle.

[0145] Moreover, in the case of applying a voltage during polymer formation, ribs, slits, or rivets need to be provided on the pixel electrode and the counter electrode for improved viewing angle characteristics. This will result in an increased number of steps and a decrease in the effective aperture ratio.

[0146] On the other hand, according to the present embodiment, no voltage is applied when forming the polyvinyl compound **pv**. Therefore, the liquid crystal display device **200** can be easily produced without using a complex fabrication apparatus. Moreover, a liquid crystal panel can be easily produced even when producing the liquid crystal layer **260** through dropwise application of a liquid crystal material. Moreover, since it is not necessary to apply a voltage across the liquid crystal layer **260** of all pixels when forming the polyvinyl compound **pv**, changes in the pretilt angle among liquid crystal molecules **262** can be suppressed. Furthermore, the viewing angle can be improved without providing ribs, slits, or rivets on the pixel electrodes **224** and the counter electrode **244**, thus reducing an increase in the number of steps.

[0147] Note that slits, ribs, and/or rivets may be provided on the pixel electrodes **224** and the counter electrode **244**. Alternatively, slits, ribs, and/or rivets may not be provided on the pixel electrodes **224** and the counter electrode **244**, and the liquid crystal molecules **262** may be aligned in accordance with an oblique electric field which is created by a highly-symmetrical pixel electrode **226** and the counter electrode **246**. As a result, the alignment regulating force of the liquid crystal molecules **262** under an applied voltage can be further increased.

[0148] Although the above description illustrates that the first and second alignment films **110** and **120** are made of the same alignment film material, the present invention is not limited thereto. The first and second alignment films **110** and **120** may be made of different alignment film materials. For example, at least one of the first and second polyimides **p1** and **p2** and the polyvinyl compound **pv** of the first alignment film **110** may differ from at least one of the first and second polyimides **p1** and **p2** and the polyvinyl compound **pv** of the second alignment film **120**.

[0149] Although the above description illustrates that the first and second alignment films **110** and **120** each contain the polyvinyl compound **pv**, the present invention is not limited thereto. Only one of the first and second alignment films

110 and **120** may contain the corresponding polyvinyl compound **pv**.

[0150] Although the above description illustrates that the active matrix substrate **220** and the counter substrate **240** respectively include the first and second alignment films **110** and **120**, the present invention is not limited thereto. Only one of the active matrix substrate **220** and the counter substrate **240** may include the corresponding first or second alignment film **110** or **120**.

[0151] Although the above description illustrates that polyvinyl compound **pv** is formed through a heat treatment, the present invention is not limited thereto. The polyvinyl compound **pv** may be formed through light irradiation. For example, in such light irradiation, a light source which mainly emits ultraviolet light (i-line) with a wavelength of 365 nm is suitably used. The irradiation time is about 500 seconds, for example, and the irradiation intensity of light is about 20 mW/cm². In the case where polymerization is effected through light irradiation, the polyfunctional monomer will sufficiently polymerize even if the irradiation intensity of light is 10 mW/cm² or less. The wavelength of light is preferably in the range of no less than 250 nm and no more than 400 nm, and more preferably in the range of no less than 300 nm and no more than 400 nm. However, polymerization will sufficiently occur with light of a wavelength greater than 400 nm. Although polymerization can occur with light of a wavelength of 300 nm or less, the irradiation dose should preferably be as small as possible because decomposition of organic matter will occur with irradiation of deep-ultraviolet with wavelengths near 200 nm.

[0152] Moreover, the liquid crystal display device **200** may be of the 4D-RTN (4 Domain-Reverse Twisted Nematic) mode. Hereinafter, a liquid crystal display device of the 4D-RTN mode will be described with reference to FIG. 5.

[0153] FIG. 5(a) shows pretilt directions **PA1** and **PA2** of liquid crystal molecules defined on the alignment film **110** of the active matrix substrate **220**, and FIG. 5(b) shows pretilt directions **PB1** and **PB2** of liquid crystal molecules defined on the alignment film **120** of the counter substrate **240**. FIG. 5(c) shows alignment directions of liquid crystal molecules in the centers of liquid crystal domains **A** to **D** under an applied voltage, and regions (domain lines) **DL1** to **DL4** appearing dark due to alignment disorder. Note that the domain lines **DL1** to **DL4** are not so-called disclination lines.

[0154] FIG. 5(a) to FIG. 5(c) schematically show alignment directions of liquid crystal molecules as seen from the viewer side. FIG. 5(a) to FIG. 5(c) indicate that the end portions (essentially circular portions) of the cylindrical liquid crystal molecules are tilted toward the viewer.

[0155] As shown in FIG. 5(a), the first alignment film **110** includes a first alignment region **OR1** and a second alignment region **OR2**. The liquid crystal molecules regulated by the first alignment region **OR1** are tilted in the -y direction from the normal direction of the principal face of the first alignment film **110**, whereas the liquid crystal molecules regulated by the second alignment region **OR2** of the first alignment film **110** are tilted in the +y direction from the normal direction of the principal face of the first alignment film **110**. Moreover, the boundary between the first alignment region **OR1** and the second alignment region **OR2** extends in the column direction (y direction), and located in the substantial center along the row direction (x direction) of pixels. Thus, first and second alignment regions **OR1** and **OR2** of different pretilt azimuths are provided on the first alignment film **110**.

[0156] Moreover, as shown in FIG. 5(b), the second alignment film **120** includes a third alignment region **OR3** and a fourth alignment region **OR4**. The liquid crystal molecules regulated by the third alignment region **OR3** are tilted in the +x direction from the normal direction of the principal face of the second alignment film **120**, such that the -x direction end portions of these liquid crystal molecules are pointed toward the front face. The liquid crystal molecules regulated by the fourth alignment region **OR4** of the second alignment film **120** are tilted in the -x direction from the normal direction of the principal face of the second alignment film **120**, such that the +x direction end portions of these liquid crystal molecules are pointed toward the front face. Thus, the second alignment film **120** includes third and fourth alignment regions **OR3** and **OR4** with different pretilt azimuths.

[0157] An alignment treatment direction corresponds to an azimuth angle component obtained by projecting a direction, which extends toward an alignment region along the major axes of the liquid crystal molecules, onto that alignment region. The alignment treatment directions of the first, second, third, and fourth alignment regions are also referred to as first, second, third, and fourth alignment treatment directions.

[0158] The first alignment region **OR1** of the first alignment film **110** has been subjected to an alignment treatment along a first alignment treatment direction **PD1**, whereas the second alignment region **OR2** has been subjected to an alignment treatment along a second alignment treatment direction **PD2** which is different from the first alignment treatment direction **PD1**. The first alignment treatment direction **PD1** is essentially antiparallel to the second alignment treatment direction **PD2**. Moreover, the third alignment region **OR3** of the second alignment film **120** has been subjected to an alignment treatment along a third alignment treatment direction **PD3**, whereas the fourth alignment region **OR4** has been subjected to an alignment treatment along a fourth alignment treatment direction **PD4** which is different from the third alignment treatment direction **PD3**. The third alignment treatment direction **PD3** is essentially antiparallel to the fourth alignment treatment direction **PD4**.

[0159] As shown in FIG. 5(c), four liquid crystal domains **A**, **B**, **C**, and **D** are formed in the liquid crystal layer of a pixel. In the liquid crystal layer **260**, a portion interposed between the first alignment region **OR1** of the first alignment film **110** and the third alignment region **OR3** of the second alignment film **120** defines the liquid crystal domain **A**; a portion

interposed between the first alignment region **OR1** of the first alignment film **110** and the fourth alignment region **OR4** of the second alignment film **120** defines a liquid crystal domain **B**; a portion interposed between the second alignment region **OR2** of the first alignment film **110** and the fourth alignment region **OR4** of the second alignment film **120** defines a liquid crystal domain **C**; and a portion interposed between the second alignment region **OR2** of the first alignment film **110** and the third alignment region **OR3** of the second alignment film **120** defines a liquid crystal domain **D**. Note that the angle constituted by the first or second alignment treatment direction **PD1** or **PD2** and the third or fourth alignment treatment direction **PD3** or **PD4** is essentially 90°, and the twist angle in each of the liquid crystal domains **A**, **B**, **C**, and **D** is essentially 90°.

[0160] The alignment direction of a liquid crystal molecule at the center of a liquid crystal domain **A** to **D** is an intermediate direction between the pretilt direction for liquid crystal molecules introduced by the first alignment film **110** and the pretilt direction for liquid crystal molecules introduced by the second alignment film **120**. In the present specification, the alignment direction of a liquid crystal molecule in the center of a liquid crystal domain is referred to as a reference alignment direction; and within the reference alignment direction, an azimuth angle component in a direction from the rear face toward the front face and along the major axis of the liquid crystal molecule (i.e., an azimuth angle component obtained by projecting the reference alignment direction onto the principal face of the first alignment film **110** or the second alignment film **120**) is referred to as a reference alignment azimuth. The reference alignment azimuth characterizes its corresponding liquid crystal domain, and exerts a predominant influence on the viewing angle characteristics of that liquid crystal domain. Now, by relying on the horizontal direction (right-left direction) of the display screen (plane of the figure) as a reference for the azimuthal direction, and defining the left turn as positive (i.e., if the display surface is compared to the face of a clock, counterclockwise is positive, the 3 o'clock direction being an azimuth angle of 0°), the reference alignment directions of the four liquid crystal domains **A** to **D** are set to be four directions such that the difference between any two directions is substantially equal to an integer multiple of 90°. Specifically, the reference alignment azimuths of the liquid crystal domains **A**, **B**, **C**, and **D** are, respectively, 225°, 315°, 45°, and 135°.

[0161] As shown in FIG. 5(c), the domain lines **DL1** to **DL4** are respectively formed in the liquid crystal domains **A**, **B**, **C**, and **D**. The domain line **DL1** is formed in parallel to a portion of an edge **EG1** of the pixel electrode **224**, whereas the domain line **DL2** is formed in parallel to a portion of an edge **EG2**. Moreover, the domain line **DL3** is formed in parallel to a portion of an edge **EG3** of the pixel electrode **224**, whereas the domain line **DL4** is formed in parallel to a portion of an edge **EG4**. Moreover, a disclination line **CL** indicated by a broken line is observed in a border region where each of the liquid crystal domains **A** to **D** adjoins another liquid crystal domain. The disclination lines **CL** are dark lines in the aforementioned central portion. The disclination lines **CL** and the domain lines **DL1** to **DL4** are continuous, thus resulting

in dark lines of a reverse  shape. Although the dark lines herein are in a reverse  shape, the dark lines may be in an 8 shape.

[0162] Although the above-described liquid crystal display device is of the 4D-RTN mode, the present invention is not limited thereto. The liquid crystal display device may be of the CPA mode.

[0163] Although the above description illustrates that each alignment film includes two alignment layers, the present invention is not limited thereto. Each alignment film may include three or more alignment layers.

[0164] Hereinafter, alignment films and liquid crystal display devices of the present Example will be described.

[Example 1]

(Example 1-1)

[0165] Hereinafter, with reference to FIG. 2 and FIG. 6, an alignment film and a liquid crystal display device of Example 1-1 will be described. The liquid crystal display device of Example 1-1 also operates in the RTN mode.

[0166] First, on a principal face of the first insulative substrate **222**, although not shown in the figures, TFTs and wiring lines connected to the TFTs, and an insulating layer and the like were formed, upon which the pixel electrodes **224** were formed. Similarly, on a principal face of the second insulative substrate **242**, although not shown in the figures, a colored layer having color filters, and an insulating layer and the like were formed, upon which the counter electrode **244** was formed.

[0167] Next, a vertical-alignment type alignment film material was provided. This alignment film material was an alignment film material intended for use in a photo-alignment film. The alignment film material was formed by, after allowing a precursor of the first polyimide **p1** and the second polyimide **p2** and a precursor thereof to be dissolved in a solvent, further adding a vinyl-type monomer thereto. The precursor of the first polyimide **p1** was a polyamic acid as represented by structural formula (2a), and the second polyimide **p2** was a photo-alignable polyimide as represented by structural formula (3a'). The fraction of imide units of the second polyimide was approximately 50%. As the vinyl-type monomer, a biphenyldimethacrylate monomer as represented by structural formula (1a) was added, to a concentration of 10wt% on the basis of the alignment film material. Herein, three kinds of alignment film materials were provided which had 2,

4, or 6 fluorine groups per monomer. For comparison, an alignment film material which had zero fluorine groups per monomer was also provided.

[0168] Next, the alignment film material was applied on the pixel electrodes **224** by a printing technique, ink jet technique, or spin coating technique, and the solvent was removed to a certain extent through one minute of heating at 90°C as a first heat treatment (pre-bake), further followed by 40 minutes of heating at 200°C as a second heat treatment (full bake). Through such heat treatments, the polyamic acid was imidized, whereby the first alignment layer **112** containing the first polyimide **p1** and the second alignment layer **114** containing the second polyimide **p2** were formed. In this manner, the first alignment film **110** was formed on the pixel electrodes **224**.

[0169] Thereafter, obliquely from a 40° direction with respect to the normal direction of a principal face of the first alignment film **110**, P-polarized light with a peak wavelength of 330 nm was radiated at 50 mJ/cm², thus performing a photo-alignment treatment. Similarly, the aforementioned alignment film material was applied to form the second alignment film **120** on the counter electrode **244**, and a photo-alignment treatment was performed. Upon analyzing the first and second alignment films **110** and **120**, the dimethacrylate represented by structural formula (1a) had been polymerized, and the polyvinyl compound **pv** existed also on the alignment film surface.

[0170] Next, the active matrix substrate **220** and the counter substrate **240** were attached together so that the first alignment film **110** and the second alignment film **120** opposed each other and that the angle between the alignment treatment direction of the first alignment film and the alignment treatment direction of the second alignment film was 90°, and fixed so that the interspace between the active matrix substrate **220** and the counter substrate **240** was about 4 μm.

[0171] Next, a nematic liquid crystal material having negative dielectric anisotropy was provided, which was introduced between the active matrix substrate **220** and the counter substrate **240**. The liquid crystal material had a dielectric anisotropy $\Delta\epsilon$ of -3, and a birefringence Δn of 0.085.

[0172] FIG. 6(a) shows an alignment state of the liquid crystal molecules **262** in the liquid crystal display device of Example 1-1. As shown in FIG. 6(b), the active matrix substrate **220** and the counter substrate **240** were attached together so that the angle between the alignment treatment direction **PD1** of the first alignment film **110** and the alignment treatment direction **PD3** of the second alignment film **120** was 90°, and the liquid crystal molecules **262** had a twist angle of 90°. Herein, the polarization axis of the polarizer on the active matrix substrate **220** was parallel to the alignment treatment direction of the first alignment film **110**, and the polarization axis of the polarizer on the counter substrate **240** was parallel to the alignment treatment direction of the second alignment film **120**. In this manner, a liquid crystal panel was produced. Table 1 shows a relationship between the number of fluorine groups per monomer and the pretilt angle.

[0173]

[Table 1]

number of fluorine groups	0	2	4	6
pretilt angle (°)	87.7	87.2	87.0	86.9

[0174] As will be understood from Table 1, the pretilt angle decreases as the number of fluorine groups increases.

[0175] Next, the resultant liquid crystal panel was subjected to a power-on test of continuously applying a voltage of ± 10 V for 50 hours at room temperature, and thereafter an amount of change in the tilt angle was measured. Table 2 shows results thereof.

[0176]

[Table 2]

number of fluorine groups	0	2	4	6
pretilt angle (°)	87.7	87.2	87.0	86.9
amount of change in the tilt angle (°)	0.12	0.05	0.04	0.04

[0177] As will be understood from Table 2, the amount of change in the tilt angle is reduced when the monomer has any fluorine groups. This is presumably because the density of the vinyl-type monomer or the polyvinyl compound **pv** present on the surface of the first and second alignment films **110** and **120** was increased due to the fluorine group(s), so that the change in the tilt angle of the liquid crystal molecules **262** was reduced due to interaction between the polyvinyl compound **pv** and the liquid crystal molecules **262**. There is a tendency that image sticking becomes outstanding when the amount of change in the tilt angle exceeds 0.10°. A voltage holding ratio measured after finishing the power-on test was 99.5% or more, indicative that powering had been sufficiently conducted.

[0178] With the liquid crystal display device of Example 1-1, a high aperture ratio was realized without providing ribs

or slits as in the case of the MVA mode. Moreover, since voltage application was not performed at the time of polymerization, it was possible to produce the liquid crystal display device of Example 1-1 without employing a complex fabrication apparatus.

(Example 1-2)

[0179] Hereinafter, with reference to FIG. 2 and FIG. 6, an alignment film and a liquid crystal display device of Example 1-2 will be described. The liquid crystal display device of Example 1-2 also operates in the RTN mode.

[0180] First, on a principal face of the first insulative substrate **222**, although not shown in the figures, TFTs and wiring lines connected to the TFTs, and an insulating layer and the like were formed, upon which the pixel electrodes **224** were formed. Similarly, on a principal face of the second insulative substrate **242**, although not shown in the figures, a colored layer having color filters, and an insulating layer and the like were formed, upon which the counter electrode **244** was formed.

[0181] Next, a vertical-alignment type alignment film material was provided. This alignment film material was an alignment film material intended for use in a photo-alignment film. The alignment film material was formed by, after allowing a precursor of the first polyimide **p1** and the second polyimide **p2** and a precursor thereof to be dissolved in a solvent, adding a vinyl-type monomer thereto. The precursor of the first polyimide **p1** was a polyamic acid as represented by structural formula (2a), and the second polyimide **p2** was a photo-alignable polyimide as represented by structural formula (3a'). The fraction of imide units of the second polyimide **p2** was approximately 50%. As the vinyl-type monomer, a dimethacrylate monomer as represented by formula (1a) was added, to a concentration of 10wt% on the basis of the alignment film material. Herein, three kinds of alignment film materials were provided which had 2, 4, or 6 fluorine groups per monomer. For comparison, an alignment film material which had zero fluorine groups per monomer was also provided.

[0182] Next, the alignment film material was applied on the pixel electrodes **224** by a printing technique, ink jet technique, or spin coating technique, and the solvent was removed to a certain extent through one minute of heating at 90°C as a first heat treatment (pre-bake). Thereafter, obliquely from a 40° direction with respect to the normal direction of a principal face of the first alignment film **110**, P-polarized light with a peak wavelength of 330 nm was radiated at 50 mJ/cm², thus performing a photo-alignment treatment. Thereafter, 40 minutes of heating at 150°C was performed as a second heat treatment (full bake). Through such heat treatments, the polyamic acid was imidized, and the first alignment layer **112** containing the first polyimide **p1** and the second alignment layer **114** containing the second polyimide **p2** were formed. In this manner, the first alignment film **110** was formed on the pixel electrodes **224**.

[0183] Similarly, the aforementioned alignment film material was applied to form the second alignment film **120** on the counter electrode **244**, and a photo-alignment treatment was performed. Upon analyzing the first and second alignment films **110** and **120**, the dimethacrylate represented by formula (1a) had been polymerized, and the polyvinyl compound **pv** existed also on the alignment film surface.

[0184] Next, the active matrix substrate **220** and the counter substrate **240** were attached together so that the first alignment film **110** and the second alignment film **120** opposed each other and that the angle between the alignment treatment direction of the first alignment film and the alignment treatment direction of the second alignment film was 90°, and fixed so that the interspace between the active matrix substrate **220** and the counter substrate **240** was about 4 μm.

[0185] Next, a nematic liquid crystal material having negative dielectric anisotropy was provided, which was introduced between the active matrix substrate **220** and the counter substrate **240**. The liquid crystal material had a dielectric anisotropy $\Delta\epsilon$ of -3, and a birefringence Δn of 0.085. In this manner, a liquid crystal panel was produced. Table 3 shows a relationship between the number of fluorine groups per monomer and the pretilt angle.

[0186]

[Table 3]

number of fluorine groups	0	2	4	6
pretilt angle (°)	87.5	87.0	87.0	86.9

[0187] As will be understood from Table 3, the pretilt angle is large when the number of fluorine groups per monomer is zero, whereas the pretilt angle becomes lower when the monomer has any fluorine groups. Incidentally, when the full bake after the photo-alignment treatment was performed at 200°C, the pretilt angle was 89.9° or more under all conditions.

[0188] Next, the resultant liquid crystal panel was subjected to a power-on test of continuously applying a voltage of ± 10 V for 50 hours at room temperature, and thereafter an amount of change in the tilt angle was measured. Table 4 shows results thereof.

[0189]

[Table 4]

number of fluorine groups	0	2	4	6
pretilt angle (°)	87.5	87.0	87.0	86.9
amount of change in the tilt angle (°)	0.10	0.04	0.04	0.04

[0190] The above results indicates that, as in Example 1-1, when the monomer had any fluorine groups, the density of the monomer and polyvinyl compound present on the surface of the first and second alignment films **110** and **120** was increased, whereby the change in the tilt angle was suppressed. A voltage holding ratio measured after finishing the power-on test was 99.5% or more, indicative that powering had been sufficiently conducted.

(Example 1-3)

[0191] Hereinafter, with reference to FIG. 2 and FIG. 6, an alignment film and a liquid crystal display device of Example 1-3 will be described. The liquid crystal display device of Example 1-3 also operates in the RTN mode.

[0192] First, on a principal face of the first insulative substrate **222**, although not shown in the figures, TFTs and wiring lines connected to the TFTs, and an insulating layer and the like were formed, upon which the pixel electrodes **224** were formed. Similarly, on a principal face of the second insulative substrate **242**, although not shown in the figures, a colored layer having color filters, and an insulating layer and the like were formed, upon which the counter electrode **244** was formed.

[0193] Next, a vertical-alignment type alignment film material was provided. This alignment film material was an alignment film material intended for use in a photo-alignment film. The alignment film material was formed by, after allowing a precursor of the first polyimide **p1** and the second polyimide **p2** and a precursor thereof to be dissolved in a solvent, adding a vinyl-type monomer thereto. The precursor of the first polyimide **p1** was a polyamic acid as represented by structural formula (2a), and the second polyimide **p2** was a photo-alignable polyimide as represented by structural formula (3a'). The fraction of imide units of the second polyimide **p2** was approximately 50%. As the vinyl-type monomer, a dimethacrylate monomer as represented by formula (1a) was added. Herein, a dimethacrylate monomer having four fluorine groups per monomer was used. The concentration thereof was 5, 10, 15, 20, or 30wt% on the basis of the alignment film material. For comparison, an alignment film material in which the concentration of the dimethacrylate monomer was zero (i.e., to which no dimethacrylate monomer had been added) was also provided.

[0194] Next, the alignment film material was applied on the pixel electrodes **224** by a printing technique, ink jet technique, or spin coating technique, and the solvent was removed to a certain extent through one minute of heating at 90°C as a first heat treatment (pre-bake), further followed by 40 minutes of heating at 200°C as a second heat treatment (full bake). Through such heat treatments, the polyamic acid was imidized, whereby the first alignment layer **112** containing the first polyimide **p1** and the second alignment layer **114** containing the second polyimide **p2** were formed. In this manner, the first alignment film **110** was formed on the pixel electrodes **224**.

[0195] Thereafter, obliquely from a 40° direction with respect to the normal direction of a principal face of the first alignment film **110**, P-polarized light with a peak wavelength of 330 nm was radiated at 50 mJ/cm², thus performing a photo-alignment treatment. Similarly, the aforementioned alignment film material was applied to form the second alignment film **120** on the counter electrode **244**, and a photo-alignment treatment was performed. Upon analyzing the first and second alignment films **110** and **120**, the dimethacrylate represented by formula (1a) had been polymerized, and the polyvinyl compound **pv** existed also on the alignment film surface.

[0196] Next, the active matrix substrate **220** and the counter substrate **240** were attached together so that the first alignment film **110** and the second alignment film **120** opposed each other and that the angle between the alignment treatment direction of the first alignment film and the alignment treatment direction of the second alignment film was 90°, and fixed so that the interspace between the active matrix substrate **220** and the counter substrate **240** was about 4 μm.

[0197] Next, a nematic liquid crystal material having negative dielectric anisotropy was provided, which was introduced between the active matrix substrate **220** and the counter substrate **240**. The liquid crystal material had a dielectric anisotropy $\Delta\epsilon$ of -3, and a birefringence Δn of 0.085. In this manner, a liquid crystal panel was produced. Table 5 shows a relationship between the vinyl-type monomer concentration and the pretilt angle.

[0198]

[Table 5]

vinyl-type monomer concentration (wt%)	0	5	10	15	20	30
pretilt angle (°)	88.5	87.1	87.0	87.1	87.0	87.0

[0199] As will be understood from Table 5, the pretilt angle is large when the vinyl-type monomer concentration is zero, whereas the pretilt angle becomes lower when any vinyl-type monomer is introduced.

[0200] Next, the resultant liquid crystal panel was subjected to a power-on test of continuously applying a voltage of ± 10 V for 50 hours at room temperature, and thereafter an amount of change in the tilt angle was measured. Table 6 shows results thereof.

[0201]

[Table 6]

monomer concentration (wt%)	0	5	10	15	20	30
pretilt angle (°)	88.5	87.1	87.0	87.1	87.0	87.0
amount of change in the tilt angle (°)	0.17	0.06	0.04	0.04	0.04	0.04

[0202] As will be understood from Table 6, the change in the tilt angle can be kept sufficiently small when the concentration of the monomer on the basis of the alignment film material is 5wt% or more. However, when the monomer concentration was 30wt% or more, the alignment film appeared slightly whitish due to the polyvinyl compound. This is presumably because of an excessively high concentration of the polymerizable component.

[0203] Even when the monomer concentration on the basis of the alignment film material was 30wt%, an effect of stabilizing the pretilt angle was obtained, but the substrate was significantly whitish; at any higher concentration, decreases in contrast due to scatter were observed. A voltage holding ratio measured after finishing the power-on test was 99.5% or more, indicative that powering had been sufficiently conducted.


(Example 1-4)

[0204] Hereinafter, with reference to FIG. 2 and FIG. 6, an alignment film and a liquid crystal display device of Example 1-4 will be described. The liquid crystal display device of Example 1-4 also operates in the RTN mode.

[0205] First, on a principal face of the first insulative substrate **222**, although not shown in the figures, TFTs and wiring lines connected to the TFTs, and an insulating layer and the like were formed, upon which the pixel electrodes **224** were formed. Similarly, on a principal face of the second insulative substrate **242**, although not shown in the figures, a colored layer having color filters, and an insulating layer and the like were formed, upon which the counter electrode **244** was formed.

[0206] Next, a vertical-alignment type alignment film material was provided. This alignment film material was an alignment film material intended for use in a photo-alignment film. The alignment film material was formed by, after allowing a precursor of the first polyimide **p1** and a precursor of the second polyimide **p2** to be dissolved in a solvent, adding a vinyl-type monomer thereto. The precursor of the first polyimide **p1** was a polyamic acid as represented by structural formula (2a), and the precursor of the second polyimide **p2** was a polyamic acid as represented by structural formula (3c).

[Formula 23]

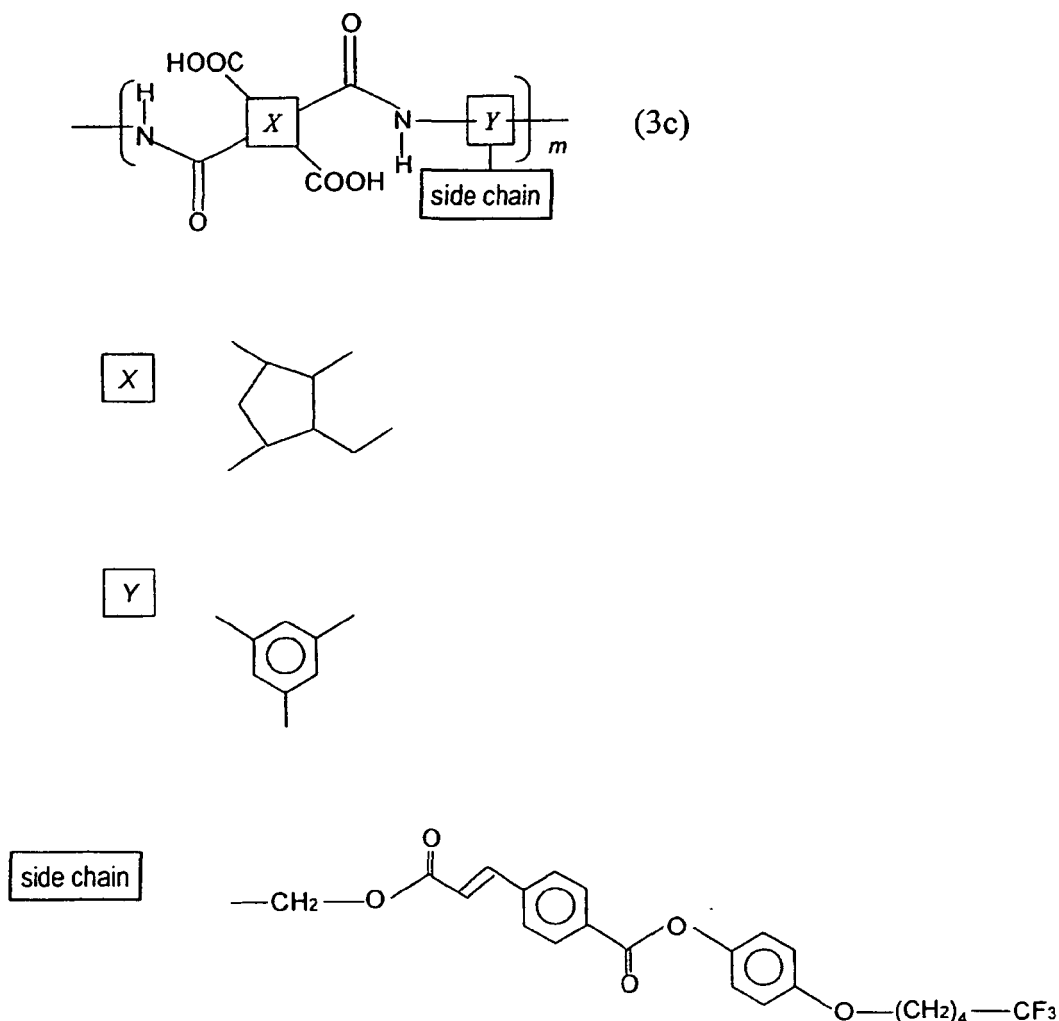

[0207] Herein, the fraction of imide units of the second polyimide was 0%, as was the fraction of imide units of the first polyimide. As the vinyl-type monomer, a dimethacrylate monomer as represented by formula (1a) was added, to a concentration of 10wt% on the basis of the alignment film material. Herein, an alignment film material having four fluorine groups per monomer was provided. For comparison, an alignment film material having zero fluorine groups per monomer was also provided.

[0208] Next, the alignment film material was applied on the pixel electrodes **224** by a printing technique, ink jet technique, or spin coating technique, and the solvent was removed to a certain extent through one minute of heating at 90°C as a first heat treatment (pre-bake), further followed by 40 minutes of heating at 200°C as a second heat treatment (full bake). Through such heat treatment, the polyamic acid was imidized to form the first and second polyimides **p1** and **p2**, and the vinyl-type monomer was polymerized to form the polyvinyl compound **pv**. In this manner, the first alignment film **110** was formed on the pixel electrodes **224**.

[0209] Thereafter, obliquely from a 40° direction with respect to the normal direction of a principal face of the first alignment film **110**, P-polarized light with a peak wavelength of 330 nm was radiated at 50 mJ/cm² thus performing a photo-alignment treatment. Similarly, the aforementioned alignment film material was applied to form the second alignment film **120** on the counter electrode **244**, and a photo-alignment treatment was performed.

[0210] Next, the active matrix substrate **220** and the counter substrate **240** were attached together so that the first alignment film **110** and the second alignment film **120** opposed each other and that the angle between the alignment treatment direction of the first alignment film and the alignment treatment direction of the second alignment film was 90°, and fixed so that the interspace between the active matrix substrate **220** and the counter substrate **240** was about 4 μm.

[0211] Next, a nematic liquid crystal material having negative dielectric anisotropy was provided, which was introduced

between the active matrix substrate **220** and the counter substrate **240**. The liquid crystal material had a dielectric anisotropy $\Delta\epsilon$ of -3, and a birefringence Δn of 0.085. In this manner, a liquid crystal panel was produced. Table 7 shows a relationship between the vinyl-type monomer concentration and the pretilt angle.

[0212]

[Table 7]

number of fluorine groups	0	4
pretilt angle (°)	87.9	87.3

[0213] Next, the resultant liquid crystal panel was subjected to a power-on test of continuously applying a voltage of ± 10 V for 50 hours at room temperature, and thereafter an amount of change in the tilt angle was measured. Table 8 shows results thereof.

[0214]

[Table 8]

number of fluorine groups	0	4
pretilt angle (°)	87.9	87.3
amount of change in the tilt angle (°)	0.14	0.09

[0215] As will be understood from Table 8, similarly to Example 1-1, when the monomer had any fluorine groups, the density of the monomer and polyvinyl compound **pv** present on the surface of the first and second alignment films **110** and **120** was increased, whereby the change in the tilt angle was suppressed. A voltage holding ratio measured after finishing the power-on test was 99.5% or more, indicative that powering had been sufficiently conducted.

(Reference Example)


[0216] Hereinafter, an alignment film and a liquid crystal display device of Reference Example will be described. The liquid crystal display device of Reference Example also operates in the RTN mode.

[0217] First, on a principal face of a first insulative substrate, TFTs and wiring lines connected to the TFTs, and an insulating layer and the like were formed, upon which pixel electrodes were formed. Similarly, on a principal face of a second insulative substrate, a colored layer having color filters, and an insulating layer and the like were formed, upon which a counter electrode was formed.

[0218] Next, a vertical-alignment type alignment film material was provided. This alignment film material was an alignment film material intended for use in a photo-alignment film. The alignment film material was formed by, after allowing a precursor of the first polyimide and the second polyimide and a precursor thereof to be dissolved in a solvent, adding a vinyl-type monomer thereto. The precursor of the first polyimide was a polyamic acid as represented by structural formula (2a), and the second polyimide was a photo-alignable polyimide as represented by structural formula (3a'). The fraction of imide units of the second polyimide was approximately 50%.

[0219] Herein, a diacrylate monomer as represented by structural formula (1r) was added as the vinyl-type monomer.

[Formula 24]

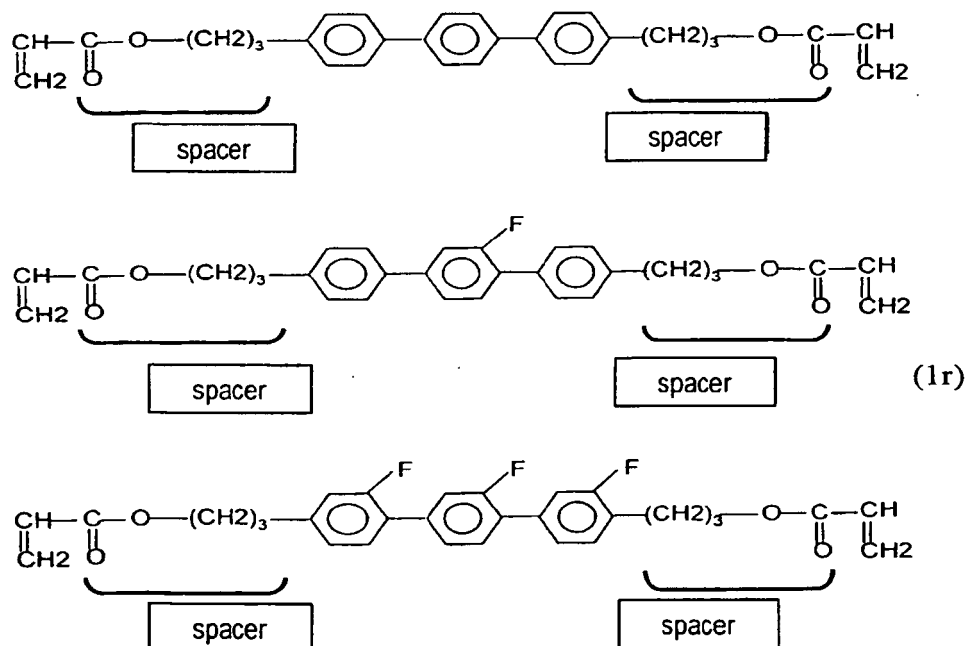

[0220] As will be understood from structural formula (1r), a spacer is added to this diacrylate monomer, which makes the monomer longer than the monomer represented by structural formula (1a).

[0221] The concentration of the diacrylate monomer was 10wt% on the basis of the alignment film material. Herein, three kinds of alignment film materials were provided which had 0, 1, or 3 fluorine groups per monomer.

[0222] Next, after applying the alignment film material on the pixel electrodes by a printing technique, ink jet technique, or spin coating technique, the solvent was removed to a certain extent through one minute of heating at 90°C as a first heat treatment (pre-bake), further followed by 40 minutes of heating at 200°C as a second heat treatment. As a result, a first alignment film was formed on the pixel electrodes. No polyvinyl compound was formed on this first alignment film.

[0223] Next, obliquely from a 40° direction with respect to the normal direction of a principal face of the first alignment film, P-polarized light with a peak wavelength of 330 nm was radiated at 50 mJ/cm², thus performing a photo-alignment treatment. Through such light irradiation, the cinnamate group underwent a dimerization reaction, whereby a dimerization site was formed. Similarly, the aforementioned alignment film material was applied to form a second alignment film on the counter electrode, and a photo-alignment treatment was performed.

[0224] Next, the active matrix substrate and the counter substrate were attached together so that the first alignment film and the second alignment film opposed each other and that the angle between the alignment treatment direction of the first alignment film and the alignment treatment direction of the second alignment film was 90°, and fixed so that the interspace between the active matrix substrate and the counter substrate was about 4 μm.

[0225] Next, a nematic liquid crystal material having negative dielectric anisotropy was provided, which was introduced between the active matrix substrate and the counter substrate. The liquid crystal material had a dielectric anisotropy Δε of -3, and a birefringence Δn of 0.085. In this manner, a liquid crystal panel was produced. Table 9 shows a relationship between the number of fluorine groups per monomer and the pretilt angle.

[0226]

[Table 9]

number of fluorine groups	0	1	3
pretilt angle (°)	88.8	88.9	88.8

[0227] As will be understood from Table 9, regardless of the number of fluorine groups, the pretilt angle was substantially constant. This is presumably because the influence which the fluorine group(s) exerted on the liquid crystal alignment was reduced due to the connected CH₂ group.

[0228] Next, similarly to Examples 1-1 to 1-4, the resultant liquid crystal panel was subjected to a power-on test of

continuously applying a voltage of ± 10 V for 50 hours at room temperature, and thereafter an amount of change in the tilt angle was measured. Table 10 shows results thereof.

[0229]

[Table 10]

number of fluorine groups	0	1	3
pretilt angle (°)	88.8	88.9	88.8
amount of change in the tilt angle (°)	0.21	0.21	0.21

[0230] As will be understood from Table 10, when the monomer represented by structural formula (1r) was added, the amount of change in the tilt angle due to powering was large, irrespective of whether there were any fluorine groups. This is presumably because the spacer portion of the monomer represented by structural formula (1r) is longer than the monomer represented by structural formula (1a), and a plurality of CH₂ groups having a relatively high flexibility are connected in the monomer represented by the structural formula (1r). A voltage holding ratio measured after finishing the power-on test was 99.5% or more, indicative that powering had been sufficiently conducted.

[Example 2]

[0231] Hereinafter, with reference to FIG. 2 and FIG. 6, an alignment film and a liquid crystal display device of Example 2 will be described. The liquid crystal display device Example 2 also operates in the RTN mode.

[0232] First, on a principal face of the first insulative substrate **222**, although not shown in the figures, TFTs and wiring lines connected to the TFTs, and an insulating layer and the like were formed, upon which the pixel electrodes **224** were formed. Similarly, on a principal face of the second insulative substrate **242**, although not shown in the figures, a colored layer having color filters, and an insulating layer and the like were formed, upon which the counter electrode **244** was formed.

[0233] Next, a vertical-alignment type alignment film material was provided. The alignment film material was formed by, after allowing a precursor of the first polyimide **p1** and the second polyimide **p2** and a precursor thereof to be dissolved in a solvent, adding a vinyl-type monomer thereto. The precursor of the first polyimide **p1** was a polyamic acid as represented by structural formula (2a), and the second polyimide **p2** was a vertical-alignment type polyimide as represented by structural formula (3b'). The fraction of imide units of the second polyimide **p2** was approximately 50%. As the vinyl-type monomer, a dimethacrylate monomer as represented by formula (1a) was added, to a concentration of 10wt% on the basis of the alignment film material. Herein, three kinds of alignment film materials were provided which had 2, 4, or 6 fluorine groups per monomer. For comparison, an alignment film material which had zero fluorine groups per monomer was also provided.

[0234] Next, the alignment film material was applied on the pixel electrodes **224** by a printing technique, ink jet technique, or spin coating technique, and the solvent was removed to a certain extent through one minute of heating at 90°C as a first heat treatment (pre-bake), further followed by 40 minutes of heating at 200°C as a second heat treatment (full bake). Through such heat treatment, the polyamic acid was imidized to form the first and second polyimides **p1** and **p2**, and the vinyl-type monomer was polymerized to form the polyvinyl compound **p_v**. In this manner, the first alignment film **110** was formed on the pixel electrodes **224**.

[0235] Thereafter, the first alignment film **110** was subjected to a rubbing treatment. Similarly, the aforementioned alignment film material was applied to form the second alignment film **120** on the counter electrode **244**, which was subjected to a rubbing treatment.

[0236] Next, the active matrix substrate **220** and the counter substrate **240** were attached together so that the first alignment film **110** and the second alignment film **120** opposed each other and that the angle between the alignment treatment direction of the first alignment film and the alignment treatment direction of the second alignment film was 90°, and fixed so that the interspace between the active matrix substrate **220** and the counter substrate **240** was about 4 μm.

[0237] Next, a nematic liquid crystal material having negative dielectric anisotropy was provided, which was introduced between the active matrix substrate **220** and the counter substrate **240**. The liquid crystal material had a dielectric anisotropy Δε of -3, and a birefringence Δn of 0.085. In this manner, a liquid crystal panel was produced. Table 11 shows a relationship between the number of fluorine groups per vinyl-type monomer and the pretilt angle.

[0238]

[Table 11]

number of fluorine groups	0	2	4	6
pretilt angle (°)	88.4	88.3	88.0	88.0

[0239] As will be understood from Table 11, the pretilt angle is large when the number of fluorine groups is zero, whereas the pretilt angle becomes lower when the monomer has any fluorine groups.

[0240] Next, the resultant liquid crystal panel was subjected to a power-on test of continuously applying a voltage of ± 10 V for 50 hours at room temperature, and thereafter an amount of change in the tilt angle was measured. Table 12 shows results thereof.

[0241]

[Table 12]

number of fluorine groups	0	2	4	6
pretilt angle (°)	88.4	88.3	88.0	88.0
amount of change in the tilt angle (°)	0.11	0.03	0.02	0.02

[0242] As will be understood from Table 12, the amount of change in the tilt angle is reduced when the monomer has a fluorine group. This is presumably because the density of the vinyl-type monomer or the polyvinyl compound **pv** present on the surface of the first and second alignment films **110** and **120** was increased due to the fluorine group, so that the change in the tilt angle of the liquid crystal molecules **262** was reduced due to interaction between the polyvinyl compound **pv** and the liquid crystal molecules **262**. A voltage holding ratio measured after finishing the power-on test was 99.5% or more, indicative that powering had been sufficiently conducted.

[Example 3]

[0243] Hereinafter, with reference to FIG. 2 and FIG. 6, an alignment film and a liquid crystal display device of Example 3 will be described. The liquid crystal display device Example 3 also operates in the RTN mode.

[0244] First, on a principal face of the first insulative substrate **222**, although not shown in the figures, TFTs and wiring lines connected to the TFTs, and an insulating layer and the like were formed, upon which the pixel electrodes **224** were formed. Similarly, on a principal face of the second insulative substrate **242**, although not shown in the figures, a colored layer having color filters, and an insulating layer and the like were formed, upon which the counter electrode **244** was formed.

[0245] Next, a vertical-alignment type alignment film material was provided. The alignment film material was formed by, after allowing a precursor of the first polyimide **p1** and the second polyimide **p2** and a precursor thereof to be dissolved in a solvent, adding a vinyl-type monomer thereto. The precursor of the first polyimide **p1** was a polyamic acid as represented by structural formula (2a), and the second polyimide **p2** was a vertical-alignment type polyimide as represented by structural formula (3b'). The fraction of imide units of the second polyimide **p2** was approximately 50%. As the vinyl-type monomer, a dimethacrylate monomer as represented by formula (1a) was added, to a concentration of 10wt% on the basis of the alignment film material. Herein, three kinds of alignment film materials were provided which had 2, 4, or 6 fluorine groups per monomer. For comparison, an alignment film material which had zero fluorine groups per monomer was also provided.

[0246] Next, the alignment film material was applied on the pixel electrodes **224** by a printing technique, ink jet technique, or spin coating technique, and the solvent was removed to a certain extent through one minute of heating at 90°C as a first heat treatment (pre-bake), further followed by 40 minutes of heating at 200°C as a second heat treatment (full bake). Through such heat treatment, the polyamic acid was imidized to form the first and second polyimides **p1** and **p2**, and the vinyl-type monomer was polymerized to form the polyvinyl compound **pv**. In this manner, the first alignment film **110** was formed on the pixel electrodes **224**.

[0247] Thereafter, the first alignment film **110** was irradiated with an ion beam, thus conducting an alignment treatment. Similarly, the aforementioned alignment film material was applied to form the second alignment film **120** on the counter electrode **244**, and this was irradiated with an ion beam to conduct an alignment treatment.

[0248] Next, the active matrix substrate **220** and the counter substrate **240** were attached together so that the first alignment film **110** and the second alignment film **120** opposed each other and that the angle between the alignment treatment direction of the first alignment film and the alignment treatment direction of the second alignment film was 90°, and fixed so that the interspace between the active matrix substrate **220** and the counter substrate **240** was about 4 μm .

[0249] Next, a nematic liquid crystal material having negative dielectric anisotropy was provided, which was introduced between the active matrix substrate **220** and the counter substrate **240**. The liquid crystal material had a dielectric anisotropy $\Delta\epsilon$ of -3, and a birefringence Δn of 0.085. In this manner, a liquid crystal panel was produced. Table 13 shows a relationship between the number of fluorine groups per monomer and the pretilt angle.

[0250]

[Table 13]

number of fluorine groups	0	2	4	6
pretilt angle (°)	86.9	86.6	86.5	86.5

[0251] As will be understood from Table 13, the pretilt angle is lowered when the monomer has any fluorine groups. Presumably, the reason why the pretilt angle was smaller than in the case where a rubbing treatment was performed is that some of the vertical-alignment type polyimide had decomposed due to the ion beam irradiation.

[0252] Next, the resultant liquid crystal panel was subjected to a power-on test of continuously applying a voltage of ± 10 V for 50 hours at room temperature, and thereafter an amount of change in the tilt angle was measured. Table 14 shows results thereof.

[0253]

[Table 14]

number of fluorine groups	0	2	4	6
pretilt angle (°)	86.9	86.6	86.5	86.5
amount of change in the tilt angle (°)	0.16	0.06	0.04	0.04

[0254] As will be understood from Table 14, the amount of change in the tilt angle is reduced when the monomer has a fluorine group. This is presumably because the density of the vinyl-type monomer or the polyvinyl compound **pv** present on the surface of the first and second alignment films **110** and **120** was increased due to the fluorine group, so that the change in the tilt angle of the liquid crystal molecules **262** was reduced due to interaction between the polyvinyl compound **pv** and the liquid crystal molecules **262**. A voltage holding ratio measured after finishing the power-on test was 99.5% or more, indicative that powering had been sufficiently conducted.

[Example 4]

[0255] Hereinafter, with reference to FIG. 2 and FIG. 7, an alignment film and a liquid crystal display device of Example 4 will be described. The liquid crystal display device Example 4 also operates in the RTN mode.

[0256] First, on a principal face of the first insulative substrate **222**, although not shown in the figures, TFTs and wiring lines connected to the TFTs, and an insulating layer and the like were formed, upon which the pixel electrodes **224** were formed. Similarly, on a principal face of the second insulative substrate **242**, although not shown in the figures, a colored layer having color filters, and an insulating layer and the like were formed, upon which the counter electrode **244** was formed.

[0257] Next, a vertical-alignment type alignment film material was provided. This alignment film material was an alignment film material intended for use in a photo-alignment film. The alignment film material was formed by, after allowing a precursor of the first polyimide **p1** and the second polyimide **p2** and a precursor thereof to be dissolved in a solvent, adding a vinyl-type monomer thereto. The precursor of the first polyimide **p1** was a polyamic acid as represented by structural formula (2a), and the second polyimide **p2** was a photo-alignable polyimide as represented by structural formula (3a'). The fraction of imide units of the second polyimide **p2** was approximately 50%. As the vinyl-type monomer, a dimethacrylate monomer as represented by formula (1a) was added, to a concentration of 10wt% on the basis of the alignment film material. Herein, a dimethacrylate monomer having four fluorine groups per monomer was provided.

[0258] Next, the alignment film material was applied on the pixel electrodes **224** by a printing technique, ink jet technique, or spin coating technique, and the solvent was removed to a certain extent through one minute of heating at 90°C as a first heat treatment (pre-bake), further followed by 40 minutes of heating at 200°C as a second heat treatment (full bake). Through such heat treatments, the polyamic acid was imidized, and the first alignment layer **112** containing the first polyimide **p1** and the second alignment layer **114** containing the second polyimide **p2** were formed.

[0259] Thereafter, regions of the first alignment film **110** each corresponding to a half of a pixel were irradiated at 50 mJ/cm² with P-polarized light having a peak wavelength of 330 nm, at an azimuth angle of 0° and obliquely from a 40°

direction with respect to the normal direction of a principal face of the first alignment film **110**. When the light irradiation was performed, the cinnamate group underwent a dimerization reaction, whereby a dimerization site was formed. Next, regions each corresponding to the other half of a pixel of the first alignment film **110** were irradiated at 50 mJ/cm² with P-polarized light having a peak wavelength of 330 nm, at an azimuth angle of 180° and obliquely from a 40° direction with respect to the normal direction of the principal face of the first alignment film **110**. Thus, photo-alignment treatments were performed to form regions with different alignment treatment directions.

[0260] Similarly, the aforementioned alignment film material was applied on the counter electrode **244**, and the solvent was removed to a certain extent through one minute of heating at 90°C, further followed by 40 minutes of heating at 200°C. The first polyimide **p1** was formed, and dimethacrylate was polymerized to form the polyvinyl compound **pv**. In this manner, the second alignment film **120** was formed on the counter electrode **244**. Thereafter, each pixel of the second alignment film **120** was irradiated at 50 mJ/cm² with P-polarized light having a peak wavelength of 330 nm, obliquely from a 40° direction with respect to the normal direction of the principal face of the second alignment film **120**. Thus, a photo-alignment treatment was performed. Upon analyzing the first and second alignment films **110** and **120**, the dimethacrylate represented by formula (1a) had been polymerized, and the polyvinyl compound **pv** existed also on the alignment film surface.

[0261] Next, the active matrix substrate **220** and the counter substrate **240** were attached together so that the first alignment film **110** and the second alignment film **120** opposed each other and that the angles between the alignment treatment directions of the first alignment film and the alignment treatment direction of the second alignment film were 90°, and fixed so that the interspace between the active matrix substrate **220** and the counter substrate **240** was about 4 μm.

[0262] Next, a nematic liquid crystal material having negative dielectric anisotropy was provided, which was introduced between the active matrix substrate **220** and the counter substrate **240**. The liquid crystal material had a dielectric anisotropy Δε of -3, and a birefringence Δn of 0.085.

[0263] FIG. 7 shows the alignment treatment directions of the first and second alignment films **110** and **120** of Example 4. As described above, the active matrix substrate **220** and the counter substrate **240** were attached together so that the angles between the alignment treatment directions **PD1** and **PD2** of the first alignment film **110** and the alignment treatment direction **PD3** of the second alignment film **120** were 90°, and the liquid crystal molecules **262** had a twist angle of 90°. A voltage holding ratio measured after finishing the power-on test was 99.5% or more, indicative that powering had been sufficiently conducted.

[Example 5]

[0264] Hereinafter, with reference to FIG. 2 and FIG. 8, an alignment film and a liquid crystal display device of Example 5 will be described. The liquid crystal display device Example 5 also operates in the RTN mode.

[0265] First, on a principal face of the first insulative substrate **222**, although not shown in the figures, TFTs and wiring lines connected to the TFTs, and an insulating layer and the like were formed, upon which the pixel electrodes **224** were formed. Similarly, on a principal face of the second insulative substrate **242**, although not shown in the figures, a colored layer having color filters, and an insulating layer and the like were formed, upon which the counter electrode **244** was formed.

[0266] Next, a vertical-alignment type alignment film material was provided. This alignment film material was an alignment film material intended for use in a photo-alignment film. The alignment film material was formed by, after allowing a precursor of the first polyimide **p1** and the second polyimide **p2** and a precursor thereof to be dissolved in a solvent, adding a vinyl-type monomer thereto. The precursor of the first polyimide **p1** was a polyamic acid as represented by structural formula (2a), and the second polyimide **p2** was a photo-alignable polyimide as represented by structural formula (3a'). The fraction of imide units of the second polyimide **p2** was approximately 50%. As the vinyl-type monomer, a dimethacrylate monomer as represented by formula (1a) was added, to a concentration of 10wt% on the basis of the alignment film material. Herein, four kinds of alignment film materials were provided which had 0, 2, 4, or 6 fluorine groups per monomers.

[0267] Next, the alignment film material was applied on the pixel electrodes **224** by a printing technique, ink jet technique, or spin coating technique, and the solvent was removed to a certain extent through one minute of heating at 90°C as a first heat treatment (pre-bake), further followed by 40 minutes of heating at 200°C as a second heat treatment (full bake). Through such heat treatment, the polyamic acid was imidized, whereby the first alignment layer **112** containing the first polyimide **p1** and the second alignment layer **114** containing the second polyimide **p2** were formed. In this manner, the first alignment film **110** was formed on the pixel electrodes **224**.

[0268] Thereafter, regions of the first alignment film **110** each corresponding to a half of a pixel were irradiated at 50 mJ/cm² with P-polarized light having a peak wavelength of 330 nm, at an azimuth angle of 0° and obliquely from a 40° direction with respect to the normal direction of a principal face of the first alignment film **110**. When the light irradiation was performed, the cinnamate group underwent a dimerization reaction, whereby a dimerization site was formed. Next,

regions each corresponding to the other half of a pixel of the first alignment film **110** were irradiated at 50 mJ/cm² with P-polarized light having a peak wavelength of 330 nm, at an azimuth angle of 180° and obliquely from a 40° direction with respect to the normal direction of the principal face of the first alignment film **110**. Thus, photo-alignment treatments were performed to form regions with different alignment treatment directions.

[0269] As in the first alignment film **110**, the aforementioned alignment film material was applied on the counter electrode **244**, and the solvent was removed to a certain extent through one minute of heating at 90°C, further followed by 40 minutes of heating at 200°C. As a result, the polyamic acid was imidized, whereby the first alignment layer **122** containing the first polyimide **p1** and the second alignment layer **124** containing the second polyimide **p2** were formed. In this manner, the second alignment film **120** was formed on the counter electrode **244**.

[0270] Thereafter, regions of the second alignment film **120** each corresponding to a half of a pixel were irradiated at 50 mJ/cm² with P-polarized light having a peak wavelength of 330 nm, at an azimuth angle 90° and obliquely from a 40° direction with respect to the normal direction of a principal face of the second alignment film **120**. When the light irradiation was performed, the cinnamate group underwent a dimerization reaction, whereby a dimerization site was formed. Next, regions each corresponding to the other half of a pixel of the second alignment film **120** were irradiated at 50 mJ/cm² with P-polarized light having a peak wavelength of 330 nm, at an azimuth angle 270° and obliquely from a 40° direction with respect to the normal direction of the principal face of the second alignment film **120**. Thus, photo-alignment treatments were performed to form regions with different alignment treatment directions. Upon analyzing the first and second alignment films **110** and **120**, the dimethacrylate represented by formula (1a) had been polymerized, and the polyvinyl compound **pv** existed also on the alignment film surface.

[0271] Next, the active matrix substrate **220** and the counter substrate **240** were attached together so that the first alignment film **110** and the second alignment film **120** opposed each other and that the angles between the alignment treatment directions of the first alignment film and the alignment treatment directions of the second alignment film were 90°, and fixed so that the interspace between the active matrix substrate **220** and the counter substrate **240** was about 4 μm.

[0272] Next, a nematic liquid crystal material having negative dielectric anisotropy was provided, which was introduced between the active matrix substrate **220** and the counter substrate **240**. The liquid crystal material had a dielectric anisotropy Δε of -3, and a birefringence Δn of 0.085.

[0273] FIG. 8 shows the alignment treatment directions of the first and second alignment films **110** and **120** of Example 5. As described above, the active matrix substrate **220** and the counter substrate **240** were attached together so that the angles between the alignment treatment directions **PD1** and **PD2** of the first alignment film **110** and the alignment treatment directions **PD3** and **PD4** of the second alignment film **120** were 90°, and the liquid crystal molecules **262** had a twist angle of 90°. A voltage holding ratio measured after finishing the power-on test was 99.5% or more, indicative that powering had been sufficiently conducted.

INDUSTRIAL APPLICABILITY

[0274] An alignment film according to the present invention is able to suppress image sticking caused by changes in the pretilt angle. Moreover, a liquid crystal display device according to the present invention can be easily produced. For example, there is no need to perform polymerization after attaching an active matrix substrate and a counter substrate together, thus providing an increased degree of freedom in terms of production.

REFERENCE SIGNS LIST

[0275]

- 100 alignment film
- p1** first polyimide
- p2** second polyimide
- pv** polyvinyl compound
- 102** first alignment layer
- 104** second alignment layer
- 110** first alignment film
- 112** first alignment layer
- 114** second alignment layer
- 120** second alignment film
- 122** first alignment layer
- 124** second alignment layer
- 200** liquid crystal display device

220 active matrix substrate
 222 first insulative substrate
 224 pixel electrode
 240 counter substrate
 242 second insulative substrate
 244 counter electrode
 260 liquid crystal layer
 262 liquid crystal molecules
 300 liquid crystal panel

Claims

1. An alignment film material comprising:


a precursor of a first polyimide;
 at least one of a second polyimide and a precursor thereof, the second polyimide being different from the first polyimide; and
 a vinyl-type monomer having a vinyl group, wherein
 the vinyl-type monomer is represented by general formula (1) P1-A1-(Z1-A2)_n-P2 (in general formula (1), P1 and P2 are, independently, acrylate, methacrylate, acrylamide or methacrylamide; A1 and A2 represent, independently, 1,4-phenylene, 1,4-cyclohexane or 2,5-thiophene, or naphthalene-2,6-diyl or anthracene-2,7-diyl; at least one of A1 and A2 is substituted by at least one fluorine group; and Z1 is a -COO- group, a -OCO- group, a -O- group, a -CONH- group or a single bond, where n is 0 or 1).

2. The alignment film material of claim 1, wherein the vinyl-type monomer is a bifunctional monomer having a symmetric structure.

3. The alignment film material of claim 1 or 2, wherein the vinyl-type monomer is a dimethacrylate monomer.

4. The alignment film material of any of claims 1 to 3, wherein the vinyl-type monomer is represented by structural formula (1a).


























[Formula 1]

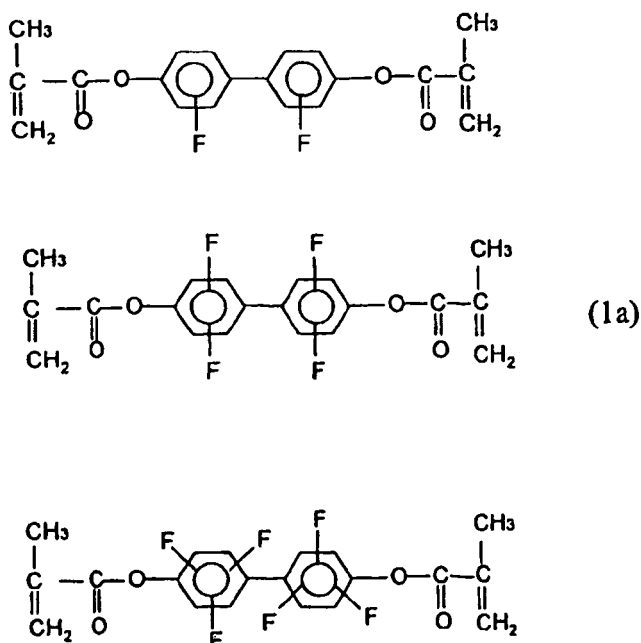

5. The alignment film material of any of claims 1 to 4, wherein the precursor of the first polyimide is represented by



general formula (2).

[Formula 2]

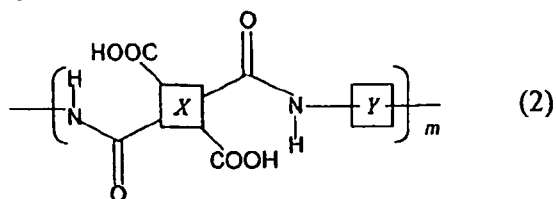























6. The alignment film material of any of claims 1 to 5, wherein a side chain of the precursor of the first polyimide does not have any vertical alignment groups.
7. The alignment film material of any of claims 1 to 6, wherein, the precursor of the second polyimide is represented by general formula (3); and

[Formula 3]

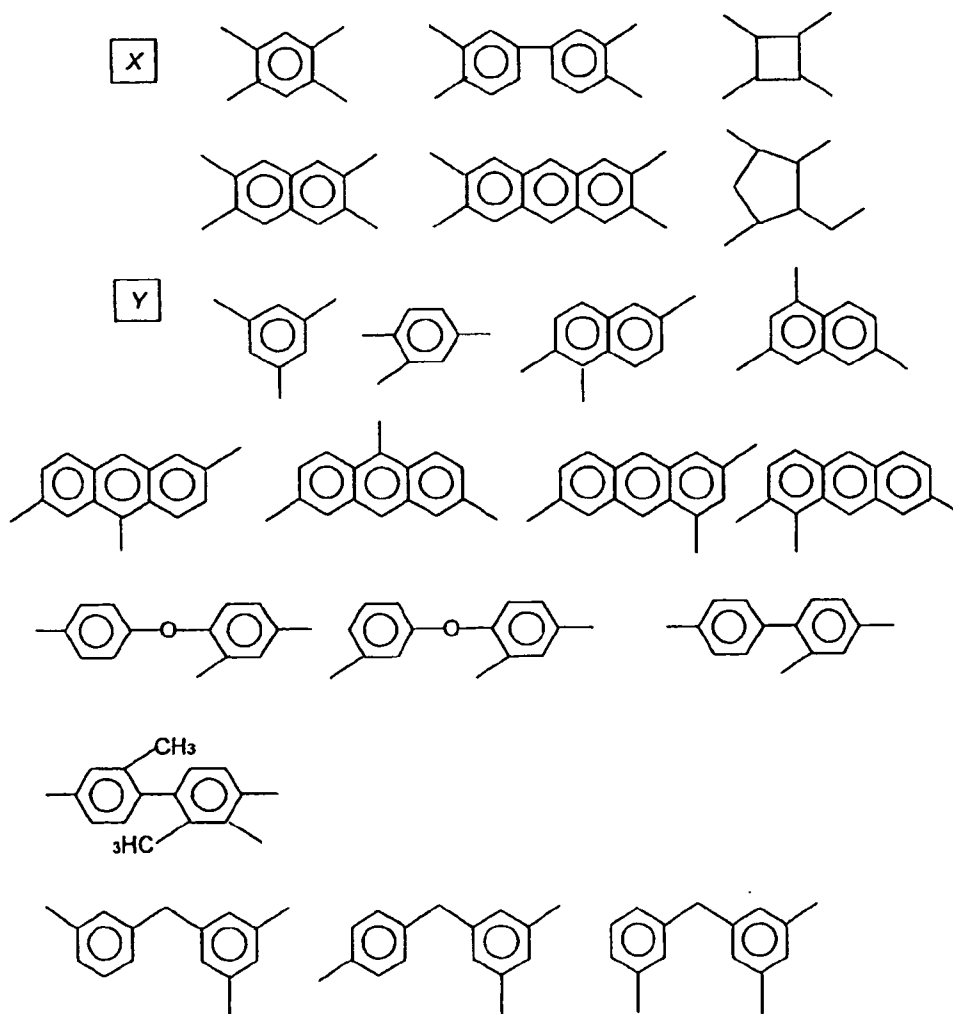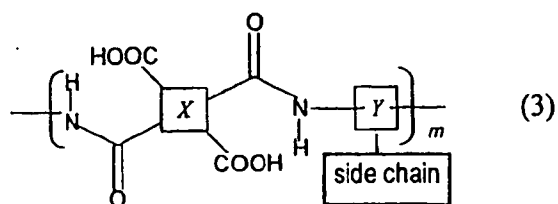


45 the second polyimide is represented by general formula (3').

[Formula 4]

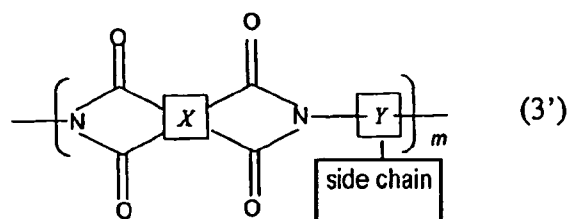

8. The alignment film material of any of claims 1 to 7, wherein the second polyimide has a side chain including a fluorine group.
9. The alignment film material of any of claims 1 to 8, wherein the second polyimide has a photoreactive functional group.
10. The alignment film material of claim 9, wherein the photoreactive functional group is at least one selected from the group consisting of a cinnamate group, a chalcone group, a tolan group, a coumarin group, and an azobenzene group.
11. The alignment film material of claim 9 or 10, wherein at least one of the second polyimide and the precursor thereof has a side chain represented by general formula (4).

[Formula 4]



wherein, A represents pyrimidine-2,5-diyl, pyridine-2,5-diyl, 2,5-thiophenylene, 2,5-furanylene, 1,4-or 2,6-naphthylene, or phenylene, optionally substituted by a group selected from fluorine, chlorine, and cyano, or by a C₁₋₁₈ cyclic, linear chain, or branched alkyl residue, which is optionally substituted by one cyano group or one or more halogen atoms, where one or more non-adjacent -CH₂-groups of the alkyl are optionally replaced by a group Q,

B is a linear or branched alkyl residue which is unsubstituted, mono-substituted by cyano or halogen, or poly-substituted by halogen, having 3 to 18 carbon atoms. where one or more non-adjacent CH₂ groups may independently be replaced by a group Q,

C¹ and C² each independently of the other represent an aromatic or alicyclic group, which is unsubstituted or substituted by fluorine, chlorine, cyano, or by a cyclic, linear, or branched alkyl residue, which is unsubstituted, mono-substituted by cyano or halogen, or poly-substituted by halogen, having 1 to 18 carbon atoms and where one or more non-adjacent CH₂ groups may independently be replaced by a group Q, D represents an oxygen atom or NR¹-, where R¹ represents a hydrogen atom or lower alkyl,

S¹ and S² each independently of the other represent a single covalent bond or a spacer unit. S³ represents a spacer unit,

Q represents a group selected from -O-, -CO-, -COO-, -O-CO-, -Si(CH₃)₂-O-Si(CH₃)₂-, -NR¹-, -NR¹-CO-, -CO-NR¹-, -NR¹-CO-O-, -O-CO-NR¹-, -NR¹-CO-NR¹-, -CH=CH-, -C≡C-, and -O-CO-O-, where R¹ represents a hydrogen atom or lower alkyl, E and F each independently of the other represent hydrogen, fluorine, chlorine, cyano, alkyl optionally substituted by fluorine having carbon atoms 1 to 12, where optionally one or more non-adjacent CH₂ groups are replaced by -O-, -CO-O-, -O-CO- and/or -CH=CH-.

12. The alignment film material of any of claims 1 to 8, wherein at least one of the second polyimide and the precursor thereof has a side chain including a vertical alignment group.

13. The alignment film material of any of claims 1 to 12, wherein a concentration of the vinyl-type monomer on the basis of the alignment film material is no less than 2wt% and no more than 20wt%.

14. An alignment film comprising:

a first polyimide;

a second polyimide different from the first polyimide; and

a polyvinyl compound resulting from polymerization of a vinyl-type monomer, wherein

the vinyl-type monomer is represented by general formula (1) P1-A1-(Z1-A2)_n-P2 (in general formula (1), P1 and P2 are, independently, acrylate, methacrylate, acrylamide or methacrylamide; A1 and A2 represent, independently, 1,4-phenylene, 1,4-cyclohexane or 2,5-thiophene, or naphthalene-2,6-diyl or anthracene-2,7-diyl; at least one of A1 and A2 is substituted by at least one fluorine group; and Z1 is a -COO- group, a -OCO- group, a -O- group, a -CONH- group or a single bond, where n is 0 or 1).

15. The alignment film of claim 14, wherein the alignment film has a first alignment layer containing the first polyimide and a second alignment layer containing the second polyimide.

16. The alignment film of claim 15, wherein the polyvinyl compound is present within the second alignment layer and on a surface of the second alignment layer.

17. A liquid crystal display device comprising:

an active matrix substrate having a pixel electrode;

a counter substrate having a counter electrode; and

a vertical-alignment type liquid crystal layer provided between the active matrix substrate and the counter substrate, wherein,

at least one of the active matrix substrate and the counter substrate further includes an alignment film provided

on the liquid crystal layer side;

the alignment film includes

a first polyimide,

a second polyimide different from the first polyimide, and

a polyvinyl compound resulting from polymerization of a vinyl-type monomer; and

the vinyl-type monomer is represented by general formula (1) $P1-A1-(Z1-A2)_n-P2$ (in general formula (1), P1 and P2 are, independently, acrylate, methacrylate, acrylamide or methacrylamide; A1 and A2 represent, independently, 1,4-phenylene, 1,4-cyclohexane or 2,5-thiophene, or naphthalene-2,6-diyl or anthracene-2,7-diyl; at least one of A1 and A2 is substituted by at least one fluorine group; and Z1 is a -COO- group, a -OCO- group, a -O- group, a -CONH- group or a single bond, where n is 0 or 1).

18. The liquid crystal display device of claim 17, wherein the alignment film regulates liquid crystal molecules in the liquid crystal layer such that the liquid crystal molecules are inclined with respect to a normal direction of a principal face of the alignment film in the absence of an applied voltage.

19. The liquid crystal display device of claim 17 or 18, wherein the liquid crystal display device has a plurality of pixels; and in each of the plurality of pixels, the liquid crystal layer has a plurality of liquid crystal domains having respectively different reference alignment azimuths.

Patentansprüche

1. Ausrichtungsfilmmaterial, umfassend:

einen Precursor eines ersten Polyimids;

mindestens eines von einem zweiten Polyimid und einem Precursor davon, wobei das zweite Polyimid vom ersten Polyimid unterschiedlich ist; und

ein Monomer vom Vinyl-Typ mit einer Vinylgruppe, wobei




das Monomer vom Vinyl-Typ durch die allgemeine Formel (1) $P1-A1-(Z1-A2)_n-P2$ dargestellt ist (wobei in der allgemeinen Formel (1) P1 und P2 unabhängig für Acrylat, Methacrylat, Acrylamid oder Methacrylamid stehen, A1 und A2 unabhängig 1,4-Phenylen, 1,4-cyclohexan oder 2,5-Thiophen oder Naphthalen-2,6-diyl oder Anthracen-2,7-diyl darstellen, wobei mindestens eines von A1 und A2 mit mindestens einer Fluorgruppe substituiert ist, und Z1 für eine -COO-Gruppe, eine -OCO-Gruppe, eine -O-Gruppe, eine -CONH-Gruppe oder eine Einfachbindung stehen, wobei n 0 oder 1 ist).

2. Ausrichtungsfilmmaterial nach Anspruch 1, wobei das Monomer vom Vinyl-Typ ein bifunktionelles Monomer mit einer symmetrischen Struktur ist.

3. Ausrichtungsfilmmaterial nach Anspruch 1 oder 2, wobei das Monomer vom Vinyltyp ein Dimethacrylatmonomer ist.


4. Ausrichtungsfilmmaterial nach einem der Ansprüche 1 bis 3, wobei das Monomer vom Vinyltyp durch die Strukturformel (1a) dargestellt ist

[Formel 1]











5. Ausrichtungsfilmmaterial nach einem der Ansprüche 1 bis 4, wobei der Precursor des ersten Polyimids durch die allgemeine Formel (2) dargestellt ist.

















[Formel 2]

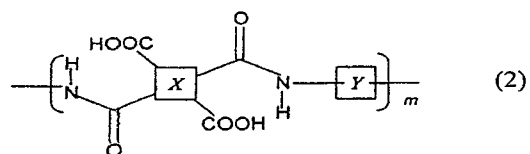

X





Y




6. Ausrichtungsfilmmaterial nach einem der Ansprüche 1 bis 5, wobei eine Seitenkette des Precursors des ersten Polyimids keine vertikalen Ausrichtungsgruppen aufweist.
7. Ausrichtungsfilmmaterial nach einem der Ansprüche 1 bis 6, wobei der Precursor des zweiten Polyimids durch die allgemeine Formel (3) dargestellt ist.

[Formel 3]

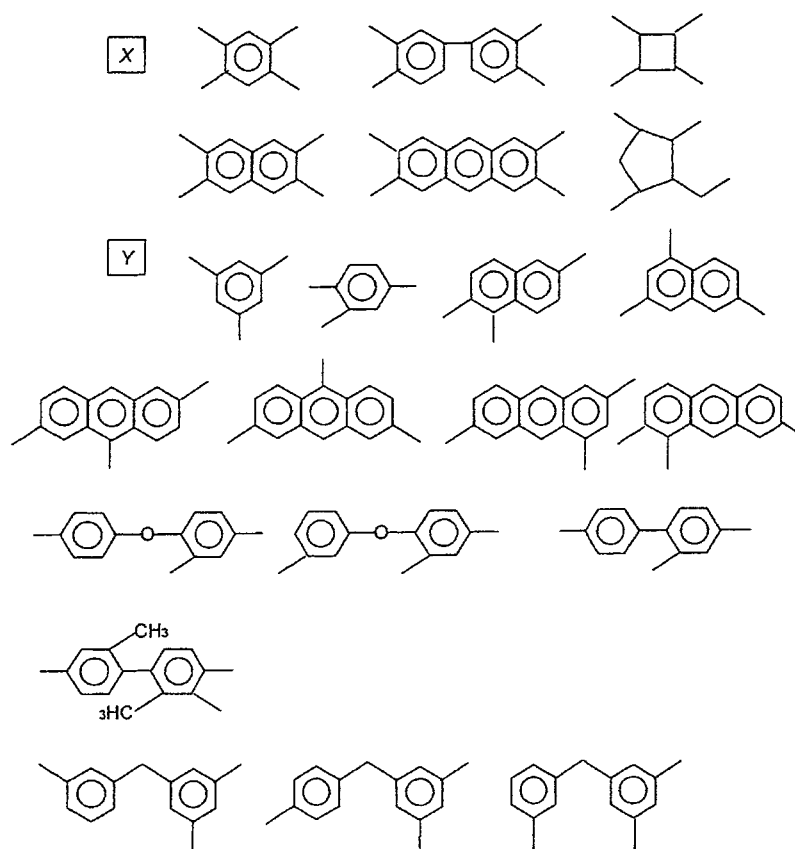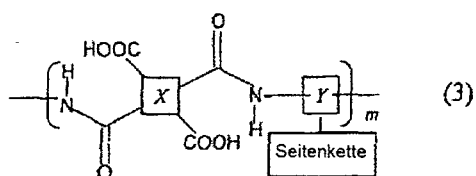


und das zweite Polyimid durch die allgemeine Formel (3') dargestellt ist.

[Formel 4]

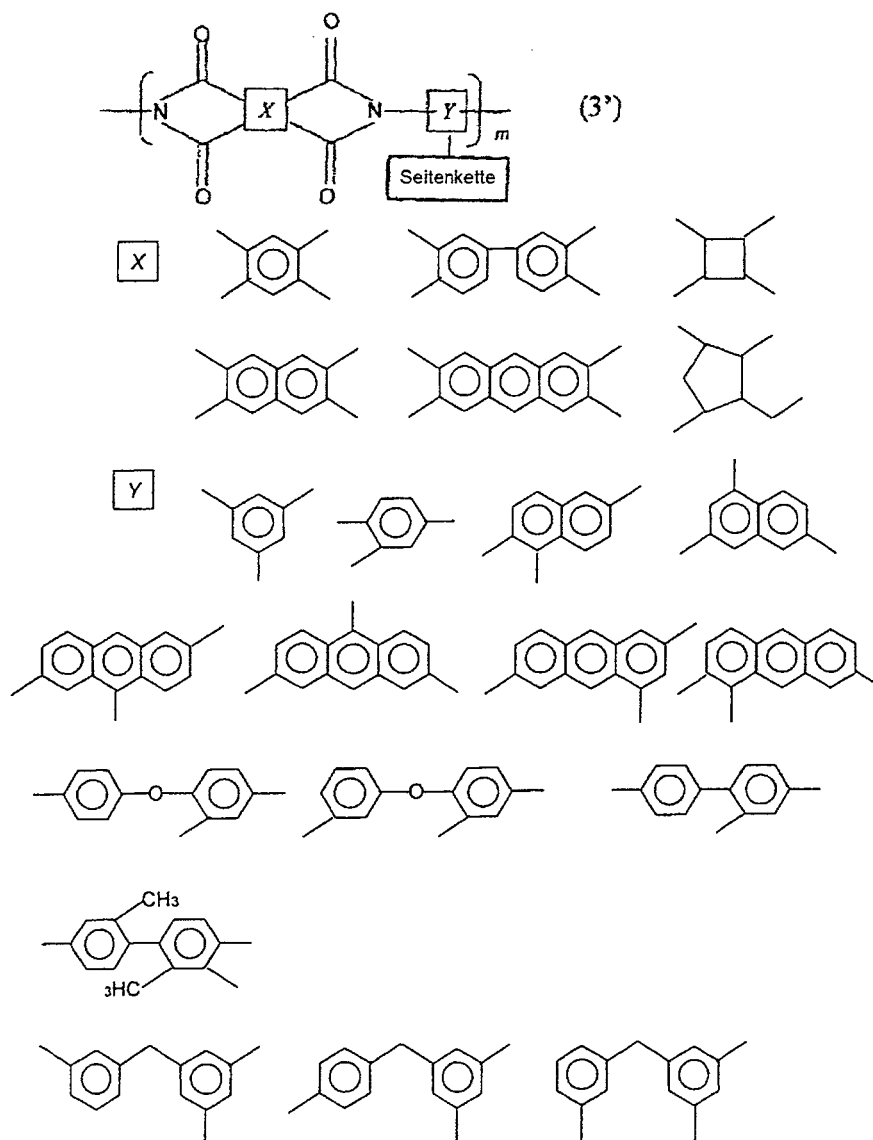

8. Ausrichtungsfilmmaterial nach einem der Ansprüche 1 bis 7, wobei das zweite Polyimid eine Seitenkette aufweist, die Fluorgruppen umfasst.
9. Ausrichtungsfilmmaterial nach einem der Ansprüche 1 bis 8, wobei das zweite Polyimid eine fotoreaktive funktionelle Gruppe aufweist.
10. Ausrichtungsfilmmaterial nach Anspruch 9, wobei die fotoreaktive funktionelle Gruppe mindestens eine ist, ausgewählt aus der Gruppe bestehend aus einer Cinnamat-Gruppe, einer Chalcon-Gruppe, einer Tolan-Gruppe, einer Cumarin-Gruppe, und einer Azobenzol-Gruppe.
11. Ausrichtungsfilmmaterial nach Anspruch 9 oder 10, wobei mindestens eines des zweiten Polyimids und des Precursors davon eine Seitenkette aufweist, die durch die allgemeine Formel (4) dargestellt ist.

[Formel 4]



wobei A für Pyrimidin-2,4-diyl, Pyridin-2,5-diyl, 2,5-Thiophenylen, 2,5-Furanylen, 1,4- oder 2,6-Naphthylen oder Phenylen steht, die gegebenenfalls mit einer Gruppe substituiert sind, ausgewählt aus Fluor, Chlor und Cyano, oder einen C₁₋₁₈ zyklischen, linearen oder verzweigten Alkylrest, der gegebenenfalls mit einer Cyano-Gruppe oder einer oder mehr Halogenatomen substituiert ist, wobei eine oder mehrere nicht-benachbarte -CH₂-Gruppen des Alkyls optional durch eine Gruppe Q ersetzt sind,

B ein linearer oder verzweigter Alkylrest ist, der unsubstituiert, mit Cyano oder Halogen mono-substituiert oder mit Halogen poly-substituiert ist, der 3 bis 18 Kohlenstoffatome aufweist, wobei eine oder mehrere nicht benachbarte CH₂-Gruppen unabhängig durch eine Gruppe Q ersetzt sein können,

C¹ und C² jeweils unabhängig voneinander eine aromatische oder alizyklische Gruppe darstellen, die unsubstituiert oder mit Fluor, Chlor, Cyano oder mit einem zyklischen, linearen oder verzweigten Alkylrest substituiert sind, der unsubstituiert, mono-substituiert mit Cyano oder Halogen oder polysubstituiert mit Halogen ist, die 1 bis 18 Kohlenstoffatome aufweisen und wobei eine oder mehrere nicht benachbarte CH₂-Gruppen unabhängig durch eine Gruppe Q ersetzt sein können, D für ein Sauerstoffatom oder NR¹- steht, wobei R¹ ein Wasserstoffatom oder ein Niederalkyl bedeutet,

S¹ und S² jeweils unabhängig voneinander eine einzelne kovalente Bindung oder eine Spacereinheit darstellen, S³ für eine Spacereinheit steht,

Q eine Gruppe darstellt, ausgewählt aus -O-, -CO-, -COO-, -O-CO-, Si(CH₃)₂-O-Si(CH₃)₂-, -NR¹-, -NR¹-CO-, -CO-NR¹-, -NR¹-CO-O-, -O-CO-NR¹-, -NR¹-CO-NR¹-, -CH=CH-, -C≡C- und -O-CO-O-, wobei R¹ für ein Wasserstoffatom oder Niederalkyl steht, E und F jeweils unabhängig voneinander Wasserstoff, Fluor, Chlor, Cyano, Alkyl bedeuten, das gegebenenfalls mit Fluor substituiert ist, das eine Kohlenstoffanzahl von 1 bis 10 aufweist, wobei optional eine oder mehrere nicht benachbarte CH₂-Gruppen durch -O-, -CO-O-, -O-CO und/oder -CH=CH- ausgetauscht ist.

12. Ausrichtungsfilmmaterial nach einem der Ansprüche 1 bis 8, wobei mindestens eines der zweiten Polyimide und des Precursors davon eine Seitenkette aufweist, die eine vertikale Ausrichtungsgruppe umfasst.

13. Ausrichtungsfilmmaterial nach einem der Ansprüche 1 bis 12, wobei eine Konzentration der Monomere vom Vinyltyp auf Basis des Ausrichtungsfilmmaterials nicht geringer als 2 Gew.-% und nicht mehr als 20 Gew.-% beträgt.

14. Ausrichtungsfilm, umfassend:

ein erstes Polyimid;

ein zweites Polyimid, das vom ersten Polyimid verschieden ist; und

eine Polyvinylverbindung, die aus der Polymerisierung eines Monomers vom Vinyl-Typ resultiert, wobei das Monomer vom Vinyl-Typ durch die allgemeine Formel (1) P1-A1-(Z1-A2)_n-P2 dargestellt ist (wobei in der allgemeinen Formel (1) P1 und P2 unabhängig für Acrylat, Methacrylat, Acrylamid oder Methacrylamid stehen, A1 und A2 unabhängig 1,4-Phenylen, 1,4-Cyclohexan oder 2,5-Thiophen oder Naphthalen-2,6-diyl oder Anthracen-2,7-diyl darstellen, wobei mindestens eines von A1 und A2 mit mindestens einer Fluorgruppe substituiert ist, und Z1 für eine -COO-Gruppe, eine -OCO-Gruppe, eine -O-Gruppe, eine -CONH-Gruppe oder eine Einfachbindung stehen, wobei n 0 oder 1 ist).

15. Ausrichtungsfilm nach Anspruch 14, wobei der Ausrichtungsfilm eine erste Ausrichtungsschicht mit dem ersten Polyimid und eine zweite Ausrichtungsschicht mit dem zweiten Polyimid aufweist.

16. Ausrichtungsfilm nach Anspruch 15, wobei die Polyvinylverbindung in der zweiten Ausrichtungsschicht und auf einer Oberfläche der zweiten Ausrichtungsschicht vorliegt.

17. Flüssigkristallanzeigevorrichtung, umfassend:

ein aktives Matrixsubstrat mit einer Pixelelektrode;

ein Gegensubstrat mit einer Gegenelektrode; und

eine Flüssigkristallschicht vom vertikalen Ausrichtungstyp, die zwischen dem aktiven Matrixsubstrat und dem Gegensubstrat vorgesehen ist, wobei, mindestens eines des aktiven Matrixsubstrats und des Gegensubstrats weiterhin einen Ausrichtungsfilm umfasst, der auf der Flüssigkristallschichtseite vorgesehen ist;

wobei der Ausrichtungsfilm umfasst

ein erstes Polyimid,

ein zweites Polyimid, das vom ersten Polyimid verschieden ist, und

eine Polyvinylverbindung, die aus der Polymerisierung eines Monomers vom Vinyl-Typ resultiert; und

das Monomer vom Vinyl-Typ durch die allgemeine Formel (1) $P1-A1-(Z1-A2)_n-P2$ dargestellt ist (wobei in der allgemeinen Formel (1) P1 und P2 unabhängig für Acrylat, Methacrylat, Acrylamid oder Methacrylamid stehen, A1 und A2 unabhängig 1,4-Phenylen, 1,4-Cyclohexan oder 2,5-Thiophen oder Naphthalen-2,6-diyl oder Anthracen-2,7-diyl darstellen, wobei mindestens eines von A1 und A2 mit mindestens einer Fluorgruppe substituiert ist, und Z1 für eine -COO-Gruppe, eine -OCO-Gruppe, eine -O-Gruppe, eine -CONH-Gruppe oder eine Einfachbindung stehen, wobei n 0 oder 1 ist).

18. Flüssigkristallanzeigevorrichtung nach Anspruch 17, wobei der Ausrichtungsfilm Flüssigkristallmoleküle in der Flüssigkristallschicht reguliert, so dass die Flüssigkristallmoleküle hinsichtlich einer normalen Richtung der Hauptfläche des Ausrichtungsfilms in Abwesenheit einer angelegten Spannung geneigt wird.

19. Flüssigkristallanzeigevorrichtung nach Anspruch 17 oder 18, wobei die Flüssigkristallanzeigevorrichtung eine Vielzahl von Pixel aufweist; und in jedem der Vielzahl von Pixeln die Flüssigkristallschicht eine Vielzahl von Flüssigkristalldomänen aufweist, die entsprechende unterschiedliche Referenzausrichtungszimuts aufweisen.

Revendications

1. Matériau de film d'alignement comprenant :




un précurseur d'un premier polyimide ;
au moins l'un parmi un deuxième polyimide et un précurseur de celui-ci, le deuxième polyimide étant différent du premier polyimide ; et
un monomère de type vinyle comportant un groupe vinyle,
dans lequel le monomère de type vinyle est représenté par la formule générale (1) $P1-A1-(Z1-A2)_n-P2$ (dans la formule générale (1), P1 et P2 sont indépendamment un radical acrylate, méthacrylate, acrylamide ou méthacrylamide ; A1 et A2 représentent indépendamment un radical 1,4-phénylène, 1,4-cyclohexane ou 2,5-thiophène, ou naphthalène-2,6-diyle ou anthracène-2,7-diyle ; au moins l'un de A1 et A2 est substitué par au moins un groupe fluor ; et Z1 est un groupe -COO-, un groupe -OCO-, un groupe -O-, un groupe -CONH- ou une liaison simple ; où n vaut 0 ou 1).

2. Matériau de film d'alignement selon la revendication 1, dans lequel le monomère de type vinyle est un monomère bifonctionnel présentant une structure symétrique.

3. Matériau de film d'alignement selon la revendication 1 ou 2, dans lequel le monomère de type vinyle est un monomère de diméthacrylate.






















4. Matériau de film d'alignement selon l'une quelconque des revendications 1 à 3, dans lequel le monomère de type vinyle est représenté par la formule structurelle (1a) :

[Formule 1]

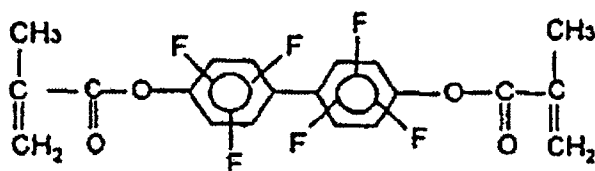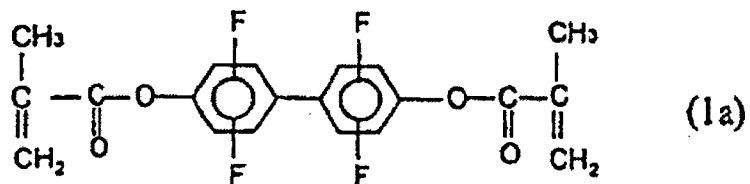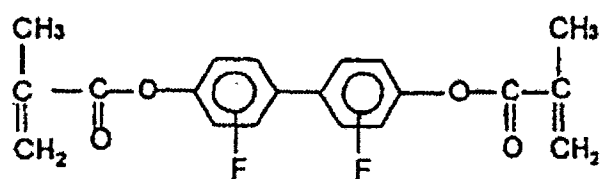
























5. Matériau de film d'alignement selon l'une quelconque des revendications 1 à 4, dans lequel le précurseur du premier polyimide est représenté par la formule générale (2) :

[Formule 2]

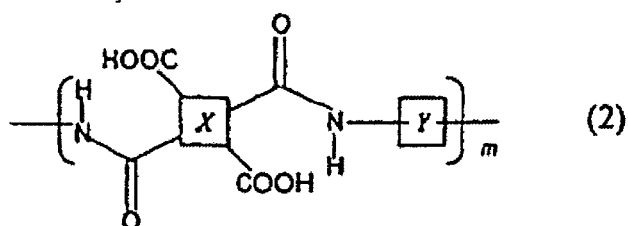























6. Matériau de film d'alignement selon l'une quelconque des revendications 1 à 5, dans lequel une chaîne latérale du précurseur du premier polyimide n'a aucun groupe d'alignement vertical.
7. Matériau de film d'alignement selon l'une quelconque des revendications 1 à 6, dans lequel le précurseur du deuxième polyimide est représenté par la formule générale (3) ; et

[Formule 3]

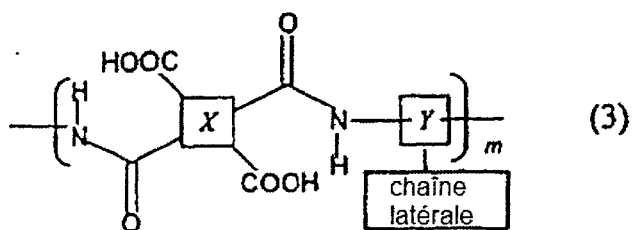

50 le deuxième polyimide est représenté par la formule générale (3') :


[Formule 4]

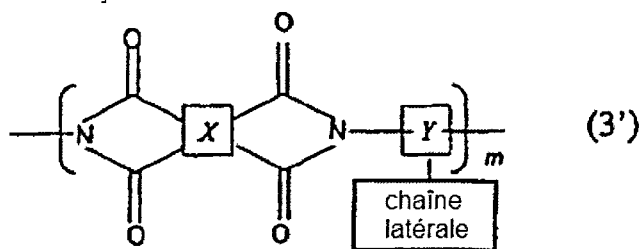

- 50
8. Matériau de film d'alignement selon l'une quelconque des revendications 1 à 7, dans lequel le deuxième polyimide a une chaîne latérale contenant un groupe fluor.
9. Matériau de film d'alignement selon l'une quelconque des revendications 1 à 8, dans lequel le deuxième polyimide a un groupe fonctionnel photoréactif.
- 55
10. Matériau de film d'alignement selon la revendication 9, dans lequel le groupe fonctionnel photoréactif est au moins un tel groupe choisi dans l'ensemble constitué par un groupe cinnamate, un groupe chalcone, un groupe tolane, un groupe coumarine, et un groupe azobenzène.

11. Matériau de film d'alignement selon la revendication 9 ou 10, dans lequel au moins l'un parmi le deuxième polyimide et son précurseur a une chaîne latérale représentée par la formule générale (4) :

[Formule 4]



(4)

dans laquelle A représente un radical pyrimidine-2,5-diyle, pyridine-2,5-diyle, 2,5-thiophénylène, 2,5-furanylène, 1,4- ou 2,6-naphtylène, ou phénylène, éventuellement substitué par un groupe choisi parmi le fluor, le chlore, et cyano, ou par un résidu alkyle en C₁ à C₁₈ linéaire, ramifié ou cyclique, qui est éventuellement substitué par un seul groupe cyano ou un ou plusieurs atomes d'halogène, un ou plusieurs groupes -CH₂- non adjacents de l'alkyle étant éventuellement remplacés par un groupe Q,

B est un résidu alkyle linéaire ou ramifié qui est non substitué, monosubstitué par cyano ou un halogène, ou polysubstitué par un halogène, ayant de 3 à 18 atomes de carbone, un ou plusieurs groupes CH₂ non adjacents pouvant indépendamment être remplacés par un groupe Q,

chacun de C¹ et C², indépendamment de l'autre, représente un groupe aromatique ou alicyclique, qui est non substitué ou substitué par du fluor, du chlore, cyano, ou par un résidu alkyle linéaire, ramifié ou cyclique, qui est non substitué, monosubstitué par cyano ou un halogène, ou polysubstitué par un halogène, ayant de 1 à 18 atomes de carbone, un ou plusieurs groupes CH₂ non adjacents pouvant indépendamment être remplacés par un groupe Q, D représente un atome d'oxygène ou NR¹-, où R¹ représente un atome d'hydrogène ou un alkyle inférieur, chacun de S¹ et S², indépendamment de l'autre, représente une liaison covalente simple ou un motif d'espacement, S³ représente un motif d'espacement,

Q représente un groupe choisi parmi -O-, -CO-, -COO-, -O-CO-, -Si(CH₃)₂-O-Si(CH₃)₂-, -NR¹-, -NR¹-CO-, -CO-NR¹-, -NR¹-CO-O-, -O-CO-NR¹-, -NR¹-CO-NR¹-, -CH=CH-, -C≡C-, et -O-CO-O-, où R¹ représente un atome d'hydrogène ou un alkyle inférieur, chacun de E et F, indépendamment de l'autre, représente l'hydrogène, le fluor, le chlore, cyano, un alkyle éventuellement substitué par du fluor et ayant de 1 à 12 atomes de carbone, éventuellement un ou plusieurs groupes CH₂ non adjacents étant remplacés par -O-, -CO-O-, -O-CO- et/ou -CH=CH-.

12. Matériau de film d'alignement selon l'une quelconque des revendications 1 à 8, dans lequel au moins l'un parmi le deuxième polyimide et son précurseur a une chaîne latérale contenant un groupe d'alignement vertical.

13. Matériau de film d'alignement selon l'une quelconque des revendications 1 à 12, dans lequel la concentration du monomère de type vinyle, sur la base du matériau de film d'alignement, n'est pas inférieure à 2 % en poids et pas supérieure à 20 % en poids.

14. Film d'alignement comprenant :

un premier polyimide ;

un deuxième polyimide différent du premier polyimide ; et

un composé polyvinylique résultant de la polymérisation d'un monomère de type vinyle,

dans lequel le monomère de type vinyle est représenté par la formule générale (1) P1-A1-(Z1-A2)_n-P2 (dans la formule générale (1), P1 et P2 sont indépendamment un radical acrylate, méthacrylate, acrylamide ou méthacrylamide ; A1 et A2 représentent indépendamment un radical 1,4-phénylène, 1,4-cyclohexane ou 2,5-thiophène, ou naphthalène-2,6-diyle ou anthracène-2,7-diyle ; au moins l'un de A1 et A2 est substitué par au moins un groupe fluor ; et Z1 est un groupe -COO-, un groupe -OCO-, un groupe -O-, un groupe -CONH- ou une liaison simple ; où n vaut 0 ou 1).

15. Film d'alignement selon la revendication 14, lequel film d'alignement a une première couche d'alignement contenant le premier polyimide et une deuxième couche d'alignement contenant le deuxième polyimide.

16. Film d'alignement selon la revendication 15, dans lequel le composé polyvinylique est présent à l'intérieur de la deuxième couche d'alignement et sur une surface de la deuxième couche d'alignement.

17. Dispositif d'affichage à cristaux liquides comprenant :

un substrat de matrice active ayant une électrode de pixel ;
 un contre-substrat ayant une contre-électrode ; et
 une couche de cristaux liquides du type à alignement vertical disposée entre le substrat de matrice active et le contre-substrat,
 dans lequel
 au moins l'un parmi le substrat de matrice active et le contre-substrat contient en outre un film d'alignement disposé du côté de la couche de cristaux liquides ;
 le film d'alignement contient
 un premier polyimide,
 un deuxième polyimide différent du premier polyimide, et un composé polyvinylique résultant de la polymérisation d'un monomère de type vinyle,
 et le monomère de type vinyle est représenté par la formule générale (1) $P1-A1-(Z1-A2)_n-P2$ (dans la formule générale (1), P1 et P2 sont indépendamment un radical acrylate, méthacrylate, acrylamide ou méthacrylamide ; A1 et A2 représentent indépendamment un radical 1,4-phénylène, 1,4-cyclohexane ou 2,5-thiophène, ou naphthalène-2,6-diyle ou anthracène-2,7-diyle ; au moins l'un de A1 et A2 est substitué par au moins un groupe fluor ; et Z1 est un groupe -COO-, un groupe -OCO-, un groupe -O-, un groupe -CONH- ou une liaison simple ; où n vaut 0 ou 1).

18. Dispositif d'affichage à cristaux liquides selon la revendication 17, dans lequel le film d'alignement régule les molécules de cristaux liquides dans la couche de cristaux liquides de façon que les molécules de cristaux liquides soient inclinées par rapport à une direction normale d'une face principale du film d'alignement en l'absence d'une tension appliquée.

19. Dispositif d'affichage à cristaux liquides selon la revendication 17 ou 18, lequel dispositif à cristaux liquides a une pluralité de pixels ; et dans lequel, dans chacun parmi la pluralité de pixels, la couche de cristaux liquides a une pluralité de domaines de cristaux liquides ayant respectivement des azimuts d'alignement de référence différents.

FIG. 1

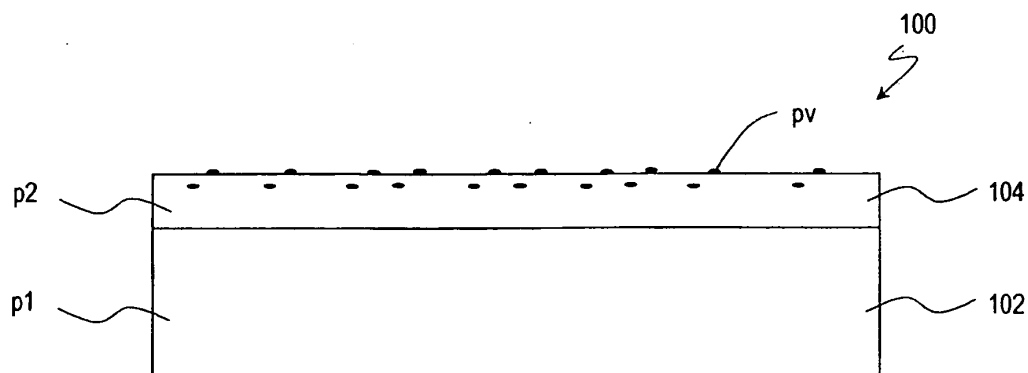


FIG. 2

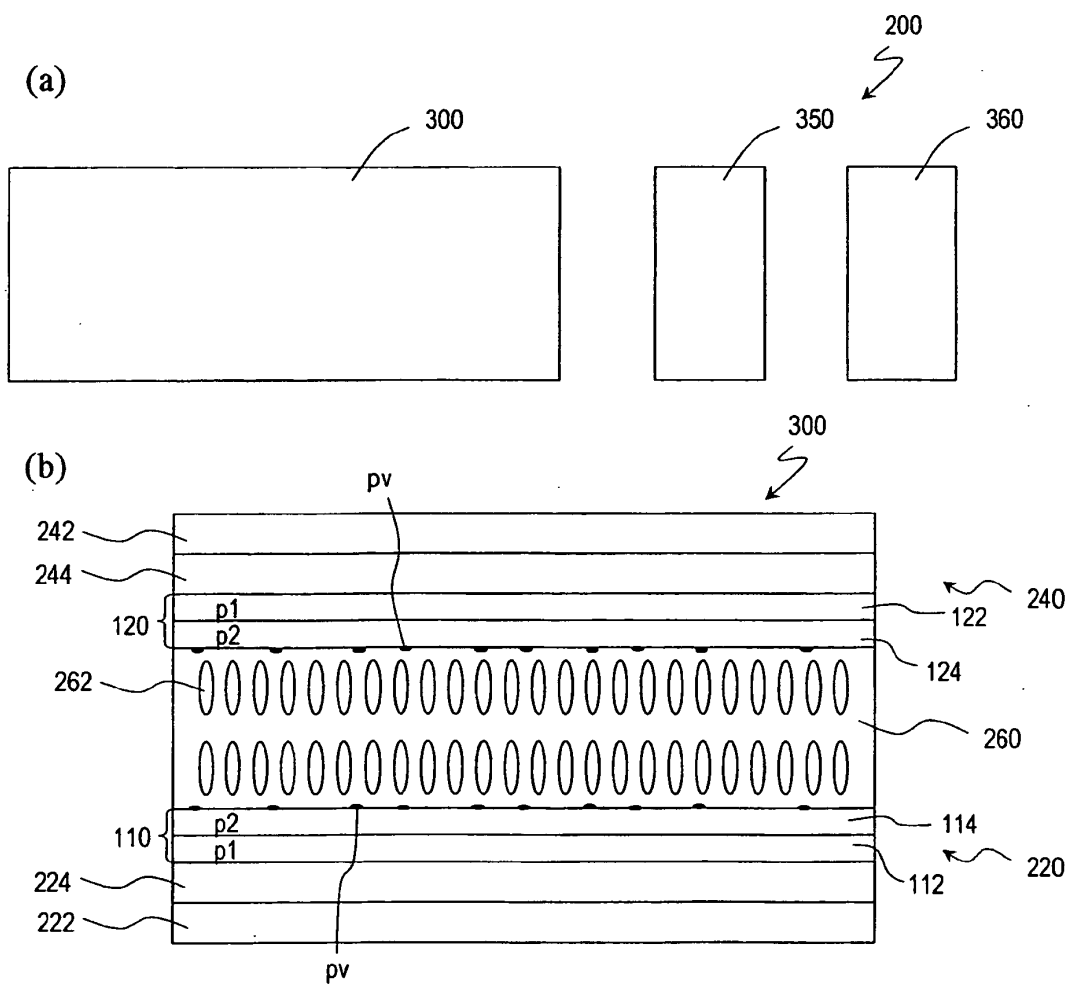


FIG. 3

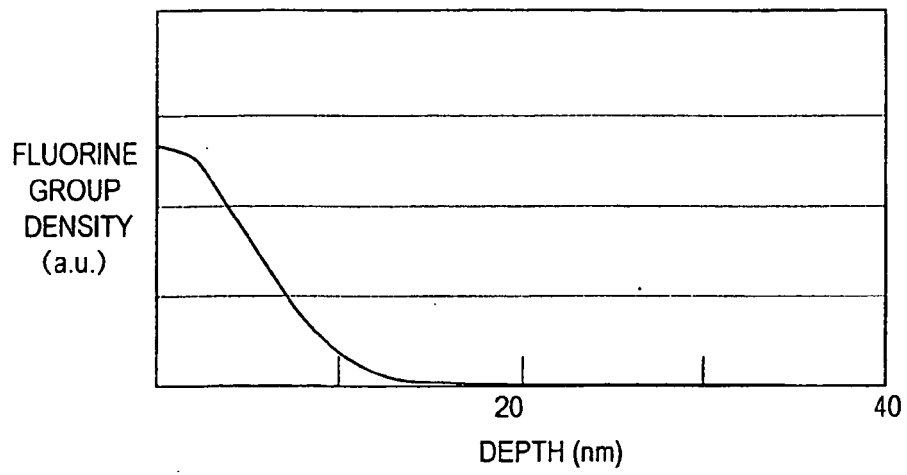


FIG. 4

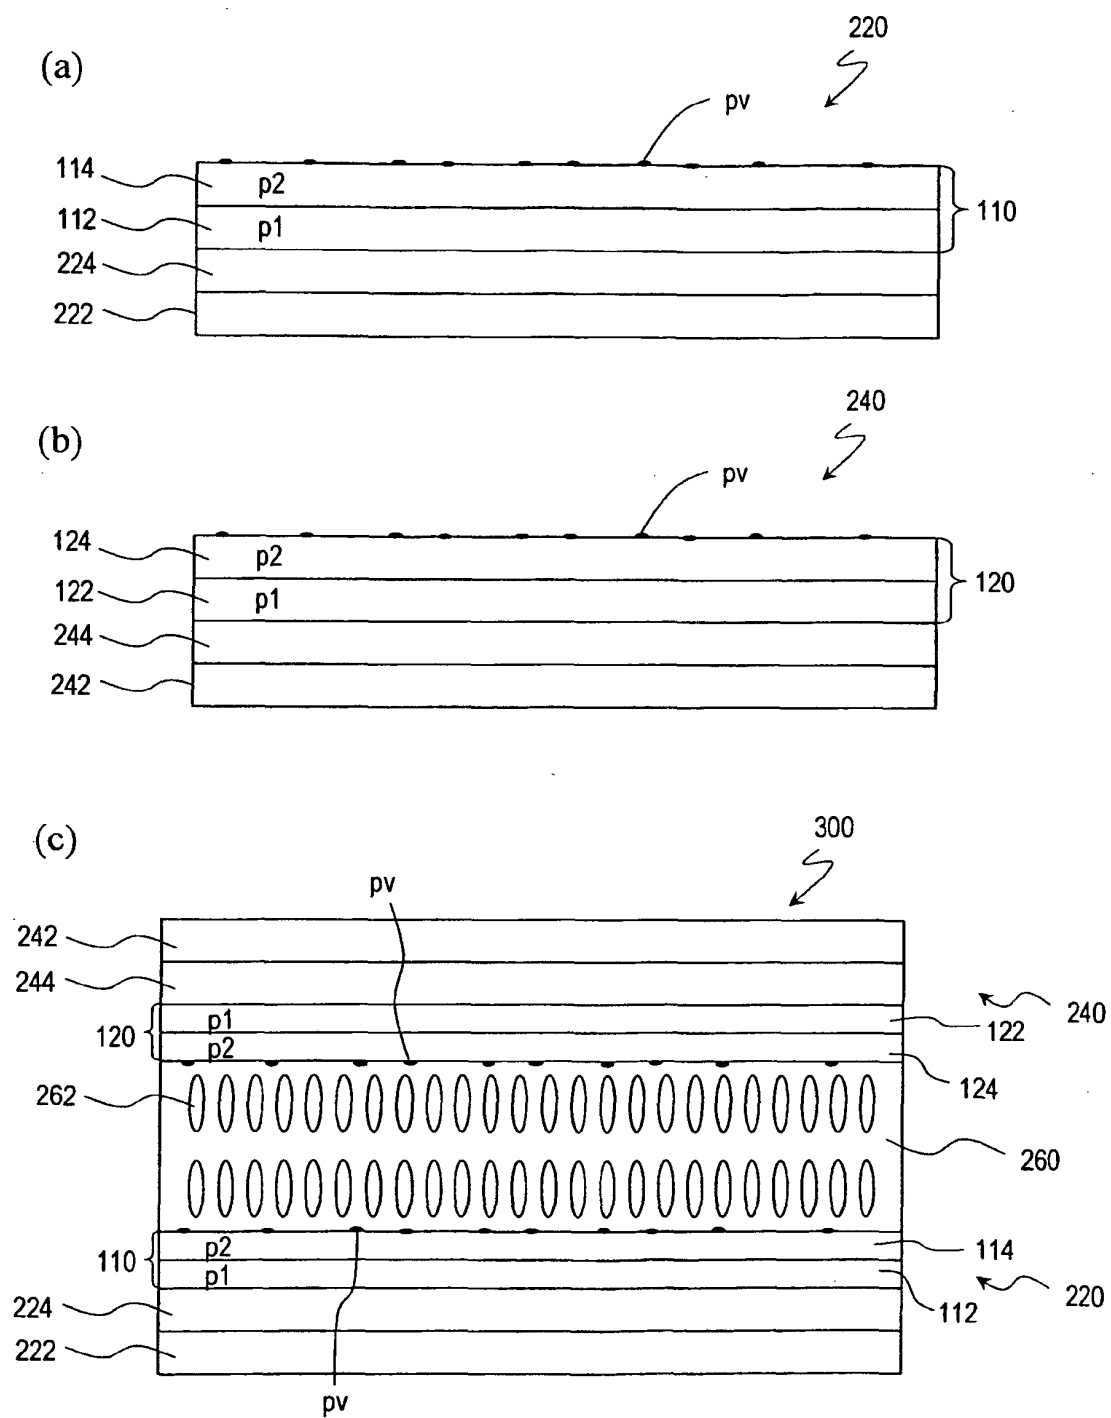


FIG. 5

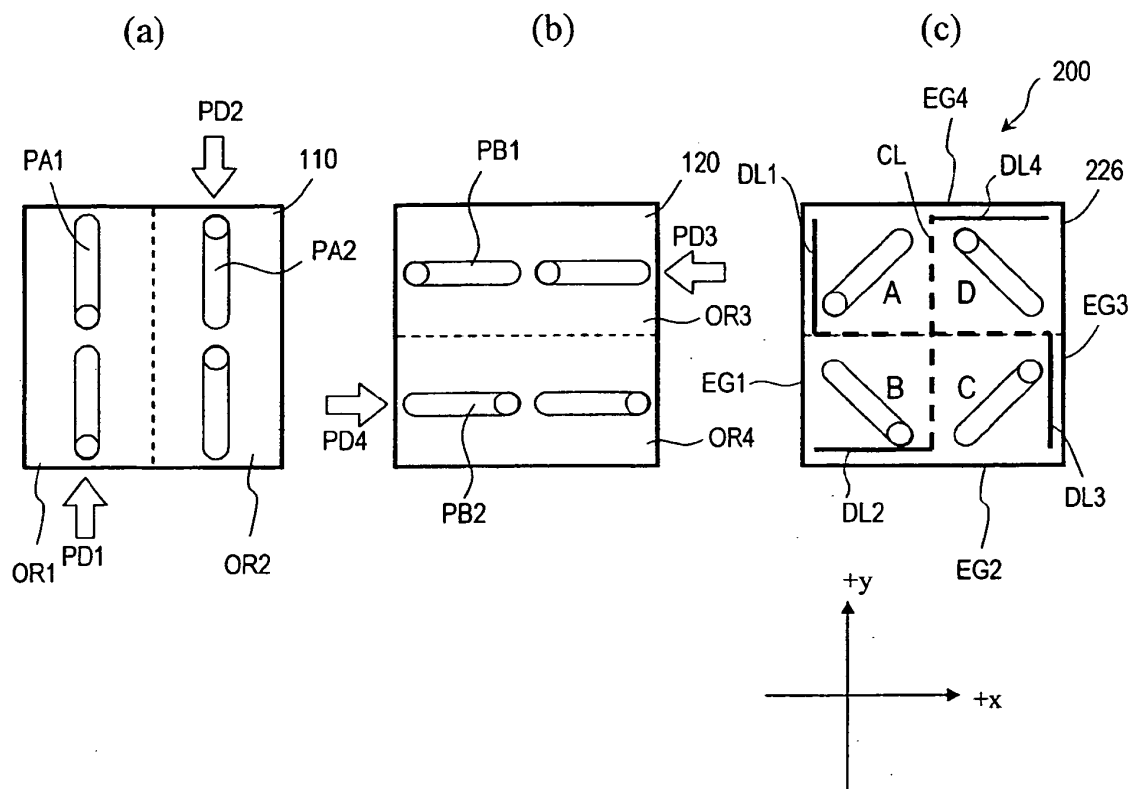


FIG. 6

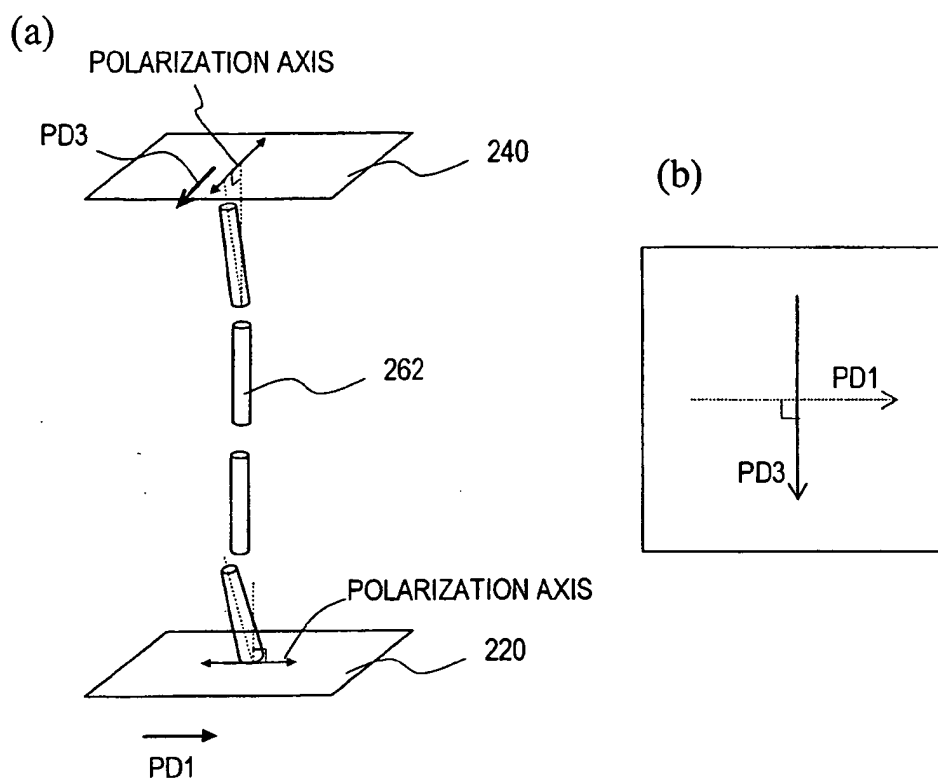


FIG. 7


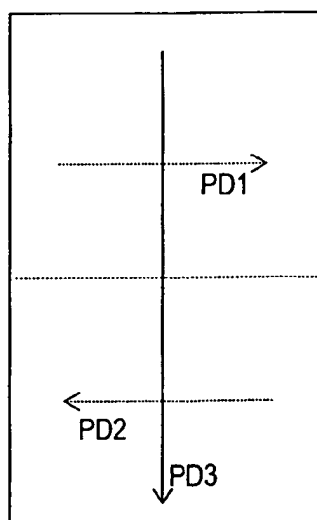


FIG.8

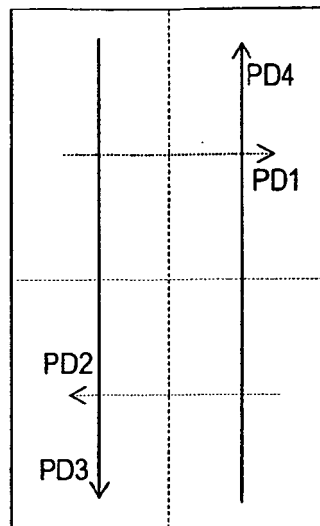

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 07101904 B [0012]
- JP 11352486 A [0013]
- JP 2006121220 A [0013]
- JP 8334771 A [0013]

Non-patent literature cited in the description

- **MU-SUN KWAK et al.** Observation of Hybrid Type Alignment Film in TFT-LCD. *Proceedings of 2007 Japanese Liquid Crystal Society Annual meeting*, September 2007, 138 [0014]

专利名称(译)	取向膜，取向膜材料，具有取向膜的液晶显示器及其形成方法		
公开(公告)号	EP2352060B1	公开(公告)日	2013-05-15
申请号	EP2009821712	申请日	2009-06-23
[标]申请(专利权)人(译)	夏普株式会社		
申请(专利权)人(译)	夏普株式会社		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	MIZUSAKI MASANOBU NAKANISHI YOHEI		
发明人	MIZUSAKI, MASANOBU NAKANISHI, YOHEI		
IPC分类号	G02F1/1337 C08F2/44 C08F20/00 C08G73/10		
CPC分类号	C08L79/08 C08F222/1006 C08G73/1039 C08G73/1046 C08G73/105 C08G73/1067 C08G73/1075 C08G73/1078 C08L2205/02 G02F1/13363 G02F1/133723 G02F1/1393 G02F2001/133742 Y10T428 /31721		
优先权	2008271376 2008-10-21 JP		
其他公开文献	EP2352060A1 EP2352060A4		
外部链接	Espacenet		

摘要(译)

根据本发明的取向膜材料包括：第一聚酰亚胺 (p1) 的前体;第二聚酰亚胺 (p2) 及其前体;和乙烯基类单体。乙烯基类单体由通式 (1) P1-A1-(Z1-A2) n-P2表示 (通式 (1) 中，P1和P2独立地为丙烯酸酯，甲基丙烯酸酯，丙烯酰胺或甲基丙烯酰胺; A1和A2独立地表示1,4-亚苯基，1,4-环己烷或2,5-噻吩，或萘-2,6-二基或蒽-2,7-二基; A1和A2中的至少一个被取代;至少一个氟基团;和Z1是-COO-基团，-OCO-基团，-O-基团，-CONH-基团或单键，其中n是0或1) 。

