

(19)



(11)

EP 2 816 396 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

02.05.2018 Bulletin 2018/18

(51) Int Cl.:

G02F 1/1335 ^(2006.01) **B60R 11/02** ^(2006.01)
G02B 5/30 ^(2006.01) **G02F 1/1333** ^(2006.01)
G06F 3/041 ^(2006.01) **G09F 9/00** ^(2006.01)
G02F 1/13363 ^(2006.01)

(21) Application number: **13748824.3**

(22) Date of filing: **08.02.2013**

(86) International application number:

PCT/JP2013/052989

(87) International publication number:

WO 2013/121991 (22.08.2013 Gazette 2013/34)

(54) **DISPLAY APPARATUS, AUTOMOTIVE DISPLAY APPARATUS, AND METHOD FOR
MANUFACTURING DISPLAY APPARATUS**

ANZEIGEVORRICHTUNG, ANZEIGEVORRICHTUNG FÜR KRAFTFAHRZEUG UND VERFAHREN
ZUR HERSTELLUNG EINER ANZEIGEVORRICHTUNG

APPAREIL D'AFFICHAGE, APPAREIL D'AFFICHAGE POUR VÉHICULE AUTOMOBILE ET
PROCÉDÉ DE FABRICATION DE L'APPAREIL D'AFFICHAGE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

• **YAMAMOTO, Isao**
Atsugi-shi
Kanagawa 243-0123 (JP)

(30) Priority: **14.02.2012 JP 2012029267**

(43) Date of publication of application:
24.12.2014 Bulletin 2014/52

(74) Representative: **Hoefer & Partner Patentanwälte
mbB**
Pilgersheimer Straße 20
81543 München (DE)

(73) Proprietor: **Nissan Motor Company, Limited**
Kanagawa-ku
Yokohama-shi
Kanagawa 221-0023 (JP)

(56) References cited:
WO-A1-2007/055269 WO-A1-2011/105133
JP-A- 2008 208 231 JP-A- 2008 310 309
JP-A- 2008 310 310 JP-A- 2010 091 655

(72) Inventors:

• **UNNO, Haruo**
Atsugi-shi
Kanagawa 243-0123 (JP)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 816 396 B1

Description

TECHNICAL FIELD

- 5 **[0001]** The present invention relates to a display apparatus including a liquid crystal panel, to an automotive display apparatus, and to a method for manufacturing the display apparatus.

BACKGROUND ART

- 10 **[0002]** A liquid crystal panel has a configuration, in which liquid crystal is filled into a gap between two glass plates, and a polarization plate is arranged on an outside of one of the glass plates, and accordingly, a displayed image displayed on the liquid crystal panel is linearly polarized in terms of principle. In a case where the displayed image, which is linearly polarized, is observed through sunglasses having a polarization function, and a polarization direction of the sunglasses and a polarization direction of the displayed image forms a relationship of the crossed Nicols, then a quantity of light transmitting through the sunglasses is lowered to a large extent, and visibility of the displayed image is significantly lowered.
- 15 **[0003]** As a technology for eliminating such polarization from the displayed image, a depolarization plate, which uses porous particles made of polyamide, is proposed (refer to Patent Literature 1).

20 CITATION LIST

PATENT LITERATURE

- 25 **[0004]** Patent Literature 1: Japanese Unexamined Patent Application Publication No. 2010-132768
- 25 **[0005]** JP 2008-310309 discloses a liquid crystal display, with which polarized light in a display image is depolarized easily and fully. The liquid crystal display is equipped with a liquid crystal layer; a polarizing plate disposed on the side nearer to the display image observer than the liquid crystal layer; and a depolarization layer, disposed on the side closer to the display image observer than the polarizing plate and is constituted a depolarizing material including fiber and a matrix material.
- 30 **[0006]** JP 2008-208231 teaches a method for producing an optical film having large tear strength and elastic modulus and capable of beforehand preventing fracture of a film and reducing dimensional change of the film by moisture absorption. The method for producing the optical film comprises forming a composition composed of acetylated cellulose containing a cellulose nanofiber into a film by a melt extrusion method.
- 35 **[0007]** WO 2007/055269 A1 discloses a liquid crystal display comprising a liquid crystal module and a touch panel unit arranged in front of the liquid crystal module. There is a space between the liquid crystal module and the touch panel unit, and a layer of air is present in the space. The liquid crystal module has a $\lambda/4$ plate on the front side. The touch panel unit comprises a polarizing plate and a $\lambda/4$ plate which are arranged on the front side of a touch panel in this order.
- 40 **[0008]** JP 2008-310310 teaches a depolarization material easily applicable to a display or the like, and depolarizing a display image. In particular, a transparent matrix material contains fibers, in this depolarization material. The fibers have an average fiber diameter of preferably 0.1-100 μm . The polarization is sufficiently eliminated because the dispersibility in the matrix material is enhanced by using the fiber having the average fiber diameter within the above range, and because the flatness and transparency of a surface are improved when film-formed.

45 SUMMARY OF INVENTION

- 50 **[0009]** However, a size of the porous particles described in Patent Literature 1 is a few micrometers in diameter at minimum, and a haze (opacity) of the depolarization plate is increased by the fact that the porous particles become a diffusion source of incident visible light, whereby the depolarization plate becomes unsuitable for a display apparatus for which high transparency is required.
- 50 **[0010]** The present invention has been made in consideration of the above-described problem. It is an object of the present invention to provide a display apparatus capable of enhancing the visibility of the displayed image by enhancing depolarization properties for the displayed image, to provide an automotive display apparatus, and to provide a method for manufacturing the display apparatus.
- 55 **[0011]** A display apparatus according to an aspect of the present invention includes: a liquid crystal panel; a touch panel placed on the liquid crystal panel; a base material layer stacked on the touch panel; and an adhesive layer interposed between the touch panel and the base material layer. Fiber having properties to eliminate polarization is contained in both of the base material layer and the adhesive layer.

BRIEF DESCRIPTION OF DRAWINGS

[0012]

[FIG. 1] FIG. 1A to FIG. 1I are cross-sectional views showing stack structures of display apparatuses according to Example 1 to Example 9.

[FIG. 2] FIG. 2A to FIG. 2F are cross-sectional views showing stack structures of display apparatuses according to Example 10 to Example 15.

[FIG. 3] FIG. 3 is a cross-sectional view showing an outline of a stack structure of a liquid crystal panel 31.

[FIG. 4] FIG. 4 is a schematic view in a case of applying a display apparatus according to an embodiment of the present invention as an automotive display apparatus.

[FIG. 5] FIG. 5A to FIG. 5C are cross-sectional views showing stack structures of display apparatuses according to Comparative example 1 to Comparative example 3.

DESCRIPTION OF EMBODIMENTS

[0013] A description is made below of an embodiment of the present invention as well as comparative embodiments with reference to the drawings. In a description of the drawings, the same reference numerals are assigned to the same portions.

[0014] For example, as shown in FIG. 1A, a display apparatus at least includes: a liquid crystal panel (LCD) 31; a touch panel (electrostatic capacitance T/P) 34 placed above the liquid crystal panel 31; a base material layer (surface base material) 37 stacked on the touch panel 34; and an adhesive layer (depolarizing adhesive) 36 interposed between the touch panel 34 and the base material layer 37. Then, at least one of the base material layer 37 and the adhesive layer 36 contains fiber having properties to eliminate polarization.

[0015] For example, the liquid crystal panel 31 is a general transmission-type liquid crystal panel that performs display by partially cutting off and transmitting light emitted from a light source such as a backlight and a front light. An outline of a stack structure of the liquid crystal panel will be described later with reference to FIG. 3.

[0016] The touch panel 34 is a position detection device, which senses information about a screen position touched by an operator, the screen position belonging to a display screen of the liquid crystal panel 31, and outputs the sensed information as an information signal to an outside, and is placed on an output side of a displayed image displayed by the liquid crystal panel 31. As a placement example of the touch panel 34, the example is included that between the touch panel 34 and the liquid crystal panel 31, a gas layer AL, which has a uniform thickness and is filled with inert gas such as air and rare gas, is interposed. In this case, at least one of between the touch panel 34 and the gas layer AL and between the liquid crystal panel 31 and the gas layer AL, an anti-reflection film (AR film) 32 or 33 may be interposed, or alternatively, an anti-glare film (AG film) 44 may be interposed as shown in FIG. 2A. In such a way, a reflection on an interface with the gas layer AL and a glare to the liquid crystal panel 31 can be suppressed.

[0017] As another example of placing the touch panel 34, as shown in each of FIG. 1D to FIG. 1F, the example is included that a bonding agent 41 is interposed between the touch panel 34 and the liquid crystal panel 31. In this case, the touch panel 34 is directly stacked on the liquid crystal panel 31 while interposing the bonding agent 41 therebetween, and the gas layer AL is not interposed between the touch panel 34 and the liquid crystal panel 31.

[0018] As shown in FIG. 1A and FIG. 2A, as the touch panel, for example, such an electrostatic capacitance-type touch panel 34 or a resistance film-type touch panel (resistance film T/P) 45 can be used. However, the touch panel is not limited to the touch panels according to these operation principles, and touch panels according to other operation principles may be used.

[0019] In usual, the liquid crystal panel 31 has a linear polarization plate located more on the output side than the liquid crystal layer, and accordingly, the displayed image outputted from the liquid crystal panel 31 is linearly polarized. Specifically, as shown in FIG. 3, the liquid crystal layer 14 is sandwiched by a front surface electrode 15 and a back surface electrode 13, and a linear polarization plate (horizontal polarization plate) 12 and a linear polarization plate (vertical polarization plate) 16 are arranged on front and back surfaces thereof, respectively. A light source 11 is arranged on the back surface of the linear polarization plate 12. Hence, the displayed image of the liquid crystal panel 31 is formed of light, which has transmitted through the linear polarization plate 16 arranged more on the output side than the liquid crystal layer 14, that is, linearly polarized light.

[0020] Returning to FIG. 1A, in a case of using the touch panel 34, sometimes, a face and clothes reflect on the display screen owing to internal reflection and back surface reflection thereof, and the touch panel 34 is felt glaring in a case where intense light such as sunlight is incident thereonto. In order to reduce such reflection on the screen and glaring thereof, in some case, a linear polarization layer 35 is provided on an output side of the touch panel 34. In this case, the displayed image outputted from the touch panel 34 will be linearly polarized. As described above, the displayed image made of the light transmitting through the liquid crystal panel 31 and the touch panel 34 is linearly polarized.

[0021] The linear polarization layer 35 has a function to transmit only light, which vibrates in a certain specific direction, among pieces of light, which vibrate in every direction. The light outputted from the liquid crystal panel 31 is linearly polarized. Therefore, the linear polarization layer 35 arranged on the touch panel 34 is arranged in an orientation of transmitting the polarization from the liquid crystal panel 31 side, whereby a part of a light component incident from the light side can be cut off without lowering brightness of the displayed image displayed on the liquid crystal panel 31. As described above, the linear polarization layer 35 is one to be used according to needs in order to further improve the visibility, and in usual, is composed of a linear polarization film. A thickness of this linear polarization film is 25 to 200 μm .

[0022] As an example, the adhesive layer 36 is made of a depolarizing adhesive containing fiber (hereinafter, referred to as "depolarizing fiber") having properties to eliminate the polarization. A parent material of the depolarizing adhesive is a transparent adhesive agent including acrylic-based, epoxy-based, phenol-based, emulsion-based and silicon-based adhesives. In such a way, an adhesive composition excellent in transparency and durability can be obtained.

[0023] The depolarizing fiber is an aggregate of cellulose nano-fiber. The cellulose nano-fiber contains a hydroxyl group, and a part of the hydroxyl group is chemically modified. A width of the polarization solving fiber is 10 nm or more to 50 nm or less, and an aspect ratio of the polarization solving fiber is 1 or more to 200 or less.

[0024] Such chemical modification of the cellulose fiber is not particularly limited as long as the cellulose fiber is dispersed into the parent material (transparent adhesive or transparent resin) to an extent to which transparency required as a transparent optical film is obtained. As a group for chemical modification, for example, a hydrophobic functional group is preferable. And the cellulose fibers are preferable, in which an alkyl group, and particularly, an acetyl group, a phenyl group, an epoxy group, a maleate functional group and a carboxyl group are substituted for the hydroxyl group on a surface of the cellulose fiber.

[0025] Note that the chemical modification can be confirmed by FT-IR analysis. For example, in a case where the cellulose nano-fiber is chemically modified by the acetyl group, then the acetyl group has a chemical structure of CH_3CO , and absorption (stretching vibrations) of a $\text{C}=\text{O}$ double bond is at 1650 cm^{-1} , and accordingly, in a case where a peak develops at this frequency as a result of the FT-IR analysis, then it can be confirmed that the cellulose nano-fiber is modified by the acetyl group. In this case, the cellulose fiber before such acetyl formation includes many hydroxyl groups ($-\text{OH}$ groups), but does not include the acetyl group, and accordingly, a difference therebetween is obvious.

[0026] Moreover, it is also preferable to mix the cellulose nano-fiber with an organic acid as a dispersant. In particular, it is a preferable form, in which the cellulose nano-fiber is mixed with a dispersant including sulfonic acid, a phosphoric acid and carboxylic acid, whereby the dispersant is unevenly distributed on an interface between the surface of the cellulose fiber and the parent material (transparent adhesive or transparent resin).

[0027] As the cellulose nano-fiber, various ones known in public can be used. For example, vegetable cellulose and bacteria cellulose are mentioned, and in particular, vegetable cellulose obtained from wood flour is suitable. Moreover, these may be used in combination in order to increase strength and an elastic modulus.

[0028] The depolarizing adhesive can be produced by molding one, in which the depolarizing fiber is uniformly dispersed into the transparent adhesive as a base material, into a plate shape or a film shape. A method of the production is not particularly limited. However, examples of methods of the production include the methods, which are application, dip coating, spraying, transfer coating, and the like of the adhesive onto nonwoven fabric made of the depolarizing fiber.

[0029] A blend ratio of the depolarizing fiber just needs to be 1 to 95 weight% with respect to a total amount of the adhesive layer 36. Preferably, the blend ratio is 30 to 90 weight%.

[0030] A production method of the adhesive layer 36 includes a physical surface smoothing treatment step.

[0031] As shown in FIG. 1B, the adhesive layer 39 is made of an acrylic adhesive that does not contain the polarization solving fiber.

[0032] As an example, the base material layer 40 is made of a depolarizing base material containing the depolarizing fiber. The parent material that composes the depolarizing base material is transparent resin such as polycarbonate resin, methacrylic resin, PET resin, polystyrene resin, polyolefin resin including a cyclic structure, and glass. In such a way, a base material composition excellent in transparency and durability can be obtained.

[0033] Depolarizing fiber, which is included in the base material 40, and a production method thereof are the same as those of the depolarizing fiber, which is included in the adhesive layer 36, and the production method thereof, and a description thereof is omitted.

[0034] The depolarizing base material can be produced by molding one, in which the depolarizing fiber is dispersed into the transparent resin, into a plate shape or a film shape. A method of the production is not particularly limited: however, for example, there can be used a method, in which the depolarizing fiber is added to molten or fused transparent resin, and thereafter, the depolarizing base material is molded by using an extrusion molding method, a solution casting method, a calendar method, and the like. Desirably, a blend ratio of the depolarizing fiber in the depolarizing base material is 1 weight% or more to 95 weight% or less, and more preferably, 30 weight % or more to 90 weight% or less.

[0035] A production method of the depolarizing base material includes a physical surface smoothing treatment step.

[0036] As shown in FIG. 1A, the base material layer 37 is made of a front surface base material that does not contain the depolarizing fiber.

[0037] As combination examples of the adhesive layers 36 and 39 and the base material layers 37 and 40, there are mentioned: a combination of the depolarizing adhesive (36) and the front surface base material (37), which is shown in FIG. 1A; a combination of the acrylic adhesive (39) and the depolarizing base material (40), which is shown in FIG. 1B; and a combination of the depolarizing adhesive (36) and the depolarizing base material (40), which is shown in FIG. 1C. The latter is an embodiment of the invention wherein the depolarizing fiber is contained in both of the adhesive layer 36 and the base material layer 40. In such a way, the depolarizing fiber eliminates the linear polarization of the displayed images outputted from the liquid crystal panels 31 and the touch panels 34, and can thereby enhance the visibility of the displayed images.

[0038] Moreover, the adhesive layers 36 and 39 and the base material layers 37 and 40 are located more on the output side of the displayed images than the polarization plate 16 which is included in the liquid crystal panel 31. In such a way, the polarization can be suppressed from being generated again on the displayed images which have transmitted through the adhesive layers 36 and 39 and the base material layers 37 and 40.

[0039] In a case where at least one of the adhesive layers 36 and 39 and the base material layers 37 and 40 contains the depolarizing fiber, a concentration of the depolarizing fiber may be set from 5 capacity % up to 40 capacity %. If such a fiber concentration stays within this range, then the depolarizing properties and the transparency can be made compatible with each other.

[0040] A thickness of a member that contains the depolarizing fiber may be set at 10 μm or more to 50 μm or less. If the thickness of the member stays within this range, then the haze can be suppressed to be low, and a loss of transmittance can be reduced. Further, if the thickness of the member stays within above range, unevenness of the thickness can be reduced, and such a displayed image can be sharpened. Here, in a case where only either of the adhesive layers 36 and 39 and the base material layers 37 and 40 contain the depolarizing fiber, then the member that contains the depolarizing fiber is either one of the adhesive layer 36 and the base material layer 40. Moreover, in the case of the invention where both of the adhesive layer 36 and the base material layer 40 contain the depolarizing fiber, then the member that contains the depolarizing fiber is the adhesive layer 36 and the base material layer 40.

[0041] As shown in FIG. 1A and FIG. 2A, the display apparatus further includes an anti-reflection film (AR film) 38 or an anti-glare film (AG film) 46, which is stacked on the base material layer 37 or 40. The AR film 38 has a multi-layer structure in which a thickness and a refractive index are controlled, and then cancels pieces of reflected light on an outermost front layer of the multi-layer structure and interfaces of the respective layers thereof one another, and thereby reduces the reflection on the front surface. Moreover, as the AR film 38, a moth-eye film is also applicable as well as such a multi-layer structure type.

[0042] Moreover, as shown in FIG. 1G and FIG. 2D, two phase difference films 42 and 43 may be inserted so as to sandwich the front and back surfaces of the touch panel 34 or 45. In this case, the phase difference film 42 is directly pasted onto the back surface of the touch panel 34, and the phase difference film 43 is directly pasted onto the front surface of the touch panel 34, and the linear polarization layer 35 is stacked on the phase difference film 43. The phase difference films 42 and 43 are mainly manufactured in such a manner that dicotic liquid crystal is fixed to a TAC film in a specific orientation, followed by coating. As the phase difference films 42 and 43, for example, 1/4 phase difference films provided with a function to shift a phase of transmitting light by 1/4 may be used. The 1/4 phase difference films are pasted onto the linear polarization layer 35, whereby circular polarization films are formed. Hence, in this case, displayed images formed by the pieces of light, which have transmitted through the linear polarization layer 35 and the phase difference film 43, are circularly polarized.

[0043] In an event of manufacturing the display apparatus, first, layers on the gas layer AL or the bonding agent 41, the layers excluding the liquid crystal panel 31, the AR film 32 and the AG film 44, are stacked on one another. As a stacking method, for example, there are mentioned: a pasting method, a layer forming method and the like, which include mutual film pasting by a roller, insert molding, vacuum molding, injection press molding, spray coating, evaporation, sputtering, dipping, and gravure coating. In such a manner as described above, the respective optical films described above are pasted onto the touch panel 34, whereby stacked bodies LB1 and LB2 shown in FIG. 1A and FIG. 1D are fabricated. Thereafter, onto the liquid crystal panel 31, the stacked bodies LB1 and LB2 are placed or bonded while interposing the gas layer AL therebetween by using the bonding agent 41, and are thereby brought into intimate contact therewith. In such a way, the display apparatus can be manufactured. In accordance with this manufacturing method, the number of parts count is reduced since the structure is simple, and moreover, a film forming process is also simplified in the event of the manufacture, and accordingly, the display device can be manufactured at low cost.

[0044] As shown in FIG. 4, the display apparatus according to the embodiment of the present invention is applicable as an automotive display apparatus such as a display apparatus 22 which a navigation or audio/visual system mounted on a vehicle includes, and as an in-meter display apparatus 21 mounted on a dashboard in front of a driver's seat of the vehicle.

[0045] It is highly frequent that a driver of the vehicle wears sunglasses. In a case where drive information is presented by the displayed image, which is linearly polarized, to the driver who wears sunglasses having a polarization function, if the polarization of the sunglasses and the polarization of the displayed image forms the relationship of the crossed

Nicols, then a quantity of the transmission light is lowered to a large extent, and the visibility is significantly lowered. As opposed to this, if the drive information is presented by the displayed image, in which the linear polarization is eliminated, by using the display apparatus according to the invention, then the lowering of the quantity of transmission light and of the visibility can be suppressed even if the driver wears the sunglasses having the polarization function.

(Evaluation method of visibility)

[0046] A light environment laboratory, in which a light source with illuminance of more than 5000 lx is placed, is used as a test place, and an evaluator who wears the sunglasses having the polarization function sits down on a driver's seat of an actual vehicle. On a display screen attached onto a center console in the actual vehicle, a menu screen of a car navigation system is displayed. The display screen was attached at a position, which is downward by 30° from an eyes' position of the evaluator, at a plane angle of 35° with respect to a vehicle traveling direction, and at a sight distance of approximately 700 mm. Brightness and contrast of the display screen are set at defaults. In the light environment laboratory, a light source is placed in a direction, which is upward by 20° from the evaluator and left rearward by 60° in the vehicle. Note that it is assumed that the polarization direction of the displayed image outputted from the display apparatus and the polarization direction of the sunglasses are in a state of the crossed Nicols.

[0047] Under the above-described conditions, visibilities of display apparatuses according to Examples 1 to 15, of which only Examples 3, 6, 9, 12, and 15 fall within the scope of the appended claims, and Comparative examples 1 to 3 were evaluated by four evaluators based on the following evaluation criteria.

[0048]

5: Signs up to details (small letters on a map) can be determined.

4: Among signs, large letters (menu) can be clearly recognized.

3: Among signs, large letters (menu) can be barely recognized.

2: Among signs, large diagrams (road and the like on a map) can be barely recognized.

1: Signs can never be determined.

(depolarizing fiber (pretreatment))

[0049] As a raw material, one is used, which is obtained by performing dispersion treatment for a 1-wt% aqueous solution of CEOLUS RC-591 made by Asahi Kasei Chemicals Corporation, which is a colloidal grade of crystallite cellulose, by using a high-pressure homogenizer for 10 minutes. To 500 ml of this solution, there were added: 25 mL of acetic anhydride; 400 mL of acetic acid; 500 mL of toluene; and 2.5 mL of perchloric acid, and a reaction was caused for a resultant mixture at room temperature for 1 hour, whereby a front surface of the cellulose was converted into acetyl. Water-containing fiber thus obtained was adjusted into a suspension in which a fiber content was 0.1 weight%, water thereof was removed by filtration, and the fiber was formed into a sheet shape. Moreover, the sheet-shaped fiber was hot-pressed at 55° for 72 hours with a pressure of 15 kPa, and water was removed therefrom, whereby dry fiber sheet with a thickness of 50 μm was formed.

(Preparation of depolarizing adhesive)

[0050] The dry fiber sheet obtained by the above-described method was soaked into a UV curing adhesive FINETAC CT6010 (made by DIC Corporation) under a reduced pressure, and was left standing still for 12 hours. Thereafter, by using a belt conveyer type UV irradiation apparatus (Fusin F300 and LC6B Bench Top Conveyor made by Fusion Systems Co., Ltd.), the fiber sheet impregnated with the resin was irradiated with ultraviolet rays, and was cured. A total irradiation energy amount at this time was 5 J/cm². In such a way, the depolarizing adhesive was prepared.

(Preparation of depolarizing base material)

[0051] The dry fiber sheet obtained by the above-described method was soaked into photoinitiator-containing acrylic resin (TCDDMA) under a reduced pressure, and was left standing still for 12 hours. Thereafter, by using a belt conveyer type UV irradiation apparatus (Fusin F300 and LC6B Bench Top Conveyor made by Fusion Systems Co., Ltd.), the fiber sheet impregnated with the resin was irradiated with ultraviolet rays, and was cured. A total irradiation energy amount at this time was 20 J/cm². Thereafter, the fiber sheet was annealed (subjected to heat treatment) at 160°C for two hours in a vacuum, and the depolarizing base material was prepared.

(Example 1)

[0052] FIG. 1A shows a cross-sectional configuration of the display apparatus according to Example 1. The liquid crystal panel 31 has a configuration shown in FIG. 3, and above the output side of the liquid crystal panel 31, the touch panel 34 of the electrostatic capacitance type is arranged while interposing the gas layer AL therebetween. Onto the interface between the liquid crystal panel 31 and the gas layer AL, and onto the interface between the touch panel 34 and the gas layer AL, the AR films 32 and 33 are pasted, respectively. In such a way, the reflection of light on the interface between the liquid crystal panel 31 and the gas layer AL and on the interface between the touch panel 34 and the gas layer AL is suppressed.

[0053] On the touch panel 34, the linear polarization layer 35 is stacked. Above the linear polarization layer 35, the base material layer 37 is stacked while interposing the adhesive layer 36 therebetween. In Example 1, the adhesive layer 36 is composed of the depolarizing adhesive containing the depolarizing fiber, and the base material layer 37 is made of the front surface base material that does not contain the depolarizing fiber. The AR film 38 is stacked on the base material layer 37.

[0054] In Example 1, the linear polarization film for use in the linear polarization layer 35 is one imparted with absorption dichroism in such a manner that, after a base material film made of PVA (polyvinyl alcohol) is dyed with iodine or organic dye, the base material film is uniaxially stretched to approximately two to three times to thereby array molecules of the dye regularly. This linear polarization film exerts a function to reduce the light transmittance without changing a color tone thereof. In Example 1, as the linear polarization layer 35, AG150 made by Nitto Denko Corporation is used. Moreover, in Example 1, as the AR films 32, 33 and 38, three-layer AR films of MFAR-Roll made by MeCan Imaging Inc. are used.

(Example 2)

[0055] FIG. 1B shows a cross-sectional configuration of the display apparatus according to Example 2. In Example 2, the adhesive layer 39 is composed of the acrylic adhesive that does not contain the depolarizing fiber, and the base material layer 40 is made of the depolarizing base material that contains the depolarizing fiber. Other points are the same as those of FIG. 1A, and a description thereof is omitted.

(Example 3)

[0056] FIG. 1C shows a cross-sectional configuration of the display apparatus according to Example 3. In Example 3, the adhesive layer 36 is composed of the depolarizing adhesive containing the depolarizing fiber, and the base material layer 40 is composed of the depolarizing base material containing the depolarizing fiber. That is to say, both of the base material layer 40 and the adhesive layer 36 contain the depolarizing fiber. Other points are the same as those of FIG. 1A, and a description thereof is omitted.

(Example 4)

[0057] FIG. 1D shows a cross-sectional configuration of the display apparatus according to Example 4. In Example 4, on the output side of the liquid crystal panel 31, the touch panel 34 of the electrostatic capacitance type is directly stacked while interposing the bonding agent 41 therebetween, and the gas layer AL is not interposed therebetween. Hence, the AR films 32 and 33 for preventing the reflection are not interposed, either. In Example 4, as the bonding agent 41, a UV-curing acrylic bonding material (KCPF3001 made by Foresight) is used. Moreover, above the touch panel 34, the base material layer 37 that does not contain the depolarizing fiber is stacked while interposing therebetween the adhesive layer 36 that contains the depolarizing fiber. The linear polarization layer 35 is not interposed between the touch panel 34 and the adhesive layer 36. Other points are the same as those of FIG. 1A, and a description thereof is omitted.

(Example 5)

[0058] FIG. 1E shows a cross-sectional configuration of the display apparatus according to Example 5. In Example 5, the adhesive layer 39 is composed of the acrylic adhesive that does not contain the depolarizing fiber, and the base material layer 40 is composed of the depolarizing base material that contains the depolarizing fiber. Other points are the same as those of FIG. 1D, and a description thereof is omitted.

(Example 6)

[0059] FIG. 1F shows a cross-sectional configuration of the display apparatus according to Example 6. In Example 6,

the adhesive layer 36 is composed of the depolarizing adhesive containing the depolarizing fiber, and the base material layer 40 is composed of the depolarizing base material containing the depolarizing fiber. That is to say, both of the base material layer 40 and the adhesive layer 36 contain the depolarizing fiber. Other points are the same as those of FIG. 1D, and a description thereof is omitted.

(Example 7)

[0060] FIG. 1G shows a cross-sectional configuration of the display apparatus according to Example 7. The display apparatus according to Example 7 further includes the two phase difference films 42 and 43 inserted so as to sandwich the front and back surfaces of the touch panel 34 of the electrostatic capacitance type. Other points are the same as those of FIG. 1A, and a description thereof is omitted.

(Example 8)

[0061] FIG. 1H shows a cross-sectional configuration of the display apparatus according to Example 8. In Example 8, the adhesive layer 39 is composed of the acrylic adhesive that does not contain the depolarizing fiber, and the base material layer 40 is made of the depolarizing base material that contains the depolarizing fiber. Other points are the same as those of FIG. 1G, and a description thereof is omitted.

(Example 9)

[0062] FIG. 1I shows a cross-sectional configuration of the display apparatus according to Example 9. In Example 9, the adhesive layer 36 is composed of the depolarizing adhesive containing the depolarizing fiber, and the base material layer 40 is made of the depolarizing base material containing the depolarizing fiber. That is to say, both of the base material layer 40 and the adhesive layer 36 contain the depolarizing fiber. Other points are the same as those of FIG. 1G, and a description thereof is omitted.

(Example 10)

[0063] FIG. 2A shows a cross-sectional configuration of the display apparatus according to Example 10. On the output side of the liquid crystal panel 31, the touch panel 45 of the resistance film type is placed while interposing the gas layer AL therebetween. Onto the interface between the liquid crystal panel 31 and the gas layer AL, the AG film 44 is pasted.

[0064] On the touch panel 45, the linear polarization layer 35 is stacked. Above the linear polarization layer 35, the base material layer 37 is stacked while interposing the adhesive layer 36 therebetween. In Example 10, the adhesive layer 36 is composed of the depolarizing adhesive that contains the depolarizing fiber, and the base material layer 37 is made of the front surface base material that does not contain the depolarizing fiber. The AG film 46 is stacked on the base material layer 37.

(Example 11)

[0065] FIG. 2B shows a cross-sectional configuration of the display apparatus according to Example 11. In Example 11, the adhesive layer 39 is composed of the acrylic adhesive that does not contain the depolarizing fiber, and the base material layer 40 is made of the depolarizing base material that contains the depolarizing fiber. Other points are the same as those of FIG. 2A, and a description thereof is omitted.

(Example 12)

[0066] FIG. 2C shows a cross-sectional configuration of the display apparatus according to Example 12. In Example 12, the adhesive layer 36 is composed of the depolarizing adhesive containing the depolarizing fiber, and the base material layer 40 is made of the depolarizing base material containing the depolarizing fiber. That is to say, both of the base material layer 40 and the adhesive layer 36 contain the depolarizing fiber. Other points are the same as those of FIG. 2A, and a description thereof is omitted.

(Example 13)

[0067] FIG. 2D shows a cross-sectional configuration of the display apparatus according to Example 13. In comparison with FIG. 1A, the display apparatus according to Example 13 is different therefrom in further including the two phase difference films 42 and 43 inserted so as to sandwich the front and back surfaces of the touch panel 45; however, is

common thereto in other points. Moreover, in comparison with FIG. 1G, the display apparatus according to Example 13 is different therefrom in using the touch panel 45 of the resistance film type in place of the touch panel 34 of the electrostatic capacitance type; however, is common thereto in other points.

(Example 14)

[0068] FIG. 2E shows a cross-sectional configuration of the display apparatus according to Example 14. In Example 14, the adhesive layer 39 is composed of the acrylic adhesive that does not contain the depolarizing fiber, and the base material layer 40 is made of the depolarizing base material that contains the depolarizing fiber. Other points are the same as those of FIG. 2D, and a description thereof is omitted.

(Example 15)

[0069] FIG. 2F shows a cross-sectional configuration of the display apparatus according to Example 15. In Example 15, the adhesive layer 36 is composed of the depolarizing adhesive containing the depolarizing fiber, and the base material layer 40 is composed of the depolarizing base material containing the depolarizing fiber. That is to say, both of the base material layer 40 and the adhesive layer 36 contain the depolarizing fiber. Other points are the same as those of FIG. 2D, and a description thereof is omitted.

(Comparative example 1)

[0070] FIG. 5A shows a cross-sectional configuration of the display apparatus according to Comparative example 1. In Comparative example 1, the adhesive layer 39 is composed of the acrylic adhesive that does not contain the depolarizing fiber, and the base material layer 37 is made of the front surface base material that does not contain the depolarizing fiber. That is to say, the depolarizing fiber is not contained in either of the base material layer 40 and the adhesive layer 36. Moreover, in comparison with the display apparatus of FIG. 1A, the display apparatus according to Comparative example 1 is different in using moth-eye films 51, 52 and 53 in place of the AR films 32, 33 and 38 having the multi-layer structure. Other points are the same as those of FIG. 1A, and a description thereof is omitted.

(Comparative example 2)

[0071] FIG. 5B shows a cross-sectional configuration of the display apparatus according to Comparative example 2. Also in Comparative example 2, the depolarizing fiber is not contained in either of the base material layer 40 and the adhesive layer 36 in a similar way to Comparative example 1. Moreover, in comparison with the display apparatus of FIG. 1D, the display apparatus according to Comparative example 1 is different therefrom in using the moth-eye film 53 in place of the AR film 38 having the multi-layer structure. Other points are the same as those of FIG. 1D, and a description thereof is omitted.

(Comparative example 3)

[0072] FIG. 5C shows a cross-sectional configuration of the display apparatus according to Comparative example 3. Also in Comparative example 3, the depolarizing fiber is not contained in either of the base material layer 40 and the adhesive layer 36 in a similar way to Comparative example 1. Other configurations are the same as those of FIG. 2A, and a description thereof is omitted.

(Evaluation test results of Examples and Comparative examples)

[0073] Table 1 shows the configurations and evaluation test results of the display apparatuses according to Examples 1 to 15 and Comparative examples 1 to 3, which are described above. A polarization solution degree in Table 1 represents a solution degree of the linear polarization of the displayed image outputted from the display apparatus. As shown in Table 1, it is understood that evaluations of the contrast, polarization solution degree and visibility of the displayed image are increased in the display apparatuses according to Examples 1 to 15, in each of which at least one of the adhesive layer and the base material layer contains the depolarizing fiber, in comparison with the display apparatuses according to Comparative examples 1 to 3, in each of which either of the adhesive layer and the base material layer does not contain the depolarizing fibre. In Table 1, "polarization reduction degree" is called "polarization solution degree", "depolarizing adhesive" is called "polarization solving adhesive", and "depolarizing base material" is called "polarization solving base material".

[Table 1-1]

Category		Configuration (in order of front layer from left)										Evaluation test result (at time of crossed Nicols)				
		AR, AG	Base material	Adhesive	Linear polarization	Phase difference	Touch panel	Phase difference	AR	Bonding	AR	LCD	Contrast	Polarization solution degree (%)	Haze (%)	Visibility (5-step evaluation)
Example	1	AR	Acrylic	Polarization solving adhesive	Present	None	Electrostatic capacitance type	None	AR	None	AR	Present	2.4	27	33	4
	2	AR	Polarization solving base material	Acrylic adhesive	Present	None		None	AR	None	AR	Present	2.5	29	42	4
	3	AR	Polarization solving base material	Polarization solving adhesive	Present	None		None	AR	None	AR	Present	3	33	41	4
	4	AR	Acrylic	Polarization solving adhesive	None	None		None	None	Present	None	Present	2.3	28	-	4
	5	AR	Polarization solving base material	Acrylic adhesive	None	None		None	None	Present	None	Present	2.7	31	-	4
	6	AR	Polarisation solving base material	Polarization solving adhesive	None	None		None	None	Present	None	Present	3.2	34	-	4
	7	AR	Acrylic	Polarization solving adhesive	Present	Present		Present	AR	None	AR	Present	3.5	44	34	5
	8	AR	Polarisation solving base material	Acrylic adhesive	Present	Present		Present	AR	None	AR	Present	3.5	42	36	5

5
10
15
20
25
30
35
40
45
50
55

(continued)

Category	Configuration (in order of front layer from left)										Evaluation test result (at time of crossed Nicols)				
	AR, AG	Base material	Adhesive	Linear polarization	Phase difference	Touch panel	Phase difference	AR	Bonding	AR	LCD	Contrast	Polarization solution degree (%)	Haze (%)	Visibility (5-step evaluation)
9	AR	Polarization solving base material	Polarization solving adhesive	Present	Present		Present	AR	None	AR	Present	4	48	39	5

[Table 1-2]

Category		Configuration (in order of front layer from left)										Evaluation test result (at time of crossed Nicols)				
		AR, AG	Base material	Adhesive	Linear polarization	Phase difference	Touch panel	Phase difference	AR	Bonding	AR	LCD	Contrast	Polarization solution degree (%)	Haze (%)	Visibility (5-step evaluation)
Example	10	AG	Acrylic	Polarization solving adhesive	Present	None	Resistance film type	None	None	None	Present	1.28	27	69	3	
	11	AG	Polarization solving base material	Acrylic adhesive	Present	None		None	None	None	Present	1.32	31	68	2	
	12	AG	Polarization solving base material	Polarization solving adhesive	Present	None		None	None	None	Present	1.38	33	80	2	
	13	AR	Acrylic	Polarization solving adhesive	Present	Present		Present	AR	None	AR	Present	1.39	30	66	3
	14	AR	Polarization solving base material	Acrylic adhesive	Present	Present		Present	AR	None	AR	Present	1.43	40	68	3
	15	AR	Polarization solving base material	Polarization solving adhesive	Present	Present		Present	AR	None	AR	Present	1.5	38	71	2
Comparative example	1	AR	Acrylic	Acrylic adhesive	Present	None	Electrostatic capacitance type	None	AR	None	Present	0.02	0	4	1	
	2	AR	Acrylic	Acrylic adhesive	None	None		None	None	Present	None	Present	0.02	0	-	1
	3	AG	Acrylic	Acrylic adhesive	Present	None	Resistance film type	None	None	None	Present	0.01	0	55	1	

[0074] As described above, in accordance with the embodiment of the present invention, the following functions and effects are obtained.

[0075] In accordance with the embodiment of the invention, both of the base material layer 36 and the adhesive layer 40 contains the depolarizing fiber whereby the depolarizing fiber eliminates the linear polarization of the displayed image, and can thereby enhance the visibility of the displayed image.

[0076] The depolarizing fiber is contained in both of the base material layer 36 and the adhesive layer 40, and accordingly, it becomes unnecessary to stack a new layer for eliminating the polarization, and manufacturing cost can be suppressed to be low. At the same time, it becomes possible to thin the whole of the layers, and the light transmittance can be enhanced by reducing the haze. Hence, image quality of the displayed image is improved.

[0077] The depolarizing fiber is contained in both of the base material layer 36 and the adhesive layer 40, and accordingly, irregularities of the fiber do not appear on the outermost front surface of the display apparatus. Therefore, a white blur can be suppressed by reducing the haze. Hence, the image quality of the displayed image is improved.

[0078] The depolarizing fiber is an aggregate of the cellulose nano-fiber, the cellulose nano-fiber contains a hydroxyl group, a part of the hydroxyl group is chemically modified, a width of the fiber is 10 nm or more to 50 nm or less, and an aspect ratio of the fiber is 1 or more to 200 or less. By satisfying these conditions, such an elimination rate of the linear polarization and the visibility of the displayed image are further enhanced.

[0079] The base material layers 36 and 39 and the adhesive layers 37 and 40 are located more on the output side of the displayed image than the linear polarization plate which the liquid crystal panel 31 includes. In such a way, the linear polarization can be suppressed from being generated again on the light which has transmitted through the base material layers 36 and 39 and the adhesive layers 37 and 40.

[0080] The blend ratio of the depolarizing fiber is 1 weight% or more to 95 weight% or less with respect to the base material having the depolarizing properties, whereby a range of loading, which is optimum for striking a balance between the depolarizing properties and the transparency, can be set.

[0081] The thickness of the member that contains the depolarizing fiber is 10 μm or more to 50 μm or less, whereby the transmittance can be enhanced by reducing the haze. Moreover, at the same time, the unevenness of thickness is reduced, and the displayed image can be sharpened.

[0082] The linear polarization layer 35 and the phase difference film 43 are interposed between the touch panels 34 and 45 and the adhesive layers 37 and 40, whereby the displayed image is circularly polarized, and accordingly, the polarization solution degree and the contrast of the displayed image are enhanced, and at the same time, the linear polarization layer 35 can effectively cut off the component of the light incident from the outside.

[0083] In an embodiment of the invention where the gas layer AL is interposed between the liquid crystal panel 31 and the touch panels 34 and 45, the light reflected on the interfaces with the gas layer AL is increased, and accordingly, it is necessary to enhance the degree of the linear polarization in the linear polarization layer 35. Hence, in this embodiment, the depolarizing fiber is contained in both of the base material layer 36 and the adhesive layer 40, whereby the linear polarization by the linear polarization layer 35 can be effectively eliminated.

[0084] In an embodiment of the invention where the touch panel 45 is the touch panel of the resistance film type, the light reflected in the air layer contained in the inside of the touch panel 45 is increased, and accordingly, it is necessary to enhance the degree of the linear polarization in the linear polarization layer 35. Hence, also in this embodiment, the depolarizing fiber is contained in both of the base material layer 36 and the adhesive layer 40, whereby the linear polarization by the linear polarization layer 35 can be effectively eliminated.

[0085] In the case where the display apparatus according to the embodiment of the invention is applied to the automotive display apparatus, the drive information is presented by the displayed image in which the linear polarization is eliminated, and even if the driver wears the sunglasses having the polarization function, the lowering of the transmission light quantity and visibility can be suppressed.

[0086] In the event of manufacturing the display apparatus according to the embodiment of the invention, first, the base material layer 40 is pasted onto the touch panels 34 and 45 while interposing the adhesive layer 36 therebetween, whereby each of the stacked bodies LB1 and LB2 is formed. Thereafter, each of the stacked bodies LB1 and LB2 is placed onto the display screen of the liquid crystal panel 31. In accordance with this manufacturing method, the number of parts count is reduced since the structure is simple, and moreover, the film forming process is also simplified in the event of the manufacture, and accordingly, the display device can be manufactured at low cost.

[0087] The description has been made as above of the embodiment and Examples 1 to 15; however, it should not be understood that the description and the drawings, which form a part of this disclosure, limit this invention. From this disclosure, varieties of alternative embodiments, examples and operation technologies will be obvious for those skilled in the art.

[0088] In accordance with the display apparatus, the automotive display apparatus and the method for manufacturing the display apparatus according to the present invention, the depolarizing properties of the displayed image are enhanced, whereby the visibility of the displayed image can be enhanced.

REFERENCE SIGNS LIST

[0089]

5	16	LINEAR POLARIZATION PLATE
	31	LIQUID CRYSTAL PANEL
	34, 45	TOUCH PANEL
	36, 39	ADHESIVE LAYER
	37, 40	BASE MATERIAL LAYER
10	35	LINEAR POLARIZATION LAYER
	AL	GAS LAYER
	LB1, LB2	STACKED BODY

15 **Claims**

1. A display apparatus comprising:

20 a liquid crystal panel (31);
a base material layer (40) stacked on the liquid crystal panel (31); and
an adhesive layer (39) interposed between the liquid crystal panel (31) and the base material layer (37,40),
wherein both of the base material layer (40) and the adhesive layer (36) contain fiber having properties to
eliminate polarization,
the fiber having the properties to eliminate the polarization is an aggregate of cellulose nano-fiber,
25 the cellulose nano-fiber contains a hydroxyl group,
a part of the hydroxyl group is chemically modified,
a width of the fiber is 10 nm or more to 50 nm or less, and
an aspect ratio of the fiber is 1 or more to 200 or less.

30 2. The display apparatus according to claim 1 further comprising a touch panel (34) interposed between the liquid
crystal panel (31) and the base material layer (40).

3. The display apparatus according to claim 1 or 2, wherein the liquid crystal panel (31) includes a linear polarization
plate (35) on which the adhesive layer (36) and the base material layer (40) are located.

35 4. The display apparatus according to any one of claims 1 to 3, wherein a blend ratio of the fiber having the properties
to eliminate the polarization is 1 weight% or more to 95 weight% or less with respect to a base material having
depolarizing properties.

40 5. The display apparatus according to any one of claims 1 to 4, wherein a thickness of a member containing the fiber
having the properties to eliminate the polarization is 10 μm or more to 50 μm or less.

6. The display apparatus according to claim 2, further comprising: a linear polarization layer and a phase difference
film, which are interposed between the touch panel (34) and the adhesive layer (36).

45 7. The display apparatus according to claim 2 or 6, wherein a gas layer is interposed between the liquid crystal panel
(31) and the touch panel (34).

8. The display apparatus according to any one of claims 2, 6 and 7, wherein the touch panel (34) is a touch panel of
50 a resistance film type.

9. The display apparatus according to any of claims 1 to 8, wherein the base material layer (40) has a concentration
of the fiber having the properties to eliminate the polarization from 5 capacity% up to 40 capacity% and the adhesive
layer (36) has a concentration of the fiber having the properties to eliminate the polarization from 5 capacity% up
55 to 40 capacity%.

10. An automotive display apparatus, wherein the display apparatus according to any one of claims 1 to 9 is used.

11. A method for manufacturing the display apparatus according to any one of claims 2, and 6 to 9 when depending on claim 2, the method comprising:

forming one stacked body by pasting the base material layer (40) onto the touch panel (34) while interposing the adhesive layer (36) therebetween; and
placing the stacked body on a display screen of the liquid crystal panel (31).

Patentansprüche

1. Anzeigevorrichtung, die Folgendes umfasst:

ein Flüssigkristallfeld (31);
eine Basismaterialschicht (40), die auf das Flüssigkristallfeld (31) gestapelt ist; und
eine Klebeschicht (39), die zwischen dem Flüssigkristallfeld (31) und der Basismaterialschicht (37, 40) angeordnet ist,
wobei:

sowohl die Basismaterialschicht (40) als auch die Klebeschicht (36) eine Faser enthalten, die Eigenschaften aufweist, um Polarisation zu beseitigen,
die Faser, welche die Eigenschaften aufweist, um die Polarisation zu beseitigen, ein Aggregat aus Zellulose-Nanofaser ist,
die Zellulose-Nanofaser eine Hydroxylgruppe enthält,
ein Teil der Hydroxylgruppe chemisch modifiziert ist,
eine Breite der Faser mindestens 10 nm bis maximal 50 nm beträgt, und
ein Seitenverhältnis der Faser mindestens 1 bis maximal 200 beträgt.

2. Anzeigevorrichtung nach Anspruch 1, die des Weiteren ein Berührungsfeld (34) umfasst, das zwischen dem Flüssigkristallfeld (31) und der Basismaterialschicht (40) angeordnet ist.

3. Anzeigevorrichtung nach Anspruch 1 oder 2, wobei das Flüssigkristallfeld (31) eine Linearpolarisationsplatte (35) enthält, auf der sich die Klebeschicht (36) und die Basismaterialschicht (40) befinden.

4. Anzeigevorrichtung nach einem der Ansprüche 1 bis 3, wobei ein Mischungsverhältnis der Faser, die die Eigenschaften aufweist, um die Polarisation zu beseitigen, mindestens 1 Gewicht-% bis maximal 95 Gewicht-% mit Bezug auf ein Basismaterial beträgt, das Entpolarisationseigenschaften aufweist.

5. Anzeigevorrichtung nach einem der Ansprüche 1 bis 4, wobei eine Dicke eines Elements, das die Faser enthält, die die Eigenschaften aufweist, um die Polarisation zu beseitigen, mindestens 10 µm bis maximal 50 µm beträgt.

6. Anzeigevorrichtung nach Anspruch 2, die des Weiteren eine Linearpolarisationsschicht und einen Phasendifferenzfilm umfasst, die zwischen dem Berührungsfeld (34) und der Klebeschicht (36) angeordnet sind.

7. Anzeigevorrichtung nach Anspruch 2 oder 6, wobei eine Gasschicht zwischen dem Flüssigkristallfeld (31) und dem Berührungsfeld (34) angeordnet ist.

8. Anzeigevorrichtung nach einem der Ansprüche 2, 6 und 7, wobei das Berührungsfeld (34) ein Berührungsfeld eines Widerstandfilmtyps ist.

9. Anzeigevorrichtung nach einem der Ansprüche 1 bis 8, wobei die Basismaterialschicht (40) eine Konzentration der Faser, die die Eigenschaften aufweist, um die Polarisation zu beseitigen, von 5 Kapazitäts-% bis 40 Kapazitäts-% aufweist und die Klebeschicht (36) eine Konzentration der Faser, die die Eigenschaften aufweist, um die Polarisation zu beseitigen, von 5 Kapazitäts-% bis 40 Kapazitäts-% aufweist.

10. Automobile Anzeigevorrichtung, wobei die Anzeigevorrichtung nach einem der Ansprüche 1 bis 9 verwendet wird.

11. Verfahren zur Herstellung der Anzeigevorrichtung nach einem der Ansprüche 2 und 6 bis 9, wenn abhängig von Anspruch 2, wobei das Verfahren Folgendes umfasst:

Bilden eines gestapelten Körpers durch Kleben der Basismaterialschicht (40) auf das Berührungsfeld (34), während die Klebeschicht (36) dazwischen angeordnet wird; und
Anordnen des gestapelten Körpers auf einen Anzeigebildschirm des Flüssigkristallfeldes (31).

5

Revendications

1. Appareil d'affichage comprenant :

10 un panneau à cristaux liquides (31) ;
une couche de matériau de base (40) empilée sur le panneau à cristaux liquides (31) ; et
une couche adhésive (39) interposée entre le panneau à cristaux liquides (31) et la couche de matériau de base (37, 40),
15 dans lequel la couche de matériau de base (40) et la couche adhésive (36) contiennent, toutes deux, une fibre ayant des propriétés d'élimination de polarisation,
la fibre ayant les propriétés d'élimination de la polarisation est un agrégat de nanofibres de cellulose,
la nanofibre de cellulose contient un groupe hydroxyle,
une partie du groupe hydroxyle est chimiquement modifiée,
20 la largeur de la fibre est comprise entre 10 nm et 50 nm, et
un rapport d'aspect de la fibre est compris entre 1 et 200.

2. Appareil d'affichage selon la revendication 1, comprenant en outre un panneau tactile (34) interposé entre le panneau à cristaux liquides (31) et la couche de matériau de base (40).

25 3. Appareil d'affichage selon la revendication 1 ou 2, dans lequel le panneau à cristaux liquides (31) comporte une plaque de polarisation linéaire (35) sur laquelle sont situées la couche adhésive (36) et la couche de matériau de base (40).

30 4. Appareil d'affichage selon l'une quelconque des revendications 1 à 3, dans lequel un rapport de mélange de la fibre ayant les propriétés d'élimination de la polarisation est compris entre 1% en poids et 95% en poids par rapport à un matériau de base ayant des propriétés dépolarisantes.

35 5. Appareil d'affichage selon l'une quelconque des revendications 1 à 4, dans lequel l'épaisseur d'un élément contenant la fibre ayant les propriétés d'élimination de la polarisation est comprise entre 10 μ m et 50 μ m ou moins.

6. Appareil d'affichage selon la revendication 2, comprenant en outre : une couche de polarisation linéaire et un film à différence de phase, qui sont interposés entre le panneau tactile (34) et la couche adhésive (36).

40 7. Appareil d'affichage selon la revendication 2 ou 6, dans lequel une couche de gaz est interposée entre le panneau à cristaux liquides (31) et le panneau tactile (34).

8. Appareil d'affichage selon l'une quelconque des revendications 2, 6 et 7, dans lequel le panneau tactile (34) est un panneau tactile d'un type à film de résistance.

45 9. Appareil d'affichage selon l'une des revendications 1 à 8, dans lequel la couche de matériau de base (40) a une concentration de la fibre ayant les propriétés d'élimination de la polarisation allant de 5% de capacité jusqu'à 40% de capacité et la couche adhésive (36) a une concentration de la fibre ayant les propriétés d'élimination de la polarisation allant de 5% de capacité jusqu'à 40% de capacité.

50 10. Appareil d'affichage pour automobile, dans lequel l'appareil d'affichage selon l'une quelconque des revendications 1 à 9 est utilisé.

55 11. Procédé de fabrication de l'appareil d'affichage selon l'une quelconque des revendications 2 et 6 à 9 lorsqu'elles dépendent de la revendication 2, le procédé comprenant le fait :

de former un corps empilé en collant la couche de matériau de base (40) sur le panneau tactile (34) tout en interposant la couche adhésive (36) entre eux ; et
de placer le corps empilé sur un écran d'affichage du panneau à cristaux liquides (31).

FIG. 1

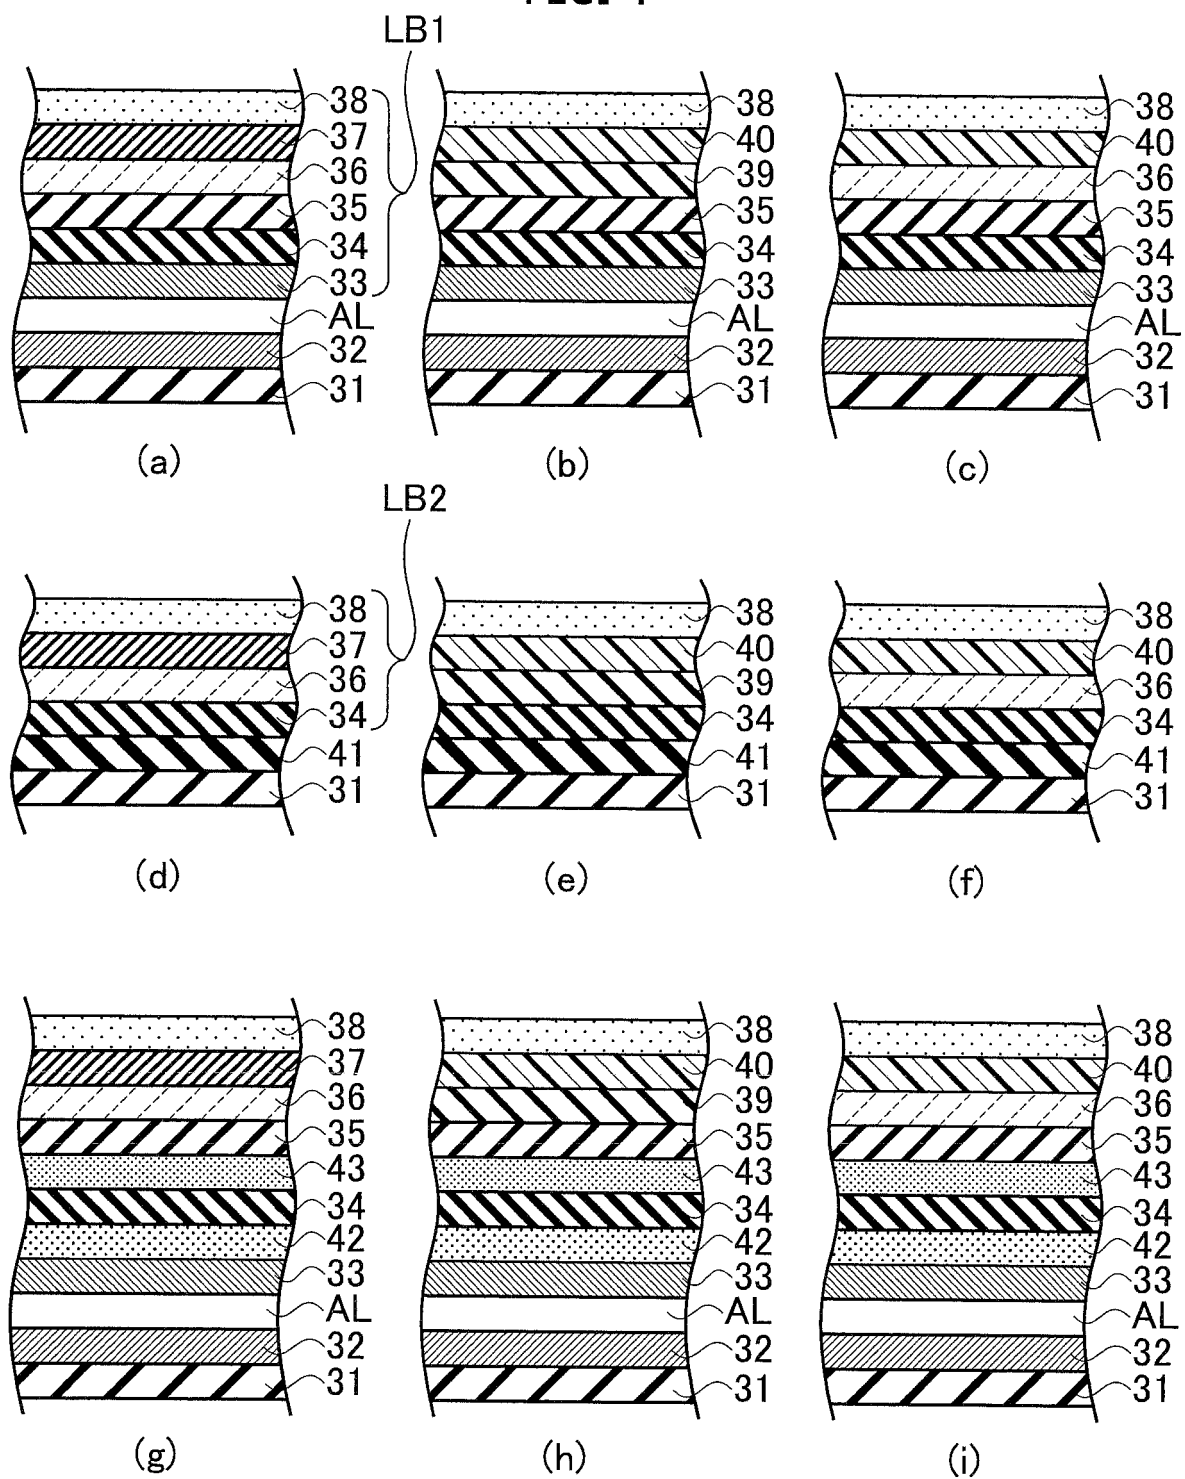


FIG. 2

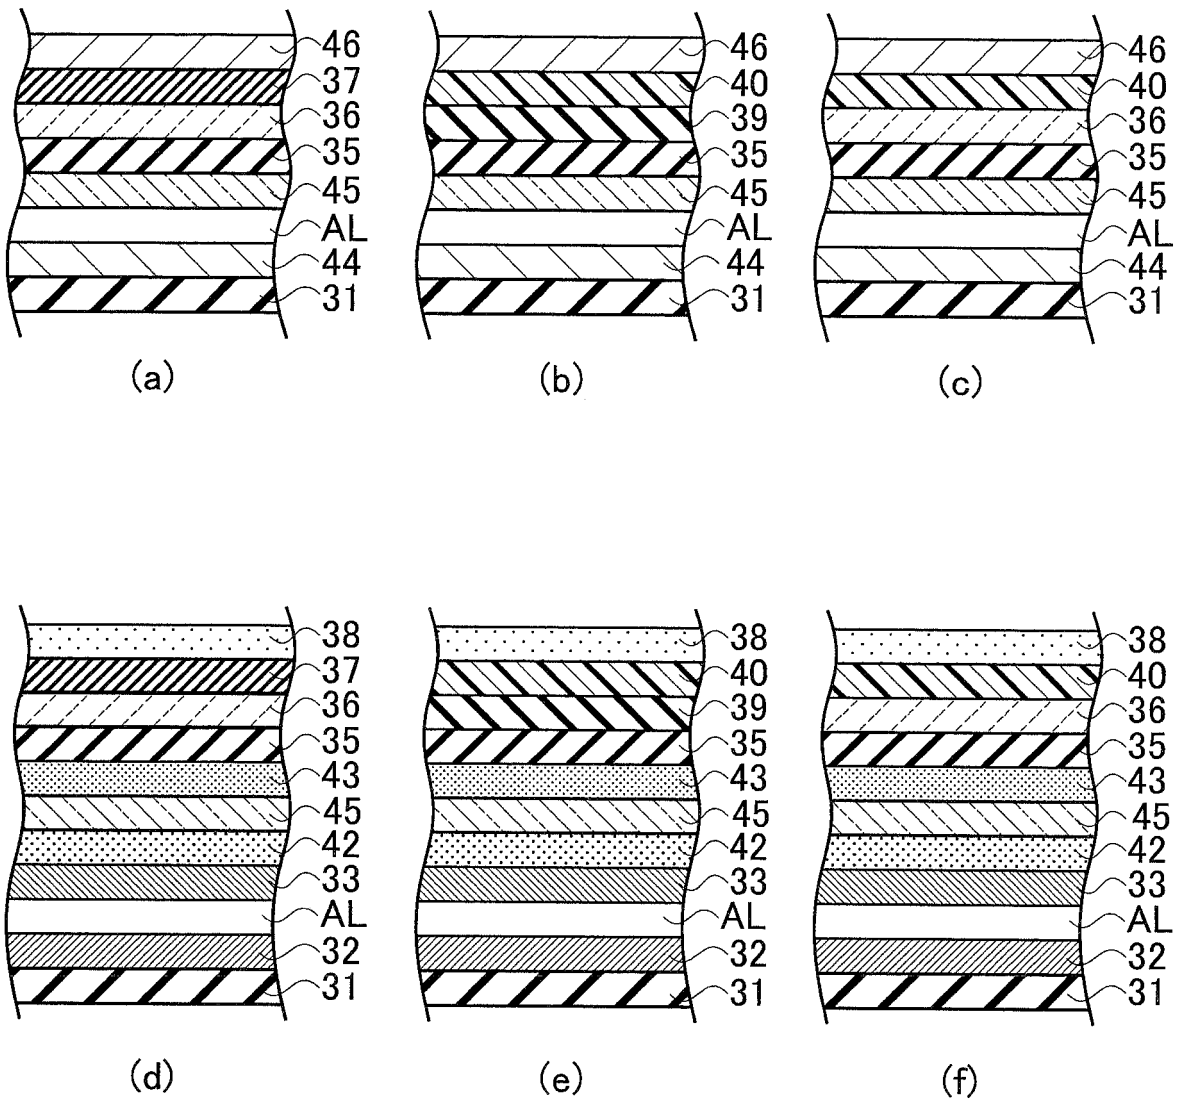


FIG. 3

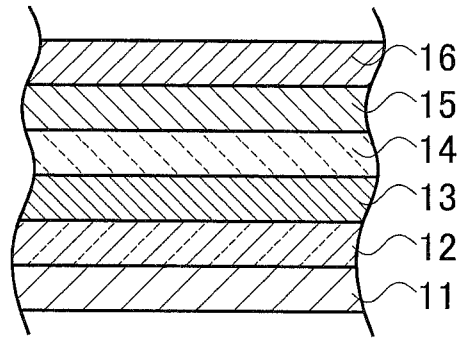


FIG. 4


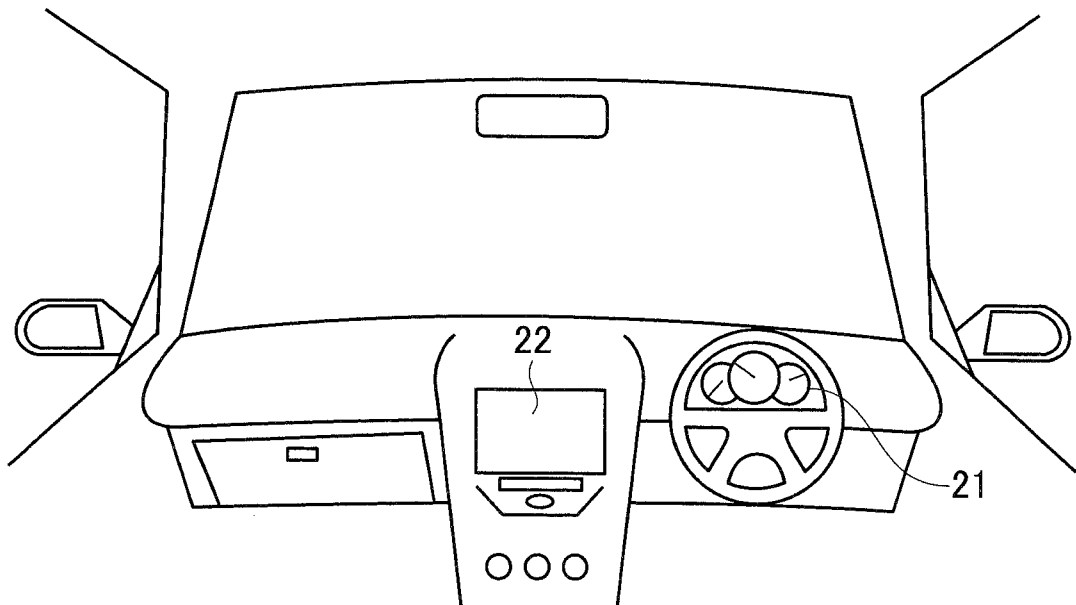


FIG.5

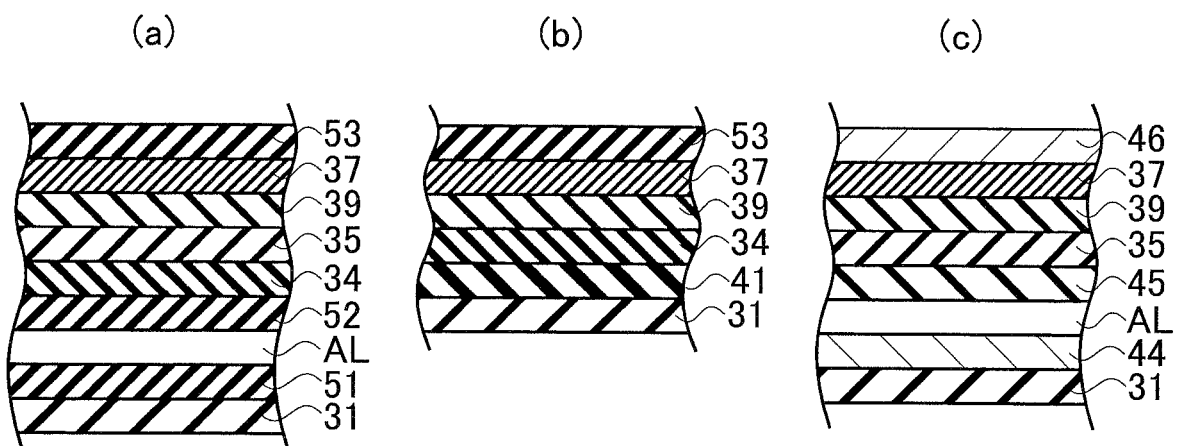

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2010132768 A [0004]
- JP 2008310309 A [0005]
- JP 2008208231 A [0006]
- WO 2007055269 A1 [0007]
- JP 2008310310 A [0008]

专利名称(译)	显示装置，汽车显示装置和显示装置的制造方法		
公开(公告)号	EP2816396B1	公开(公告)日	2018-05-02
申请号	EP2013748824	申请日	2013-02-08
申请(专利权)人(译)	日产汽车公司，LIMITED		
当前申请(专利权)人(译)	日产汽车公司，LIMITED		
[标]发明人	UNNO HARUO YAMAMOTO ISAO		
发明人	UNNO, HARUO YAMAMOTO, ISAO		
IPC分类号	G02F1/1335 B60R11/02 G02B5/30 G02F1/1333 G06F3/041 G09F9/00 G02F1/13363		
CPC分类号	G02F1/133528 G02B5/30 G02F1/1333 G02F1/13338 G02F1/1335 G02F1/13363 G02F2001/0139 G02F2001/133638 G02F2203/06 G06F3/041 G06F3/0412 G09F9/00 Y10T428/1036		
优先权	2012029267 2012-02-14 JP		
其他公开文献	EP2816396A4 EP2816396A1		
外部链接	Espacenet		

摘要(译)

一种显示装置，包括：液晶面板（31）；触控面板（31）放置于液晶面板（31）上；堆叠在触摸板（34）上的基材层（37,40）；以及介于触摸板（34）和基材层（37,40）之间的粘合层（36,39）。具有解决偏振的性质的纤维包含在基材层（37,40）和粘合剂层（36,39）中的至少一个中。

