



(11)

**EP 2 860 576 A1**

(12)

**EUROPEAN PATENT APPLICATION**  
published in accordance with Art. 153(4) EPC

(43) Date of publication:

**15.04.2015 Bulletin 2015/16**

(51) Int Cl.:

**G02F 1/13 (2006.01)**

**G02B 27/22 (2006.01)**

**G02F 1/1335 (2006.01)**

**G02F 1/13357 (2006.01)**

(21) Application number: **13803754.4**

(86) International application number:

**PCT/JP2013/003598**

(22) Date of filing: **07.06.2013**

(87) International publication number:

**WO 2013/187032 (19.12.2013 Gazette 2013/51)**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

Designated Extension States:

**BA ME**

(72) Inventors:

• **SHIKII, Shinichi**  
Chuo-ku, Osaka 540-6207 (JP)

• **SUGIYAMA, Keiji**  
Chuo-ku, Osaka 540-6207 (JP)

(30) Priority: **11.06.2012 US 201261657931 P**

(74) Representative: **Vigand, Philippe et al**

**Novagraaf International SA**

**3 chemin de l'Echo**

**1213 Onex Geneva (CH)**

(71) Applicant: **Panasonic Intellectual Property**


**Management Co., Ltd.**

**Osaka-shi, Osaka 540-6207 (JP)**

(54) **THREE-DIMENSIONAL IMAGE DISPLAY DEVICE AND THREE-DIMENSIONAL IMAGE DISPLAY METHOD**

(57) A stereoscopic image display apparatus including: a light source unit (112m and 112h) which emits light; a light guide plate (113) having an incidence surface on which the light emitted by the light source unit is incident and an emission surface from which the incident light is emitted with a propagation direction thereof changed; and a liquid-crystal panel (115) which spatially modulates the light emitted from the emission surface, and the light source unit emits the light so that the light is incident on the incidence surface in the first and second directions for the right and left eyes of a viewer, which are different from each other and each inclined at a predetermined angle in the emission surface with respect to a reference direction perpendicular to an alignment direction of the right and left eyes of the viewer, and the light emitted from the emission surface of the light guide plate is in a direction which is determined according to the propagation direction of the incident light and in which a component in the alignment direction, included in the propagation direction, is maintained.

FIG. 2

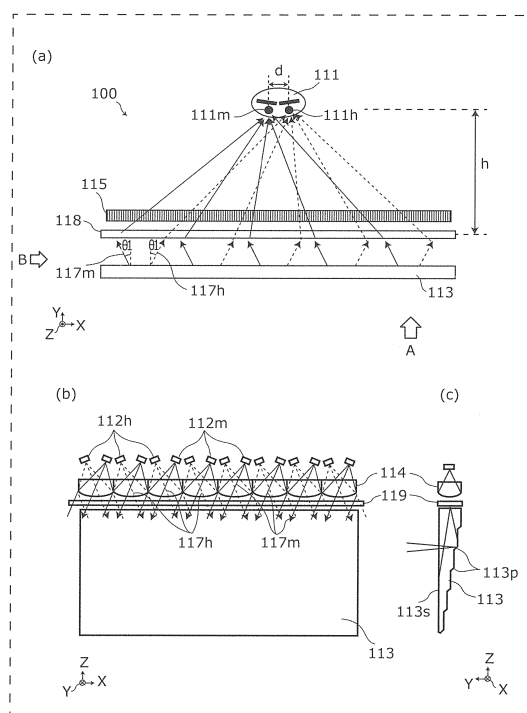

## Description

[Technical Field]

**[0001]** The present invention relates to stereoscopic image display apparatuses and stereoscopic image display methods.

[Background Art]

**[0002]** A stereoscopic image display apparatus is known by which a user can recognize stereoscopic images with his or her naked eyes. The stereoscopic image display apparatus includes a right-eye light source which emits light supposed to enter only the right eye of a user and a left-eye light source which emits light supposed to enter only the left eye of the user. Using these light sources, the stereoscopic image display apparatus repeatedly shows right-eye images to the right eye only and shows left-eye images to the left eye only in a time division manner. This allows the user to recognize the stereoscopic images.

[Citation List]

[Patent Literature]

**[0003]** [PTL 1] Japanese Unexamined Patent Application Publication No. 2010-506214

[Summary of Invention]

[Technical Problem]

**[0004]** However, the above stereoscopic image display apparatus involves crosstalk (a proportion of the light supposed to enter the right eye which entered the left eye, or a proportion of the light supposed to enter the left eye which entered the right eye).

**[0005]** Thus, the present invention provides a stereoscopic image display apparatus which involves reduced crosstalk.

[Solution to Problem]

**[0006]** A stereoscopic image display apparatus according to an aspect of the present invention comprises: a light source unit configured to emit light; a light guide plate having an incidence surface on which the light emitted by the light source unit is incident and an emission surface from which incident light is emitted with a propagation direction thereof changed; and a spatial light modulator which spatially modulates the light emitted from the emission surface, wherein the light source unit is configured to emit the light to cause the light to be incident on the incidence surface in a first direction for a right eye of a viewer and in a second direction for a left eye of the viewer, the first direction and the second di-

rection being different from each other and each being inclined at a predetermined angle in the emission surface with respect to a reference direction perpendicular to an alignment direction of the right eye and the left eye of the viewer, and the light emitted from the emission surface of the light guide plate is in a direction which is determined according to the propagation direction of the incident light and in which a component in the alignment direction, included in the propagation direction, is maintained.

**[0007]** It is to be noted that these general and specific aspects may be implemented using a system, a method, an integrated circuit, a computer program, or a computer-readable recording medium such as a compact disc read only memory (CD-ROM), or any combination of systems, methods, integrated circuits, computer programs, or computer-readable recoding media.

[Advantageous Effects of Invention]

**[0008]** The stereoscopic image display apparatus in the present invention allows for reduced crosstalk.

[Brief Description of Drawings]

**[0009]**

[FIG. 1] FIG. 1 shows a schematic configuration of a stereoscopic image display apparatus in the related art.

**[FIG. 2]** FIG. 2 shows a schematic configuration of a stereoscopic image display apparatus according to Embodiment.

**[FIG. 3]** FIG. 3 shows a schematic configuration of a light source unit in the stereoscopic image display apparatus according to Embodiment.

**[FIG. 4]** FIG. 4 shows a schematic configuration of a stereoscopic image display apparatus according to Variation 1 of Embodiment.

**[FIG. 5]** FIG. 5 shows a schematic configuration of a stereoscopic image display apparatus according to Variation 2 of Embodiment.

**[FIG. 6]** FIG. 6 explains the case where more than one person watches the stereoscopic image display apparatus according to Variation 2 of Embodiment.

**[FIG. 7]** FIG. 7 shows a schematic configuration of a stereoscopic image display apparatus according to Variation 3 of Embodiment.

**[FIG. 8]** FIG. 8 shows a schematic configuration of a stereoscopic image display apparatus according to Variation 4 of Embodiment.

**[FIG. 9]** FIG. 9 shows a schematic configuration of a stereoscopic image display apparatus according to Variation 5 of Embodiment.

**[FIG. 10]** FIG. 10 explains a first light path in the stereoscopic image display apparatus according to Variation 5 of Embodiment.

**[FIG. 11]** FIG. 11 explains a second light path in the stereoscopic image display apparatus according to

### Variation 5 of Embodiment.

#### [Description of Embodiments]

(Underlying Knowledge Forming Basis of the Present Invention)

**[0010]** In relation to the glasses-free stereoscopic image display apparatus disclosed in the [Background Art] section, the inventors of the present application found that the following problem occurs.

**[0011]** In recent years, the stereoscopic image display technology has drawn attention as one measure which provides more realistic images, and various companies have placed stereoscopic image display apparatuses on the market. In order to have a viewer recognize two-dimensional images as a three-dimensional image, the stereoscopic image display apparatus needs to show, only to the right eye of the viewer, an image captured by a camera corresponding to a right-eye position, and show, only to the left eye of the viewer, an image captured by a camera corresponding to a left-eye position, among images captured by two cameras (stereo cameras) spaced apart an eye-to-eye distance (about 60 mm). An exemplary method to show images to a viewer in this manner includes a shutter-glasses system and a polarized-glasses system.

**[0012]** In the shutter-glasses system, a right-eye image and a left-eye image are alternately displayed on a display in the time division manner, and wearing glasses designed so that no light enters the left eye when the right-eye image is displayed and no light enters the right eye when the left-eye image is displayed, a viewer can recognize a stereoscopic image.

**[0013]** In the polarized-glasses system, a right-eye image and a left-eye image are alternately displayed on a per pixel line basis without the time division, and light corresponding to the right-eye image and light corresponding to the left-eye image are given circular polarization in the opposite directions. A viewer who wears glasses having wave plates with different properties for the right eye and the left eye then can recognize the right-eye image only with his or her right eye and the left-eye image only with his or her left eye.

**[0014]** However, both the shutter-glasses system and the polarized-glasses system require users to wear glasses, which may be cumbersome, and this is why there is a demand for early implementation of a glasses-free stereoscopic display, with which a stereoscopic image can be recognized without glasses.

**[0015]** As an example of the glasses-free stereoscopic image display apparatus, the related art having a configuration as shown in Patent Literature (PTL) 1 is known. This is, for example, a configuration of a stereoscopic image display apparatus 10 shown in FIG. 1. The stereoscopic image display apparatus 10 includes: a prism sheet 13; a left-eye light source 12h which is provided to the left of the prism sheet 13 and emits light 17h; a right-

eye light source 12m which is provided to the right of the prism sheet 13 and emits light 17m; a lens sheet 14 provided above the prism sheet 13; a liquid-crystal panel 15 provided as a spatial light modulator above the lens sheet 14; a right-eye light source 12m; a left-eye right source 12h; and a control unit 16 which drives the liquid-crystal panel 15.

**[0016]** In the stereoscopic image display apparatus 10, the light 17h emitted from the left-eye light source 12h is totally reflected off a prism 13a on the bottom of the prism sheet 13 and then is emitted upward from a principal surface 13b of the prism sheet 13 (the principal surface is referred to also as an emission surface). Next, the light 17h incident on the lens sheet 14 is focused by a lens surface 14a on the top of the lens sheet 14, passes through the liquid-crystal panel 15, and enters only a left eye 11h of a viewer 11 so that an image on the liquid-crystal panel 15 is recognized only with the left eye 11h. Likewise, the light 17m emitted from the right-eye light source 12m enters the prism sheet 13 from a right lateral end portion thereof and is totally reflected off the prism 13a on the bottom of the prism sheet 13, and the light 17m from the principal surface 13b of the prism sheet 13 enters the lens sheet 14, is focused by the lens surface 14a on the top of the lens sheet 14, passes through the liquid-crystal panel 15, and enters only a right eye 11m of the viewer 11 so that an image on the liquid-crystal panel 15 is recognized only with the right eye 11m. Thus, displaying a left-eye image on the liquid-crystal panel 15 at a point in time when the left-eye light source 12h is on and the right-eye light source 12m is off, and displaying a right-eye image on the liquid-crystal panel 15 at a point in time when the right-eye light source 12m is on and the left-eye light source 12h is off are repeated sequentially to allow the viewer 11 to recognize a stereoscopic image.

**[0017]** However, the system of PTL 1 involves crosstalk (a proportion of the light supposed to enter one of the right and left eyes which entered the other of the right and left eyes) of 10% or so even when the prism sheet 13 and the lens sheet 14 each have an optimized shape. On the other hand, the rate of occurrence of crosstalk in a glasses-type stereoscopic image display apparatus is approximately 3%. In the system of PTL 1, it is difficult to reduce the rate of occurrence of crosstalk to approximately 3%, meaning that it is difficult to provide high quality stereoscopic images. Furthermore, in the case of magnification to a larger size, it is difficult to provide a uniform image in terms of the optical design.

**[0018]** The present invention solves the above-stated conventional problems and provides a display apparatus which involves reduced crosstalk and thereby is capable of displaying high quality stereoscopic images.

**[0019]** In order to solve such problems, a stereoscopic image display apparatus according to an aspect of the present invention comprises: a light source unit configured to emit light; a light guide plate having an incidence surface on which the light emitted by the light source unit is incident and an emission surface from which incident

light is emitted with a propagation direction thereof changed; and a spatial light modulator which spatially modulates the light emitted from the emission surface, wherein the light source unit is configured to emit the light to cause the light to be incident on the incidence surface in a first direction for a right eye of a viewer and in a second direction for a left eye of the viewer, the first direction and the second direction being different from each other and each being inclined at a predetermined angle in the emission surface with respect to a reference direction perpendicular to an alignment direction of the right eye and the left eye of the viewer, and the light emitted from the emission surface of the light guide plate is in a direction which is determined according to the propagation direction of the incident light and in which a component in the alignment direction, included in the propagation direction, is maintained.

**[0020]** With this, the light source unit emits, at an angle for each of the right and left eyes of a viewer with respect to the reference direction, light which reaches a corresponding one of the right and left eyes. The light guide plate then directs the light emitted by the light source unit, toward the viewer, with the inclination angle of the light maintained as that at the time of the emission from the light source unit. This allows the stereoscopic image display apparatus to significantly lower the probability that the light emitted by the light source unit at the angle for the right (or left) eye of a viewer enters the left (or right) eye of the viewer. Therefore, with the stereoscopic image display apparatus, crosstalk can be reduced. Furthermore, it is possible to provide an image display apparatus and a stereoscopic image display apparatus which save space and are small in size.

**[0021]** For example, it may be that the light source unit (i) includes: a first light source oriented to cause a propagation direction of light emitted therefrom to be parallel to the first direction; and a second light source oriented to cause a propagation direction of light emitted therefrom to be parallel to the second direction, (ii) emits, as the light to be incident on the incidence surface in the first direction, the light emitted from the first light source, and (iii) emits, as the light to be incident on the incidence surface in the second direction, the light emitted from the second light source.

**[0022]** Thus, the light sources each of which emits light to a different one of the right and left eyes of the viewer are placed in the orientations for the right and left eyes of the viewer, with the result that the stereoscopic image display apparatus is capable of determining a propagation direction of the light emitted by the light source unit.

**[0023]** For example, it may be that the first light source emits a polarized light beam having a polarization direction parallel to a normal of the emission surface, the second light source emits a polarized light beam having a polarization direction parallel to the alignment direction, and the light source unit further includes a polarization switching element through which the light emitted by the first light source passes and the light emitted by the sec-

ond light source passes with the polarization direction thereof rotated 90 degrees with respect to a propagation direction thereof.

**[0024]** With this, in the stereoscopic image display apparatus, the light sources emit polarized light beams different in polarization direction for the right and left eyes of the viewer, and the polarization switching element functions to make the polarization direction of these polarized light beams the same. Thus, in the stereoscopic image display apparatus, the polarized light beams having different polarization properties is used so that crosstalk can be reduced.

**[0025]** For example, it may be that the light source unit includes: a third light source which emits light; and a propagation direction changing unit having at least a first state and a second state and configured to allow a dynamic change between the first state and the second state, the first state being a state in which a propagation direction of the light emitted by the third light source is changed to make the light propagate in the first direction, and the second state being a state in which a propagation direction of the light emitted by the third light source is changed to make the light propagate in the second direction, the third light source emits the light when the propagation direction changing unit is in the first state and when the propagation direction changing unit is in the second state, and the propagation direction changing unit is configured to cause the light emitted by the third light source in the first state to be emitted as the light to be incident on the incidence surface in the first direction, and cause the light emitted by the third light source in the second state to be emitted as the light to be incident on the incidence surface in the second direction.

**[0026]** Therefore, by dynamically changing an orientation of the light emitted by the light source, the stereoscopic image display apparatus is capable of determining a propagation direction of the light emitted by the light source unit.

**[0027]** For example, among surfaces of the light guide plate which are adjacent to the emission surface, a surface above or below the emission surface as seen from the viewer may be the incidence surface.

**[0028]** With this, in the stereoscopic image display apparatus, the light emitted by the light source enters the light guide plate from, out of the surfaces thereof, the upper or lower surface as seen from the viewer.

**[0029]** For example, in the alignment direction, a length of the incidence surface of the light guide plate may be greater than a length of the spatial light modulator.

**[0030]** Thus, the light guide plate is longer in the horizontal direction than the spatial light modulator as seen from the viewer. The light emitted by the light source to each of the right and left eyes of the viewer propagates obliquely from an upper part of the light guide plate to a lower right or left part thereof as seen from the viewer. Therefore, when the light guide plate and the spatial light modulator have an equal length in the horizontal direction, the light guide plate will include, in upper parts of

the left and right ends thereof, a region unreachable for light. By setting the light guide plate to be longer than the spatial light modulator, it is possible to prevent the region as above from being included.

**[0031]** For example, the light guide plate may further include a light absorber on a surface of the light guide plate which is adjacent to both the incidence surface and the emission surface.

**[0032]** With this, it is possible to reduce crosstalk which is generated by light reflected off the left and right ends of the light guide plate as seen from the viewer. The light reflected off the left and right ends of the light guide plate behaves just like the light entering a different one of the left and right eyes of the viewer and thus causes crosstalk. By absorbing such light, the light absorber can prevent the crosstalk from occurring.

**[0033]** For example, it may be that the emission surface has a trapezoidal shape, and a surface of the light guide plate which is adjacent to the emission surface on one of parallel long sides of the trapezoidal shape is the incidence surface.

**[0034]** Thus, when the light guide plate is longer in the horizontal direction than the spatial light modulator as seen from the viewer, regions of the light guide plate which are located in lower parts of the left and right ends thereof and on the outer side of the spatial light modulator are not indispensable in forming images. In other words, even the stereoscopic image display apparatus without such regions is capable of forming images just as in the case with such regions. Thus, forming the light guide plate into a trapezoidal shape by omitting such regions can result in the stereoscopic image display apparatus which saves space.

**[0035]** For example, it may be that the light source unit is configured to emit the light to cause a polarized light beam thereof to enter the light guide plate, the polarized light beam having a polarization direction parallel to a normal of the emission surface, the light guide plate includes a polarization and reflection surface which is adjacent to both the emission surface and the incidence surface, rotates a polarization direction of the incident light 90 degrees with respect to the propagation direction of the incident light, and reflects the incident light, and the stereoscopic image display apparatus further comprises a polarization switching element which is at a position between the light source unit and the light guide plate and on a path of light traveling toward the polarization and reflection surface and through which the light passes with a polarization direction thereof rotated 90 degrees with respect to a propagation direction thereof, the light being included in the light emitted by the light source unit and being incident on the incidence surface in the first direction.

**[0036]** With this, the stereoscopic image display apparatus is capable of delivering light to the entire surface of the light guide plate even when the spatial light modulator and the light guide plate have an equal length in the horizontal direction as seen from the viewer.

**[0037]** For example, the polarization and reflection surface may include: a reflection surface which reflects a polarized light beam incident thereon; and a quarter-wave plate which is provided on the reflection surface, and imparts, to a polarization component of the polarized light beam incident on the quarter-wave plate, a phase difference corresponding to a quarter of a wavelength of the polarized light beam, with reference to a polarization component thereof in a predetermined direction, and from which the polarized light beam resulting from the imparting is emitted, the polarization component to which the phase difference is imparted being perpendicular to the predetermined direction.

**[0038]** With this, the stereoscopic image display apparatus is capable of delivering light to the entire surface of the light guide plate using the reflecting surface and the quarter-wave plate as described above.

**[0039]** For example, the spatial light modulator may be a liquid-crystal panel.

**[0040]** Thus, the stereoscopic image display apparatus is capable of forming and displaying images using the spatial light modulator as the liquid crystal panel.

**[0041]** For example, it may be that (i) when the light enters the light guide plate in the first direction, the spatial light modulator spatially modulates the light to form an image for right eye and displays the image for right eye toward the right eye of the viewer, (ii) when the light enters the light guide plate in the second direction, the spatial light modulator spatially modulates the light to form an image for left eye and displays the image for left eye toward the left eye of the viewer, and (iii) the spatial light modulator switches in time series between displaying the image for left eye and displaying the image for right eye.

**[0042]** Thus, switching in time series between the image for right eye (right-eye image) and the image for left eye (left-eye image) to repeatedly show the image for right eye to the right eye of the viewer and show the image for left eye to the left eye of the viewer allows the viewer to recognize stereoscopic images.

**[0043]** Furthermore, a stereoscopic image display method according to an aspect of the present invention is a stereoscopic image display method performed by a stereoscopic image display apparatus including: a light source unit which emits light; a light guide plate having an incidence surface on which the light emitted by the light source unit is incident and an emission surface from which incident light is emitted with a propagation direction thereof changed; and a spatial light modulator which spatially modulates the light emitted from the emission surface, the stereoscopic image display method comprising: emitting the light to cause the light to be incident on the incidence surface in a first direction for a right eye of a viewer and in a second direction for a left eye of the viewer, the first direction and the second direction being different from each other and each being inclined at a predetermined angle in the emission surface with respect to a reference direction perpendicular to an alignment direction of the right eye and the left eye of the viewer; and

emitting the light from the emission surface in a direction which is determined according to the propagation direction of the incident light and in which a component in the alignment direction, included in the propagation direction, is maintained.

**[0044]** By doing so, the same or like advantageous effects as those produced by the above-stated stereoscopic image display method are produced.

**[0045]** The following shall specifically describe an embodiment with reference to the Drawings.

**[0046]** It is to be noted that each embodiment described below shows a generic or specific example. The numerical values, shapes, materials, structural elements, the arrangement and connection of the structural elements, steps, the order of the steps etc. shown in the following embodiment are examples, and therefore do not intend to limit the present invention. Therefore, among the structural elements in the following embodiment, structural elements not recited in an independent claim indicating the broadest concept are described as arbitrary structural elements.

**[0047]** It is to be noted that the same elements are denoted by the same numerals and symbols and descriptions thereof may be omitted. In addition, the Drawings show the structural elements schematically as subjects in order to facilitate understanding.

(Embodiment)

**[0048]** FIG. 2 shows a schematic configuration of a stereoscopic image display apparatus 100 according to Embodiment. FIG. 2 shows, in (a), a front view of the stereoscopic image display apparatus 100. FIG. 2 shows, in (b), a plan view thereof as seen from A in (a) of FIG. 2. FIG. 2 shows, in (c), a side view thereof as seen from B in (a) of FIG. 2.

**[0049]** The stereoscopic image display apparatus 100 includes a right-eye light source 112m, a left-eye light source 112h, a collimating lens 114, a lens array 119, a light guide plate 113, a Fresnel lens 118, a liquid-crystal panel 115, and a control unit (not shown) connected to the liquid-crystal panel 115, the right-eye light source 112m, and the left-eye light source 112h. In (b) of FIG. 2 and (c) of FIG. 2, the illustration of the Fresnel lens 118 and the liquid-crystal panel 115 is omitted. Furthermore, an X axis (X direction), a Y axis (Y direction), and a Z axis (Z direction) are defined as coordinate axes shown in FIG. 2, and an orientation thereof is represented by "+" or "-." Specifically, simple words "X direction" indicate both orientations in the direction parallel to the X axis, and words "+ X direction" indicate an orientation, in the direction parallel to the X axis, in which X increases (the orientation of an arrow in the coordinate axes). In addition, the X direction is also referred to as the horizontal direction, the Y direction the depth direction, and the Z direction the vertical direction.

**[0050]** Firstly, with reference to FIG. 3, light 117m and light 117h which are emitted by a single light source unit

120 including the single right-eye light source 112m and the single left-eye light source 112h shall be described.

**[0051]** As shown in FIG. 3, the right-eye light source 112m is provided at an angle of  $\theta_1$  degrees on the right with respect to the lens axis of the collimating lens 114 (a reference direction). Furthermore, the right-eye light source 112m is provided so that a main light beam 117m-c of the light 117m emitted by the right-eye light source 112m is emitted from the collimating lens 114 at the angle of  $\theta_1$  with respect to the lens axis of the collimating lens 114 and is emitted as substantially parallel light beams from the collimating lens 114. Likewise, the left-eye light source 112h is provided at the angle of  $\theta_1$  degrees on the opposite side from the right-eye light source 112m, with respect to the collimating lens 114. Furthermore, the left-eye light source 112h is provided so that a main light beam 117h-c of the light 117h emitted by the left-eye light source 112h is emitted from the collimating lens 114 at the angle of  $\theta_1$  with respect to the lens axis of the collimating lens 114 and is emitted as substantially parallel light beams. A plurality of the light source units 120 each configured as above are arranged as shown in (b) of FIG. 2. The arranged light source units 120 emit linear light the main light beam of which has an orientation at the angle of  $\theta_1$  on the right with respect to the direction downward in the drawing (the - Z direction) and linear light the main light beam of which has an orientation at the angle of  $\theta_1$  on the left with respect to the direction downward in the drawing (the - Z direction). The emitted light 117m and 117h enters into the light guide plate 113.

**[0052]** Referring back to FIG. 2, the light guide plate 113 includes a plurality of prisms 113p on the bottoms. The light 117m and 117h incident on the prisms 113p is totally reflected off the prisms 113p and then is emitted from a principal surface 113c of the light guide plate. The light 117m emitted from the light guide plate 113 is emitted as planar light at the angle of  $\theta_1$  on the right with respect to the direction upward in the drawing (+ Y direction), and the light 117h emitted from the light guide plate 113 is emitted as planar light at the angle of  $\theta_1$  on the left with respect to the direction upward in the drawing (+ Y direction), as shown in (a) of FIG. 2. The light 117m and 117h emitted as the planar light passes through the Fresnel lens 118 having a focal distance h so as to be focused on the eyes of a viewer 111 at a distance h.

**[0053]** Here, the angle  $\theta_1$  for focusing the light on a right eye 111m or a left eye 111h of the viewer 111 at the distance h shall be discussed. For example, assuming that the mean eye-to-eye distance d of the viewer 111 is 60 mm and the distance h is 300 mm, the calculation is  $\theta_1 = \tan^{-1}(60 \text{ mm}/2/300 \text{ mm}) = 5.71$  degrees. Specifically, under the above assumption, the right-eye light source 112m and the left-eye light source 112h shown in FIG. 3 are each provided at an angle of 5.71 degrees with respect to the lens axis (Z axis), with the result that the light emitted by the right-eye light source 112m is focused on the right eye 111m of the viewer 111 and the light emitted by the left-eye light source 112h is

focused on the left eye 111h of the viewer 111.

**[0054]** After passing through the Fresnel lens 118, the light 117m and the light 117h pass through the liquid-crystal panel 115 to form images, and the viewer 111 can recognize the images with the right eye 111m and the left eye 111h. At this time, the control unit turns on the right-eye light source 112m at a point in time when only the right-eye image (the image for right eye) is displayed on the liquid-crystal panel 115, with the result that the right-eye image enters only the right eye 111m. Furthermore, the control unit causes only the left-eye image (the image for left eye) to be displayed on the liquid-crystal panel 115 at a different point in time and turns off the right-eye light source 112m and turns on the left-eye light source 112h at this point in time, with the result that the left-eye image enters only the left eye 111h at this point in time. Rapid repetition of these operations allows the viewer 111 to recognize displayed images as stereoscopic images.

**[0055]** With the stereoscopic image display apparatus 100 configured as above, the occurrence of crosstalk can essentially be reduced. The stereoscopic image display apparatus 10 in the related art (FIG. 1) causes the right-eye light source 12m and the left-eye light source 12h to emit light such that the light enters the prism sheet 13 in the horizontal direction (the X direction) of the prism sheet 13. Since the light emitted by the light source 12m and the light source 12h has various angle components, the light emitted from the prism sheet 13 also has various angle components. As a result, crosstalk occurs. In the stereoscopic image display apparatus 100 in this embodiment, the light 117h emitted from the light guide plate 113 essentially has only components of  $\theta_1$  degrees rightward in the drawing (in the + X direction), and the light 117m emitted from the light guide plate 113 essentially has only components of  $\theta_1$  degrees leftward in the drawing (in the - X direction), as shown in (a) of FIG. 2. Furthermore, in the stereoscopic image display apparatus 100, since the light 117h and the light 117m enter the light guide plate 113 from above (the + Z side), the light incident on the light guide plate 113 is emitted to the Fresnel lens 118 with its angle maintained, and is focused by the Fresnel lens 118 toward the viewer 11, which is a very simple configuration; there is no cause for various angle components resulting in crosstalk. With the above configuration, the stereoscopic image display apparatus 100 allows the user 11 to recognize very high quality stereoscopic images with crosstalk essentially reduced.

**[0056]** It is to be noted that the light guide plate 113 and the collimating lens 114 may have the lens array 119 inserted therebetween which has power in the thickness direction of the light guide plate 113 (the Y direction) as shown in (b) of FIG. 2. This makes it possible to adjust, to any width, the viewing angle of the stereoscopic image display apparatus 100 in the vertical direction (the vertical direction in the drawing of (a) in FIG. 2; the Z direction).

**[0057]** It is to be noted that although the light guide plate 113 in the stereoscopic image display apparatus

100 has a configuration in which the plurality of prisms 113p are provided on the bottoms of the light guide plate 113, this is not the only example; another configuration may be adopted as long as such a configuration produces the same or like advantageous effects.

(Variation 1 of Embodiment)

**[0058]** Next, a stereoscopic image display apparatus 124 according to Variation 1 of this embodiment shall be described with reference to FIG. 4. In the stereoscopic image display apparatus 124, an optical system which covers functions up to the point that light emitted by a light source enters the light guide plate 113 is different from that in the stereoscopic image display apparatus 100. FIG. 4 shows, in (a), a side view of the stereoscopic image display apparatus 124. FIG. 4 shows, in (b), a sectional view taken along line A-A in (a) of FIG. 4. FIG. 4 shows, in (c), a sectional view taken along line B-B in (a) of FIG. 4.

**[0059]** The stereoscopic image display apparatus 124 includes, in addition to the structural elements included in the stereoscopic image display apparatus 100, a polarizing plate 121, a polarization beam splitter 122, and a polarization switching element 123. In FIG. 4, the illustration of the Fresnel lens 118 and the liquid-crystal panel 115 is omitted. The Fresnel lens 118 and the liquid-crystal panel 115 in the stereoscopic image display apparatus 124 are the same as those in the stereoscopic image display apparatus 100.

**[0060]** Firstly, the right-eye light source 112m shall be described. FIG. 4 shows, in (b), a sectional view taken along line A-A in (a) of FIG. 4. As shown in (b) of FIG. 4, the right-eye light source 112m is provided at the angle of  $\theta_1$  on the right in the longitudinal direction with respect to an incidence surface 113n of the light guide plate 113, and the collimating lens 114 is provided also at the angle of  $\theta_1$  on the right in the longitudinal direction with respect to the incidence surface 113n of the light guide plate 113. The main light beam 117m-c of the light 117m is present on the lens axis of the collimating lens 114. The light 117m is converted by the collimating lens 114 into substantially parallel light beams, and the polarization components thereof parallel to the XZ plane are then absorbed by the polarizing plate 121, and only the polarization components thereof in the vertical direction in the drawing (the Y direction) pass through the polarizing plate 121 and enter the polarization beam splitter 122. Out of the incident light from the right-eye light source 112m side in (a) of FIG. 4, only light having the polarization components in the horizontal direction in the drawing (the Y direction), which is P-polarized light, passes through the polarization beam splitter 122. This means that, out of the light 117m incident on the polarization beam splitter 122, light having the polarization components in the horizontal direction in the drawing (the Y direction) in (a) of FIG. 4 passes through the polarization beam splitter 122.

**[0061]** Next, the left-eye light source 112h shall be described with reference to (c) of FIG. 4. FIG. 4 shows, in (c), a sectional view taken along line B-B in (a) of FIG. 4. As shown in (c) of FIG. 4, the left-eye light source 112h is provided at the angle of  $\theta_1$  on the left in the longitudinal direction with respect to the incidence surface 113n of the light guide plate 113, and the collimating lens 114 is provided also at the angle of  $\theta_1$  on the left in the longitudinal direction with respect to the incidence surface 113n of the light guide plate 113. The main light beam 117h-c of the light 117h is present on the lens axis of the collimating lens 114. The light 117h is converted by the collimating lens 114 into substantially parallel light beams, and the polarization components thereof in the vertical direction in the drawing (the Z direction) are then absorbed by the polarizing plate 121, and only the polarization components thereof parallel to the XY plane pass through the polarizing plate 121 and enter the polarization beam splitter 122. Out of the incident light from the left-eye light source 112h side in (a) of FIG. 4, only light having the polarization components in the vertical direction in the drawing (the X direction), which is S-polarized light, is reflected off a slope of the polarization beam splitter 122 and passes therethrough in the direction downward in the drawing in (a) of FIG. 4. This means that the light 117h from the left-eye light source 112h side, incident on the polarization beam splitter 122, is light polarized in the vertical direction in the drawing (the X direction) in (a) of FIG. 4 and is therefore reflected off the slope and emitted downward in the drawing (the - Z direction).

**[0062]** Next, the polarization switching element 123 shall be described. In (a) of FIG. 4, the polarization switching element 123 has a function of switching only the polarization components of incident light in the vertical direction in the drawing (the X direction) to the polarization components in the horizontal direction in the drawing (the Y direction) while being driven, and being kept from having any impact on the polarization direction of incident light while not being driven.

**[0063]** The following shall describe how the stereoscopic image display apparatus 124 drives the right-eye light source 112m and the left-eye light source 112h in a time division manner. Firstly, the stereoscopic image display apparatus 124 turns on only the right-eye light source 112m and stops driving the polarization switching element 123. As a result, only the polarization components in the horizontal direction in the drawing (the Y direction) in (a) of FIG. 4 enter the light guide plate 113. Next, the stereoscopic image display apparatus 124 turns on only the left-eye light source 112h and drives the polarization switching element 123. As a result, the light 117h polarized in the vertical direction in the drawing (the X direction) has its polarization direction thereof converted by the polarization switching element 123 into the horizontal direction in the drawing (the Y direction) and then enters the light guide plate 113. By doing so, when entering the light guide plate 113, the light 117m and the light 117h have the polarization directions aligned in the

horizontal direction in the drawing (the Y direction) in (a) of FIG. 4.

**[0064]** The light 117h and the light 117m upon entering the light guide plate 113 in the stereoscopic image display apparatus 124 are different in the following points from the light 117h and the light 117m upon entering the light guide plate 113 in the stereoscopic image display apparatus 100. In the stereoscopic image display apparatus 100, the light 117h and the light 117m are each randomly polarized light. On the other hand, in the stereoscopic image display apparatus 124, only the polarization components in the horizontal direction in the drawing (the Y direction) in (a) of FIG. 4 enter the light guide plate 113. Thus, the light 117h and the light 117m have different polarization directions.

**[0065]** The above difference does not affect the light use efficiency of the stereoscopic image display apparatus. This is because the liquid-crystal panel is usually provided with a polarizing plate, which therefore allows only light polarized in a predetermined direction to pass therethrough. For example, in the stereoscopic image display apparatus 100 in (a) of FIG. 2, when the liquid-crystal panel 115 absorbs the polarization components in the horizontal direction in the drawing (the X direction), the polarization components of the light 117m and the light 117h incident on the light guide plate 113 which are in the vertical direction in the drawing (the X direction) in (c) of FIG. 2 are absorbed by the polarizing plate of the liquid-crystal panel 115. On the other hand, in the stereoscopic image display apparatus 124, the polarization components to be absorbed by the liquid-crystal panel 115 have already been removed before entering the light guide plate 113, which does not affect the light use efficiency of the stereoscopic image display apparatus.

**[0066]** In the stereoscopic image display apparatus 124, since the orientation of the main light beams of the light 117m and the light 117h emitted respectively from the right-eye light source 112m and the left-eye light source 112h and the lens axis of the collimating lens 114 are present on the same axis as mentioned above, an aberration is less likely to be produced in the collimating lens 114, leading to reduced angle misalignment of the light being emitted from the collimating lens 114. It is therefore possible to constitute a stereoscopic image display apparatus which involves further reduced crosstalk and provides still higher quality images.

(Variation 2 of Embodiment)

**[0067]** Next, a stereoscopic image display apparatus 140 according to Variation 2 of this embodiment shall be described with reference to FIG. 5. In the stereoscopic image display apparatus 140, an optical system which covers functions up to the point that light emitted by a light source enters the light guide plate 113 is different from those in the stereoscopic image display apparatus 100 and the stereoscopic image display apparatus 124.

**[0068]** FIG. 5 shows, in (a), a plan view of the stereo-

stereoscopic image display apparatus 140. FIG. 5 shows, in (b), a side view of the stereoscopic image display apparatus 140. FIG. 5 shows, in (c), a first schematic light path diagram inside the light guide plate 113 of the stereoscopic image display apparatus 140, and shows, in (d), a second schematic light path diagram thereof.

**[0069]** Firstly, with reference to (a) of FIG. 5, the optical system which covers functions up to the point that light emitted by a light source enters the light guide plate 113 in the stereoscopic image display apparatus 140 shall be described. As shown in (a) of FIG. 5, the stereoscopic image display apparatus 140 includes a light source 130, a magnifying lens 131, a Fresnel lens 132, an oscillating mirror 133, and a lens array 136. Here, since the optical system which performs a function after the light enters the light guide plate 113 is the same as that in the stereoscopic image display apparatus 100, the illustration of the Fresnel lens 118 and the liquid-crystal panel 115 is omitted in FIG. 5.

**[0070]** Light 135 emitted from the light source 130 enters the magnifying lens 131 and is magnified so that the light directed to the Fresnel lens 132 will have the same or approximate width as the width of the light guide plate 113 in the direction of the long side thereof (the X direction). The Fresnel lens 132 and the magnifying lens 131 are included in a beam expander; the light 135 incident on the Fresnel lens 132 remains in the form of substantially parallel light beams when entering the oscillating mirror 133. Meanwhile, as shown in (b) of FIG. 5, the magnifying lens 131 and the Fresnel lens 132 each do not have a curvature in the thickness direction of the light guide plate 113 (the horizontal direction, or the Y direction, in the drawing), which means that the light 135 incident on the Fresnel lens 132 remains in the form of substantially parallel light beams when arriving at the oscillating mirror 133.

**[0071]** The oscillating mirror 133 is a mirror that can be oscillated within a predetermined range of angles, with a rotation axis 134 as the center of rotation. The oscillating mirror 133 may be a galvanometer mirror or the like and may also be micro-electrode-mechanical-system (MEMS) mirrors or the like arranged in an array. The light 135 incident on the oscillating mirror 133 is reflected according to a rotation angle of the oscillating mirror. At this time, a reflection angle of the light is twice as large as the rotation angle of the oscillating mirror 133. For example, as in the stereoscopic image display apparatus 100, assuming a visual distance  $h = 30$  cm and an eye-to-eye distance  $d = 60$  mm, a rotation angle  $\theta/2$  of the oscillating mirror 133 for focusing the light on the right eye of the viewer satisfies  $2 \times \theta/2 = 5.71$  degrees, therefore  $\theta/2 = 2.85$  degrees. This means that, with the oscillating mirror 133 rotated 2.85 degrees clockwise, the stereoscopic image display apparatus 140 can focus the light on the right eye of the viewer. Furthermore, with the oscillating mirror 133 rotated 2.85 degrees counterclockwise according to the same or like calculation as above, the stereoscopic image display apparatus 140 can focus the light on the

left eye of the viewer. By doing so, the stereoscopic image display apparatus 140 is capable of having light enter into the light guide plate 113 at a predetermined angle as in the case of the stereoscopic image display apparatus 100 and the stereoscopic image display apparatus 124. Thus, at a point in time when the light 135 propagates inside the light guide plate 113 with the oscillating mirror 133 rotated  $\theta/2$  degrees clockwise as in (c) of FIG. 5, the liquid-crystal panel (not shown) displays a right-eye image, with the result that the right-eye image enters only the right eye of the viewer. At another point in time when the light 135 propagates inside the light guide plate with the oscillating mirror 133 rotated  $\theta/2$  degrees counterclockwise as in (d) of FIG. 5, the liquid-crystal panel (not shown) displays a left-eye image, with the result that the left-eye image enters only the left eye of the viewer. When the stereoscopic image display apparatus 140 rapidly repeats the above operations on corresponding points in time, the viewer can recognize stereoscopic images. With this, it is possible to constitute a cost-saving stereoscopic image display apparatus with a reduced number of light sources.

**[0072]** The stereoscopic image display apparatus 140 allows more than one viewer to recognize stereoscopic images. FIG. 6 explains the case where more than one person watches the stereoscopic image display apparatus 140. FIG. 6 shows, in (a), a schematic configuration of the stereoscopic image display apparatus 140. FIG. 6 shows, in (b), a schematic configuration of angles of the light emitted from the light guide plate 113 of the stereoscopic image display apparatus 140. FIG. 6 explains, in (c), timing of light emission of the light source and images displayed on the liquid-crystal panel 115 in the stereoscopic image display apparatus 140.

**[0073]** The stereoscopic image display apparatus 140 allows more than one viewer to recognize stereoscopic images as in FIG. 6, with the oscillating mirror 133 oscillating so that the range of emission angles of the light 135 which can be emitted from the light guide plate 113 is  $\pm\phi$  degrees (the range of  $[-\phi$  degrees,  $+\phi$  degrees]), that is, the range of angles of oscillation of the oscillating mirror 133 is  $\pm\phi/2$  degrees (the range of  $[-\phi/2$  degrees,  $+\phi/2$  degrees]). Assume that an emission angle of the light 135 from the light guide plate 113, necessary to cause an image to enter a right eye 142m of a viewer 142, is  $\alpha_1$  degrees, an emission angle of the light 135 from the light guide plate 113, necessary to cause an image to enter a left eye 142h of the viewer 142, is  $\alpha_2$  degrees, an emission angle of the light 135 from the light guide plate 113, necessary to cause an image to enter a right eye 141m of a viewer 141, is  $\beta_1$  degrees, an emission angle of the light 135 from the light guide plate 113, necessary to cause an image to enter a left eye 141h of the viewer 141, is  $\beta_2$  degrees, and all the angles  $\alpha_1$ ,  $\alpha_2$ ,  $\beta_1$ , and  $\beta_2$  are within the range of emission angles  $\pm\phi$ . In (b) of FIG. 6, the horizontal axis represents time, and the vertical axis represents an angle of light emitted from a principal surface 113s of the light guide plate 113. FIG.

6 shows, in (c), timing of light emission of the light source 130 and images displayed on the liquid-crystal panel 115 with the horizontal axis representing time. In this case, the light source 130 is turned on at a point in time, between time 0 and time  $t_1$ , when the oscillating mirror 133 reaches where the emission angle of light from the principal surface 113s of the light guide plate 113 corresponds to  $\beta_1$ . In addition, the light source 130 is turned on at a point in time when the oscillating mirror 133 reaches where the emission angle of light from the principal surface 113s of the light guide plate 113 corresponds to  $\alpha_1$ . Furthermore, at this point in time between time 0 and time  $t_1$ , a right-eye image is displayed on the liquid-crystal panel 115. By doing so, it is possible to cause only the right eye 141m of the viewer 141 and the right eye 142m of the viewer 142 to recognize the right-eye image. Moreover, the light source 130 is turned on at the next point in time, between time  $t_1$  and time  $t_2$ , when the oscillating mirror 133 reaches where the emission angle of light from the principal surface 113s of the light guide plate 113 corresponds to  $\beta_2$ . In addition, the light source 130 is turned on at a point in time when the oscillating mirror 133 reaches where the emission angle of light from the principal surface 113s of the light guide plate 113 corresponds to  $\alpha_2$ . Furthermore, at this point in time between time  $t_1$  and time  $t_2$ , a left-eye image is displayed on the liquid-crystal panel 115. By doing so, it is possible to cause only the left eye 141h of the viewer 141 and the left eye 142h of the viewer 142 to recognize the left-eye image. Rapid repetition of these operations produces an advantageous effect that both the viewers 141 and 142 can recognize stereoscopic images. Also in the case where there are a larger number of persons, needless to say, as long as the range of emission angles  $\pm\phi$  includes angles of deflection for the right eye and the left eye of each person, turning on the light source 130 at appropriate points in time allows the person to recognize stereoscopic images no matter how many persons there are, which is an advantage.

**[0074]** It is to be noted that the Fresnel lens 132 may have a wedge shape in the latter stage thereof, as shown in (b) of FIG. 5, to emit the light toward the oscillating mirror 133.

**[0075]** Although the oscillating mirror is used here as an element which deflects light, this is of course not the only example, and another element may be adopted as long as such an element produces the same or like advantageous effects.

(Variation 3 of Embodiment)

**[0076]** Next, a stereoscopic image display apparatus 200 according to Variation 3 of this embodiment shall be described with reference to FIG. 7. FIG. 7 shows, in (a), a plan view of the stereoscopic image display apparatus 200. FIG. 7 shows, in (b), a side view of the stereoscopic image display apparatus 200. FIG. 7 shows, in (c), a first schematic light path diagram inside a light guide plate

202 of the stereoscopic image display apparatus 200. FIG. 7 shows, in (d), a second schematic light path diagram inside the light guide plate 202 of the stereoscopic image display apparatus 200.

**[0077]** The stereoscopic image display apparatus 200 includes the same structural elements as those in the stereoscopic image display apparatus 100, but is different from the stereoscopic image display apparatus 100 in that the width of the light guide plate 202 is longer than the width  $W$  of the liquid-crystal panel 115 by  $L$  on either side, that is, by  $2L$  in total. As in the stereoscopic image display apparatus 100, the light 117h and the light 117m which enter the light guide plate 202 form, upon the entering, the respective angles of  $\theta_1$  in the opposite directions with respect to the light guide plate 202. FIG. 7 schematically shows, in (c), a left end portion of the light guide plate 202 and the light 117m and the light 117h which enter the left end portion. The light 117m which entered the left end portion of the light guide plate 202 at the angle of  $\theta_1$  is refracted and thereby has an angle  $\theta_2$  inside the light guide 202, and then enters and is totally reflected off a left side surface 202h of the light guide plate 202. The light 117m after totally reflected has its directions changed to the lower right in the drawing and propagates in the same direction as the light 117h. Therefore, in the area of the light guide plate 202 which covers a distance  $L$  from the left side surface thereof, the light 117h directed to the lower right in the drawing is mixed with the light 117m even at a point in time when only the light 117m mainly enters the area. Furthermore, at a point in time when the light 117h mainly enters the light guide plate 202, the light 117h which enters the light guide plate 202 from an incidence surface 202n of the light guide plate 202 cannot pass through the lower left half of the left end portion of the light guide plate 202 (the hatched region in (c) of FIG. 7). The same applies to the right end portion of the light guide plate 202 where left and right are reversed. Accordingly, with the light guide plate 202 set to have a width longer than the width  $W$  of the liquid-crystal panel by the distance  $L$  on either side as in the stereoscopic image display apparatus 200, it is possible to prevent crosstalk attributed to the mixture of the light 117m and the 117h and prevent image abnormality attributed to missing illumination, and therefore possible to constitute the stereoscopic image display apparatus 200 which displays high quality stereoscopic images.

**[0078]** Here, for example, when a height  $H$  of the light guide plate = 150 mm, an incidence angle  $\theta_1 = 5.71$  degrees, and a refractive index of the light guide plate 202 = 1.50, then  $\theta_2 = 3.8$  degrees,  $L = 150 \text{ mm} \times \tan(3.8) = 10.0 \text{ mm}$ .

**[0079]** Furthermore, as in (d) of FIG. 7, a light absorber 201 may be provided on the left side surface 202h or the right side surface (not shown) of the light guide plate 202. With this, the total reflection on the left side surface 202h or the right side surface (not shown) can be prevented, which makes it possible to constitute the stereoscopic image display apparatus 200 which involves no crosstalk

essentially and displays high quality stereoscopic images.

(Variation 4 of Embodiment)

**[0080]** Next, a stereoscopic image display apparatus 200 according to Variation 4 of this embodiment shall be described with reference to FIG. 8. As shown in FIG. 8, it may be that in the stereoscopic image display apparatus 210, a light guide plate 211 and a Fresnel lens 212 each has a trapezoidal shape, and the light absorber 201 is provided on a right side surface 212m and a left side surface 212h of the light guide plate 211. With this, it is possible to remove a dead space and thereby constitute the stereoscopic image display apparatus 210 which is at a low price and small in size.

(Variation 5 of Embodiment)

**[0081]** Next, a stereoscopic image display apparatus 220 according to Variation 5 of this embodiment shall be described with reference to FIG. 9. As shown in FIG. 9, the stereoscopic image display apparatus 220 can be a stereoscopic image display apparatus free from dead space. The stereoscopic image display apparatus 220 is substantially the same as the stereoscopic image display apparatus 100 up to the point that the light passes through the lens array 119, but is different therefrom in that a polarizing plate 223 is inserted between (i) the right-eye light source 112m and the left-eye light source 112h and (ii) the collimating lens 114. Furthermore, the stereoscopic image display apparatus 220 includes, in the regions of the light guide plate 221 which cover the distance L from either end thereof, a light source 112m-A and a light source 112h-A each of which emits light that enters the light guide plate 221 outward. Furthermore, the stereoscopic image display apparatus 220 includes a polarization switching element 222 between the polarizing plate 223 and the collimating lens 114 on the path of the light 117m and the light 117h emitted respectively from the light source 112m-A and the light source 112h-A. It is to be noted that the light source 112m-A and the light source 112h-A may be used in combination with parts of the light source 112m and the light source 112h in the stereoscopic image display apparatus 100. FIG. 9 shows a configuration of such combination.

**[0082]** A mechanism of operation of the stereoscopic image display apparatus 220 shall be described with reference to FIG. 10. FIG. 10 explains a first light path in the stereoscopic image display apparatus according to Variation 5 of this embodiment. FIG. 10 shows, in (a), a path of the light entering the right eye of a viewer. FIG. 10 shows, in (b), a region A, a region A1, and a region D in (a) of FIG. 10. FIG. 10 shows, in (c), a region B and a region C in (a) of FIG. 10.

**[0083]** Firstly, the case of causing light to enter only the right eye of a viewer (not shown) shall be described with reference to (a) of FIG. 10. In order to enter the right

eye of the viewer, the light 117m enters the light guide plate 221 at the angle of  $\theta 1$  and illuminates the region A (the trapezoidal area). Out of the light 117m, light incident on the region having the width L in the left end portion of the light guide plate 221 reaches a left side surface 221h of the light guide plate while propagating inside the light guide plate 221, and then enters a quarter-wave plate 224 and is totally reflected off a side surface thereof, thereby changing its direction to the lower right, and then passes through the quarter-wave plate 224 again, thereby propagating through the region B. At this time, as shown in the drawing, the quarter-wave plate 224 acts to cause a 90 degree rotation of the polarization direction of the light 117m with respect to the propagation direction thereof, which leaves only polarization components parallel to the XZ plane. Therefore, light totally reflected off a prism 221p and directed toward the liquid-crystal panel 115 while propagating through the region B is absorbed by the polarizing plate of the liquid-crystal panel 115. Consequently, such light does not contribute to image formation. This means that such light will not enter the left eye of the viewer, causing no crosstalk. Furthermore, at this point in time, the left-eye light source 112h-A is turned on and the polarization switching element 222 for the left-eye light source 112h-A is driven, with the result that the light 117h entering the light guide plate 221 will have only the polarization components parallel to the XZ plane in (a) of FIG. 10. Thus, out of the light 117h, light totally reflected off the prism 221p and directed toward the liquid-crystal panel 115 while propagating through the region C (the region covering an area in which light travels before reaching a right side surface 221m in the light guide plate) after entering the light guide plate 221 is absorbed by the polarizing plate of the liquid-crystal panel 115. Consequently, such light does not contribute to image formation. This means that such light will not enter the left eye of the viewer, causing no crosstalk. Furthermore, out of the light 117h, light having traveled back and forth to the quarter-wave plate 224 after reaching the right side surface 221m has its polarization direction changed to the vertical direction in the drawing (the Y direction) when propagating through the region D. Such light propagates through the region D which the light 117m failed to illuminate inside the light guide plate 221 and therefore compensates for the region A, and has a polarization direction in the vertical direction in the drawing (the Y direction), which is the same as that in the region A, therefore contributing to image formation and entering the right eye of the viewer. Thus, without creating any dead space at all, the stereoscopic image display apparatus 220 is capable of allowing the entire region of the liquid-crystal panel 115 to be recognized as an image.

**[0084]** FIG. 11 explains a second light path in the stereoscopic image display apparatus according to Variation 5 of this embodiment. FIG. 11 shows a path of the light entering the left eye of a viewer. With reference to FIG. 11, the case of causing light to enter only the left eye of the viewer (not shown) shall be described. In order to

enter the left eye of the viewer, the light 117h enters the light guide plate 221 at the angle of  $\theta_1$  and illuminates the region E (the trapezoidal area). Out of the light 117h, light incident on the region having the width L in the right end portion of the light guide plate 221 reaches a right side surface 221m of the light guide plate while propagating inside the light guide plate 221, and then enters the quarter-wave plate 224 and is totally reflected off a side surface thereof, thereby changing its direction to the lower left, and then passes through the quarter-wave plate 224 again, thereby propagating through the region F. At this time, as shown in the drawing, the quarter-wave plate 224 acts to cause a 90 degree rotation of the polarization direction of the light 117h with respect to the propagation direction thereof, which leaves only polarization components parallel to the XZ plane. Therefore, light totally reflected off the prism 221p and directed toward the liquid-crystal panel 115 while propagating through the region F is absorbed by the polarizing plate of the liquid-crystal panel 115. Consequently, such light does not contribute to image formation. This means that such light will not enter the right eye of the viewer, causing no crosstalk. Furthermore, at this point in time, the right-eye light source 112m-A is turned on and the polarization switching element 222 for the right-eye light source 112m-A is driven, with the result that the light 117m entering the light guide plate 221 will have only the polarization components parallel to the XZ plane in FIG. 11. Thus, out of the light 117m, light totally reflected off the prism 221p and directed toward the liquid-crystal panel 115 while propagating inside the region G (the region covering an area in which light travels before reaching a left side surface 221h in the light guide plate) after entering the light guide plate 221 is absorbed by the polarizing plate of the liquid-crystal panel 115. Consequently, such light does not contribute to image formation. This means that such light will not enter the right eye of the viewer, causing no crosstalk. Furthermore, out of the light 117m, light having traveled back and forth to the quarter-wave plate 224 after reaching the left side surface 221h has its polarization direction changed to the vertical direction in the drawing (the Y direction) when propagating through the region H. Such light propagates through the region H which the light 117h failed to illuminate inside the light guide plate 221 and therefore compensates for the region E, and has a polarization direction in the vertical direction in the drawing (the Y direction), which is the same as that in the region E, therefore contributing to image formation and entering the left eye of the viewer. Thus, without creating any dead space at all, the stereoscopic image display apparatus 220 is capable of allowing the viewer to recognize the entire region of the liquid-crystal panel 115 as an image. Thus, without creating any dead space at all, the stereoscopic image display apparatus 220 can constitute a stereoscopic image display apparatus which saves space, is small in size, and provides high quality images.

**[0085]** It is to be noted that at a point in time when an

image enters the right eye of the viewer, it is sufficient that only the polarization switching element 222 provided on the path of the light from the light source 112h-A is driven while the polarization switching element 222 provided on the path of the light from the light source 112m-A is stopped being driven so that the polarization direction is not modulated. Likewise, at a point in time when an image enters the left eye of the viewer, it is sufficient that only the polarization switching element 222 provided on the path of the light from the light source 112m-A is driven while the polarization switching element 222 provided on the path of the light from the light source 112h-A is stopped being driven so that the polarization direction is not modulated.

**[0086]** It is to be noted that the above-described configurations in the embodiment are each an example, and it goes without saying that various modifications can be made to these configurations without departing from the teachings of the present invention. It is also possible as a matter of course to use, in combination, the above-described configurations in the embodiment and the invention resulting from modifying the configurations.

[Industrial Applicability]

**[0087]** The stereoscopic image display apparatus in the present invention is useful because it can constitute a stereoscopic image display apparatus which involves significantly reduced crosstalk, displays high quality images, and furthermore saves space, and is small in size and at a low price.

[Reference Signs List]

**[0088]**

10, 100, 124, 140, 200, 210, 220 Stereoscopic image display apparatus  
 11, 111, 141, 142 Viewer  
 11m, 111m, 141m, 142m Right eye  
 11h, 111h, 141h, 142h Left eye  
 12m, 112m Right-eye light source  
 12h, 112h Left-eye light source  
 13 Prism sheet  
 13a Prism  
 13b Principal surface  
 14 Lens sheet  
 15, 115 Liquid-crystal panel  
 16 Control unit  
 17h, 17m, 117h, 117m, 135 Light  
 117m-c, 117h-c Main light beam  
 113, 202, 211, 221 Light guide plate  
 113p, 221p Prism  
 113s Principal surface  
 113n, 202n Incidence surface  
 114 Collimating lens  
 118, 132, 212 Fresnel lens  
 119, 136 Lens array

120 Light source unit  
 121, 211, 223 Polarizing plate  
 122 Polarization beam splitter  
 123, 222 Polarization switching element  
 130 Light source  
 131 Magnifying lens  
 133 Oscillating mirror  
 134 Rotation axis  
 201 Light absorber  
 202h, 212h, 221h Left side surface  
 212m Right side surface  
 224 Quarter-wave plate

## Claims

### 1. A stereoscopic image display apparatus comprising:

a light source unit configured to emit light;  
 a light guide plate having an incidence surface on which the light emitted by the light source unit is incident and an emission surface from which incident light is emitted with a propagation direction thereof changed; and  
 a spatial light modulator which spatially modulates the light emitted from the emission surface, wherein the light source unit is configured to emit the light to cause the light to be incident on the incidence surface in a first direction for a right eye of a viewer and in a second direction for a left eye of the viewer, the first direction and the second direction being different from each other and each being inclined at a predetermined angle in the emission surface with respect to a reference direction perpendicular to an alignment direction of the right eye and the left eye of the viewer, and  
 the light emitted from the emission surface of the light guide plate is in a direction which is determined according to the propagation direction of the incident light and in which a component in the alignment direction, included in the propagation direction, is maintained.

### 2. The stereoscopic image display apparatus according to Claim 1, wherein the light source unit (i) includes:

a first light source oriented to cause a propagation direction of light emitted therefrom to be parallel to the first direction; and  
 a second light source oriented to cause a propagation direction of light emitted therefrom to be parallel to the second direction,

(ii) emits, as the light to be incident on the incidence surface in the first direction, the light emitted from the first light source, and

(iii) emits, as the light to be incident on the incidence surface in the second direction, the light emitted from the second light source.

3. The stereoscopic image display apparatus according to Claim 2,  
 wherein the first light source emits a polarized light beam having a polarization direction parallel to a normal of the emission surface,  
 the second light source emits a polarized light beam having a polarization direction parallel to the alignment direction, and  
 the light source unit further includes a polarization switching element through which the light emitted by the first light source passes and the light emitted by the second light source passes with the polarization direction thereof rotated 90 degrees with respect to a propagation direction thereof.

### 4. The stereoscopic image display apparatus according to Claim 1, wherein the light source unit includes:

a third light source which emits light; and  
 a propagation direction changing unit having at least a first state and a second state and configured to allow a dynamic change between the first state and the second state, the first state being a state in which a propagation direction of the light emitted by the third light source is changed to make the light propagate in the first direction, and the second state being a state in which a propagation direction of the light emitted by the third light source is changed to make the light propagate in the second direction,  
 the third light source emits the light when the propagation direction changing unit is in the first state and when the propagation direction changing unit is in the second state, and  
 the propagation direction changing unit is configured to cause the light emitted by the third light source in the first state to be emitted as the light to be incident on the incidence surface in the first direction, and cause the light emitted by the third light source in the second state to be emitted as the light to be incident on the incidence surface in the second direction.

5. The stereoscopic image display apparatus according to any one of Claims 1 to 4,  
 wherein among surfaces of the light guide plate which are adjacent to the emission surface, a surface above or below the emission surface as seen from the viewer is the incidence surface.

6. The stereoscopic image display apparatus according to any one of Claims 1 to 5,

wherein in the alignment direction, a length of the incidence surface of the light guide plate is greater than a length of the spatial light modulator.

7. The stereoscopic image display apparatus according to any one of Claims 1 to 6,  
wherein the light guide plate further includes a light absorber on a surface of the light guide plate which is adjacent to both the incidence surface and the emission surface. 5
8. The stereoscopic image display apparatus according to Claim 7,  
wherein the emission surface has a trapezoidal shape, and a surface of the light guide plate which is adjacent to the emission surface on one of parallel long sides of the trapezoidal shape is the incidence surface. 10
9. The stereoscopic image display apparatus according to Claim 1,  
wherein the light source unit is configured to emit the light to cause a polarized light beam thereof to enter the light guide plate, the polarized light beam having a polarization direction parallel to a normal of the emission surface, 20  
the light guide plate includes a polarization and reflection surface which is adjacent to both the emission surface and the incidence surface, rotates a polarization direction of the incident light 90 degrees with respect to the propagation direction of the incident light, and reflects the incident light, and the stereoscopic image display apparatus further comprises a polarization switching element which is at a position between the light source unit and the light guide plate and on a path of light traveling toward the polarization and reflection surface and through which the light passes with a polarization direction thereof rotated 90 degrees with respect to a propagation direction thereof, the light being included in the light emitted by the light source unit and being incident on the incidence surface in the first direction. 25 30 35 40
10. The stereoscopic image display apparatus according to Claim 9, 45  
wherein the polarization and reflection surface includes:  
a reflection surface which reflects a polarized light beam incident thereon; and 50  
a quarter-wave plate which is provided on the reflection surface, and imparts, to a polarization component of the polarized light beam incident on the quarter-wave plate, a phase difference corresponding to a quarter of a wavelength of the polarized light beam, with reference to a polarization component thereof in a predetermined 55

direction, and from which the polarized light beam resulting from the imparting is emitted, the polarization component to which the phase difference is imparted being perpendicular to the predetermined direction.

11. The stereoscopic image display apparatus according to any one of Claims 1 to 10,  
wherein the spatial light modulator is a liquid-crystal panel.
12. The stereoscopic image display apparatus according to any one of Claims 1 to 11,  
wherein (i) when the light enters the light guide plate in the first direction, the spatial light modulator spatially modulates the light to form an image for right eye and displays the image for right eye toward the right eye of the viewer, (ii) when the light enters the light guide plate in the second direction, the spatial light modulator spatially modulates the light to form an image for left eye and displays the image for left eye toward the left eye of the viewer, and (iii) the spatial light modulator switches in time series between displaying the image for left eye and displaying the image for right eye.
13. A stereoscopic image display method performed by a stereoscopic image display apparatus including: a light source unit which emits light; a light guide plate having an incidence surface on which the light emitted by the light source unit is incident and an emission surface from which incident light is emitted with a propagation direction thereof changed; and a spatial light modulator which spatially modulates the light emitted from the emission surface, the stereoscopic image display method comprising:  
emitting the light to cause the light to be incident on the incidence surface in a first direction for a right eye of a viewer and in a second direction for a left eye of the viewer, the first direction and the second direction being different from each other and each being inclined at a predetermined angle in the emission surface with respect to a reference direction perpendicular to an alignment direction of the right eye and the left eye of the viewer; and  
emitting the light from the emission surface in a direction which is determined according to the propagation direction of the incident light and in which a component in the alignment direction, included in the propagation direction, is maintained.

#### Amended claims under Art. 19.1 PCT

1. A stereoscopic image display apparatus compris-

ing:

a light source unit configured to emit light;  
 a light guide plate having an incidence surface  
 on which the light emitted by the light source unit  
 is incident and an emission surface from which  
 incident light is emitted with a propagation direc-  
 tion thereof changed; and  
 a spatial light modulator which spatially modu-  
 lates the light emitted from the emission surface,  
 wherein the light source unit is configured to emit  
 the light to cause the light to be incident on the  
 incidence surface in a first direction for a right  
 eye of a viewer and in a second direction for a  
 left eye of the viewer, the first direction and the  
 second direction being different from each other  
 and each being inclined at a predetermined angle  
 in the emission surface with respect to a refer-  
 ence direction perpendicular to an alignment  
 direction of the right eye and the left eye of the  
 viewer,  
 the light incident on the incidence surface of the  
 light guide plate is emitted from the emission  
 surface of the light guide plate, and  
 an incidence angle of the light being incident on  
 the incidence surface and an emission angle of  
 the light being emitted from the emission surface  
 are equal.

**2.** The stereoscopic image display apparatus ac-  
 cording to Claim 1,  
 wherein the light source unit (i) includes:

a first light source oriented to cause a propaga-  
 tion direction of light emitted therefrom to be par-  
 allel to the first direction; and  
 a second light source oriented to cause a prop-  
 agation direction of light emitted therefrom to be  
 parallel to the second direction,

(ii) emits, as the light to be incident on the  
 incidence surface in the first direction, the  
 light emitted from the first light source, and  
 (iii) emits, as the light to be incident on the  
 incidence surface in the second direction,  
 the light emitted from the second light  
 source.

**3.** The stereoscopic image display apparatus ac-  
 cording to Claim 2,  
 wherein the first light source emits a polarized light  
 beam having a polarization direction parallel to a nor-  
 mal of the emission surface,  
 the second light source emits a polarized light beam  
 having a polarization direction parallel to the align-  
 ment direction, and  
 the light source unit further includes a polarization  
 switching element through which the light emitted by

the first light source passes and the light emitted by  
 the second light source passes with the polarization  
 direction thereof rotated 90 degrees with respect to  
 a propagation direction thereof.

**4.** The stereoscopic image display apparatus ac-  
 cording to Claim 1,  
 wherein the light source unit includes:

a third light source which emits light; and  
 a propagation direction changing unit having at  
 least a first state and a second state and con-  
 figured to allow a dynamic change between the  
 first state and the second state, the first state  
 being a state in which a propagation direction of  
 the light emitted by the third light source is  
 changed to make the light propagate in the first  
 direction, and the second state being a state in  
 which a propagation direction of the light emitted  
 by the third light source is changed to make the  
 light propagate in the second direction,  
 the third light source emits the light when the  
 propagation direction changing unit is in the first  
 state and when the propagation direction chang-  
 ing unit is in the second state, and  
 the propagation direction changing unit is con-  
 figured to cause the light emitted by the third  
 light source in the first state to be emitted as the  
 light to be incident on the incidence surface in  
 the first direction, and cause the light emitted by  
 the third light source in the second state to be  
 emitted as the light to be incident on the inci-  
 dence surface in the second direction.

**5.** The stereoscopic image display apparatus ac-  
 cording to any one of Claims 1 to 4,  
 wherein among surfaces of the light guide plate  
 which are adjacent to the emission surface, a surface  
 above or below the emission surface as seen from  
 the viewer is the incidence surface.

**6.** The stereoscopic image display apparatus ac-  
 cording to any one of Claims 1 to 5,  
 wherein in the alignment direction, a length of the  
 incidence surface of the light guide plate is greater  
 than a length of the spatial light modulator.

**7.** The stereoscopic image display apparatus ac-  
 cording to any one of Claims 1 to 6,  
 wherein the light guide plate further includes a light  
 absorber on a surface of the light guide plate which  
 is adjacent to both the incidence surface and the  
 emission surface.

**8.** The stereoscopic image display apparatus ac-  
 cording to Claim 7,  
 wherein the emission surface has a trapezoidal  
 shape, and a surface of the light guide plate which

is adjacent to the emission surface on one of parallel long sides of the trapezoidal shape is the incidence surface.

**9.** The stereoscopic image display apparatus according to Claim 1,  
wherein the light source unit is configured to emit the light to cause a polarized light beam thereof to enter the light guide plate, the polarized light beam having a polarization direction parallel to a normal of the emission surface,  
the light guide plate includes a polarization and reflection surface which is adjacent to both the emission surface and the incidence surface, rotates a polarization direction of the incident light 90 degrees with respect to the propagation direction of the incident light, and reflects the incident light, and  
the stereoscopic image display apparatus further comprises a polarization switching element which is at a position between the light source unit and the light guide plate and on a path of light traveling toward the polarization and reflection surface and through which the light passes with a polarization direction thereof rotated 90 degrees with respect to a propagation direction thereof, the light being included in the light emitted by the light source unit and being incident on the incidence surface in the first direction.

**10.** The stereoscopic image display apparatus according to Claim 9,  
wherein the polarization and reflection surface includes:

a reflection surface which reflects a polarized light beam incident thereon; and  
a quarter-wave plate which is provided on the reflection surface, and imparts, to a polarization component of the polarized light beam incident on the quarter-wave plate, a phase difference corresponding to a quarter of a wavelength of the polarized light beam, with reference to a polarization component thereof in a predetermined direction, and from which the polarized light beam resulting from the imparting is emitted, the polarization component to which the phase difference is imparted being perpendicular to the predetermined direction.

**11.** The stereoscopic image display apparatus according to any one of Claims 1 to 10,  
wherein the spatial light modulator is a liquid-crystal panel.

**12.** The stereoscopic image display apparatus according to any one of Claims 1 to 11,  
wherein (i) when the light enters the light guide plate in the first direction, the spatial light modulator spa-

tially modulates the light to form an image for right eye and displays the image for right eye toward the right eye of the viewer, (ii) when the light enters the light guide plate in the second direction, the spatial light modulator spatially modulates the light to form an image for left eye and displays the image for left eye toward the left eye of the viewer, and (iii) the spatial light modulator switches in time series between displaying the image for left eye and displaying the image for right eye.

**13.** A stereoscopic image display method performed by a stereoscopic image display apparatus including: a light source unit which emits light; a light guide plate having an incidence surface on which the light emitted by the light source unit is incident and an emission surface from which incident light is emitted with a propagation direction thereof changed; and a spatial light modulator which spatially modulates the light emitted from the emission surface, the stereoscopic image display method comprising:

emitting the light to cause the light to be incident on the incidence surface in a first direction for a right eye of a viewer and in a second direction for a left eye of the viewer, the first direction and the second direction being different from each other and each being inclined at a predetermined angle in the emission surface with respect to a reference direction perpendicular to an alignment direction of the right eye and the left eye of the viewer; and  
emitting, from the emission surface, the light incident on the incidence surface,  
wherein an incidence angle of the light being incident on the incidence surface and an emission angle of the light being emitted from the emission surface are equal.

FIG. 1

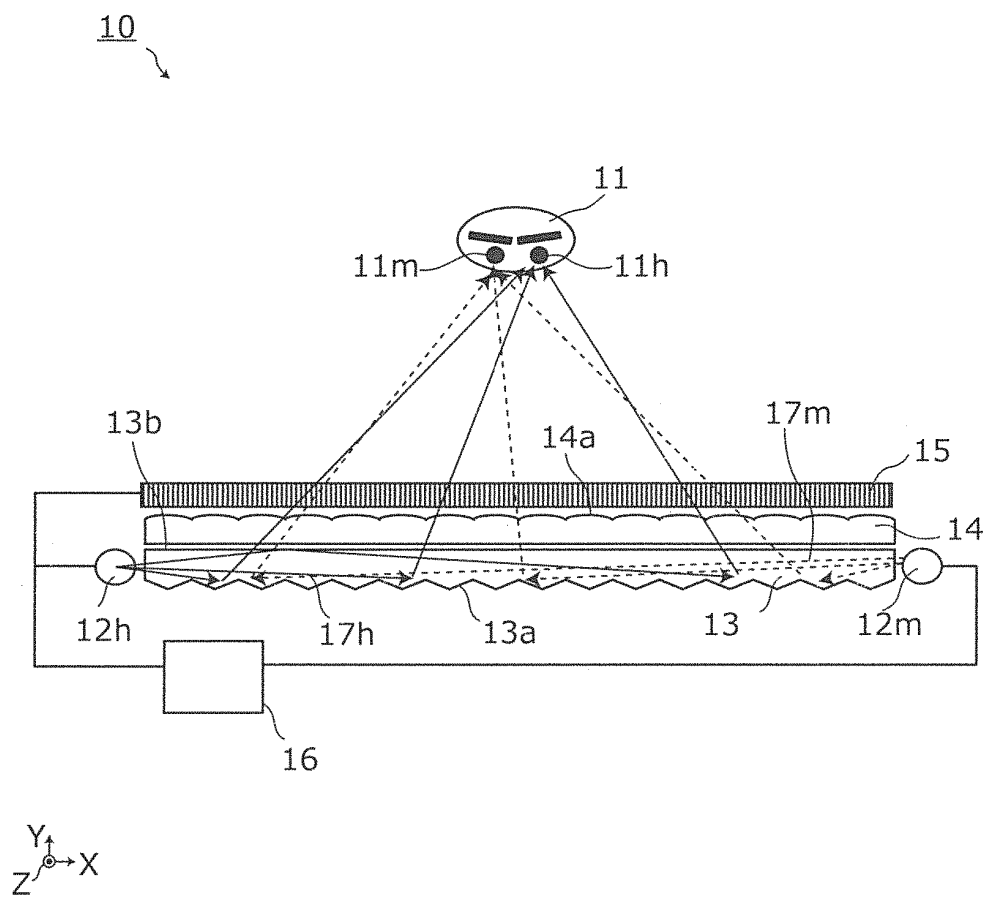


FIG. 2

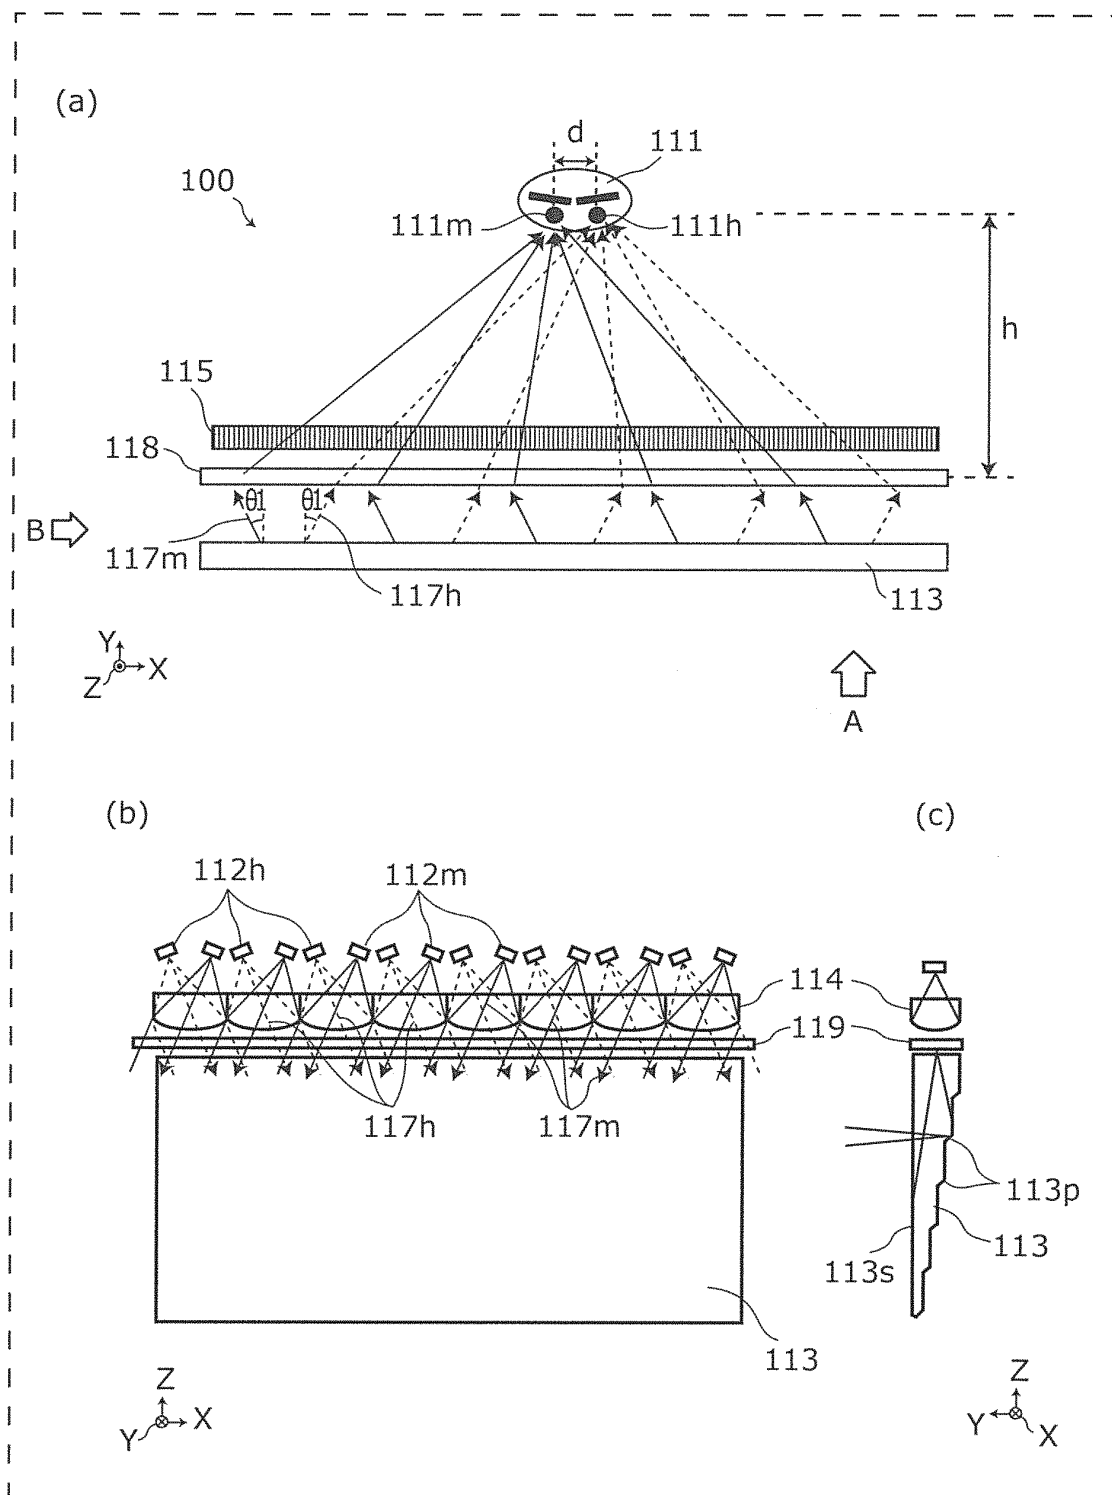


FIG. 3

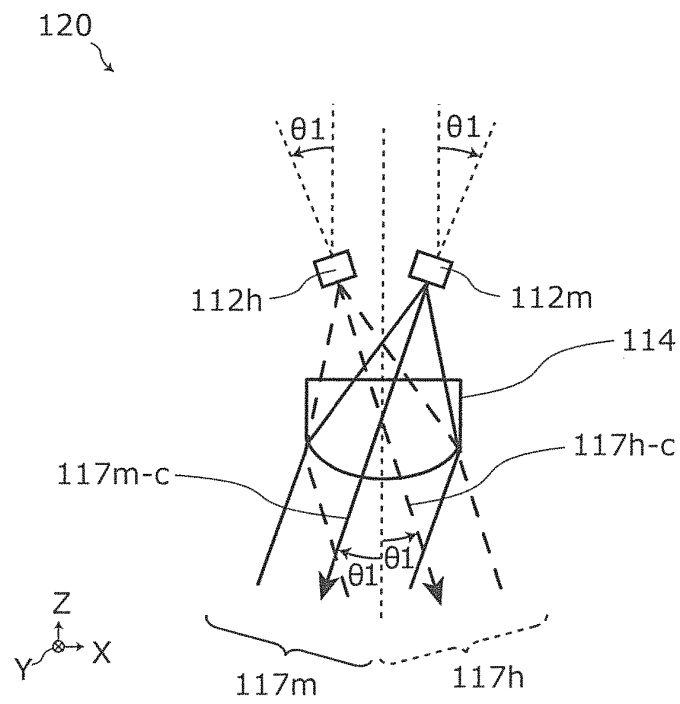


FIG. 4

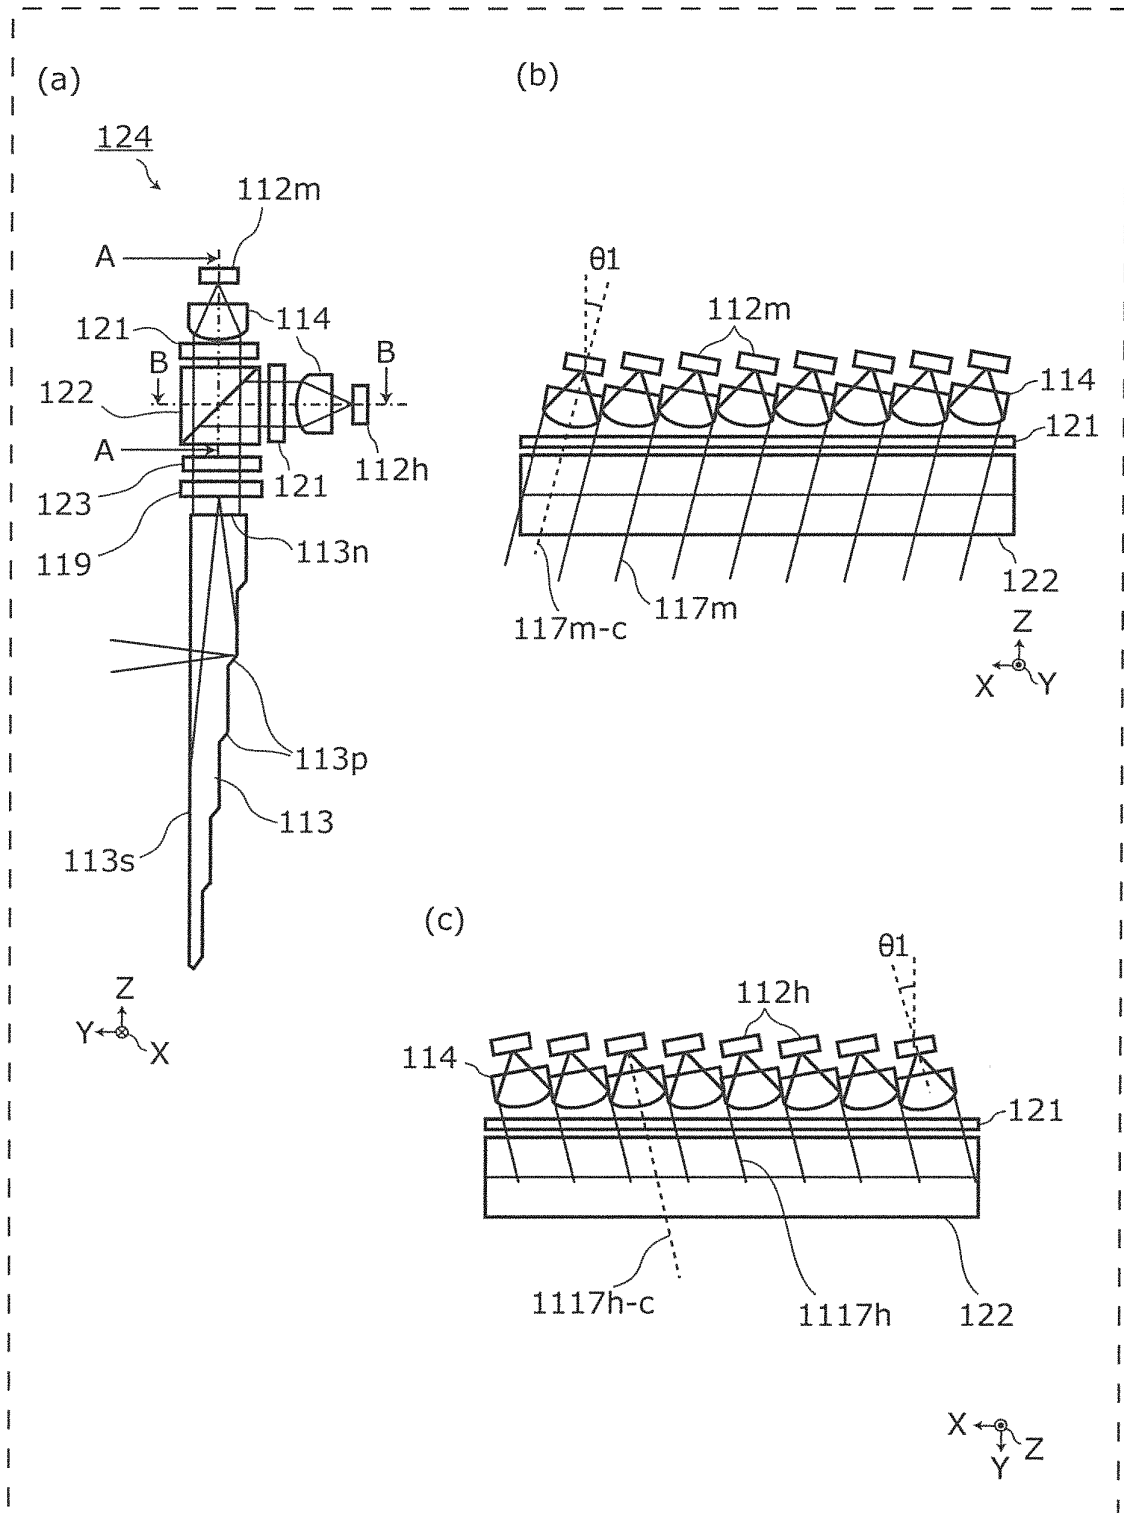


FIG. 5

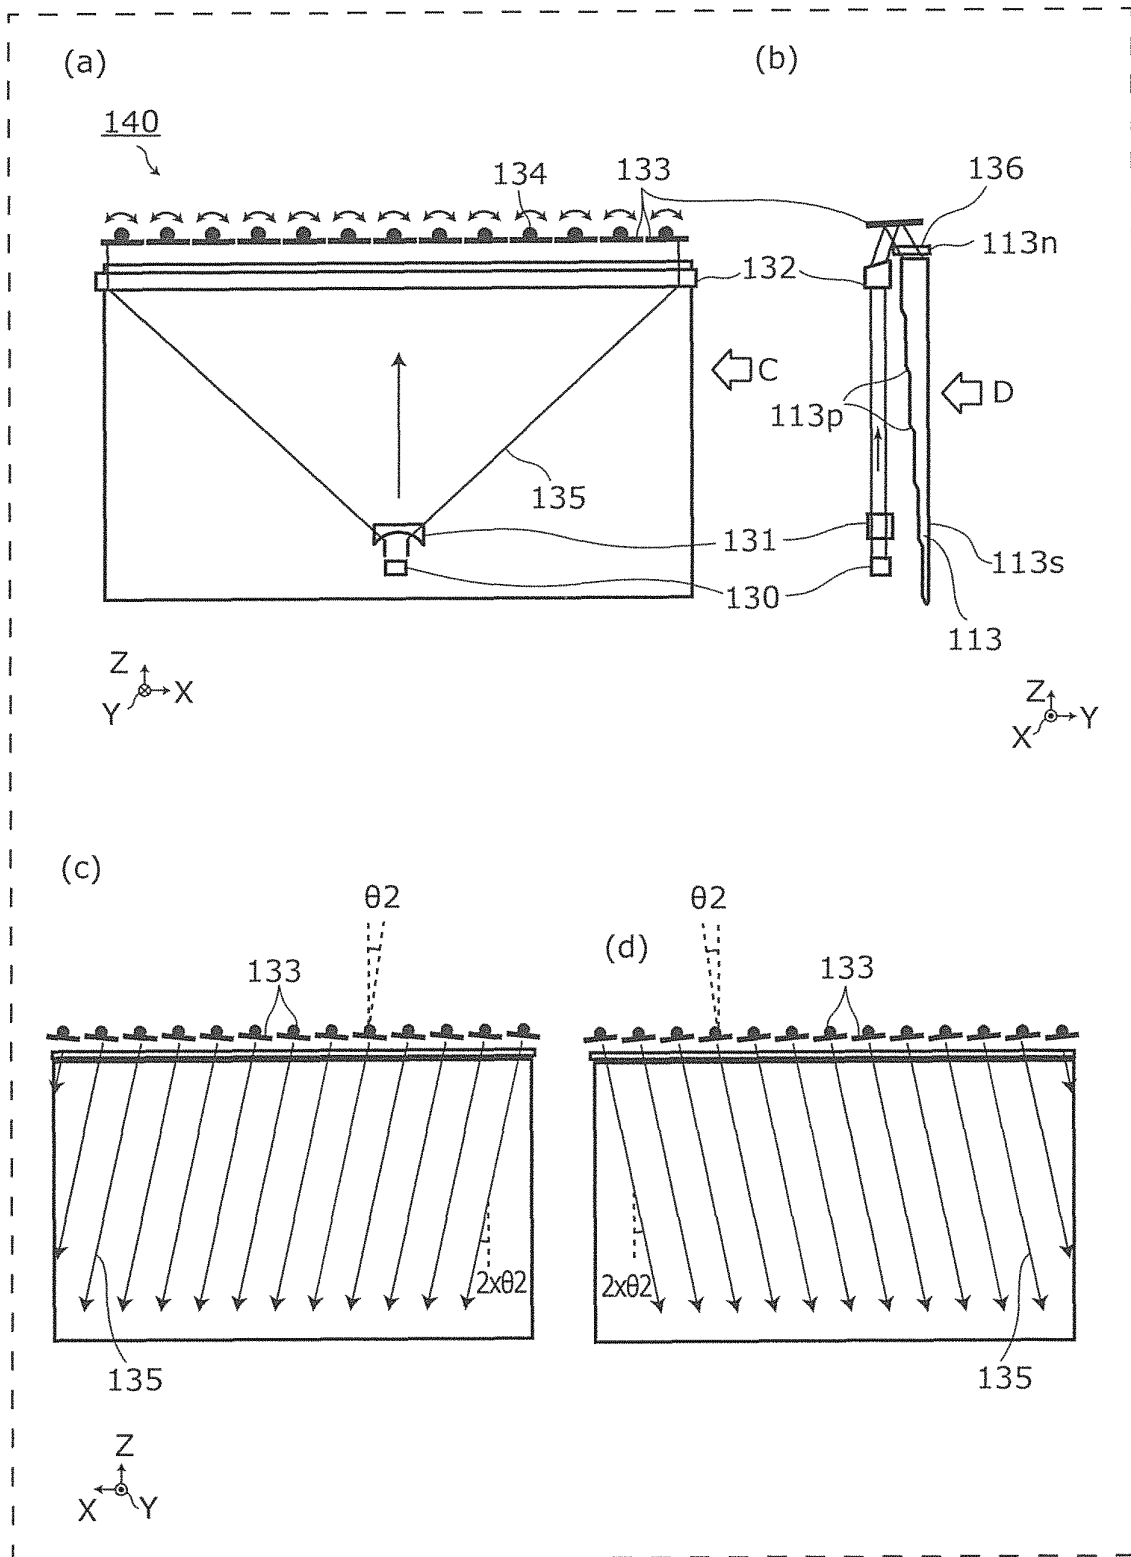


FIG. 6

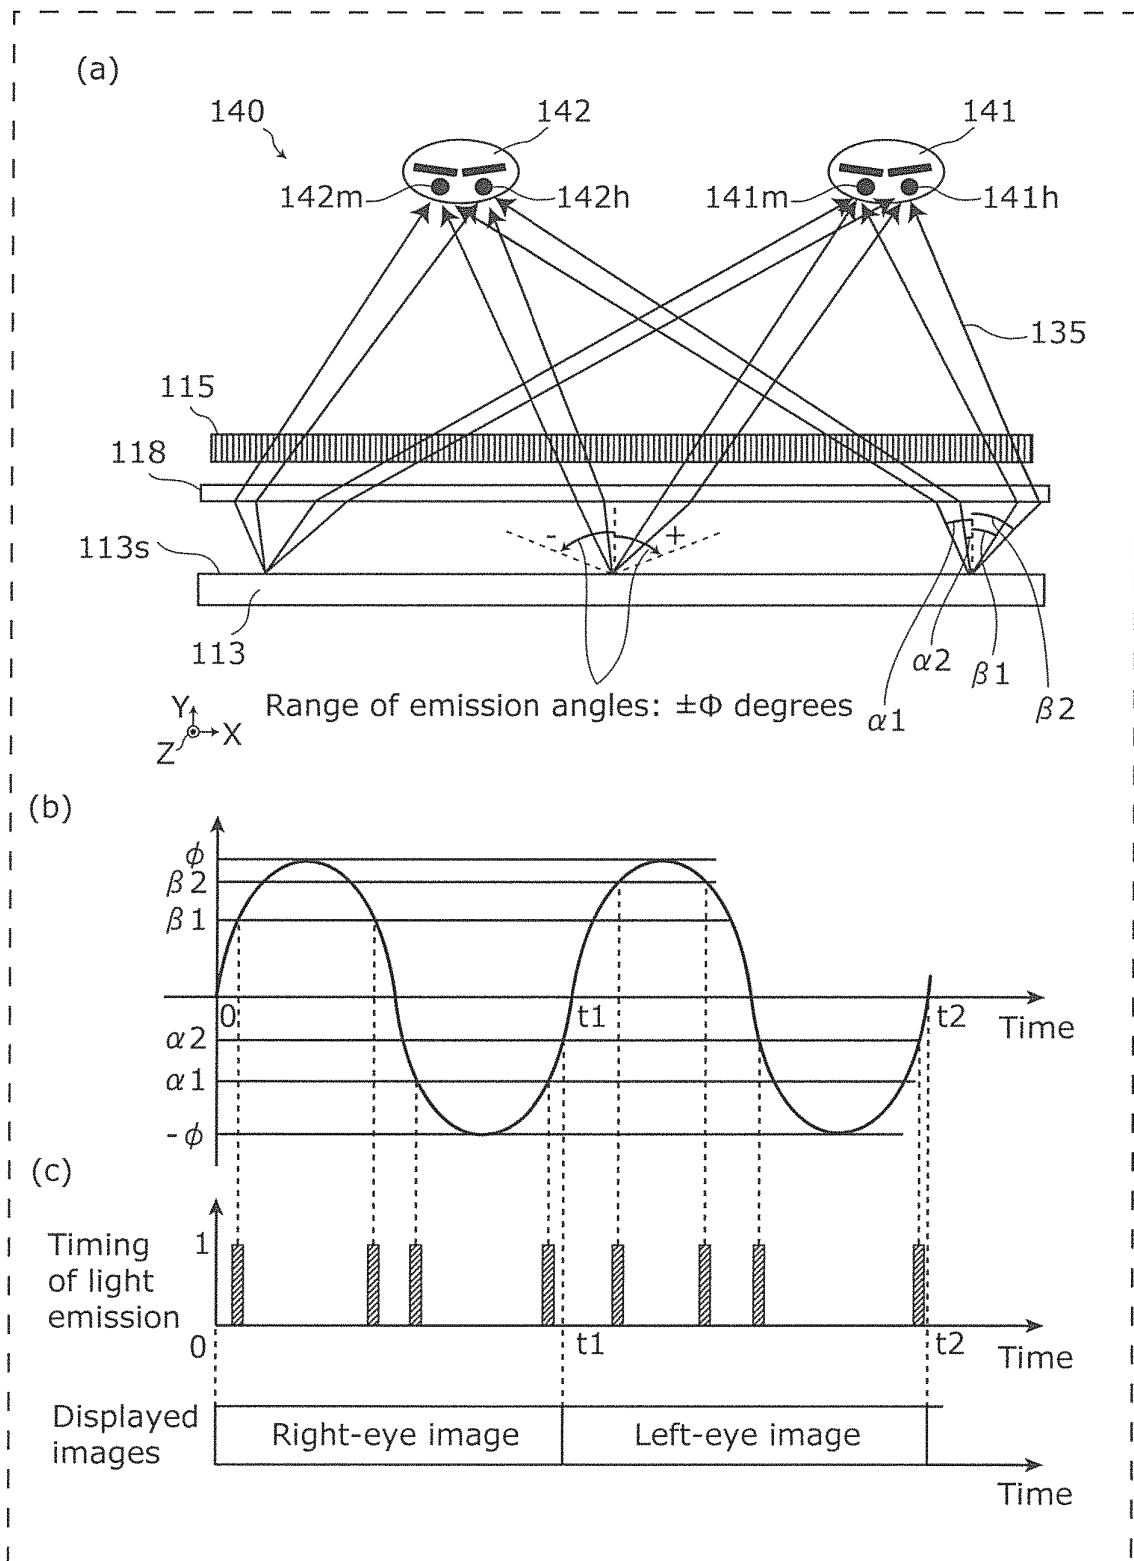


FIG. 7

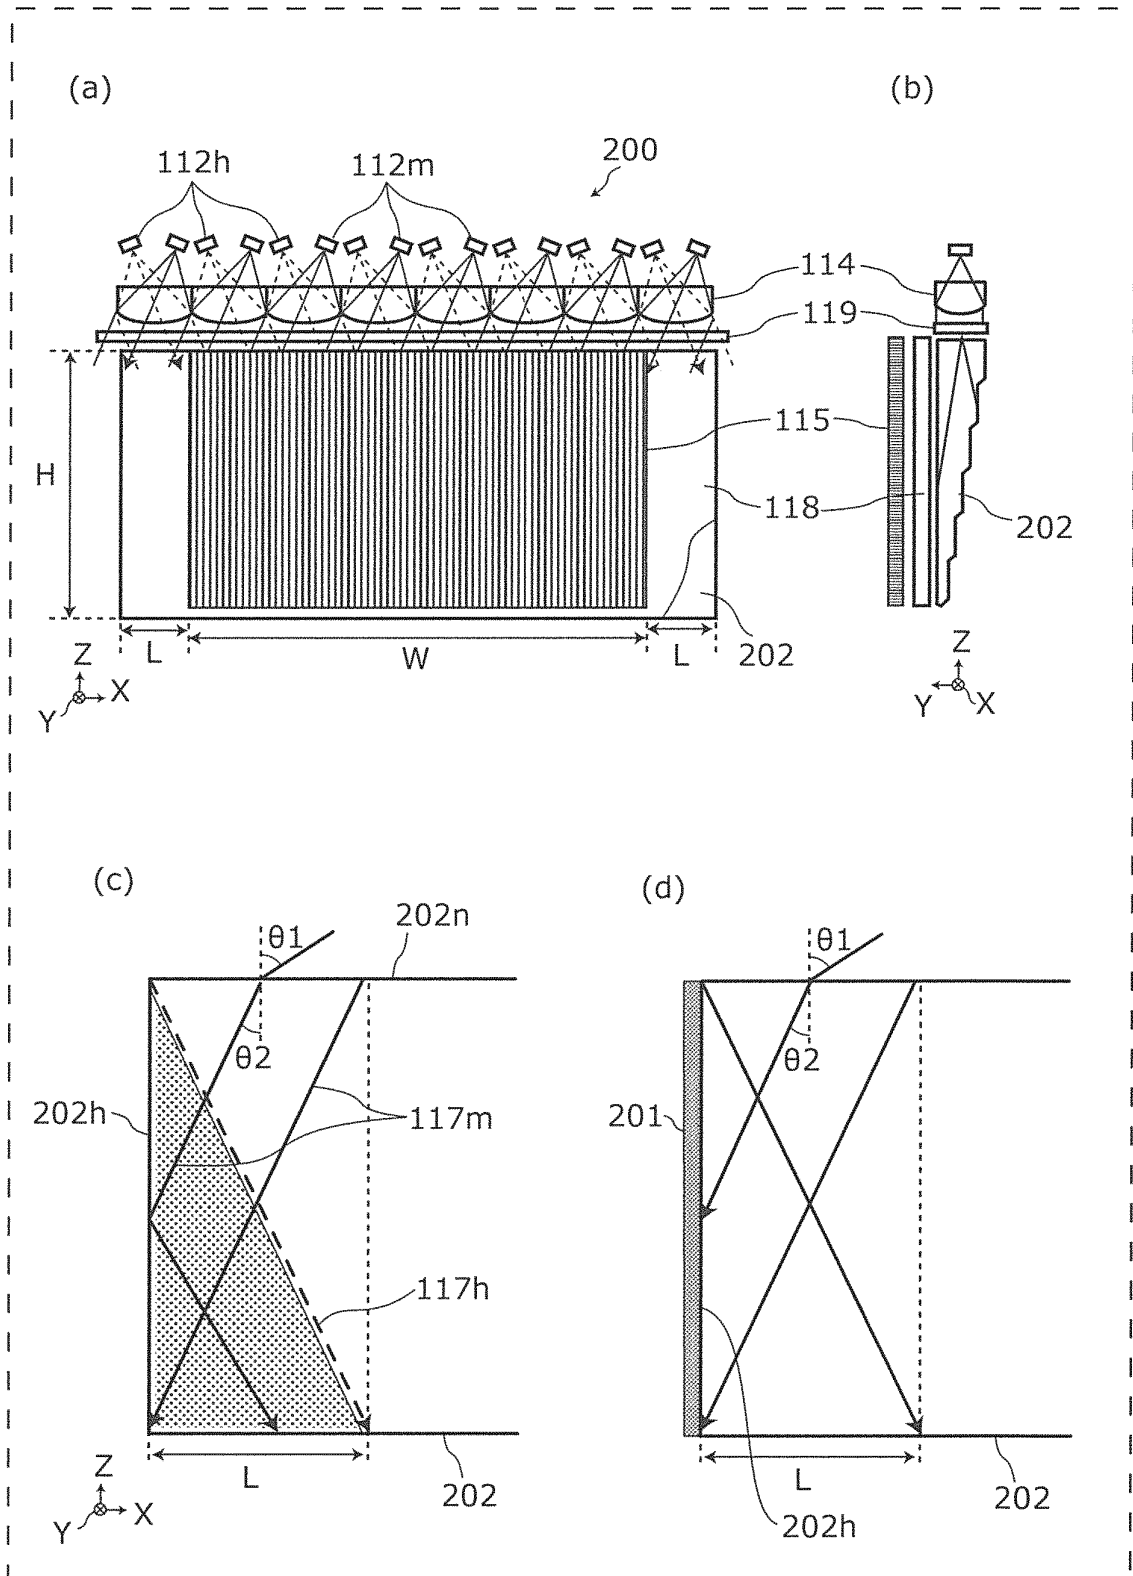


FIG. 8

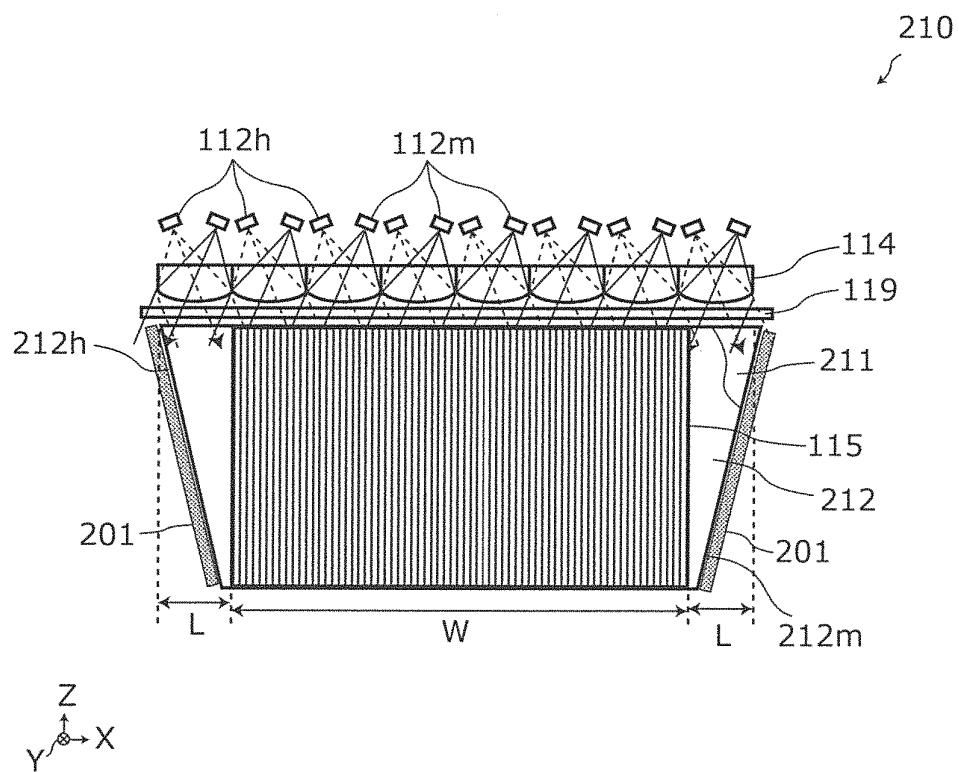


FIG. 9

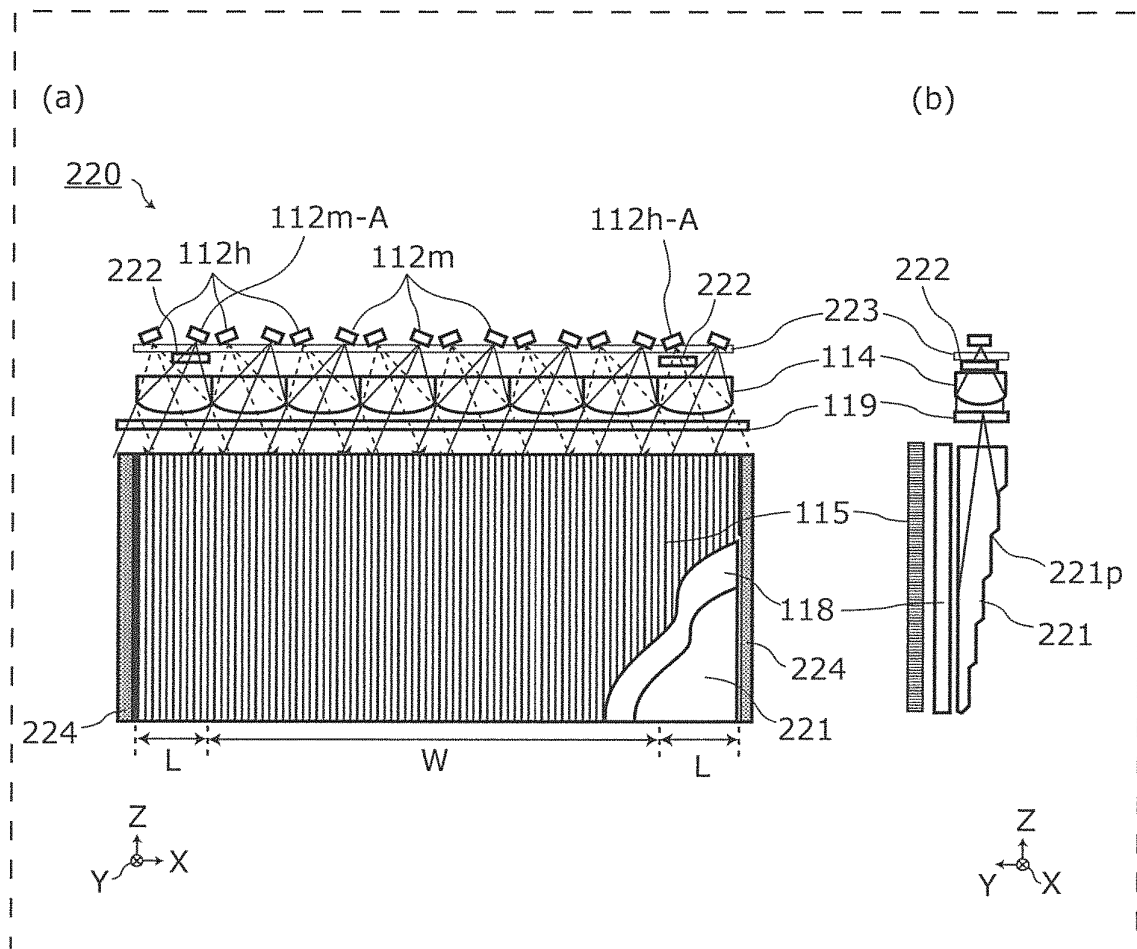


FIG. 10


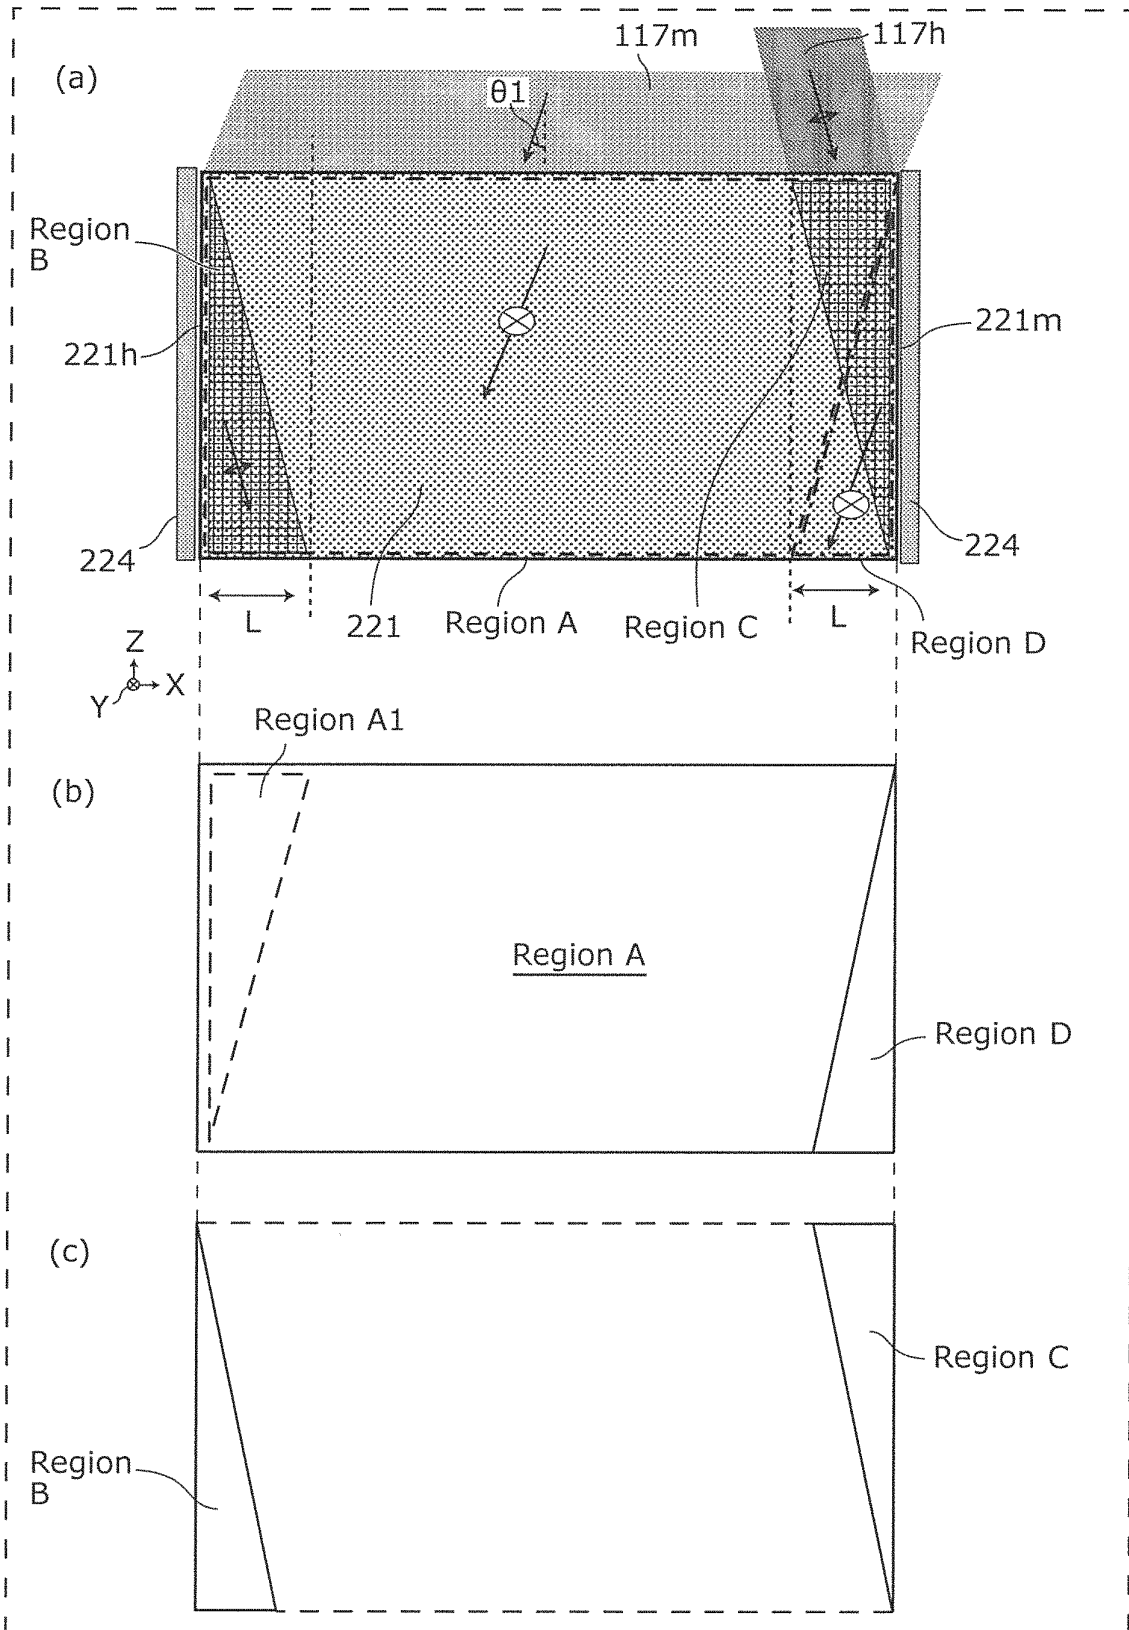


FIG. 11

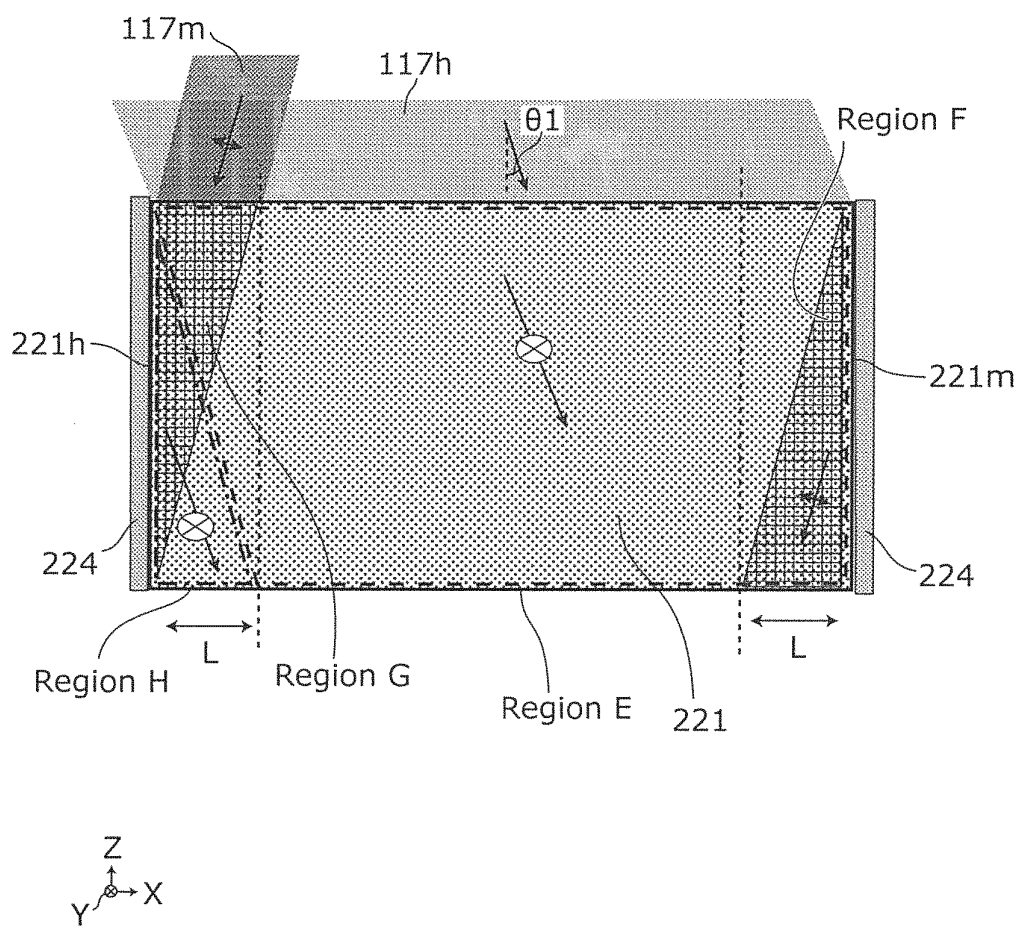

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2013/003598

## A. CLASSIFICATION OF SUBJECT MATTER

G02F1/13(2006.01)i, G02B27/22(2006.01)i, G02F1/1335(2006.01)i,  
G02F1/13357(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
G02F1/13, G02B27/22, G02F1/1335, G02F1/13357

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2013  
Kokai Jitsuyo Shinan Koho 1971-2013 Toroku Jitsuyo Shinan Koho 1994-2013

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                                                                        | Relevant to claim No.           |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| X         | JP 2006-184506 A (Casio Computer Co., Ltd.),<br>13 July 2006 (13.07.2006),<br>claim 1; paragraphs [0027] to [0090]; fig. 1<br>to 12<br>(Family: none)                                     | 1-2, 5-6,<br>11-13<br>3-4, 7-10 |
| Y         | WO 2010/116702 A1 (Panasonic Corp.),<br>14 October 2010 (14.10.2010),<br>paragraphs [0044] to [0062], [0104] to [0110];<br>fig. 12 to 18, 26 to 27<br>& US 2011/58122 A1 & CN 101965478 A | 3, 9-10                         |
| Y         | JP 2007-94268 A (Casio Computer Co., Ltd.),<br>12 April 2007 (12.04.2007),<br>paragraphs [0020] to [0036]; fig. 1 to 3<br>& US 2007/76149 A1                                              | 3                               |

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search  
16 August, 2013 (16.08.13)

Date of mailing of the international search report  
27 August, 2013 (27.08.13)

Name and mailing address of the ISA/  
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2013/003598

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                                                                                                                                       | Relevant to claim No. |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Y         | JP 9-146043 A (Sanyo Electric Co., Ltd.),<br>06 June 1997 (06.06.1997),<br>paragraphs [0019] to [0033]; fig. 1 to 8<br>(Family: none)                                                                                                                    | 4                     |
| Y         | JP 2006-501512 A (Koninklijke Philips<br>Electronics N.V.),<br>12 January 2006 (12.01.2006),<br>paragraphs [0073] to [0074]; fig. 8<br>& US 2007/125971 A1 & EP 1552339 A<br>& WO 2004/31842 A1 & KR 10-2005-57612 A<br>& CN 1685279 A & AU 2003267705 A | 7-8                   |

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 2010506214 A [0003]

|               |                                                                                           |         |            |
|---------------|-------------------------------------------------------------------------------------------|---------|------------|
| 专利名称(译)       | 三维图像显示装置和三维图像显示方法                                                                         |         |            |
| 公开(公告)号       | <a href="#">EP2860576A1</a>                                                               | 公开(公告)日 | 2015-04-15 |
| 申请号           | EP2013803754                                                                              | 申请日     | 2013-06-07 |
| 申请(专利权)人(译)   | PANASONIC知识产权管理有限公司.                                                                      |         |            |
| 当前申请(专利权)人(译) | PANASONIC知识产权管理有限公司.                                                                      |         |            |
| [标]发明人        | SHIKII SHINICHI<br>SUGIYAMA KEIJI                                                         |         |            |
| 发明人           | SHIKII, SHINICHI<br>SUGIYAMA, KEIJI                                                       |         |            |
| IPC分类号        | G02F1/13 G02B27/22 G02F1/1335 G02F1/13357 G02B30/25 G02B30/60 H04N13/04                   |         |            |
| CPC分类号        | G02B30/27 G02B30/35 H04N13/32 G02B30/00 G02B30/24 G02B30/25 G02B30/34 G02B30/40 G02B30/60 |         |            |
| 优先权           | 61/657931 2012-06-11 US                                                                   |         |            |
| 其他公开文献        | EP2860576A4<br>EP2860576B1                                                                |         |            |
| 外部链接          | <a href="#">Espacenet</a>                                                                 |         |            |

#### 摘要(译)

一种立体图像显示装置，包括：发光的光源单元（112m和112h）；导光板（113）具有入射表面和发射表面，在所述入射表面上，由光源单元发射的光入射在所述入射表面上，并且发射入射光的发射表面的传播方向改变；液晶面板（115），其对从发射表面发射的光进行空间调制，并且光源单元发射光，使得光在左右眼的第一和第二方向上入射到入射表面上观察者彼此不同并且每个观察者相对于垂直于观察者的右眼和左眼的对准方向的参考方向在发射表面中以预定角度倾斜，并且从发射表面发射的光导光板的一个方向是根据入射光的传播方向确定的方向，并且其中保持包括在传播方向上的在取向方向上的分量。

