



(11)

EP 2 866 076 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
04.04.2018 Bulletin 2018/14

(51) Int Cl.:
G02F 1/13 (2006.01) **G02F 1/1333** (2006.01)
H05K 5/00 (2006.01) **H05K 7/14** (2006.01)

(21) Application number: **14003993.4**

(22) Date of filing: **28.10.2011**

(54) Display apparatus

Anzeigevorrichtung

Appareil d'affichage

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **28.10.2010 KR 20100106193**
28.10.2010 KR 20100106194
28.10.2010 KR 20100106196
29.10.2010 US 407916 P
12.01.2011 KR 20110003123
12.01.2011 KR 20110003124
17.01.2011 KR 20110004541
17.01.2011 KR 20110004544
31.03.2011 KR 20110029966
19.08.2011 KR 20110082942
23.08.2011 US 201161526273 P
18.09.2011 KR 20110093778
21.09.2011 US 201161537520 P

(43) Date of publication of application:
29.04.2015 Bulletin 2015/18

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
13003606.4 / 2 653 911
11008667.5 / 2 447 762

(73) Proprietor: **LG Electronics, Inc.**
Seoul 150-721 (KR)

(72) Inventors:
• **Byeon, Jonghyun**
137-724 Seoul (KR)
• **Kim, Sunghwan**
137-724 Seoul (KR)
• **Kim, Yunjoo**
137-724 Seoul (KR)
• **Kim, Cheolsoo**
137-724 Seoul (KR)
• **Park, Sangdon**
137-724 Seoul (KR)
• **Lee, Moungyoub**
137-724 Seoul (KR)
• **Oh, Hyoungsuck**
137-724 Seoul (KR)
• **Lee, Deogjin**
137-724 Seoul (KR)

(74) Representative: **Frenkel, Matthias Alexander**
Wuesthoff & Wuesthoff
Patentanwälte PartG mbB
Schweigerstrasse 2
81541 München (DE)

(56) References cited:
EP-A1- 2 026 408 **TW-A- 200 819 830**
TW-A- 200 829 131 **US-A1- 2006 033 412**
US-A1- 2009 190 062 **US-A1- 2009 295 648**
US-A1- 2010 182 531

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] Embodiments of the invention relate to a display apparatus.

Discussion of the Related Art

[0002] With the development of the information society, various demands for display devices have been increasing. Various display devices, such as liquid crystal displays (LCDs), plasma display panels (PDPs), electroluminescent displays (ELDs), and vacuum fluorescent displays (VFDs), have been recently studied and used to meet various demands for the display devices. Among the display devices, a liquid crystal display panel of the liquid crystal display includes a liquid crystal layer, and a thin film transistor (TFT) substrate and a color filter substrate that are positioned opposite each other with the liquid crystal layer interposed therebetween. The liquid crystal display panel displays an image using light provided by a backlight unit of the liquid crystal display.

[0003] FIG. 1 illustrates a related art display device.

[0004] As shown in FIG. 1, a related art display device includes a display panel 100P including a front substrate and a back substrate, an optical layer 120P disposed in the rear of the display panel 100P, a frame 130P disposed in the rear of the optical layer 120P, first and second fastening parts 160P and 170P for fastening the display panel 100P, the optical layer 120P, and the frame 130P, a protective substrate 110P disposed in the front of the display panel 100P, a third fastening part 150P for fastening the protective substrate 110P, and a back cover 140P which is connected to the third fastening part 150P and is disposed in the rear of the frame 130P.

[0005] The related art display device has the complicated structure disclosed herein, and also it is difficult to achieve a thin profile of the related art display device. Further, visibility of the related art display device is reduced.

[0006] Patent application US 2010/0182531 A1 discloses a chassis assembly for a display apparatus in which supporting metal plates are attached to the sides of a display, so that screwing flat portions of the supporting metal plates are placed out of the back side of the display. A lid, fixing brackets, and the screwing flat portions are fixed with screws in a state in which fixing flat portions of the fixing brackets are inserted into long grooves on the side walls of a body case.

[0007] Patent application US 2006/0033412 A1 discloses a backlight assembly which includes a receiving container having a bottom and a side member to provide a receiving space, a flat-type fluorescent lamp received into the receiving container, and a supporting member having a buffer disposed between the receiving container

and the flat-type fluorescent lamp. The buffer has protrusions protruding from a face of the supporting member.

[0008] Patent application EP 2 026 408 A1 discloses a handheld electronic device in which wireless communications circuitry may include antenna structures. An antenna may be formed from a strip of conductor. A proximal end of the strip of conductor may be connected to a transmission line. A distal end of the strip of conductor may be routed away from housing surface by bends formed in the strip. A printed circuit board in the handheld electronic device may have a hole. The distal end of the strip of conductor may be located adjacent to the hole.

SUMMARY OF THE INVENTION

[0009] In one aspect, a display apparatus according to claim 1 is provided. Preferred embodiments of the display apparatus are recited in the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

FIG. 1 illustrates a related art display device;

FIGs. 2 to 5 illustrate a configuration of a display apparatus according to an example embodiment of the invention;

FIGs. 6 to 124 illustrate a structure of a display apparatus according to an example embodiment of the invention; and

FIG. 125 illustrates another configuration of a display apparatus according to an example embodiment of the invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0011] Reference will now be made in detail embodiments of the invention examples of which are illustrated in the accompanying drawings. Since the present invention may be modified in various ways and may have various forms, specific embodiments are illustrated in the drawings and are described in detail in the present specification. However, it should be understood that the present invention are not limited to specific disclosed embodiments, but include all modifications, equivalents and substitutes included within the technical scope of the present invention.

[0012] The terms 'first', 'second', etc. may be used to describe various components, but the components are not limited by such terms. The terms are used only for the purpose of distinguishing one component from other components. For example, a first component may be designated as a second component without departing

from the scope of the present invention. In the same manner, the second component may be designated as the first component.

[0013] The term "and/or" encompasses both combinations of the plurality of related items disclosed and any item from among the plurality of related items disclosed.

[0014] When an arbitrary component is described as "being connected to" or "being linked to" another component, this should be understood to mean that still another component(s) may exist between them, although the arbitrary component may be directly connected to, or linked to, the second component. In contrast, when an arbitrary component is described as "being directly connected to" or "being directly linked to" another component, this should be understood to mean that no component exists between them.

[0015] The terms used in the present application are used to describe only specific embodiments or examples, and are not intended to limit the present invention. A singular expression can include a plural expression as long as it does not have an apparently different meaning in context.

[0016] In the present application, the terms "include" and "have" should be understood to be intended to designate that illustrated features, numbers, steps, operations, components, parts or combinations thereof exist and not to preclude the existence of one or more different features, numbers, steps, operations, components, parts or combinations thereof, or the possibility of the addition thereof.

[0017] Unless otherwise specified, all of the terms which are used herein, including the technical or scientific terms, have the same meanings as those that are generally understood by a person having ordinary knowledge in the art to which the present invention pertains. The terms defined in a generally used dictionary must be understood to have meanings identical to those used in the context of a related art, and are not to be construed to have ideal or excessively formal meanings unless they are obviously specified in the present application.

[0018] The following exemplary embodiments of the present invention are provided to those skilled in the art in order to describe the present invention more completely. Accordingly, shapes and sizes of elements shown in the drawings may be exaggerated for clarity.

[0019] Hereinafter, a liquid crystal display panel is used as an example of a display panel. Other display panels may be used. For example, a plasma display panel (PDP), a field emission display (FED) panel, and an organic light emitting diode (OLED) display panel may be used.

[0020] FIGs. 2 to 5 illustrate a configuration of a display apparatus according to an example embodiment of the invention.

[0021] As shown in FIG. 2, a display apparatus according to an example embodiment of the invention may include a display panel 100, a backlight unit 10B including an optical layer 110, a light source 120, a back cover

130, and a bracket 140.

[0022] The display panel 100 displaying an image may include a front substrate and a back substrate that are positioned opposite each other. The bracket 140 may be attached to a non-display area of a back surface of the back substrate of the display panel 100.

[0023] The optical layer 110 may be disposed between the back substrate and the back cover 130. The optical layer 110 may not be fixed to the bracket 140.

[0024] Alternatively, the optical layer 110 may be fixed to the bracket 140.

[0025] The optical layer 110 may include a plurality of sheets. For example, although not shown, the optical layer 110 may include at least one of a prism sheet and a diffusion sheet.

[0026] The backlight unit 10B may be disposed in the rear of the optical layer 110. Although not shown, the backlight unit 10B may further include a frame as well as the light source 120. In the embodiment disclosed herein, the backlight unit 10B includes the light source 120, the optical layer 110, and the frame (not shown). However, the backlight unit 10B may include a light guide plate (not shown). Further, in the embodiment disclosed herein, the backlight unit 10B may be used as the light source 120 and thus may indicate the light source 120. In other word, the backlight unit 10B may be referred to as the light source.

[0027] The configuration of the backlight unit may be variously changed.

[0028] Various types of light sources 120 may be used in the embodiment of the invention. For example, the light source may be one of a light emitting diode (LED) chip and a LED package having at least one LED chip. In this instance, the light source may be a colored LED emitting at least one of red, green, and blue light or a white LED.

[0029] Although the embodiment of the invention describes the direct type backlight unit 10B as an example, an edge type backlight unit may be used.

[0030] The back cover 130 may be positioned in the rear of the backlight unit 10B. The back cover 130 may protect the backlight unit 10B and the optical layer 110 from an impact or a pressure applied from the outside.

[0031] The optical layer 110 may be closely attached to the display panel 100. Alternatively, the optical layer 110 may be separated from the display panel 100 by a predetermined distance.

[0032] Alternatively, the backlight unit 10B may be closely attached to the optical layer 110. In this instance, a thickness of the display apparatus according to the embodiment of the invention may be reduced.

[0033] As shown in FIG. 3, the display panel 100 may include a front substrate 101 and a back substrate 111, that are positioned opposite each other and attached to each other to form a uniform cell gap therebetween. A liquid crystal layer 104 may be formed between the front substrate 101 and the back substrate 111.

[0034] A seal part 200 may be formed between the front substrate 101 and the back substrate 111 to seal

the liquid crystal layer 104.

[0035] A color filter 102 may be positioned on the front substrate 101 to implement red, green, and blue colors. The color filter 102 may include a plurality of pixels each including red, green, and blue subpixels. Other configurations of the subpixels may be used for the pixel. For example, each pixel may include red, green, blue, and white subpixels. When light is incident on the color filter 102, the color filter 102 may generate images corresponding to the red, green, and blue colors.

[0036] A predetermined transistor 103, for example, a thin film transistor (TFT) may be formed on the back substrate 111. The transistor 103 may turn on or off liquid crystals in each pixel. In this instance, the front substrate 101 may be referred to as a color filter substrate, and the back substrate 111 may be referred to as a TFT substrate.

[0037] The display panel 100 may further include a front polarizing film 3400 and a back polarizing film 3410. The front polarizing film 3400 may be positioned on a front surface of the front substrate 101 to polarize light passing through the display panel 100. The back polarizing film 3410 may be positioned on a back surface of the back substrate 111 to polarize light passing through the optical layer 110 positioned in the rear of the back substrate 111. In the embodiment disclosed herein, the front polarizing film 3400 may be referred to as a first front polarizing film, and the back polarizing film 3410 may be referred to as a second front polarizing film.

[0038] The liquid crystal layer 104 may include a plurality of liquid crystal molecules, and the arrangement of the liquid crystal molecules may change in response to a driving signal supplied by the transistor 103. Hence, light provided by the backlight unit 10B may be incident on the color filter 102 based on changes in the molecular arrangement of the liquid crystal layer 104. As a result, the color filter 102 may implement red, green, and blue light, and thus a predetermined image may be displayed on the front substrate 101 of the display panel 100.

[0039] Alternatively, as shown in FIG. 4, a color filter 102 for implementing red, green, and blue colors may be positioned on the back substrate 111.

[0040] Further, a predetermined transistor 103, for example, a TFT may be formed on the front substrate 101. The transistor 103 may turn on or off liquid crystals in each pixel. In this instance, the back substrate 111 may be referred to as a color filter substrate, and the front substrate 101 may be referred to as a TFT substrate.

[0041] As above, when the transistor 103 is formed on the front substrate 101, it is easy to install a connecting unit, such as a cable and a flexible printed circuit board, for connecting a driving board (not shown) to the transistor 103 on the front substrate 101.

[0042] Further, the driving board may be disposed in the rear of the display panel 100. In this instance, a length of the connecting unit for connecting the driving board to the transistor 103 may be reduced.

[0043] As shown in FIG. 5, each pixel of the display

panel 100 may include a data line 300, a gate line 310 crossing the data line 300, and the TFT 103 connected to a crossing of the data line 300 and the gate line 310.

[0044] The TFT 103 supplies a data voltage supplied through the data line 300 to a pixel electrode 320 of a liquid crystal cell Clc in response to a gate pulse from the gate line 310. The liquid crystal cell Clc is driven by an electric field generated by a voltage difference between a voltage of the pixel electrode 320 and a common voltage Vcom applied to a common electrode 330, thereby controlling an amount of light passing through a polarizing plate. A storage capacitor Cst is connected to the pixel electrode 320 of the liquid crystal cell Clc and holds the voltage of the liquid crystal cell Clc.

[0045] Since the above-described structure and the above-described configuration of the display panel 100 are only one example, they may be changed, added, or omitted.

[0046] FIGs. 6 to 119 illustrate a structure of a display apparatus according to an example embodiment of the invention. In the following description, the descriptions of the configuration and the structure described above are omitted.

[0047] As shown in FIG. 6, an adhesive layer 400 may be formed between the back surface of the back substrate 111 of the display panel 100 and the bracket 140. The bracket 140 may be attached to the back surface of the back substrate 111 of the display panel 100 using the adhesive layer 400.

[0048] As above, when the bracket 140 is attached to the back surface of the back substrate 111 using the adhesive layer 400, a supporter such as a pem nut and a boss and a fastener such as a screw are not used to fasten the bracket 140 to the back substrate 111. Therefore, a fixing process may be simply performed, the manufacturing cost may be reduced, and the thickness of the display apparatus may be reduced.

[0049] A groove 141 may be formed in one surface of the bracket 140 opposite the back substrate 111, so as to improve an adhesive strength between the bracket 140 and the back substrate 111. It may be preferable that the adhesive layer 400 is formed in the groove 141. In this instance, because the groove 141 may prevent from an adhesive material of the adhesive layer 400 from being discharged to the outside of the bracket 140, an attaching process may be easily performed.

[0050] As above, when the bracket 140 is attached to the back surface of the back substrate 111, the display panel 100 may include a portion extending further than the adhesive layer 400 in a longitudinal direction LD of the display panel 100. Further, the display panel 100 may include a portion W1 extending further than the bracket 140 in the longitudinal direction LD.

[0051] As shown in FIG. 7, the groove 141 may include portions having each a different depth.

[0052] More specifically, the groove 141 of the bracket 140 may include portions A1 and A2 each having a gradually decreasing or increasing depth in a width direction

WD, so as to further improve the adhesive strength between the bracket 140 and the back substrate 111 while efficiently injecting the adhesive material of the adhesive layer 400 into the groove 141.

[0053] For example, a depth t1 of a middle portion of the groove 141 may be different from a depth t2 of an edge portion of the groove 141. A length of the groove 141 in the edge portion of the groove 141 may gradually decrease.

[0054] In other words, the adhesive layer 400 formed in the groove 141 may include portions having each a different thickness. For example, a width of a middle portion of the adhesive layer 400 may be greater than a width of an edge portion of the adhesive layer 400.

[0055] Alternatively, as shown in FIG. 8, a width t1 of the middle portion of the adhesive layer 400 may be less than a width t2 of the edge portion of the adhesive layer 400. Even in this case, because an amount of the adhesive material of the adhesive layer 400 may increase, the adhesive strength between the bracket 140 and the back substrate 111 may be improved.

[0056] The shape of the bracket 140 may be variously changed.

[0057] For example, as shown in FIG. 9, the bracket 140 may include a base 1000, a head 1002, and a pillar 1001 for connecting the base 1000 to the head 1002. The adhesive layer 400 may be disposed between the base 1000 of the bracket 140 and the back substrate 111.

[0058] In other word, the bracket 140 has a recess (A groove) on a first surface 1000FS where the adhesive for adhesive layer 400 is applied. And the bracket has a first protrusion 1001 extending from a second surface 1000SS and a second protrusion 1002 extending from the first protrusion 1001. In this instance, the first and second surfaces 1000FS, 1000SS being opposite surface.

[0059] And, the first protrusion 1001 of the bracket extending away from the rear panel 111 in a width direction (i.e., a vertical direction DRV or a third direction) of the display panel and the second protrusion 1002 extend from an end of the first protrusion 1001 in a longitudinal direction (i.e., a horizontal direction DRH or a second direction) of the display panel such that the first and second protrusions 1001, 1002 form an inverted L-shape.

[0060] A width R101 of the base 1000 providing a space for the adhesive layer 400 may be greater than a width R100 of the head 1002.

[0061] A groove 3700 may be formed between the base 1000 and the head 1002.

[0062] Alternatively, as shown in FIG. 10, the pillar 1001 of the bracket 140 may include a portion inclined based on the back substrate 111 of the display panel 100. Preferably, the pillar 1001 may include a portion inclined toward the outside of the display panel 100. In this instance, the bracket 140 may include a portion having different widths. More specifically, the bracket 140 may include a portion having different widths as measured in the longitudinal direction of the display panel 100,

i.e., the horizontal direction. In other words, the bracket 140 may include a portion having a gradually decreasing width as the bracket 140 goes in the direction away from the display panel 100.

[0063] In this instance, even if the size of a dummy area positioned outside an active area of the display panel 100, on which the image is displayed, is reduced, an excessive reduction in the luminance of the image in a boundary between the dummy area and the active area may be prevented.

[0064] Alternatively, as shown in FIG. 11, the position of the pillar 1001 on the base 1000 may vary.

[0065] As shown in FIG. 12, a blocking member 1500 may be positioned at an edge of the front surface of the front substrate 101. Preferably, the blocking member 1500 may be attached to the edge of the front surface of the front substrate 101. Because the blocking member 1500 hides the dummy area of the display panel 100, the image displayed on a screen area (i.e., the active area) may be more prominently showed.

[0066] The blocking member 1500 may have lightness lower than ambient lightness. For example, the lightness of the blocking member 1500 may be lower than lightness of the display panel 100. For this, the blocking member 1500 may be substantially black. For example, the blocking member 1500 may be substantially a black tape and may be formed by attaching a black tape to the front surface of the front substrate 101. Thus, the blocking member 1500 may be referred to as a black layer.

[0067] Because the blocking member 1500 is positioned on the front surface of the front substrate 101 and the edge of the front surface of the front substrate 101 is exposed, almost the entire portion of the blocking member 1500 may be exposed as shown in FIG. 13. In other words, when the observer in the front of the display panel 100 views the display panel 100, the observer may view almost the entire portion of the blocking member 1500. Namely, almost the entire portion of the blocking member 1500 may be observed.

[0068] Because the bracket 140 does not display the image, it may be preferable that the bracket 140 is positioned in the dummy area outside the screen area. Further, it may be preferable that the bracket 140 is hidden by the blocking member 1500. Hence, as shown in FIG. 12, the blocking member 1500 may overlap the bracket 140. Preferably, the bracket 140 may entirely overlap the bracket 140. More preferably, widths W10 and W20 of the blocking member 1500 may be greater than widths W11 and W12 of the bracket 140. In this instance, the blocking member 1500 may include portions P1 and P2 extending further than the bracket 140 in the middle direction of the front substrate 101. Further, the blocking member 1500 may include portions W1 and W2 extending further than the bracket 140 in a direction opposite the middle direction of the front substrate 101.

[0069] The widths W10 and W20 of the blocking member 1500 and the widths W11 and W12 of the bracket 140 are a width in a cross section of the display panel 100.

[0070] As shown in FIG. 14, the front polarizing film 3400 may be positioned on the front surface of the front substrate 101 of the display panel 100, and the back polarizing film 3410 may be positioned on the back surface of the back substrate 111.

[0071] A width L10 of the front polarizing film 3400 positioned on the front substrate 101 may be different from a width L11 of the back polarizing film 3410 positioned on the back substrate 111. The width L10 of the front polarizing film 3400 and the width L11 of the back polarizing film 3410 are a width in the cross section of the display panel 100.

[0072] Preferably, the width L10 of the front polarizing film 3400 may be greater than the width L11 of the back polarizing film 3410. In other words, an end of at least one side of the front polarizing film 3400 may extend further than the back polarizing film 3410.

[0073] More specifically, as shown in FIG. 15, the front polarizing film 3400 may include a portion A30 overlapping the bracket 140. The bracket 140 may be separated from the back polarizing film 3410 by a predetermined distance d11 in a direction parallel to the longitudinal direction of the back substrate 111. In this instance, the bracket 140 may be directly attached to the back substrate 111. Hence, the adhesive strength between the bracket 140 and the back substrate 111 may be improved.

[0074] Further, the front polarizing film 3400 may be separated from an end of the front surface of the front substrate 101 by a predetermined distance d12. In this instance, a process for attaching the front polarizing film 3400 to the front substrate 101 may be easily performed, and the production yield may be improved.

[0075] As shown in FIG. 16, the blocking member 1500 may overlap the front polarizing film 3400. For example, the blocking member 1500 may include a portion positioned on the front polarizing film 3400.

[0076] Further, the front polarizing film 3400 may include a portion Y1 extending further than the blocking member 1500 in a direction away from the middle of the display panel 100. FIG. 16 shows that the blocking member 1500 is positioned on the front polarizing film 3400. However, the blocking member 1500 may be positioned between the front polarizing film 3400 and the front substrate 101. Even in this case, the front polarizing film 3400 may include the portion Y1 extending further than the blocking member 1500 in the direction away from the middle of the display panel 100.

[0077] Alternatively, as shown in FIG. 17, the blocking member 1500 may include a portion Y2 extending further than the front polarizing film 3400 in the direction away from the middle of the display panel 100. In this case, the blocking member 1500 may contact both the front polarizing film 3400 and the front substrate 101.

[0078] FIG. 17 shows that the blocking member 1500 is positioned on the front polarizing film 3400. However, the blocking member 1500 may be positioned between the front polarizing film 3400 and the front substrate 101.

Even in this case, the blocking member 1500 may include the portion Y2 extending further than the front polarizing film 3400 in the direction away from the middle of the display panel 100.

[0079] Alternatively, as shown in FIG. 18, the blocking member 1500 and the front polarizing film 3400 may be formed on the same layer level. In this instance, the blocking member 1500 may be positioned outside the front polarizing film 3400.

[0080] As shown in FIGs. 19(a) and 19(b), short sides SS1 and SS2 of the front substrate 101 may extend further than short sides SS1 and SS2 of the back substrate 111, and long sides LS1 and LS2 of the front substrate 101 may extend further than long sides LS1 and LS2 of the back substrate 111. In other words, an end of at least one side of the front substrate 101 may extend further than the back substrate 111.

[0081] For example, the first short side SS1 of the front substrate 101 may extend further than the first short side SS1 of the back substrate 111 corresponding to the first short side SS1 of the front substrate 101 by a first length S1. The second short side SS2 of the front substrate 101 may extend further than the second short side SS2 of the back substrate 111 corresponding to the second short side SS2 of the front substrate 101 by a second length S2. The first length S1 may be substantially equal to the second length S2.

[0082] Alternatively, the first length S1 may be different from the second length S2. In this instance, the structure of the first short side SS1 of the front substrate 101 may be different from the structure of the second short side SS2 of the front substrate 101.

[0083] For example, a sufficient space may be provided on the first short side SS1 of the back substrate 111, so as to mount a gate driver on the first short side SS1 of the back substrate 111 corresponding to the first short side SS1 of the front substrate 101. In this instance, the first length S1 may be less than the second length S2.

[0084] Further, the first long side LS1 of the front substrate 101 may extend further than the first long side LS1 of the back substrate 111 corresponding to the first long side LS1 of the front substrate 101 by a length S10. The second long side LS2 of the front substrate 101 may extend further than the second long side LS2 of the back substrate 111 corresponding to the second long side LS2 of the front substrate 101 by a length S20. The length S10 and the length S20 may be different from each other.

[0085] As shown in FIG. 20, a thickness GT1 of the front substrate 101 may be greater than a thickness GT2 of the back substrate 111. Hence, the front substrate 101 may have a sufficient strength. Therefore, even if the edge of the front surface of the front substrate 101 is exposed, a damage of the front substrate 101 may be prevented.

[0086] In the embodiment of the invention, the bracket 140 may be divided into a plurality of parts. For example, as shown in FIG. 21, the bracket 140 may include transverse brackets 140A1 and 140A2 and longitudinal brack-

ets 140B1 and 140B2.

[0087] The transverse brackets 140A1 and 140A2 may be respectively attached to the long sides LS1 and LS2 of the back surface of the back substrate 111 of the display panel 100. The longitudinal brackets 140B1 and 140B2 may be respectively attached to the short sides SS1 and SS2 of the back surface of the back substrate 111.

[0088] The transverse brackets 140A1 and 140A2 may be separated from the longitudinal brackets 140B1 and 140B2 by a predetermined distance d10. Preferably, the transverse brackets 140A1 and 140A2 and the longitudinal brackets 140B1 and 140B2 may be separated from each other in the corner of the back surface of the back substrate 111.

[0089] In this instance, a process for attaching the transverse brackets 140A1 and 140A2 and the longitudinal brackets 140B1 and 140B2 to the back substrate 111 may be easily performed, and the manufacturing cost of the bracket 140 may be reduced. Hence, the manufacturing cost of the display apparatus may be reduced.

[0090] A width A10 of each of the transverse brackets 140A1 and 140A2 may be different from a width A20 of each of the longitudinal brackets 140B1 and 140B2. For example, as shown in FIG. 22, the width A10 of each of the transverse brackets 140A1 and 140A2 may be greater than the width A20 of each of the longitudinal brackets 140B1 and 140B2.

[0091] Alternatively, the bracket 140 may be divided into a plurality of sub-brackets positioned parallel to one another. For example, as shown in FIG. 23, the transverse bracket 140A1 positioned in a first area LS1 of the back substrate 111 may be divided into a plurality of sub-brackets, the first longitudinal bracket 140B1 positioned in a third area SS1 of the back substrate 111 may be divided into a plurality of sub-brackets, and the second longitudinal bracket 140B2 positioned in a fourth area SS2 of the back substrate 111 may be divided into a plurality of sub-brackets.

[0092] In other words, the plurality of transverse brackets 140A1 in the first area LS1 of the display panel 100 may be positioned parallel to one another in a first direction, for example, in a direction parallel to the long side LS of the display panel 100. Further, the plurality of first longitudinal brackets 140B1 in the third area SS1 of the display panel 100 may be positioned parallel to one another in a second direction crossing the first direction, for example, in a direction parallel to the short side SS of the display panel 100. The plurality of second longitudinal brackets 140B2 in the fourth area SS2 of the display panel 100 may be positioned parallel to one another in the second direction.

[0093] As above, when the bracket 140 is divided into the plurality of sub-brackets, a deformation amount of the back cover 130 may be distributed into the plurality of sub-brackets even if the back cover 130 is deformed. Hence, a light leakage phenomenon may be reduced.

[0094] As shown in FIG. 24(A), it is assumed that the

transverse bracket 140A1 positioned in the first area of the display panel 100, for example, the first area of the back substrate 111 (i.e., the first long side LS1 of the back substrate 111) is divided into a total of seven transverse brackets ⑦, ⑧, ⑨, ⑩, ⑪, ⑫, and ⑬; the first longitudinal bracket 140B1 positioned in the third area of the display panel 100, for example, the third area of the back substrate 111 (i.e., the first short side SS1 of the back substrate 111) is divided into a total of three longitudinal brackets ①, ②, and ③; and the second longitudinal bracket 140B2 positioned in the fourth area of the display panel 100, for example, the fourth area of the back substrate 111 (i.e., the second short side SS2 of the back substrate 111) is divided into a total of three longitudinal brackets ④, ⑤, and ⑥.

[0095] A distance between the adjacent transverse brackets 140A1 may be different from distances between the adjacent longitudinal brackets 140B1 and 140B2. Preferably, the distance between the adjacent transverse brackets 140A1 may be less than the distances between the adjacent longitudinal brackets 140B1 and 140B2. For example, a distance V1 between the first and second transverse brackets ⑦ and ⑧ may be less than a distance V11 between the 1-1 and 1-2 longitudinal brackets ④ and ⑤ and a distance V10 between the 2-1 and 2-2 longitudinal brackets ① and ②.

[0096] A reason why the distance between the adjacent transverse brackets 140A1 is less than the distances between the adjacent longitudinal brackets 140B1 and 140B2 is as follows.

[0097] The lengths of the first and second long sides LS1 and LS2 of the display panel 100 are longer than the lengths of the first and second short sides SS1 and SS2 of the display panel 100, and thus the pressure may be mainly applied to the first and second long sides LS1 and LS2 of the display panel 100. Considering this, it may be preferable that the transverse brackets 140A1 positioned on the first long side LS1, to which the relatively high pressure is applied, are positioned closer than the longitudinal brackets 140B1 and 140B2.

[0098] Further, the total number of transverse brackets ⑦, ⑧, ⑨, ⑩, ⑪, ⑫, and ⑬ positioned on the first long side LS1 of the display panel 100 may be more than a sum of the total number of first longitudinal brackets ①, ②, and ③ positioned on the first short side SS1 of the display panel 100 and the total number of second longitudinal brackets ④, ⑤, and ⑥ positioned on the second short side SS2 of the display panel 100.

[0099] A distance between the two adjacent brackets 140 may be greater than a width of the bracket 140.

[0100] For example, as shown in FIG. 24(b), it may be preferable that a distance V1 between the first and second transverse brackets ⑦ and ⑧ among the plurality of transverse brackets 140A1 is greater than a width V30 of the first transverse bracket ⑦ and a width V31 of the second transverse bracket ⑧.

[0101] A distance between the two adjacent brackets 140 may vary depending on their position on the display

panel 100.

[0102] For example, as shown in FIG. 25, in the plurality of transverse brackets 140A1 (i.e., ⑦, ⑧, ⑨, ⑩, ⑪, ⑫, and ⑬) positioned on the first long side LS1 of the display panel 100, a distance V1 between the first and second transverse brackets ⑦ and ⑧ may be different from a distance V2 between the third and fourth transverse brackets ⑨ and ⑩. Preferably, the distance V1 between the first and second transverse brackets ⑦ and ⑧ may be less than the distance V2 between the third and fourth transverse brackets ⑨ and ⑩.

[0103] In other words, as the transverse brackets 140A1 on the first long side LS1 of the display panel 100 go from the middle to the outside of the first long side LS1, a distance between the two adjacent transverse brackets 140A1 may increase. In this instance, the structural stability of the display apparatus may be improved.

[0104] A distance between the two adjacent brackets 140 in the corner of the display panel 100 may be set to be relatively small.

[0105] For example, as shown in FIG. 26, a shortest distance V4 between the transverse bracket 140A1 and the first longitudinal bracket 140B1 in a boundary between the first area LS1 and the third area SS1 of the display panel 100 may be less than a distance V11 (or V10) between the two adjacent longitudinal brackets 140B1 (or 140B2) and a distance V1 between the two adjacent transverse brackets 140A1. In other words, the distance V4 between the seventh transverse bracket ⑬ positioned in the first area LS1 of the display panel 100 and the 1-1 longitudinal bracket ④ positioned in the third area SS1 of the display panel 100 may be less than the distance V1 between the first and second transverse brackets ⑦ and ⑧ and the distance V10 between the 2-1 and 2-2 longitudinal brackets ① and ②.

[0106] Further, a shortest distance V3 between the transverse bracket 140A1 and the second longitudinal bracket 140B2 in a boundary between the first area LS1 and the fourth area SS2 of the display panel 100 may be less than the distance V11 (or V10) between the two adjacent longitudinal brackets 140B1 (or 140B2) and the distance V1 between the two adjacent transverse brackets 140A1. In other words, the distance V3 between the first transverse bracket ⑦ positioned in the first area LS1 of the display panel 100 and the 2-1 longitudinal bracket ① positioned in the fourth area SS2 of the display panel 100 may be less than the distance V1 between the first and second transverse brackets ⑦ and ⑧ and the distance V10 between the 2-1 and 2-2 longitudinal brackets ① and ②.

[0107] In this instance, the structural stability of the display apparatus may be further improved.

[0108] As shown in FIG. 27, the shortest distance V4 between the transverse bracket 140A1 and the first longitudinal bracket 140B1 in the boundary between the first area LS1 and the third area SS1 of the display panel 100 may be different from the shortest distance V3 between the transverse bracket 140A1 and the second longitudi-

nal bracket 140B2 in the boundary between the first area LS1 and the fourth area SS2 of the display panel 100. For example, the shortest distance V4 may be greater than the shortest distance V3.

[0109] In this instance, the plurality of first longitudinal brackets 140B1 in the third area SS1 of the display panel 100 and the plurality of second longitudinal brackets 140B2 in the fourth area SS2 of the display panel 100 may be alternately disposed.

[0110] For example, a first straight line EL1, which passes through the 2-1 longitudinal bracket ① positioned in the fourth area SS2 of the display panel 100 and is vertical to the short side SS of the display panel 100, may not meet a second straight line EL2, which passes through the 1-1 longitudinal bracket ④ positioned in the third area SS1 of the display panel 100 and is vertical to the short side SS of the display panel 100. The first straight line EL1 and the second straight line EL2 may be separated from each other in a direction vertical to the long side LS of the display panel 100. In this instance, the 2-1 longitudinal bracket ① and the 1-1 longitudinal bracket ④ may be considered to be alternately disposed.

[0111] In other words, a distance between the 2-1 longitudinal bracket ① and the first long side LS1 of the display panel 100 may be less than a distance between the 1-1 longitudinal bracket ④ and the first long side LS1 of the display panel 100. Further, a distance between the 2-3 longitudinal bracket ③ and the second long side LS2 of the display panel 100 may be greater than a distance between the 1-3 longitudinal bracket ⑥ and the second long side LS2 of the display panel 100. Hence, the light leakage phenomenon may be further reduced.

[0112] The plurality of transverse brackets 140A1, the plurality of first longitudinal brackets 140B1, or the plurality of second longitudinal brackets 140B2 may be arranged in zigzag.

[0113] For example, as shown in FIG. 28(A), the plurality of transverse brackets 140A1 (i.e., ⑦, ⑧, ⑨, ⑩, ⑪, ⑫, and ⑬) positioned on the first long side LS1 of the display panel 100 may be arranged in a zigzag pattern.

[0114] More specifically, as shown in FIG. 28(B), the first and second transverse brackets ⑦ and ⑧ may partially overlap each other in a direction parallel to the long side LS of the display panel 100.

[0115] Alternatively, as shown in FIG. 29(A), the plurality of second longitudinal brackets 140B2 (i.e., ①, ②, and ③) positioned on the second short side SS2 of the display panel 100 may be arranged in a zigzag pattern.

[0116] More specifically, as shown in FIG. 29(B), the 2-1 and 2-2 longitudinal brackets ① and ② may partially overlap each other in a direction parallel to the short side SS of the display panel 100.

[0117] Hereinafter, the display apparatus according to the embodiment of the invention is described in the assumption that the bracket 140 includes the base 1000, the head 1002, and the pillar 1001. The display apparatus according to the embodiment of the invention is not lim-

ited to the following structure of the bracket 140.

[0118] As shown in FIG. 30, an auxiliary bracket 4800 may be disposed on the bracket 140. More specifically, the auxiliary bracket 4800 may be disposed on the head 1002 of the bracket 140. In the embodiment disclosed herein, the bracket 140 may be referred to as a first bracket, and the auxiliary bracket 4800 may be referred to as a second bracket.

[0119] Further, the auxiliary bracket 4800 may include a portion 4801 positioned close to the back substrate 111. Hereinafter, the portion 4801 of the auxiliary bracket 4800 is referred to as the low altitude part 4801.

[0120] More specifically, when the height of the bracket 140 is measured from the back surface of the back substrate 111, a height HA2 of the low altitude part 4801 of the auxiliary bracket 4800 may be lower than a maximum height HA1 of the bracket 140.

[0121] Further, the low altitude part 4801 of the auxiliary bracket 4800 may extend further than the bracket 140 in the middle direction of the display panel 100 by a predetermined distance LA1.

[0122] In other word, at least one auxiliary bracket 4800 provided adjacent to the plurality of the brackets 140. And, the at least one auxiliary bracket 4800 includes a side wall 4800SW which extends in parallel with the side wall (not shown) of the at least one connection bracket (not shown). These are described in detail below.

[0123] And, the at least one auxiliary bracket 4800 includes a first ledge 4802 and a second ledge 4801 extending in the second direction (i.e., a horizontal direction DRH) and spaced from each other by an extension extending in the third direction (i.e., a vertical direction DRV), the extension being coupled to an end of the first and second ledge 4802, 4801.

[0124] In this case, the first ledge 4802 is provided between the second protrusion 1002 and the frame (not shown) and the first ledge contacts the frame. These are described in detail below.

[0125] Further, as shown in FIG. 31, the optical layer 110 between the display panel 100 and the back cover may be disposed on the auxiliary bracket 4800. For example, the optical layer 110 may be disposed on the low altitude part 4801 of the auxiliary bracket 4800. In other word, the second ledge 4801 of the auxiliary bracket 4800 is configured to provide support for the back light unit.

[0126] The optical layer 110 may not be fixed to the auxiliary bracket 4800 and may be placed on the low altitude part 4801 of the auxiliary bracket 4800. In this instance, the optical layer 110 may move on the auxiliary bracket 4800.

[0127] As above, when the optical layer 110 is disposed on the auxiliary bracket 4800, the optical layer 110 may be separated from the back substrate 111 by a predetermined distance Z1. Hence, an air gap 6500 may be formed between the back substrate 111 and the optical layer 110.

[0128] As above, when the air gap 6500 is formed between the back substrate 111 and the optical layer 110,

the optical characteristics of the display apparatus may be improved by the air gap 6500.

[0129] In the embodiment of the invention, the structure and the shape of the auxiliary bracket 4800 may be variously changed.

[0130] For example, as shown in FIG. 32, the auxiliary bracket 4800 may include the low altitude part 4801, a receiving part 4802 placed on the bracket 140, and a connecting part 4803 for connecting the low altitude part 4801 to the receiving part 4802. The connecting part 4803 may have the shape inclined by a predetermined angle based on the back surface of the back substrate 111.

[0131] In this instance, the light block resulting from the auxiliary bracket 4800 may be reduced, and thus the luminance may be improved.

[0132] As shown in FIG. 33, the light source 120 may be disposed on the optical layer 110. The light source 120 may be disposed on the low altitude part 4801 of the auxiliary bracket 4800 along with the optical layer 110. In this instance, the light source 120 may be the direct type backlight unit.

[0133] Alternatively, as shown in FIG. 34, a light guide plate 7000 may be disposed on the optical layer 110. In this instance, the backlight unit 10B may be the edge type backlight unit. Further, the edge type backlight unit 10B may include an edge type light source, the optical layer 110, and the light guide plate 7000. When the edge type backlight unit 10B includes the light guide plate 7000, the edge type light source may be disposed on the side of the light guide plate 7000.

[0134] As above, the display apparatus according to the embodiment of the invention may include the direct type backlight unit or the edge type backlight unit. In other words, both the direct type backlight unit and the edge type backlight unit may be applied to the embodiment of the invention. In the embodiment of the invention, the edge type backlight unit may be classified into a bottom edge type backlight unit including a bottom edge type light source and a side edge type backlight unit including a side edge type light source.

[0135] As shown in FIG. 35, a bottom edge type light source 7010 may emit light to the light guide plate 7000 positioned on the long side LS of the display panel 100. For example, the bottom edge type light source 7010 may be positioned on the second long side LS2 corresponding to the lower side among the first and second long sides LS1 and LS2 of the display panel 100.

[0136] As shown in FIG. 36, a side edge type light source 7010 may emit light to the light guide plate 7000 positioned on the short side SS of the display panel 100. For example, a first side edge type light source 7010A may be positioned on the first short side SS1 of the display panel 100, and a second side edge type light source 7010B may be positioned on the second short side SS2 of the display panel 100.

[0137] The edge type backlight unit, which will be described below, may correspond to both the bottom edge type backlight unit and the side edge type backlight unit.

[0138] As shown in FIG. 37, a hole (Opening) 1003 may be formed in the bracket 140.

[0139] As shown in FIG. 38(a), a connection frame 5000 may be connected to the bracket 140 through the hole 1003. The connection frame 5000 may not be fixed to the bracket 140, and a portion of the connection frame 5000 may be inserted into the hole 1003 of the bracket 140. Hence, an external pressure, for example, a twist transferred to the connection frame 5000 may be prevented from being transferred to the display panel 100 through the bracket 140, and the light leakage phenomenon may be further reduced.

[0140] In this case, auxiliary bracket 4800 provided adjacent to the plurality of the brackets 140 and attached to the at least one connection frame 5000.

[0141] In other word, the connection frame 5000 having a side wall and a plurality of first tab portions extending in the second direction (i.e., a horizontal direction DRH), the first tab portion being provided into the opening 1003 of the first protrusion of the bracket 140.

[0142] In this case, a width STA1 of the first tab portion is greater than a width STA2 of the second protrusion of the bracket 140 in the second direction such that an end of the first tab portion extends through the opening 1003 of the first protrusion of the bracket 140.

[0143] Alternatively, as shown in FIG. 38(b), a groove 1004 may be formed in the bracket 140. The groove 1004 may be provided between the head 1002 and the base 1000 of the bracket 140. Further, a portion of the connection frame 5000 may be inserted into the groove 1004 of the bracket 140. Even in this case, the movement of the connection frame 5000 may be sufficiently controlled.

[0144] The connection frame 5000 may be connected to the auxiliary bracket 4800. The connection frame 5000 may be referred to as the connection bracket.

[0145] For example, as shown in FIG. 39, a hole 5001 may be formed in the connection frame 5000, and a hole 4804 corresponding to the hole 5001 of the connection frame 5000 may be formed in the auxiliary bracket 4800. A fastening member S100 such as a screw may connect the connection frame 5000 to the auxiliary bracket 4800 through the hole 5001 of the connection frame 5000 and the hole 4804 of the auxiliary bracket 4800. In other words, the connection frame 5000 may include a first portion 5003 inserted into a hole (or a groove) 1003 of the bracket 140 and a second portion 5004 fastening to the auxiliary bracket 4800. The first portion 5003 of the connection frame 5000 may be a horizontal portion, and the second portion 5004 of the connection frame 5000 may be a vertical portion.

[0146] A protrusion 4805 protruding in the direction toward the middle of the display panel 100 may be formed around the hole 4804 of the auxiliary bracket 4800.

[0147] Alternatively, the connection frame 5000 may be connected to the auxiliary bracket 4800 without the fastening member such as the screw.

[0148] For example, as shown in FIG. 40, a first hook 9600 protruding in the direction away from the display

panel 100 may be formed in the auxiliary bracket 4800. A second hook 9610 protruding in the direction toward the middle of the display panel 100 may be formed at a location corresponding to the first hook 9600 in the connection frame 5000.

[0149] The sheet metal processing may be performed on a portion of the auxiliary bracket 4800 to form the first hook 9600. The sheet metal processing may be performed on a portion of the connection frame 5000 to form the second hook 9610.

[0150] As shown in FIG. 41, when the first hook 9600 is interlocked with the second hook 9610, the auxiliary bracket 4800 and the connection frame 5000 may be connected to each other. In this instance, because the connection frame 5000 is not fixed to the auxiliary bracket 4800, an external pressure such as a twist applied to the auxiliary bracket 4800 may be prevented from being transferred to the display panel 100 through the auxiliary bracket 4800 and the connection frame 5000. Hence, the light leakage phenomenon may be further reduced.

[0151] A frame 1600 may be disposed between the back cover 130 and the display panel 100. As shown in FIG. 42, the frame 1600 may include a portion positioned on the auxiliary bracket 4800. In the embodiment disclosed herein, the frame 1600 may be a frame included in the backlight unit or a frame separate from the backlight.

[0152] As shown in FIG. 42, an end of the frame 1600 in a first area AR1 may be positioned on the auxiliary bracket 4800, and a portion of the frame 1600 may contact the auxiliary bracket 4800. In other word, the frame 1600 mounted to the at least one auxiliary bracket 4800.

[0153] The end of the frame 1600 may be inserted into a formation portion of the protrusion 4805 of the auxiliary bracket 4800. In this instance, a fixing strength of the frame 1600 may be improved.

[0154] Alternatively, as shown in FIG. 43, a hole 4806 corresponding to the frame 1600 may be formed in the auxiliary bracket 4800, and a hole 5002 corresponding to the frame 1600 may be formed in the connection frame 5000.

[0155] In the structure illustrated in FIG. 43, the frame 1600 may be fixed by inserting the end of the frame 1600 into the hole 4806 of the auxiliary bracket 4800 and the hole 5002 of the connection frame 5000.

[0156] As shown in FIG. 44, a side cover 4400 including a portion positioned on the side of the display panel 100 may be connected to the frame 1600. In other word, the side cover 4400 provided adjacent to sides of the front and back substrate 101, 111.

[0157] For example, a predetermined fastening member S110 such as a screw may connect the frame 1600 to the side cover 4400.

[0158] The side cover 4400 may prevent a foreign material such as dust from being penetrated into the display apparatus and may protect the side of the display panel 100 from a damage.

[0159] As shown in FIG. 45, the back cover 130 is dis-

posed in the rear of the display panel 100 and may be connected to the side cover 4400. In other word, the back cover 130 is provided on the side cover 4400. For example, the frame 1600, the overhang portion 4400H of the side cover 4400 and the back cover 130 are fastened using the fastening member S110.

[0160] For example, as shown in FIG. 45 (A), the side cover 4400 may include first protrusion 4401 and second protrusion 4402 protruding in the direction toward the rear of the display panel 100. An end of the back cover 130 may be inserted between the first protrusion 4401 and the second protrusion 4402 as indicated in a second area AR2.

[0161] A portion of the side cover 4400 may extend in the direction toward the middle of the display panel 100, so as to more efficiently fix the side cover 4400. As shown in FIG. 45 (A), (B), the side cover 4400 may include a portion extending further than the bracket 140 in the direction toward the middle of the display panel 100.

[0162] In this instance, the side cover 4400 may include a portion positioned between the back cover 130 and the display panel 100 in a width direction (i.e., a vertical direction) of the display panel 100.

[0163] Alternatively, as shown in FIG. 45 (B), the second protrusion 4402 may be omitted from the side cover 4400. In this case, the first protrusion 4401 may support the back cover 130 sufficiently.

[0164] As above, an edge of the front surface of the display panel 100 may be exposed in a state where the back cover 130 is connected to the side cover 4400. The exposure of the edge of the front surface of the display panel 100 may indicate that an edge of a front surface of the front polarizing film 3400 attached to the front substrate 101 is exposed. Alternatively, the exposure of the edge of the front surface of the display panel 100 may indicate that an edge of the front surface of the front substrate 101 is exposed.

[0165] In this instance, when the observer in the front of the display panel 100 (i.e., at a first position P1) views the display panel 100, the observer may observe almost the entire area of the display panel 100. Hence, an attractive appearance of the display panel 100 may be provided. Further, because another edge of the side of the display panel 100 may not be showed to the observer, a visual effect, in which the observer may feel that the screen size of the display panel 100 is greater than the real screen size of the display panel 100, may be obtained.

[0166] In other word, the side cover 4400 includes a sidewall 4400V and an overhang portion 4400H extending in a second direction (i.e., a horizontal direction DRH), a first end portion of the sidewall 4400V covers the sides of the front and back substrates 101, 111. And, the overhang portion 4400H being provide at the second end portion, which opposite from the first end portion, and the overhang portion being space from an end of the sidewall 4400V by a prescribed distance in the third direction (i.e., a vertical direction DRV) such that the side cover 4400

provides a rim for a back cover 130.

[0167] As shown in FIG. 46, a protective layer 4500 may be formed on the side of the display panel 100. The protective layer 4500 may protect the side of the front substrate 101 and the side of the back substrate 111 from an external pressure and an impact.

[0168] The protective layer 4500 may contain a substantially transparent material. Further, the protective layer 4500 may contain a photocurable material cured by light such as ultraviolet rays.

[0169] As above, when the protective layer 4500 is formed on the side of the display panel 100, the protective layer 4500 may be considered to be positioned between the side cover 4400 and the display panel 100 as indicated in a third area AR3 of FIG. 47. Hence, a collision between the side cover 4400 and the side of the display panel 100 may be prevented.

[0170] The protective layer 4500 is described in detail below with reference to FIG. 48.

[0171] The protective layer 4500 may be formed by coating a protective material having the flexibility on the side of the display panel 100 and curing the coated protective material using light such as ultraviolet rays.

[0172] As shown in FIG. 48, the protective layer 4500 may be inclined in the direction of the front substrate 101. The protective layer 4500 may include a first protective part 4501 contacting the front substrate 101 and a second protective part 4502 contacting the back substrate 111. A thickness TA1 of the first protective part 4501 may be greater than a thickness TA2 of the second protective part 4502 in a longitudinal direction (i.e., a horizontal direction DRH) of the display panel 100. In other words, the maximum thickness TA1 of the first protective part 4501 may be greater than the maximum thickness TA2 of the second protective part 4502 in the longitudinal direction DRH of the display panel 100.

[0173] Further, the first protective part 4501 of the protective layer 4500 may contact the front polarizing film 3400 positioned in the front of the front substrate 101. In this instance, an adhesive strength of the protective layer 4500 may increase. On the other hand, the second protective part 4502 of the protective layer 4500 may not contact the back polarizing film 3410 attached to the back surface of the back substrate 111 and may be separated from the back polarizing film 3410 by a predetermined distance.

[0174] A length RS1 of the protective layer 4500 in a width direction (i.e., a vertical direction DRV) of the display panel 100 may be greater than the maximum thickness TA1 of the protective layer 4500 in the longitudinal direction DRH of the display panel 100, so as to improve the structural stability of the protective layer 4500 and to easily manufacture the protective layer 4500.

[0175] The protective layer 4500 may be separated from the bracket 140 by a predetermined distance RS2, so as to prevent a reduction in the adhesive strength between the bracket 140 and the back substrate 111. On the other hand, when the distance RS2 between the pro-

protective layer 4500 and the bracket 140 is excessively wide, the size of the dummy area, on which the image is not displayed, may increase. Considering this, it may be preferable that the protective layer 4500 is separated from the bracket 140 by the sufficient small distance RS2. It may be preferable that the distance RS2 between the protective layer 4500 and the bracket 140 is less than a distance RS3 between the back polarizing film 3410 and the bracket 140. Further, it may be preferable that the distance RS2 between the protective layer 4500 and the bracket 140 is less than the length RS1 of the protective layer 4500 in the width direction DRV of the display panel 100.

[0176] As shown in FIG. 49, the side cover 4400 may include a portion extending further than the front substrate 101 by a predetermined distance TD1 in the front direction of the front substrate 101 as indicated in a fourth area AR4. In other words, the side cover 4400 may include a portion protruding further than the front substrate 101 in the front of the display panel 100. Even in this case, the edge of the front surface of the front substrate 101 may be exposed.

[0177] As above, when the side cover 4400 protrudes further than the front substrate 101, the side cover 4400 may protect more efficiently the front substrate 101.

[0178] When the size of the portion of the side cover 4400 protruding further than the front substrate 101 is excessively large, the entire thickness of the display apparatus may excessively increase. Therefore, it may be preferable that a length TD1 of the portion of the side cover 4400 protruding further than the front substrate 101 is properly adjusted. This is described in detail below with reference to FIG. 50.

[0179] As shown in FIG. 50, a hole 1003 corresponding to the connection frame 5000 may be formed in the bracket 140. Further, the end of the connection frame 5000 may be inserted into the hole 1003 of the bracket 140. This was described in detail above with reference to FIG. 38.

[0180] In the structure illustrated in FIG. 50, the end of the connection frame 5000 may move inside the hole 1003 of the bracket 140 in the vertical direction.

[0181] If the end of the connection frame 5000 moves upward inside the hole 1003 of the bracket 140, the side cover 4400 connected to the connection frame 5000 may move upward. Hence, the length TD1 of the portion of the side cover 4400 protruding further than the front substrate 101 may increase.

[0182] On the other hand, if the end of the connection frame 5000 moves downward inside the hole 1003 of the bracket 140, the side cover 4400 connected to the connection frame 5000 may move downward. Hence, the length TD1 of the portion of the side cover 4400 protruding further than the front substrate 101 may decrease.

[0183] Considering this, even when the bent end of the connection frame 5000 is closely attached to the bracket 140 inside the hole 1003 of the bracket 140 in the direction away from the display panel 100, the side cover 4400

may include the portion protruding further than the front substrate 101 irrespective of the movement of the end of the connection frame 5000.

[0184] Alternatively, when the length TD1 of the portion of the side cover 4400 protruding further than the front substrate 101 is set to be greater than a width TD2 of the hole 1003 of the bracket 140 in the vertical direction, the side cover 4400 may include the portion protruding further than the front substrate 101 irrespective of the movement of the end of the connection frame 5000.

[0185] In a cross section taken along a straight line CSL1 passing through the first and second short sides SS1 and SS2 of the display panel 100 as shown in FIG. 51(A), as shown in FIG. 51(B), the side cover 4400 may be disposed at each of both ends of the display apparatus, and the back cover 130 may be disposed in the rear of the display panel 100.

[0186] FIG. 51 is a schematic cross-sectional view of the display apparatus according to the embodiment of the invention in the vertical direction.

[0187] The structure and the shape of the frame 1600 may be variously changed. Other structure of the frame 1600 is described below with reference to FIGs. 52 and 53.

[0188] As shown in FIG. 52, a middle portion 1610 of the frame 1600 may be depressed in the direction toward the display panel 100.

[0189] The frame 1600 may include a protrusion frame 1620 positioned between an end of the frame 1600 and the depressed middle portion 1610 of the frame 1600. A height HA11 of the protrusion frame 1620 may be greater than a height HA12 of the end of the frame 1600 as measured from the back surface of the back substrate 111. The end of the frame 1600 may overlap the bracket 140 in the width direction (i.e., the vertical direction) of the display panel 100. Further, a height HA10 of the middle portion 1610 of the frame 1600 may be less than the height HA11 of the protrusion frame 1620 of the frame 1600 as measured from the back surface of the back substrate 111.

[0190] As above, when the middle portion 1610 of the frame 1600 is depressed in the direction toward the display panel 100, the entire length of the frame 1600 may increase. Hence, rigidity of the frame 1600 may be improved, and an increase in the total thickness of the display apparatus may be prevented.

[0191] Further, when the middle portion 1610 of the frame 1600 is depressed, the middle portion 1610 may contact the light guide plate 7000 positioned between the optical layer 110 and the frame 1600 as indicated in a fifth area AR5 shown in FIG. 53. If the direct type backlight unit 120 is used, the middle portion 1610 of the frame 1600 may contact the direct type backlight unit 120. In this instance, the structural reliability of the display apparatus may be improved.

[0192] The structure and the shape of the side cover 4400 may be variously changed. Other structure of the side cover 4400 is described below.

[0193] Hereinafter, it is assumed that the transverse bracket 140A is attached to the first long side LS1 of the back surface of the back substrate 111, and the first and second longitudinal brackets 140B1 and 140B2 are respectively attached to the first and second short sides SS1 and SS2 of the back surface of the back substrate 111.

[0194] As shown in FIG. 54, the side cover 4400 may have the structure corresponding to the transverse bracket 140A and the first and second longitudinal brackets 140B1 and 140B2. Hence, the side cover 4400 may have the structure in which one side of the side cover 4400 is open. In other words, the side cover 4400 may have the structure in which one side of the side cover 4400 corresponding to the second long side LS2 of the back substrate 111 is open.

[0195] Further, an auxiliary side cover 4400A may be disposed on the second long side LS2 of the back substrate 111.

[0196] As shown in FIG. 55, the auxiliary side cover 4400A may be positioned at a location corresponding to the opened side of the side cover 4400 and may be coupled with the side cover 4400. The auxiliary side cover 4400A may include an additional part 4410A to dispose other devices such as a speaker (not shown) and an electronic receiver (not shown).

[0197] A method for combining the auxiliary side cover 4400A with the side cover 4400 is described below.

[0198] As shown in FIG. 56, the side cover 4400 may have first connection holes 4430, and the auxiliary side cover 4400A may have second connection holes 4430A. Further, a connection bar 4400B may have third connection holes 4410B respectively corresponding to the first connection holes 4430 and fourth connection holes 4420B respectively corresponding to the second connection holes 4430A.

[0199] Some of fastening members 4400C such as a screw may pass through the third connection holes 4410B and the first connection holes 4430, thereby connecting the connection bar 4400B to the side cover 4400. Further, other fastening members 4400C may pass through the fourth connection holes 4420B and the second connection holes 4430A, thereby connecting the connection bar 4400B to the auxiliary side cover 4400A. Hence, the fastening members 4400C may connect the side cover 4400 to the auxiliary side cover 4400A.

[0200] As shown in FIG. 57, a bottom cover 9100 may be disposed on the second long side LS2 of the display panel 100. The bottom cover 9100 may cover a portion of the front surface of the front substrate 101 on the second long side LS2 of the display panel 100.

[0201] It is assumed that the front substrate 101 has a first area, a second area opposite the first area, a third area adjacent to the first and second areas, and a fourth area opposite the third area. Edges of front surfaces of the first, third, and fourth areas may be exposed, and a portion of a front surface of the second area may be covered by the bottom cover 9100. In the embodiment of the

invention, the first area, the second area, the third area, and the fourth area may correspond to the first long side LS1, the second long side LS2, the first short side SS1, and the second short side SS2, respectively.

[0202] A bottom connection frame 5000A may be disposed on the second long side LS2 of the display panel 100.

[0203] The bottom connection frame 5000A may include a portion positioned on the side of the display panel 100. The bottom connection frame 5000A may include a portion positioned between the bottom cover 9100 and the front substrate 101. The edge type backlight unit 7010 may be disposed on the bottom connection frame 5000A.

[0204] The frame 1600 may be connected to the bottom connection frame 5000A on the lower side (i.e., the second long side LS2) of the display panel 100. For example, the bottom connection frame 5000A may have a hole 5010A, and the end of the frame 1600 may be inserted into the hole 5010A of the bottom connection frame 5000A. Hence, the frame 1600 may be connected to the bottom connection frame 5000A.

[0205] The frame 1600 may be connected to the bottom cover 9100. For example, a predetermined fastening member S120 may fasten the frame 1600 to the bottom cover 9100 on the second long side LS2 of the display panel 100.

[0206] As shown in FIG. 58, a bottom supporter BB for enhancing a support strength for the display panel 100 may be disposed between the bottom cover 9100 and the bottom connection frame 5000A.

[0207] The bottom supporter BB may be coupled with the bottom connection frame 5000A as indicated in a sixth area AR6. Further, the bottom supporter BB may be coupled with the frame 1600 as indicated in a seventh area AR7.

[0208] The auxiliary side cover 4400A may be connected to the bottom cover 9100 on the lower side of the display panel 100.

[0209] FIG. 59 is a schematic cross-sectional view of the display apparatus according to the embodiment of the invention in the vertical direction.

[0210] As shown in FIG. 59, the auxiliary side cover 4400A may be connected to the back cover 130 on the lower side of the display panel 100.

[0211] As shown in FIG. 60, a user input interface 150Q may be disposed on a back surface of the bottom cover 9100. The user input interface 150Q may receive a control signal for performing various operations such as a channel change and a volume control input from the outside.

[0212] In this instance, the bottom cover 9100 may include a light transmission part capable of transmitting light, so that a user command, which the user inputs using a remote controller, transmits the bottom cover 9100 and reaches the user input interface 150Q.

[0213] As above, when the user input interface 150Q is disposed on the back surface of the bottom cover 9100, the user may perceive that the user input interface 150Q

is hidden by the bottom cover 9100. Further, because a space for the user input interface 150Q is not necessary, the attractive appearance of the display apparatus may be provided.

[0214] Alternatively, a hole may be formed in the bottom cover 9100, and the user input interface 150Q may be disposed in the hole of the bottom cover 9100.

[0215] For example, as shown in FIG. 61, the bottom cover 9100 may include a hole 9110 toward the front surface of the display panel 100. Further, the bottom cover 9100 may include a coupling hole 9111 for assembling an interface module 150QM.

[0216] The interface module 150QM including the user input interface 150Q may have a coupling hole 9120 used to couple the interface module 150QM with the bottom cover 9100.

[0217] Predetermined fastening members S200 may pass through the coupling hole 9120 of the interface module 150QM and the coupling hole 9111 of the bottom cover 9100, thereby coupling the interface module 150QM to the bottom cover 9100.

[0218] It may be preferable that the interface module 150QM is coupled with the bottom cover 9100, so that the user input interface 150Q of the interface module 150QM corresponds to the hole 9110 of the bottom cover 9100. In this instance, as shown in FIG. 62, the user input interface 150Q may be exposed through the front surface of the display panel 100.

[0219] A command input unit for inputting various commands, such as turn-on and turn-off operations of the display apparatus, the channel change, and the volume control, may be configured as a touch sensor.

[0220] For example, as shown in FIG. 63, touch sensors 9720 may be disposed on the back surface of the bottom cover 9100.

[0221] When the user touches the bottom cover 9100 and inputs the user command, the touch sensors 9720 may recognize and perform the user command.

[0222] The touch sensor 9720 may be a sensor capable of sensing the user's body or a small capacitance a specific object has. In this instance, when the user performs a touch operation using his or her body or a specific object having the capacitance, the touch sensor 9720 may recognize the touch operation and operate.

[0223] For example, as shown in FIG. 64(A), when the user touches a formation area of the touch sensor 9720 in the bottom cover 9100, the touch sensor 9720 may sense small changes in the capacitance generated by the user's touch operation and may recognize the user's touch operation. Hence, the touch sensor 9720 may perform various operations according to the user's touch operation.

[0224] On the other hand, as shown in FIG. 64(B), when the user touches a non-formation area of the touch sensor 9720 in the bottom cover 9100, the touch sensor 9720 may not operate.

[0225] As above, when the touch sensors 9720 are disposed on the back surface of the bottom cover 9100,

a portion of the bottom cover 9100 may be used as a switch.

[0226] The touch sensor 9720 may directly contact the bottom cover 9100. Alternatively, a non-conductive buffer (not shown) may be disposed between the bottom cover 9100 and the touch sensor 9720.

[0227] Alternatively, as shown in FIG. 65, the bottom cover 9100 may have an input hole 9130 used as a formation space of input keys 9141 for performing the various user commands.

[0228] An input module 9140 including the input keys 9141 may be manufactured, and the input module 9140 may be connected to the bottom cover 9100.

[0229] As shown in FIG. 66, the input keys 9141 may be exposed through the front surface of the display panel 100.

[0230] Alternatively, as shown in FIG. 67, the input module 9140 may be disposed under the auxiliary side cover 4400A. Alternatively, as shown in FIG. 68, the input module 9140 may be disposed on the side of the side cover 4400. Alternatively, as shown in FIG. 69 (A), the input module 9140 may be disposed on the back surface of the back cover 130.

[0231] Alternatively, as shown in FIG. 69 (B), the input module 9140 may be disposed on the frame 1600. In this case, hole 133 corresponding to the input module 9140 is formed on the back cover 130, and the input module 9140 may be exposed through the hole 133.

[0232] As above, the input module 9140 may be disposed at any position where the user may conveniently use the input module 9140.

[0233] The display apparatus according to the embodiment of the invention may further include a wireless communication unit capable of performing a communication such as wireless internet. For example, as shown in FIG. 70, a wireless communication unit WF10 may be disposed on the additional part 4410A of the auxiliary side cover 4400A. In addition to the wireless communication unit WF10, various devices such as a speaker module SP10 may be disposed on the additional part 4410A of the auxiliary side cover 4400A.

[0234] The wireless communication unit WF10 may transmit and receive a signal (for example, a signal corresponding to Wireless-Fidelity (Wi-Fi) standard) having various frequency bands. The display apparatus according to the embodiment of the invention may perform the wireless internet communication through the wireless communication unit WF10.

[0235] As above, when the wireless communication unit WF10 is disposed on the auxiliary side cover 4400A, the wireless communication unit WF10 may be hidden by the back cover 130. Hence, it may be preferable that the back cover 130 contains a material capable of transmitting a radio wave.

[0236] As shown in FIG. 71(A), the back cover 130 may be divided into a first back cover 131 and a second back cover 132 for the efficient wireless communication.

[0237] As shown in FIG. 71(B), the second back cover

132 may correspond to the wireless communication unit WF10. In other words, the wireless communication unit WF10 may be disposed inside the second back cover 132. Thus, it may be preferable that the radio transmission of the second back cover 132 is greater than the radio transmission of the first back cover 131 for the more efficient wireless communication.

[0238] Preferably, the first back cover 131 may contain a metal material such as aluminum (Al), and the second back cover 132 may contain a plastic material. The first back cover 131 containing aluminum may be used as a ground.

[0239] In other words, the first back cover 131 and the second back cover 132 may be formed of different materials and may be connected to each other.

[0240] For example, as shown in FIG. 72(A), a predetermined fastening member S300 may fasten the first back cover 131 to the second back cover 132.

[0241] Further, because the first back cover 131 containing aluminum may serve as the ground, an area of the first back cover 131 may be greater than an area of the second back cover 132.

[0242] On the other hand, as shown in FIG. 72(B), because aluminum forming the first back cover 131 is heavier than the plastic material forming the second back cover 132, a thickness BH1 of the first back cover 131 formed of aluminum may be less than a thickness BH2 of the second back cover 132 formed of the plastic material. Hence, the rigidity of the second back cover 132 may be sufficiently improved.

[0243] As shown in FIG. 73, when a height is measured based on the back substrate 111 of the display panel 100, a maximum height BH2 of the second back cover 132 may be greater than a maximum height BH1 of the first back cover 131. In this instance, the inside of the second back cover 132 may secure a sufficient space capable of receiving various devices such as the wireless communication unit WF10 and the speaker module SP10.

[0244] Alternatively, as shown in FIG. 74, the wireless communication unit WF10 may be disposed on the back surface of the back cover 130 so that the wireless communication unit WF10 is exposed through the back surface of the back cover 130.

[0245] Alternatively, as shown in FIG. 75, a hole 130H may be formed in the back cover 130, and a wireless communication module WFM including the wireless communication unit WF10 may be installed inside the back cover 130. In this instance, the wireless communication unit WF10 of the wireless communication module WFM may be exposed through the hole 130H of the back cover 130.

[0246] In the structure illustrated in FIGs. 74 and 75, it does not matter that the back cover 130 does not contain the material capable of transmitting the radio wave.

[0247] As shown in FIG. 76(A), the back cover 130, the side cover 4400, and the frame 1600 may be fastened to one another using a fastening member S400. In this

instance, the back cover 130, the side cover 4400, and the frame 1600 may be electrically connected to one another using the fastening member S400. Hence, electromagnetic interference (EMI) may be reduced.

5 [0248] As shown in FIG. 76(B), the frame 1600 may have at least one hole. For example, the frame 1600 may have at least one first hole 1600HA and at least one second hole 1600HB.

10 [0249] As shown in FIG. 76(A), the first hole 1600HA may correspond to the fastening member S400 for fastening the frame 1600 to the back cover 130 and the side cover 4400. The second hole 1600HB may be used to fasten the frame 1600 to a predetermined structure, for example, the back cover 130 or may be used as a hole through which another structure passes.

15 [0250] As shown in FIG. 77, the side cover 4400 may have the form wrapping the display panel 100. The side cover 4400 shown in FIG. 77 may be an assembly of the auxiliary side cover 4400A and the side cover 4400 shown in FIG. 77.

[0251] The side cover 4400 may be manufactured through extrusion and bending processes.

20 [0252] For example, as shown in FIG. 78(A), an extrusion bar 4400M may be manufactured through the extrusion process.

25 [0253] Next, as shown in FIG. 78(B), the extrusion bar 4400M may be bent through the bending processes.

[0254] For example, first to fourth areas BA1, BA2, BA3, and BA4 of the extrusion bar 4400M may be bent. As a result, as shown in FIG. 78(C), the side cover 4400 of a frame form may be manufactured

30 [0255] Both ends of the side cover 4400 thus manufactured may be opposite to each other as indicated by a circle JA1 shown in FIG. 78(C).

35 [0256] Preferably, one end of the side cover 4400 may be connected to the other end thereof. For example, as indicated by the circle JA1 shown in FIG. 79, one end of the side cover 4400 may be fastened to the other end thereof using a predetermined fastening member S401.

40 [0257] Alternatively, a medium for connecting one end of the side cover 4400 to the other end may be disposed between both ends of the side cover 4400.

[0258] For example, as shown in FIG. 80, a medium 4400MT may be disposed between both ends of the side cover 4400, and one end and the other end of the side cover 4400 may be connected to the medium 4400MT using predetermined fastening members S402 and S403. Hence, one end of the side cover 4400 may be connected to the other end thereof.

50 [0259] A portion of a bending area of the extrusion bar 4400M may be cut, so as to more efficiently bend the extrusion bar 4400M.

[0260] For example, as shown in FIG. 81(A), a portion CA of a horizontal part 4400H (corresponding to a horizontal part 4400H of the side cover 4400) of the extrusion bar 4400M may be cut and removed.

55 [0261] Next, as shown in FIG. 81(B), the side cover 4400 may be manufactured by bending a cutting area of

the extrusion bar 4400M. In this instance, a wrinkle may be prevented from being generated in a bending area of the side cover 4400, and the bending process may be more easily performed.

[0262] A bending area of the extrusion bar 4400M may correspond to the corner of the display panel 100. In other words, the bending area of the side cover 4400 may correspond to the corner of the display panel 100.

[0263] Further, a vertical part 4400V of the side cover 4400 may be bent in the bending area, and both portions of the cutting area of the horizontal part 4400H of the side cover 4400 may be close to each other. Hence, as indicated by a circle AR101 shown in FIG. 81(B), both portions of the cutting area of the horizontal part 4400H of the side cover 4400 may be separated from each other by a predetermined distance TG1. In other words, the horizontal part 4400H of the side cover 4400 may be divided into two parts in the bending area, i.e., a bending portion of the vertical part 4400V of the side cover 4400.

[0264] Further, as indicated by a circle AR100 shown in FIG. 81(B), the horizontal part 4400H of the side cover 4400 may have a hole H100 in the bending area.

[0265] The distance TG1 between both horizontal parts 4400H of the side cover 4400 in the area AR101 of the bending portion of the vertical part 4400V of the side cover 4400 is less than a distance TG2 between both horizontal parts 4400H in the area AR100 positioned between the area AR101 and the vertical part 4400V.

[0266] As shown in FIG. 82(A), a cover 4400R may be disposed in the hole H100 of the horizontal part 4400H of the side cover 4400. The cover 4400R may be formed of a resin material, a silicon material, etc. Other materials may be used for the cover 4400R. The cover 4400R may be inserted into the hole H100.

[0267] Alternatively, as shown in FIG. 82(B), a tape type cover 4400TP may be disposed in the bending area of the side cover 4400. In this instance, the black tape type cover 4400TP may be attached to the bending area of the side cover 4400, thereby covering the hole H100.

[0268] As shown in FIG. 83, the hole H100 of the horizontal part 4400H of the side cover 4400 may correspond to the corner of the display panel 100.

[0269] The vertical part 4400V of the side cover 4400 may include a portion having different widths.

[0270] For example, as shown in FIG. 84, the vertical part 4400V of the side cover 4400 may include a portion having a gradually decreasing width as it goes to the rear of the display panel 100.

[0271] More specifically, in the vertical part 4400V of the side cover 4400, a width TS2 of a portion extending further than the front substrate 101 to the front of the front substrate 101 may be less than a width TS1 of a portion extending further than the back substrate 111 to the rear of the back substrate 111. In other words, in the vertical part 4400V of the side cover 4400, the width TS2 of the portion protruding further than the front substrate 101 to the front of the front substrate 101 by a predetermined distance TD1 may be less than the width TS1 of the por-

tion protruding further than the back substrate 111 to the rear of the back substrate 111 by a predetermined distance TD3.

[0272] In this instance, a visual effect, in which the viewer in the front of the display panel 100 may feel that the size of the edge of the display panel 100 is less than the real size of the edge of the display panel 100, may be obtained. Further, the strength of the side cover 4400 may be further improved.

[0273] As shown in FIG. 85, the vertical part 4400V of the side cover 4400 may include a protrusion 4400TR protruding to the middle of the display panel 100. The protrusion 4400TR may prevent light from leaking in a space between the display panel 100 and the side cover 400.

[0274] The protrusion 4400TR may be positioned between the display panel 100 and the horizontal parts 4400H of the side cover 4400. Preferably, the protrusion 4400TR may be positioned at a location overlapping the bracket 140 in the longitudinal direction of the display panel 100.

[0275] As shown in FIG. 86, a length TD4 of the protrusion 4400TR may be greater than a distance TD5 between the display panel 100 and the side cover 4400.

[0276] Alternatively, as shown in FIG. 87, the length TD4 of the protrusion 4400TR may be greater than a distance TD7 between the protective layer 4500 positioned on the side of the display panel 100 and the side cover 4400. Further, the length TD4 of the protrusion 4400TR may be less than a length TD6 of the protective layer 4500 in the longitudinal direction of the display panel 100. In this instance, an end of the protrusion 4400TR may overlap the protective layer 4500 in the width direction of the display panel 100.

[0277] Alternatively, as shown in FIG. 88, the length TD4 of the protrusion 4400TR may be greater than the length TD6 of the protective layer 4500 in the longitudinal direction of the display panel 100. Further, the length TD4 of the protrusion 4400TR may be greater than a sum (TD7+TD6) of a distance TD7 between the protective layer 4500 and the side cover 4400 and the length TD6 of the protective layer 4500 in the longitudinal direction of the display panel 100. In this instance, an end of the protrusion 4400TR may overlap the display panel 100 in the width direction of the display panel 100.

[0278] As shown in FIG. 89, a first black layer BKT1 may be formed on the inner surface of the side cover 4400. The first black layer BKT1 may be formed of a black tape or a black paint. In this instance, the first black layer BKT1 may further prevent light from leaking in the space between the display panel 100 and the side cover 400.

[0279] Alternatively, as shown in FIG. 90, a second black layer BKT2 may be formed on the bracket 140 and/or the connection frame 5000. Preferably, the second black layer BKT2 may be a black tape attached to the bracket 140 and the connection frame 5000. The second black layer BKT2 may cover a space between the bracket 140 and the connection frame 5000. Hence, the

second black layer BKT2 may prevent light generated in the light source from leaking in the space between the display panel 100 and the side cover 400.

[0280] Further, the second black layer BKT2 may include a portion attached to the back substrate 111. In this instance, the second black layer BKT2 may cover a space between the connection frame 5000 and the back substrate 111 and a space between the bracket 140 and the back substrate 111. Hence, the second black layer BKT2 may prevent light generated in the light source from leaking in the space between the display panel 100 and the side cover 400.

[0281] The second black layer BKT2 may include a portion contacting a fastening member S100 for connecting the connection frame 5000 to the auxiliary bracket 4800.

[0282] In the embodiment of the invention, the side cover 400 may be divided into a plurality of parts. In other words, the plurality of parts may be combined with one another to manufacture the side cover 400.

[0283] For example, as shown in FIG. 91, a first side cover part 4400SP1, a second side cover part 4400SP2, a third side cover part 4400SP3, and a fourth side cover part 4400SP4 may be manufactured through the extrusion process. The first to fourth side cover parts 4400SP1, 4400SP2, 4400SP3, and 4400SP4 may be connected to one another using first to fourth connection parts 4400JP1, 4400JP2, 4400JP3, and 4400JP4.

[0284] More specifically, as shown in FIG. 92, the first side cover part 4400SP1 may be connected to the first connection part 4400JP1 using a predetermined fastening member S404, and the fourth side cover part 4400SP4 may be connected to the first connection part 4400JP1 using a predetermined fastening member S405. Hence, the first side cover part 4400SP1 may be connected to the fourth side cover part 4400SP4.

[0285] In addition to the extrusion method, any method may be used to manufacture the side cover 4400 as long as the thickness of the side cover 4400 is sufficiently reduced. For example, a die casting method may be used.

[0286] It may be preferable that the side cover 4400 is manufactured using the extrusion method in consideration of the simple manufacturing process, the manufacturing cost, etc.

[0287] As shown in FIG. 93, a first buffer BSP1 may be disposed between the auxiliary bracket 4800 and the back substrate 111. The first buffer BSP1 may contain a material having the elasticity such as a resin material and a silicon material. The first buffer BSP1 may prevent a foreign material such as dust from being penetrated into the display panel 100.

[0288] The first buffer BSP1 may contact each of the auxiliary bracket 4800 and the back substrate 111.

[0289] Further, a second buffer BSP2 may be disposed on the auxiliary bracket 4800. The second buffer BSP2 may be disposed on the low altitude part 4801 of the auxiliary bracket 4800.

[0290] As shown in FIG. 94, the second buffer BSP2 may be disposed between the auxiliary bracket 4800 and the optical layer 110. Namely, the optical layer 110 may be positioned on the second buffer BSP2. In this instance, the movement of the optical layer 110 may be efficiently controlled.

[0291] In other words, the first buffer BSP1 may be disposed under the low altitude part 4801 of the auxiliary bracket 4800, and the second buffer BSP2 may be disposed on the low altitude part 4801 of the auxiliary bracket 4800.

[0292] The disposition of the first and second buffers BSP1 and BSP2 is schematically shown in FIG. 95.

[0293] As shown in FIG. 96, the first buffer BSP1 may have a rectangular frame shape. In this instance, the first buffer BSP1 may more efficiently prevent the foreign material such as dust from being penetrated into the display panel 100.

[0294] As shown in FIG. 97(A), the auxiliary bracket 4800 may be divided into a plurality of parts.

[0295] For example, a transverse auxiliary bracket 4800A corresponding to the transverse brackets 140A1 and 140A2 may be formed, a first longitudinal auxiliary bracket 4800B1 corresponding to the first longitudinal bracket 140B1 may be formed, and a second longitudinal auxiliary bracket 4800B2 corresponding to the second longitudinal bracket 140B2 may be formed.

[0296] Further, the connection parts 4800JP1 and 4800JP2 may be disposed between the two auxiliary brackets 4800. For example, the first connection part 4800JP1 may be disposed between the transverse auxiliary bracket 4800A and the first longitudinal auxiliary bracket 4800B1, and the second connection part 4800JP2 may be disposed between the transverse auxiliary bracket 4800A and the second longitudinal auxiliary bracket 4800B2.

[0297] For example, as shown in FIG. 97(B), the first connection part 4800JP1 may be connected to the transverse auxiliary bracket 4800A and the first longitudinal auxiliary bracket 4800B1, thereby preventing light from leaking in a space between the transverse auxiliary bracket 4800A and the first longitudinal auxiliary bracket 4800B1.

[0298] The shapes of the connection parts 4800JP1 and 4800JP2 may be variously changed. For example, the connection parts 4800JP1 and 4800JP2 may be formed of plastic.

[0299] Alternatively, although not shown, the connection parts 4800JP1 and 4800JP2 may be a black tape. In this instance, the black connection tapes 4800JP1 and 4800JP2 may be attached to the two auxiliary brackets 4800, thereby preventing light from leaking in a space between the two auxiliary brackets 4800.

[0300] As shown in FIG. 98, a third buffer BSP3 may be disposed between the two adjacent brackets 140. The third buffer BSP3 may contain a material having the elasticity such as a resin material and a silicon material. The third buffer BSP3 may prevent light from leaking in a

space between the two adjacent brackets 140.

[0301] The optical layer 110 and/or the light guide plate 7000 may have at least one hole. FIG. 99 shows that the optical layer 110 has at least one hole 110B. Although not shown, the light guide plate 7000 may have at least one hole 110B.

[0302] For example, as shown in FIG. 99, the optical layer 110 and/or the light guide plate 7000 may have the plurality of holes 110B. Each of the plurality of holes 110B may correspond to an area between the two adjacent brackets 140.

[0303] Preferably, the optical layer 110 and/or the light guide plate 7000 may have a protrusion 110A protruding to the outside, and the hole 110B may be formed in the protrusion 110A. In other words, a formation area of the hole 110B may extend further than other areas of the optical layer 110 and/or the light guide plate 7000 to the outside.

[0304] As shown in FIG. 100, the frame 1600 may include a protrusion 1120 corresponding to the hole 110B of the optical layer 110 and/or the light guide plate 7000. More specifically, the frame 1600 may include the protrusion 1120, which corresponds to the hole 110B of the optical layer 110 and/or the light guide plate 7000 and protrudes to the display panel 100.

[0305] As shown in FIG. 101, the optical layer 110 and/or the light guide plate 7000 may be disposed on the frame 1600, so that the hole 110B corresponds to the protrusion 1120 of the frame 1600. Hence, the protrusion 1120 of the frame 1600 may pass through the hole 110B of the optical layer 110 and/or the light guide plate 7000.

[0306] As above, when the hole 110B is disposed in the protrusion 110A of the optical layer 110 and/or the light guide plate 7000 at a location corresponding to the protrusion 1120 of the frame 1600, the entire size of the optical layer 110 and/or the light guide plate 7000 may be prevented from excessively increasing and the separation of the optical layer 110 and/or the light guide plate 7000 from the frame 1600 may be prevented.

[0307] In this instance, the protrusion 110A of the optical layer 110 and/or the light guide plate 7000 may be exposed through the side of the frame 1600. In other words, when the user sees the side of the frame 1600 in a state where the display panel 100, the optical layer 110 and/or the light guide plate 7000, and the frame 1600 are combined with one another, the user may see the protrusion 110A of the optical layer 110 and/or the light guide plate 7000.

[0308] As shown in FIG. 102, the auxiliary bracket 4800 may have at least one hole 4800ho corresponding to a combined part between the optical layer 110 and/or the light guide plate 7000 and the frame 1600 (i.e., the protrusion 110A of the optical layer 110 and/or the light guide plate 7000). The protrusion 110A of the optical layer 110 and/or the light guide plate 7000 may mean a formation portion of the hole 110B.

[0309] The at least one auxiliary bracket 4800 includes a side wall 4800SW which extends in a first direction

DRF. And, the at least one auxiliary bracket 4800 includes a plurality of second tab portions 4800TA with openings 4800hoA.

[0310] The frame 1600 includes a plurality of third tab portions 1600TA with openings 1600ho. And, the second and third tab portions 4800TA, 1600TA being aligned with each other such that the holes 4800hoA, 1600ho are configured to receive screws S405 to fasten the at least one auxiliary bracket 4800 and the frame 1600 to each other.

[0311] More detail, the frame 1600 includes a flange FLA at the periphery of the frame 1600, and flange FLA extend in the first direction DRF.

[0312] The first directions DRF and the second directions DRH being perpendicular to each other, and the first directions DRF and the third directions DRV being perpendicular to each other. In other word, the first directions DRF may be referred to as Z-axis direction, the second directions DRH may be referred to as X-axis direction, and the third directions DRV may be referred to as Y-axis directions.

[0313] As above, when the auxiliary bracket 4800 has the hole 4800ho corresponding to the protrusion 110A of the optical layer 110 and/or the light guide plate 7000, the size of the non-display area of the display panel 100 may be further reduced.

[0314] As shown in FIG. 103, the protrusion 110A of the optical layer 110 and/or the light guide plate 7000 may pass through the hole 4800ho of the auxiliary bracket 4800 and may protrude further than the bracket 140 in the direction away from the middle of the display panel 100. In other words, the optical layer 110 and/or the light guide plate 7000 may include a portion protruding further than the bracket 140 in the direction away from the middle of the display panel 100.

[0315] Alternatively, as shown in FIG. 104, an end of the protrusion 110A of the optical layer 110 and/or the light guide plate 7000 may be positioned between the bracket 140 and the auxiliary bracket 4800 in the longitudinal direction of the display panel 100.

[0316] As shown in FIG. 105, the connection frame 5000 may include a plurality of a first portion 5003 inserted into the hole of the bracket 140, a second portion 5004 fastened to the auxiliary bracket 4800 using the fastening member S100, and a third portion 5005 positioned parallel to the first portion 5003 in an area between the two adjacent brackets 140. The first portion 5003 and the third portion 5005 may be parallel to the longitudinal direction of the display panel 100, and the second portion 5004 may be parallel to the width direction of the display panel 100.

[0317] The first portion 5003 of the connection frame 5000 may be referred to as a first tab portion, the second portion 5004 of the connection frame 5000 may be referred to as the side wall.

[0318] In other word, at least one connection frame 5000 have the side wall 5004 extending in the first direction DRF and a plurality of first tab portions 5003 extending in the second direction DRH, and as shown in Fig 38

(A) the first tab portion 5003 being provided into the opening of the bracket 140.

[0319] The side wall 4800SW of the auxiliary bracket 4800 is extended in parallel with the side wall 5004 of the at least one connection frame 5000.

[0320] And, the side walls 4800SW of the at least one auxiliary bracket 4800 and the side walls 5004 of the at least one connection frame 5000 include a plurality of holes 4804, 5006 to receive screws S100 to fasten the at least one auxiliary bracket 4800 and the at least one connection frame 5000 to each other.

[0321] The frame 1600 includes a flange FLA at the periphery of the frame 1600, and flange FLA extend in the first direction DRF such that a surfaces of the flange FLA and the first tab portions 5003 of the at least one connection frame 5000 are parallel to each other.

[0322] And, as shown in Figs 105 and 110(B), the at least one connection frame 5000 includes a plurality of openings 5006 at locations where the second and third tab portions 1600TA, 4800TA are inserted into the opening 5006 of the second and third tab portions 1600TA, 4800TA such that the second and third tab portions 1600TA, 4800TA protrude through the openings 5006 of the at least one connection frame 5000 (see area 1600PT).

[0323] The third portion 5005 may be positioned in the area between the two adjacent brackets 140. Hence, the third portion 5005 may include a portion positioned between the auxiliary bracket 4800 and the back substrate 111.

[0324] The third buffer BSP3 shown in FIG. 98 may be disposed between the third portion 5005 of the connection frame 5000 and the back substrate 111.

[0325] As shown in FIG. 106(A), a length TD11 of the third portion 5005 of the connection frame 5000 may be longer than a length TD10 of the first portion 5003. Further, a width TL10 of the third portion 5005 of the connection frame 5000 may be greater than a width L11 of the first portion 5003.

[0326] The third portion 5005 of the connection frame 5000 may be close to or adjacent to the back substrate 111. On the other hand, because the first portion 5003 of the connection frame 5000 is inserted into the hole of the bracket 140, a distance between the first portion 5003 and the back substrate 111 may be relatively large. Hence, as shown in FIG. 106(B), a height TD12 of the second portion 5004 in the area corresponding to the third portion 5005 may be greater than a height TD13 of the second portion 5004 in the area corresponding to the first portion 5003.

[0327] In FIG. 106(B), a lower portion AR110 of the first portion 5003 of the connection frame 5000 may a portion corresponding to the bracket 140.

[0328] As shown in FIG. 107, the second portion 5004 in the area corresponding to the first portion 5003 may include a portion having a thickness TD14 greater than a thickness TD15 of the second portion 5004 in the area corresponding to the third portion 5005.

[0329] In this instance, even if the height TD13 of the second portion 5004 in the area corresponding to the first portion 5003 is relatively smaller than the height of the second portion 5004 in other areas, the strength of the connection frame 5000 may be sufficiently provided.

[0330] Alternatively, as shown in FIG. 108, the area corresponding to the first portion 5003 may include a double folded portion, so as to improve the strength of the second portion 5004 in the area corresponding to the first portion 5003. In this instance, a thickness TD14 of the double folded portion of the connection frame 5000 may be greater than a thickness TD15 of other portions.

[0331] As shown in FIG. 109, the frame 1600 may be fastened to the auxiliary bracket 4800 using a predetermined fastening member S405.

[0332] As shown in FIG. 110 (A), the second portion 5004 of the connection frame 5000 may include a hole 5006 corresponding to a fastening portion JP10 between the frame 1600 and the auxiliary bracket 4800. In this instance, the fastening portion JP10 between the frame 1600 and the auxiliary bracket 4800 may pass through the hole 5006 of the connection frame 5000.

[0333] The hole 5006 of the connection frame 5000 corresponding to the fastening portion JP10 between the frame 1600 and the auxiliary bracket 4800 may be hidden by an adhesive sheet 5006. In this instance, light may be prevented from leaking through the hole 5006 of the connection frame 5000.

[0334] As shown in FIG. 111, the bracket 140 may be disposed in the dummy area DA positioned outside the display area AA of the back substrate 111. Further, the bracket 140 may be inclined to the end of the back substrate 111 in the dummy area DA of the back substrate 111.

[0335] Preferably, a distance L100 between the display area AA of the back substrate 111 and the bracket 140 may be greater than a distance L101 between the end of the back substrate 111 and the bracket 140. In this instance, because the space for the optical layer 110 may be sufficiently secured between the display area AA of the back substrate 111 and the bracket 140, an excessive increase in the size of the dummy area DA may be prevented.

[0336] There are various methods for dividing the display panel 100 into the display area AA and the dummy area DA. For example, the display panel 100 may be divided into the display area AA and the dummy area DA based on a transistor formed on the display panel 100. More specifically, the display panel 100 may be divided into the display area AA and the dummy area DA based on an outermost transistor to which image data is supplied.

[0337] Alternatively, the display panel 100 may be divided into the display area AA and the dummy area DA based on the blocking member 1500.

[0338] For example, as shown in FIG. 111, the dummy area DA may range from an end of the blocking member 1500 on the front substrate 101 to an end of the display

panel 100, and the display area AA may occupy an area excluding the dummy area DA from the display panel 100. Other methods may be used to divide the display panel 100 into the active area AA and the dummy area DA. The method for dividing the display panel 100 into the active area AA and the dummy area DA based on the blocking member 1500 is described below.

[0339] When the display panel 100 is divided into the active area AA and the dummy area DA based on the blocking member 1500, the distance L100 between the end of the blocking member 1500 and the bracket 140 may be greater than the distance L100 between the bracket 140 and the end of the back substrate 111.

[0340] As shown in FIG. 112 (A), a width of the dummy area DA (i.e., a width of the blocking member 1500) may be greater than a height L102 of the bracket 140.

[0341] Alternatively, the distance L100 between a boundary between the active area AA and the dummy area DA and the bracket 140 may be greater than the height L102 of the bracket 140. In other words, the distance L100 between one end of the blocking member 1500, which is adjacent to the middle of the display panel 100, and the bracket 140 may be greater than the height L102 of the bracket 140.

[0342] In this instance, a travelling path of light generated in the light source may be sufficiently prevented from being blocked by a structure such as the bracket 140 and the auxiliary bracket 4800.

[0343] Further, the distance L101 between the bracket 140 and the end of the back substrate 111 may be less than the height L102 of the bracket 140. In this instance, the excessive increase in the size of the dummy area DA may be prevented.

[0344] Alternatively, as shown in Fig. 112 (B), the blocking member 1500 may be positioned between the front substrate 101 and the rear substrate 111. For example, the blocking member 1500 may be positioned on the front substrate in an area between the front substrate 101 and the rear substrate 111.

[0345] As shown in FIG. 113, the bracket 140 may include a light transmission material.

[0346] Further, it may be preferable that an adhesive used to attach the bracket 140 to the back surface of the back substrate 111 includes a photocurable material. In other words, the adhesive layer 400 may include a photocurable material.

[0347] In this instance, when light such as ultraviolet rays is incident on the bracket 140 in a state where the bracket 140 is attached to the back substrate 111, light may pass through the bracket 140 and may reach the adhesive layer 400. Then, the adhesive layer 400 may be cured. Therefore, time required to cure the adhesive layer 400 may be reduced.

[0348] As shown in FIG. 114, a bottom structure 9500 may be disposed on the side of the bottom cover 9100 disposed under the display panel 100. The bottom structure 9500 may prevent light from leaking into a space between the bottom cover 9100 and the display panel

100. Further, the bottom structure 9500 may prevent the viewer from visually perceiving the display panel 100 or another structure in the space between the bottom cover 9100 and the display panel 100.

[0349] As shown in FIG. 115, the bottom structure 9500 may include a base structure 9502 and a cover structure 9501 connected to the base structure 9502.

[0350] The base structure 9502 may have a hole 9503, and the bottom cover 9100 may have a hole 9101 corresponding to the hole 9503 of the base structure 9502.

[0351] A predetermined fastening member S406 may pass through the hole 9503 of the base structure 9502 and the hole 9101 of the bottom cover 9100, thereby fastening the base structure 9502 to the bottom cover 9100.

[0352] As above, the base structure 9502 may be fastened to the bottom cover 9100, and the cover structure 9501 may be positioned on the side of the bottom cover 9100. Hence, the cover structure 9501 of the bottom structure 9500 may prevent light from leaking into a space between the bottom cover 9100 and the display panel 100.

[0353] As shown in FIG. 116(A), the connection frame 5000 may be divided into a plurality of parts.

[0354] For example, a transverse connection frame 5100A may be disposed at a location corresponding to the transverse brackets 140A1 and 140A2; a first longitudinal connection frame 5100B1 may be disposed at a location corresponding to the first longitudinal bracket 140B1; and a second longitudinal connection frame 5100B2 may be disposed at a location corresponding to the second longitudinal bracket 140B2.

[0355] Each of the connection frames may correspond to the plurality of brackets 140.

[0356] For example, as shown in FIG. 116(B), each of the transverse connection frame 5100A and the first longitudinal connection frame 5100B1 may correspond to the plurality of brackets 140.

[0357] Alternatively, as shown in FIG. 117, one connection frame 5000 may correspond to one bracket 140. In this instance, the connection frame 5000 may be inserted into the hole 1003 of the bracket 140.

[0358] For example, as shown in FIG. 117 (A) a transverse connection frame 5000A10 corresponding to the transverse brackets 140A may be formed, a first longitudinal connection frame 5000B10 corresponding to the first longitudinal bracket 140B1 may be formed, and a second longitudinal connection frame 5000B20 corresponding to the second longitudinal bracket 140B2 may be formed.

[0359] In this instance, as shown in FIG. 117 (B) the connection frame 5000A10 may include a horizontal portion 5020 parallel to the longitudinal direction of the display panel 100 and a vertical portion 5004 (i.e., the second portion 5004 of the connection frame 5000A10) parallel to the width direction of the display panel 100. The horizontal portion 5020 may be inserted into the hole 1003 formed in the pillar 1001 of the bracket 140. In this instance, a thickness WTS2 of the horizontal portion

5020 of the connection frame 5000 may be less than a height WTS1 of the hole 1003 formed in the pillar 1001. In other word, the opening 1003 of the bracket 140A has a larger dimension than the first tab portion 5020 of the at least one connection frame 5000A10. Hence, the horizontal portion 5020 of the connection frame 5000 may move up and down inside the hole 1003.

[0360] Further, a length WTS4 of the connection frame 5000 may be less than a length WTS3 of the bracket 140.

[0361] Alternatively, as shown in FIG. 118, a length WTS6 of the connection frame 5000 may be greater than the length WTS3 of the bracket 140. In this instance, the connection frame 5000 may include a portion inserted into the hole 1003 of the bracket 140.

[0362] More specifically, the horizontal portion 5020 of the connection frame 5000 may include a first portion 5003 inserted into the hole 1003 of the bracket 140 and a third portion 5005 positioned between the two adjacent brackets 140. In this instance, a thickness WTS5 of the first portion 5003 of the horizontal portion 5020 of the connection frame 5000 may be less than the height WTS1 of the hole 1003 formed in the pillar 1001.

[0363] As shown in FIG. 119, the frame 1600 may be separated from the bracket 140 by a predetermined distance WTS10. More specifically, the frame 1600 may be separated from the bracket 140 by the predetermined distance WTS10 in the width direction (i.e., the vertical direction) of the display panel 100. This may be implemented when the frame 1600 is fastened to the auxiliary bracket 4800 as shown in FIGs. 109 and 110.

[0364] Alternatively, the frame 1600 may contact the bracket 140.

[0365] As shown in FIG. 120, the side wall 4400V of the side cover 4400 is extended in a third direction (DRV), and the overhang portion 4400H being space from the end of the sidewall 4400V by a prescribed distance GaT1 in the third direction (DRV) such that the side cover 4400 provides a rim for a back cover 130.

[0366] The screws S405 which connects the frame 1600 and auxiliary bracket 4800 may be positioned between the connection frame 5000 and the side cover 4400.

[0367] As shown in FIG. 121, the bracket 140 does not have recess. In this case, a side edge of the adhesive layer 400 is exposed.

[0368] As shown in FIG. 122, the bracket 140 has the base 1000 and the first protrusion 1001. And, the first protrusion 1001 of the bracket extending away from the rear panel 111 in the vertical direction DRV (third direction) of the display panel.

[0369] The first protrusion 1001 has the opening 1003 and recess 1008 recessed in the horizontal direction DRH (third direction).

[0370] As shown in FIGs. 123 and 124, the bracket 140 has a plurality of recesses REC1, REC2. And, the adhesive layer 400 may be form at each of the recess REC1, REC2.

[0371] In this case, a height TREC1 of a first recess

REC 1 may be different from a height TREC2 of a second recess REC 2.

[0372] The display apparatus according to the embodiment of the invention is not limited to the structure of the first and second recess REC1, REC2 of Figs 123 and 124.

[0373] FIG. 125 illustrates another configuration of the display apparatus according to the example embodiment of the invention. In the following description, the descriptions of the configuration and the structure described above are omitted. Hereinafter, a broadcasting signal receiver is used as an electronic device, to which the display apparatus according to the embodiment of the invention is applied. The display apparatus according to the embodiment of the invention may be applied to other electronic devices such as cell phones.

[0374] A display unit 180Q shown in FIG. 125 may correspond to the display apparatus shown in FIGs. 1 to 124. Thus, the display apparatus according to the embodiment of the invention may be referred to as the display unit 180Q shown in FIG. 125.

[0375] As shown in FIG. 125, a broadcasting signal receiver 100Q according to the embodiment of the invention may include a broadcasting receiving unit 105Q, an external device interface 135Q, a storage unit 140Q, a user input interface 150Q, a controller 170Q, a display unit 180Q, an audio output unit 185Q, a power supply unit 190Q, and a photographing unit (not shown). The broadcasting receiving unit 105Q may include a tuner 110Q, a demodulator 120Q, and a network interface 130Q.

[0376] If necessary, the broadcasting signal receiver 100Q may be designed so that it includes the tuner 110Q and the demodulator 120Q and does not include the network interface 130Q. On the contrary, the broadcasting signal receiver 100Q may be designed so that it includes the network interface 130Q and does not include the tuner 110Q and the demodulator 120Q.

[0377] The tuner 110Q tunes a radio frequency (RF) broadcasting signal, which corresponds to a channel selected by the user or all of previously stored channels, among RF broadcasting signals received through an antenna. Further, the tuner 110Q converts the tuned RF broadcasting signal into a middle frequency signal, a base band image signal, or a voice signal.

[0378] The demodulator 120Q receives a digital IF signal converted by the tuner 110Q and performs a demodulating operation.

[0379] A stream signal output by the demodulator 120Q may be input to the controller 170Q. The controller 170Q performs demultiplexing, image/voice signal processing, etc. Then, the controller 170Q outputs an image to the display unit 180Q and outputs a voice to the audio output unit 185Q.

[0380] The external device interface 135Q may connect an external device to the broadcasting signal receiver 100Q. For this, the external device interface 135Q may include an audio-visual (AV) input/output unit (not shown)

or a wireless communication unit (not shown).

[0381] The network interface 130Q provides an interface for connecting the broadcasting signal receiver 100Q to a wired/wireless network including an internet network. The network interface 130Q may correspond to the wireless communication unit, which was described in detail above.

[0382] The storage unit 140Q may store a program for the signal processing of the controller 170Q and the control operation of the controller 170Q or may store the processed image signal, the processed voice signal, or a data signal.

[0383] The user input interface 150Q may transfer the signal the user inputs to the controller 170Q, or may transfer the signal from the controller 170Q to the user.

[0384] For example, the user input interface 150Q may receive and process the control signal indicating the turn-on or turn-off operation, the channel selection, the screen setting, etc. from a remote controller 200Q based on various communication manners such as a RF communication manner and an infrared communication manner. Alternatively, the user input interface 150Q may operate so that the control signal from the controller 170Q is transmitted to the remote controller 200Q.

[0385] For example, the user input interface 150Q may transfer a control signal, which is input from a power key, a channel key, a volume key, a local key, etc., to the controller 170Q.

[0386] The controller 170Q may perform the demultiplexing processing on the stream input through the tuner 110Q, the demodulator 120Q, or the external device interface 135Q or may perform the processing of demultiplexed signals, thereby generating or outputting the signals for outputting the image or the voice.

[0387] The image signal processed by the controller 170Q may be input to the display unit 180Q and may display an image corresponding to the image signal. Further, the image signal processed by the controller 170Q may be input to an external output device through the external device interface 135Q.

[0388] The voice signal processed by the controller 170Q may be output to the audio output unit 185Q. Further, the voice signal processed by the controller 170Q may be input to the external output device through the external device interface 135Q.

[0389] The controller 170Q may control the entire operation of the broadcasting signal receiver 100Q. For example, the controller 170Q may control the tuner 110Q, so that the tuner 110Q tunes a RF broadcasting signal corresponding to a channel selected by the user or a previously stored channel.

[0390] The controller 170Q may control the broadcasting signal receiver 100Q using a user command or an internal program input through the user input interface 150Q.

[0391] The display unit 180Q may convert the image signal, the data signal, and an OSD signal, which are processed by the controller 170Q, or the image signal

and the data signal which are received from the external device interface 135Q, into red, green, and blue signals and may generate a driving signal.

[0392] The audio output unit 185Q may receive the voice signal (for example, stereo signal, 3.1 channel signal, or 5.1 channel signal) processed by the controller 170Q and may output the voice.

[0393] The power supply unit 190Q supplies the power required in all of the components of the broadcasting signal receiver 100Q.

[0394] The remote controller 200Q transmits the user command the user inputs to the user input interface 150Q. For this, the remote controller 200Q may use Bluetooth, RF communication, infrared communication, Ultra-wideband (UWB), Zigbee, etc.

[0395] The remote controller 200Q may receive the image, the voice, or the data signal output from the user input interface 150Q and may display the image, the voice, or the data signal or may output the voice or the vibration.

[0396] The broadcasting signal receiver 100Q may not include the tuner 110Q and the demodulator 120Q. Further, the broadcasting signal receiver 100Q may receive image contents through the network interface 130Q or the external device interface 135Q and may reproduce the image contents.

[0397] Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the scope of the principles of this disclosure. More particularly, various variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

Claims

1. A display apparatus, comprising:

a display panel (100) including a front substrate (101) and a rear substrate (111);
a frame (1600) provided behind the display panel (100);
a side cover (4400) provided adjacent to sides of the display panel (100), the side cover (4400) including a side wall (4400V) and a horizontal part (4400H) extending from the side wall (4400V), the side cover (4400) connected to the frame (1600), a back cover (130) provided behind the frame (1600), and connected to the frame (1600), **characterized in that** the side cover (4400) is bent at each corner (BA2) of two

- adjacent sides of the display panel (100) where the side cover (4400) is provided; and wherein at least a portion of the horizontal part (4400H) is separated by a gap and a hole (H100) at each of the corners (BA2), wherein the hole (H100) is positioned between the gap and the side wall (4400V), and wherein a width (TG2) of the hole (H100) is greater than a width (TG1) of the gap.
2. The display apparatus of claim 1, wherein the side cover includes:
- a first side cover;
 - a second side cover adjacent to the first side cover;
 - a third side cover adjacent to the first side cover and opposite to the second side cover; and
 - a fourth side cover adjacent to the second and third side cover and opposite to the first side cover,
- wherein the corner is a first corner located at a bent region where the first and the second side covers meet, and
- wherein the side cover further includes:
- a second corner located at a bent region where the first and the third side covers meet,
 - a third corner located at a bent region where the second and fourth side covers meet, and
 - a fourth corner located at a bent region where the third and fourth side covers meet.
3. The display apparatus of claim 2, wherein the fourth side cover includes a first portion extending from the second side cover in a parallel direction of the first side cover and a second portion extending from the third side cover in a parallel direction of the first side cover, the first and second portions being separated to form an opening therebetween.
4. The display apparatus of any one of the preceding claims, further comprising a cover member (4400R) attached to cover the hole (H100).
5. The display apparatus of any one of the preceding claims, wherein an end of the back cover (130) is provided on the horizontal part (4400H) of the side cover (4400).
6. The display apparatus of claim 5, wherein the side cover (4400) comprises a protrusion (4401) protruding in a direction toward a rear of the display panel (100), wherein the end of the back cover (130) is positioned next to the protrusion (4401).
7. The display apparatus of any one of the preceding claims, further comprising:
- at least one of a wireless communication unit (WF10) and a speaker module (SP10) disposed on at least one side of the display apparatus.
8. The display apparatus of any one of the preceding claims, further comprising a bottom cover (9100) positioned on a long side (LS2) of the display panel (100), the bottom cover (9100) covering a portion of a front of the display panel (100).
9. The display apparatus of any one of the preceding claims, further comprising:
- an input module (9140) disposed on a back of the frame (1600), the input module (9140) including at least one input key and being exposed through a hole on the back cover (130).
10. The display apparatus of any one of the preceding claims, wherein the back cover (130) includes at least one first hole, the horizontal part (4400H) includes at least one second hole, and the frame (1600) includes at least one third hole, wherein the back cover (130), the horizontal part (4400H) of the side cover (4400), and the frame (1600) are fastened to one another through a fastening member (S110) passing through the first, second, and third holes.
11. The display apparatus of any one of the preceding claims, wherein the back cover (130) is divided into a first back cover (131) and a second back cover (132) connected to the first back cover (131), wherein a material forming the first back cover (131) is different from a material forming the second back cover (132).
12. The display apparatus of claim 11, wherein the second back cover (132) contains a material capable of transmitting a radio wave, wherein a wireless communication unit (WF1) is provided between the frame (1600) and the second back cover (132).

Patentansprüche

1. Anzeigevorrichtung, die umfasst:

- ein Anzeigepanel (100) mit einem vorderen Substrat (101) und einem hinteren Substrat (111);
- einen rückseitig des Anzeigepanels (100) vorgesehenen Rahmen (1600);

eine benachbart zu den Seiten des Anzeigepanels (100) vorgesehene Seitenabdeckung (4400), wobei die Seitenabdeckung (4400) eine Seitenwand (4400V) und einen sich von der Seitenwand (4400V) aus erstreckenden horizontalen Abschnitt (4400H) umfasst, wobei die Seitenabdeckung (4400) mit dem Rahmen (1600) verbunden ist,

eine rückseitig des Rahmens (1600) vorgesehene und mit dem Rahmen (1600) verbundene Rückseitenabdeckung (130),

dadurch gekennzeichnet, dass

die Seitenabdeckung (4400) an jeder Ecke (BA2) von zwei benachbarten Seiten des Anzeigepanels (100) gebogen ist, an denen die Seitenabdeckung (4400) vorgesehen ist; und wobei wenigstens ein Teil des horizontalen Abschnitts (4400H) durch einen Spalt und eine Öffnung (H100) an jeder der Ecken (BA2) getrennt ist,

wobei die Öffnung (H100) zwischen dem Spalt und der Seitenwand (4400V) angeordnet ist, und

wobei eine Breite (TG2) der Öffnung (H100) größer als eine Breite (TG1) des Spalts ist.

2. Anzeigevorrichtung nach Anspruch 1, wobei die Seitenabdeckung umfasst:

eine erste Seitenabdeckung;

eine zu der ersten Seitenabdeckung benachbarte zweite Seitenabdeckung;

eine zu der ersten Seitenabdeckung benachbarte und der zweiten Seitenabdeckung gegenüberliegende dritte Seitenabdeckung; und

eine zu der zweiten und der dritten Seitenabdeckung benachbarte und der ersten Seitenabdeckung gegenüberliegende vierte Seitenabdeckung,

wobei die Ecke eine erste Ecke ist, die in einem gebogenen Bereich angeordnet ist, in dem sich die erste und die zweite Seitenabdeckung treffen, und

wobei die Seitenabdeckung ferner umfasst:

eine zweite Ecke, die in einem gebogenen Bereich angeordnet ist, in dem sich die erste und die dritte Seitenabdeckung treffen,

eine dritte Ecke, die in einem gebogenen Bereich angeordnet ist, in dem sich die zweite und die vierte Seitenabdeckung treffen, und

eine vierte Ecke, die in einem gebogenen Bereich angeordnet ist, in dem sich die dritte und die vierte Seitenabdeckung treffen.

3. Anzeigevorrichtung nach Anspruch 2, wobei die vierte Seitenabdeckung einen sich von der zweiten Sei-

tenabdeckung aus in paralleler Richtung zu der ersten Seitenabdeckung erstreckenden ersten Abschnitt und einen sich von der dritten Seitenabdeckung in paralleler Richtung zu der ersten Seitenabdeckung erstreckenden zweiten Abschnitt umfasst, wobei der erste und der zweite Abschnitt voneinander getrennt sind, sodass sie eine dazwischenliegende Öffnung bilden.

4. Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, die ferner eine zum Abdecken der Öffnung (H100) angebrachte Abdeckkomponente (4400R) umfasst.

5. Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, wobei ein Ende der Rückseitenabdeckung (130) an dem horizontalen Abschnitt (4400H) der Seitenabdeckung (4400) vorgesehen ist.

6. Anzeigevorrichtung nach Anspruch 5, wobei die Seitenabdeckung (4400) einen Vorsprung (4401) umfasst, der sich in Richtung einer Rückseite des Anzeigepanels (100) erstreckt, wobei das Ende der Rückseitenabdeckung (130) neben dem Vorsprung (4401) angeordnet ist.

7. Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, ferner umfassend:

eine drahtlose Kommunikationseinheit (WF10) und/oder ein Lautsprechermodul (SP10), die/das an wenigstens einer Seite der Anzeigevorrichtung angeordnet ist.

8. Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, ferner umfassend: eine an einer Längsseite (LS2) des Anzeigepanels (100) angeordnete Bodenabdeckung (9100), wobei die Bodenabdeckung (9100) einen Abschnitt einer Vorderseite des Anzeigepanels (100) abdeckt.

9. Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, ferner umfassend:

ein an einer Rückseite des Rahmens (1600) angeordnetes Eingabemodul (9140), wobei das Eingabemodul (9140) wenigstens eine Eingabetaste umfasst und durch eine Öffnung an der Rückseitenabdeckung (130) zugänglich ist.

10. Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, wobei die Rückseitenabdeckung (130) wenigstens eine erste Öffnung umfasst, der horizontale Abschnitt (4400H) wenigstens eine zweite Öffnung umfasst und der Rahmen (1600) wenigstens eine dritte Öffnung umfasst,

wobei die Rückseitenabdeckung (130), der horizontale Abschnitt (4400H) der Seitenabdeckung (4400) und der Rahmen (1600) mittels einer sich durch die erste, zweite und dritte Öffnung hindurch erstreckende Befestigungskomponente (S110) aneinander befestigt sind.

11. Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, wobei die Rückseitenabdeckung (130) in eine erste Rückseitenabdeckung (131) und eine mit der ersten Rückseitenabdeckung (131) verbundene zweite Rückseitenabdeckung (132) geteilt ist, wobei ein die erste Rückseitenabdeckung (131) bildendes Material von einem die zweite Rückseitenabdeckung (132) bildenden Material verschieden ist.
12. Anzeigevorrichtung nach Anspruch 11, wobei die zweite Rückseitenabdeckung (132) ein Material zum Übertragen einer Radiowelle umfasst, wobei eine drahtlose Kommunikationseinheit (WF1) zwischen dem Rahmen (1600) und der zweiten Rückseitenabdeckung (132) vorgesehen ist.

Revendications

1. Appareil d'affichage, comprenant :

un panneau d'affichage (100) incluant un substrat avant (101) et un substrat arrière (111) ;
un châssis (1600) prévu à l'arrière du panneau d'affichage (100) ;
un capot latéral (4400) prévu adjacent à des côtés du panneau d'affichage (100), le capot latéral (4400) incluant une paroi latérale (4400V) et une partie horizontale (4400H) s'étendant depuis la paroi latérale (4400V), le capot latéral (4400) connecté au châssis (1600),
un capot arrière (130) prévu derrière le châssis (1600), et connecté au châssis (1600), **caractérisé en ce que**
le capot latéral (4400) est plié à chaque angle (BA2) de deux côtés adjacents du panneau d'affichage (100) où le capot latéral (4400) est prévu ; et
dans lequel au moins une partie de la partie horizontale (4400H) est séparée par un espace et un trou (H100) au niveau de chacun des angles (BA2),
dans lequel le trou (H100) est positionné entre l'espace et la paroi latérale (4400V), et
dans lequel une largeur (TG2) du trou (H100) est supérieure à une largeur (TG1) de l'espace.

2. Appareil d'affichage selon la revendication 1, dans lequel le capot latéral inclut :

un premier capot latéral ;
un deuxième capot latéral adjacent au premier capot latéral ;
un troisième capot latéral adjacent au premier capot latéral et opposé au deuxième capot latéral ; et
un quatrième capot latéral adjacent au deuxième et au troisième capot latéral et opposé au premier capot latéral,
dans lequel l'angle est un premier angle situé au niveau d'une région pliée où les premier et deuxième capots latéraux se rencontrent, et
dans lequel le capot latéral inclut en outre :

un deuxième angle situé au niveau d'une région pliée où les premier et troisième capots latéraux se rencontrent,
un troisième angle situé au niveau d'une région pliée où les deuxième et quatrième capots latéraux se rencontrent, et
un quatrième angle situé au niveau d'une région pliée où les troisième et quatrième capots latéraux se rencontrent.

3. Appareil d'affichage selon la revendication 2, dans lequel le quatrième capot latéral inclut une première partie s'étendant depuis le deuxième capot latéral dans un sens parallèle du premier capot latéral et une deuxième partie s'étendant depuis le troisième capot latéral dans un sens parallèle du premier capot latéral, les première et deuxième parties étant séparées pour former une ouverture entre celles-ci.

4. Appareil d'affichage selon l'une quelconque des revendications précédentes, comprenant en outre un élément de capot (4400R) fixé pour recouvrir le trou (H100).

5. Appareil d'affichage selon l'une quelconque des revendications précédentes, dans lequel une extrémité du capot arrière (130) est prévue sur la partie horizontale (4400H) du capot latéral (4400).

6. Appareil d'affichage selon la revendication 5, dans lequel le capot latéral (4400) comprend une saillie (4401) faisant saillie dans une direction vers un arrière du panneau d'affichage (100), dans lequel l'extrémité du capot arrière (130) est positionnée à côté de la saillie (4401).

7. Appareil d'affichage selon l'une quelconque des revendications précédentes, comprenant en outre :

au moins une unité de communication sans fil (WF10) et un module de haut-parleur (SP10) disposés sur au moins un côté de l'appareil d'affichage.

8. Appareil d'affichage selon l'une quelconque des revendications précédentes, comprenant en outre un capot de fond (9100) positionné sur un côté long (LS2) du panneau d'affichage (100), le capot de fond (9100) recouvrant une partie d'un avant du panneau d'affichage (100). 5
9. Appareil d'affichage selon l'une quelconque des revendications précédentes, comprenant en outre : 10
un module d'entrée (9140) disposé sur un arrière du châssis (1600), le module d'entrée (9140) incluant au moins une touche d'entrée et étant exposé à travers un trou sur le capot arrière (130). 15
10. Appareil d'affichage selon l'une quelconque des revendications précédentes, dans lequel le capot arrière (130) inclut au moins un premier trou, la partie horizontale (4400H) inclut au moins un deuxième trou, et le châssis (1600) inclut au moins un troisième trou, dans lequel le capot arrière (130), la partie horizontale (4400H) du capot latéral (4400), et le châssis (1600) sont fixés les uns aux autres par l'intermédiaire d'un élément de fixation (S110) passant à travers les premier, deuxième, et troisième trous. 20 25
11. Appareil d'affichage selon l'une quelconque des revendications précédentes, 30
dans lequel le capot arrière (130) est divisé en un premier capot arrière (131) et un deuxième capot arrière (132) connecté au premier capot arrière (131), dans lequel un matériau formant le premier capot arrière (131) est différent d'un matériau formant le deuxième capot arrière (132). 35
12. Appareil d'affichage selon la revendication 11, dans lequel le deuxième capot arrière (132) contient un matériau apte à transmettre une onde radio, 40
dans lequel une unité de communication sans fil (WF1) est prévue entre le châssis (1600) et le deuxième capot arrière (132). 45

50

55

FIG. 1
(RELATED ART)

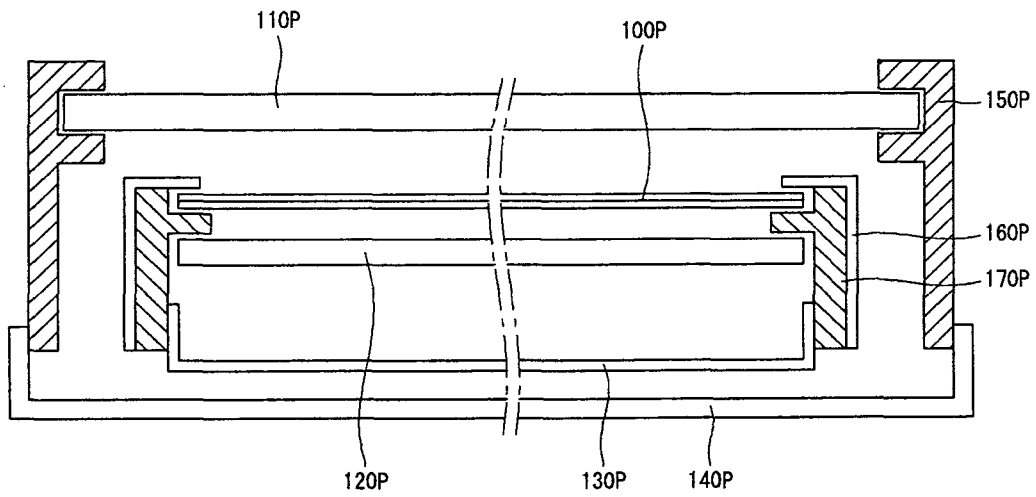


FIG. 2

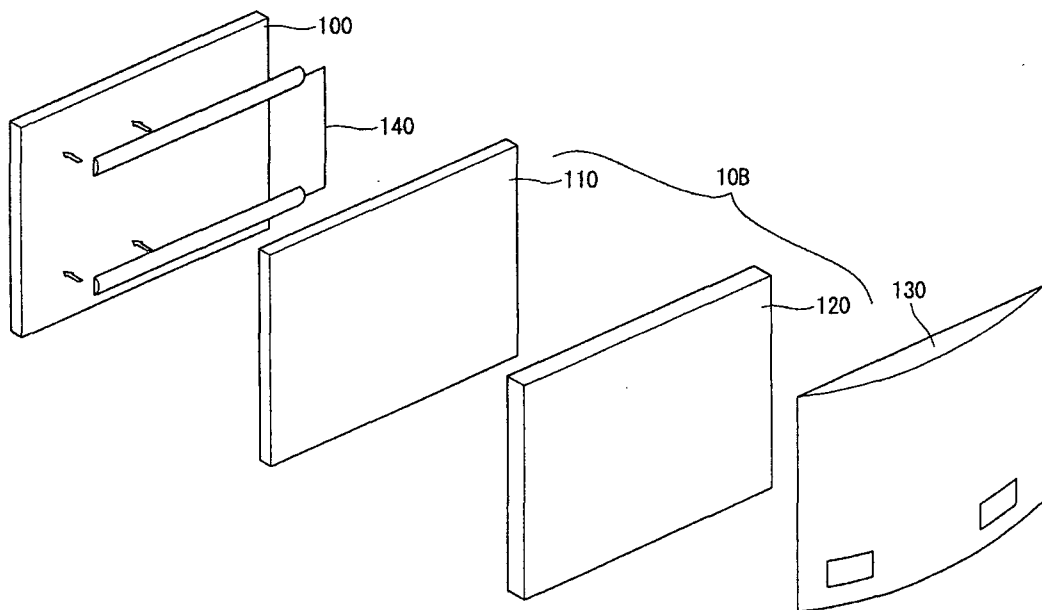


FIG. 3

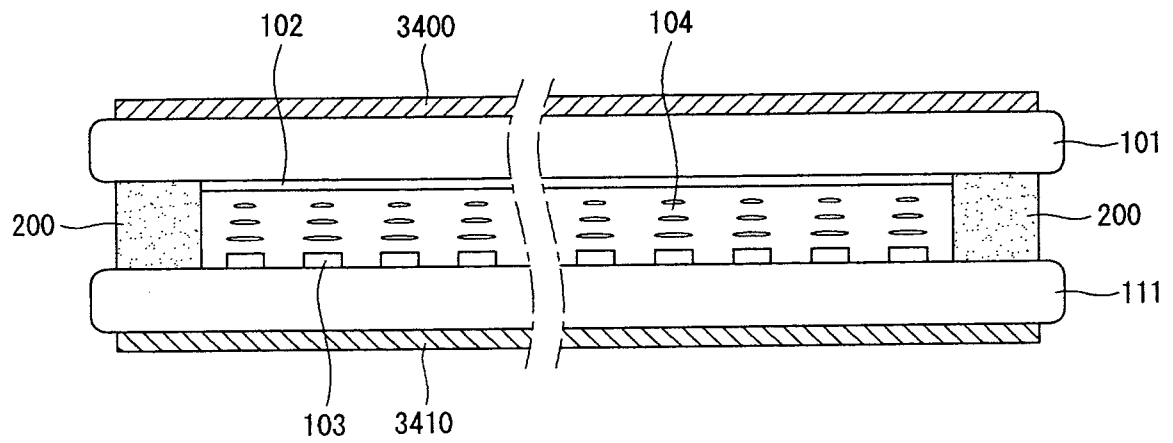


FIG. 4

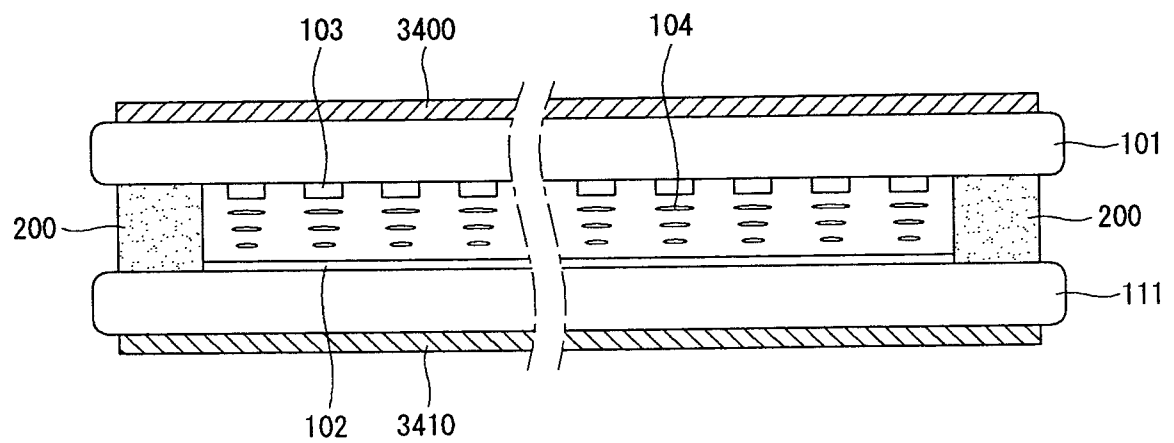


FIG. 5

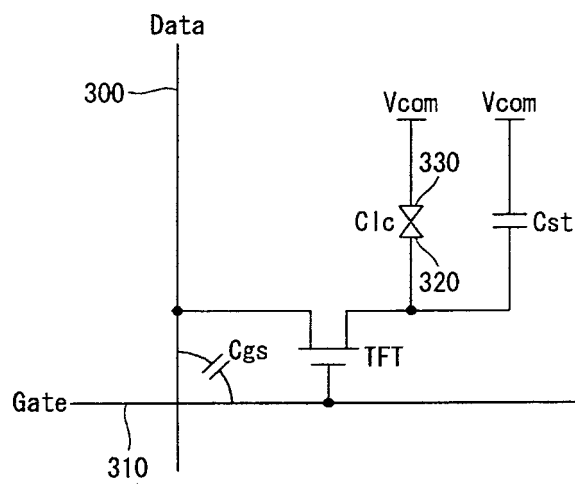


FIG. 6

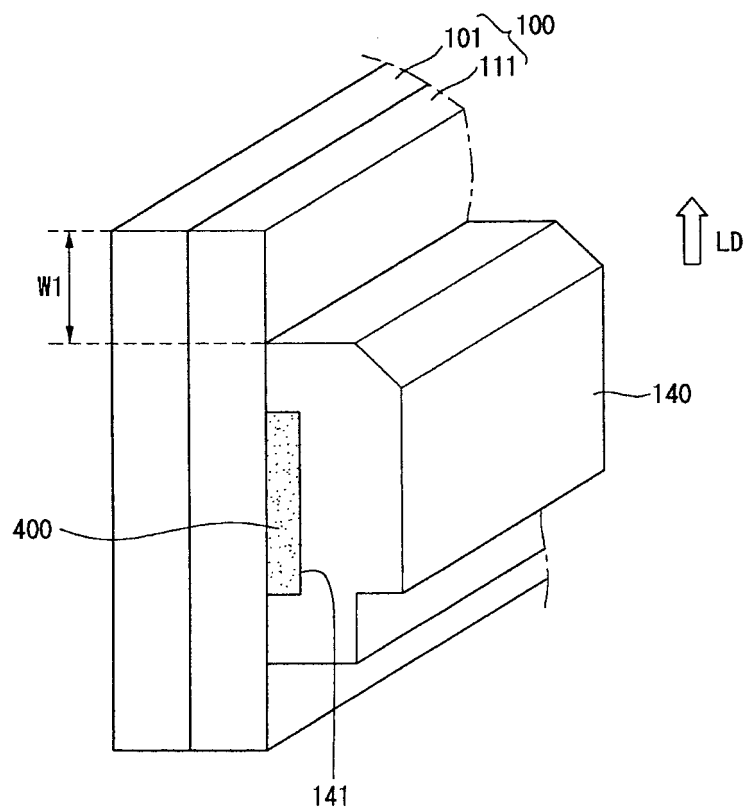


FIG. 7

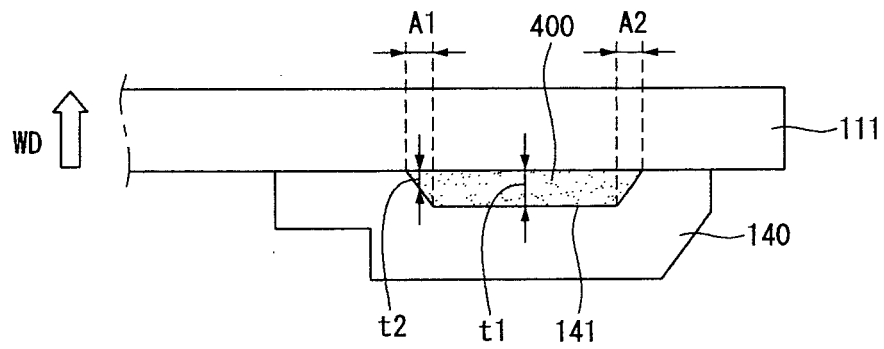


FIG. 8

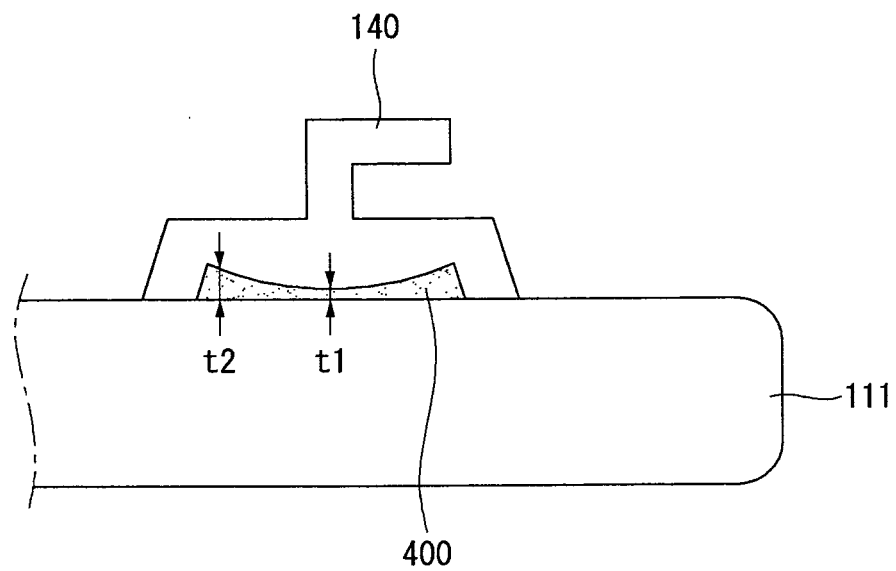


FIG. 9

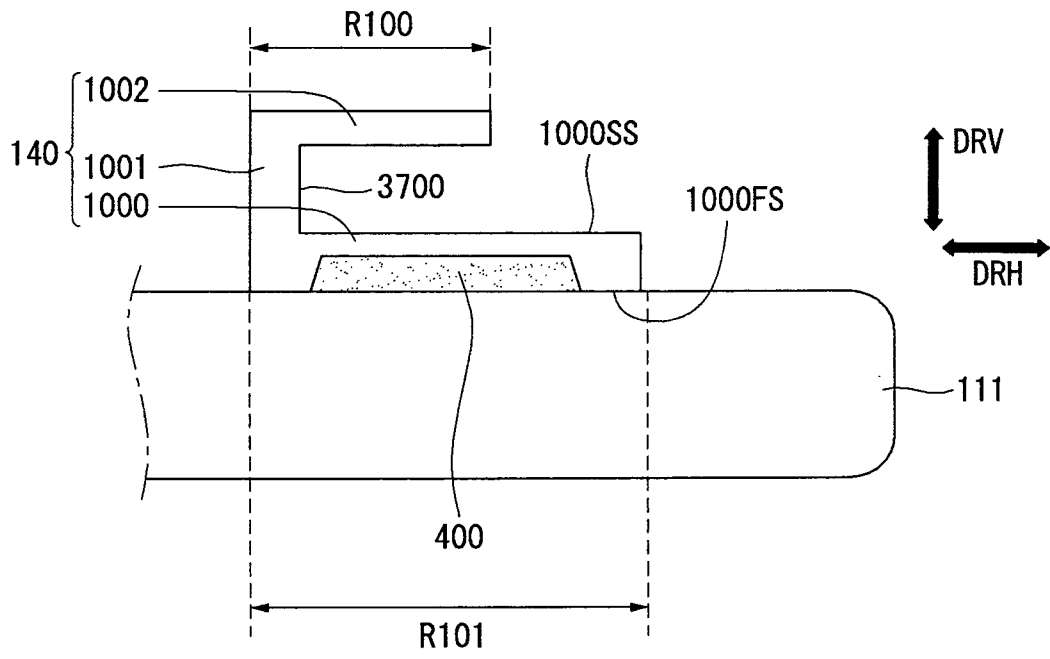


FIG. 10

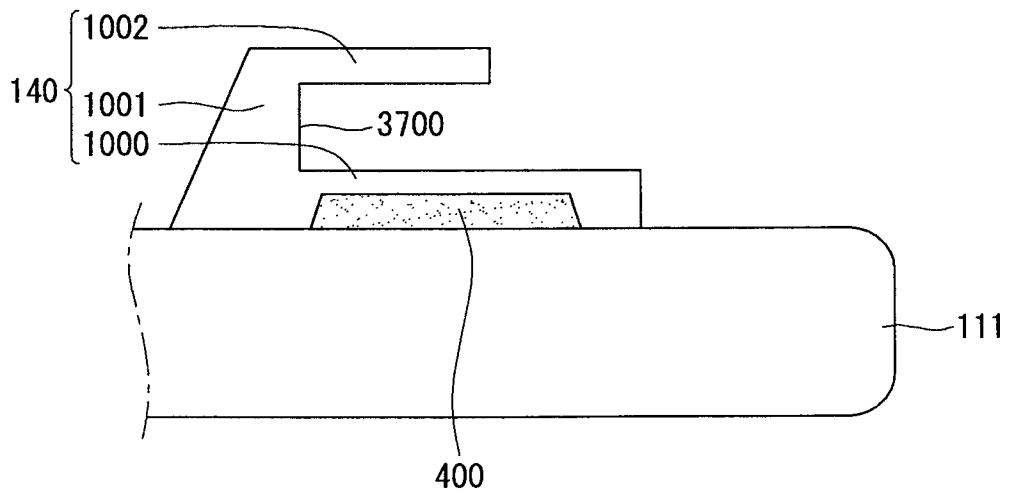


FIG. 11

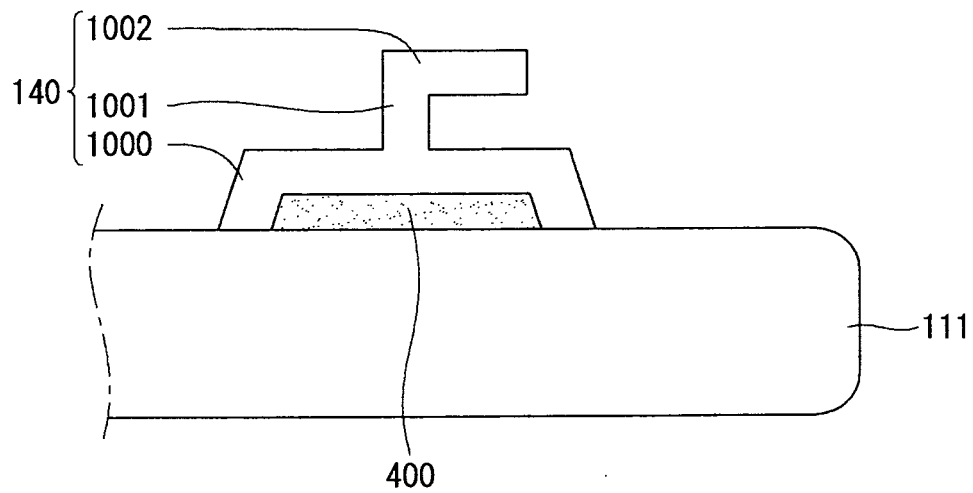


FIG. 12

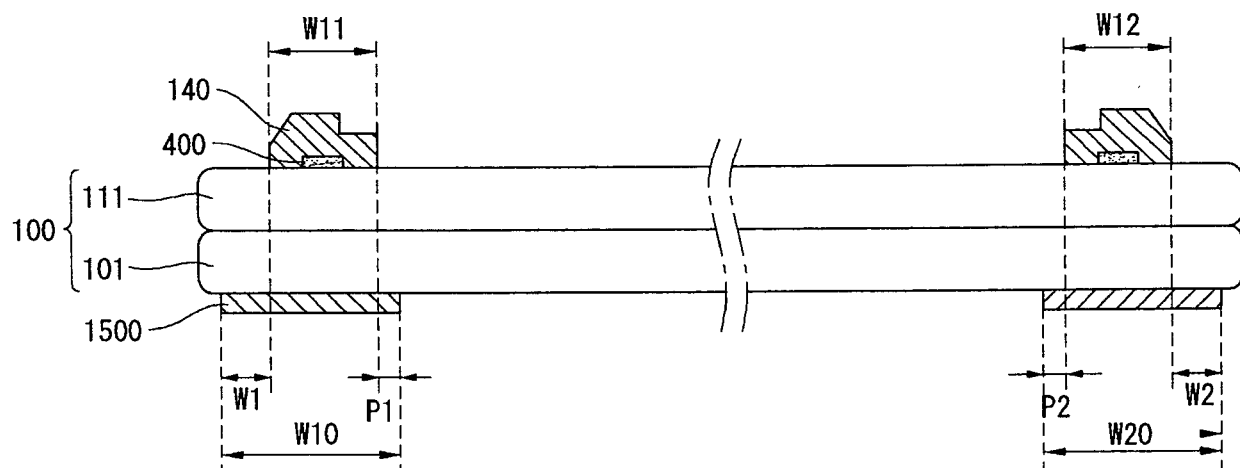


FIG. 13

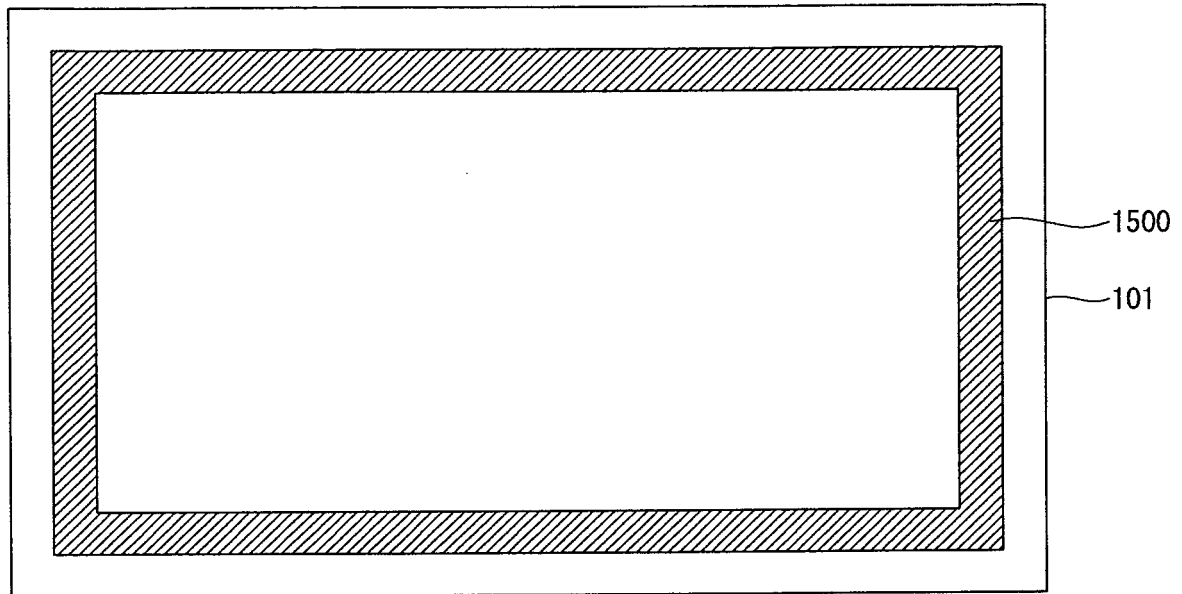


FIG. 14

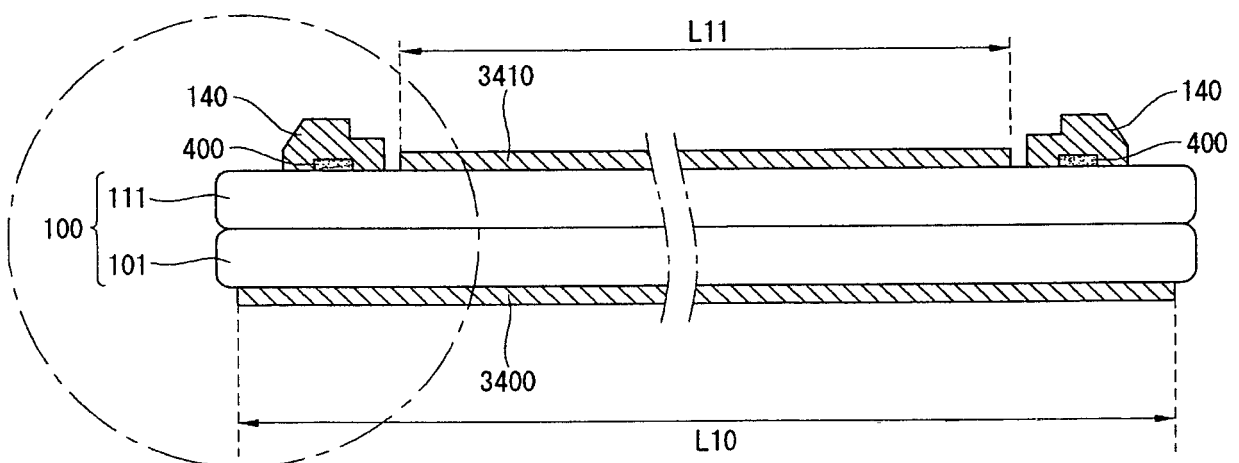


FIG. 15

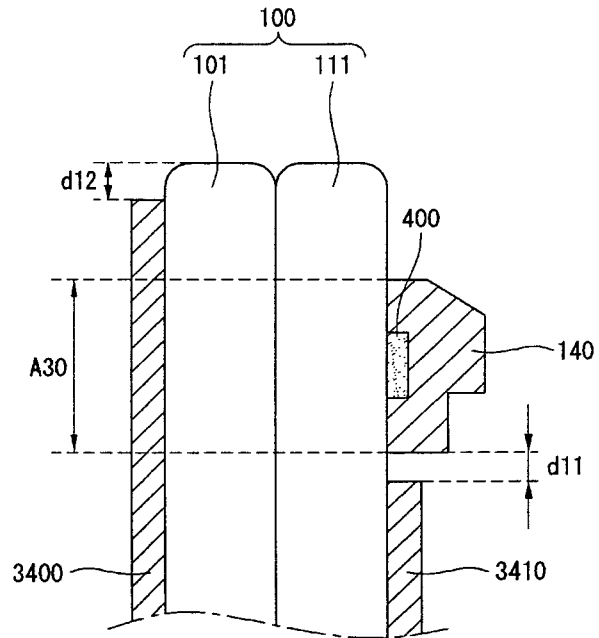


FIG. 16

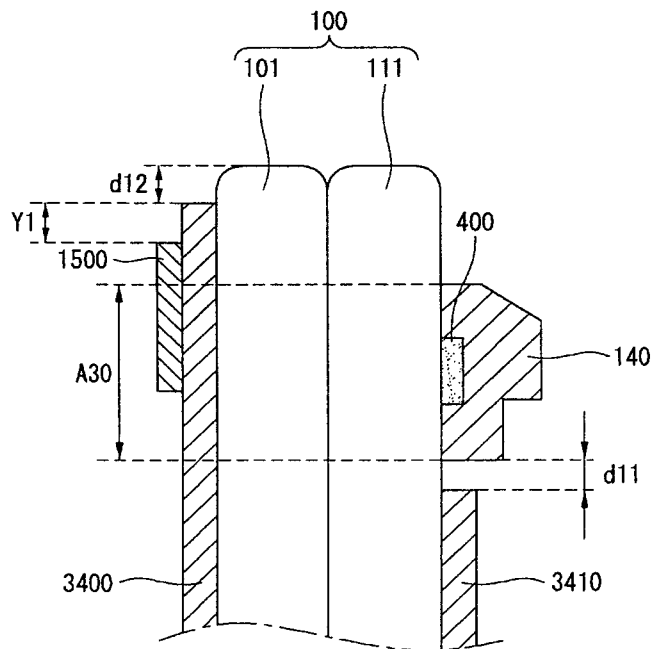


FIG. 17

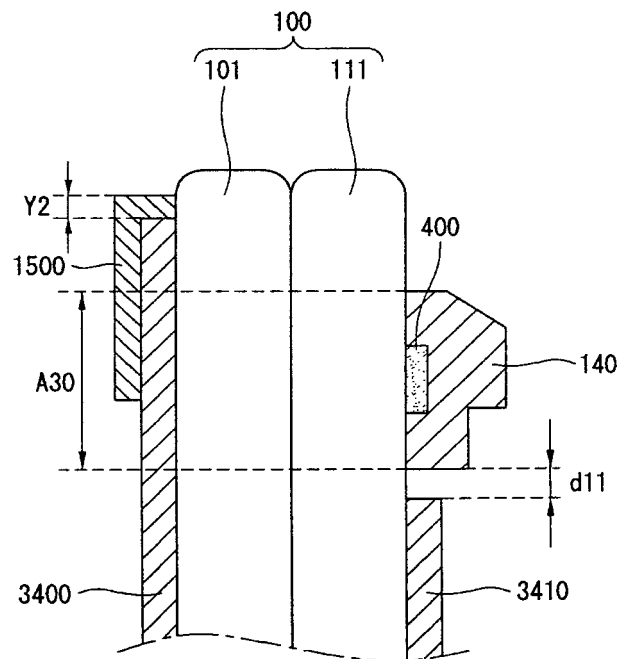


FIG. 18

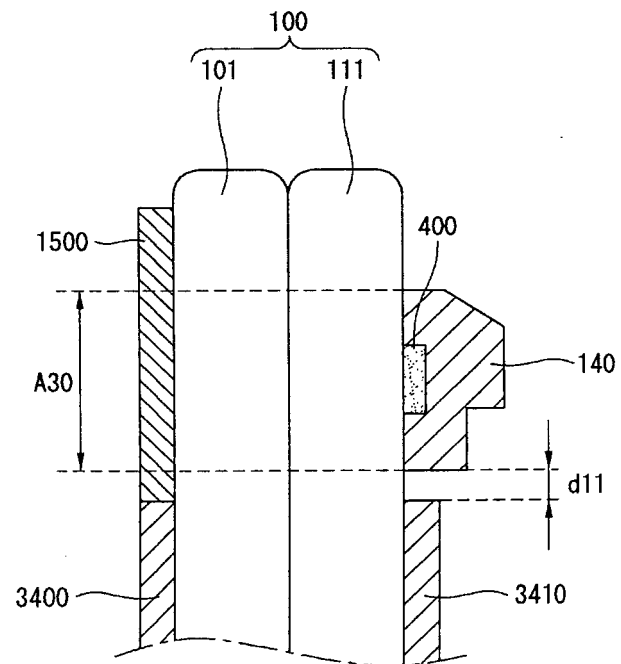


FIG. 19

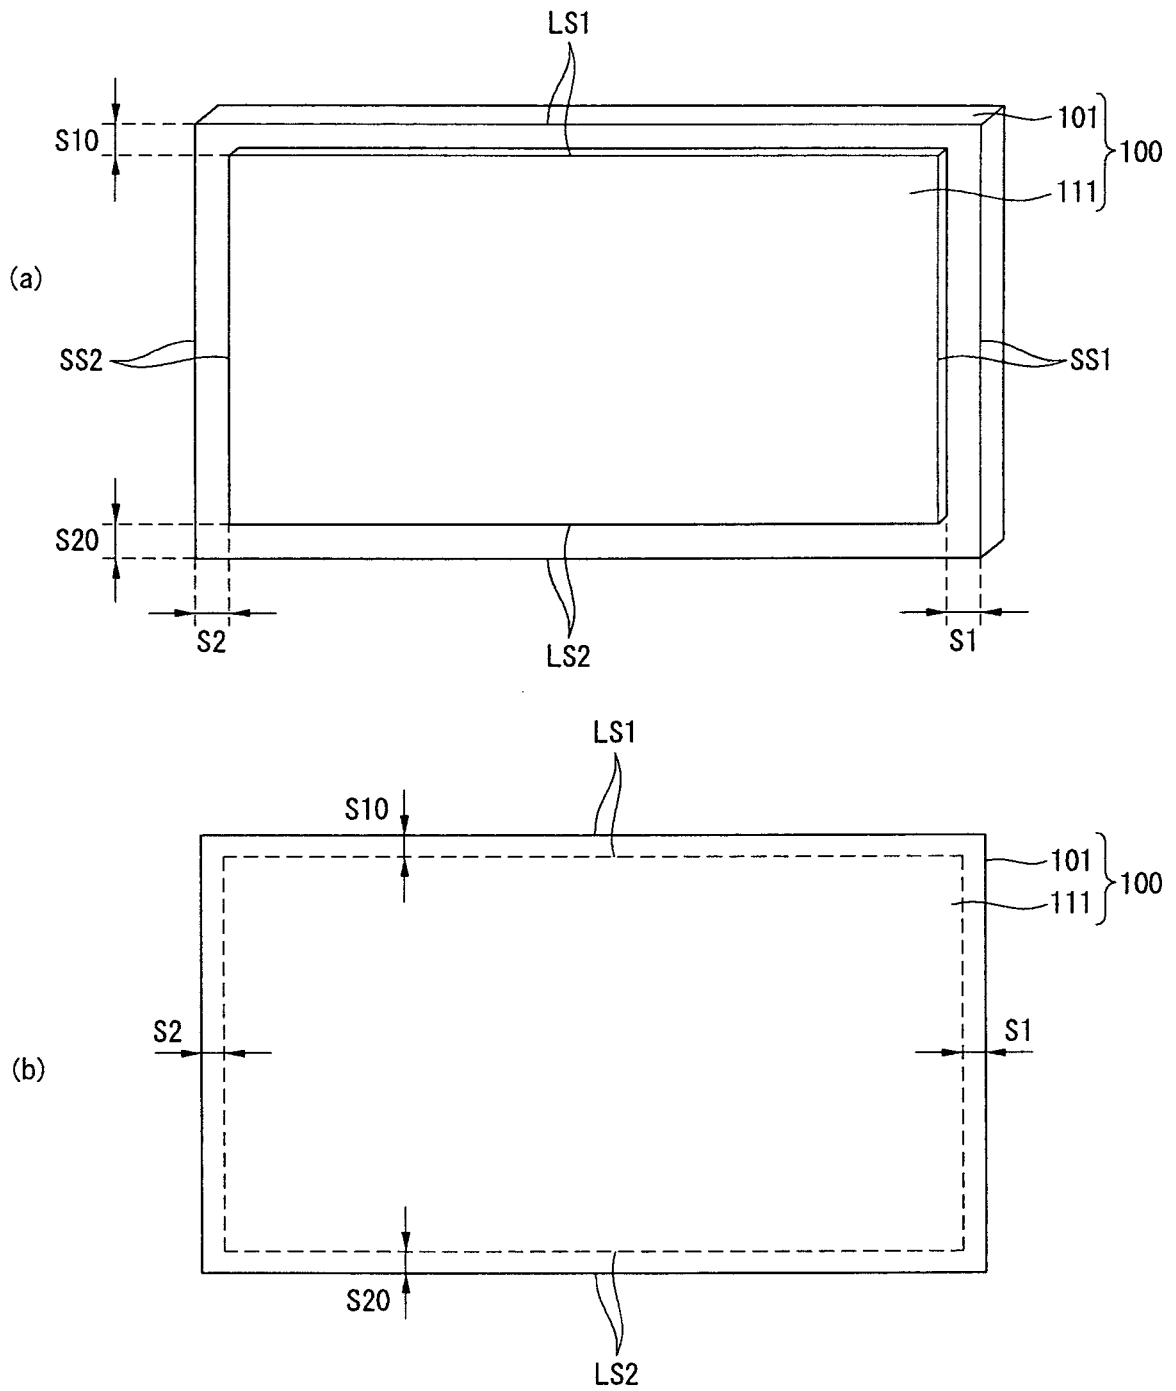


FIG. 20

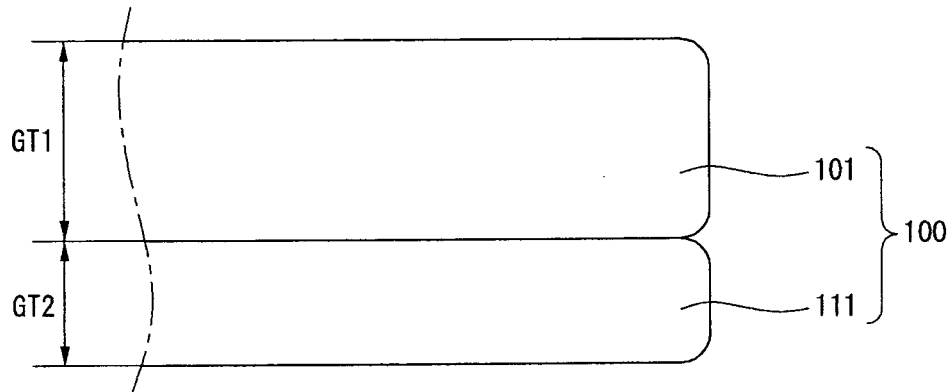


FIG. 21

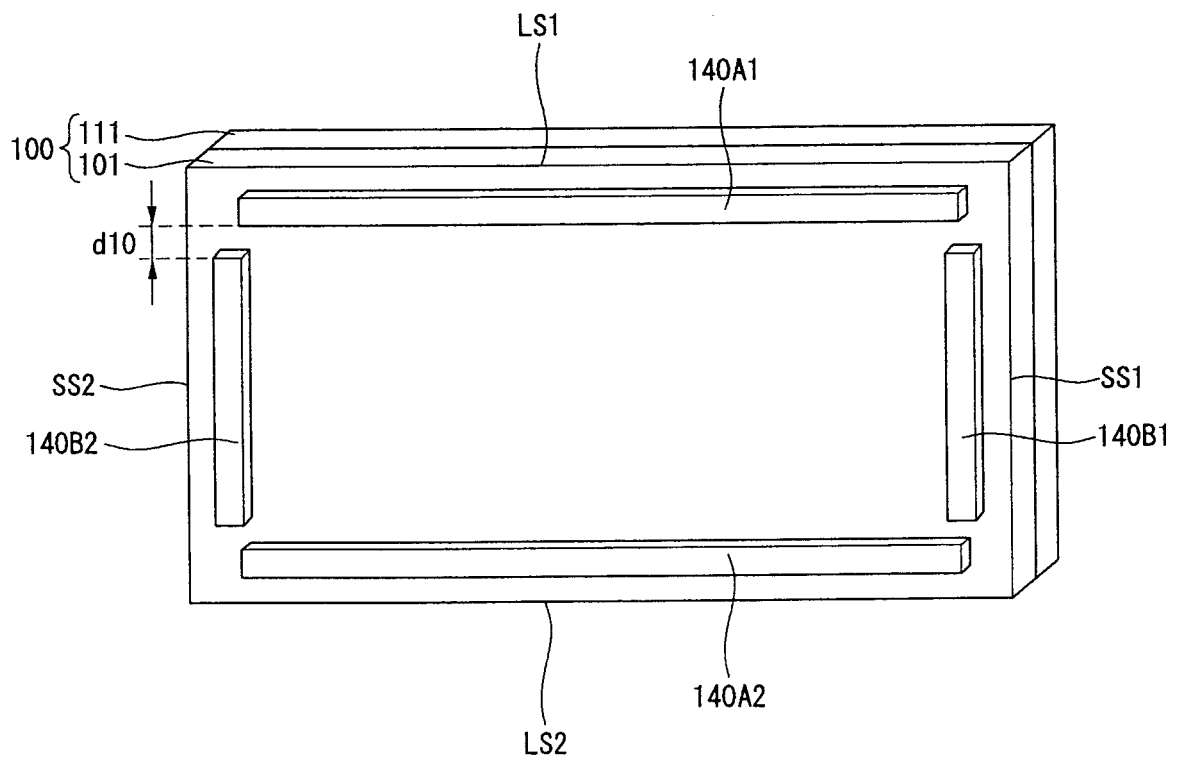


FIG. 22

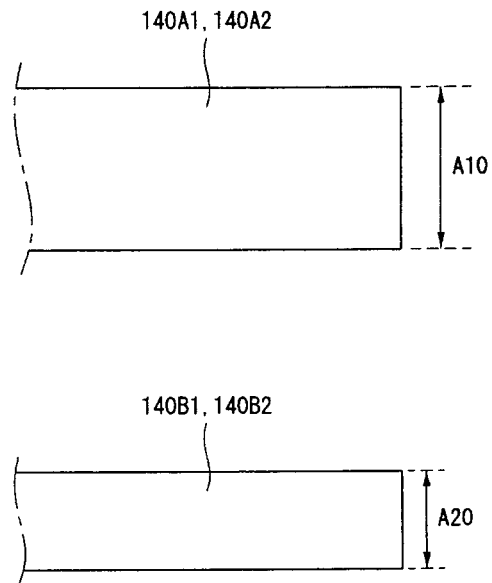


FIG. 23

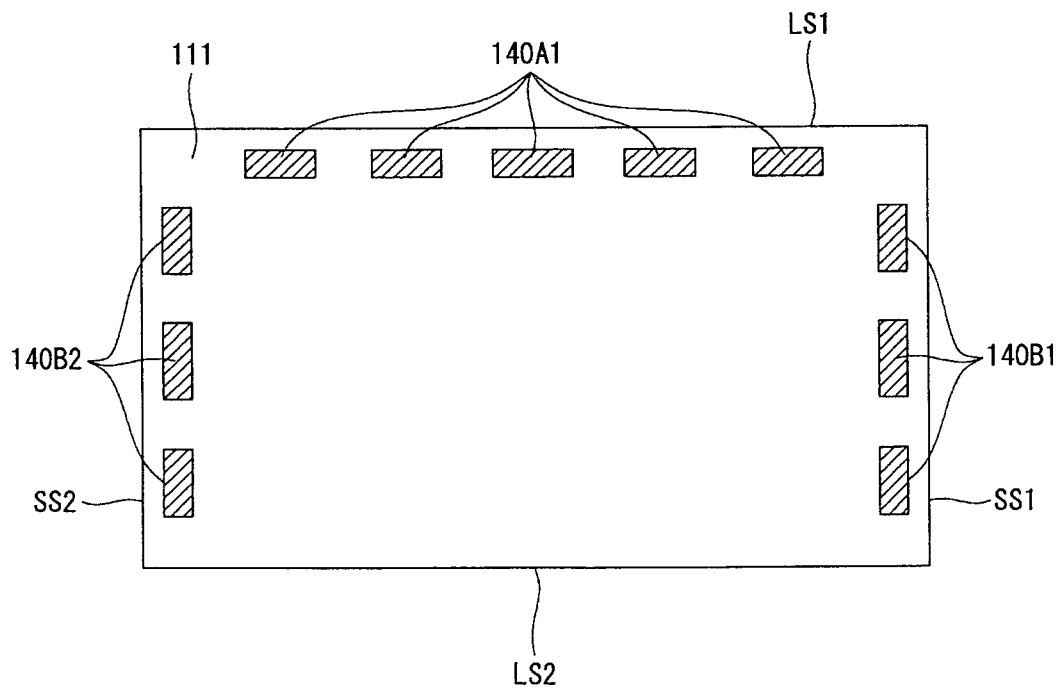


FIG. 24

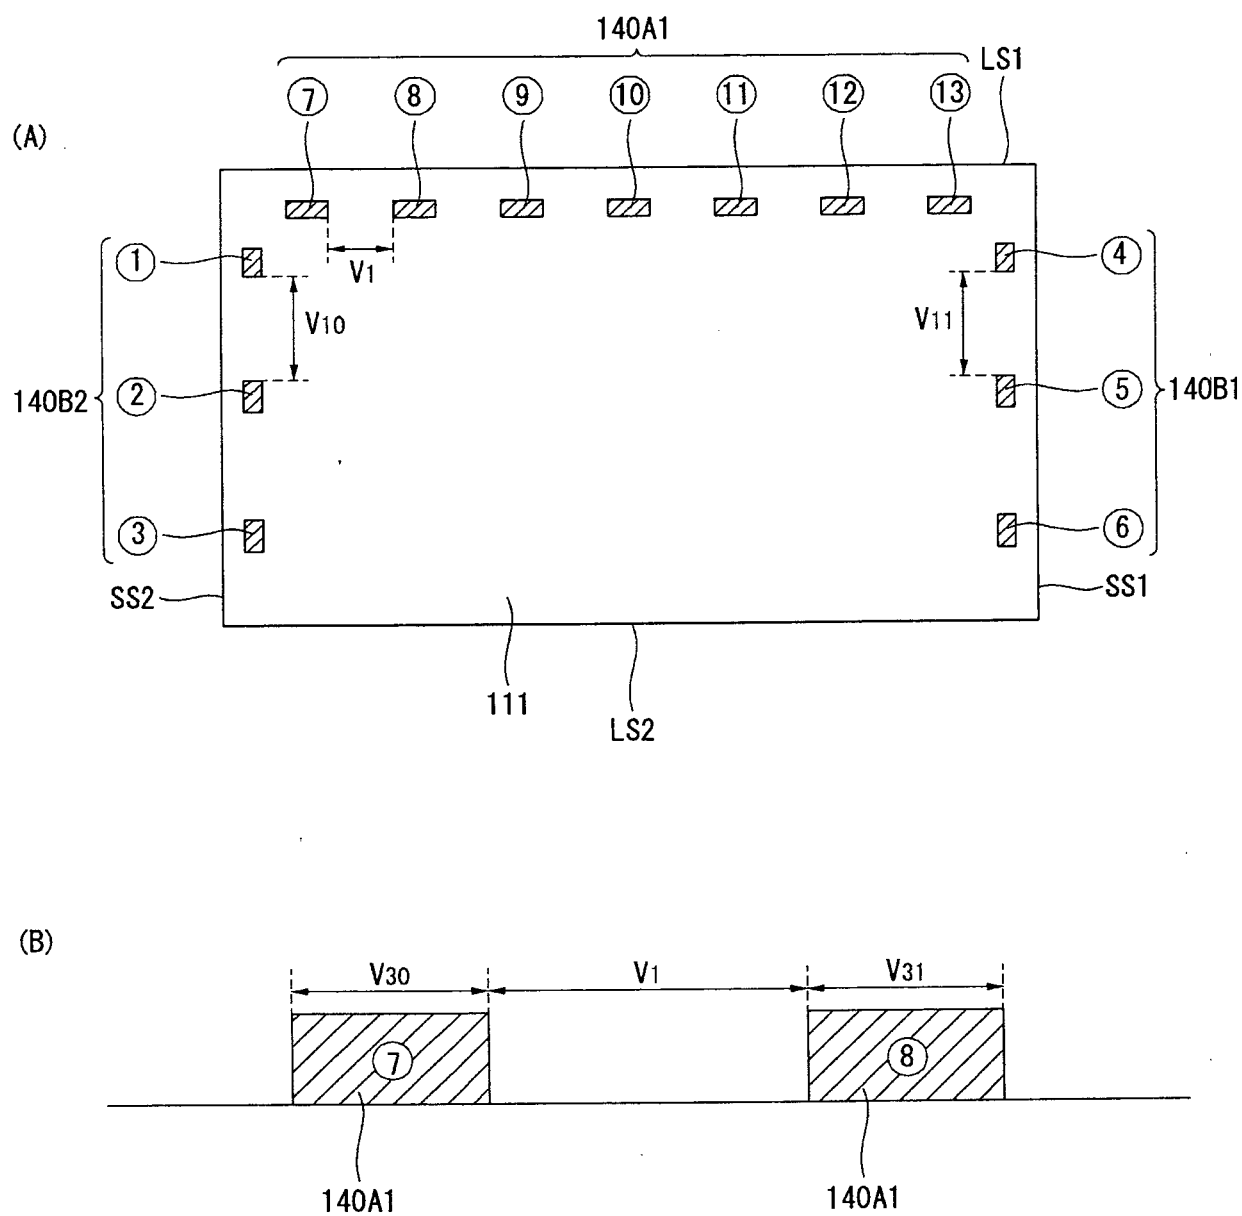


FIG. 25

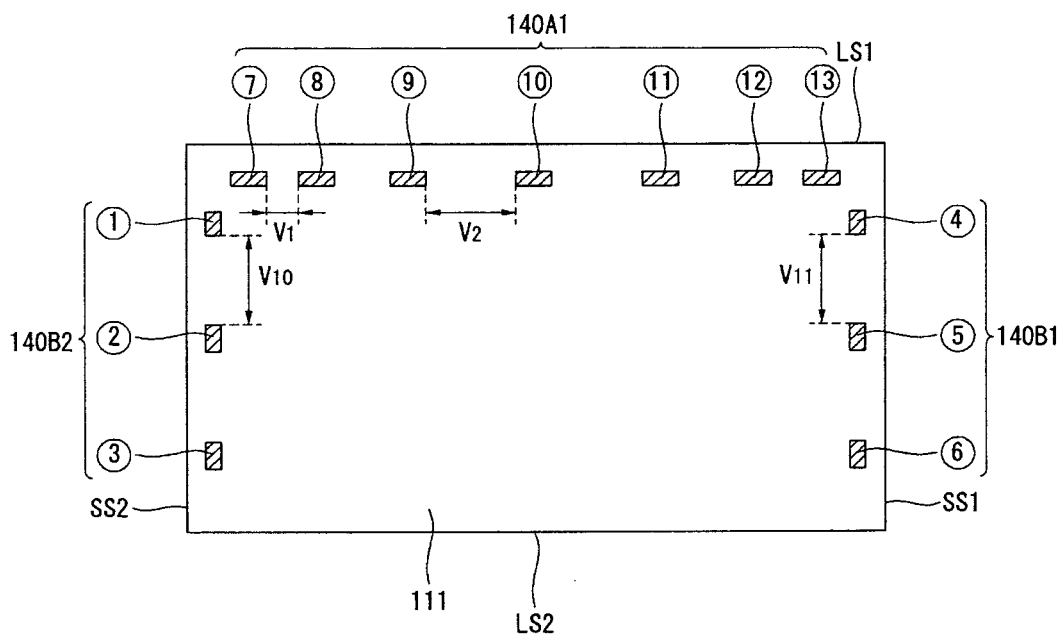


FIG. 26

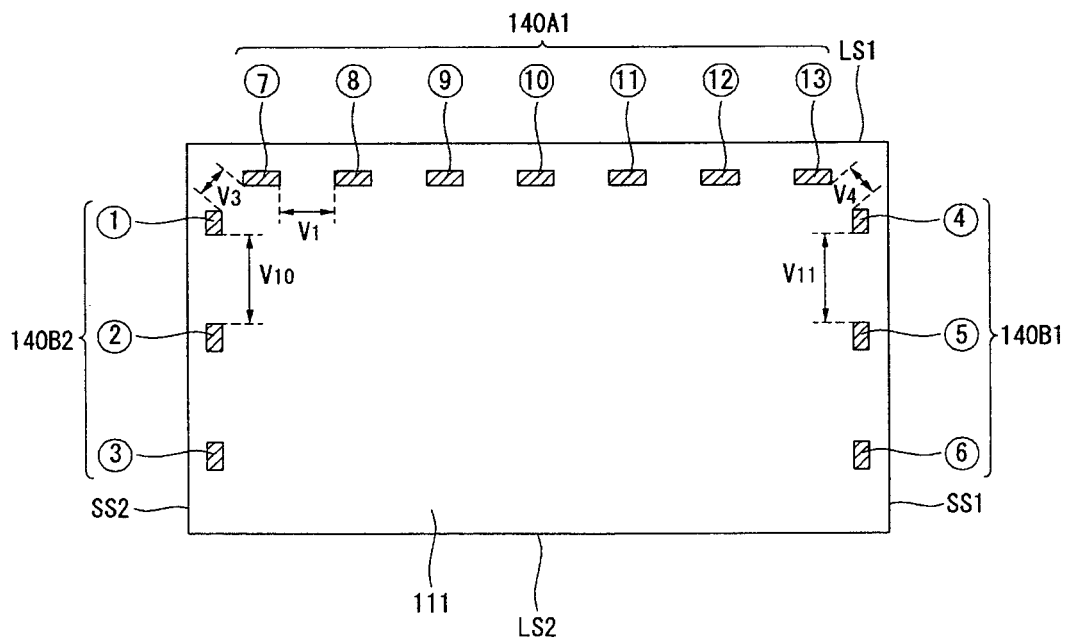


FIG. 27

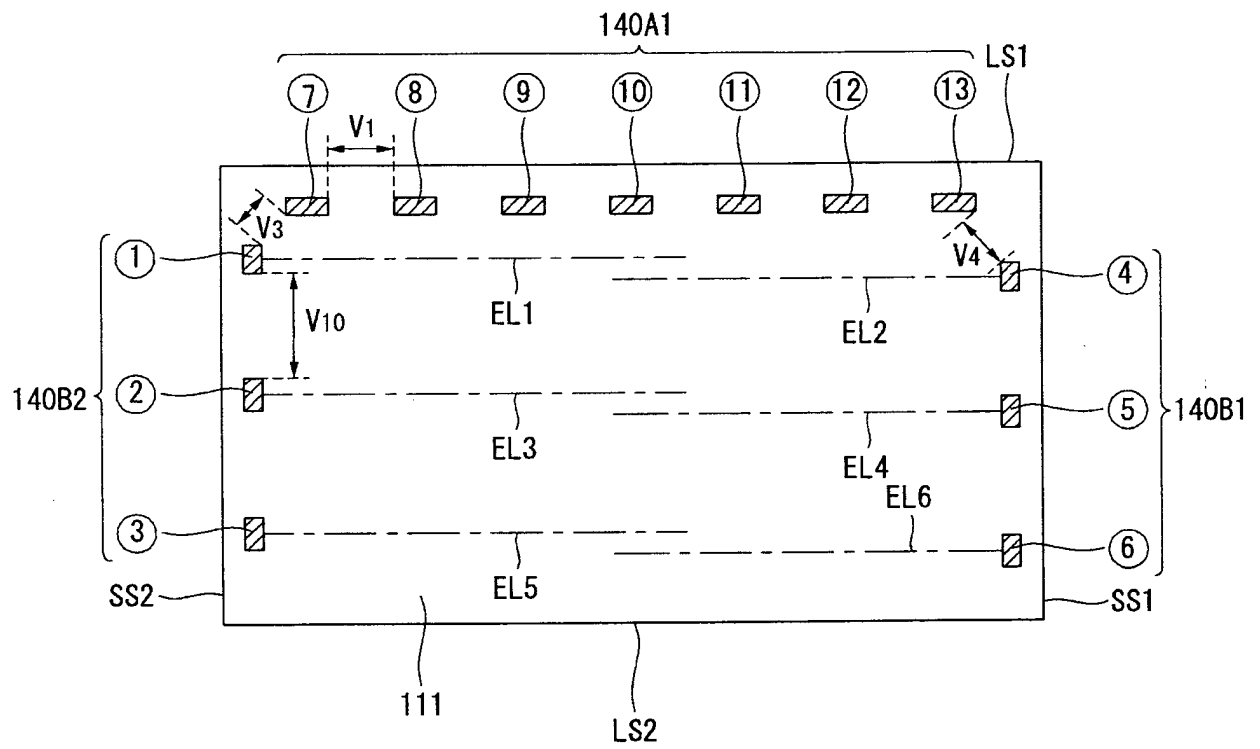


FIG. 28

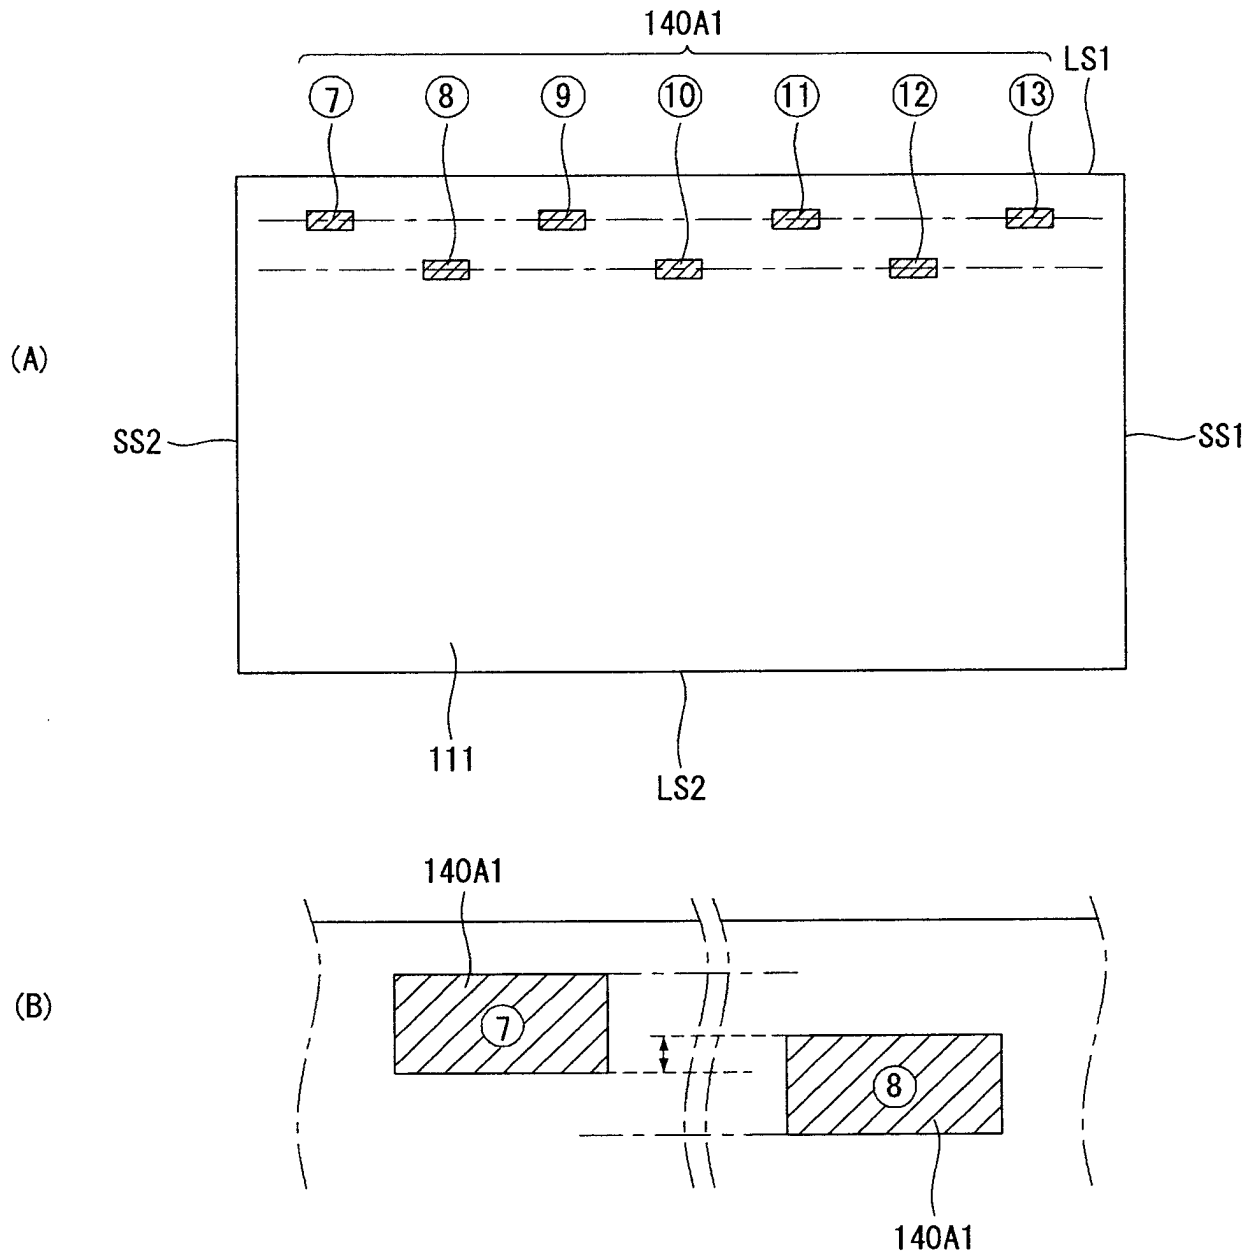


FIG. 29

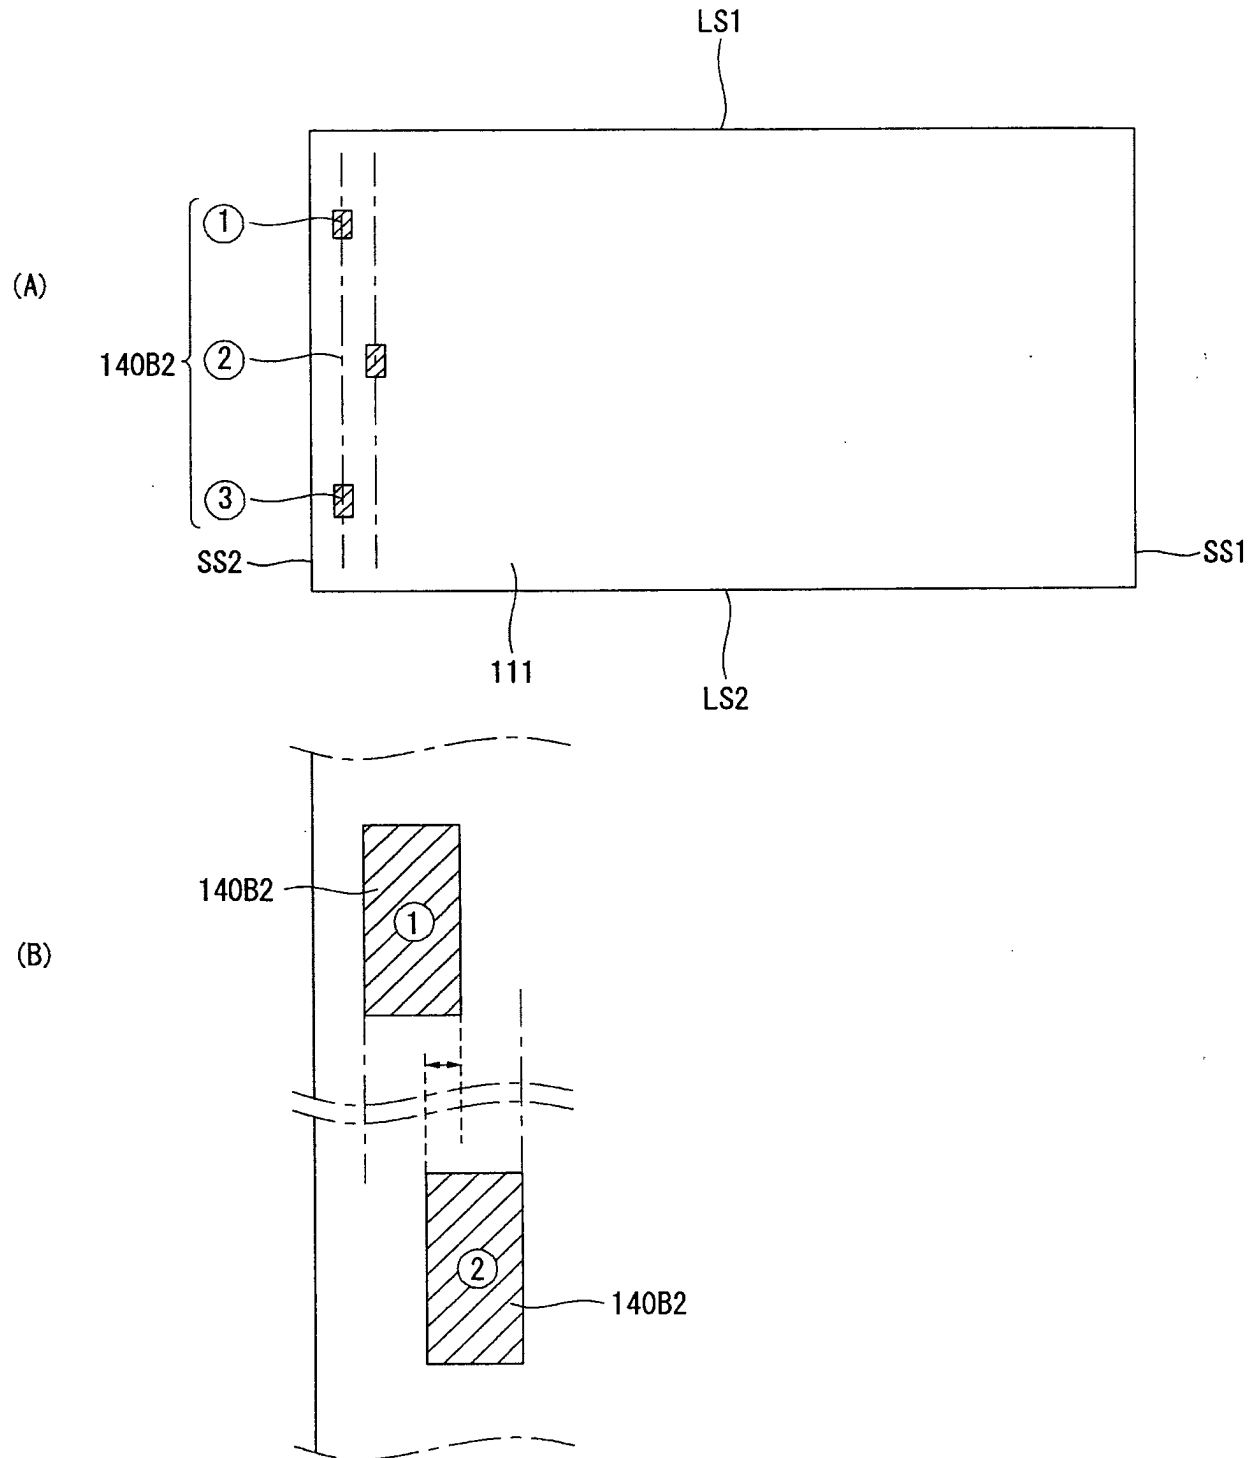


FIG. 30

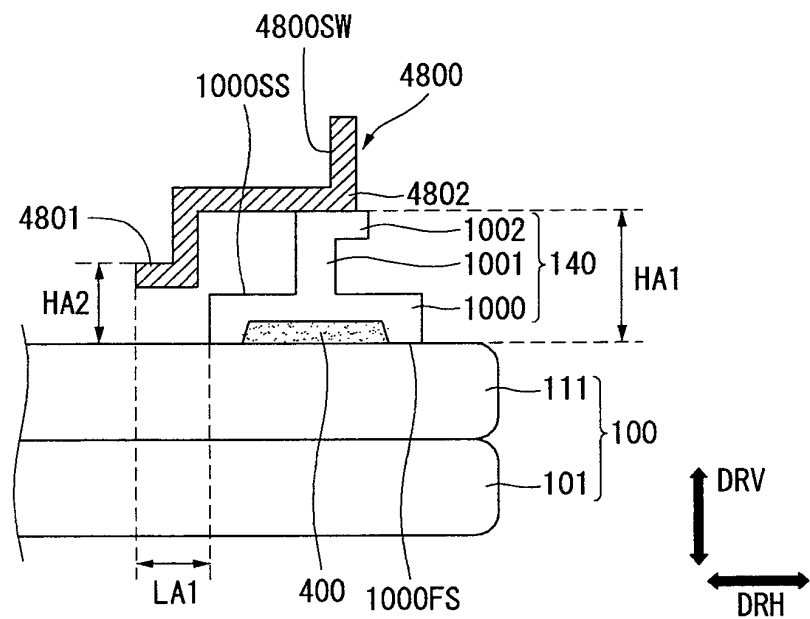


FIG. 31

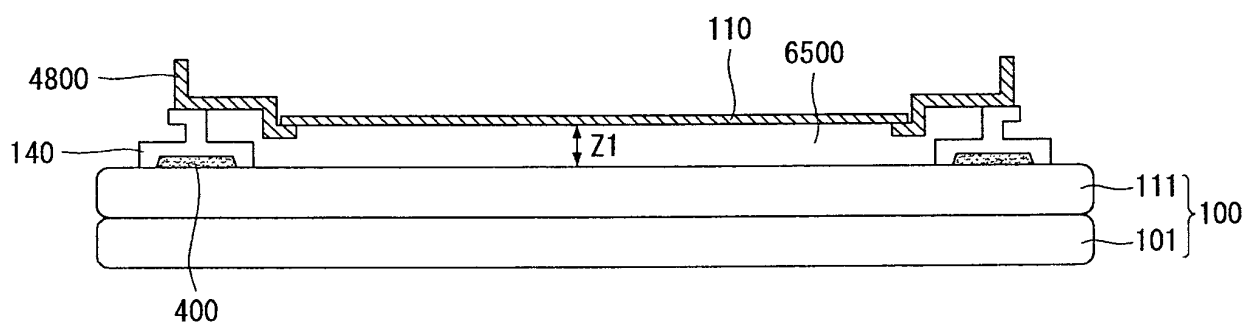


FIG. 32

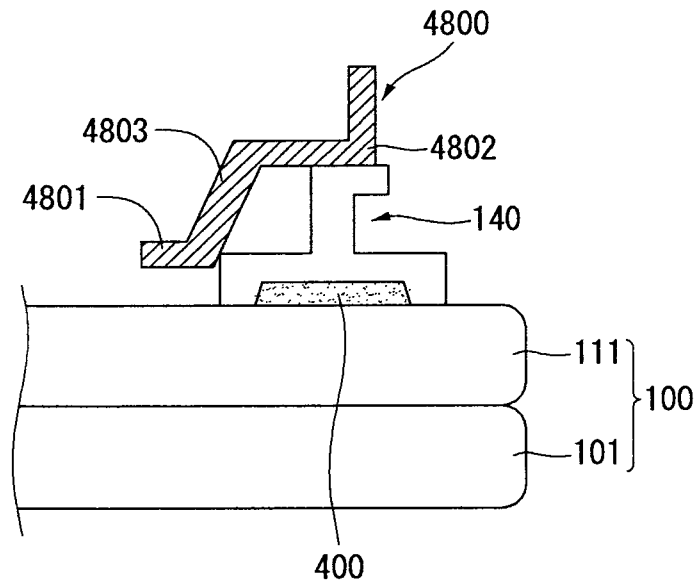


FIG. 33

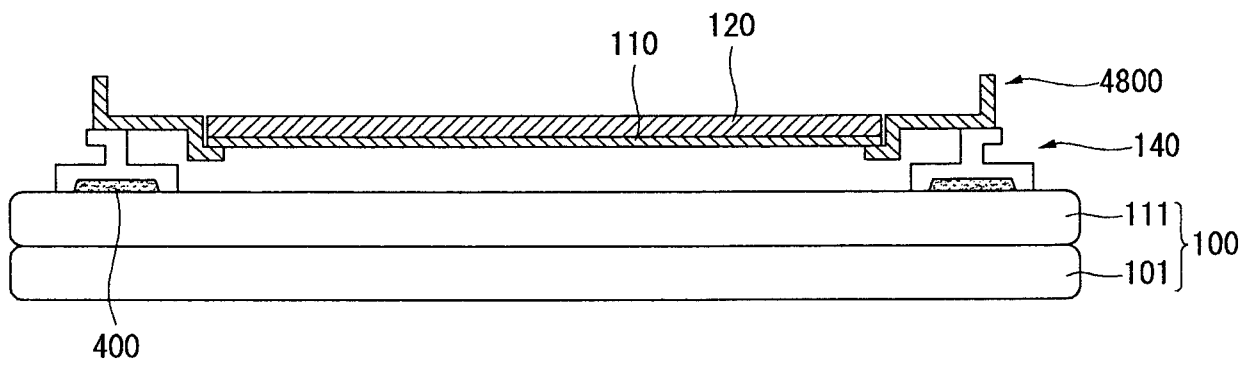


FIG. 34

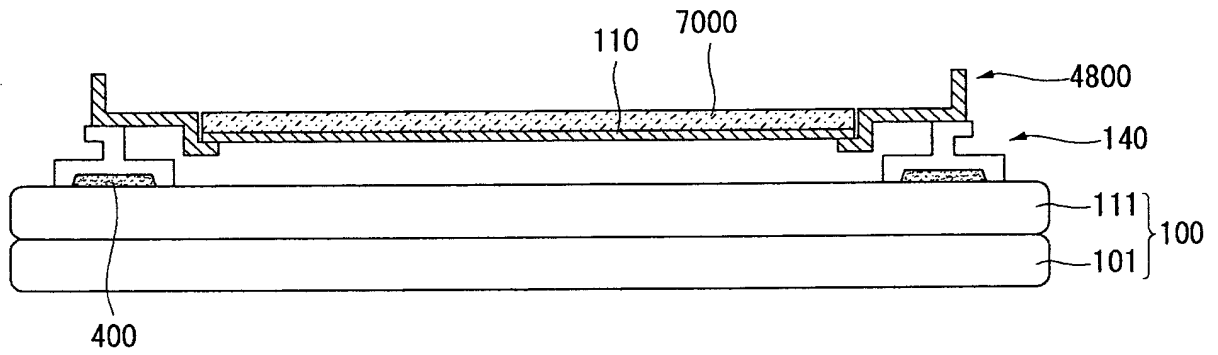


FIG. 35

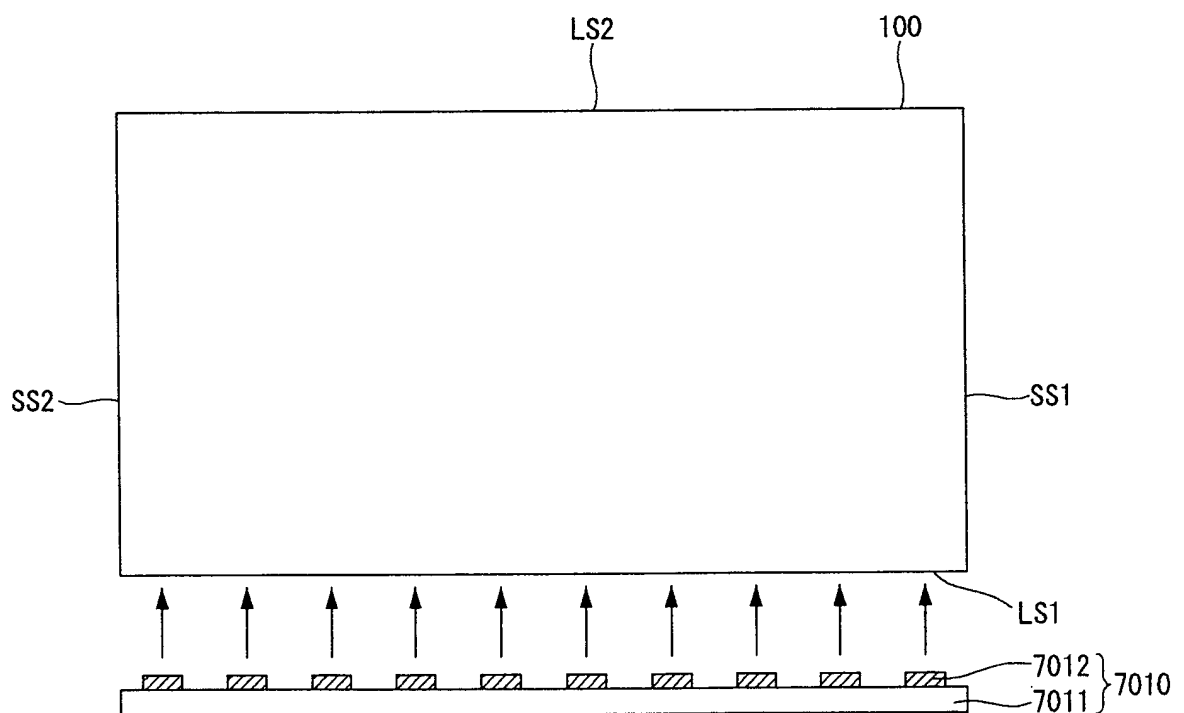


FIG. 36

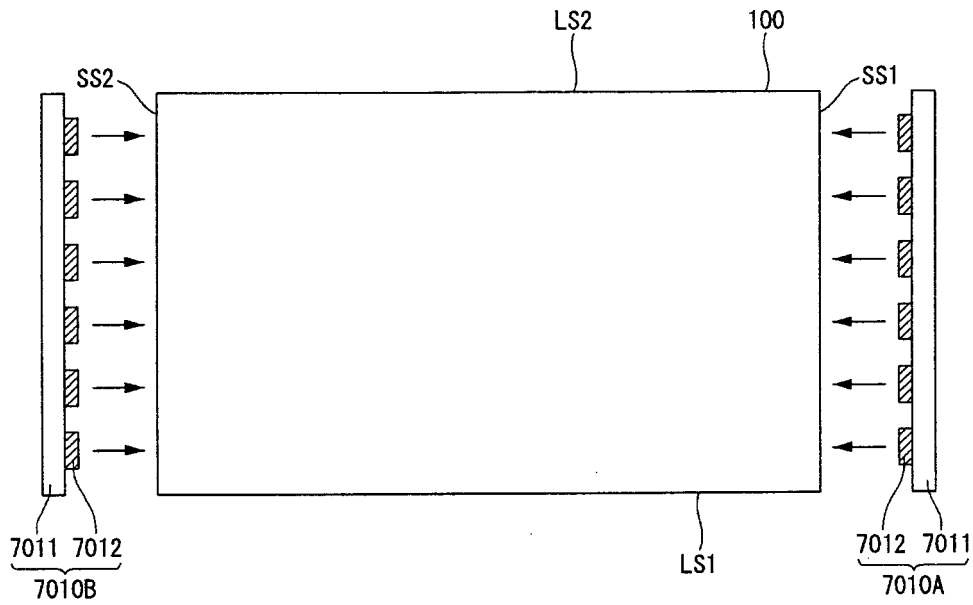


FIG. 37

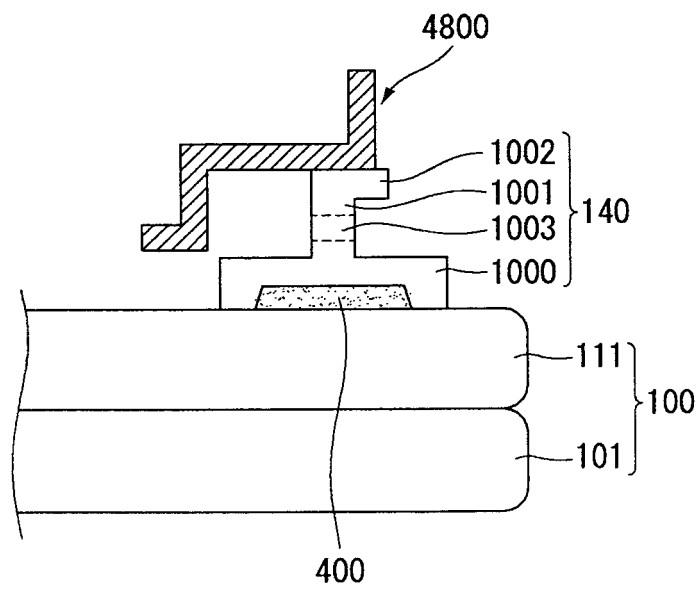


FIG. 38

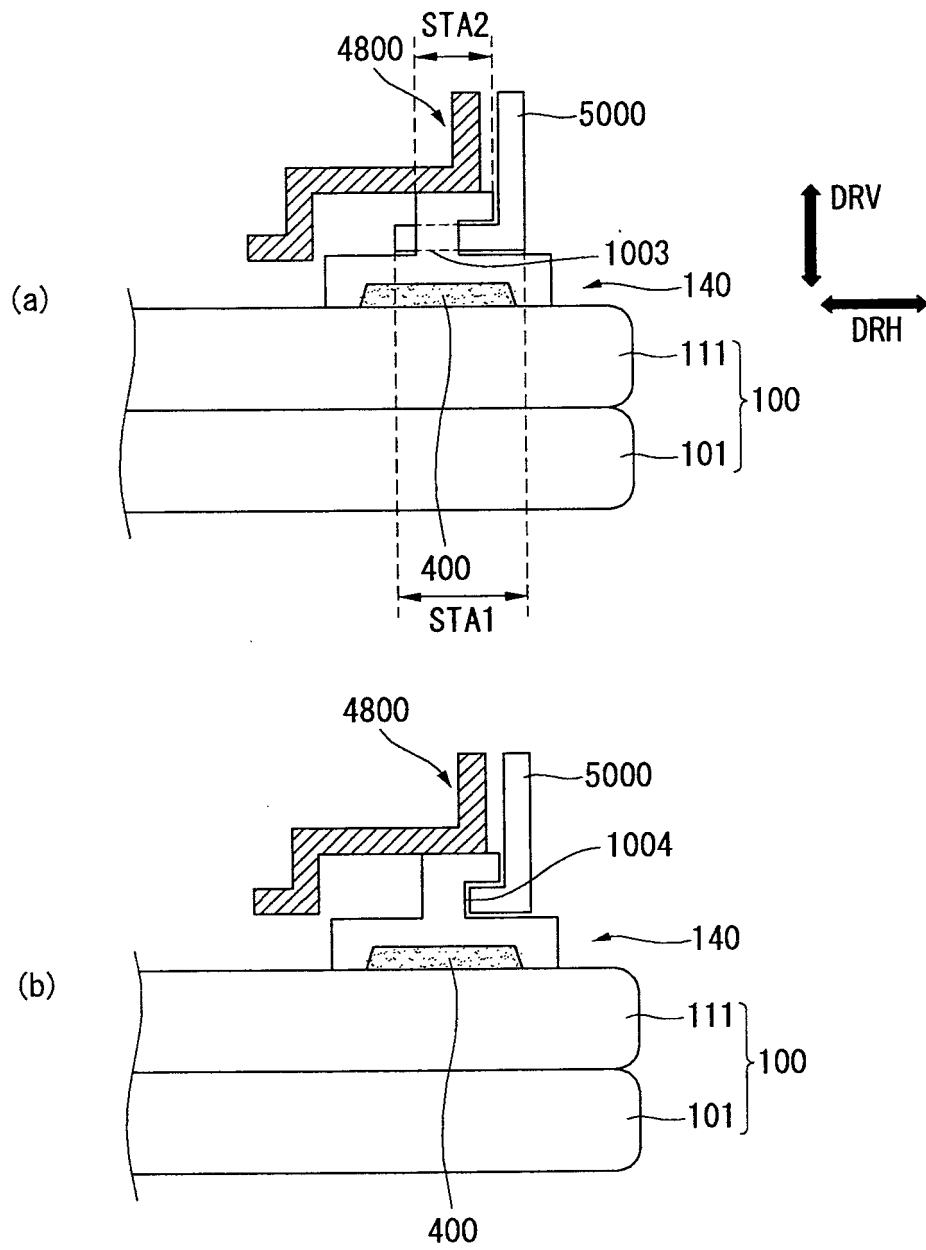


FIG. 39

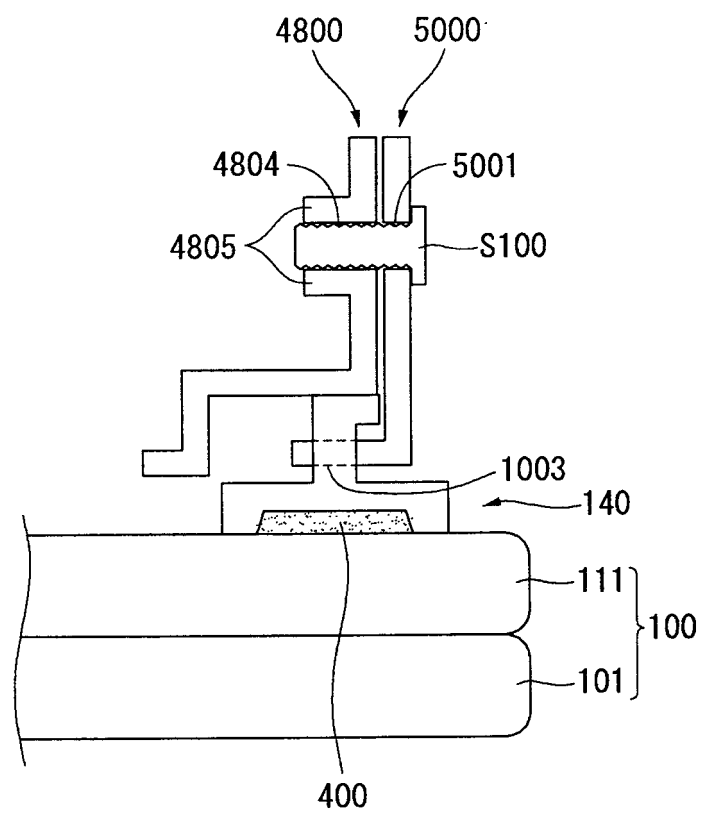


FIG. 40

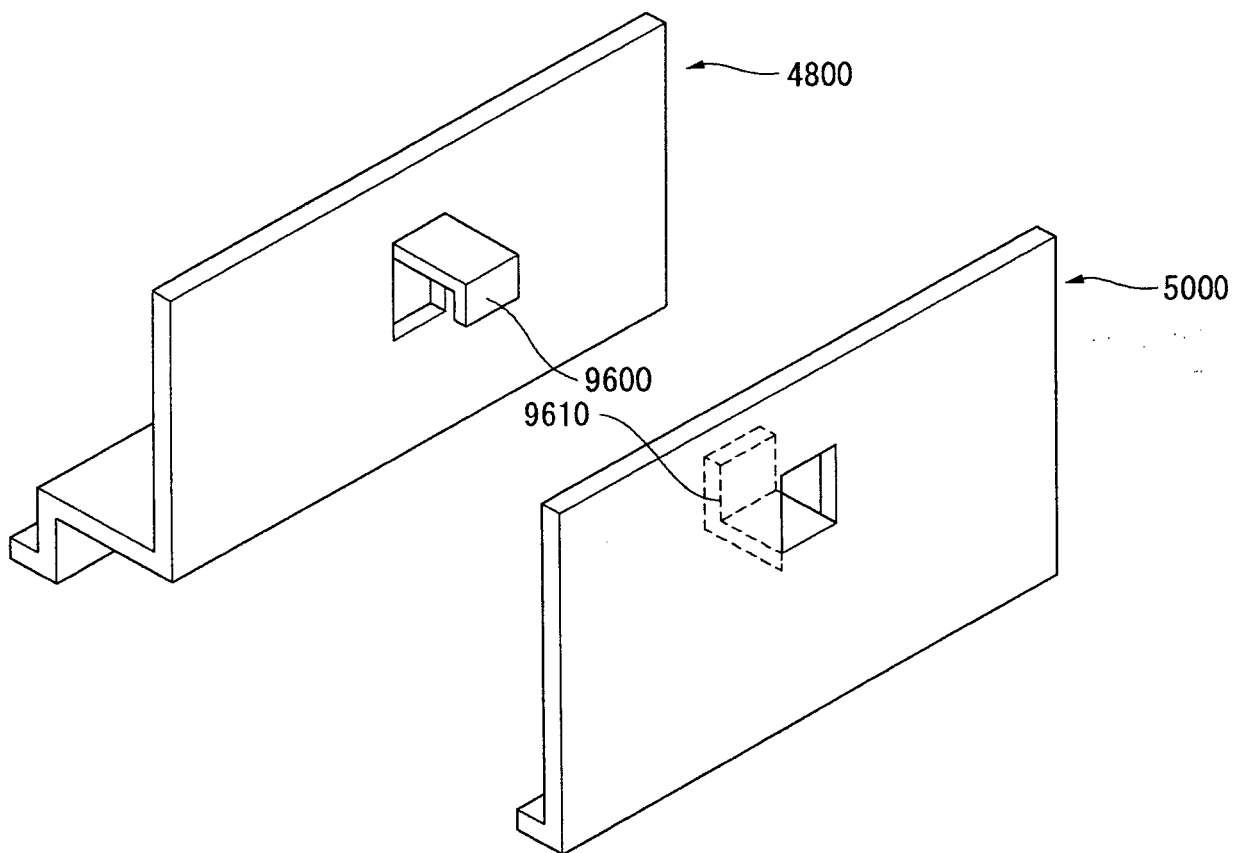


FIG. 41

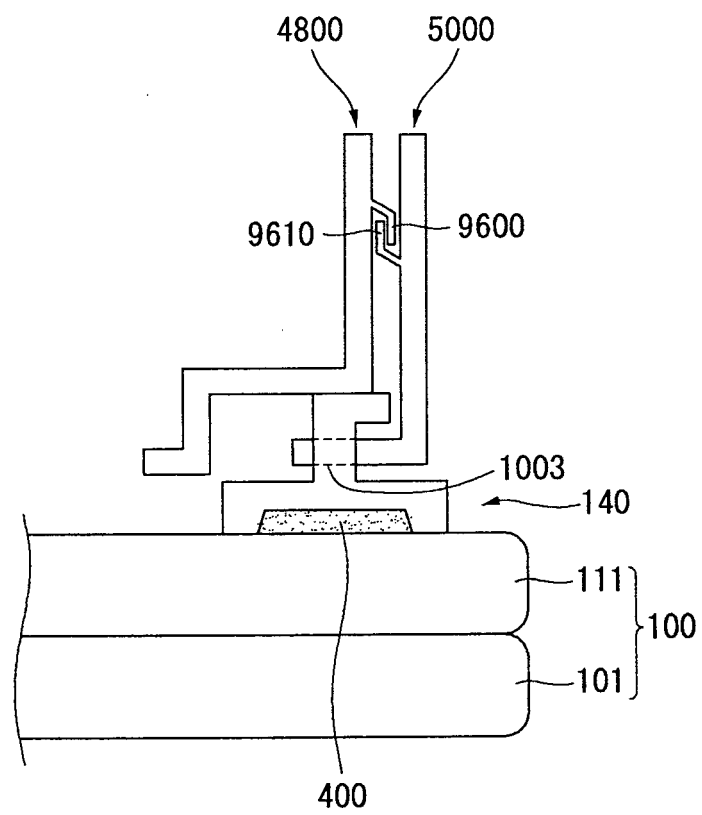


FIG. 42

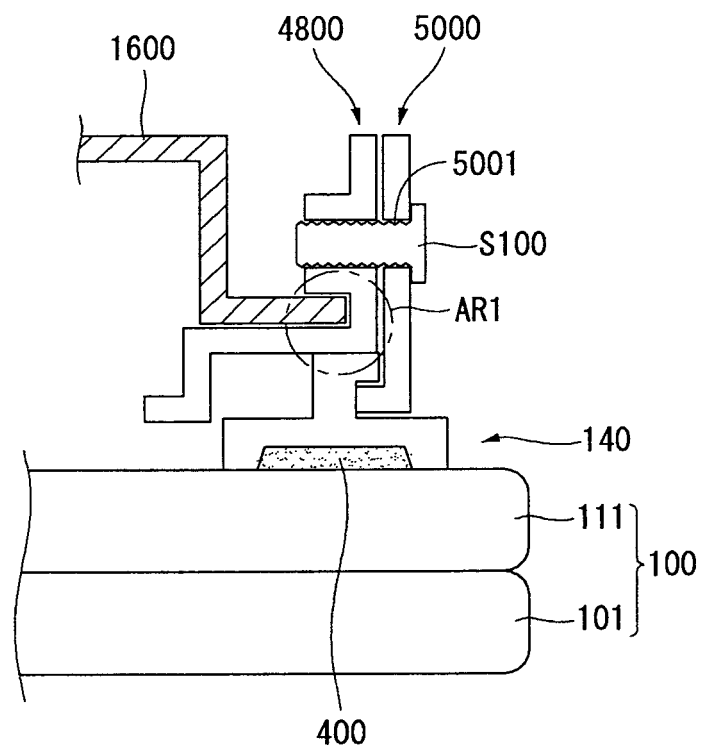


FIG. 43

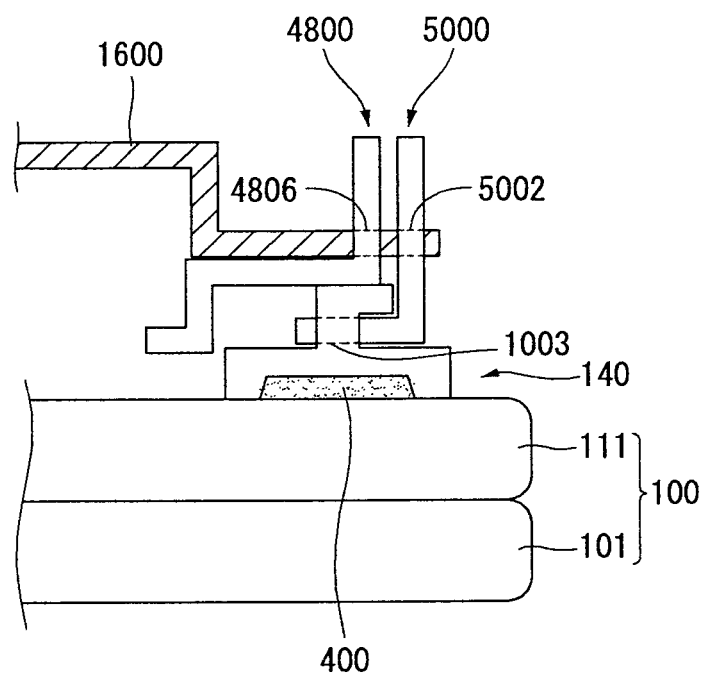


FIG. 44

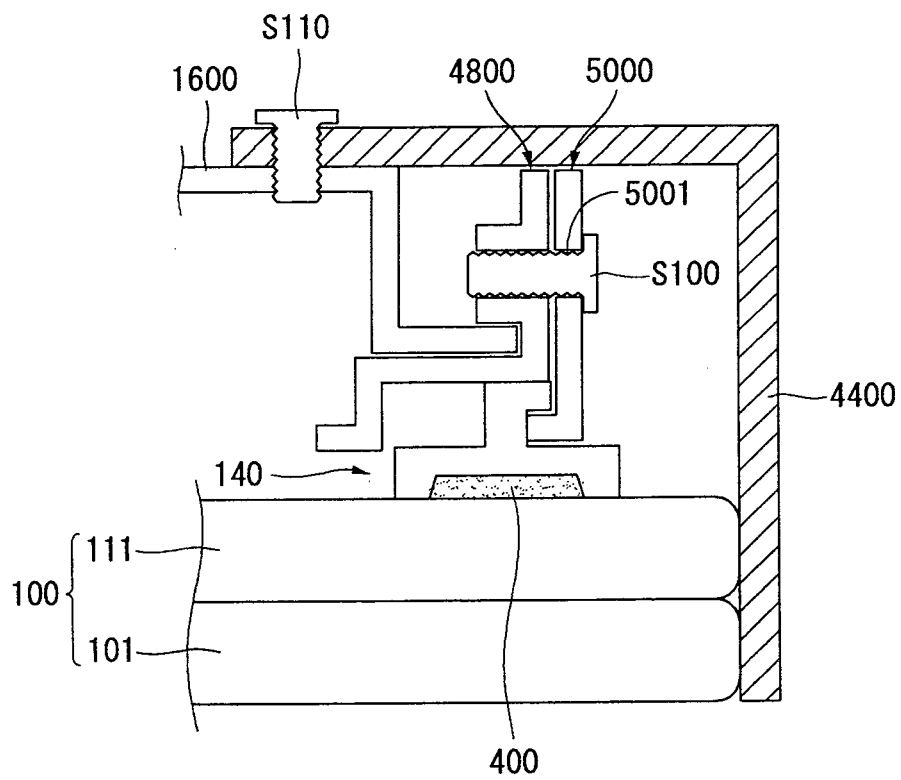


FIG. 45

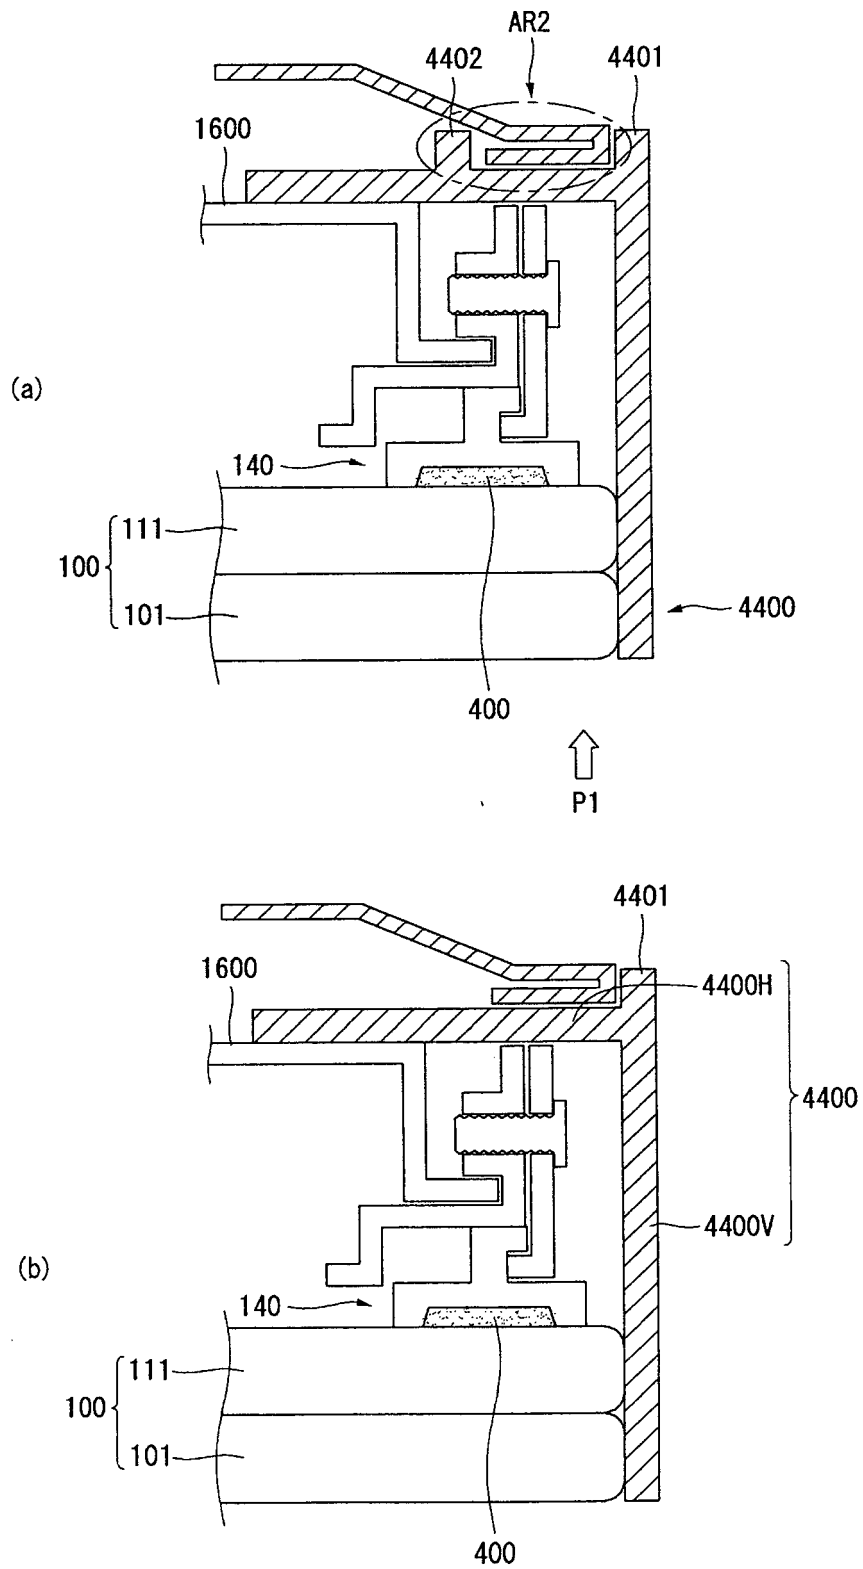


FIG. 46

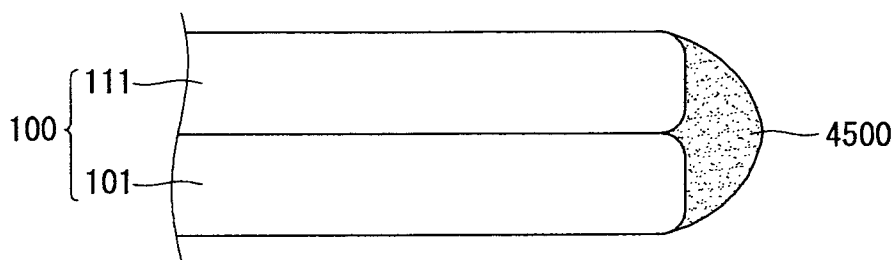


FIG. 47

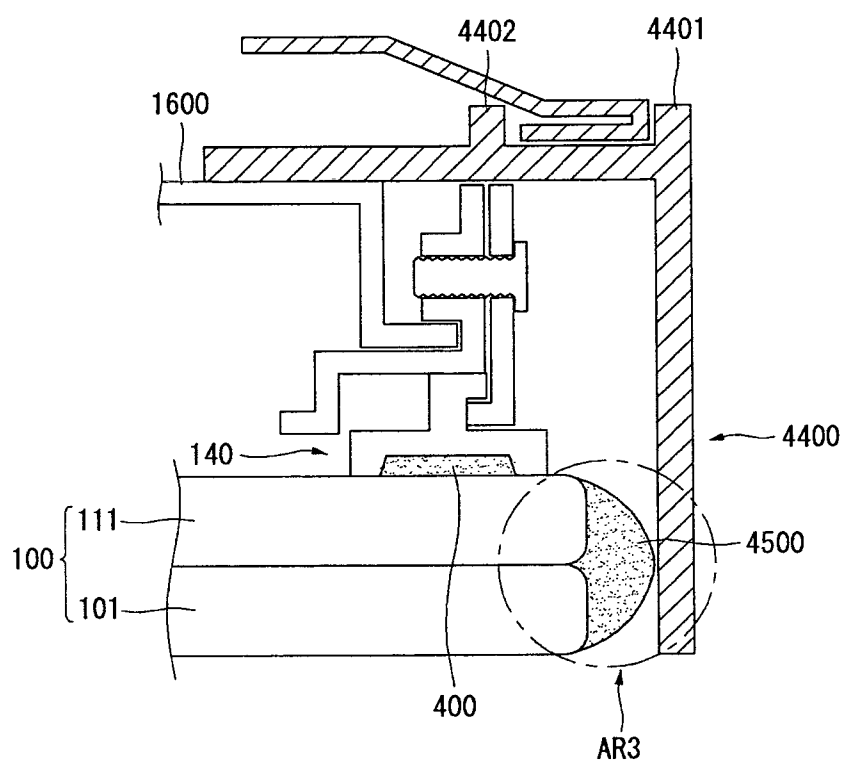


FIG. 48

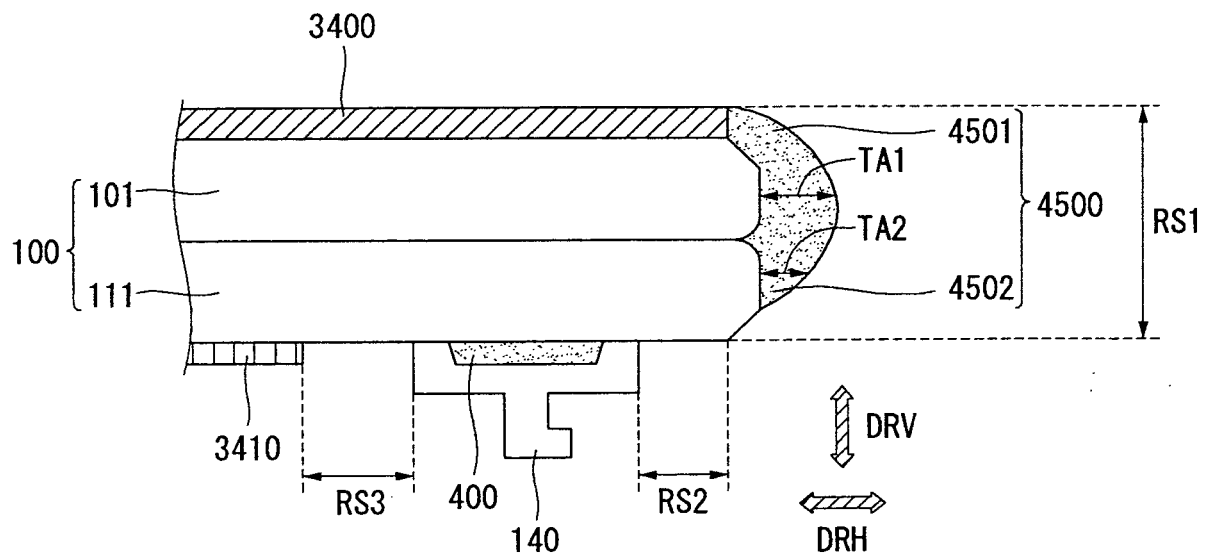


FIG. 49

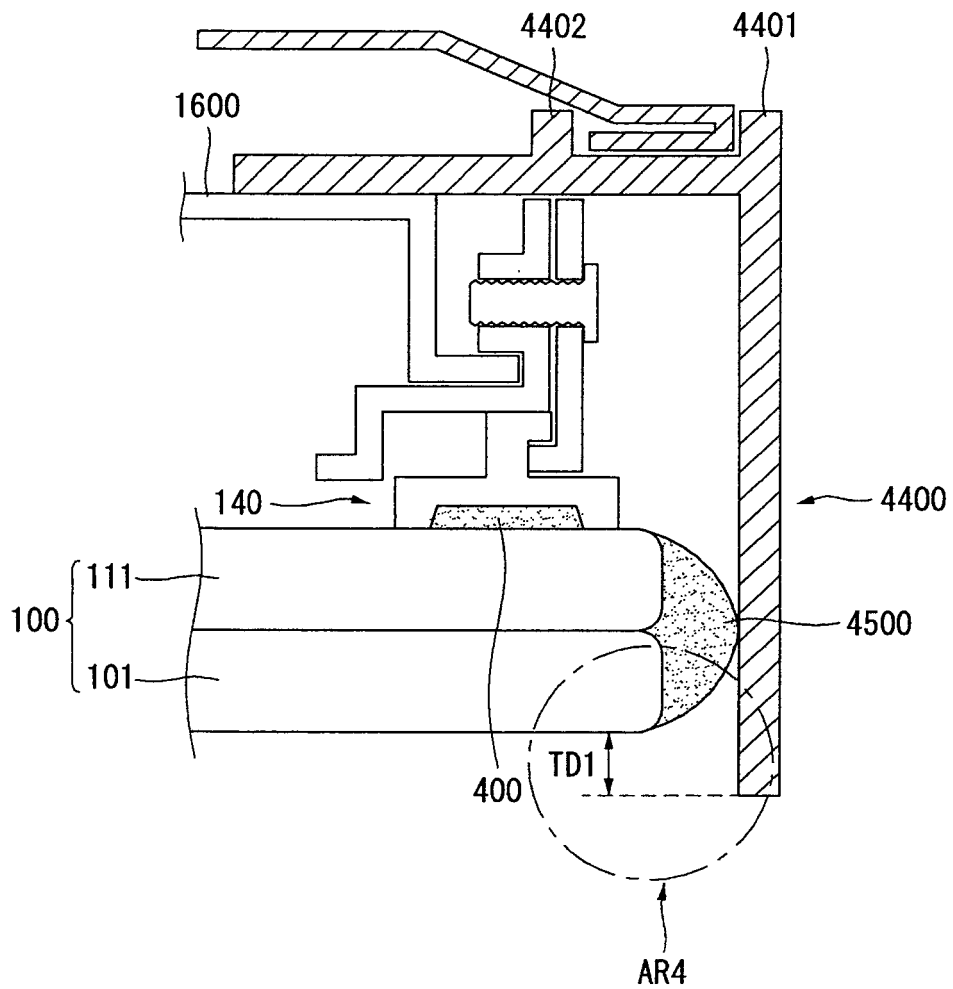


FIG. 50

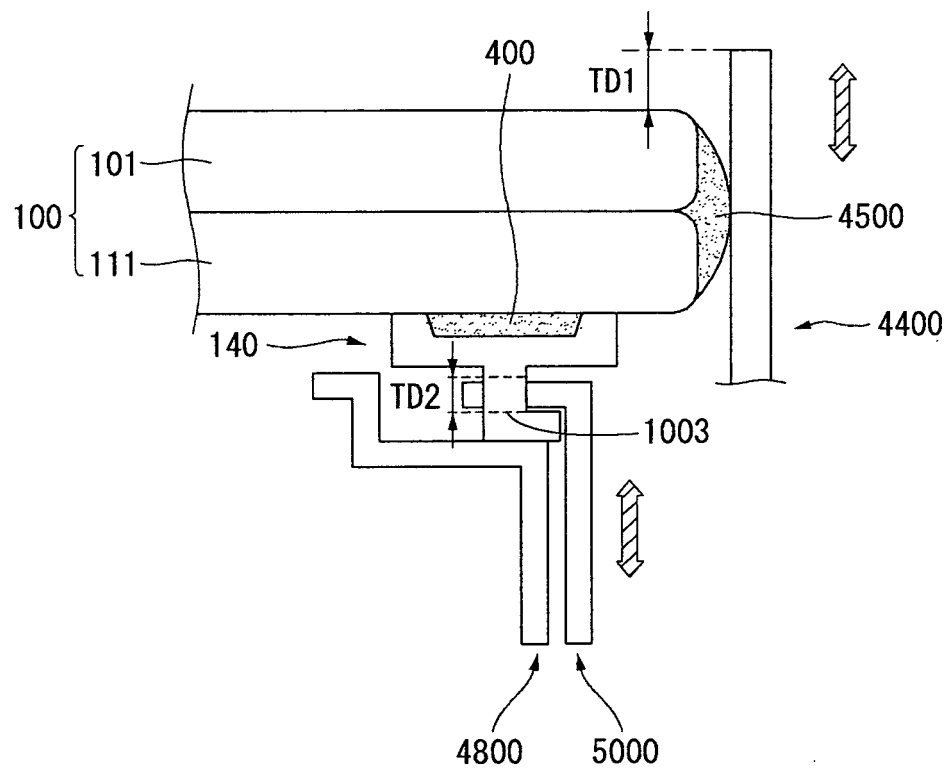


FIG. 51

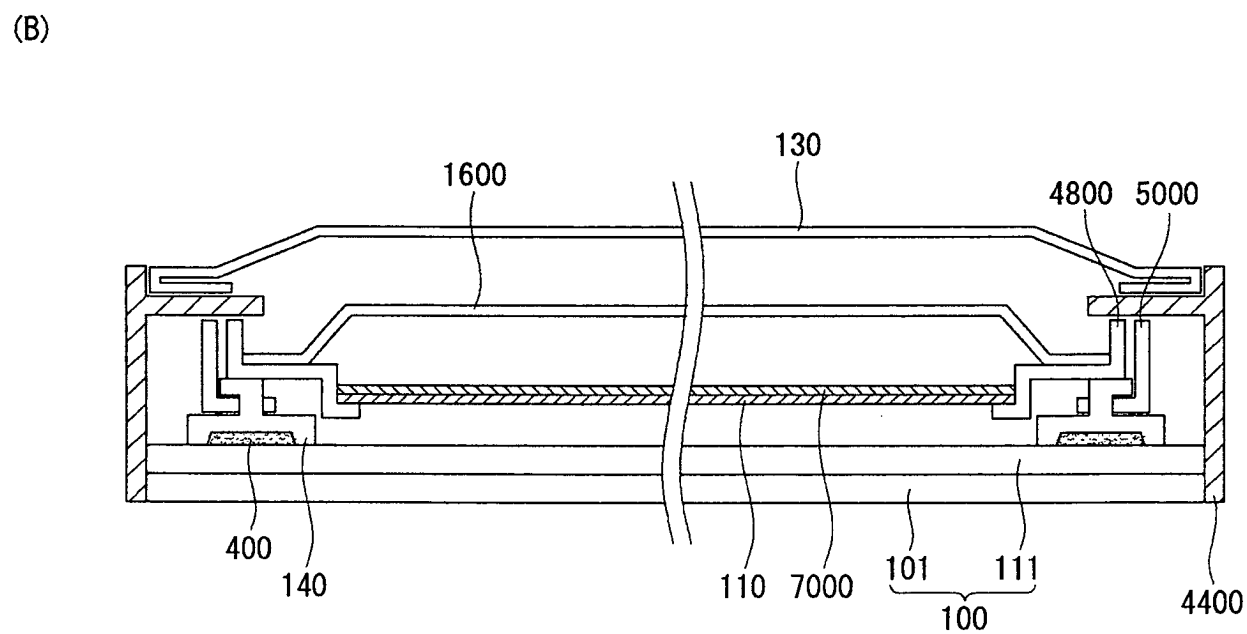
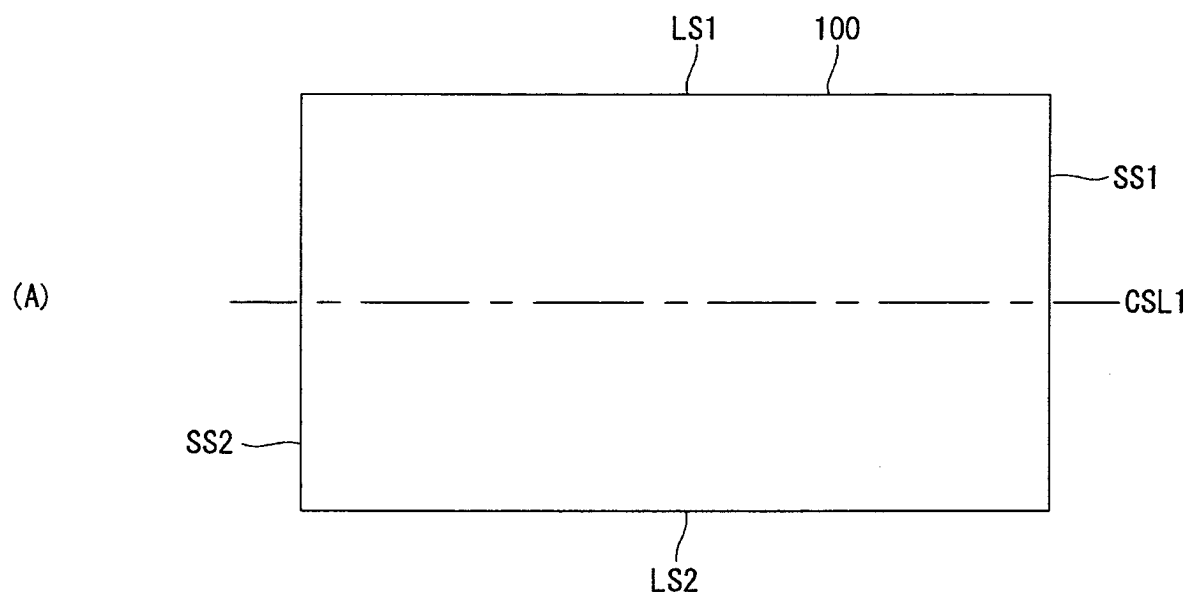


FIG. 52

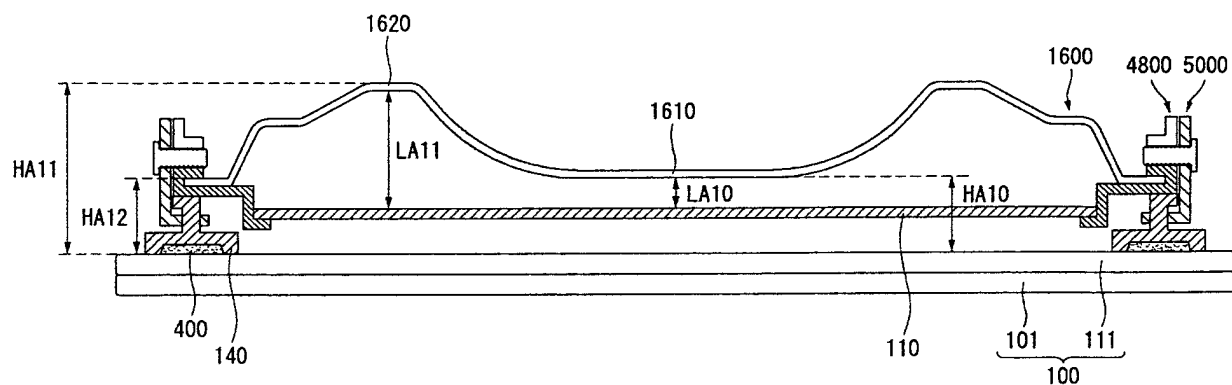


FIG. 53

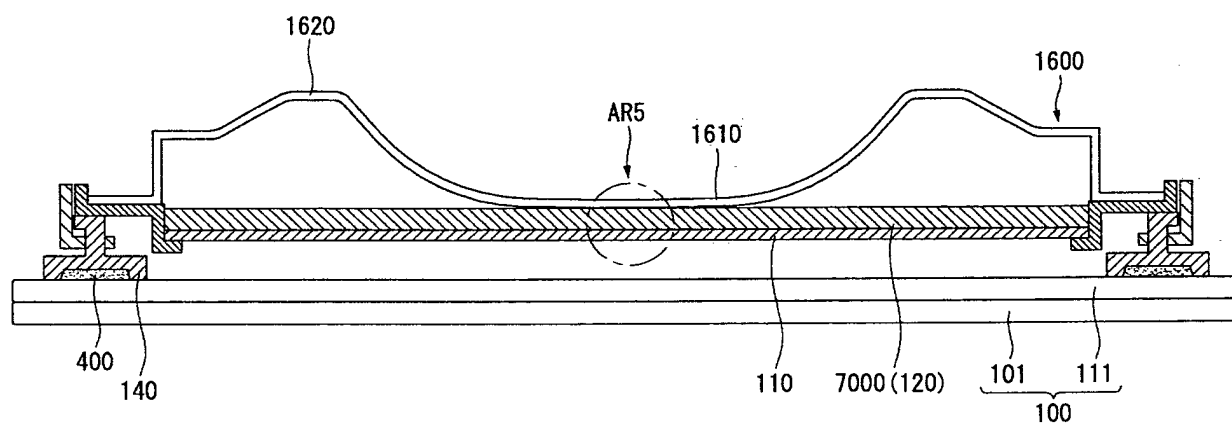


FIG. 54

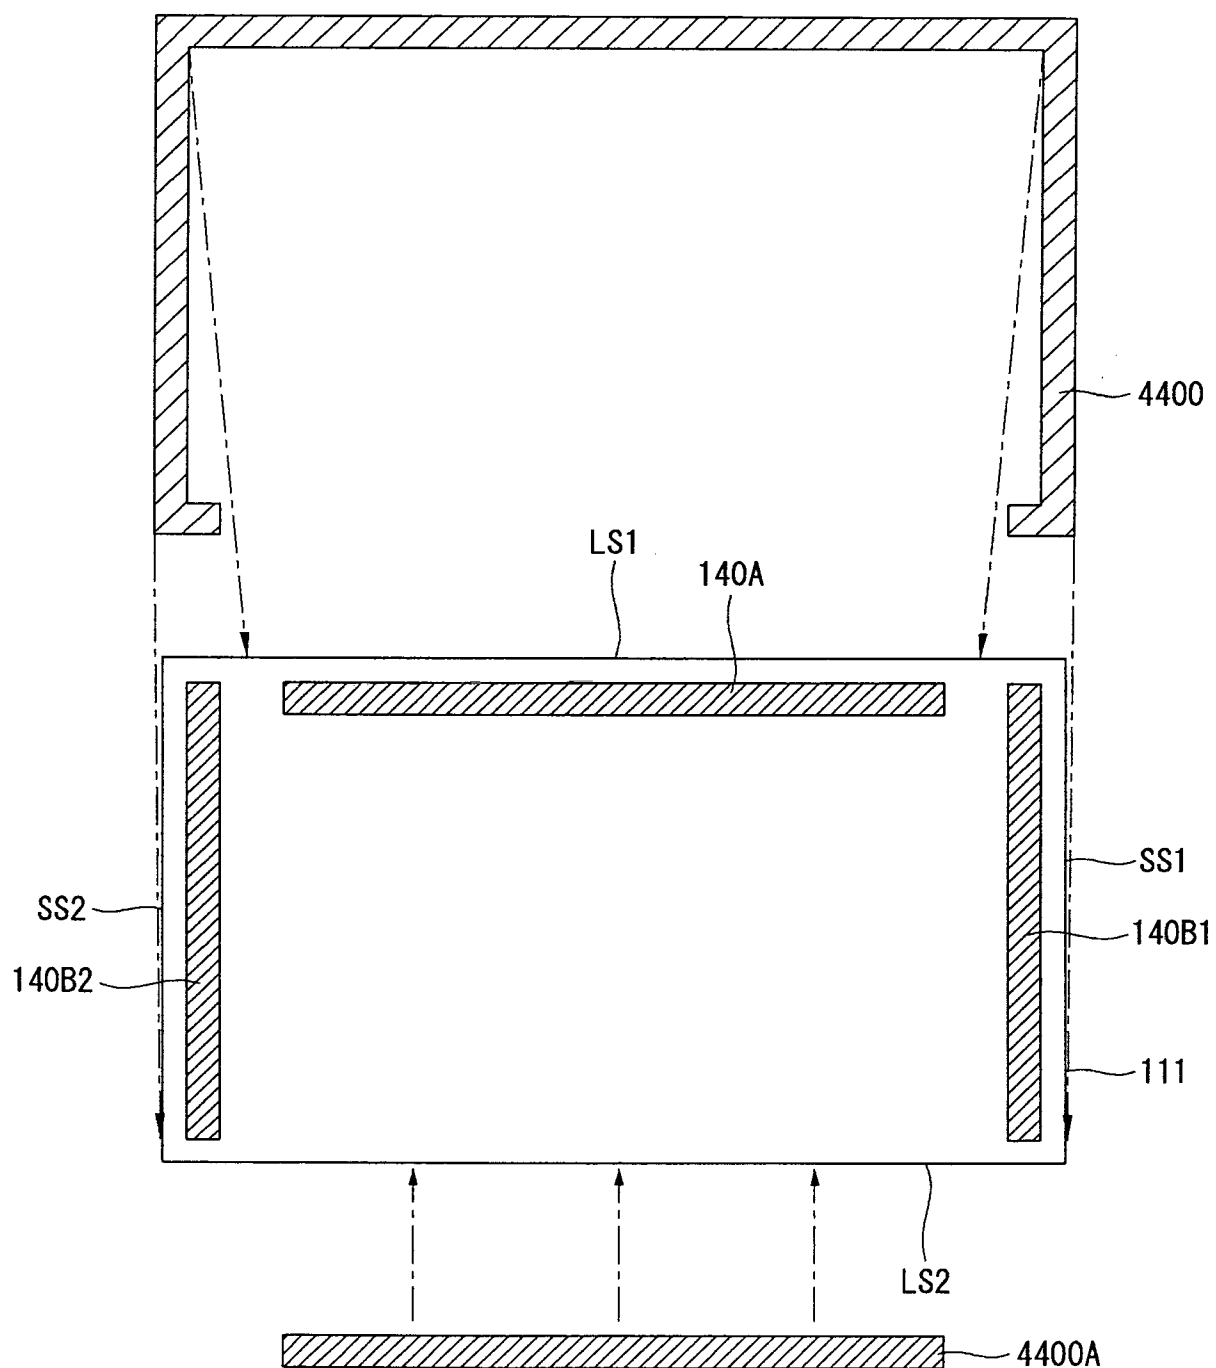


FIG. 55

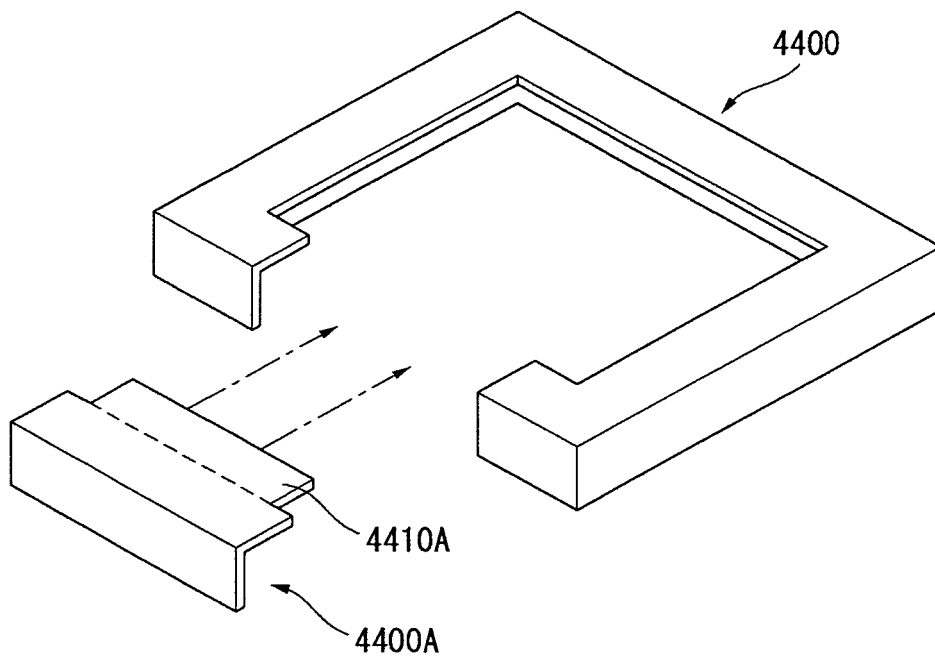


FIG. 56

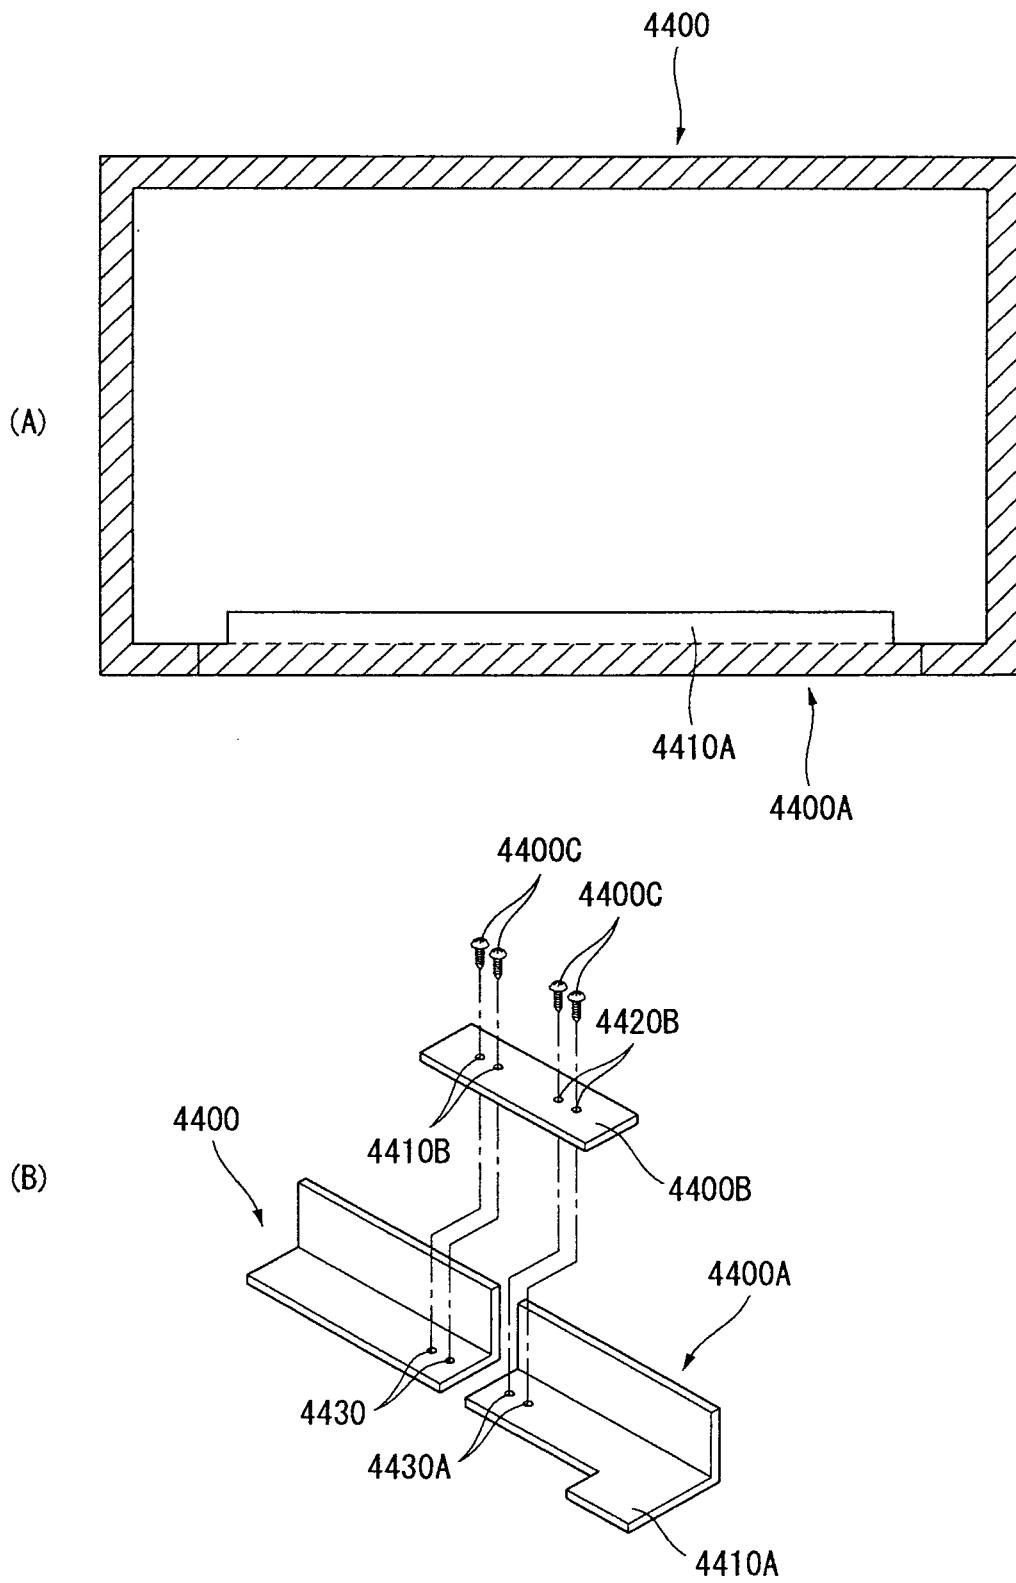


FIG. 57

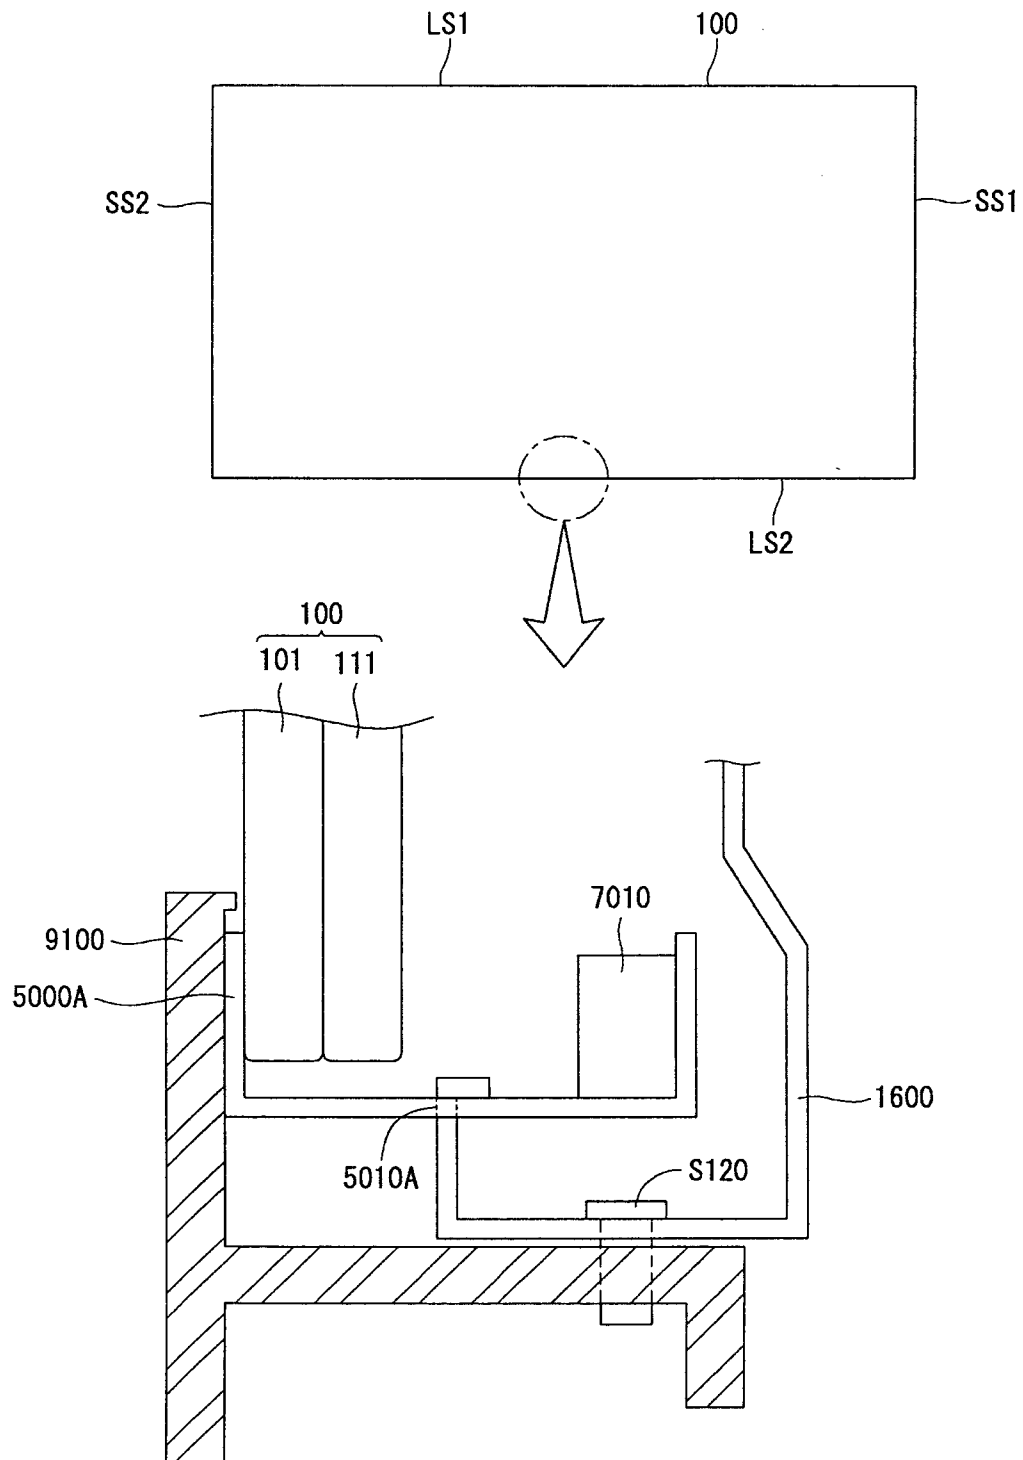


FIG. 58

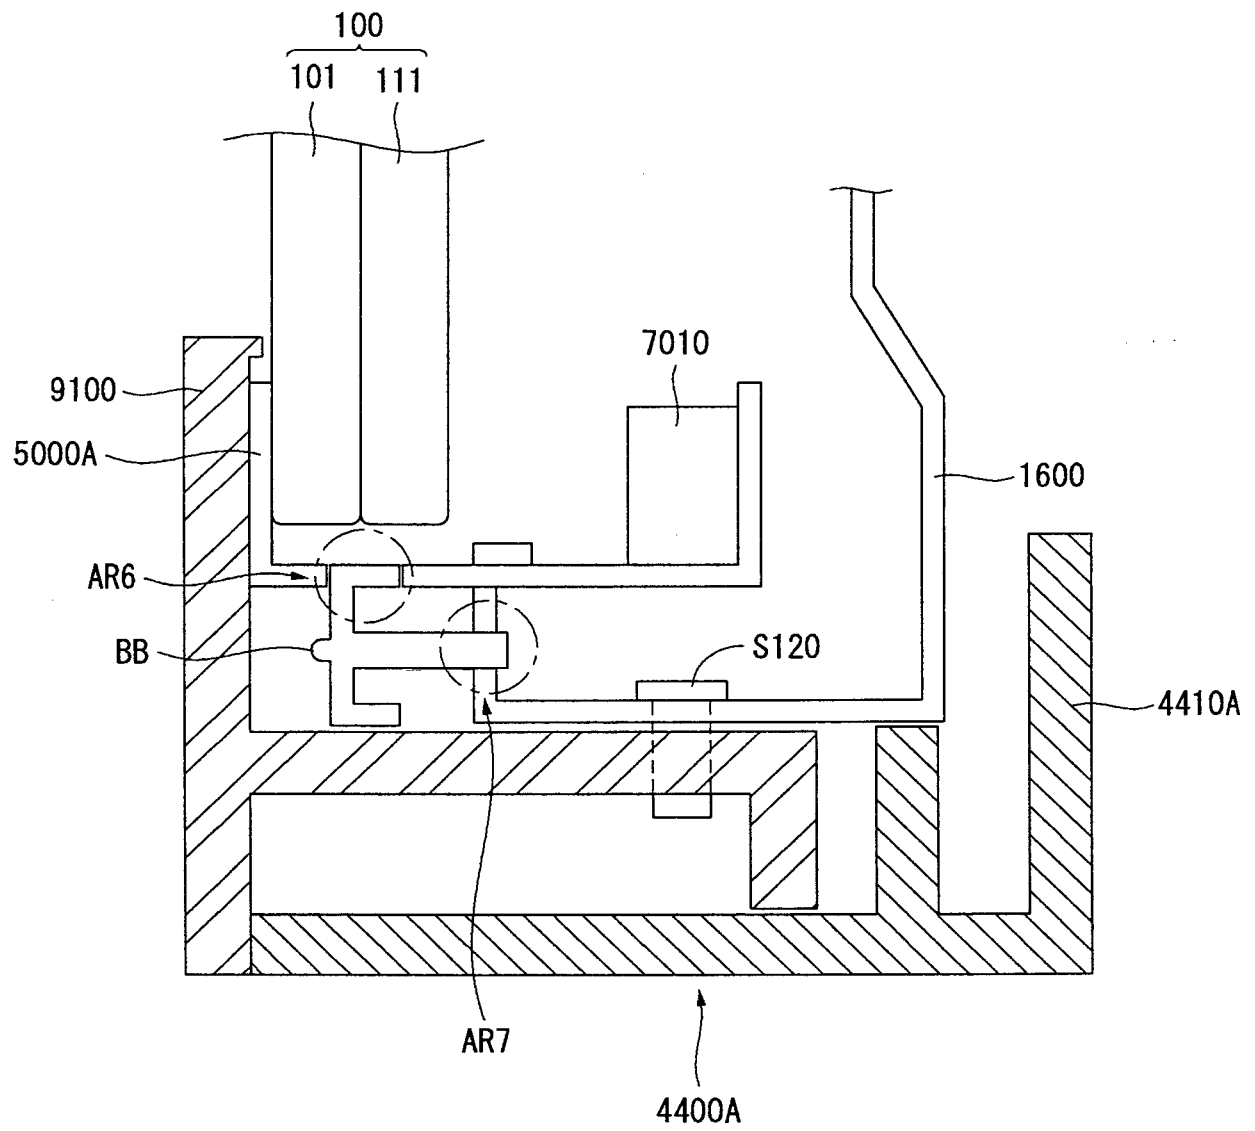


FIG. 59

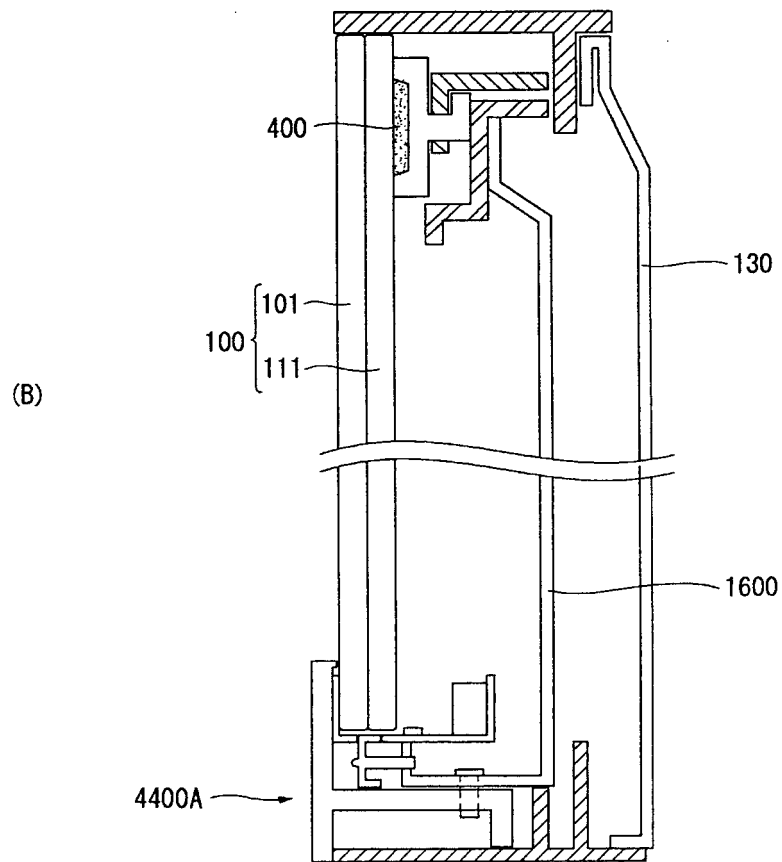
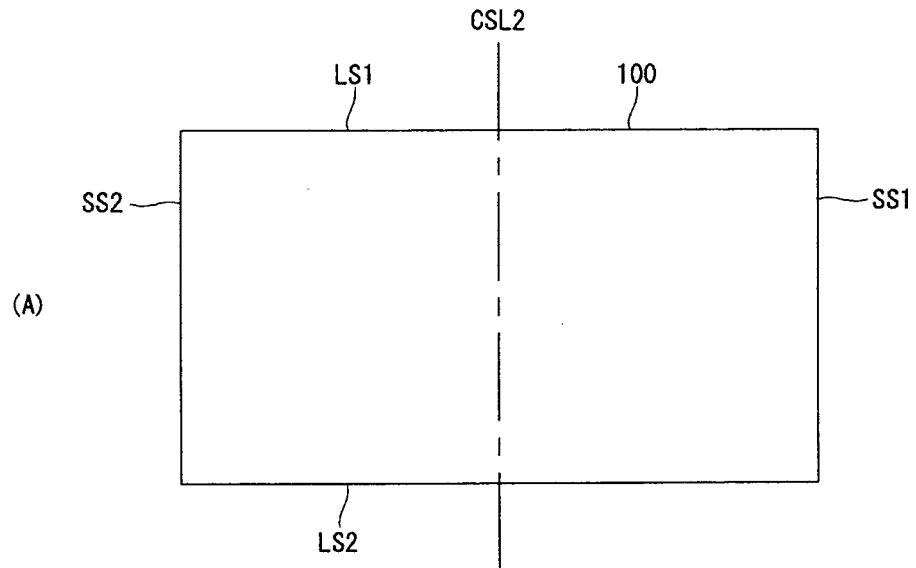


FIG. 60

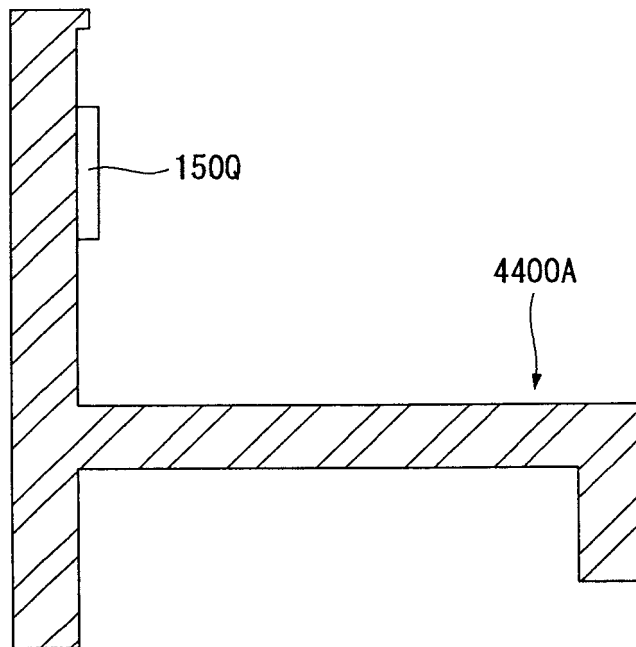


FIG. 61

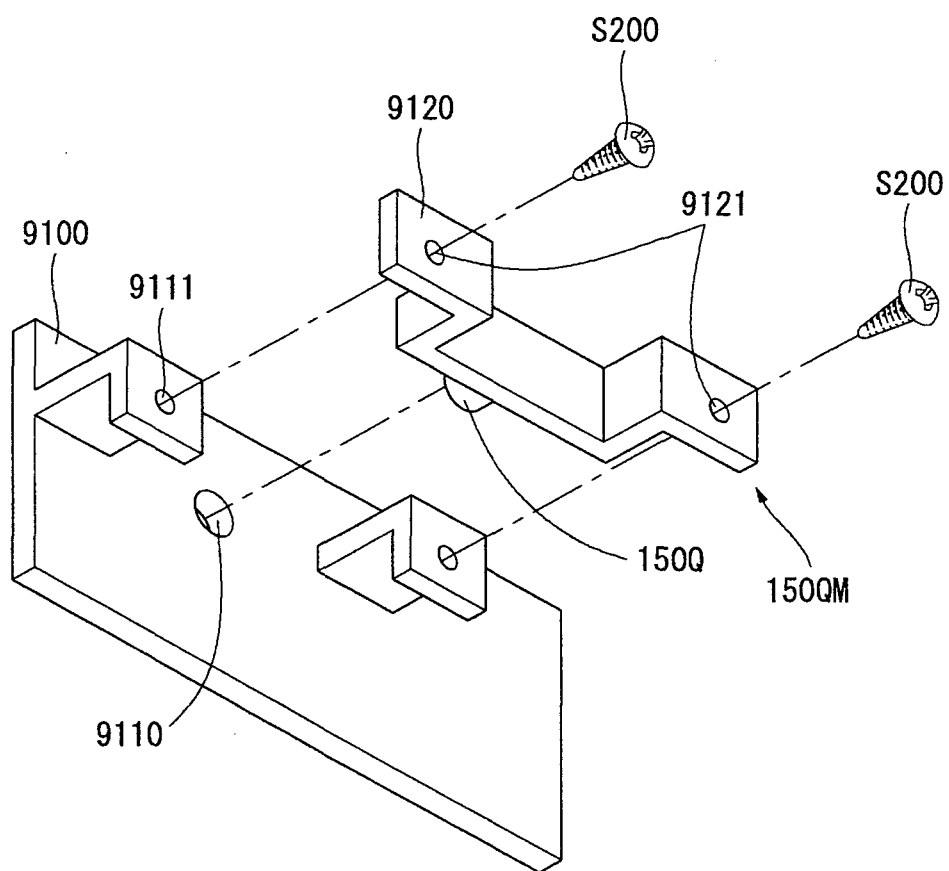


FIG. 62

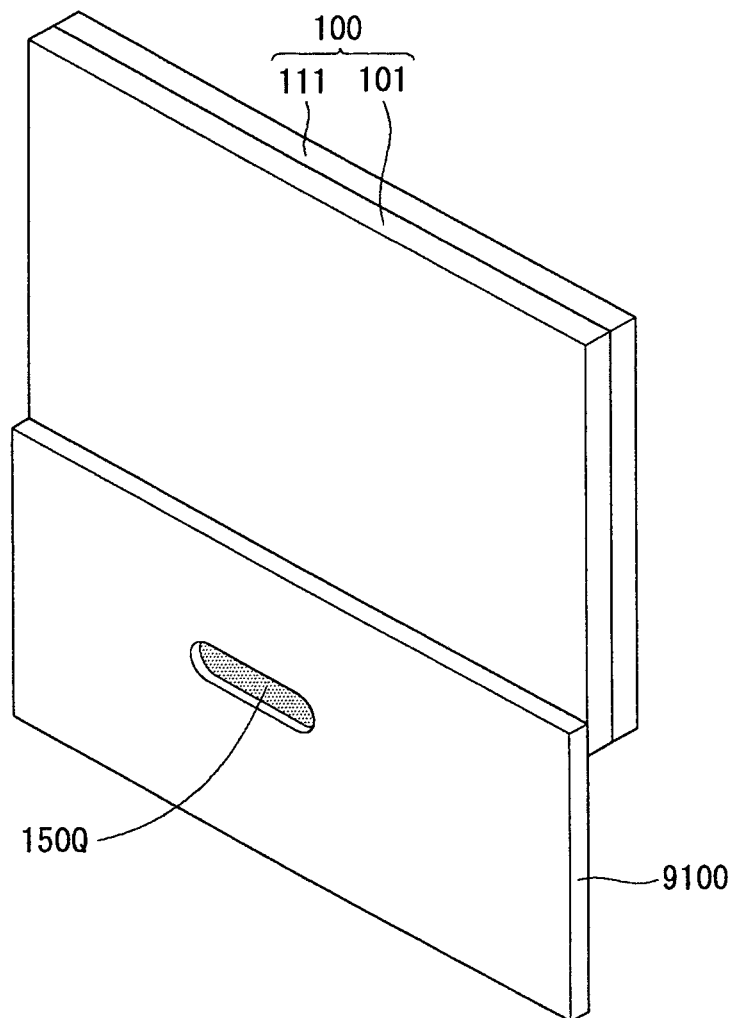


FIG. 63

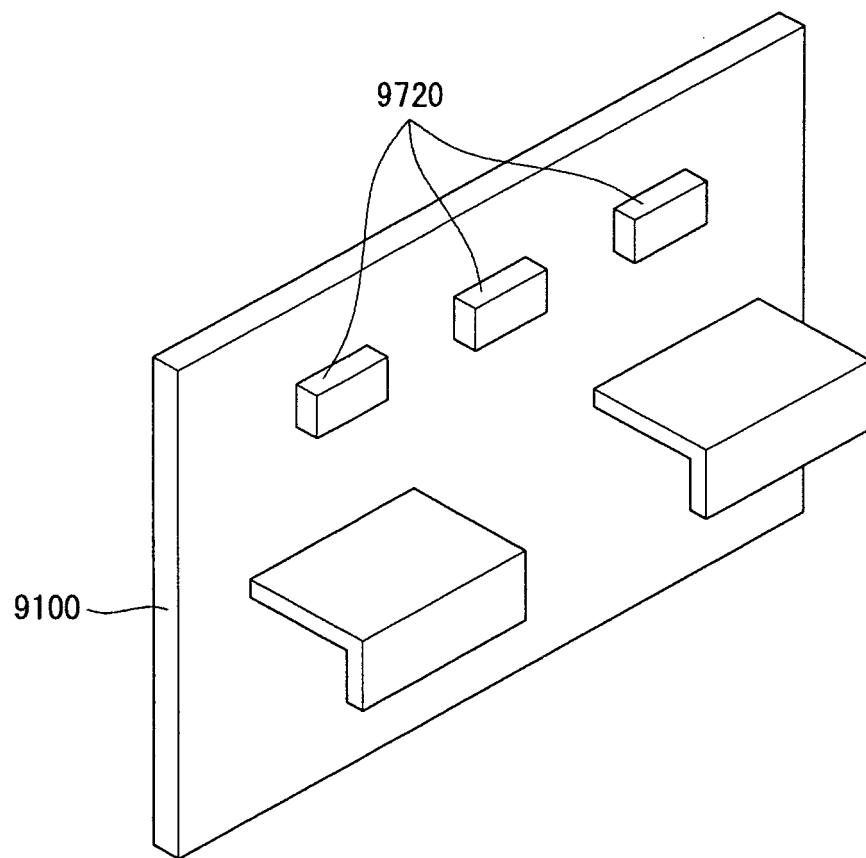


FIG. 64

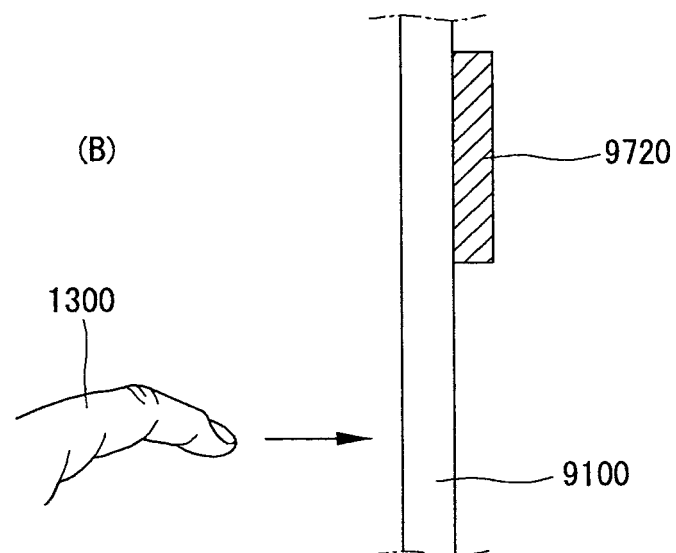
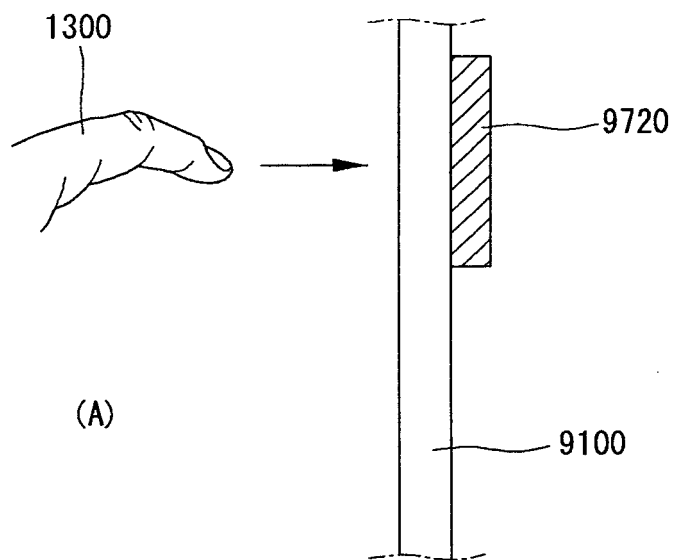


FIG. 65

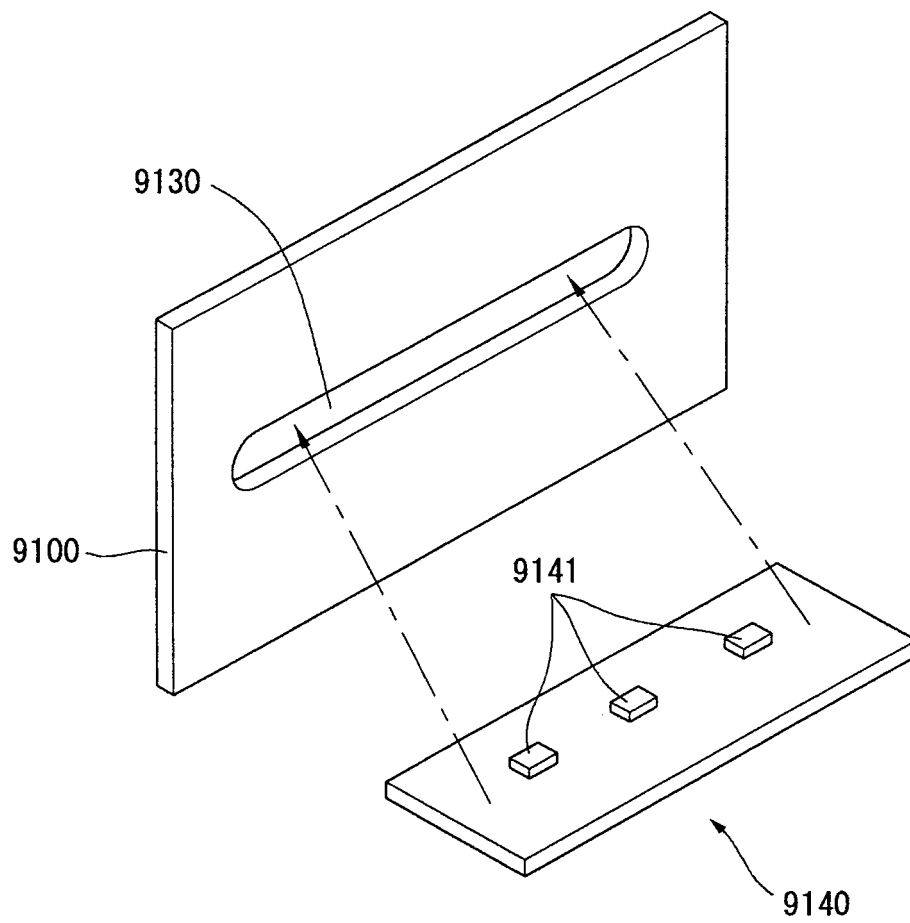


FIG. 66

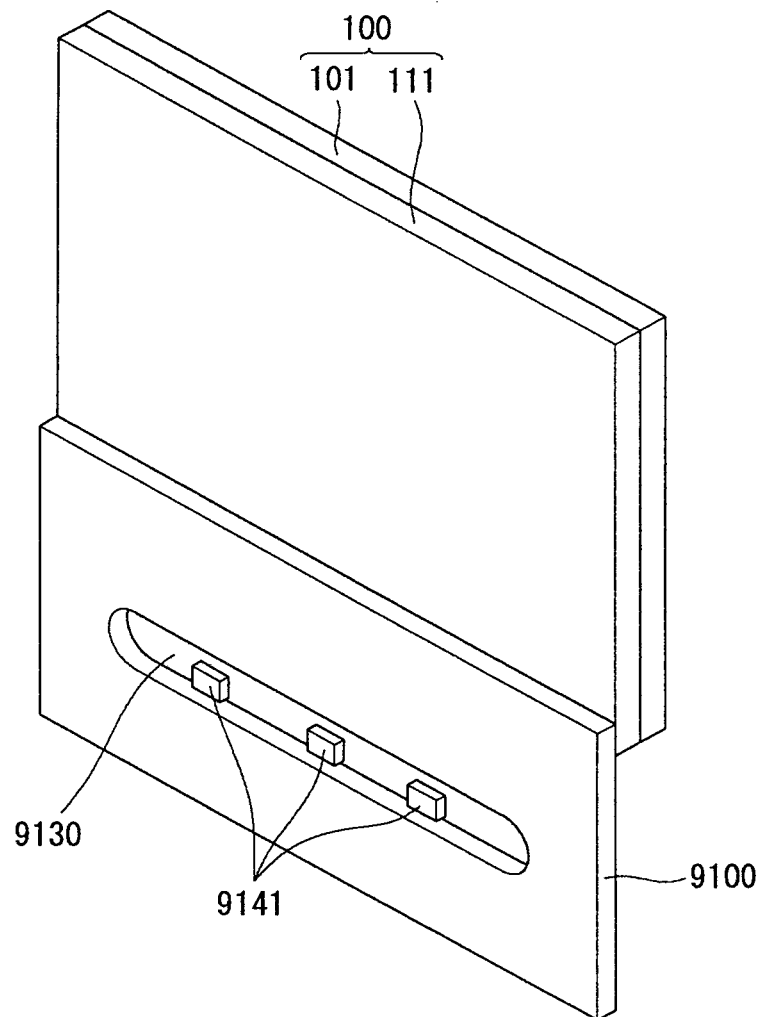


FIG. 67

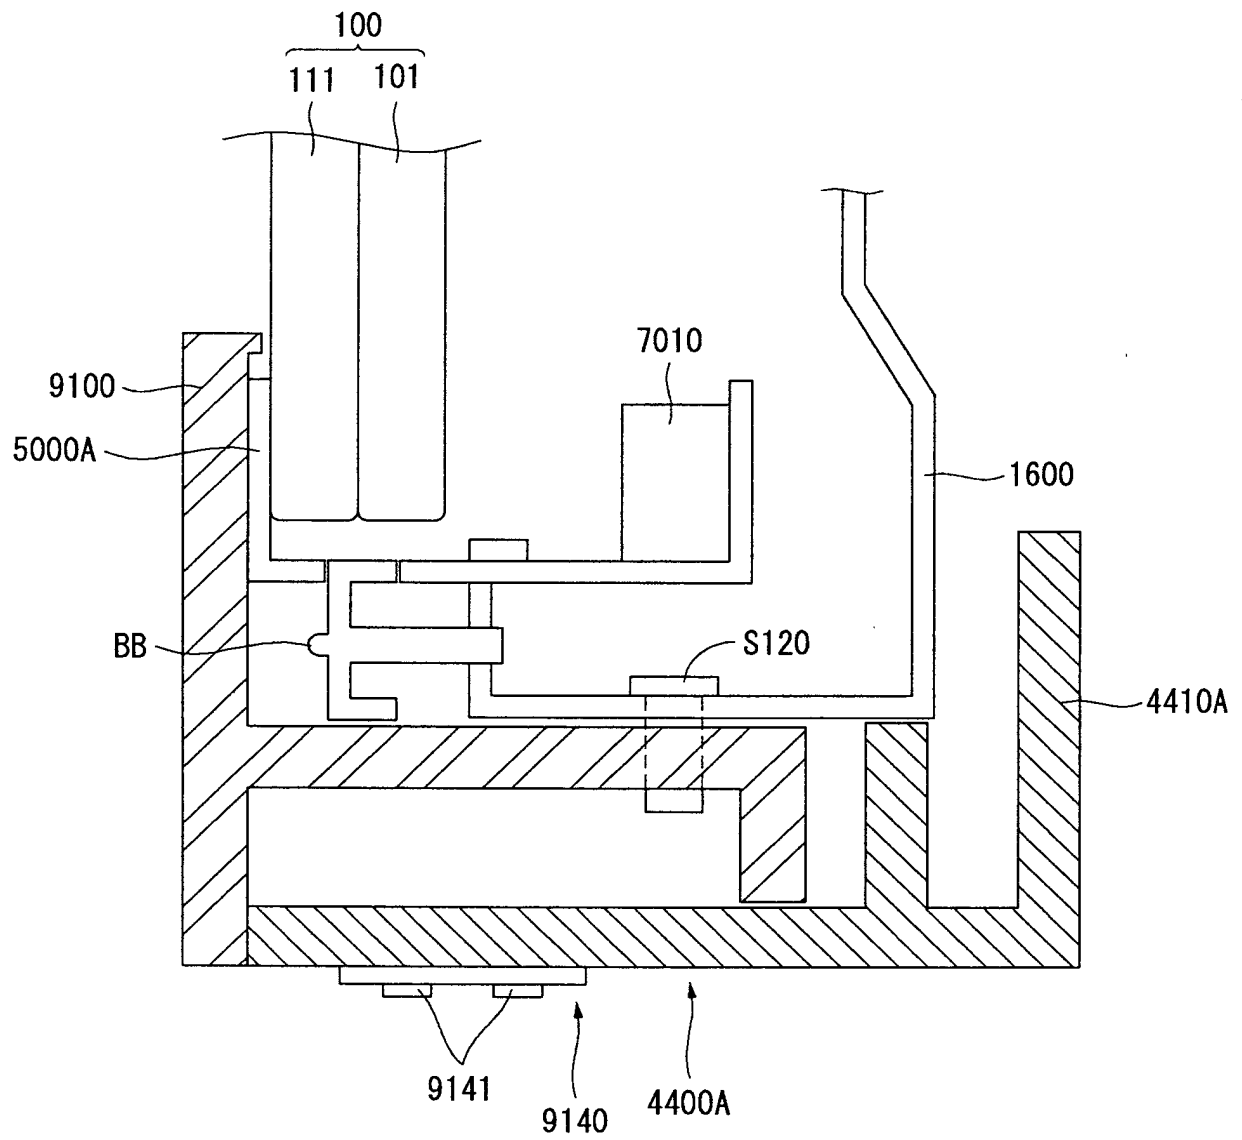


FIG. 68

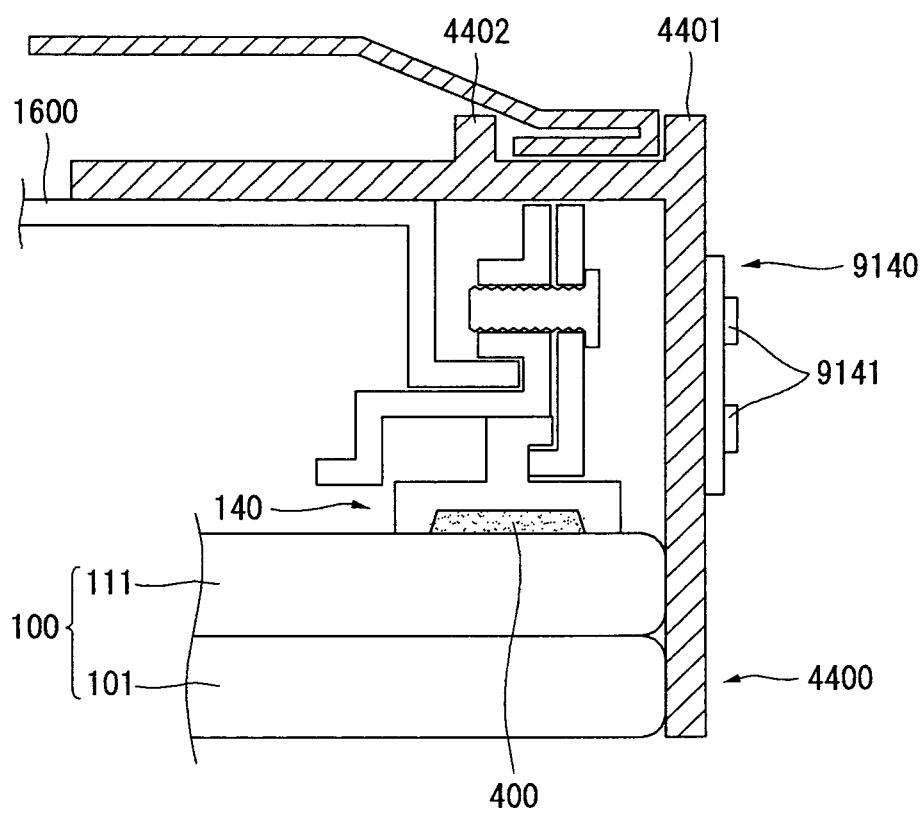


FIG. 69

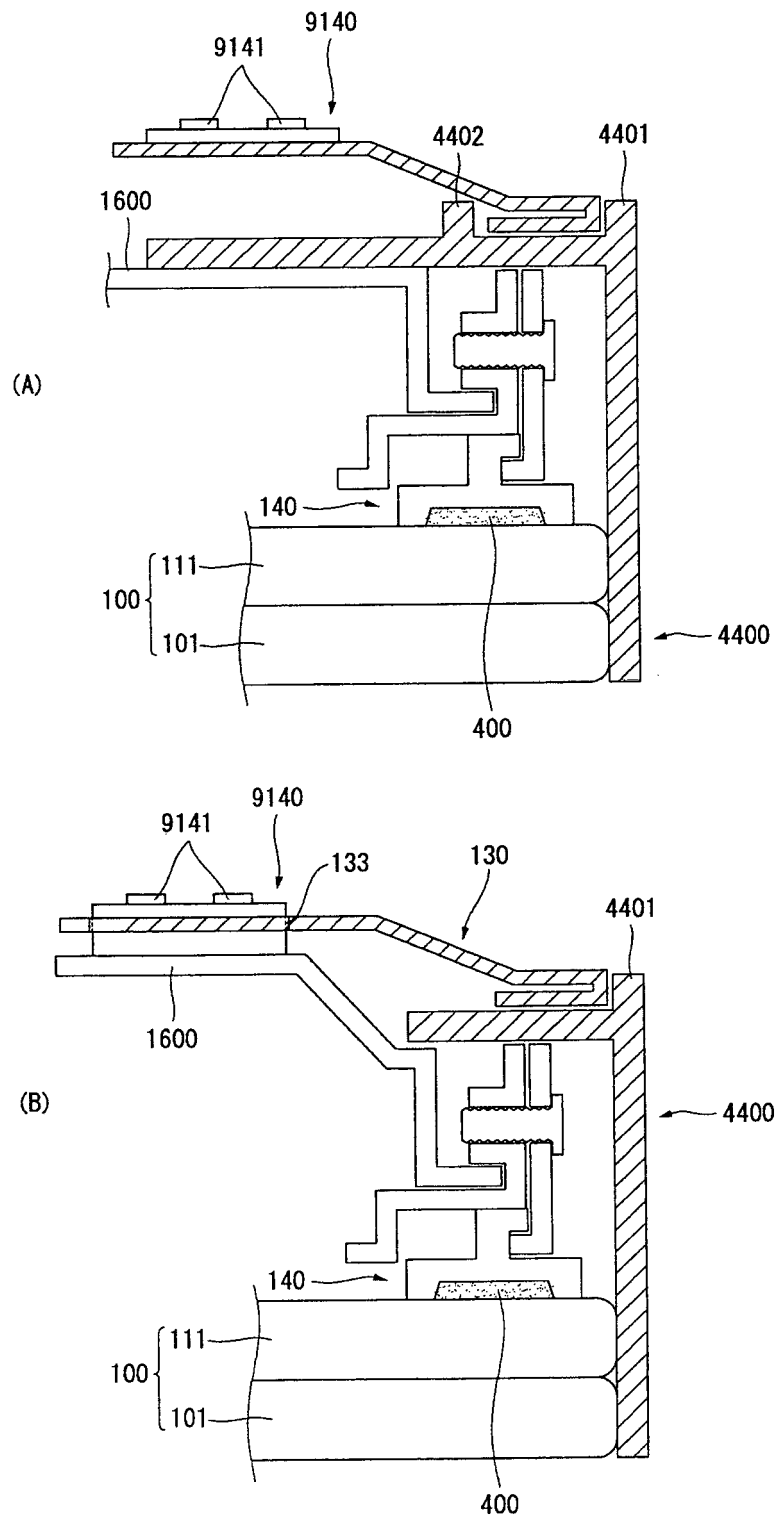


FIG. 70

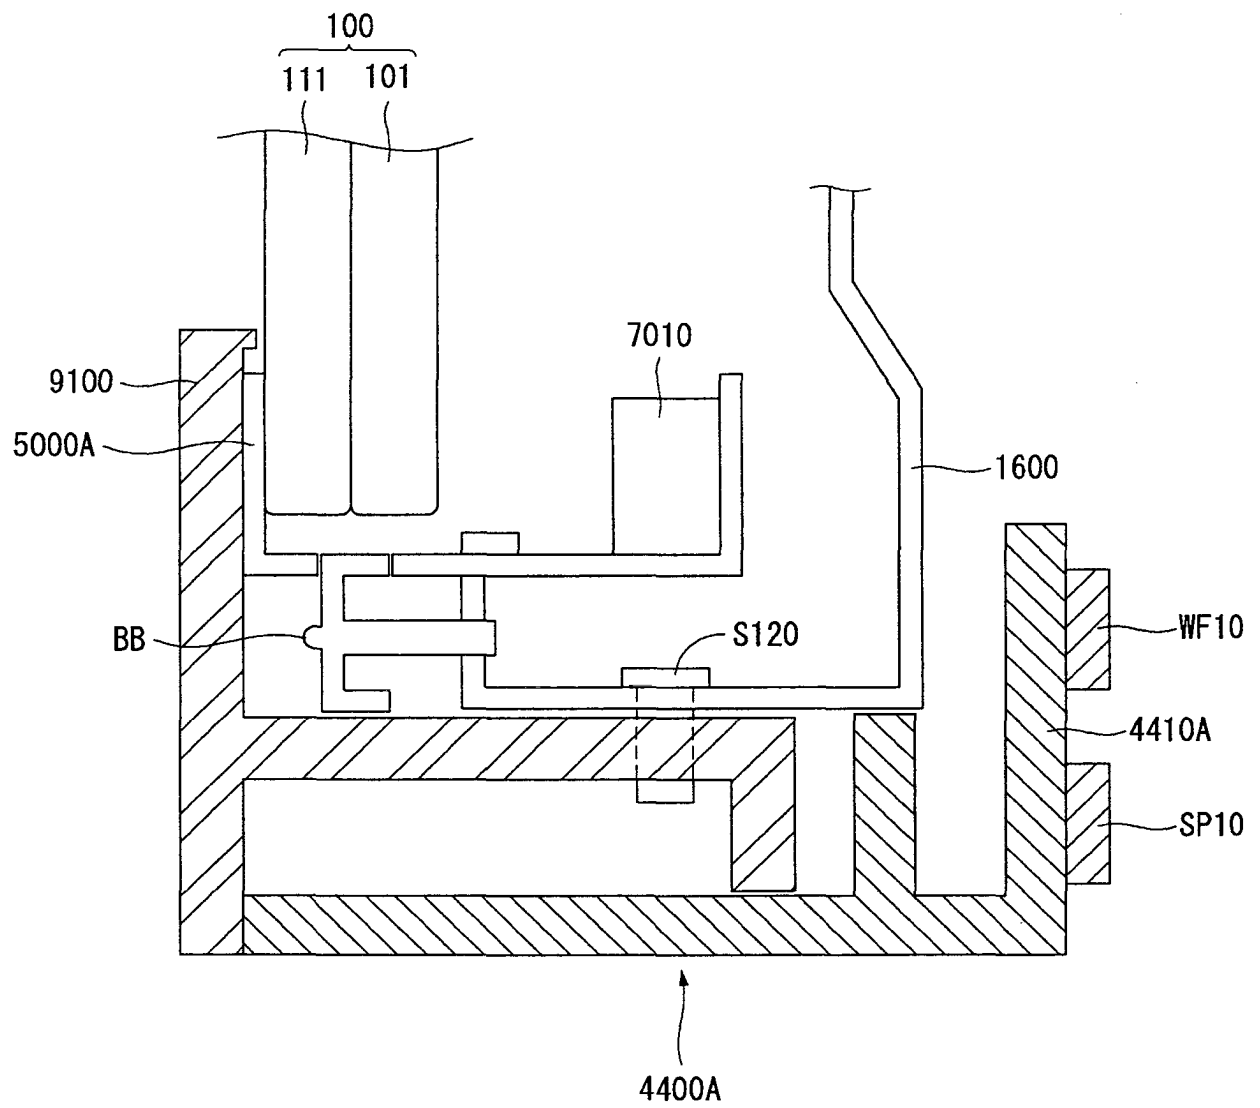


FIG. 71

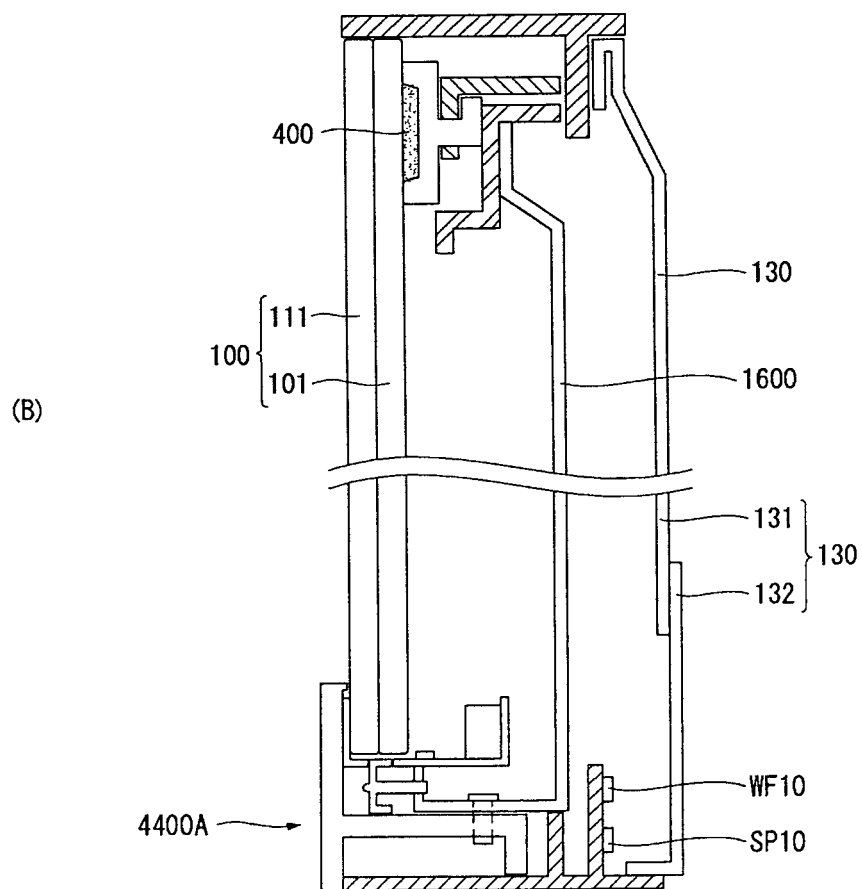
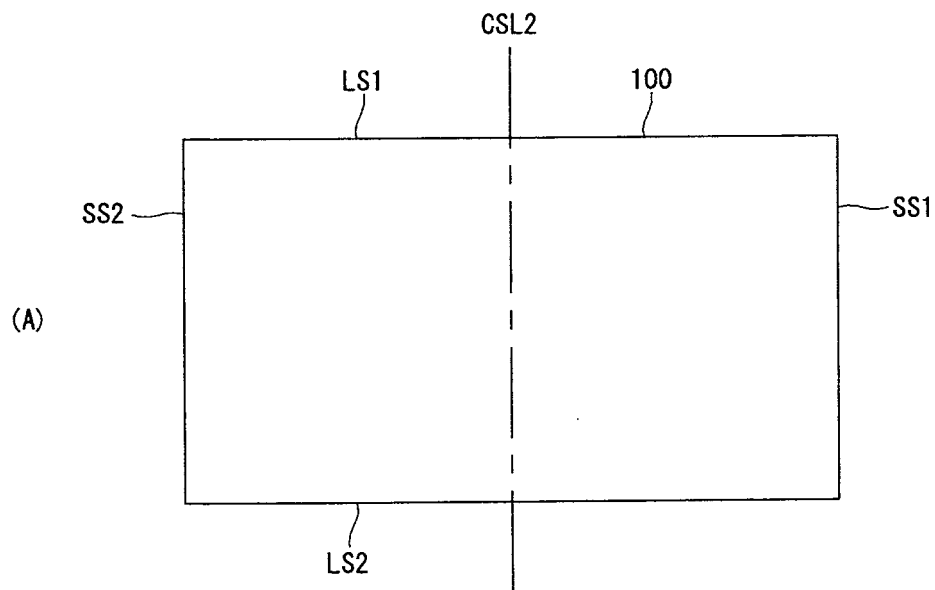


FIG. 72

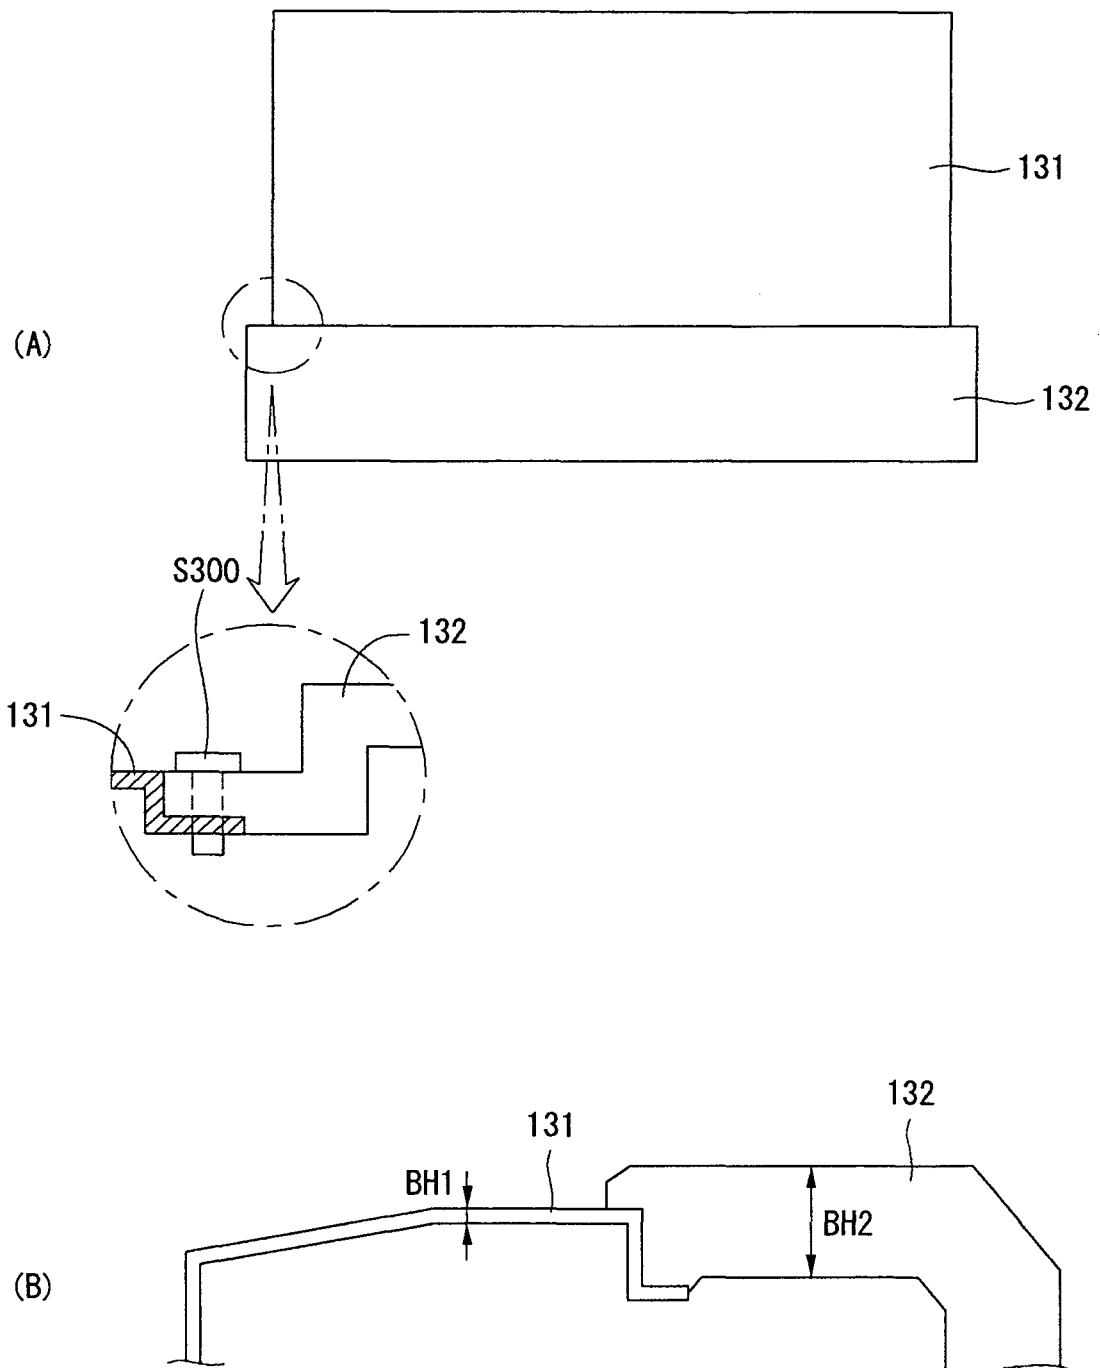


FIG. 73

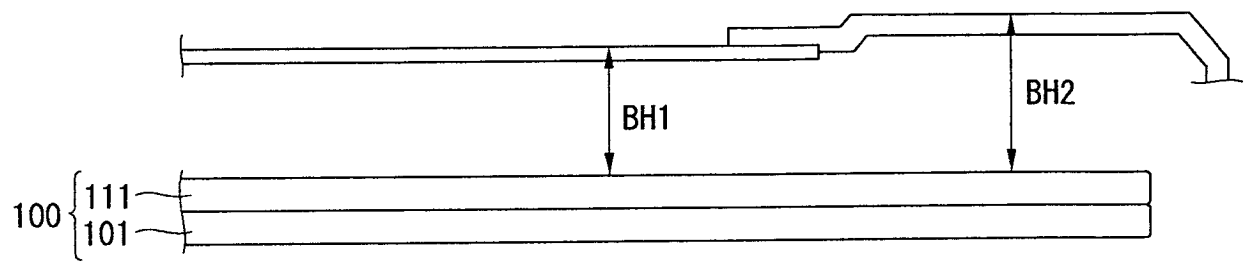


FIG. 74

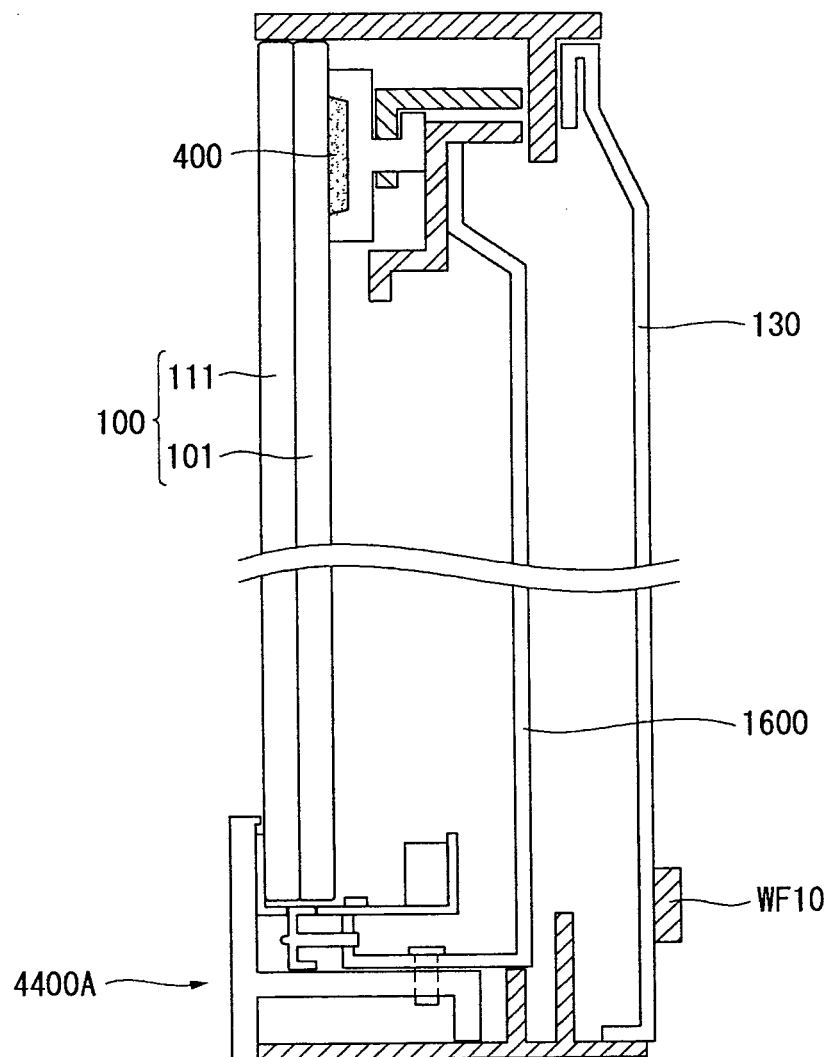


FIG. 75

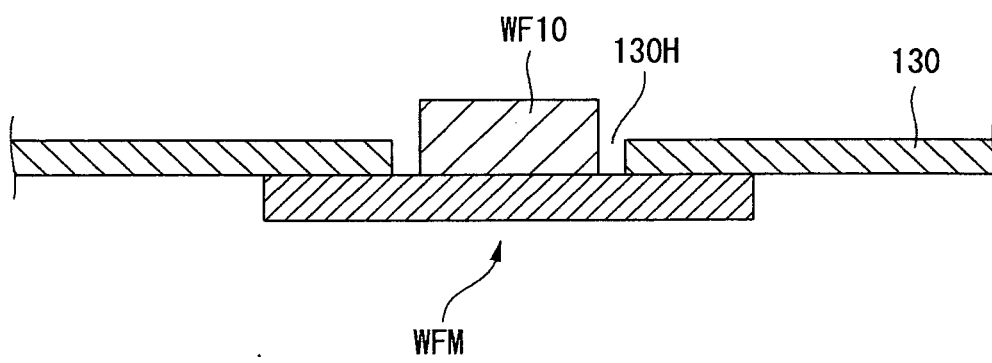


FIG. 76

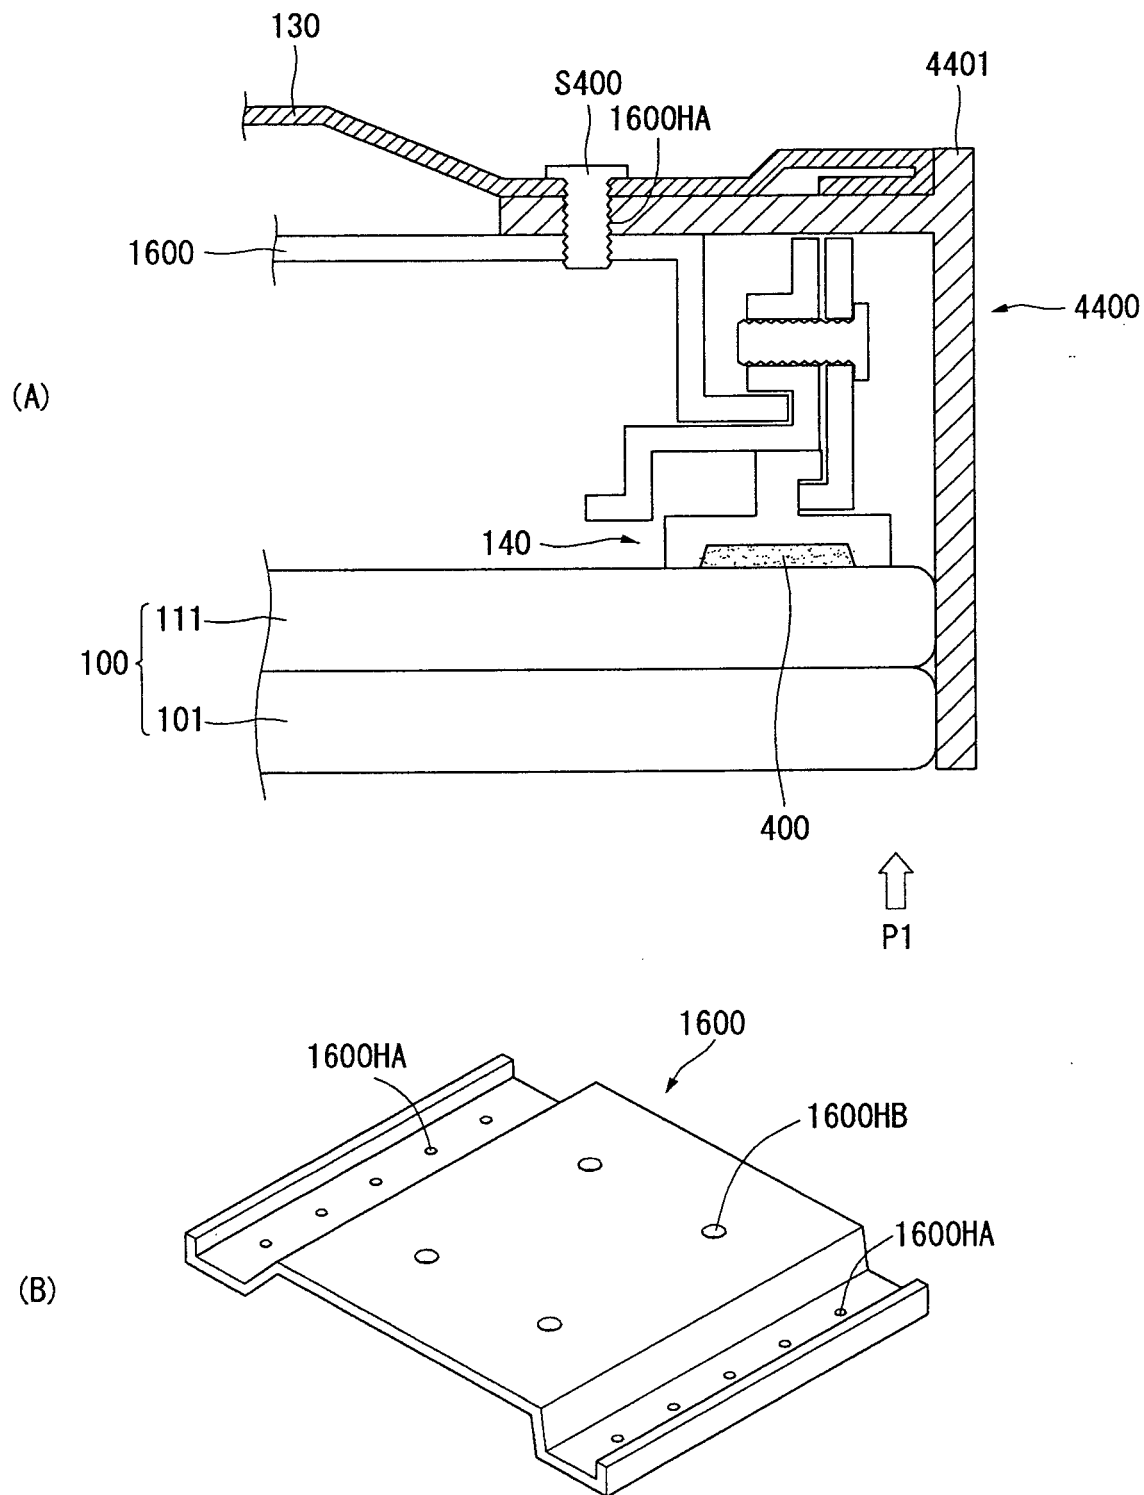


FIG. 77

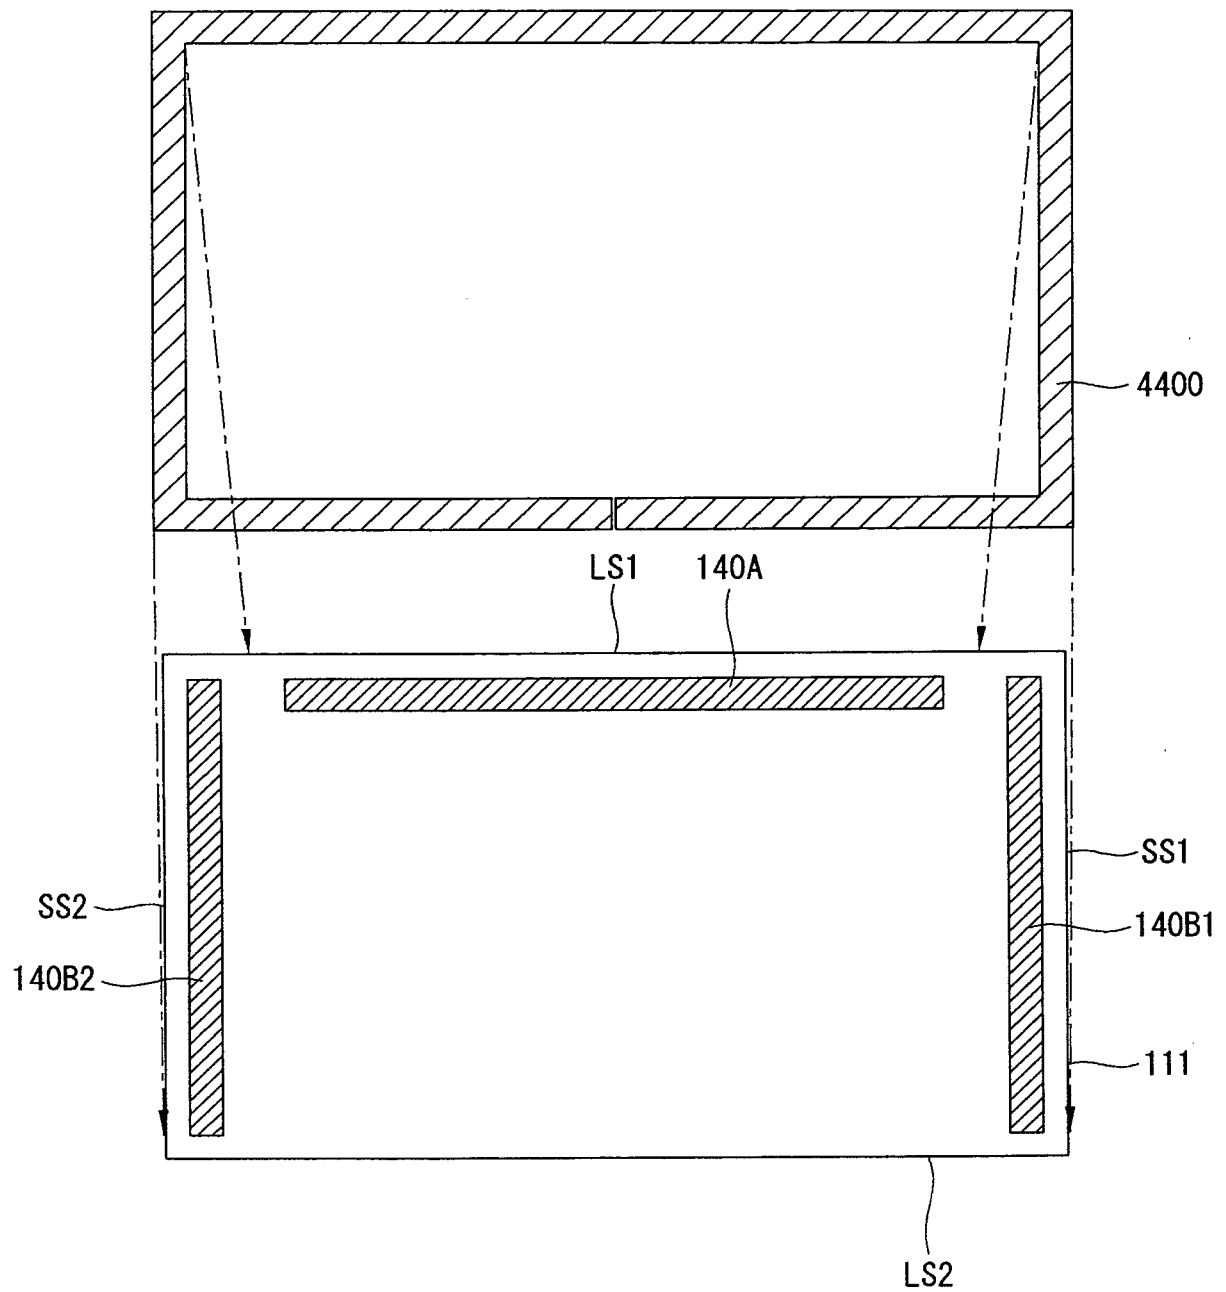


FIG. 78

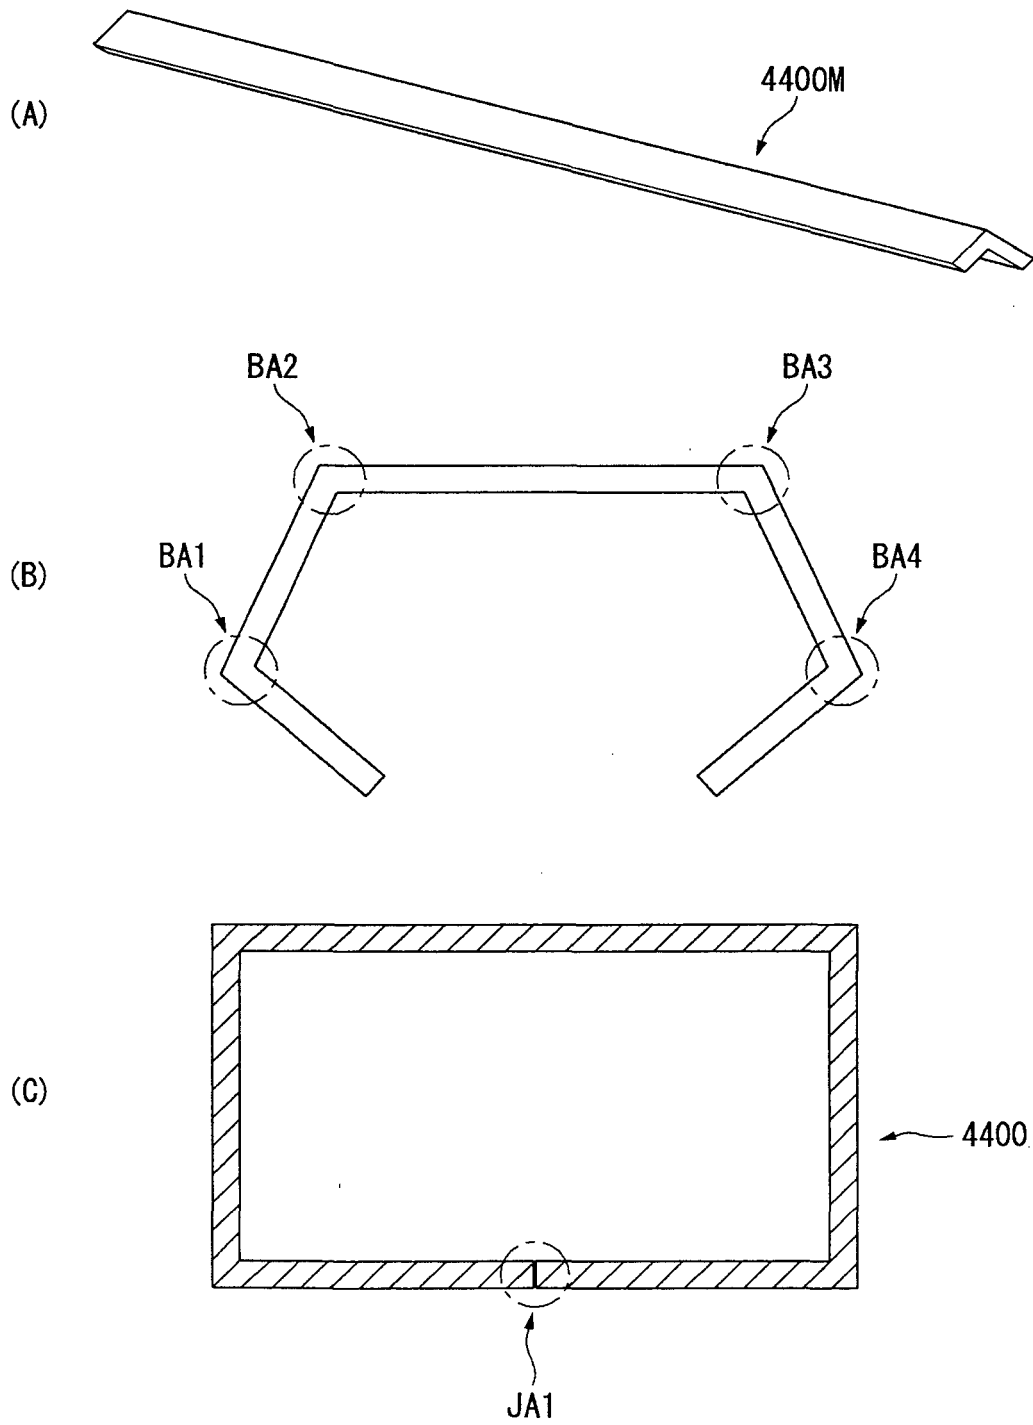


FIG. 79

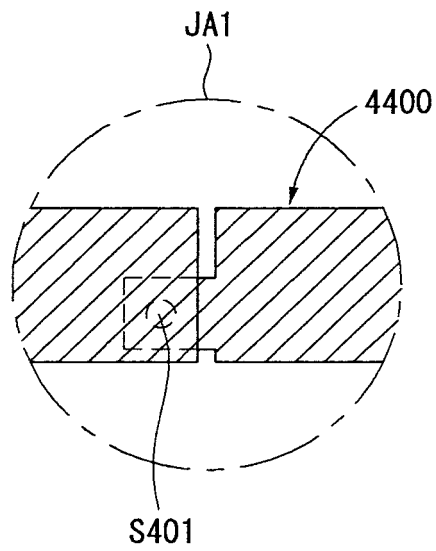


FIG. 80

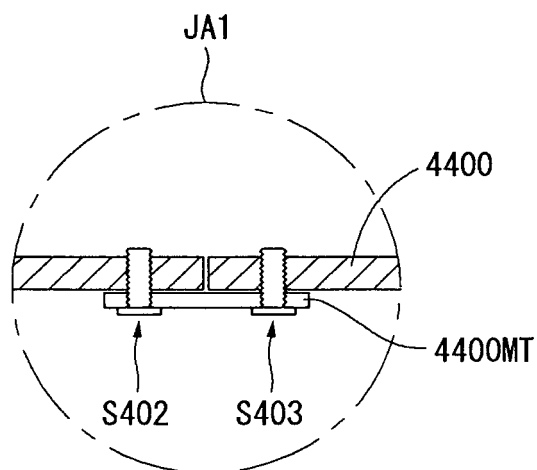


FIG. 81

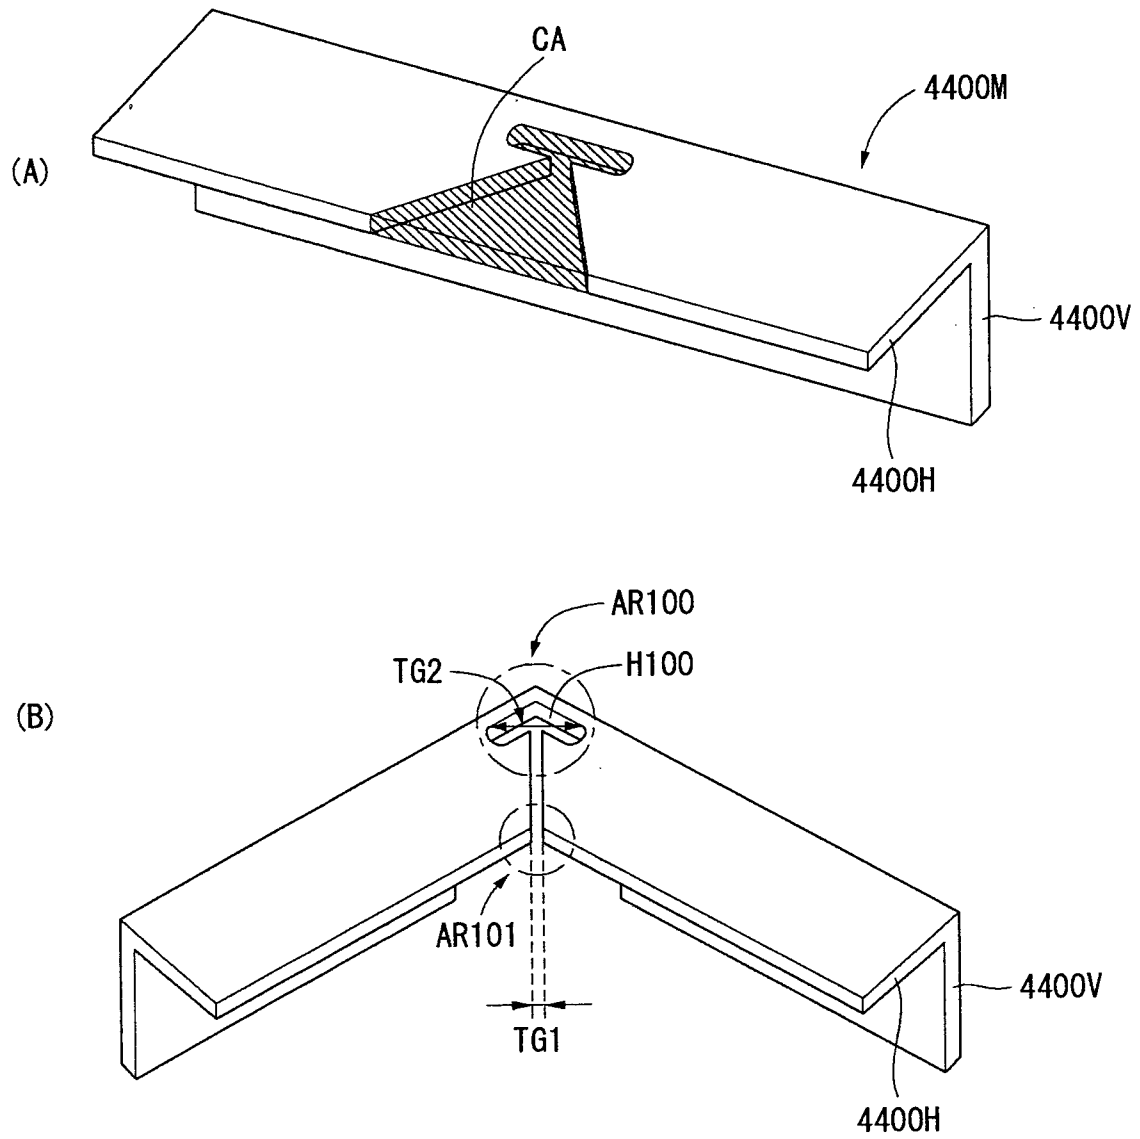


FIG. 82

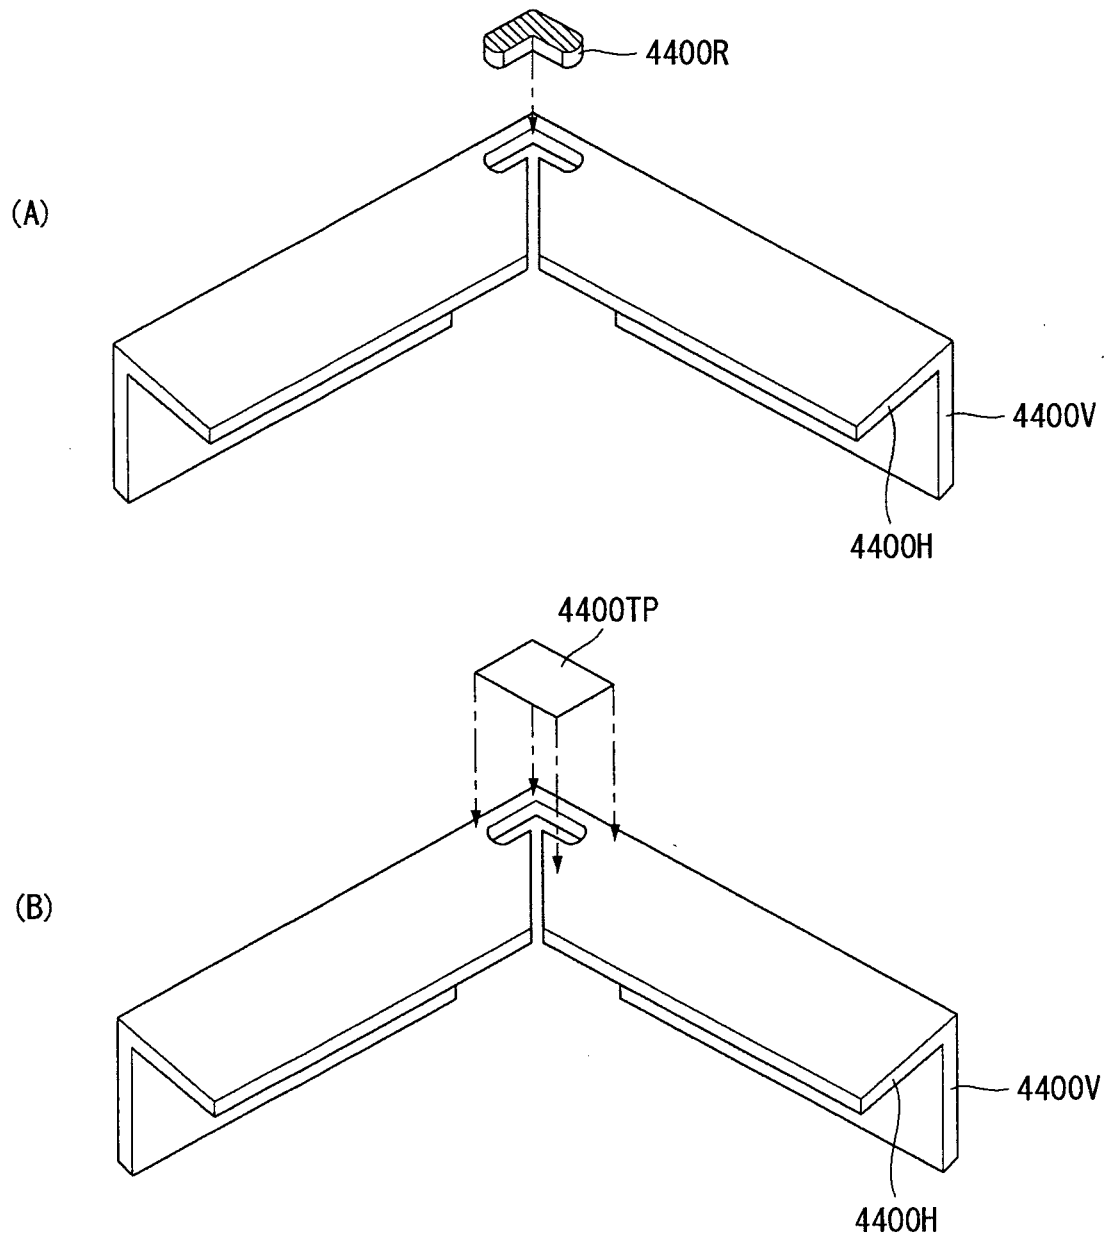


FIG. 83

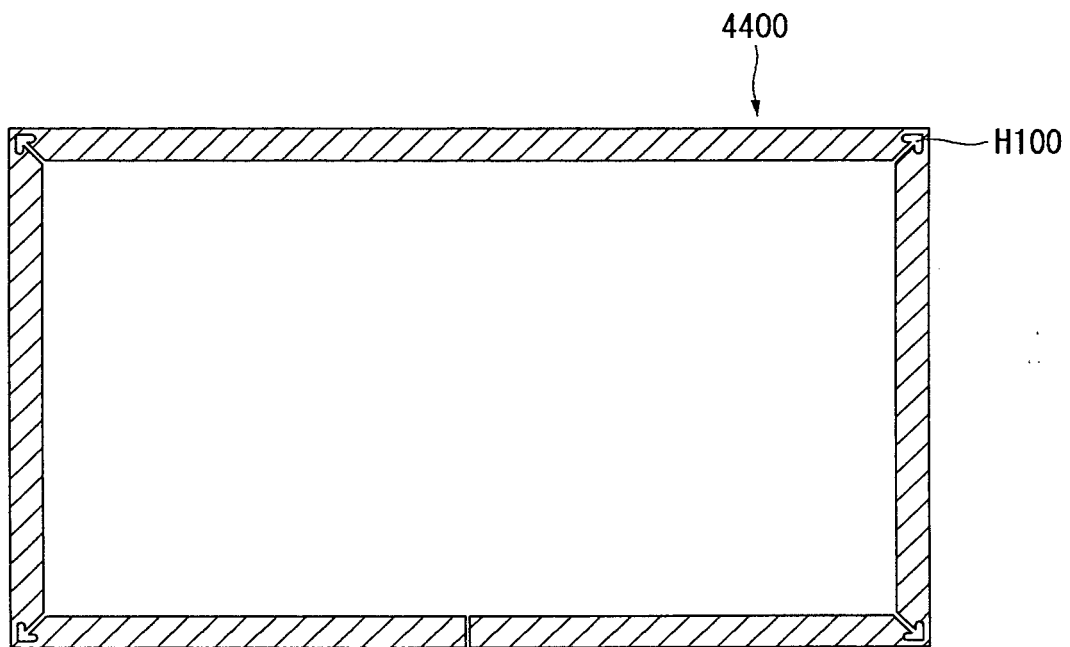


FIG. 84

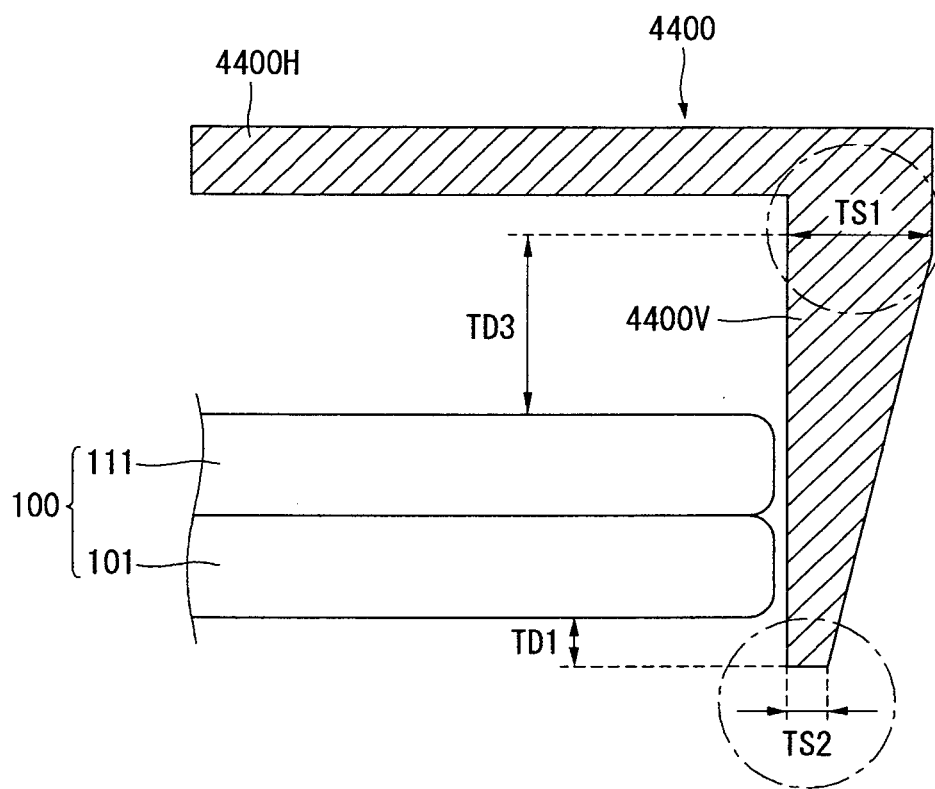


FIG. 85

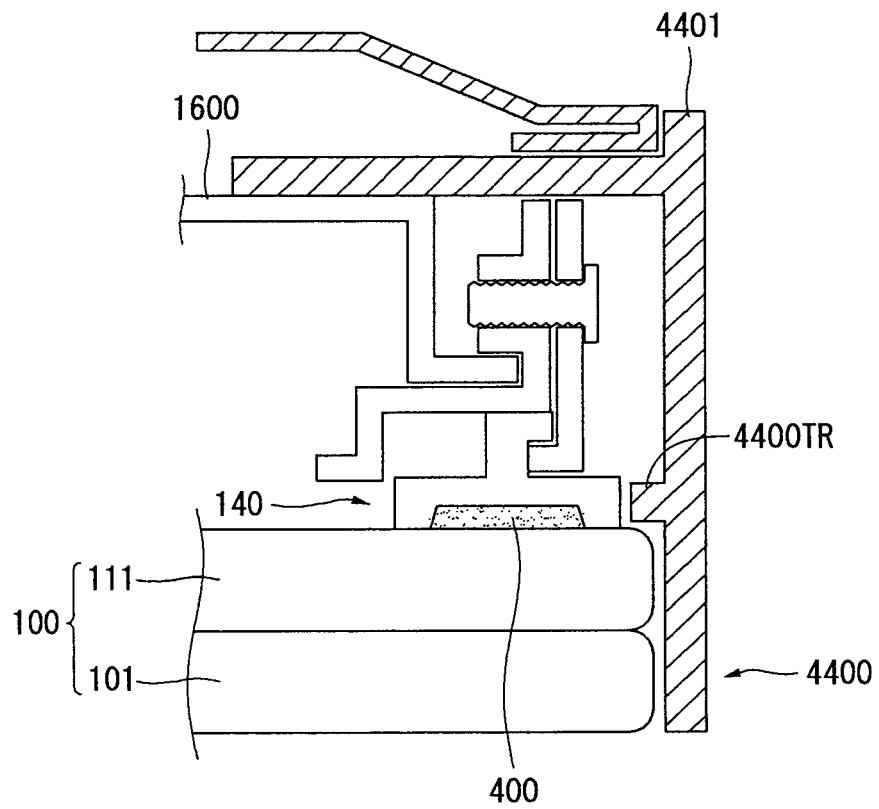


FIG. 86

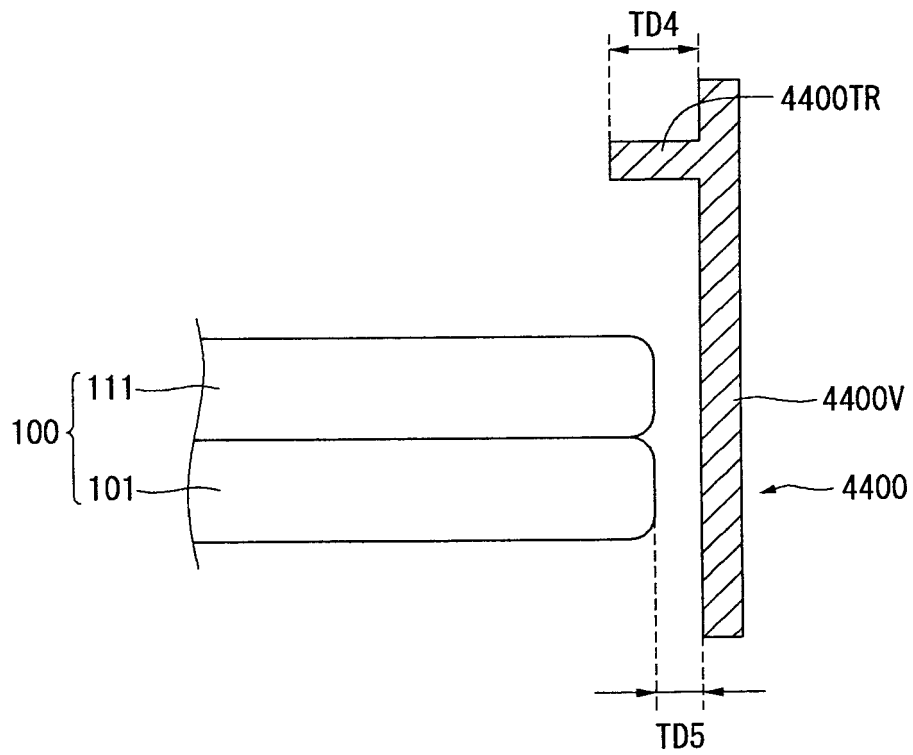


FIG. 87

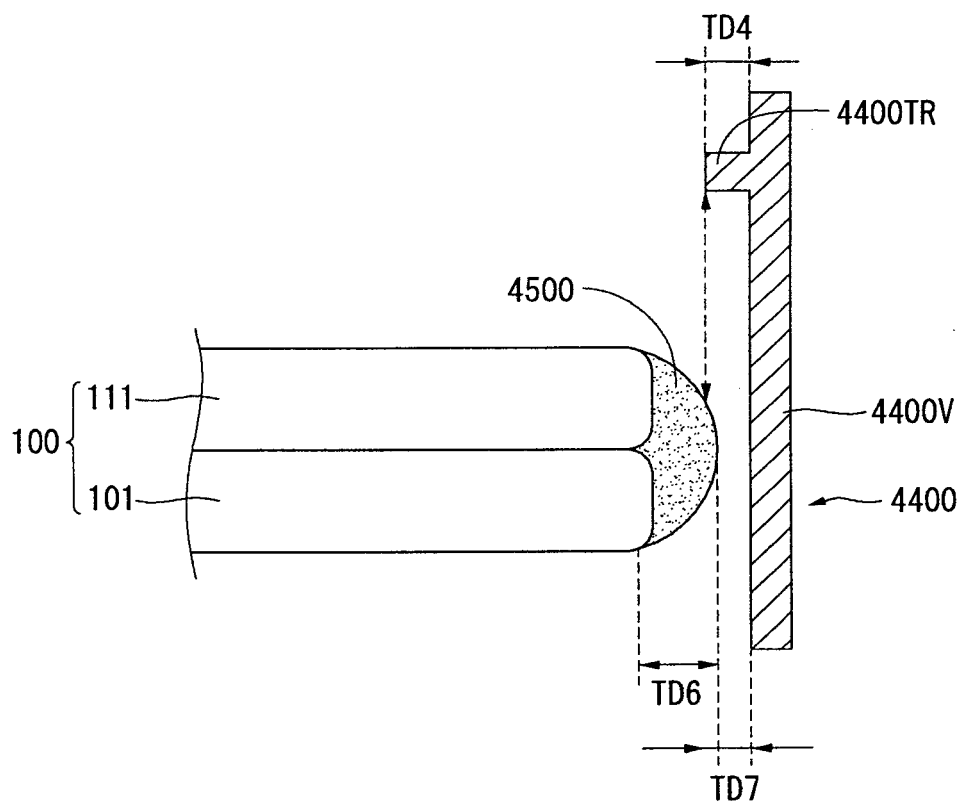


FIG. 88

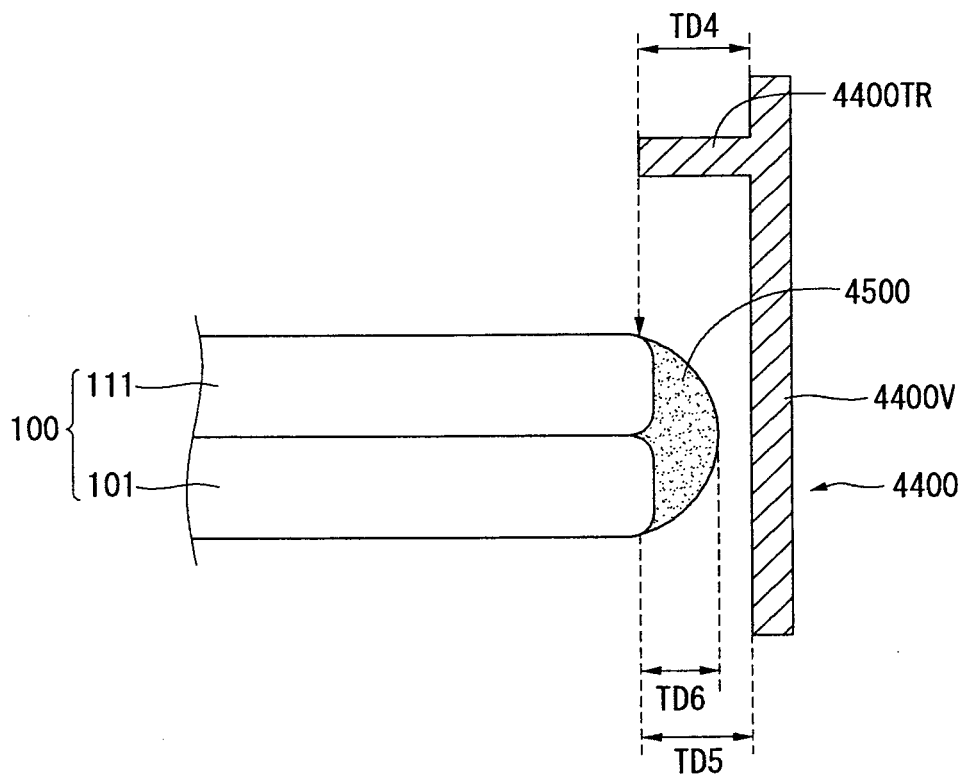


FIG. 89

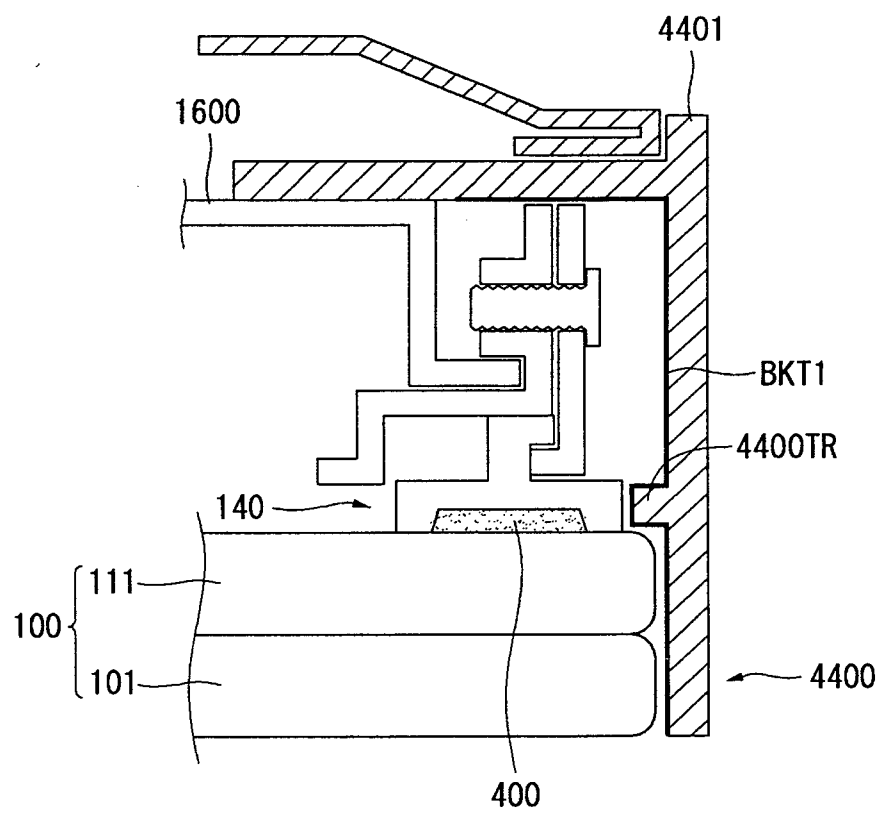


FIG. 90

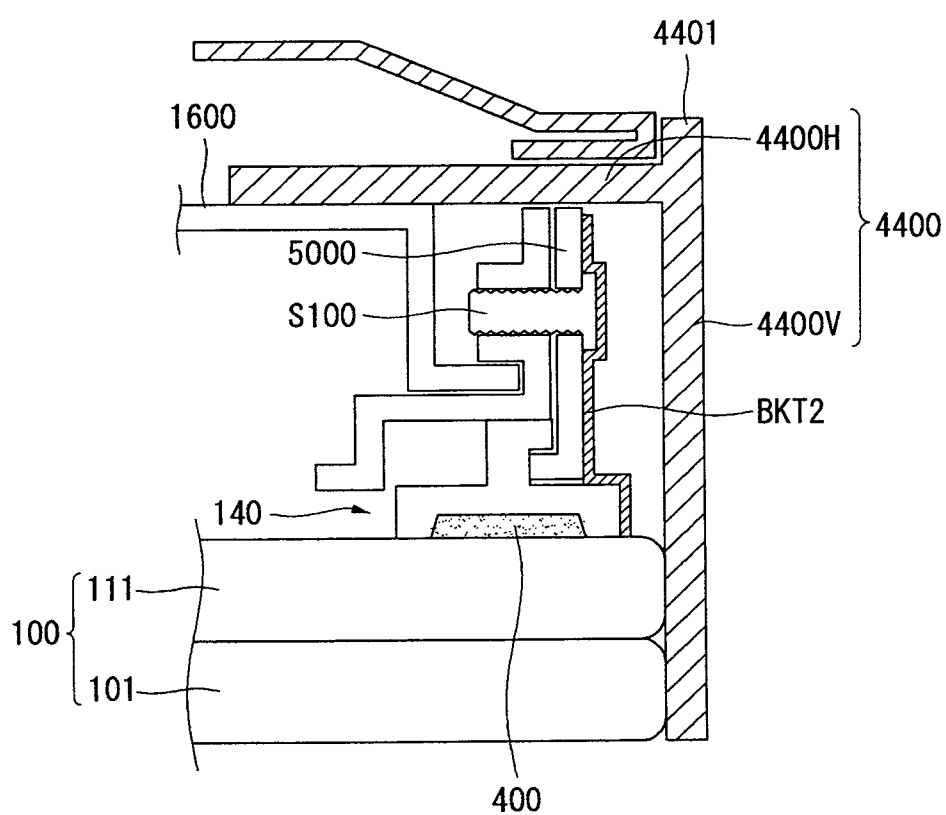


FIG. 91

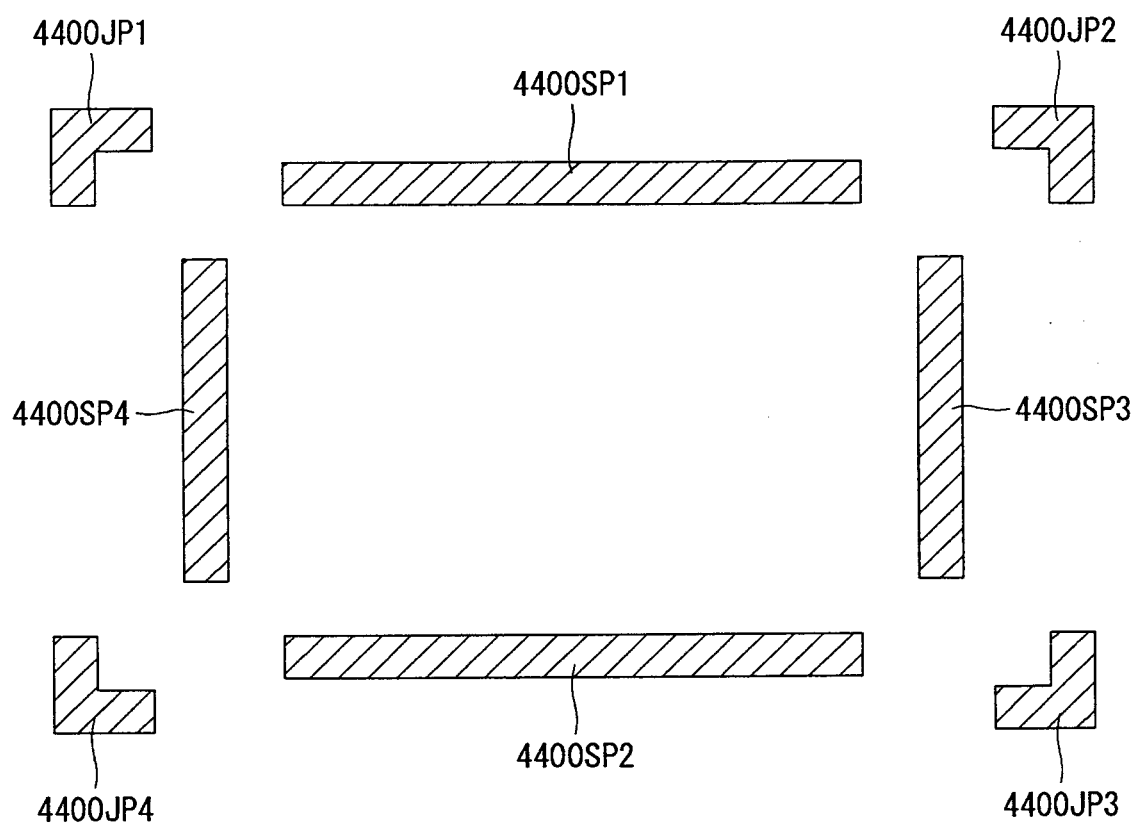


FIG. 92

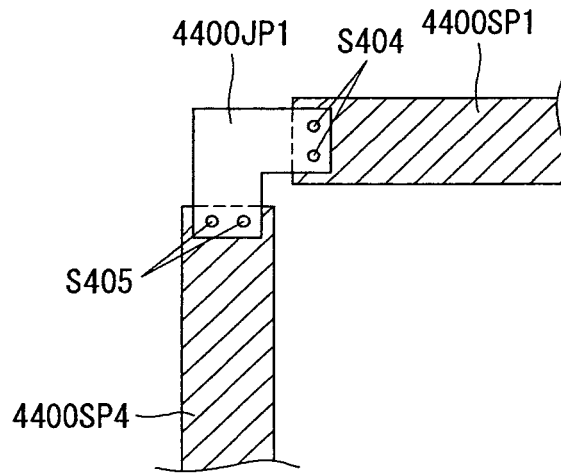


FIG. 93

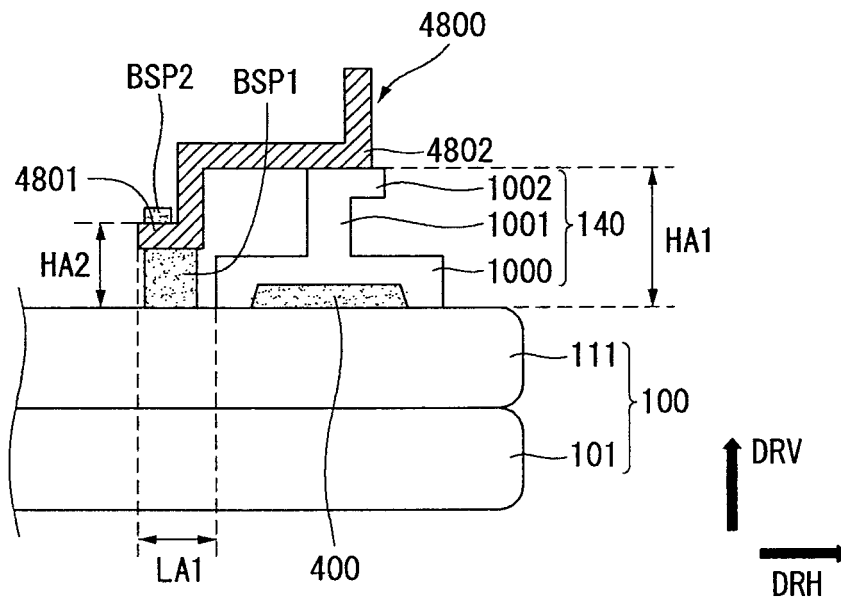


FIG. 94

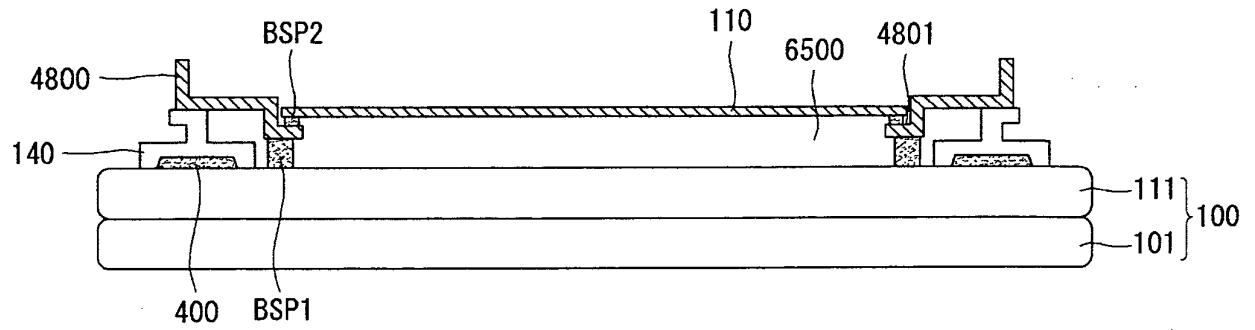


FIG. 95

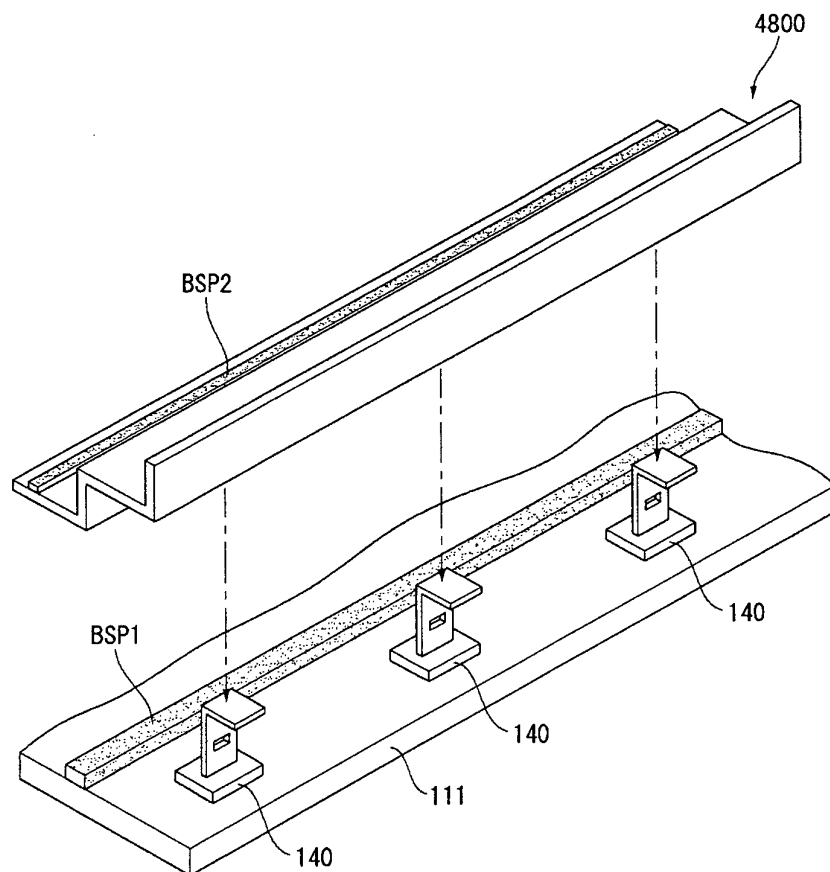


FIG. 96

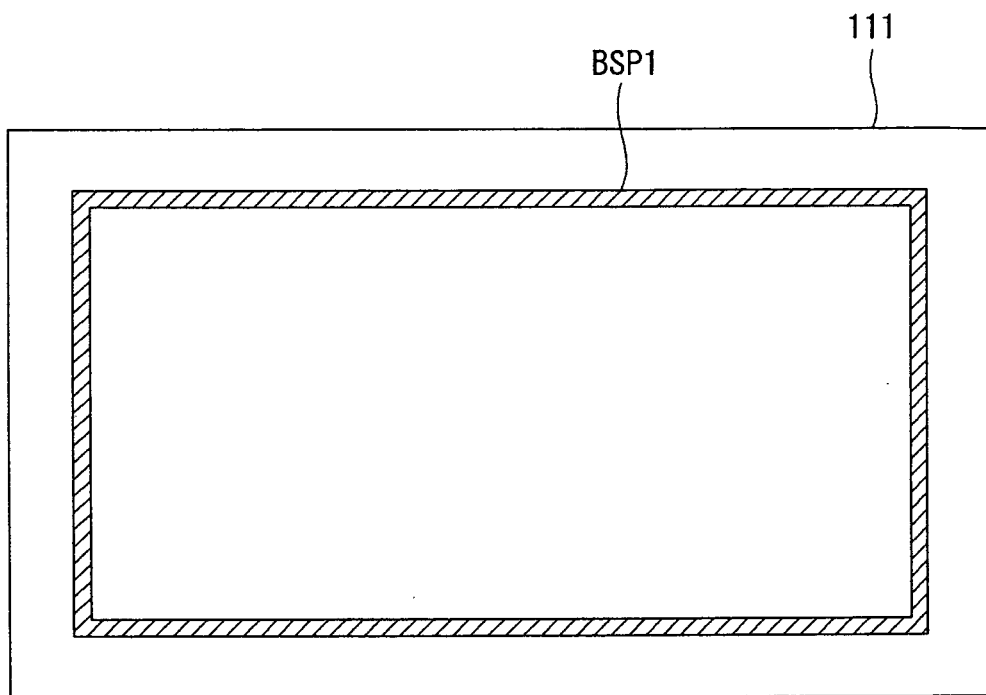


FIG. 97

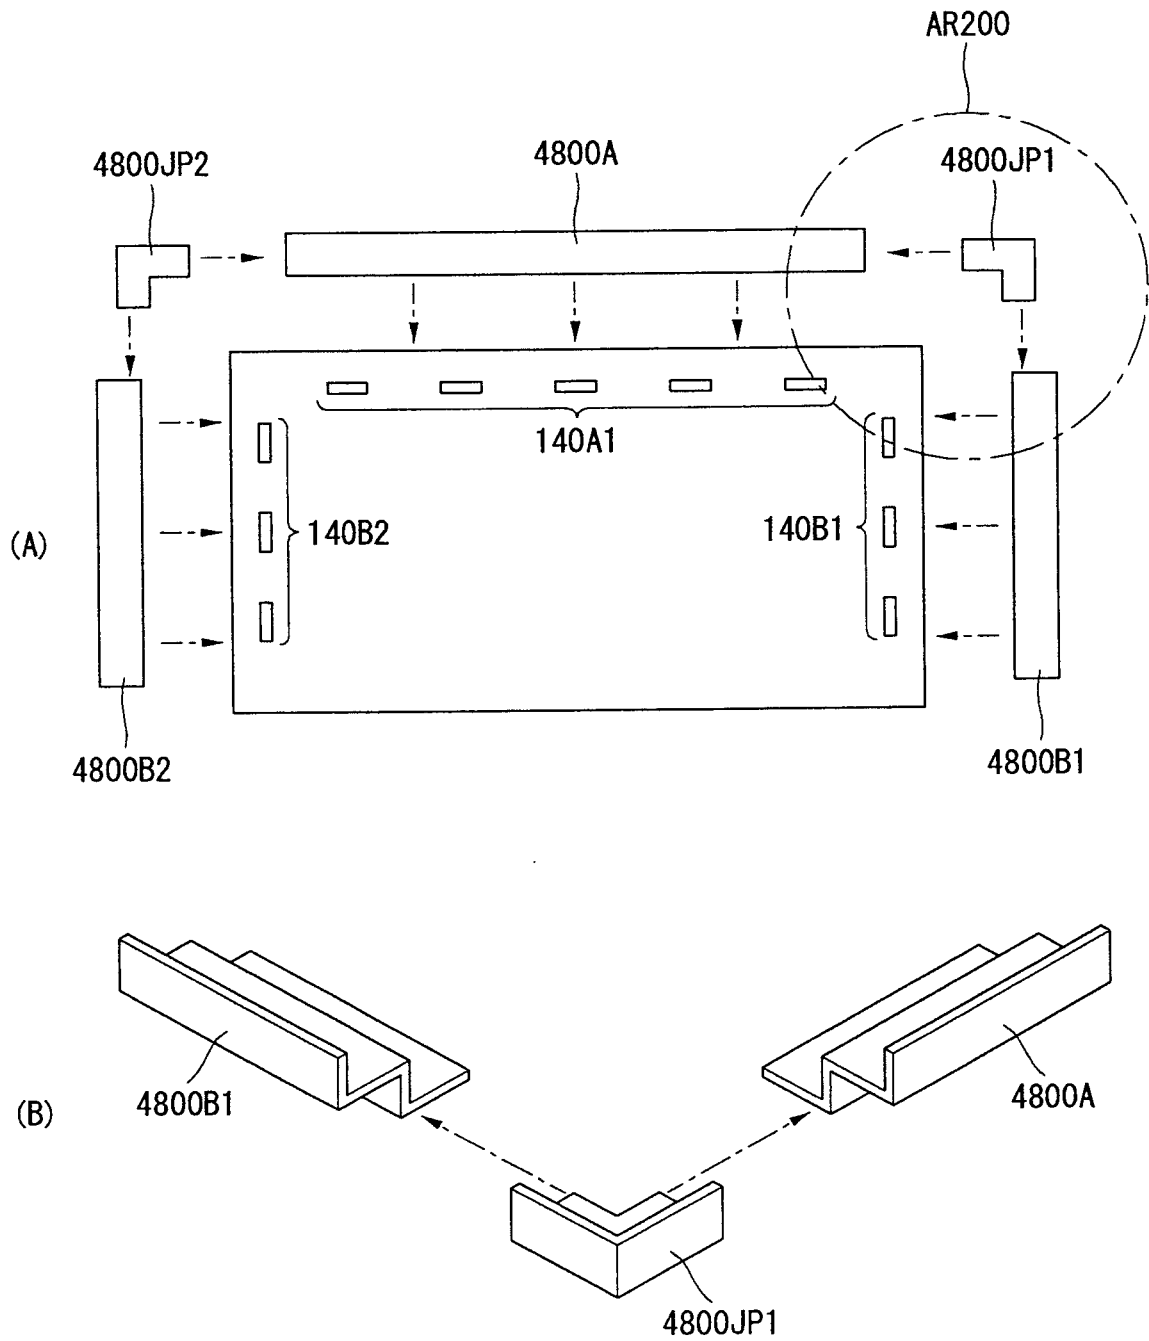


FIG. 98

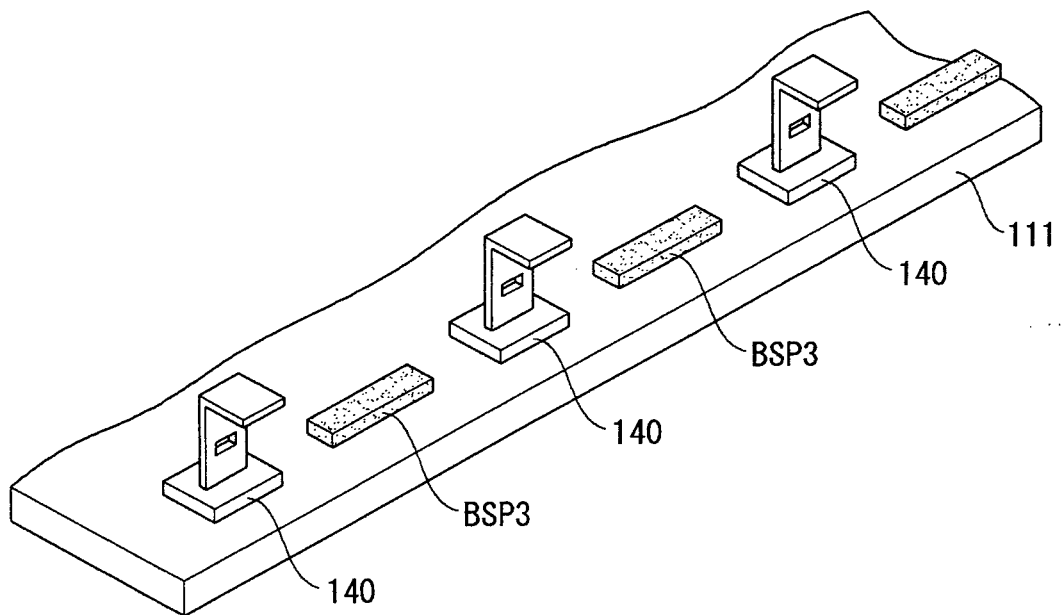


FIG. 99

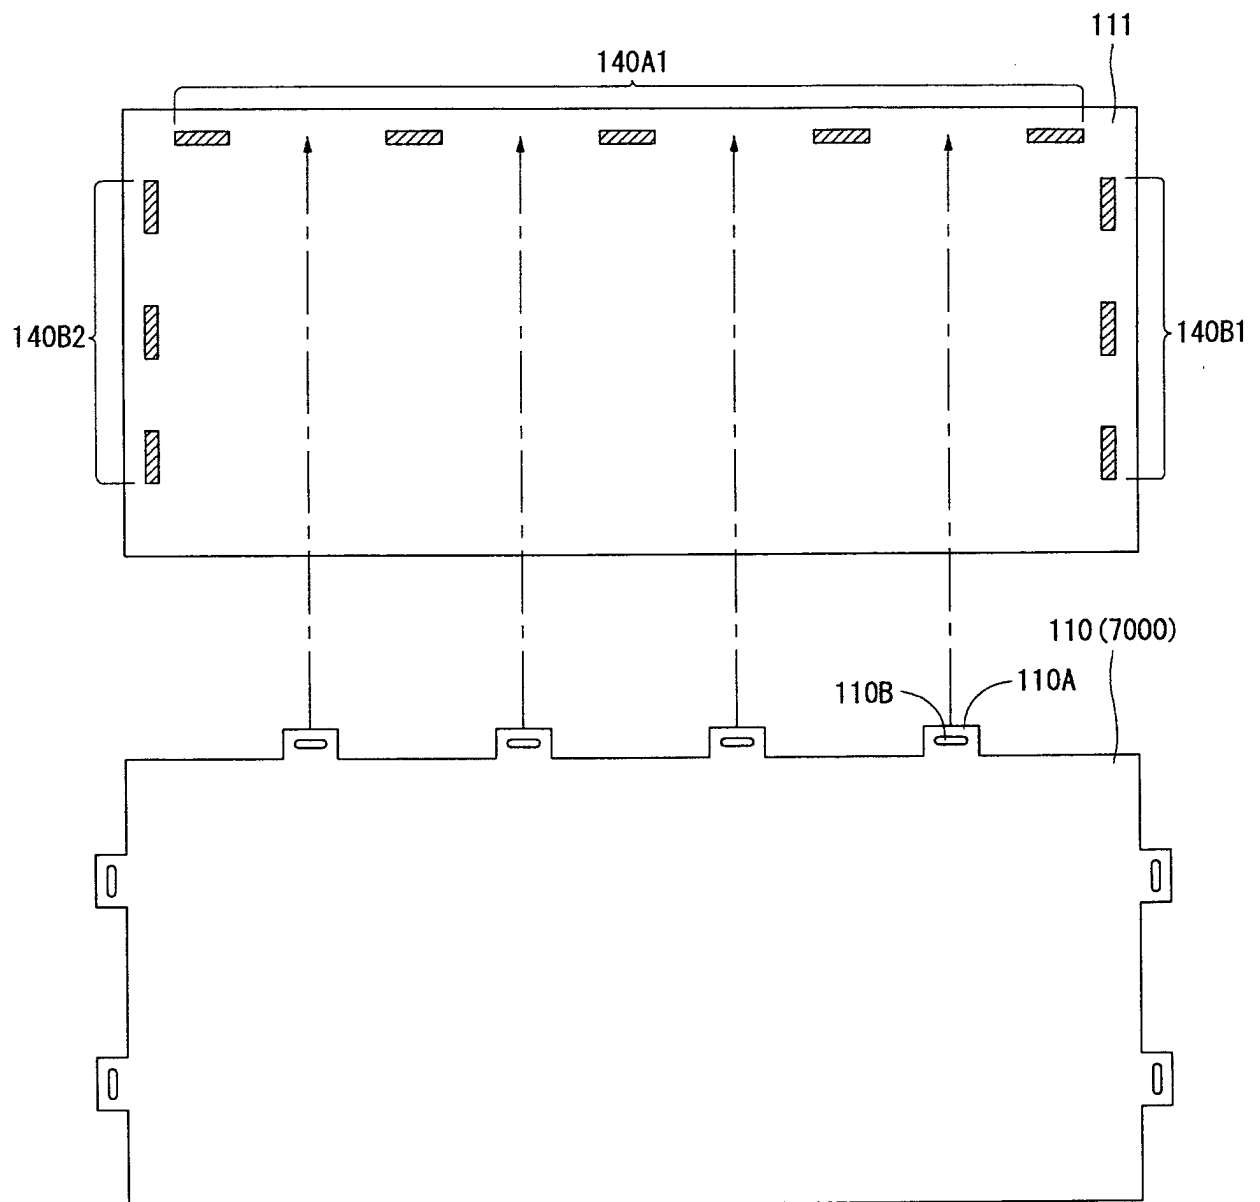


FIG. 100

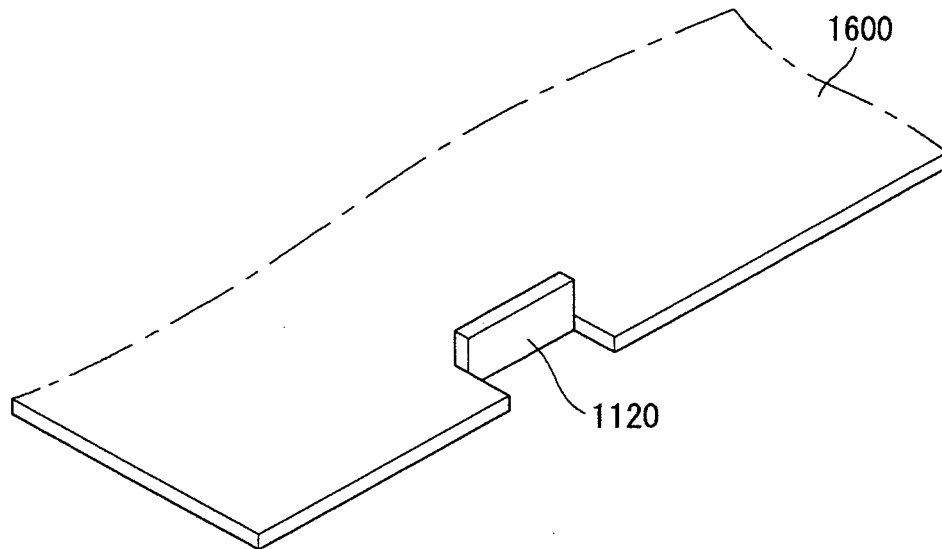


FIG. 101

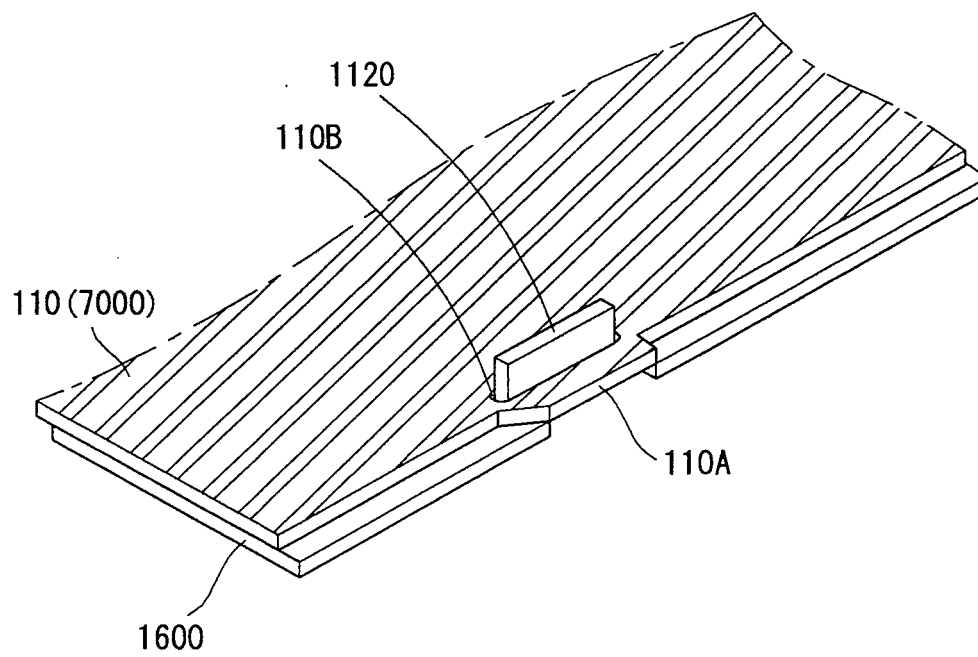


FIG. 102

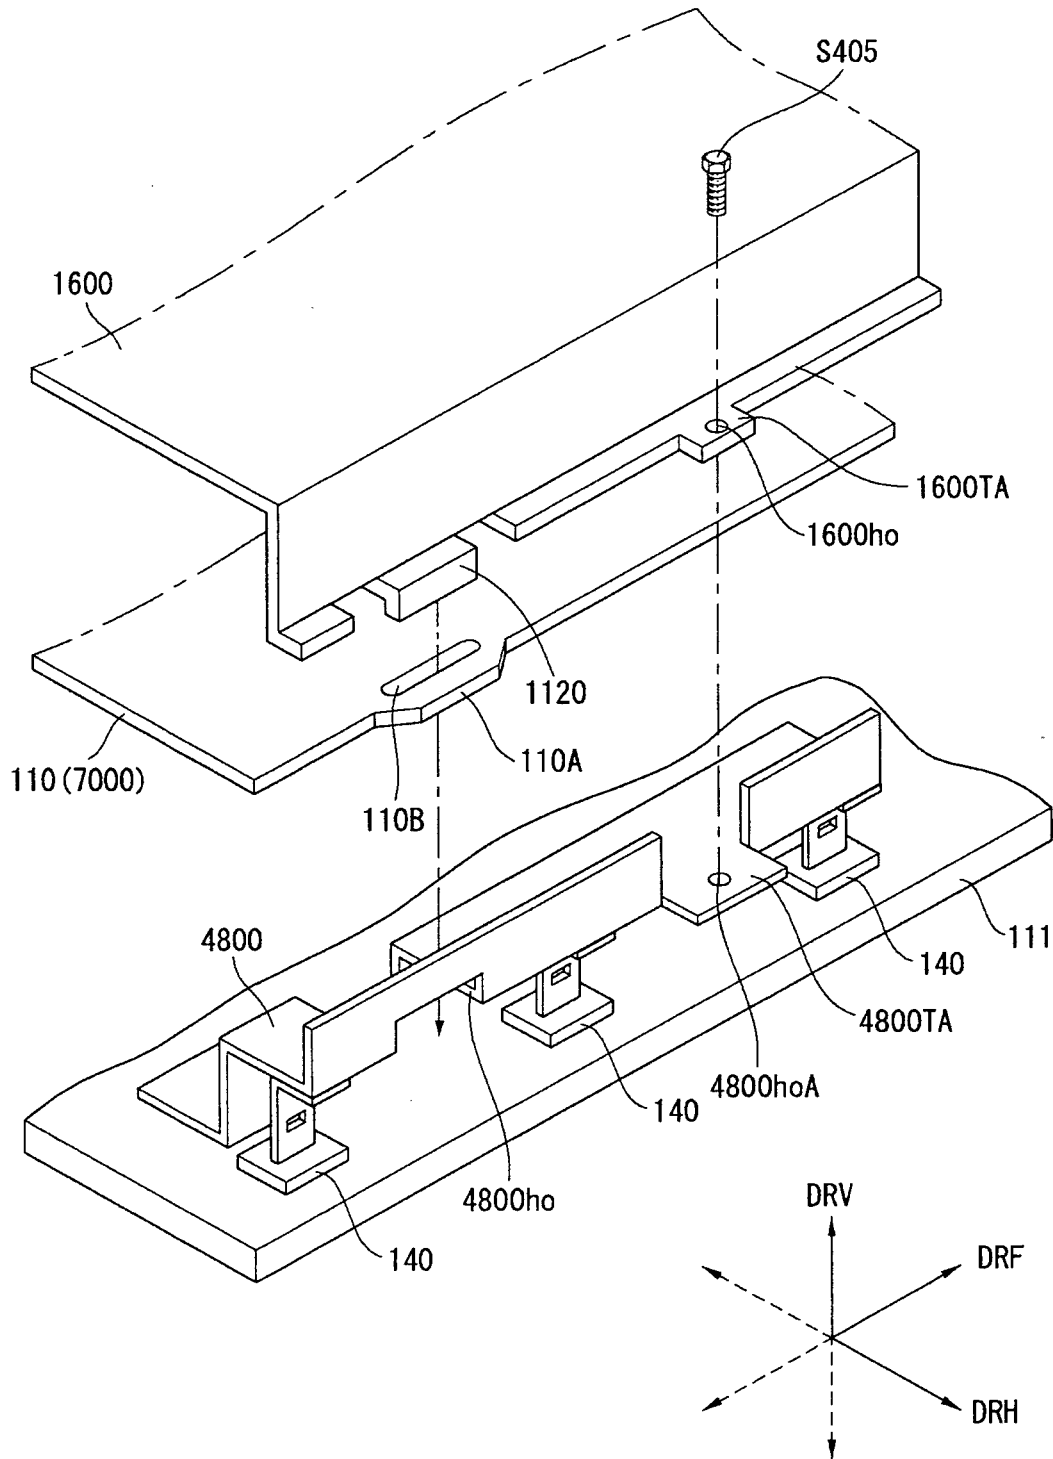


FIG. 103

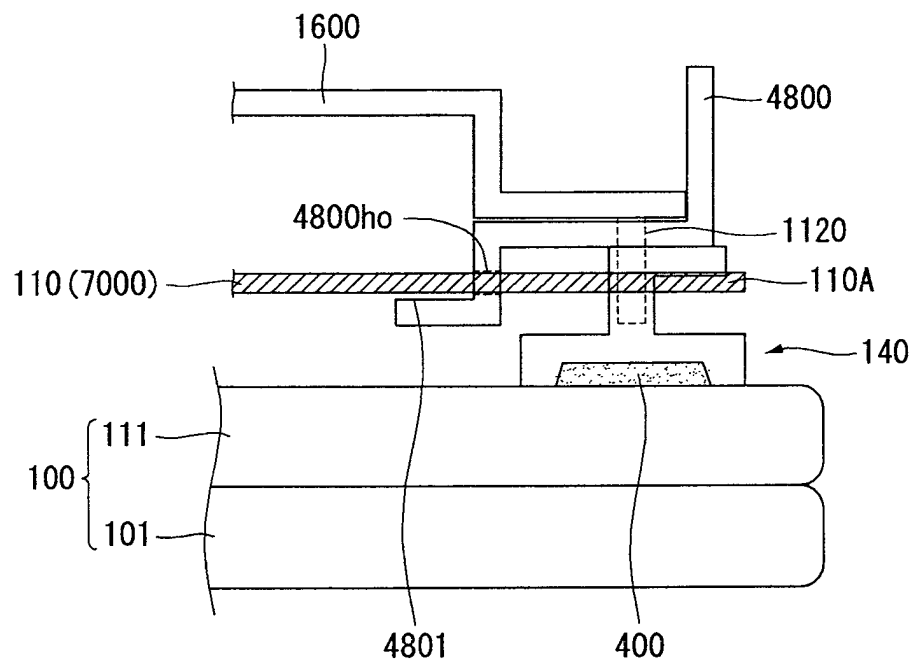


FIG. 104

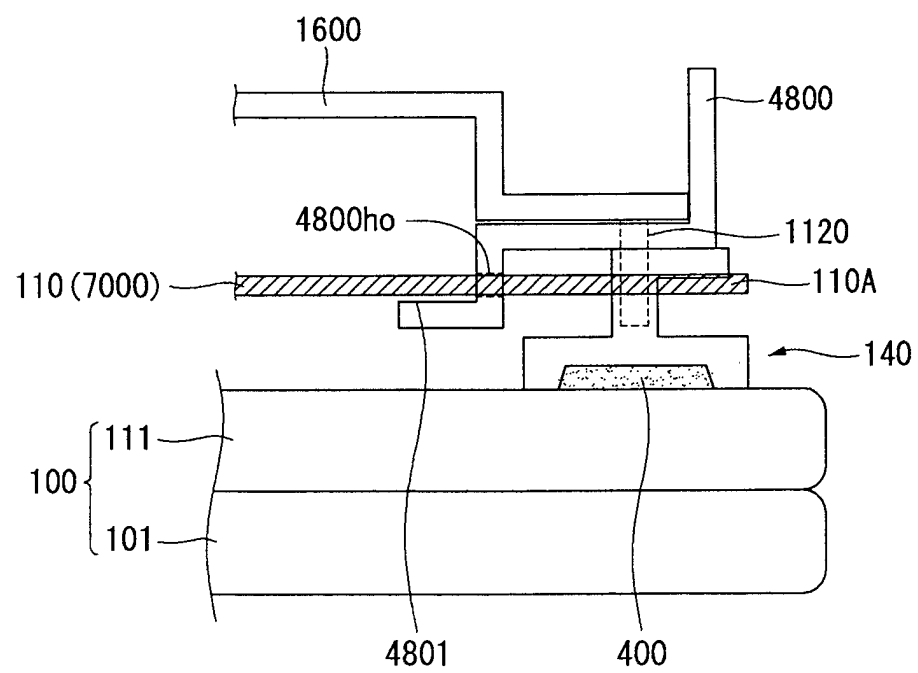


FIG. 105

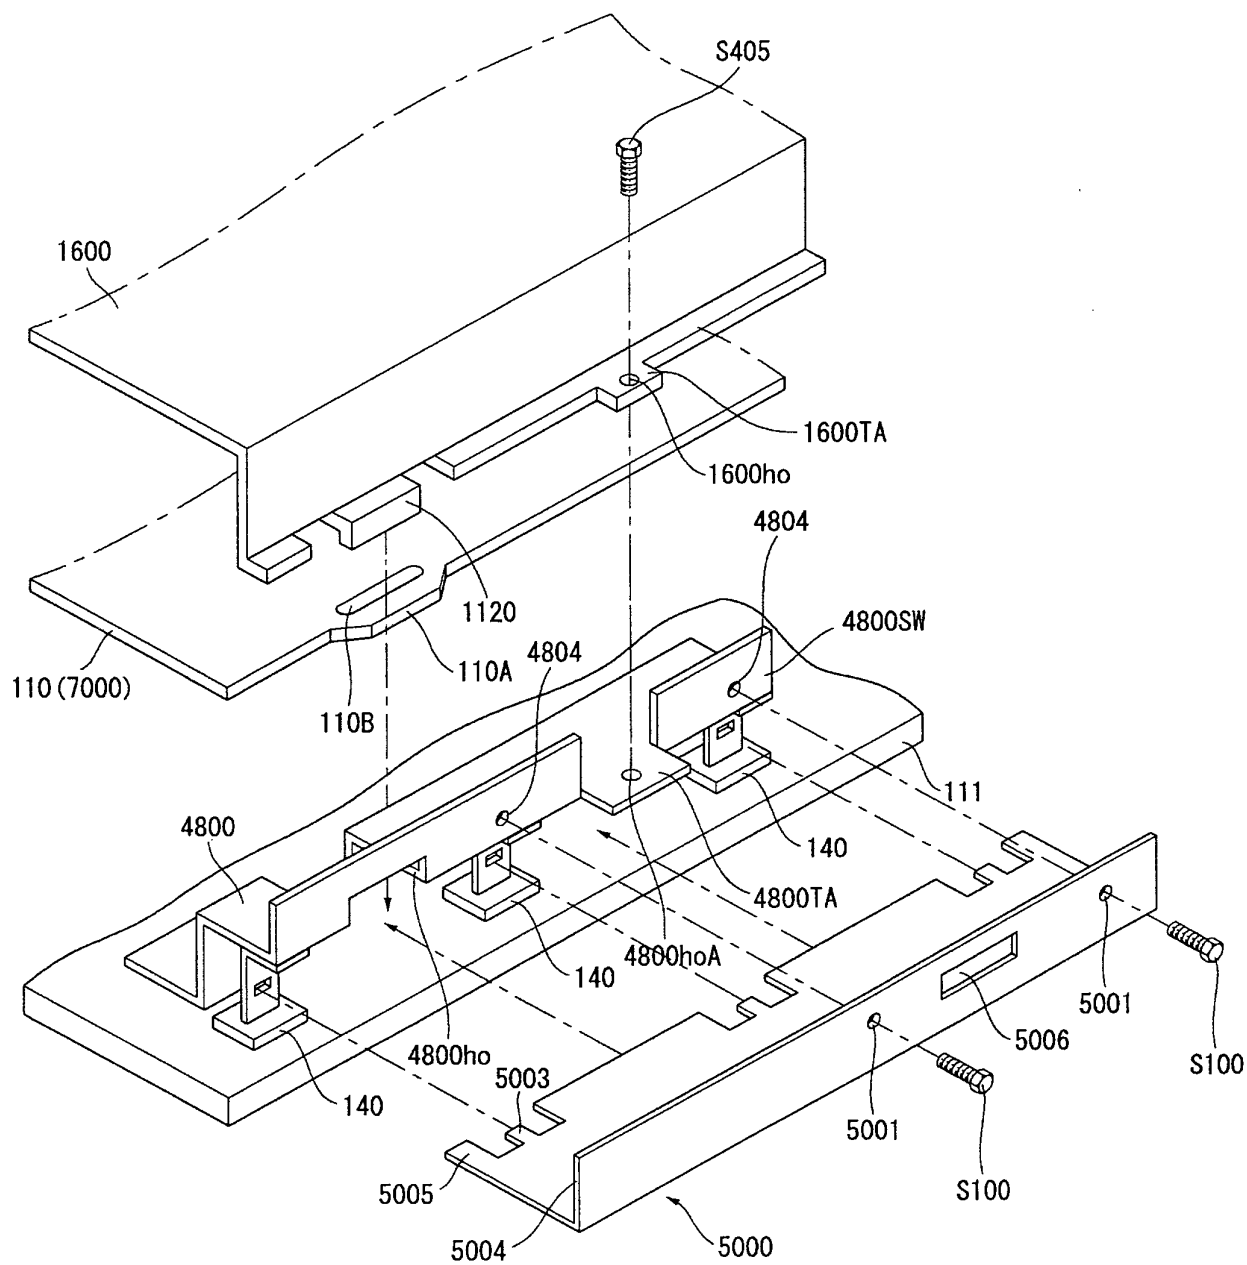


FIG. 106

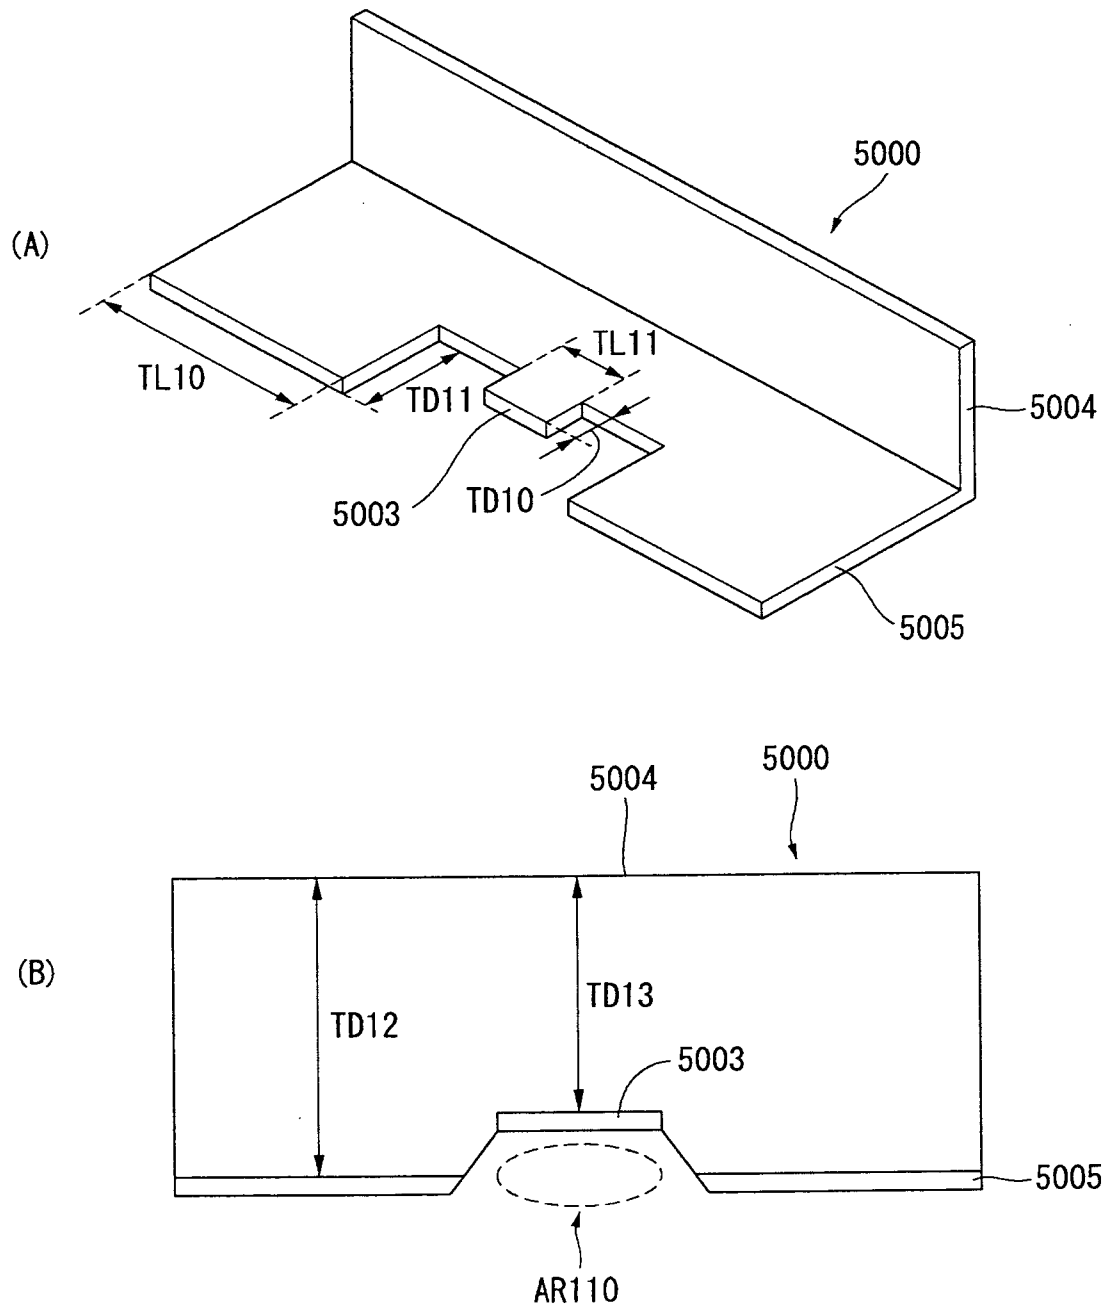


FIG. 107

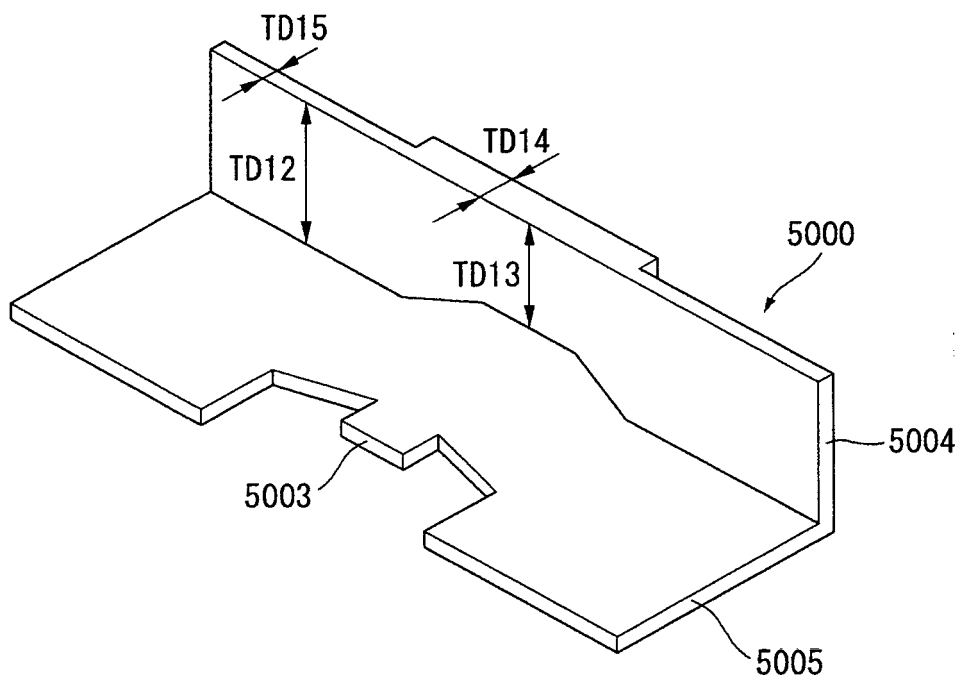


FIG. 108

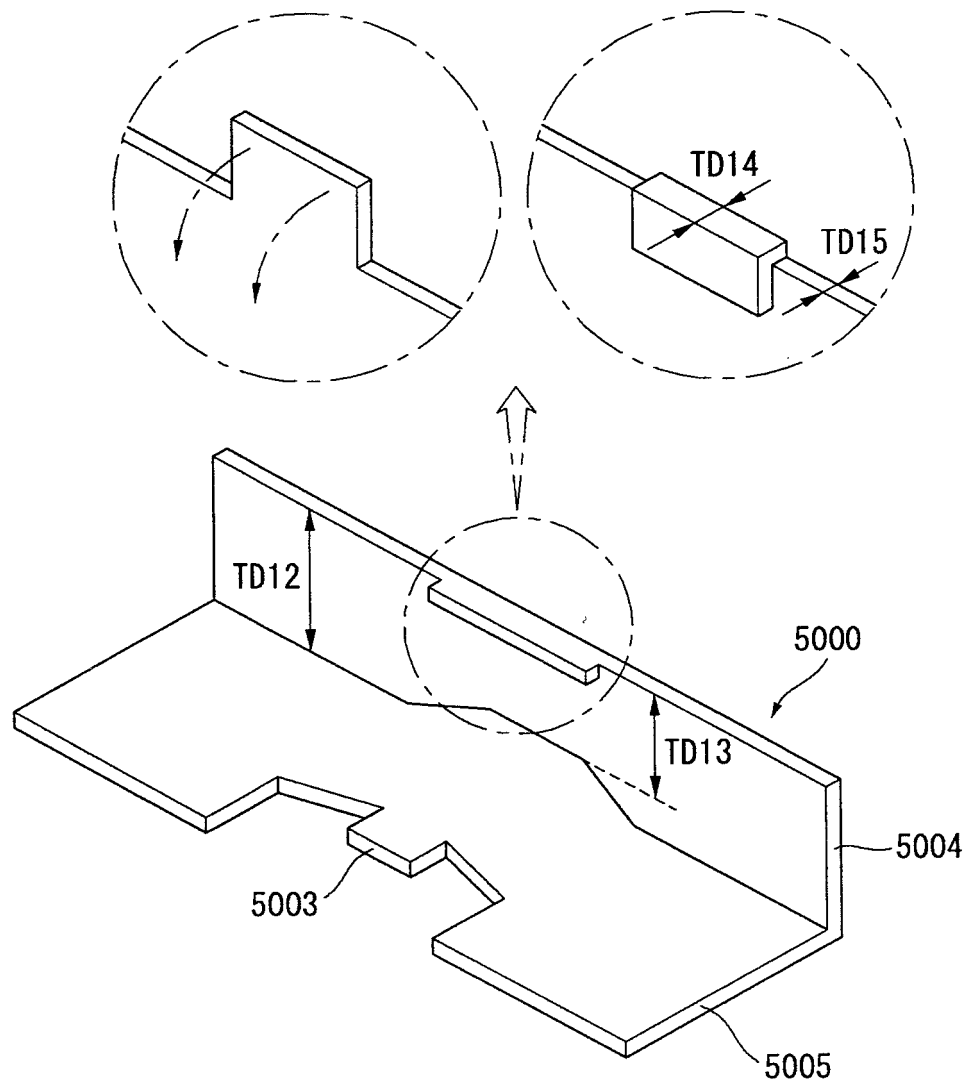


FIG. 109

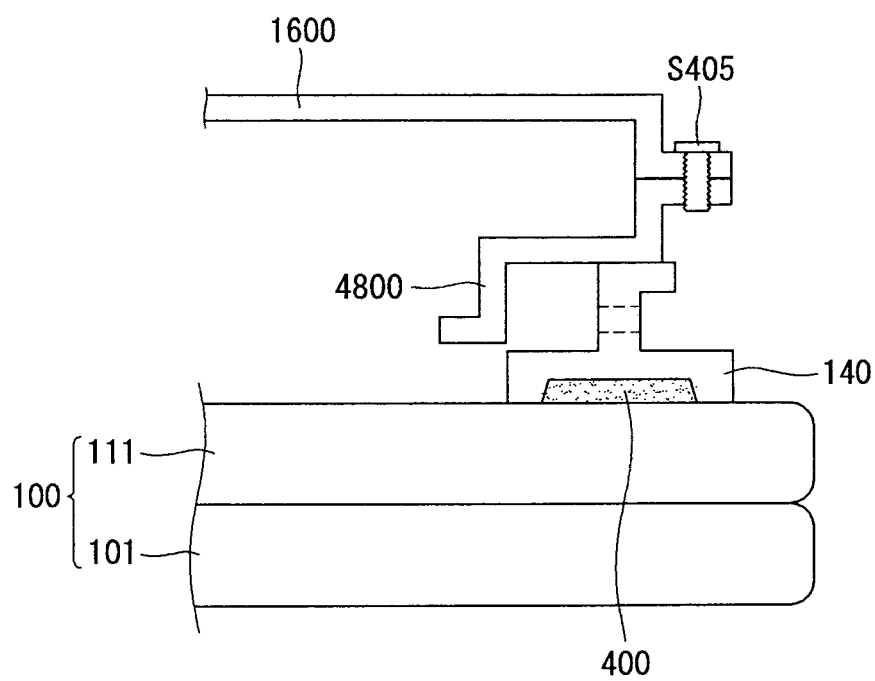


FIG. 110

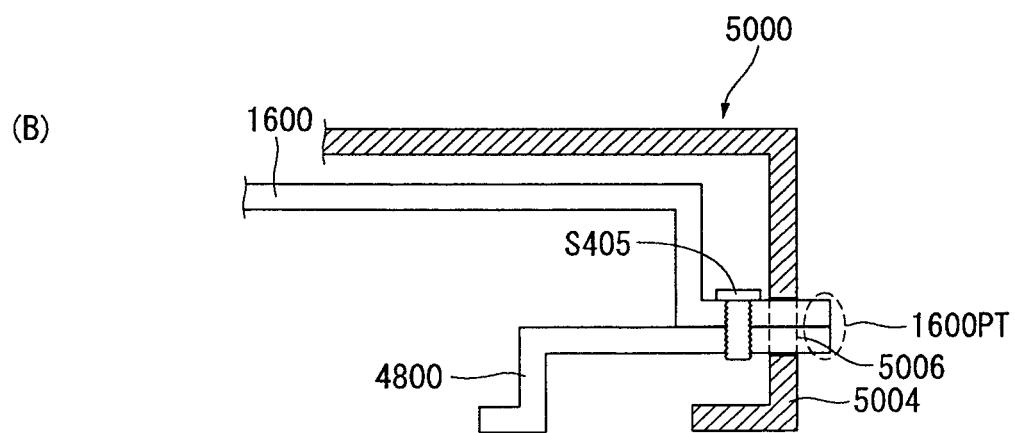
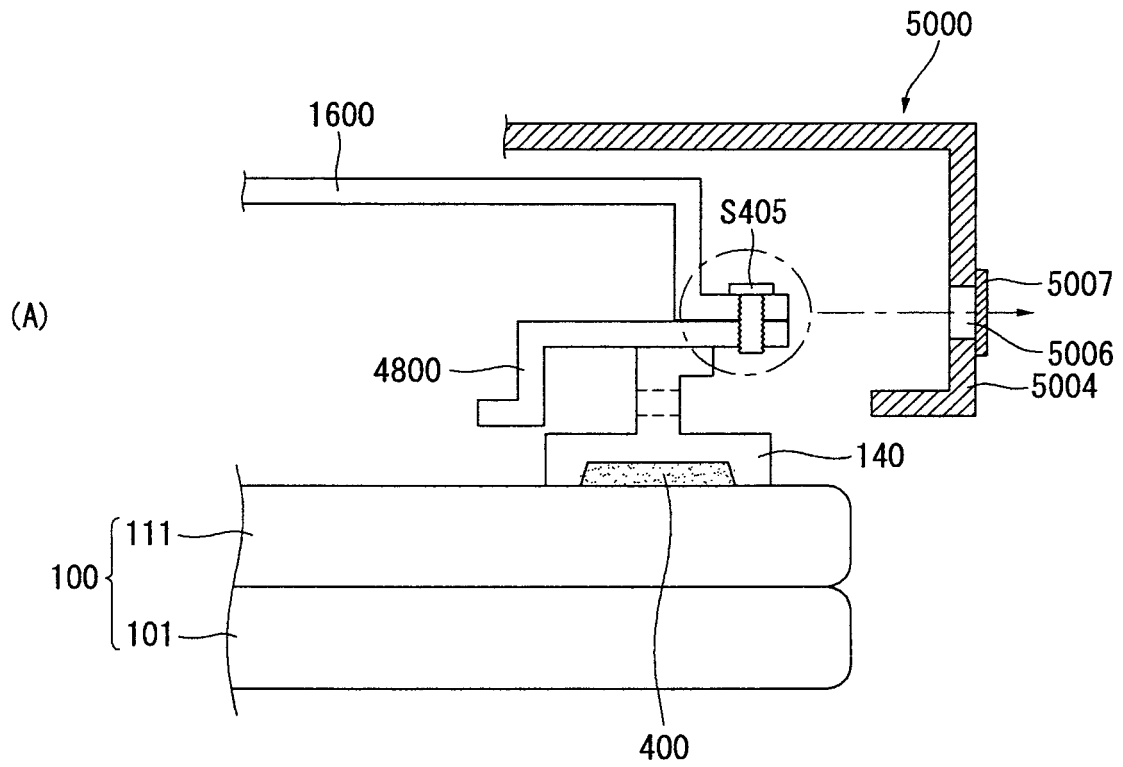


FIG. 111

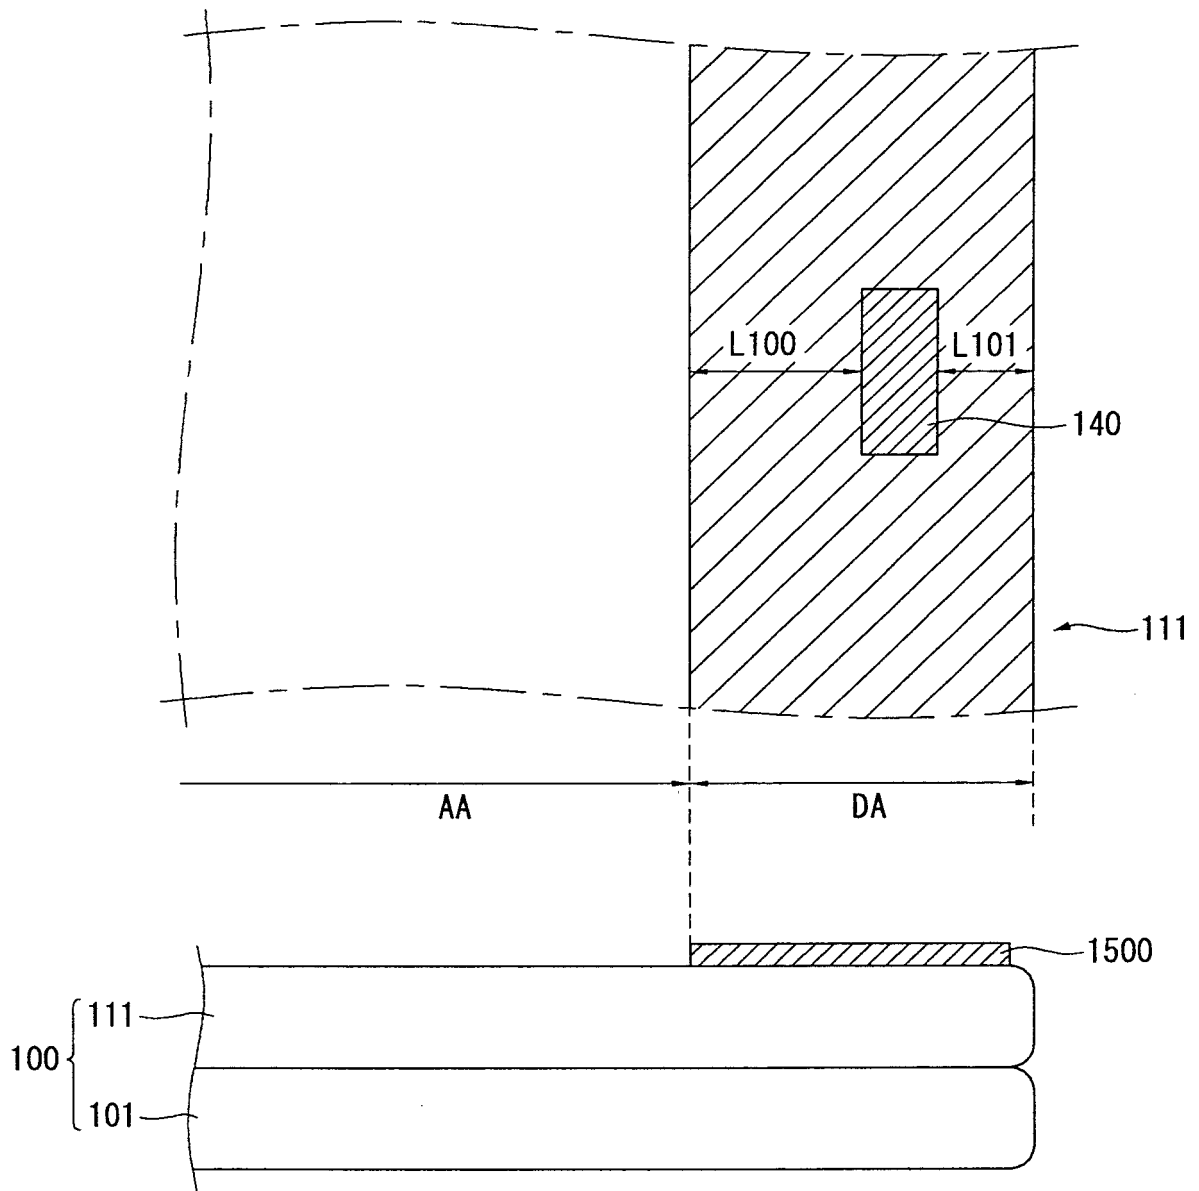


FIG. 112

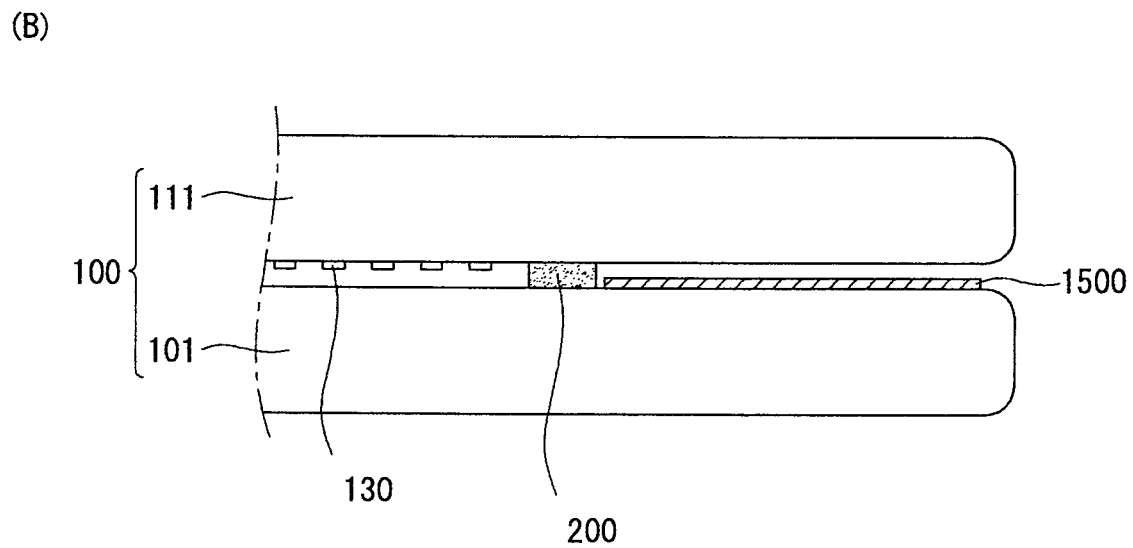
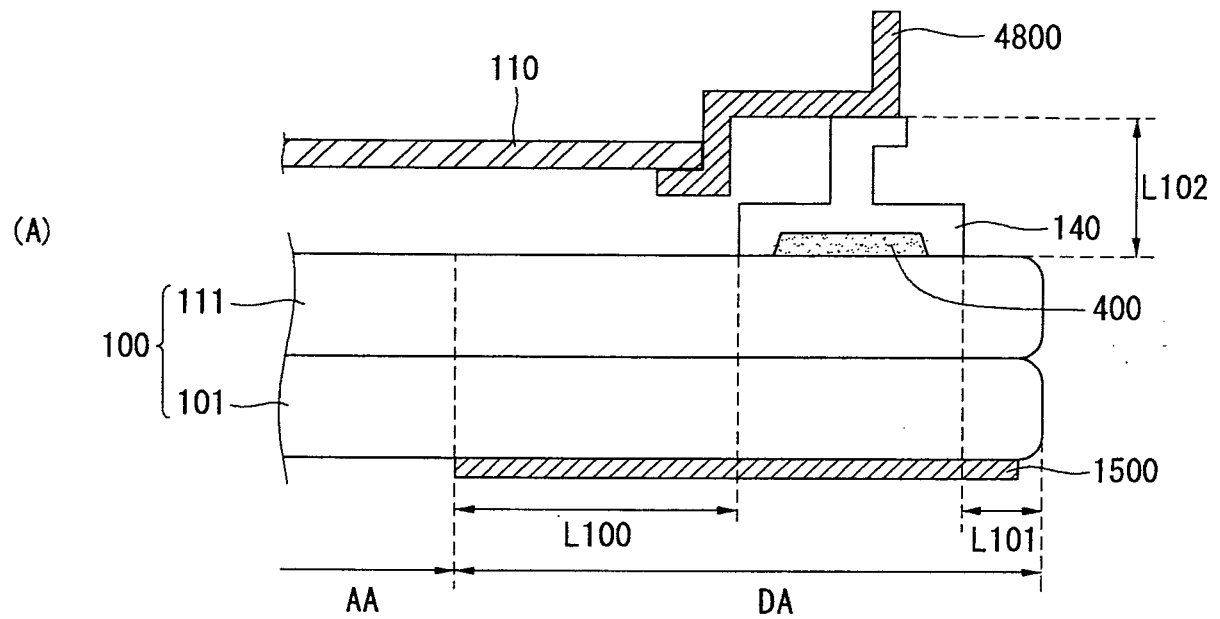


FIG. 113

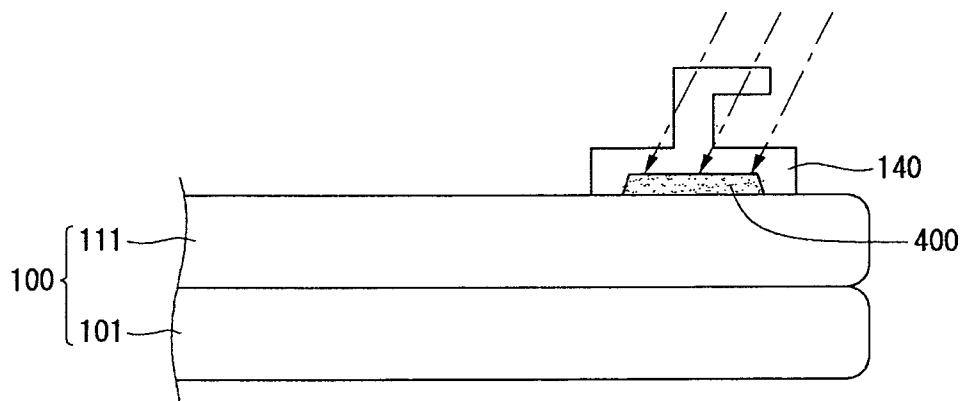


FIG. 114

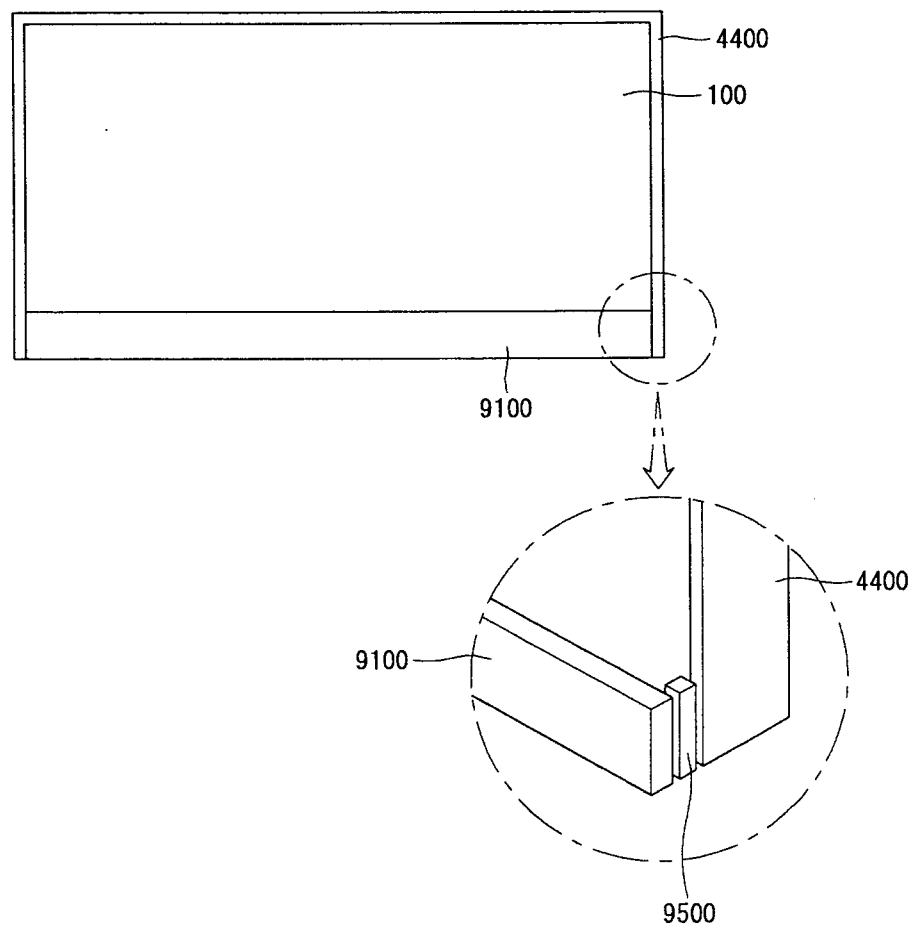


FIG. 115

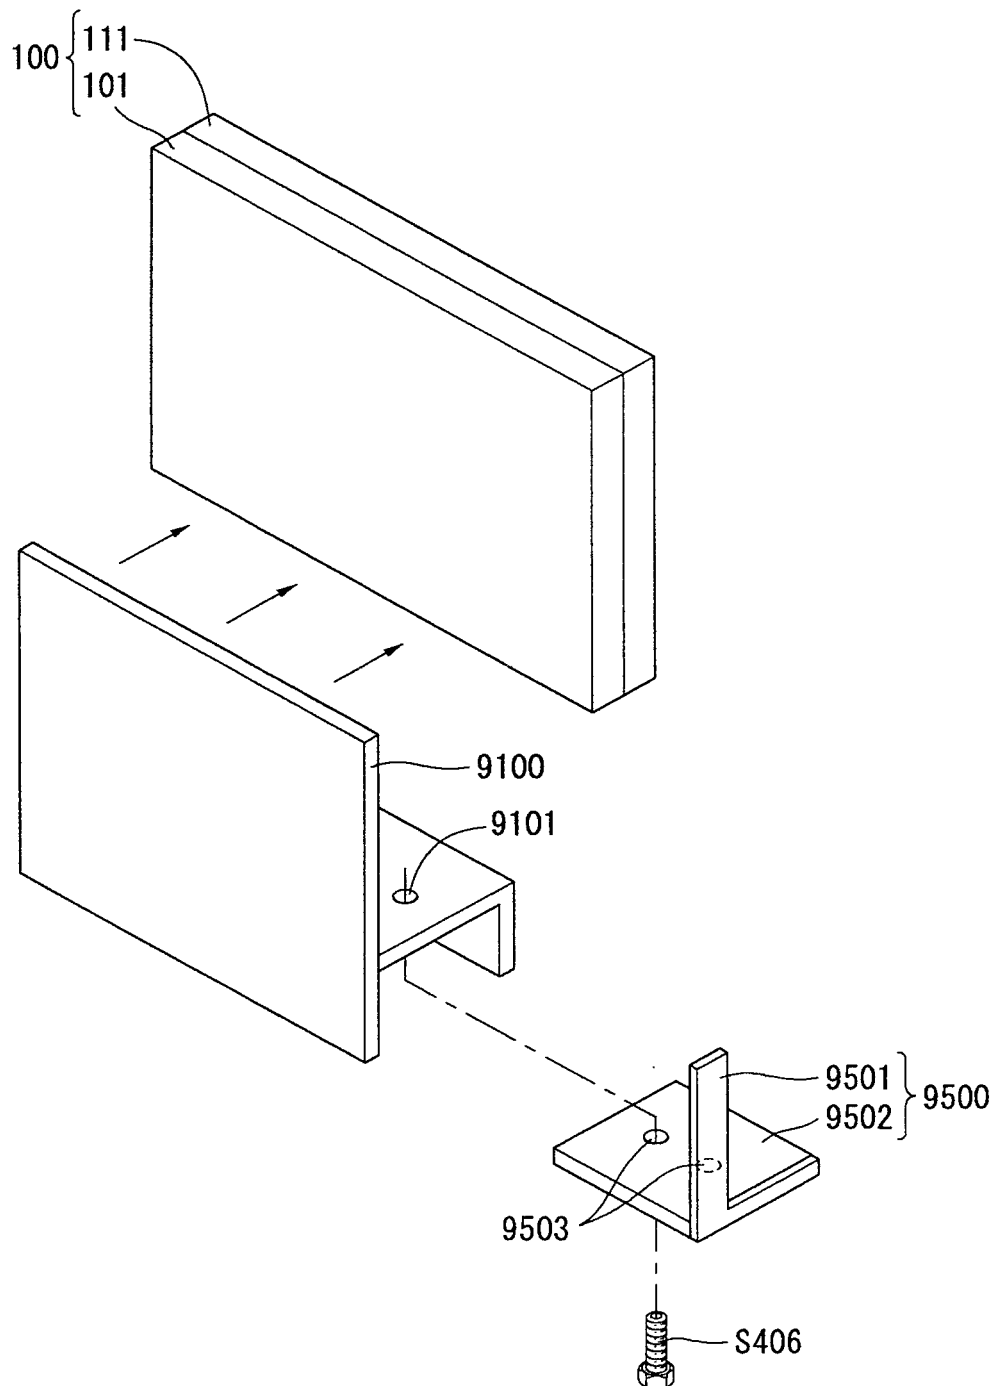


FIG. 116

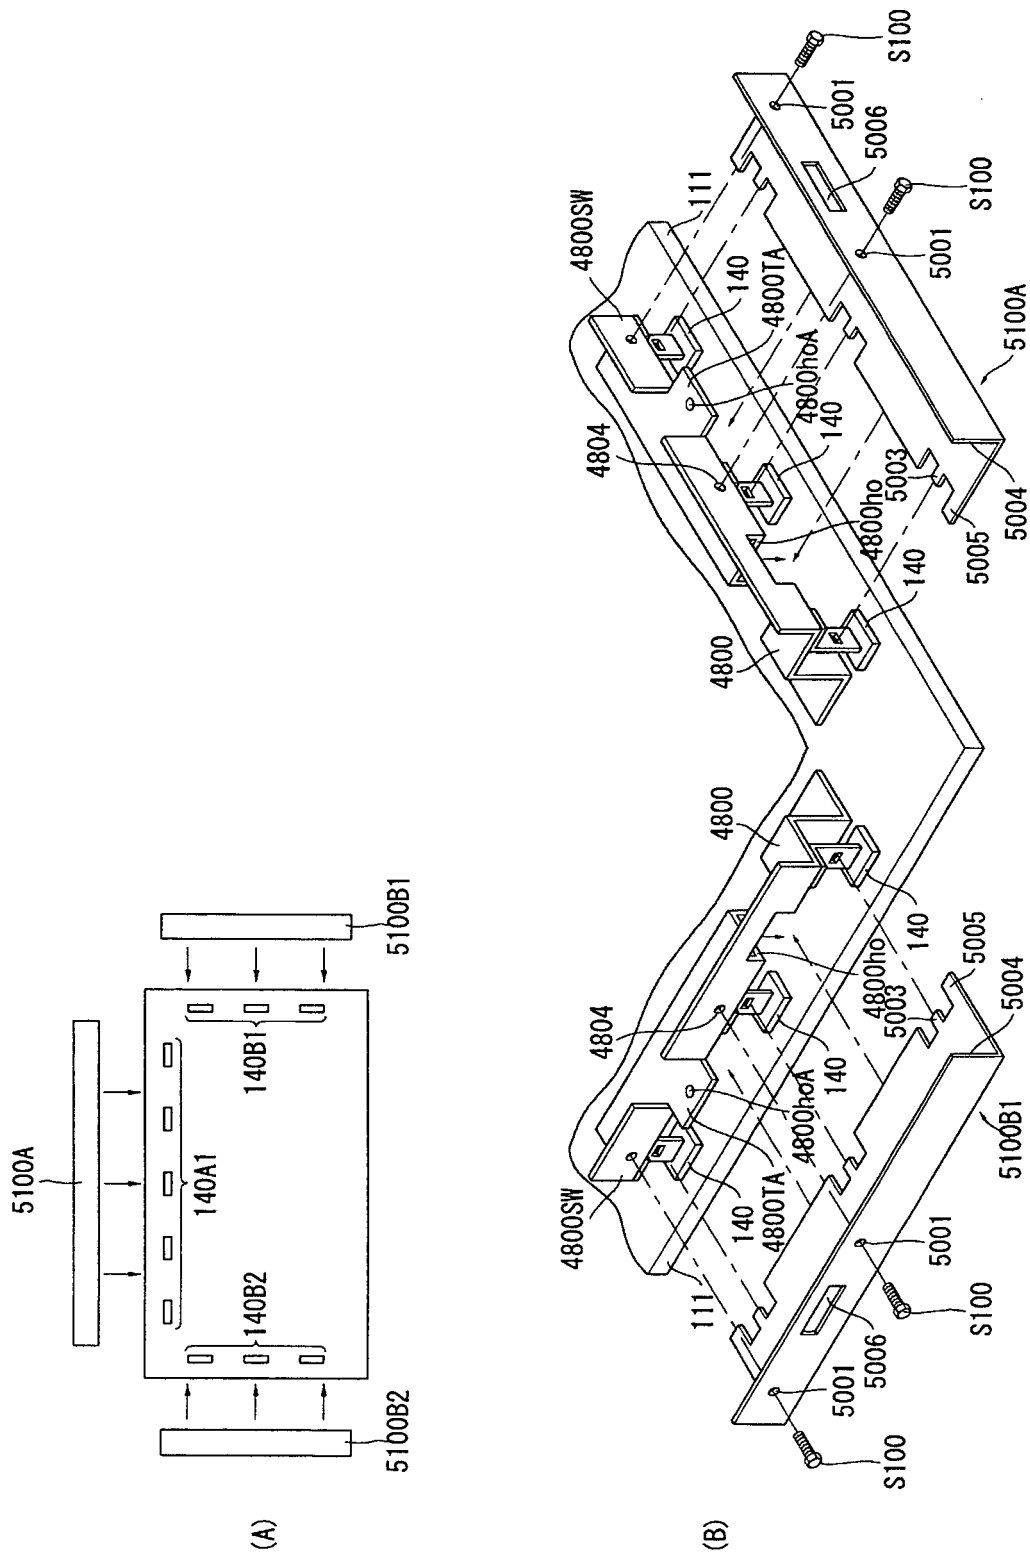


FIG. 117

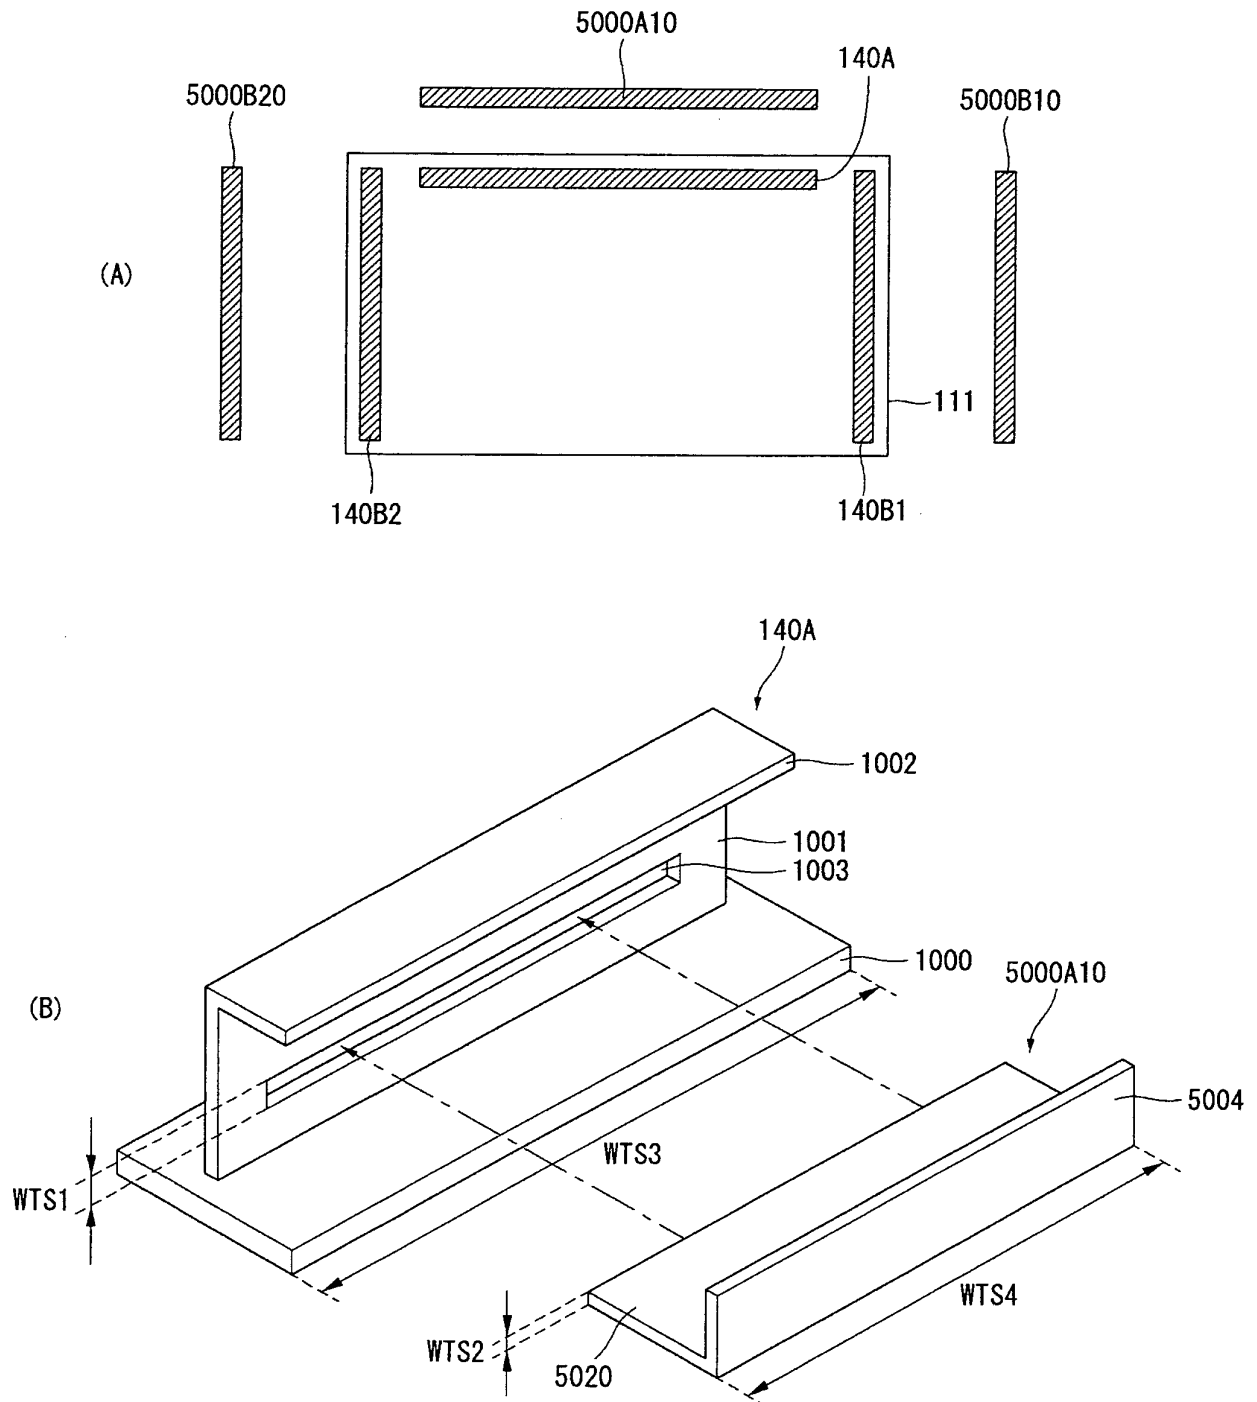


FIG. 118

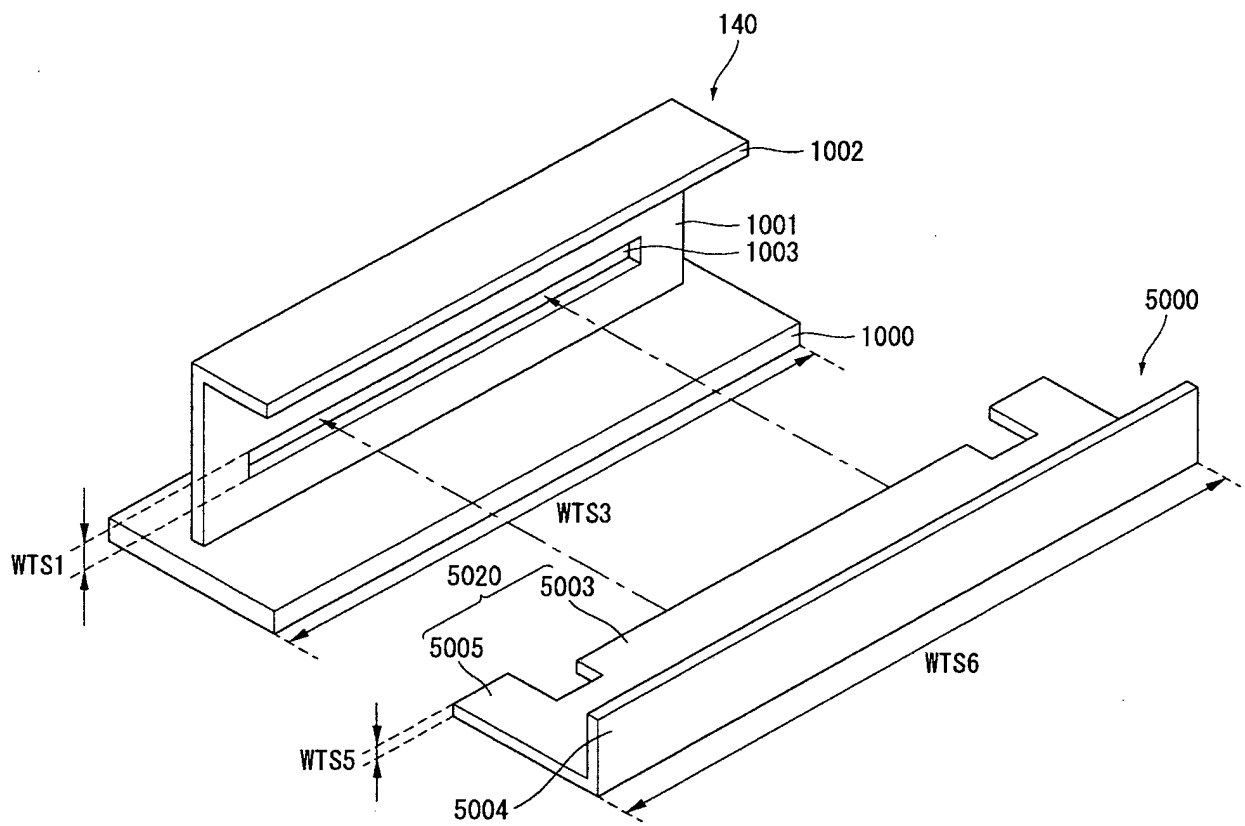


FIG. 119

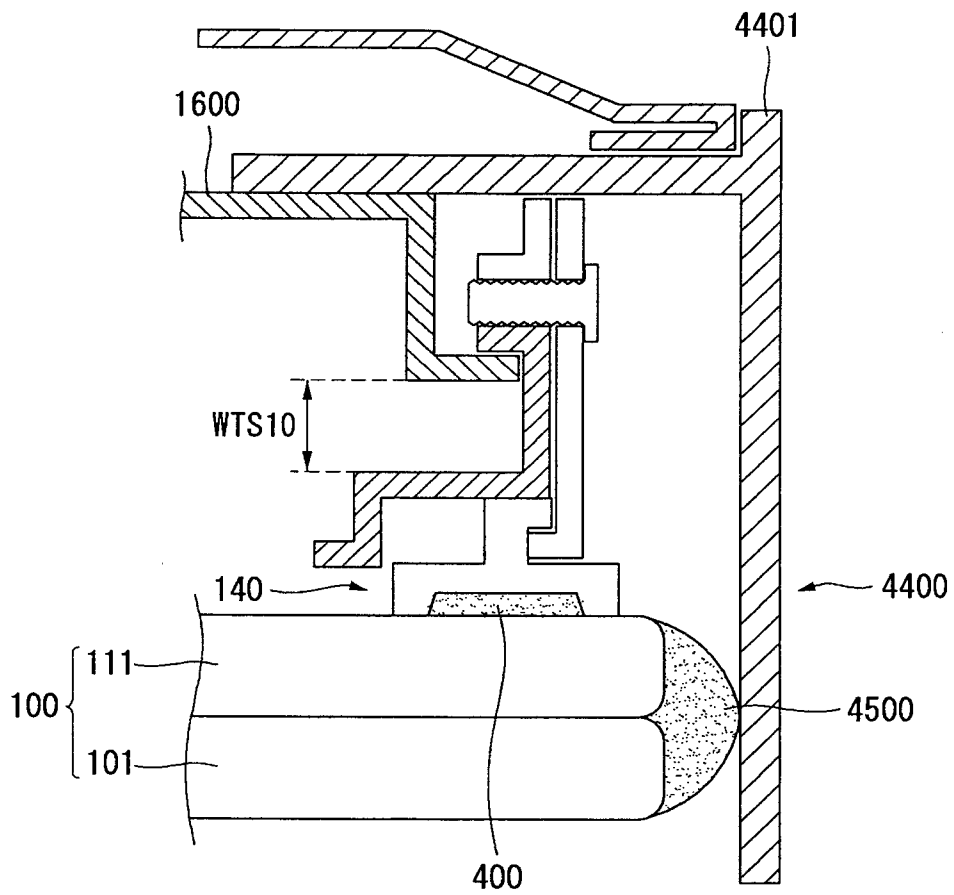


FIG. 120

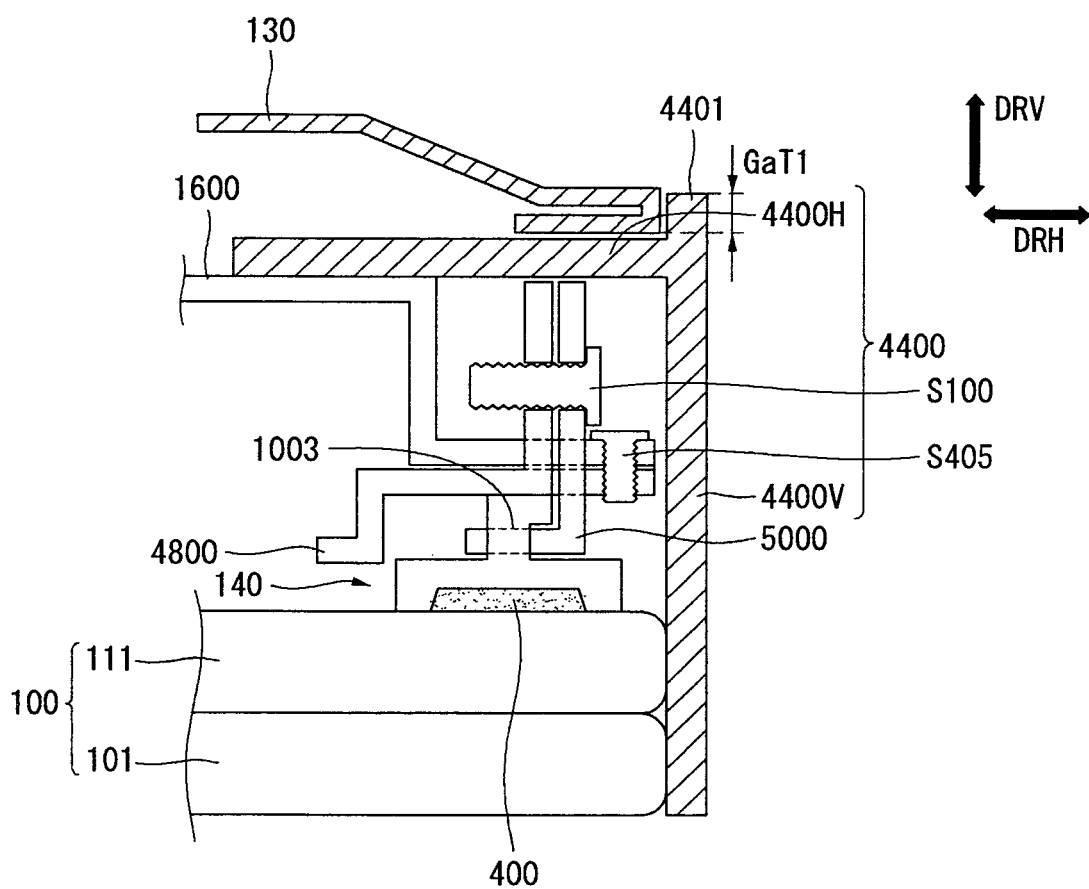


FIG. 121

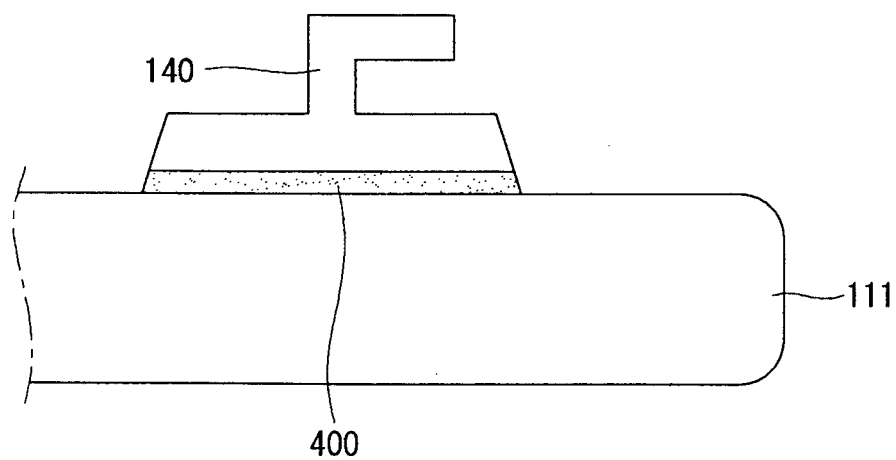


FIG. 122

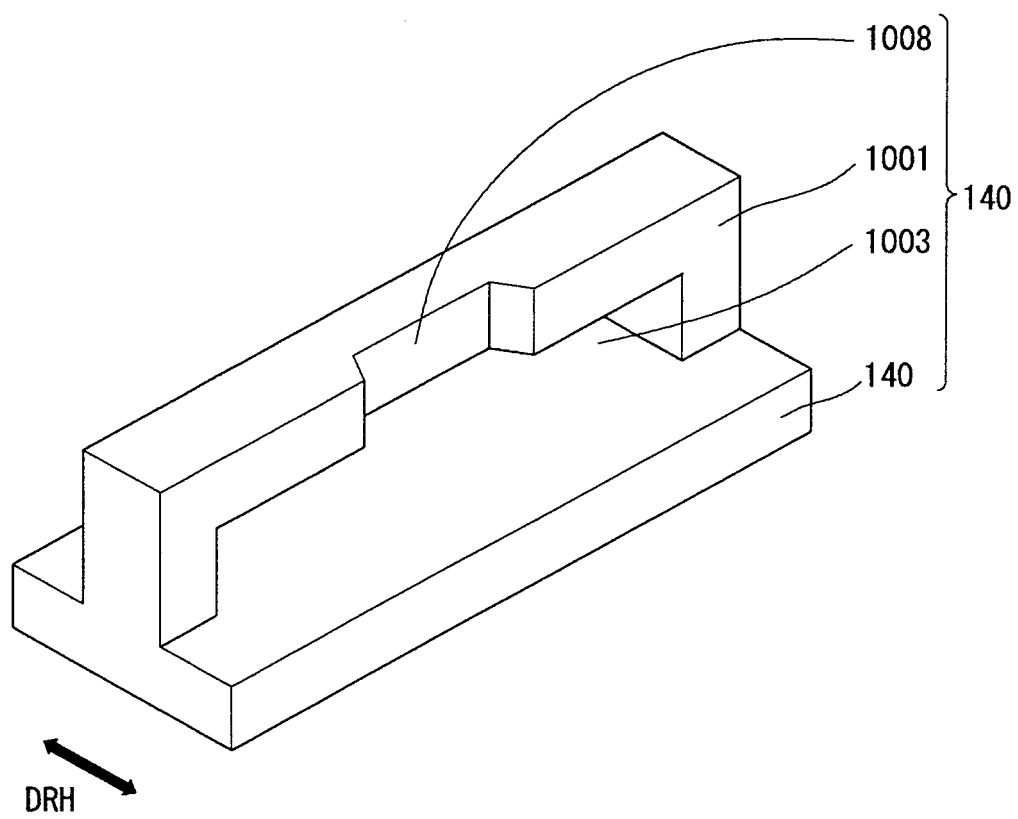


FIG. 123

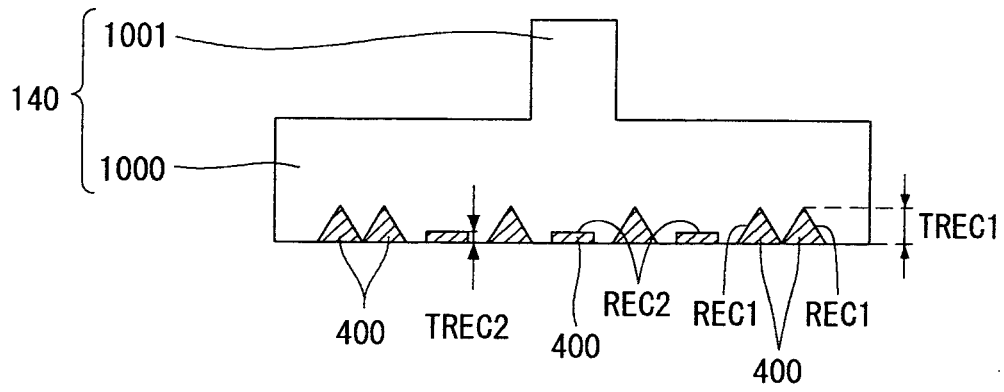


FIG. 124


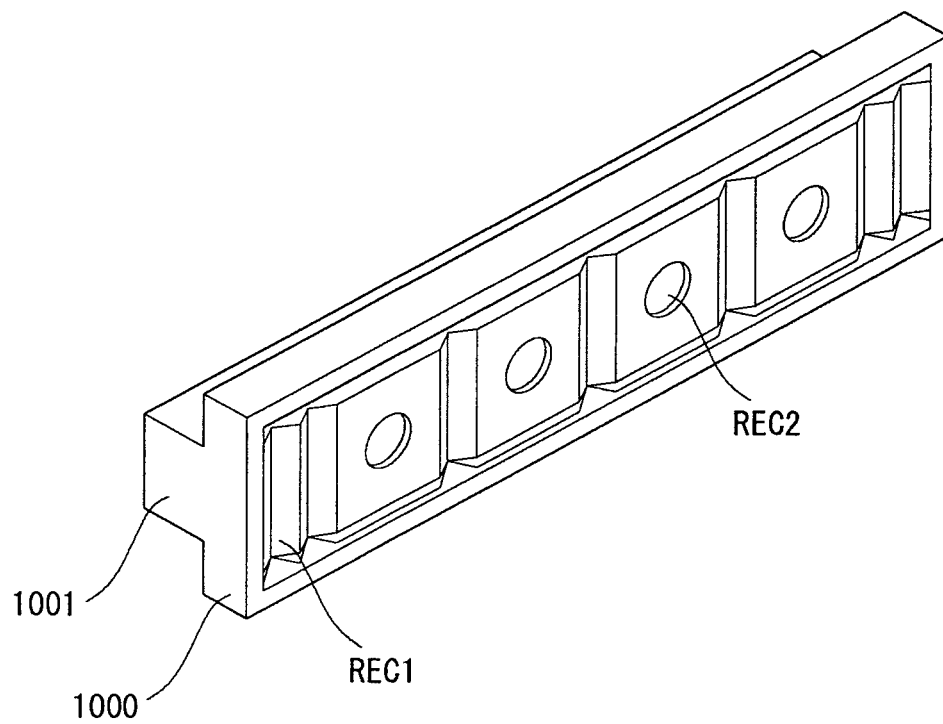


FIG. 125

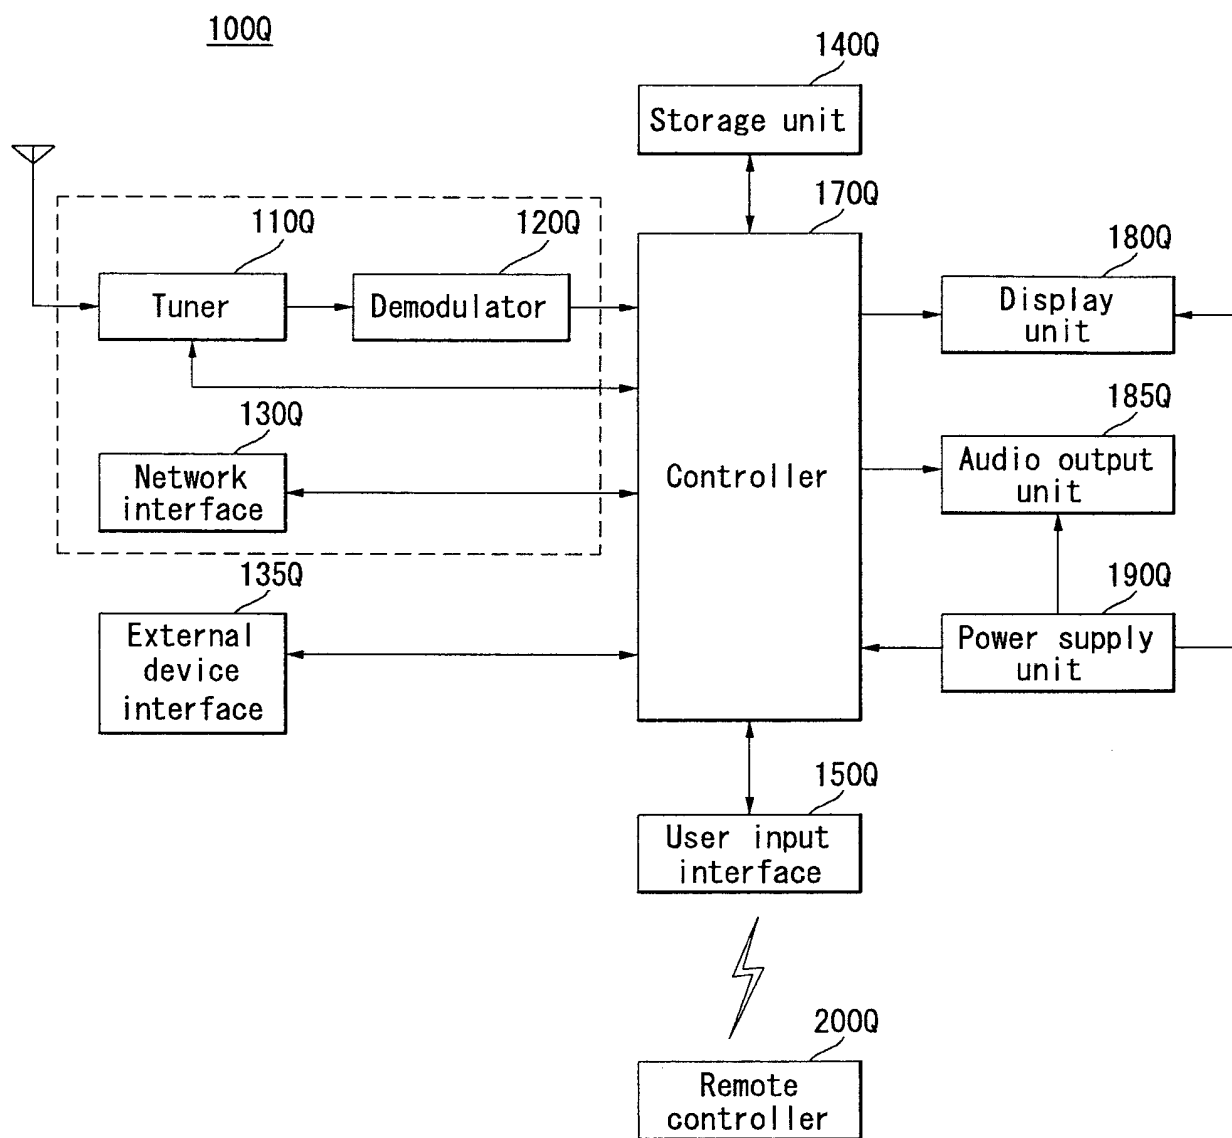

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20100182531 A1 [0006]
- US 20060033412 A1 [0007]
- EP 2026408 A1 [0008]

专利名称(译)	显示装置		
公开(公告)号	EP2866076B1	公开(公告)日	2018-04-04
申请号	EP2014003993	申请日	2011-10-28
申请(专利权)人(译)	LG电子公司.		
当前申请(专利权)人(译)	LG电子公司.		
[标]发明人	BYEON JONGHYUN KIM SUNGHWAN KIM YUNJOO KIM CHEOLSOO PARK SANGDON LEE MOUNGYOUB OH HYOUNGSUCK LEE DEOGJIN		
发明人	BYEON, JONGHYUN KIM, SUNGHWAN KIM, YUNJOO KIM, CHEOLSOO PARK, SANGDON LEE, MOUNGYOUB OH, HYOUNGSUCK LEE, DEOGJIN		
IPC分类号	G02F1/13 G02F1/1333 H05K5/00 H05K7/14		
CPC分类号	G02F1/133308 G02F2001/133314 G02F2202/28 G02F1/133514 G02F1/133528 G02F1/1339 G02F1/136213 G02F1/1368 G02F2201/123 H01L27/124 H05K5/0004 H05K5/0017 H05K5/03 H05K7/1438		
优先权	1020100106193 2010-10-28 KR 1020100106194 2010-10-28 KR 1020100106196 2010-10-28 KR 61/407916 2010-10-29 US 1020110003123 2011-01-12 KR 1020110003124 2011-01-12 KR 1020110004541 2011-01-17 KR 1020110004544 2011-01-17 KR 1020110029966 2011-03-31 KR 1020110082942 2011-08-19 KR 61/526273 2011-08-23 US 1020110093778 2011-09-18 KR 61/537520 2011-09-21 US		
其他公开文献	EP2866076A2 EP2866076A3		
外部链接	Espacenet		

摘要(译)

一种显示设备，包括：前面板和后面板，所述前面板和后面板彼此连接并且具有设置在所述第一面板和所述后面板之间的间隙中的多个液晶;多个第一支架，所述多个第一支架通过粘合剂粘附到所述后面板，每个第一支架在施加粘合剂的第一表面上具有凹部，以及从第二表面延伸的第一突起和从第一突起延伸的第二突起，第一和第二表面是相对表面，第一突起具有开口，至少一个连接支

架，其具有在第一方向上延伸的侧壁和沿第二方向延伸的多个第一突出部，所述第一和第二方向彼此垂直，所述突出部设置在所述第一突出部的开口中至少一个第二支架，所述至少一个第二支架被提供为与所述多个第一支架相邻并附接到所述至少一个连接支架，所述至少一个第二支架以及具有至少一个光学片，光导和多个发光二极管（LED）的光源，所述光源设置在所述框架和所述至少一个第二支架之间。

FIG. 1
(RELATED ART)

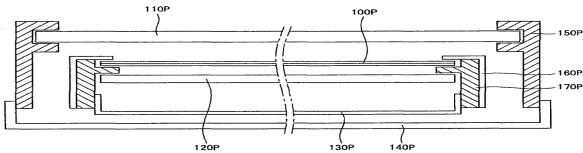


FIG. 2

