

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 January 2001 (25.01.2001)

PCT

(10) International Publication Number
WO 01/06309 A1

(51) International Patent Classification⁷: **G02F 1/1337**

(NL). VAN DE WITTE, Peter [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: **PCT/EP00/06587**

(22) International Filing Date: **11 July 2000 (11.07.2000)**

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

99202351.5

16 July 1999 (16.07.1999) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(74) Agent: **RAAP, Adriaan, Y.**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (national): CN, JP, KR, US.

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published:

— With international search report.


— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STALLINGA, Sjoerd** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **LIQUID CRYSTAL DISPLAY DEVICE**

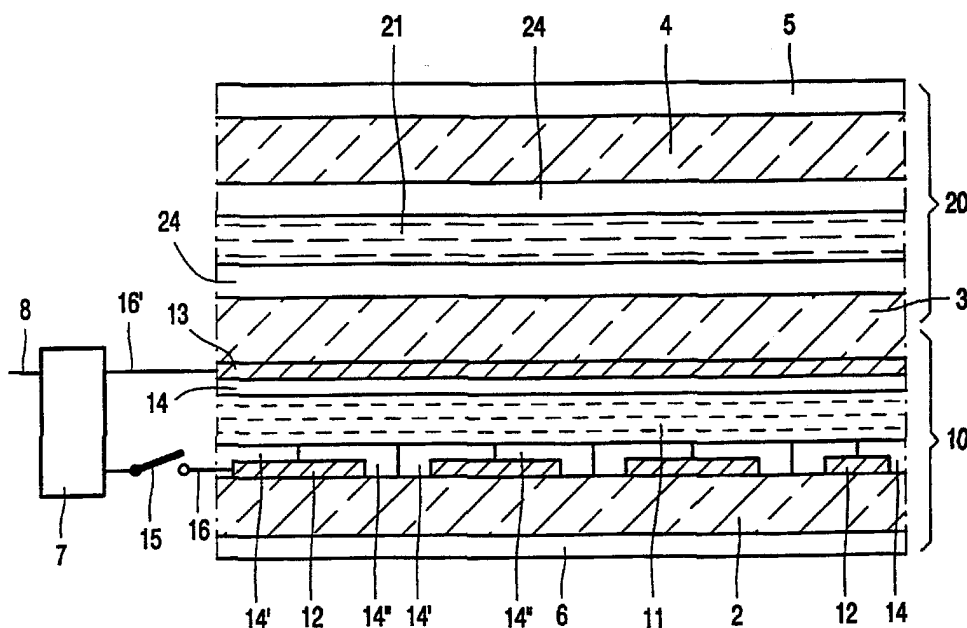

(57) Abstract: In a normally black double cell, grey scale enhancement is obtained by dividing pixels in the driving cell into sub-pixels which are rotated preferably through 180° with respect to each other.

WO 01/06309 A1

Liquid crystal display device

The invention relates to a liquid crystal display device having, between a polarizer and an analyzer, a first layer of twisted liquid crystal material with a twisted structure between two transparent substrates, with pixels being realized between the substrates, and a compensator layer. Such display devices are generally used in, for example,
5 automotive displays, but also in monitors, etc.

An example of such a display device is shown in, for example, USP 5,287,207. This patent shows a double cell in which a second cell functions as a compensator in order to obtain an optimum contrast. Although a satisfactory contrast is obtained in these
10 types of display devices upon perpendicular passage of the light, it appears that there is a considerable grey scale inversion in such a double cell, when viewed at an angle.

It is, inter alia, an object of the present invention to reduce or eliminate said grey scale inversion.

15 To this end, a display device according to the invention is characterized in that a pixel comprises at least two sub-pixels having the same twist and, viewed transversely to the substrates, twist angles which are rotated with respect to each other. The twist angles, viewed transversely to the substrates, are rotated substantially 180 degrees with respect to each other. The effects on the grey scale of one sub-pixel are then compensated, as it were,
20 by the effects of the other sub-pixel. Also in the case of rotations different from 180 degrees, an enhancement is obtained dependent on the type of usage (for example, in cockpit applications or in applications where a display device is viewed by different persons from two directions).

The twist angles are preferably in the range between 50 and 100 degrees.

25 A first preferred embodiment of a liquid crystal display device according to the invention is characterized in that the compensator layer has a twisted structure with a twist which is opposite to that of the layer of twisted liquid crystal material. The compensator layer preferably has a twist angle which is opposite to that of the layer of twisted liquid crystal material.

Further enhancements are possible by adding a retardation layer with an optical axis perpendicular to the compensator layer.

It is also possible to use negative birefringent materials such as discotic materials for the compensator layer.

5 These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

In the drawings:

10 Fig. 1 is a cross-section of a display device according to the invention,
Fig. 2 shows diagrammatically some parts of the display device according to the invention,

Fig. 3 shows diagrammatically different orientation directions in the display device of Fig. 1,

15 Figs. 4 and 5 show the luminance as a function of the viewing angle for a double cell without using and using, respectively, the measure according to the invention, while

Fig. 6 shows diagrammatically different orientation directions, and

20 Figs. 7 and 8 show the luminance again as a function of the viewing angle for a double cell in a display device with a compensation cell based on discotic material without using and using, respectively, the measure according to the invention.

The drawings are diagrammatic and not drawn to scale. Corresponding parts are generally denoted by the same reference numerals.

25

The display device of Fig. 1 comprises a first display cell 10 with a layer 11 of a liquid crystal material having a positive dielectric anisotropy between transparent supporting plates 2, 3. On the side of the liquid crystal material, electrodes 12, 13 defining, for example, a matrix of pixels are present on the supporting plates 2, 3. The pixels may be
30 driven directly via row and column electrodes (positive drive). In this example, the pixels are defined by overlapping portions of picture electrodes 12 and a counter electrode 13, in which the picture electrodes are provided with pixel voltages by switching elements (not shown) via row and column electrodes (active drive). The drive voltages (selection and data signals) are obtained, for example, by means of a drive circuit 7 which converts incoming information 8

into said drive voltages which are applied to the electrodes 12, 13 via the switching elements (not shown) (here diagrammatically shown by means of switch 15 in one of the connection lines 16, 16'). Layers 14 of an insulating material, which in this example also serve as orienting layers, are present on the layers 12, 13. The layers 14 give the liquid crystal molecules a twist angle Φ_1 at a voltage of 0 volt across the electrodes 12, 13. The twist angle Φ_1 is between 50° and 100° and, in this example, 90° .

The device further comprises a compensator layer, in this example, a second cell 20 with a second layer 21 of a liquid crystal material having, in this example, also a positive dielectric anisotropy between two transparent supporting plates 3, 4. The supporting plate 3 is chosen to be common for both cells 10, 20, but this is not strictly necessary, although it simplifies the manufacture in which also the double cell maintains a small total thickness. Layers 24 for insulation and orientation are present on the supporting plates 3, 4. The liquid crystal material 21 and the orienting effect of the layers 24 are chosen to be such that the liquid crystal molecules acquire a twist angle Φ_2 opposed to Φ_1 . The direction of orientation in this example is the same for the layers 14, 24. The cells 10 and 20 are situated between a polarizer 6 and an analyzer 5 whose directions of polarization are mutually crossed perpendicularly.

According to the invention, parts 14', of one orientation layer within a pixel are provided in such a way (for example, via masked rubbing or vapor deposition) that the direction of orientation is substantially 180° different for the liquid crystal molecules in the two sub-pixels. This is further shown in Fig. 2 in which the polarizer 6, parts 14', of an orientation layer on the supporting plate 2, the orientation layers 14, 24 on the supporting plate 3, the orientation layer 24 on the supporting plate 4 and the analyzer 5 are shown diagrammatically. The directions of orientation of the parts 14', of the orientation layer on the supporting plate 2, the orientation layers 14, 24 on the supporting plate 3 and the orientation layer 24 on the supporting plate 4 are denoted by the reference numerals 27', 27'', 27, 28 and 29, respectively. The directions 27, 28 cross each other substantially perpendicularly.

The absorbing axis 26 of the polarizer 6 extends at an angle of 0° (180°) to the orientation direction 27' (27'') in this example. Also other angles between the axis 26 and the direction 27 are possible. The wall orientation of the layers 14, 24 is chosen to be such that the director in the center of the cell 10 (at 0 volt) is perpendicular to the director in the center of the cell 20. Due to the division thus chosen, two twist angles Φ_1 are introduced in sub-pixels of the cell 10, which angles, viewed transversely to the substrates, are rotated through substantially 180 degrees with respect to each other. This is shown diagrammatically in Fig.

3. The twist angles of the sub-pixels are determined by orientation directions 27', 27 and 27'',
27 for the cell 10. In one sub-pixel, polarized light (polarized in the direction 26 of
polarization of polarizer 6) is twisted through an angle Φ_1 from direction 27' to direction 27
at 0 volt, and in the other sub-pixel from direction 27'' to direction 27. In the second cell 20
5 (twist angle $-\Phi_1$), the directions of polarization for both sub-pixels are twisted back through
the same angle from direction 28 (parallel to direction 27) to direction 29, so that it does not
pass the analyzer 5 with the pass direction 25 (normally black).

For the grey scales as a function of the viewing angle of this double cell, it
now holds that it is composed, as it were, from those of the two sub-pixels. Since these are
10 symmetrically situated with respect to each other, a symmetrical characteristic is obtained.
This is shown in Figs. 4 and 5. Fig. 4 shows the characteristic curve of the luminance as a
function of the viewing angle for a double cell without said measure (with a twist angle of
60° and $d\Delta n = 330$ nm) for different drive voltages. Grey scale inversion already starts at a
viewing angle of 20° and occurs for all grey values. Fig. 5 shows this characteristic curve for
15 a double cell, using said measure. Grey scale inversion now starts at viewing angles of more
than 50° and then only for some grey values.

In the device shown diagrammatically in Fig. 6, the twist angle Φ_1 of the cell
10 is 90° and $d\Delta n = 400$ nm. In this example, the second cell 20 has a second layer 21 of a
liquid crystal material with a negative dielectric anisotropy. The orienting effect of the layers
24 is chosen to be such that the liquid crystal molecules acquire a twist angle of $-\Phi_1$. Such a
cell 20 is obtained, for example, by choosing a discotic liquid crystalline material for the
liquid material. In this example, the layer 21 is liquid but it may also consist of a polymerized
liquid crystalline material. The orientation layers 24 are adapted in such a way that the
directors of the discotic molecules acquire an orientation direction 28 at the area of substrate
25 3, transverse to the orientation direction 27 of the (calamatic) molecules at the area of
substrate 3.

Fig. 7 shows for this double cell the luminance as a function of the viewing
angle for a double cell comprising a compensation cell 20 which is based on a discotic
material, without using said measure, and for different drive voltages, and Fig. 5 shows the
30 characteristic curve for such a double cell, using the measure according to the invention.

The invention is of course not limited to the examples shown. For example,
the compensation cell 20 may comprise a foil of polymerized liquid crystal with a twisted
(director) structure instead of a liquid crystal material.

In summary, the invention yields an improvement of the grey scale in "normally black" double cells by dividing a pixel in the cell to be driven into sub-pixels which are rotated preferably through 180° with respect to each other.

The invention resides in each and every inventive characteristic feature and
5 each and every combination of characteristic features.

CLAIMS:

1. A liquid crystal display device having, between a polarizer and an analyzer, a first layer of twisted liquid crystal material with a twisted structure between two transparent substrates, with pixels being realized between the substrates, and a compensator layer, characterized in that a pixel comprises at least two sub-pixels having the same twist and, viewed transversely to the substrates, twist angles which are rotated with respect to each other.
2. A liquid crystal display device as claimed in claim 1, characterized in that, the twist angles have a value of between 50° and 100° .
3. A liquid crystal display device as claimed in claim 1, characterized in that viewed transversely to the substrates, the twist angles are rotated through substantially 180° with respect to each other.
4. A liquid crystal display device as claimed in claim 1, characterized in that the compensator layer has a twisted structure with a twist which is opposite to that of the layer of twisted liquid crystal material.
5. A liquid crystal display device as claimed in claim 4, characterized in that the compensator layer has a twist angle which is opposite to that of the layer of twisted liquid crystal material.
6. A liquid crystal display device as claimed in claim 1, characterized in that the compensator layer comprises at least a retardation layer with an optical axis perpendicular to the compensator layer.
7. A liquid crystal display device as claimed in claim 1, characterized in that the compensator layer comprises a negative birefringent material.

8. A liquid crystal display device as claimed in claim 1, characterized in that the compensator layer comprises a liquid crystal material with a twisted structure.

1/5

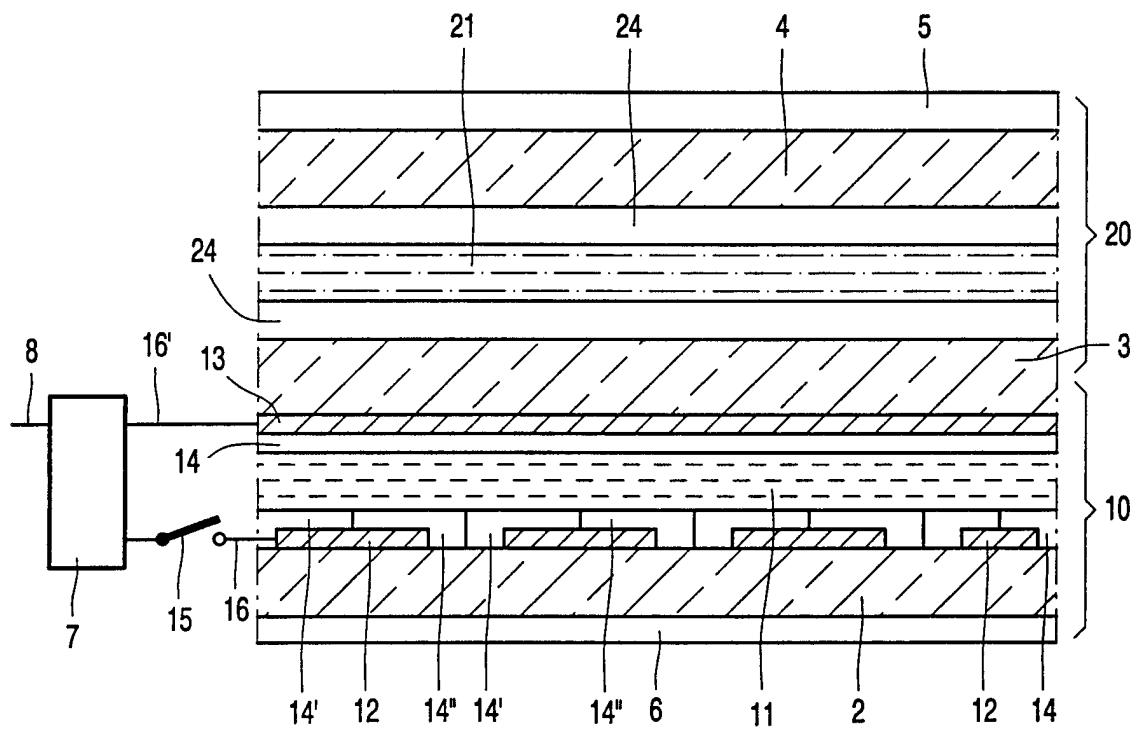


FIG. 1

2/5

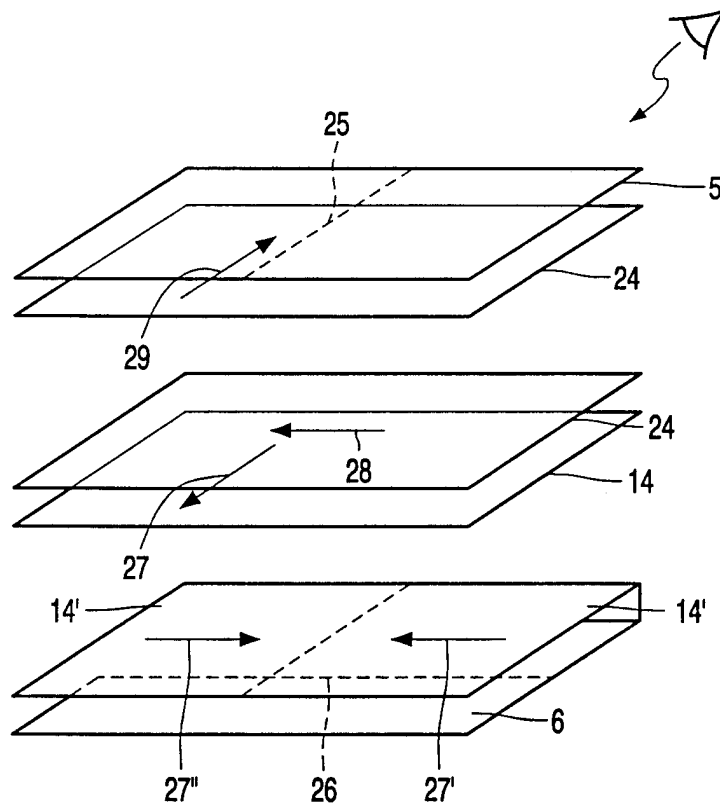


FIG. 2

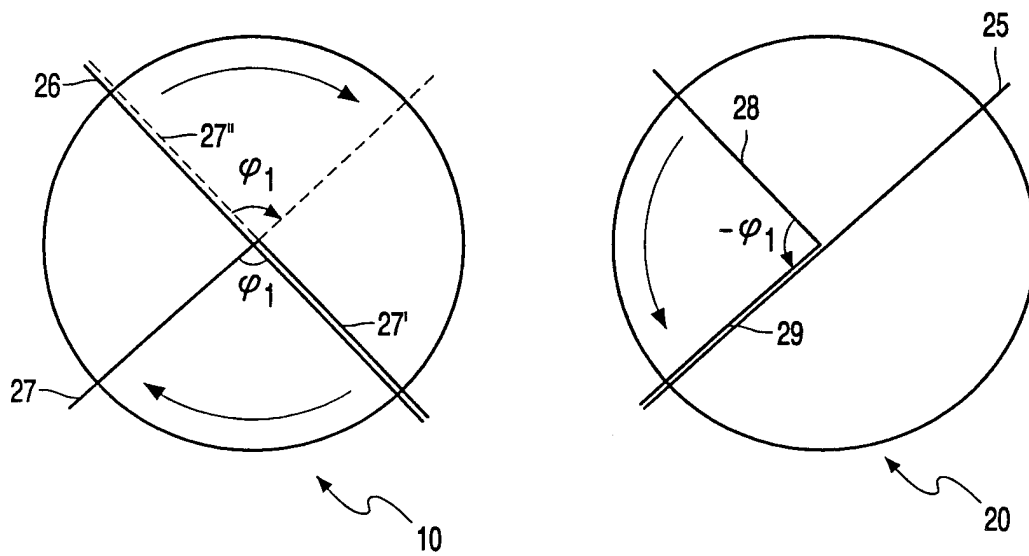


FIG. 3

3/5

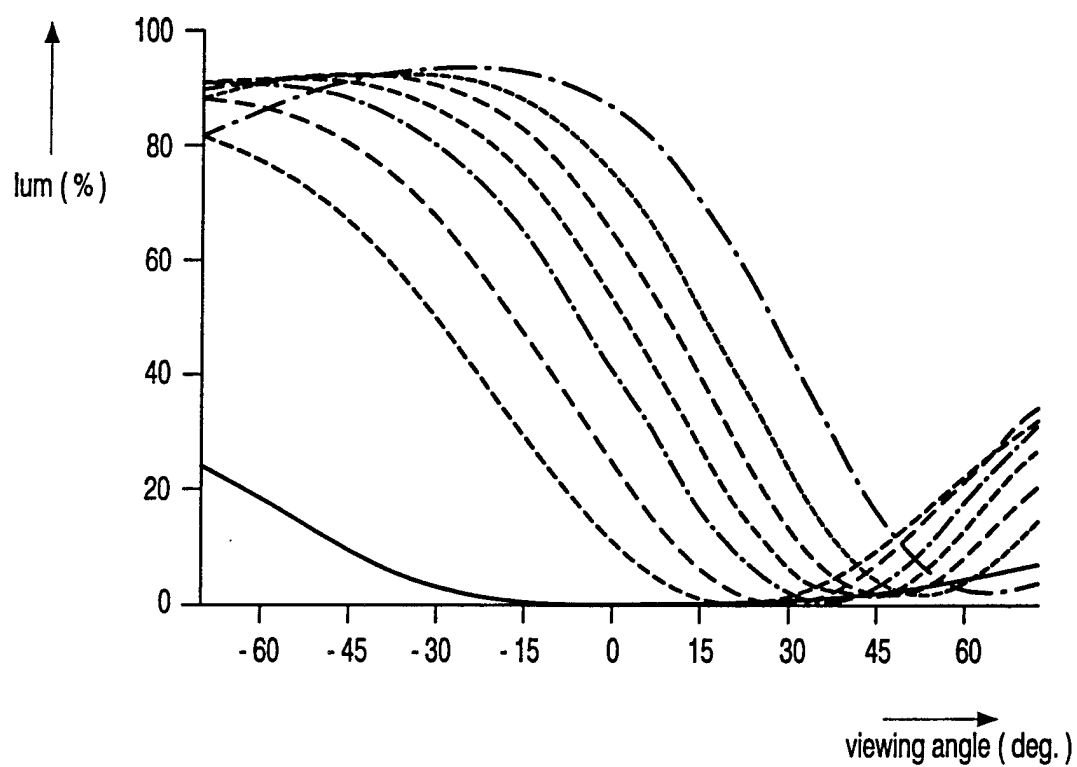


FIG. 4

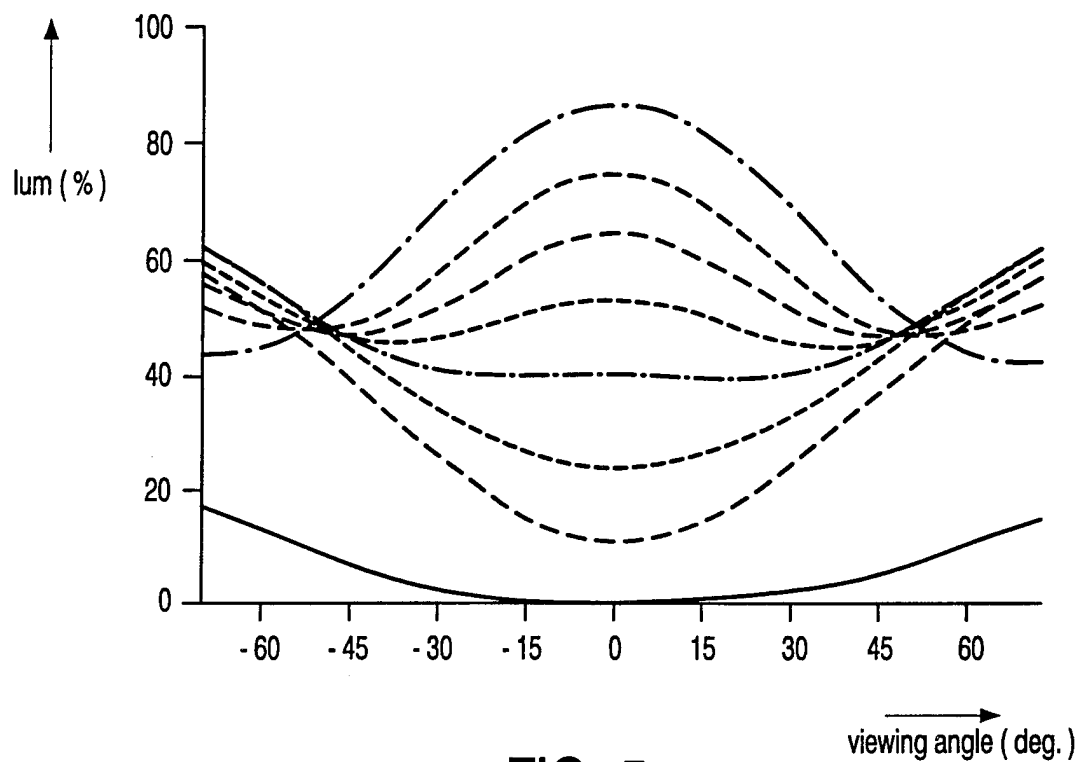


FIG. 5

4/5

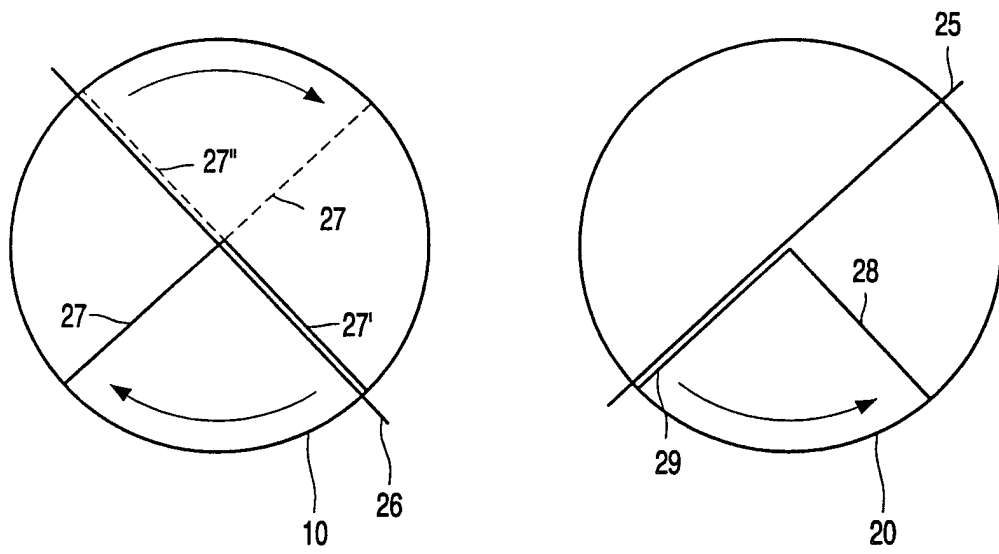


FIG. 6

5/5

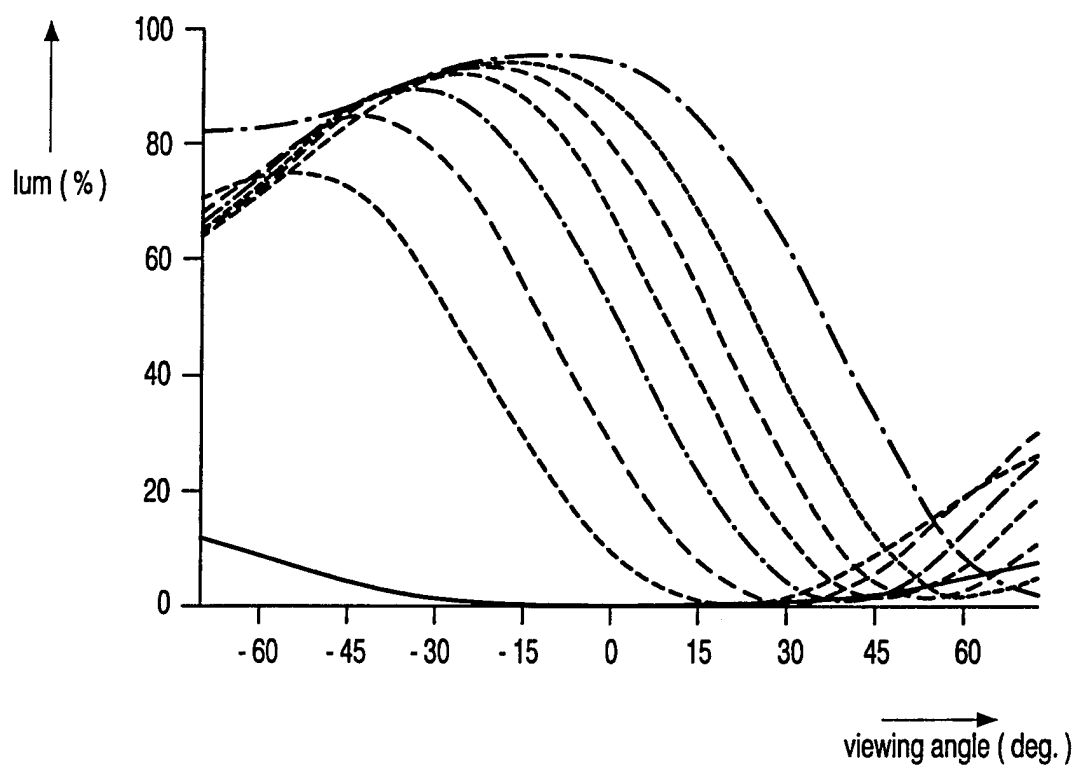


FIG. 7

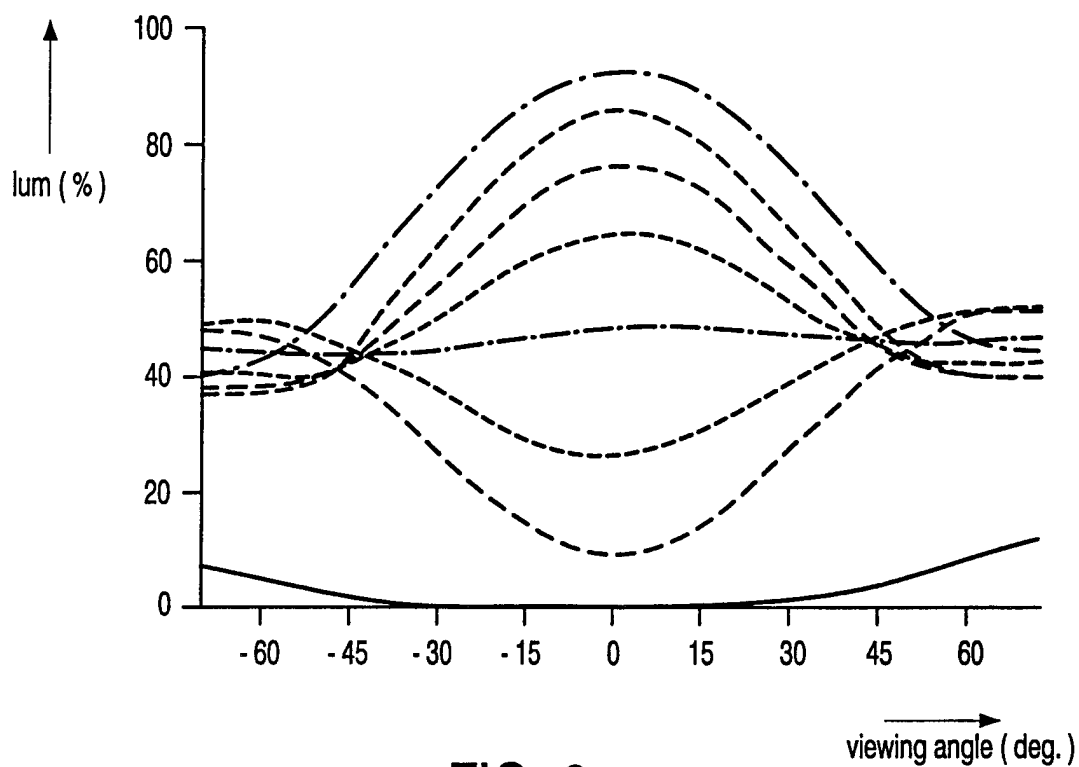


FIG. 8

INTERNATIONAL SEARCH REPORT

Inter. Appl. No.

PCT/EP 00/06587

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02F1/1337

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 717 474 A (SARMA KALLURI R) 10 February 1998 (1998-02-10)	1-3
Y	column 4, line 48 - column 6, line 10; figures 5A, 7A	4-8
Y	US 5 796 456 A (TAKATORI KEN-ICHI ET AL) 18 August 1998 (1998-08-18) column 6, line 15 - line 25 column 7, line 47 - line 65; figures 6, 9	4-8

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

24 November 2000

Date of mailing of the international search report

01/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Petitpierre, 0

INTERNATIONAL SEARCH REPORT

Inter. J. Application No

PCT/EP 00/06587

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5717474 A	10-02-1998	CA 2199042 A	11-04-1996
		EP 0783722 A	16-07-1997
		WO 9610775 A	11-04-1996
US 5796456 A	18-08-1998	JP 2790083 B	27-08-1998
		JP 9033896 A	07-02-1997
		JP 9304764 A	28-11-1997
		KR 233187 B	01-12-1999
		NL 1006054 C	08-05-1998
		NL 1006054 A	18-11-1997
		US 6081311 A	27-06-2000

专利名称(译)	液晶显示装置		
公开(公告)号	EP1116067A1	公开(公告)日	2001-07-18
申请号	EP2000954474	申请日	2000-07-11
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	皇家飞利浦电子N.V.		
当前申请(专利权)人(译)	皇家飞利浦电子N.V.		
[标]发明人	STALLINGA SJOERD VAN DE WITTE PETER		
发明人	STALLINGA, SJOERD VAN DE WITTE, PETER		
IPC分类号	G02F1/1347 G02F1/13363 G02F1/1337		
CPC分类号	G02F1/133753 G02F2001/133757 G02F2413/15		
代理机构(译)	RAAP , 雅迪尔ADRIAAN		
优先权	1999202351 1999-07-16 EP		
外部链接	Espacenet		

摘要(译)

在常黑的双单元中，通过将驱动单元中的像素划分成相对于彼此优选旋转180°的子像素来获得灰度增强。