

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 April 2001 (12.04.2001)

PCT

(10) International Publication Number
WO 01/25842 A1

(51) International Patent Classification⁷: G02F 1/13363, 1/1335, G07F 7/10, H04N 5/72

(72) Inventors: TABER, Donald, B.; 67 Edgar Court, Newbury Park, CA 91320 (US). WINKER, Bruce, K.; 865 Woodlawn Drive, Thousand Oaks, CA 91360 (US).

(21) International Application Number: PCT/US00/26233

(74) Agents: RAM, Michael, J. et al.; Koppel & Jacobs, Suite 107, 555 St. Charles Drive, Thousand Oaks, CA 91360 (US).

(22) International Filing Date:
25 September 2000 (25.09.2000)

(81) Designated States (national): JP, KR.

(25) Filing Language: English

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

(26) Publication Language: English


(30) Priority Data:
09/410,824 1 October 1999 (01.10.1999) US

Published:
— With international search report.

(71) Applicant: ROCKWELL SCIENCE CENTER, LLC [US/US]; Mail Code A15, P.O. Box 1085, Thousand Oaks, CA 91358-0085 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: STAGGERED WAVEPLATE LCD PRIVACY SCREEN

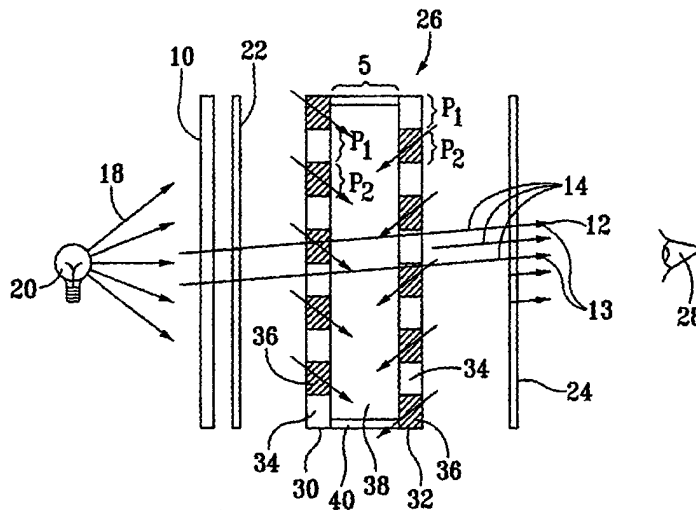

(57) Abstract: An assembly for restricting the angle of vision of an image emitted from an LCD screen (10) comprising a linearly parallel arrangement of two polarizing films (22, 24) with at least two waveplates (30, 32) therebetween. The transmission planes of the polarizing films are at an angle, preferably 90° to each other. At least two parallel waveplates are positioned between the polarizing films. Each waveplate has parallel transmitting regions alternating between birefringent (36) and isotropic regions (34). The waveplates are positioned in a spaced apart relationship to each other such that substantially orthogonal light passing through the first polarizing screen and one of the birefringent or isotropic alternating transmitting regions of the first waveplate will pass through the other of the alternating striped transmitting regions of the second waveplate. Light so transmitted will then pass through the second polarizing film and be viewable. At least a portion of the horizontal components of non-orthogonal light incident on the waveplate assembly will not pass through the second polarizing film. This assembly results in an angle of vision narrower than from the LCD screen.



WO 01/25842 A1

STAGGERED WAVEPLATE LCD PRIVACY SCREEN

Background of the Invention

5 This invention addresses liquid crystal displays (LCDs) and, more particularly, an assembly for restricting the field of view of such displays so that the image appearing on the LCD is visible primarily to a user sitting directly in front of the screen and is not observable to other individuals viewing the screen at an oblique angle. This objective is achieved by substantially eliminating light emanating from the screen other than in a substantially perpendicular manner.

10 Description of the Prior Art

Liquid crystals are useful for electronics displays because polarized light traveling through the liquid crystal layer is affected by the layer's birefringence, which can be changed by the application of a voltage across the layer. As a result, the transmission or reflection of light can be controlled with much less power than is required for the luminescent materials used in other types
15 of displays. This contributes to the longer life, lower weight and low power consumption of the LCD displays.

In LCD computer monitor and television displays a matrix of pixels is arranged across the display. These pixels are activated by an X-Y sequential addressing scheme between two sets of perpendicular conductors. Where the displays incorporate nematic liquid crystals, arrays of thin
20 film transistors can be used to control the driving voltages at the individual pixels.

In many applications, it is desirable to broaden the angle under which the display is viewable without distortion or loss of contrast. For example, in avionics it is important that the display be clear and undistorted to several individuals viewing the screen from various angles. In many instances, it is also desirable for a computer display to be visible to observers other than the
25 user and for video screens to present an undistorted image to an audience sitting other than directly in front of the screen. Assemblies which will allow a greater undistorted, high intensity viewing angle are shown in numerous prior art references, such as US Patent 5,612,801 to Winker.

However, numerous applications are arising where it is desirable to significantly narrow
30 the usable viewing angle to provide viewing privacy. The intention is to allow access to the image

on the screen only to the party sitting directly in front of the screen and to prevent a person sitting next to the user or standing over the user from seeing the image on the screen. For example, it is now becoming commonplace for computer users to use portable computers on airplane flights to work on proprietary documents. For security reasons, it is most desirable to prevent a passenger sitting in the next seat or passing down the aircraft aisle from observing the information on the screen. Secondly, newer cabin designs in aircraft are replacing larger, centrally located viewing screens, usually hanging over the aisle, with smaller individual screens which drop from the overhead compartment, or individual screens mounted in each passenger's seat back or tray table so that each passenger can select his own entertainment. Often, because each passenger may be receiving and/or paying individually for his or her chosen entertainment display, such as a movie or access to various web sites or, for security reasons, the receipt of proprietary e-mail messages, it is desirable to prevent surrounding parties from observing the contents of the display.

Summary of the Invention

Most devices developed to enhance usage of LCD displays are directed to making the image thereon available to a broader audience. Devices which can be added to the LCD device to narrow the field of view and limit the scope of the viewing audience in a simple, light weight and unobtrusive manner without loss of brightness of the image are not commonly available. Currently, to reduce the angle of vision micro-louvers, provided by 3M, are used. However they result in a reduction of image brightness which must be compensated for by increasing the power applied to the back light and/or use of various brightness enhancing films. That deficiency is addressed by the present invention which comprises an LCD screen in combination with at least two spaced apart patterned half-waveplates and a linear polarizer assembled in a manner such that the horizontal components of light rays emitted from the LCD screen in other than a substantially orthogonal manner are blocked by the waveplate assembly and not transmitted to the observer. As a result, the opportunity to view the image on the screen from other than approximately 90° is significantly reduced or eliminated. The intensity of the transmitted light may be enhanced by the addition a brightness enhancement film.

Description of the Figures

FIGURE 1 is a schematic perspective representation of light emitted from state of the art LCD screens.

FIGURE 2 is schematic expanded top view of an assembly incorporating features of the invention added to a state of the art LCD screen as shown in Fig. 1

FIGURE 3 is a perspective front view of the assembly of Figure 2.

FIGURE 4 is a perspective view of a second embodiment of the assembly having a checkerboard pattern on the half-waveplates.

FIGURE 5 is a graph showing the transmission through staggered waveplates between crossed polarizers.

FIGURE 6 is a schematic top view of the assembly of Figure 2 with the addition of a brightness enhancing film.

Detailed Description of the Invention

Figure 1 is a schematic representation of an LCD display 10 showing a ray of light 12 emanating perpendicular (orthogonal or normally incident) to the face of LCD screen (90°) and two non-orthogonal rays of light 14 and 15, which are representative of non-orthogonal light. The first ray 14 is other than 90° in the horizontal direction only and the second ray is other than 90° in the vertical direction only. The non-orthogonal ray with horizontal components 14 provides visibility of the image on the LCD screen to other than the individual sitting directly in front of the screen. It is the purpose of this invention to prevent as much as is practical of this horizontal, non-orthogonal ray from being visualized.

Figure 2 shows a typical back lit LCD arrangement incorporating features of the invention. Light 18 generated by a source 20 behind the LCD screen 10, in combination with electronic activation of the LCD screen pixels, generates an image on the screen. That light permeates through the transparent portions of the screen. This light can radiate orthogonally, as well as at various different angles to the face of the LCD screen. A conventional display output polarizer 22 is used on the exit side of the LCD display 10 to create the display image. The display output polarizer 22 may, in fact be provided as part of the LCD display. It serves as the input polarizer for the waveplate assembly and will be referred to as the "input polarizer." If an LCD is not used, an input polarizer must be added in front of the waveplate assembly. The polarizer

transmits only those wavetrain components of light which vibrate parallel to the polarizing direction of the film and absorbs those that vibrate at a right angle to said direction. While some wavetrain components not parallel to the polarizing direction of the polarizing film may be transmitted, the light emerging (passing through) the polarizing film is substantially linearly polarized.

A material is birefringent if it has different refractive indices in different directions. Any material may be fully characterized by 3 principle indices along orthogonal axes. If two of these indices are the same (called "ordinary", n_o) and the third is different (called "extraordinary", n_e) it is uniaxially birefringent. If $n_e > n_o$ it is positively birefringent. If the refractive index is the same in all three directions the material is referred to as "isotropic".

In a uniaxially birefringent film structure, if the extraordinary index (or c-axis) lies in the plane of the film, it is referred to as an a-plate. This is because it has the same optical symmetry as what crystallographers refer to as a-cut crystal. Such an a-plate is said to be half-wave if its thickness, d , and birefringence $n_e - n_o$ are chosen such that:

$$(n_e - n_o)d = \lambda/2$$

Half-waveplates have the property that when plane polarized light is incident on them such that the polarization vector makes an angle θ with the extraordinary axis of the film, the plane of polarization is rotated by twice θ as the light passes through.

Spaced there from and further removed from the LCD 10, with its transmission axis orthogonal to that of the input polarizer 22, is an additional polarizer 24, often referred to as an analyzer. Selected components of light exiting the input polarizer 22 have the polarization vector rotated 90° by the half-waveplate assembly 26 positioned between the two polarizers. The analyzer 24 is positioned so that the rotated components of light which subsequently exit the waveplates are transmitted there through. As is further explained below, unrotated light will not pass through the additional polarizer 24 and therefore can not be seen by an observer 28 positioned beyond the additional polarizer 24.

Located between the input polarizer 22 and the additional polarizer 24 is an assembly 26 which includes half-waveplates 30, 32 having a staggered, striped pattern which serves, in combination with the additional polarizer 24, to prevent light traversing the waveplate in a oblique horizontal manner and transmitted through the input polarizer 22 from reaching the observer 28.

The half-wave ($\lambda/2$) plate assembly 26 comprises, in a preferred embodiment, two patterned half-waveplates 30, 32 spaced a fixed preselected distance S apart. One of the waveplates 30 has its c-axis at $+45^\circ$ to the analyzer transmission angle so that a birefringent striped portion of the waveplate rotates light a fixed angle (90°) in one direction while the second waveplate 32 has its c-axis at $+45^\circ$ or -45° to the analyzer transmission axis so that that a birefringent striped portion rotates the light an additional $\pm 90^\circ$ (to 0 or 180°). Each half-waveplate 30, 32 has alternating isotropic and birefringent portions 34, 36, the isotropic portion 34 transmitting light without rotation and the birefringent portion 36 rotating the polarized light the desired angle and in the intended direction.

Each portion 34, 36 preferably has the same longitudinal dimension $P_1 = P_2$. If P_1 is not equal to P_2 then a null (zero transmission) can not be reached. The two half-waveplates are positioned in relationship to each other so that light 12 passing perpendicular, or substantially perpendicular 13, through the isotropic portion 34 of the first half-waveplate 30 will then pass through the birefringent portion 36 of the second waveplate 32. In the alternative, light 12 passing perpendicular, or substantially perpendicular 13, through the birefringent portion 36 of the first half-waveplate 30 will then pass through the isotropic portion 36 of the second waveplate 32. In both instances, the light passing through the input polarizer 22 will be rotated by the half-waveplate assembly 26 through a 90° angle and then pass through the additional polarizer 24 oriented with the horizontal component perpendicular to the stripe direction of the waveplate 22 with its transmission plane at 90° to the transmission plane of the input polarizer 22, allowing the LCD image to be visualized by the observer 28. Substantial fractions of all other light 14 emanating from the input polarizer 22 will encounter birefringent portions 36 on both half-waveplates 30, 32, or two isotropic portions 34, the light 14 being absorbed by the analyzer 24 rather than transmitted through the analyzer polarizer 24.

The desired null angle depends on the environment in which the screen will operate. Figure 3 is a graph showing the percent transmission of light with two half-waveplates 30, 32 imbedded in a material having a refractive index of 1.5 and $S = 1.4 (P_1 + P_2)$ with $P_1 = P_2$. The result is a null (zero light transmission) at $\pm 30^\circ$ which is the preferred null angle for most environments.

At angles greater than the null point a percentage of the light may again be transmitted but it may have an intensity or contrast ratio such that it is not readily visualized. The null point can be varied by changing the distance, S between the two half-waveplates. As the plates are brought closer, ie S is made smaller, the null angle increases until it reaches 180° as the two half-waveplates contact each other. Conversely, as the half-waveplates are moved further apart (S is increased) the null angle decreases. However, the half-waveplate assembly 26, and the combination with the polarizers 22, 24 becomes too thick to be practical. Preferably, the null point is not greater than 40°. The size of P₂ is based on the pixel size in the LCD. P₂ should optimally be dimensioned smaller than the size of the pixels on the LCD screen. In a preferred embodiment P₁ = P₂ = 17.5μ and S=50μ. However, P₁ and P₂ can vary from about 10μ to about 200μ and S can vary from about 25μ to about 500μ.

If θ_{ext} is the desired viewing angle at which zero transmission occurs, n is the refractive index of the imbedding material and P₁ = P₂ then the formula controlling the selection of the space, S between the half-waveplates is

$$S/P_2 = \cot[\arcsin(\sin \theta_{ext}/n)]$$

In a typical case for θ_{ext}=30°, n=1.5 and S/P₂=2.8

The space S can be provided by a transparent isotropic filler material 38, such as an adhesive of known thickness, completely filling the space. Alternatively, a spacer of known thickness 40 may be used along with the filler material 38 to aid in maintaining the spacing between the half-waveplates 30, 32.

Figure 4 shows a further embodiment which uses a staggered checker board pattern rather than a striped pattern. Like numbered components will function in the same manner as those described above. Stripes restrict the angle of vision only in a direction perpendicular to the stripes. Therefore, this embodiment has the added feature of being able to also restrict transmission of non-orthogonal light in the horizontal and vertical directions.

Another way to restrict viewing in both the horizontal and vertical direction is to use a second staggered waveplate assembly with its stripes oriented horizontally. A second input polarizer must be added between the two staggered waveplate assemblies, with the second input polarizer crossed to the first input polarizer. In such instance the analyzer polarizer would be crossed to the second input polarizer rather than the first input polarizer.

The invention described herein does not require any particular form of half-waveplate, there being several techniques for forming the waveplates shown in the published literature. However, two techniques are typically used. One technique is to uniaxially stretch certain plastic films, such as a polycarbonate, or polyvinyl alcohol polymer films and, while maintaining the film
5 in the stretched condition, using pressure and/or heat, stamping an alternating striped pattern on the film. This can create parallel alternating regions that are isotropic or birefringent. Another alternative is to solvent cast a solution of a polymerizable liquid crystal monomer onto a rubbed polyimide film. The c-axis of the liquid crystal film which is formed will align with the rub direction of the polyimide film. The film is dried and polymerized leaving a birefringent polymer
10 coating on the polyimide film. A photoresist is then applied to the surface of the polymer film, the photoresist is covered with a striped photomask with desired stripe width and parallel portions of the photoresist are etched away leaving birefringent and isotropic stripes. Other methods of forming such birefringent films are known to those skilled in the art.

As a further improvement of the above described device, a brightness enhancing film 42
15 can be added, as shown in Figure 6, between the source 20 and the LCD screen 10. A brightness enhancing film utilizes refractive optics to concentrate light in a more forward direction so that less light is transmitted in the oblique direction. . These films are commercially available. The brightness enhancing film 42 focuses the light 18 emanating from the source 20 so that more of the light 18 reaches the back surface of the LCD 10 making the LCD image brighter and, as a
20 result, the light reaching the observer 28 is more intense. This is shown in the graph of Figure 5. When the brightness enhancing film is used less light is available at angles further from orthogonal and as a result the percent of transmitted light at greater than the null angle is reduced.

In a preferred embodiment the half-waveplates 30, 32 are designed for 550 nm light. However, such a waveplate is close enough to half-wave that the assembly will operate in the
25 intended manner for all frequencies of visible light which reach it.

While the invention has been shown and described with reference to different embodiments thereof, it will be appreciated by those having skill in the art that variations in form, detail, compositions and operating conditions may be made without departing from the spirit and scope of the invention as defined by the accompanying claims.

For example, while half-waveplates have been described, it is possible to use two plates which rotate light the same angles but different than 90° . However, such a system will operate in a less efficient manner and may not produce a null point. Also, more than two waveplates can be used and the ratio of P_1 to P_2 and the relationship of S to P_1 and P_2 can be varied to further
5 reduce the null angle. One skilled in the art will also recognize that there exists various other techniques, not described herein, to produce polarized light. This invention contemplates using alternative polarizing techniques. Further, while the assembly set forth herein is described in conjunction with an LCD screen, one skilled in the art will recognize that it can be utilized to provide privacy to all manner of screens used to present an image.

I claim:

1. An assembly for reducing the viewing angle of light emanating from display comprising:

an input polarizer film (22) and an analyzer polarizer film (24), said films being spaced apart and parallel, the analyzer polarizer film (24) having a transmission axis oriented so that it transmits linear polarized light incident thereon which is 90° to the linear polarized light exiting through the input polarizer,

a half-waveplate assembly (26) positioned between the input polarizer film (22) and the analyzer polarizer film (24), said assembly (26) causing linearly polarized light propagating orthogonal to the surface of the display to be transmitted through the waveplate assembly rotated 90° ,

wherein the half-waveplate assembly (26) comprises a first waveplate (30) and at least one second waveplate (32), the at least one second waveplate (32) spaced a fixed distance from the first waveplate (30), each waveplate (30,32) having multiple alternating birefringent (36) and isotropic stripes (34), the isotropic stripes (34) transmitting polarized light normally incident thereon without rotation and the birefringent stripes (36) transmitting polarized light normally incident thereon with a defined angle of rotation, the second waveplate (32) being positioned so that the normally incident polarized light passing through the isotropic stripes (34) on the first waveplate (30) will pass through one of the birefringent stripes (36) on the second waveplate (32) and normally incident polarized light passing through the birefringent stripes (36) on the first waveplate (30) will pass through one of the isotropic stripes (34) on the second waveplate (32) causing the polarized light normally incident on the first waveplate to be transmitted from the second waveplate rotated 90° .

2. The assembly of claim 1 wherein the multiple alternating isotropic and birefringent stripes (34, 36) each have the same width.
3. The assembly of claim 2 wherein the width is from about $10\ \mu$ to about $200\ \mu$.
4. The assembly of claim 2 wherein the width is about $20\ \mu$.

5. The assembly of claim 1 wherein the fixed distance between the first waveplate (30) and the second waveplate (32) is from about 25 μ to about 500 μ .
6. The assembly of claim 1 wherein the fixed distance between the first waveplate (30) and the second waveplate (32) is about 50 μ .
7. The assembly of claim 1 wherein the fixed distance between the first waveplate (30) and the second waveplate (32) is filled with an adhesive.

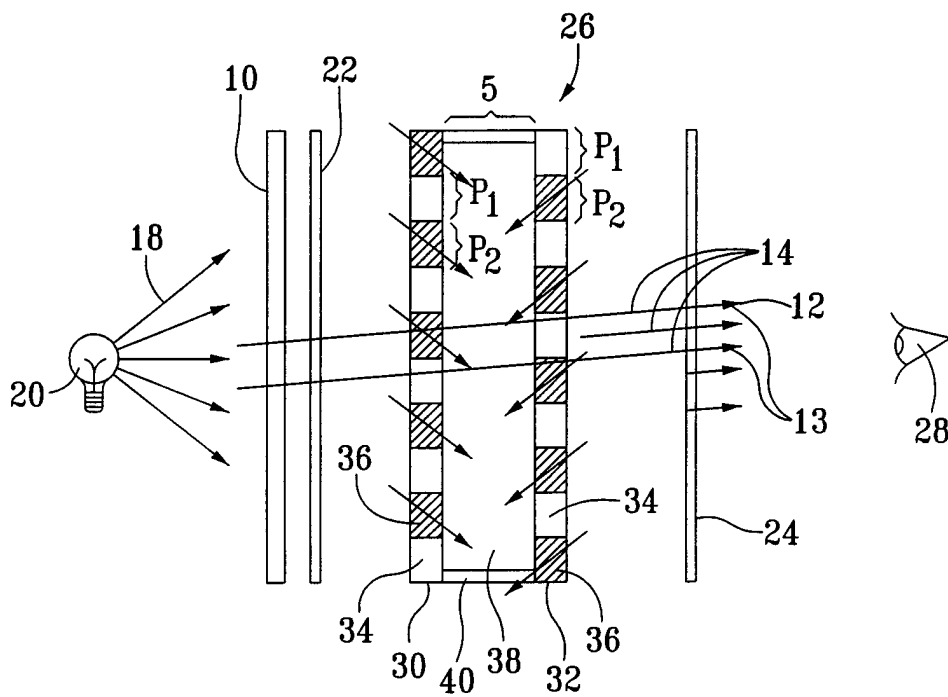
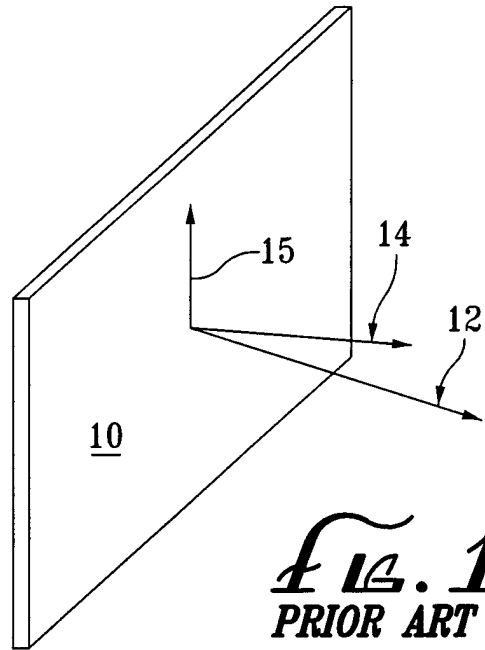


Fig. 2

L

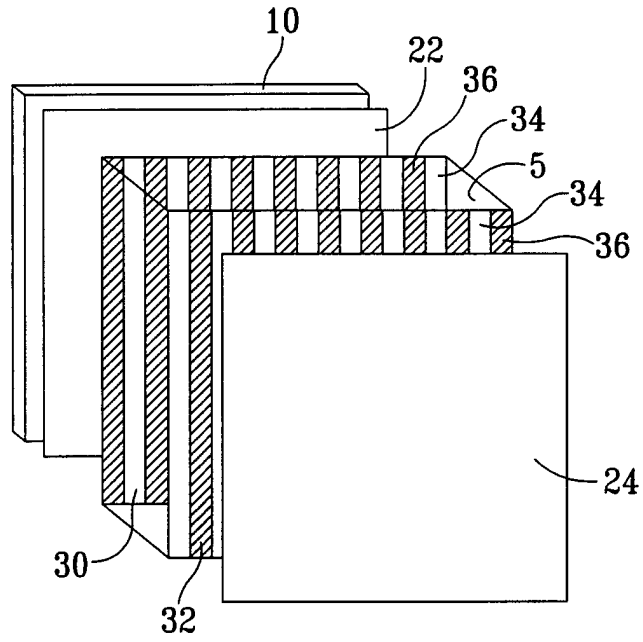


FIG. 3



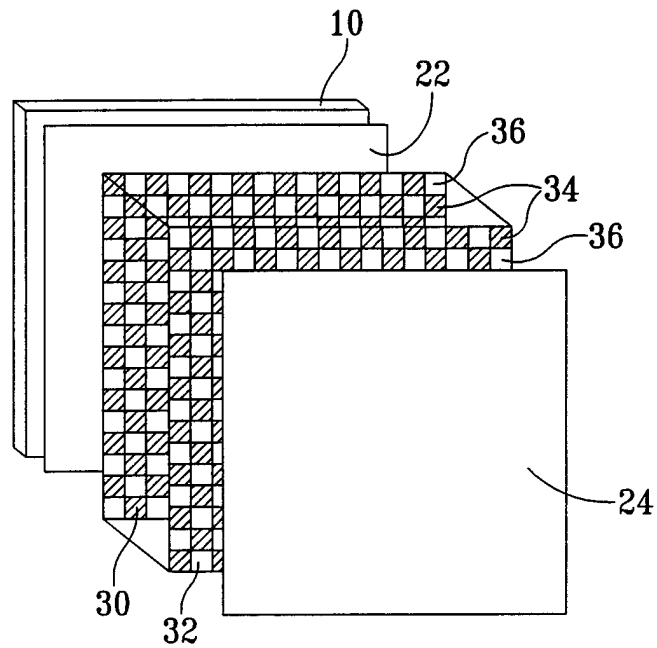


FIG. 4

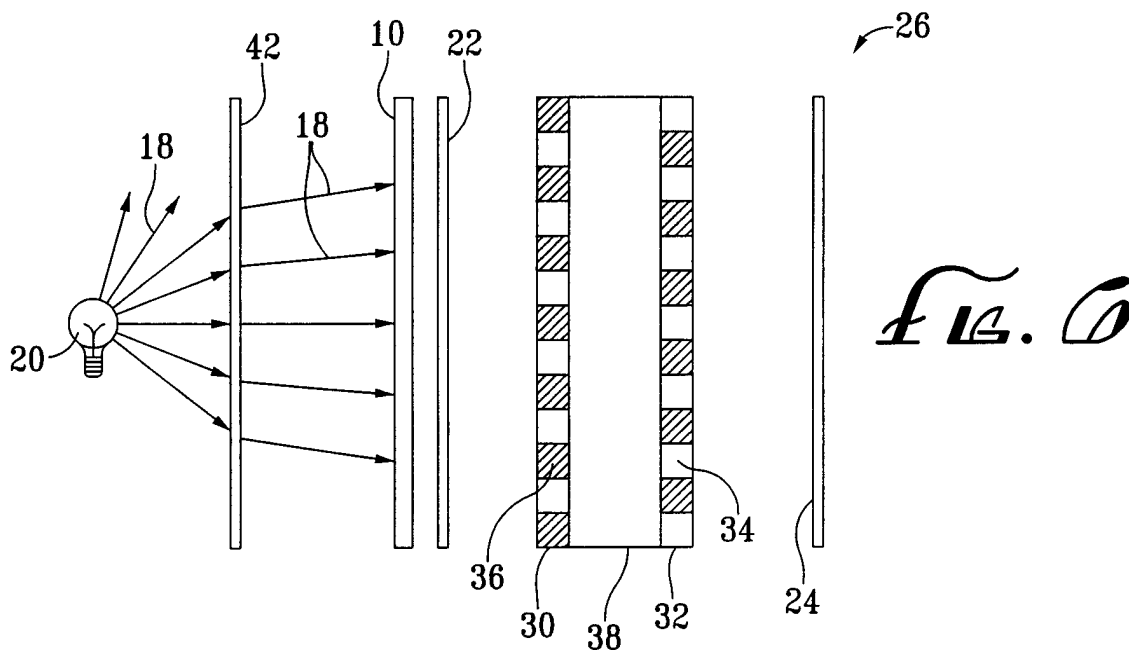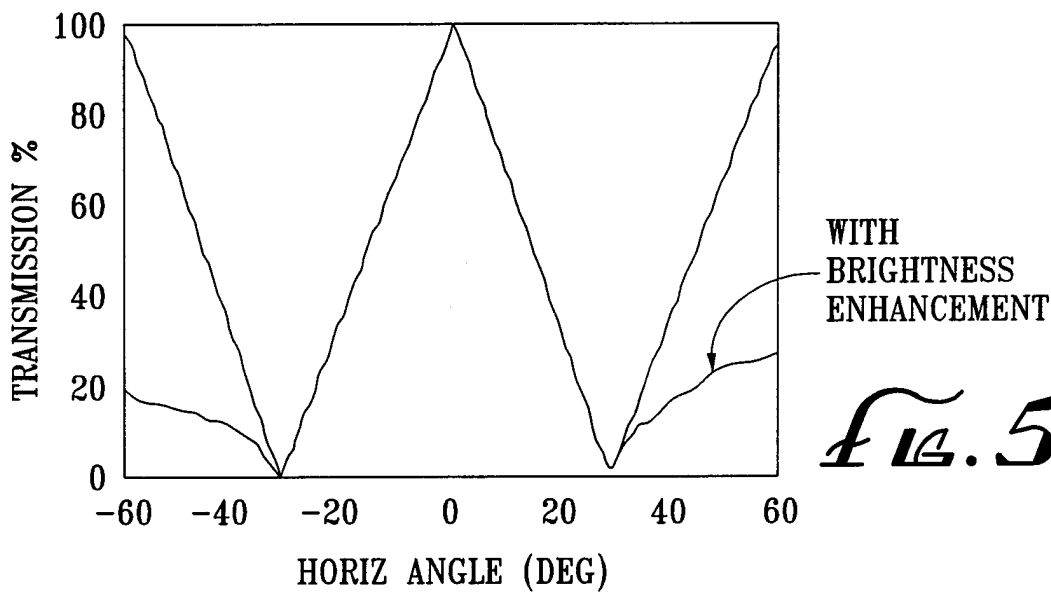

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/26233

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02F1/13363 G02F1/1335 G07F7/10 H04N5/72

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02F G07F G02B H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, IBM-TDB, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 528 319 A (AUSTIN R RUSSEL) 18 June 1996 (1996-06-18) column 1, line 19 - line 28 column 1, line 53 -column 2, line 21 column 3, line 16 -column 6, line 19; figure 1	1-7
A	--- PATENT ABSTRACTS OF JAPAN vol. 018, no. 126 (P-1702), 2 March 1994 (1994-03-02) & JP 05 313146 A (FUJITSU LTD), 26 November 1993 (1993-11-26) abstract	1
A	--- EP 0 802 684 A (NCR INT INC) 22 October 1997 (1997-10-22) column 3, line 10 -column 4, line 29; figures 3-6	1-6
	--- -/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

7 December 2000

Date of mailing of the international search report

14/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Stang, I

INTERNATIONAL SEARCH REPORT

Interr. Patent Application No

PCT/US 00/26233

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 805 250 A (SHIBATANI TAKASHI ET AL) 8 September 1998 (1998-09-08) column 8, line 12 - line 20 column 9, line 9 - line 30; figure 3 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/26233

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5528319	A	18-06-1996	NONE	
JP 05313146	A	26-11-1993	NONE	
EP 0802684	A	22-10-1997	JP 10039821 A US 5825436 A	13-02-1998 20-10-1998
US 5805250	A	08-09-1998	JP 9127554 A	16-05-1997

专利名称(译)	交错波片液晶隐私屏幕		
公开(公告)号	EP1224502A1	公开(公告)日	2002-07-24
申请号	EP2000963762	申请日	2000-09-25
申请(专利权)人(译)	创新技术授权, LLC		
当前申请(专利权)人(译)	创新技术授权, LLC		
[标]发明人	TABER DONALD B WINKER BRUCE K		
发明人	TABER, DONALD, B. WINKER, BRUCE, K.		
IPC分类号	G02F1/133 G02F1/13363		
CPC分类号	G02F1/1323 G02F1/13363 G02F2001/133638 G02F2413/02 G02F2413/09		
优先权	09/410824 1999-10-01 US		
其他公开文献	EP1224502B1		
外部链接	Espacenet		

摘要(译)

一种用于限制从LCD屏幕 (10) 发射的图像的视角的组件, 包括两个偏振膜 (22,24) 的线性平行布置, 其间具有至少两个波片 (30,32)。偏振膜的透射平面成一角度, 优选彼此成90°。至少两个平行波片位于偏振膜之间。每个波片具有在双折射 (36) 和各向同性区域 (34) 之间交替的平行透射区域。波片彼此间隔地定位, 使得穿过第一偏振屏的基本上正交的光和第一波片的双折射或各向同性交替透射区之一将穿过第一波片的交替条纹透射区域中的另一个。第二波片。如此透射的光然后将通过第二偏振膜并且是可见的。入射在波片组件上的非正交光的水平分量的至少一部分将不会穿过第二偏振膜。这种组装导致视角比LCD屏幕窄。