

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 January 2005 (06.01.2005)


PCT

(10) International Publication Number
WO 2005/001805 A1

- (51) International Patent Classification⁷: **G09G 3/36**, 5/00, 5/02, 5/10, H04N 3/14
- (21) International Application Number: PCT/US2004/018036
- (22) International Filing Date: 4 June 2004 (04.06.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/456,839 6 June 2003 (06.06.2003) US
10/696,236 28 October 2003 (28.10.2003) US
- (71) Applicant (for all designated States except US): **CLAIRVOYANTE, INC.** [US/US]; 874 Gravenstein Hwy S, Suite 14, Sebastopol, CA 95472 (US).
- (72) Inventors: **CREDELLE, Thomas, Lloyd**; 407 Scotts Bluff Place, Morgan Hill, CA 95037 (US). **STEWART, Roger, Green**; 16575 Oak view Drive, Morgan Hill, CA 95037 (US).
- (74) Agent: **STUART, P., Kaler**; Clairvoyante, Inc., 874 Gravenstein Hwy S, Suite 14, Sebastopol, CA 95472 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: IMAGE DEGRADATION CORRECTION IN NOVEL LIQUID CRYSTAL DISPLAYS WITH SPLIT BLUE SUBPIXELS

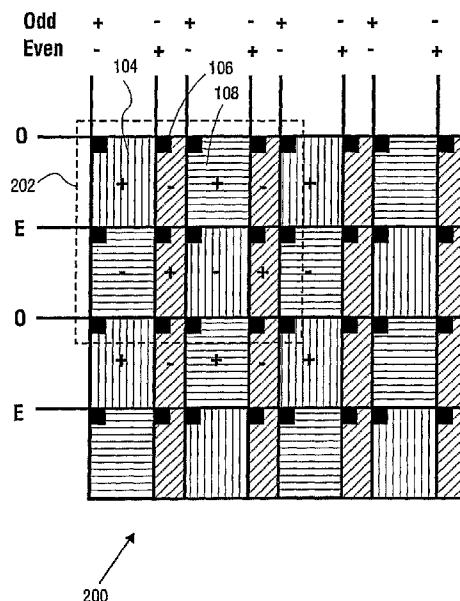

(57) Abstract: Systems and methods are disclosed to correct for image degraded signals on a liquid crystal display panel are disclosed. Panels that comprise a subpixel repeating group having an even number of subpixels in a first direction may have parasitic capacitance and other signal errors due to imperfect dot inversion schemes thereon. Techniques for signal correction and localizing of errors onto particular subpixels are disclosed.

WO 2005/001805 A1

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**IMAGE DEGRADATION CORRECTION IN NOVEL
LIQUID CRYSTAL DISPLAYS WITH SPLIT BLUE SUBPIXELS**

BACKGROUND

[01] In commonly owned United States Patent Applications: (1) United States Patent Application Serial No. 09/916,232 ("the '232 application"), entitled "ARRANGEMENT OF COLOR PIXELS FOR FULL COLOR IMAGING DEVICES WITH SIMPLIFIED ADDRESSING," filed July 25, 2001; (2) United States Patent Application Serial No. 10/278,353 ("the '353 application"), entitled "IMPROVEMENTS TO COLOR FLAT PANEL DISPLAY SUB-PIXEL ARRANGEMENTS AND LAYOUTS FOR SUB-PIXEL RENDERING WITH INCREASED MODULATION TRANSFER FUNCTION RESPONSE," filed October 22, 2002; (3) United States Patent Application Serial No. 10/278,352 ("the '352 application"), entitled "IMPROVEMENTS TO COLOR FLAT PANEL DISPLAY SUB-PIXEL ARRANGEMENTS AND LAYOUTS FOR SUB-PIXEL RENDERING WITH SPLIT BLUE SUB-PIXELS," filed October 22, 2002; (4) United States Patent Application Serial No. 10/243,094 ("the '094 application"), entitled "IMPROVED FOUR COLOR ARRANGEMENTS AND EMITTERS FOR SUB-PIXEL RENDERING," filed September 13, 2002; (5) United States Patent Application Serial No. 10/278,328 ("the '328 application"), entitled "IMPROVEMENTS TO COLOR FLAT PANEL DISPLAY SUB-PIXEL ARRANGEMENTS AND LAYOUTS WITH REDUCED BLUE LUMINANCE WELL VISIBILITY," filed October 22, 2002; (6) United States Patent Application Serial No. 10/278,393 ("the '393 application"), entitled "COLOR DISPLAY HAVING HORIZONTAL SUB-PIXEL ARRANGEMENTS AND LAYOUTS," filed October 22, 2002; (7) United States Patent Application Serial No. 01/347,001 ("the '001 application") entitled "IMPROVED SUB-PIXEL ARRANGEMENTS FOR STRIPED DISPLAYS AND METHODS AND SYSTEMS FOR SUB-PIXEL RENDERING SAME," filed January 16, 2003, each of which is herein incorporated by reference in its entirety, novel sub-pixel arrangements are disclosed for improving the cost/performance curves for image display devices.

[02] These improvements are particularly pronounced when coupled with sub-pixel rendering (SPR) systems and methods further disclosed in those applications and in commonly owned United States Patent Applications: (1) United States Patent Application Serial No. 10/051,612 ("the '612 application"), entitled "CONVERSION OF RGB PIXEL FORMAT DATA TO PENTILE MATRIX SUB-PIXEL DATA FORMAT," filed January 16, 2002; (2)

United States Patent Application Serial No. 10/150,355 (“the ‘355 application”), entitled “METHODS AND SYSTEMS FOR SUB-PIXEL RENDERING WITH GAMMA ADJUSTMENT,” filed May 17, 2002; (3) United States Patent Application Serial No. 10/215,843 (“the ‘843 application”), entitled “METHODS AND SYSTEMS FOR SUB-PIXEL RENDERING WITH ADAPTIVE FILTERING,” filed August 8, 2002; (4) United States Patent Application Serial No. 10/379,767 entitled “SYSTEMS AND METHODS FOR TEMPORAL SUB-PIXEL RENDERING OF IMAGE DATA” filed March 4, 2003; (5) United States Patent Application Serial No. 10/379,765 entitled “SYSTEMS AND METHODS FOR MOTION ADAPTIVE FILTERING,” filed March 4, 2003; (6) United States Patent Application Serial No. 10/379,766 entitled “SUB-PIXEL RENDERING SYSTEM AND METHOD FOR IMPROVED DISPLAY VIEWING ANGLES” filed March 4, 2003; (7) United States Patent Application Serial No. 10/409,413 entitled “IMAGE DATA SET WITH EMBEDDED PRE-SUBPIXEL RENDERED IMAGE” filed April 7, 2003, which are hereby incorporated herein by reference in their entirety.

[03] The present application is related to commonly owned United States Patent Applications: (1) United States Patent Application Serial No. 10/455,925 entitled “DISPLAY PANEL HAVING CROSSOVER CONNECTIONS EFFECTING DOT INVERSION”, filed on June 6, 2003; (2) United States Patent Application Serial No. 10/455,931 entitled “SYSTEM AND METHOD OF PERFORMING DOT INVERSION WITH STANDARD DRIVERS AND BACKPLANE ON NOVEL DISPLAY PANEL LAYOUTS”, filed on June 6, 2003; (3) United States Patent Application Serial No. 10/455,927 entitled “SYSTEM AND METHOD FOR COMPENSATING FOR VISUAL EFFECTS UPON PANELS HAVING FIXED PATTERN NOISE WITH REDUCED QUANTIZATION ERROR”, filed on June 6, 2003; (4) United States Patent Application Serial No. 10/456,806 entitled “DOT INVERSION ON NOVEL DISPLAY PANEL LAYOUTS WITH EXTRA DRIVERS”, filed on June 6, 2003; and (5) United States Patent Application Serial No. 10/456,838 entitled “LIQUID CRYSTAL DISPLAY BACKPLANE LAYOUTS AND ADDRESSING FOR NON-STANDARD SUBPIXEL ARRANGEMENTS,” which are hereby incorporated herein by reference in their entirety.

BRIEF DESCRIPTION OF THE DRAWINGS

[04] The accompanying drawings, which are incorporated in, and constitute a part of this specification, illustrate exemplary implementations and embodiments of the invention and, together with the description, serve to explain principles of the invention.

[05] **FIG. 1A** shows a conventional RGB stripe panel having a 1x1 dot inversion scheme.

[06] **FIG. 1B** shows a conventional RGB stripe panel having a 1x2 dot inversion scheme.

[07] **FIG. 2** shows a panel having a novel subpixel repeating group with an even number of pixels in a first (row) direction.

[08] **FIG. 3** depicts a panel having the repeating grouping of **FIG. 2** with multiple standard driver chips wherein any degradation of the image is placed onto the blue subpixels.

[09] **FIG. 4** depicts the phase relationships for the multiple driver chips of **FIG. 3**.

[010] **FIG. 5** depicts a panel having the subpixel repeating group of **FIG. 2** wherein the driver chip driving the panel is a 4-phase chip wherein any degradation of the image is placed onto the blue subpixels.

[011] **FIG. 6** depicts a panel having a subpixel repeating group having two narrow columns of blue subpixels wherein substantially all or most of the degradation of the image is placed onto the narrow blue subpixel columns.

DETAILED DESCRIPTION

[012] Reference will now be made in detail to implementations and embodiments, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[013] **FIG. 1A** shows a conventional RGB stripe structure on panel 100 for an Active Matrix Liquid Crystal Display (AMLCD) having thin film transistors (TFTs) 116 to activate individual colored subpixels – red 104, green 106 and blue 108 subpixels respectively. As may be seen, a red, a green and a blue subpixel form a repeating group of subpixels 102 that comprise the panel.

[014] As also shown, each subpixel is connected to a column line (each driven by a column driver 110) and a row line (e.g. 112 and 114). In the field of AMLCD panels, it is known to drive the panel with a dot inversion scheme to reduce crosstalk or flicker. **FIG. 1A** depicts one particular dot inversion scheme – i.e. 1x1 dot inversion – that is indicated by a “+”

and a “-“ polarity given in the center of each subpixel. Each row line is typically connected to a gate (not shown in **FIG. 1A**) of TFT 116. Image data – delivered via the column lines – are typically connected to the source of each TFT. Image data is written to the panel a row at a time and is given a polarity bias scheme as indicated herein as either ODD (“O”) or EVEN (“E”) schemes. As shown, row 112 is being written with ODD polarity scheme at a given time while row 114 is being written with EVEN polarity scheme at a next time. The polarities alternate ODD and EVEN schemes a row at a time in this 1x1 dot inversion scheme.

[015] **FIG. 1B** depicts another conventional RGB stripe panel having another dot inversion scheme – i.e. 1x2 dot inversion. Here, the polarity scheme changes over the course of two rows – as opposed to every row, as in 1x1 dot inversion. In both dot inversion schemes, a few observations are noted: (1) in 1x1 dot inversion, every two physically adjacent subpixels (in both the horizontal and vertical direction) are of different polarity; (2) in 1x2 dot inversion, every two physically adjacent subpixels in the horizontal direction are of different polarity; (3) across any given row, each successive colored subpixel has an opposite polarity to its neighbor. Thus, for example, two successive red subpixels along a row will be either (+,-) or (-,+). Of course, in 1x1 dot inversion, two successive red subpixels along a column will have opposite polarity; whereas in 1x2 dot inversion, each group of two successive red subpixels will have opposite polarity. This changing of polarity decreases noticeable visual effects that occur with particular images rendered upon an AMLCD panel.

[016] **FIG. 2** shows a panel comprising a repeat subpixel grouping 202, as further described in the ‘353 application. As may be seen, repeat subpixel grouping 202 is an eight subpixel repeat group, comprising a checkerboard of red and blue subpixels with two columns of reduced-area green subpixels in between. If the standard 1x1 dot inversion scheme is applied to a panel comprising such a repeat grouping (as shown in **FIG. 2**), then it becomes apparent that the property described above for RGB striped panels (namely, that successive colored pixels in a row and/or column have different polarities) is now violated. This condition may cause a number of visual defects noticed on the panel – particularly when certain image patterns are displayed. This observation also occurs with other novel subpixel repeat grouping – for example, the subpixel repeat grouping in **FIG. 1** of the ‘352 application – and other repeat groupings that are not an odd number of repeating subpixels across a row. Thus, as the traditional RGB striped panels have three such repeating subpixels in its repeat group (namely, R, G and B), these traditional panels do not necessarily violate the above noted conditions. However, the repeat grouping of **FIG. 2** in the present application has four (i.e. an even

number) of subpixels in its repeat group across a row (e.g. R, G, B, and G). It will be appreciated that the embodiments described herein are equally applicable to all such even modulus repeat groupings.

[017] To prevent visual degradation and other problems within AMLCDs, not only must the polarity of data line transitions be randomized along each select line, but the polarity of data line transitions must also be randomized also for each color and locality within the display. While this randomization occurs naturally with RGB triplet color sub-pixels in combination with commonly-used alternate column-inversion data driver systems, this is harder to accomplish when an even-number of sub-pixels are employed along row lines.

[018] In one even modulo design embodiment, rows are formed from a combination of smaller green pixels and less-numerous-but-larger red and blue pixels. Normally, the polarity of data line transitions is reversed on alternate data lines so that each pixel is capacitively coupled about equally to the data lines on either side of it. This way, these capacitor-induced transient errors are about equal and opposite and tend to cancel one another out on the pixel itself. However in this case, the polarity of same-color subpixels is the same and image degradation can occur.

[019] **FIG. 3** shows an even modulo pixel layout which utilizes 2x1 dot inversion. Vertical image degradation is eliminated since same color pixels alternate in polarity. Horizontal image degradation due to same-color pixels is reduced by changing the phase of the dot inversion periodically. Driver chips 301A through D provide data to the display; the driver outputs are driven +,-,+,-,... or -,+,-,+,... The phasing of the polarity is shown in **FIG. 4** for the first 4 lines of the display. For example, the first column of chip 301B has the phase -,-,+,-,+,...

[020] In one embodiment, a subpixel – bordered on either side by column lines driving the same polarity at a given time -- may suffer a decreased luminance for any given image signal. So, two goals are to reduce the number of effected subpixels -- and to reduce the image degradation effects of any particular subpixel that cannot avoid having been so impacted. Several techniques in this application and in other related applications incorporated herein are designed to minimize both the number and the effects of image degraded subpixels.

[021] One such technique is to choose which subpixels are to be degraded, if degradation may not be avoided. In **FIG. 3**, the phasing is designed so as to localize the same-polarity occurrence on the circled blue subpixels 302. In this manner, the polarity of same color subpixels along a row is inverted every two driver chips, which will minimize or

eliminate the horizontal image degradation. The periodic circled blue subpixels 302 will be slightly darker (i.e. for normally-black LCD) or lighter (i.e. for normally-white LCD) than other blue subpixels in the array, but since the eye is not as sensitive to blue luminance changes, the difference should be substantially less visible.

[022] Yet another technique is to add a correction signal to any effected subpixels. If it is known which subpixels are going to have image degradation, then it is possible to add a correction signal to the image data signal. For example, most of the parasitic capacitance mentioned in this and other applications tend to lower the amount of luminance for effected subpixels. It is possible to heuristically or empirically determine (e.g. by testing patterns on particular panels) the performance characteristics of subpixels upon the panel and add back a signal to correct for the degradation. In particular to Figure 3, if it is desired to correct the small error on the circled pixels, then a correction term can be added to the data for the circled blue subpixels.

[023] In yet another embodiment of the present invention, it is possible to design different driver chips that will further abate the effects of image degradation. As shown in **FIG. 5**, a four-phase clock, for example, is used for polarity inversion. By the use of this pattern, or patterns similar, only the blue subpixels in the array will have the same-polarity degradation. However, since all pixels are equally degraded, it will be substantially less visible to the human eye. If desired, a correction signal can be applied to compensate for the darker or lighter blue subpixels.

[024] These drive waveforms can be generated with a data driver chip that provides for a more complex power-supply switching system than employed in the relatively simple alternate polarity reversal designs. In this two-stage data driver design, the analog signals are generated as they are done now in the first stage. However, the polarity-switching stage is driven with its own cross-connection matrix in the second stage of the data driver to provide the more complex polarity inversions indicated.

[025] Yet another embodiment of the techniques described herein is to localize the image degradation effect on a subset of blue subpixels across the panel in both the row and column directions. For example, a “checkerboard” of blue subpixels (i.e. skipping every other blue subpixel in either the row and/or column direction) might be used to localize the image degradation signal. As noted above, the human eye – with its decreased sensitivity in blue color spatial resolution – will be less likely to notice the error. It will be appreciated that other

subsets of blue subpixels could be chosen to localize the error. Additionally, a different driver chip with four or fewer phases might be possible to drive such a panel.

[026] **FIG. 6** is yet another embodiment of a panel 600 comprised substantially of a subpixel repeating group 602 of even modulo. In this case, group 602 is comprised of a checkerboard of red 104 and green 106 subpixels interspersed with two columns of blue 108 subpixels. As noted, it is possible (but not mandatory) to have the blue subpixels of smaller width than the red or the green subpixels. As may be seen, two neighboring columns of blue subpixels may share a same column driver through an interconnect 604, possibly with the TFTs of the blue subpixels appropriately remapped to avoid exact data value sharing.

[027] With standard column drivers performing 2x1 dot inversion, it can be seen that blue subpixel column 606 has the same polarity as the column of red and green subpixels to its immediate right. Although this may induce image degradation (which may be compensated for with some correction signal), it is advantageous that the degradation is localized on the dark colored (e.g. blue) subpixel column; and, hence, less visible to the human eye.

CLAIMS

What is claimed is:

1. A liquid crystal display comprising:
a panel substantially comprising a subpixel repeating group comprising an even number of subpixels in a row, said subpixel repeating group further comprising a column of dark colored subpixels; and
a driver circuit sending image data and polarity signals to the panel;
wherein any image degradation in the said signals is localized on said column of dark colored subpixels.
2. The liquid crystal display of claim 1 wherein the dark colored subpixels are blue colored subpixels.
3. The liquid crystal display of claim 1 wherein said subpixel repeating group substantially comprises a checkerboard of red and green subpixels interspersed with two columns of blue subpixels.
4. The liquid crystal display of claim 3 wherein said two columns of blue subpixels share a same column driver.
5. The liquid crystal display of claim 1, wherein one or more subpixels receive a correction signal.
6. A liquid crystal display comprising:
a panel substantially comprising a subpixel repeating group comprising an even number of subpixels in a row wherein said group further comprises a column of blue subpixels; and
a driver circuit having at least two phases, the driver circuit sending image data and polarity signals to said panel, wherein phases of the driver circuits are selected such that any parasitic effects placed upon any subpixels are placed substantially upon said column of blue subpixels.
7. The liquid crystal display of claim 6, wherein a correction signal is sent to one or more subpixels.
8. A method of correcting for image degradation in liquid crystal displays, comprising:
arranging subpixels in a subpixel repeating group of a panel comprising an even number of subpixels in a row, said subpixel repeating group further comprising a column of dark colored subpixels; and

providing driver signals to the subpixels in the panel to send image data and polarity signals such that image degradation in the driver signals is localized on the column of dark colored subpixels.

9. The method of claim 8, wherein the column of dark colored subpixels is a column of blue subpixels.

10. The method of claim 8, wherein arranging subpixels in a subpixel repeating group comprises forming a checkerboard of red and green subpixels interspersed with two columns of blue subpixels.

11. The method of claim 10, wherein providing driver signals includes providing signals to the two columns of blue subpixels from the same column driver.

12. The method of claim 8, further comprising:

providing correction signals to one or more subpixels in the group of subpixels.

13. A method of correcting for image degradation in liquid crystal displays, comprising:

arranging subpixels into at least one subpixel repeating group in a panel, the subpixel repeating group comprising an even number of subpixels in a row and at least one column of blue subpixels; and

providing signals for image data and polarity data to the panel with a driver circuit having at least two phases selected such that any parasitic effects placed upon any subpixels are placed substantially upon the at least one column of blue subpixels.

14. The method of claim 13, further comprising providing a correction signal to one or more subpixels.

15. A liquid crystal display, comprising:

means for arranging subpixels in a subpixel repeating group of a panel comprising an even number of subpixels in a row, said subpixel repeating group further comprising a column of dark colored subpixels; and

means for providing driver signals to the subpixels in the panel to send image data and polarity signals such that image degradation in the driver signals is localized on the column of dark colored subpixels.

16. The liquid crystal display of claim 15, wherein the column of dark colored subpixels is a column of blue subpixels.

17. The liquid crystal display of claim 15, wherein the means for arranging subpixels in a subpixel repeating group comprises means for forming a checkerboard of red and green subpixels interspersed with two columns of blue subpixels.

18. The liquid crystal display of claim 17, wherein means for providing driver signals includes means for providing signals to the two columns of blue subpixels from the same column driver.

19. The liquid crystal display of claim 15, further comprising:

means for providing correction signals to one or more subpixels in the group of subpixels.

20. A liquid crystal display, comprising:

means for arranging subpixels into at least one subpixel repeating group in a panel, the subpixel repeating group comprising an even number of subpixels in a row and at least one column of blue subpixels; and

means for providing signals for image data and polarity data to the panel with a driver circuit having at least two phases selected such that any parasitic effects placed upon any subpixels are placed substantially upon the at least one column of blue subpixels.

21. The liquid crystal display of claim 20, further comprising providing a correction signal to one or more subpixels.

22. A liquid crystal display comprising:

a panel substantially comprising a subpixel repeating group comprising an even number of subpixels in a first direction; and

a driver circuit sending image data and polarity signals to the panel, wherein the driver circuit sends a correction signal to a plurality of subpixels which have a substantially consistent luminance error.

23. The liquid crystal display of claim 22, wherein the polarity signal are a dot inversion scheme.

24. The liquid crystal display of claim 23, wherein the polarity signal is a 1x1 dot inversion scheme.


25. The liquid crystal display of claim 23, wherein the polarity signal is a 1x2 dot inversion scheme.

26. The liquid crystal display of claim 22, wherein the polarity signal is a four phase dot inversion scheme.

27. The liquid crystal display of claim 22, wherein the plurality of subpixels having substantially consistent luminance errors are blue colored subpixels.

28. In a liquid crystal display comprising a panel, the panel substantially comprising a subpixel repeating group comprising an even number of subpixels in a first direction, method for correcting image degradation in said panel, the method comprising:

- determining subpixels which have a substantially consistent luminance error;
determining a correction signal to apply to the subpixels; and
adding said correction signal to said image data signal to the subpixels.
29. The method of claim 28, wherein determining subpixels further comprises:
measuring the error displayed by a subpixel with a test signal.
30. The method of claim 28, wherein determining a correction signal further comprises:
empirically testing a correction signal and verifying if said correction signal substantially corrects the error.
31. A liquid crystal display comprising:
a panel substantially comprising a subpixel repeating group comprising an even number of subpixels in a first direction; and
a plurality of two-phase driver chips sending image data and polarity signals to the panel, wherein phases of driver chips are selected such that any parasitic effects placed upon any subpixels at boundaries of the driver chips are placed substantially upon blue subpixels.
32. The liquid crystal display of claim 31, wherein a correction signal is sent to a plurality of the subpixels that have parasitic effects.
33. A liquid crystal display comprising:
a panel substantially comprising a subpixel repeating group comprising an even number of subpixels in a first direction; and
a driver circuit having at least two phases, the driver circuit sending image data and polarity signals to said panel, wherein phases of the driver circuits are selected such that any parasitic effects placed upon any subpixels are placed substantially upon blue subpixels.
34. The liquid crystal display of claim 33, wherein a correction signal is sent to a plurality of the subpixels that have parasitic effects.
35. The liquid crystal display of claim 33, wherein the subpixels are all of blue subpixels of the panel.
36. The liquid crystal display of claim 33, wherein the subpixels are a subset of all of blue subpixels of the panel.

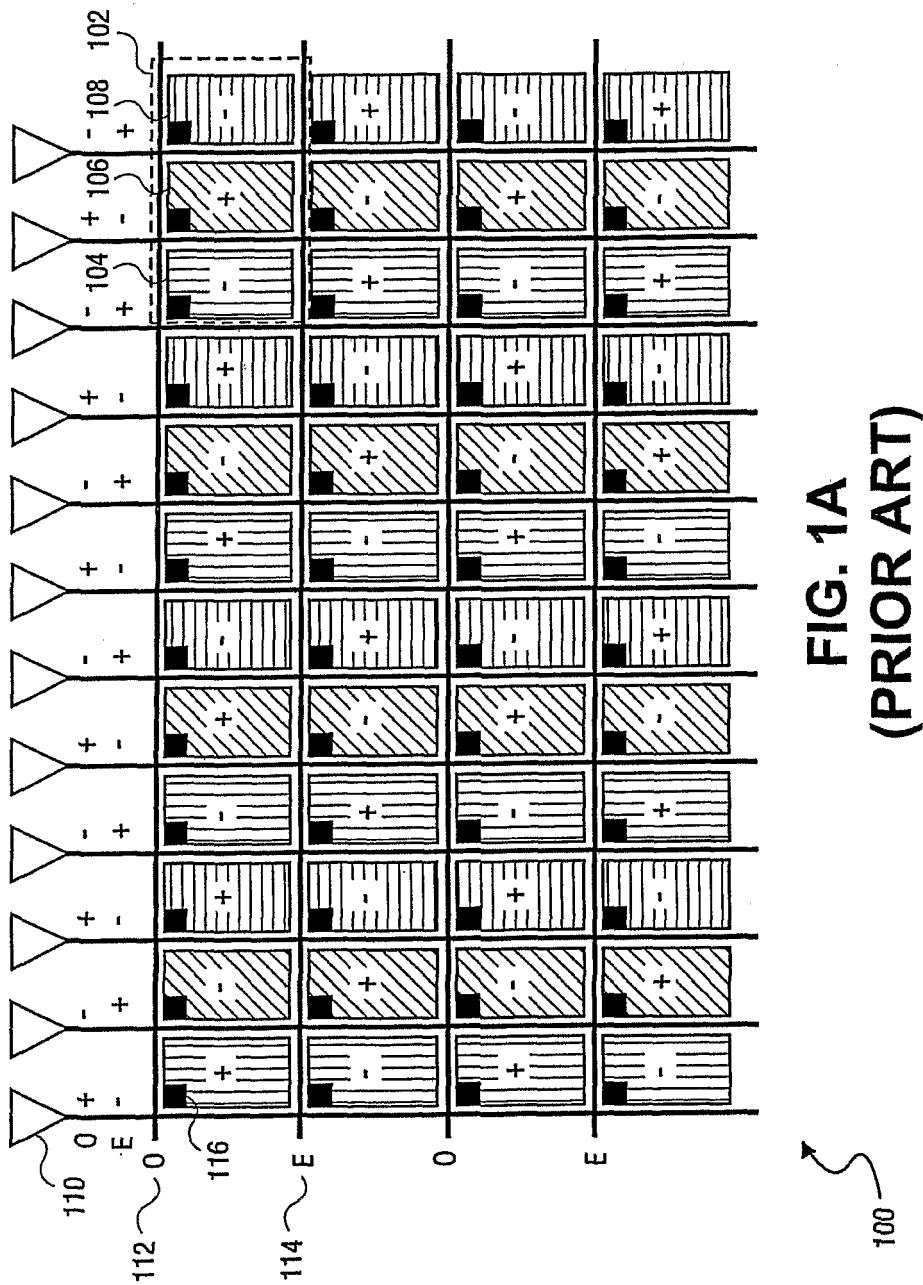

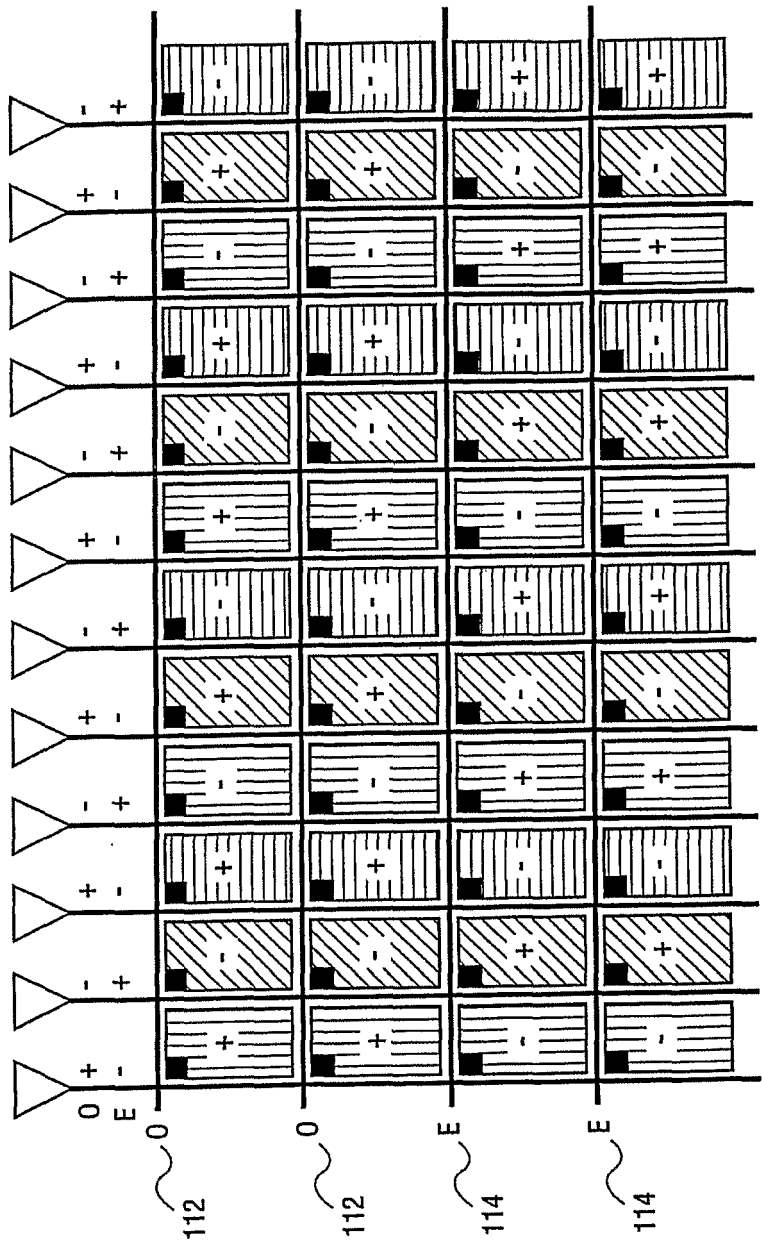


FIG. 1B
(PRIOR ART)

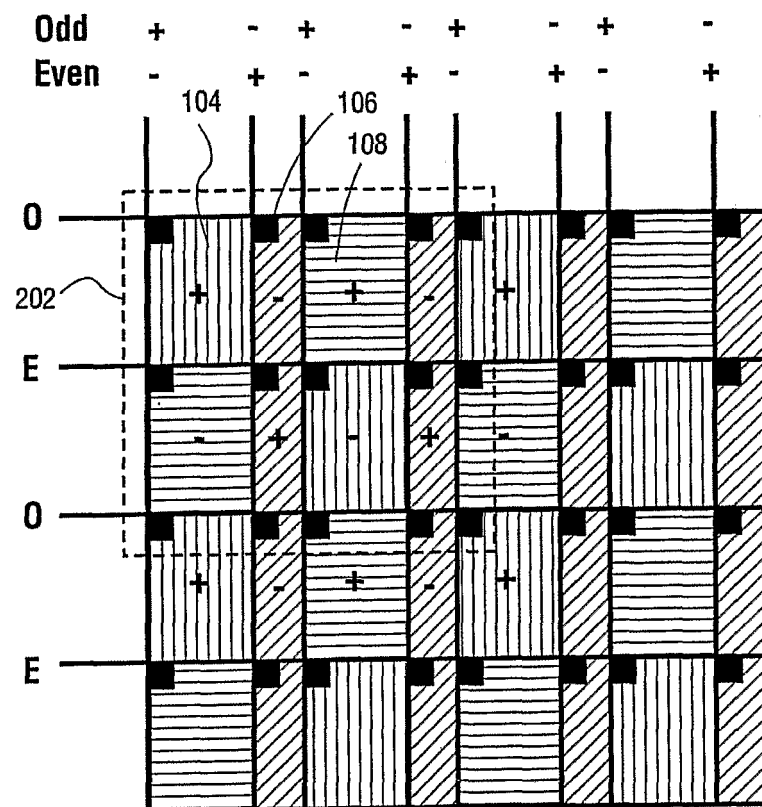


FIG. 2

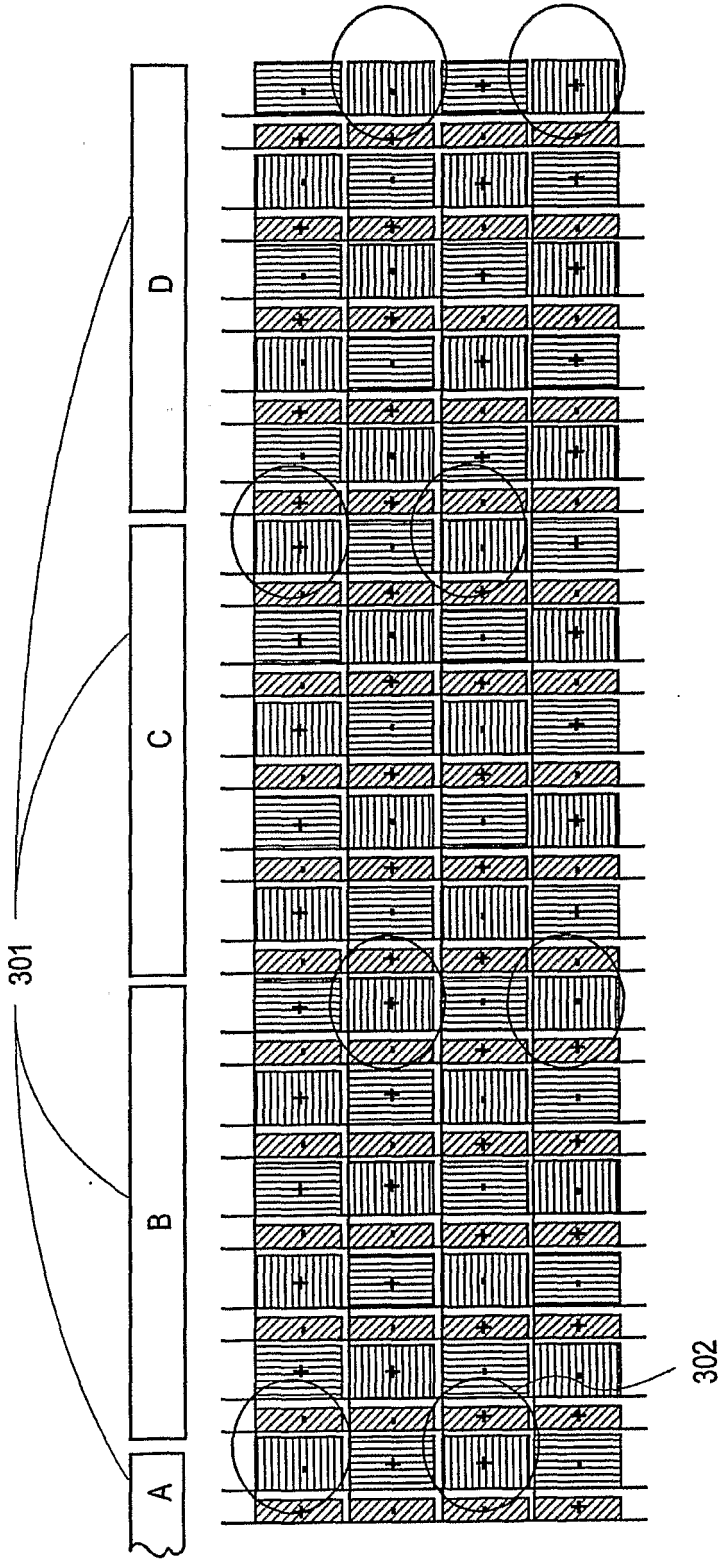


FIG. 3

5/7

	301A	301B	301C	301D	
1	+ -	- +	- +	+ -	• • • •
2	- +	- +	+ -	+ -	• • • •
3	- +	+ -	+ -	- +	• • • •
4	+ -	+ -	- +	- +	• • • •

FIG. 4

6/7

$\Phi 1$ - + - - + - + + - - - + + -
 $\Phi 2$ + + - + - - + + + - - - - +
 $\Phi 3$ + - + + - + - - + + + + - - +
 $\Phi 4$ - - + - + + - - - - + + + -

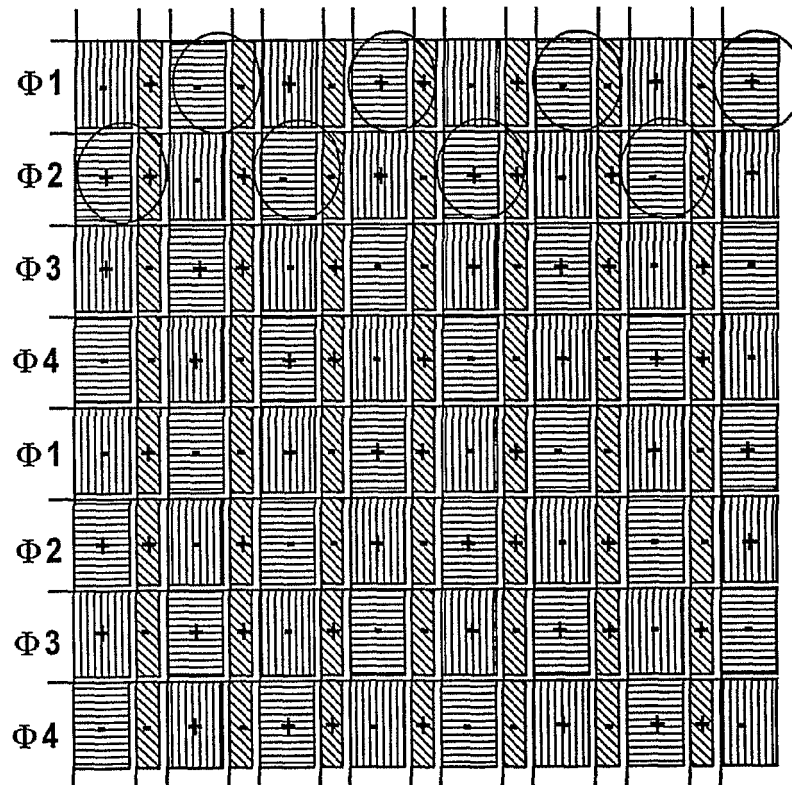


FIG. 5

7/7

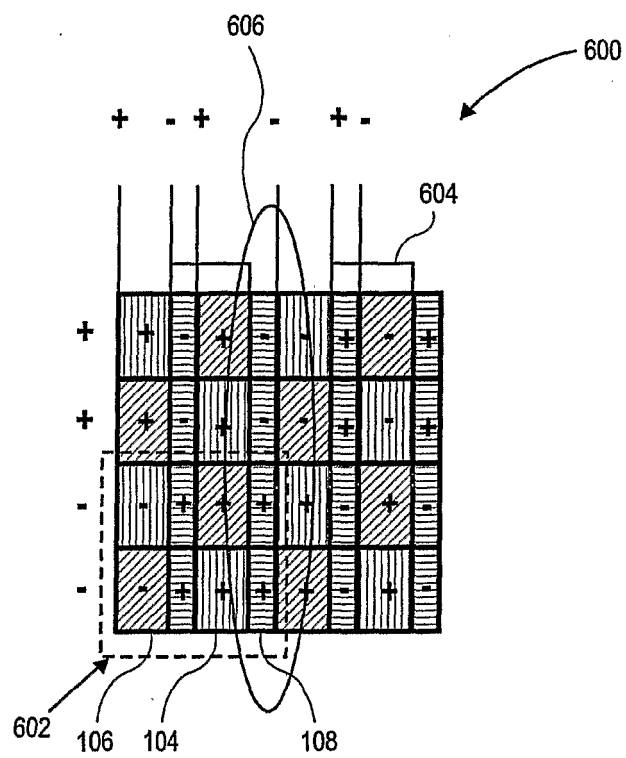


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US04/18036

A. CLASSIFICATION OF SUBJECT MATTER																				
IPC(7) : G09G 3/36, 5/00, 5/02, 5/10; H04N 3/14.																				
US CL : 345/88, 96, 589, 613, 690, 694, 695, and 698; 348/273.																				
According to International Patent Classification (IPC) or to both national classification and IPC																				
B. FIELDS SEARCHED																				
Minimum documentation searched (classification system followed by classification symbols) U.S. : 345/88, 96, 589, 613, 690, 694, 695, and 698; 348/273.																				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched NONE																				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EAST, WEST, PAJ. Search terms: sub-pixel, red, green, blue, polarity...																				
C. DOCUMENTS CONSIDERED TO BE RELEVANT																				
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																		
Y	Pub. No.: US 2003/0090581 A1 (CREDELLE et al.), [0022]-[0025], [0028], and [0034]-[0039].	1-36																		
Y	Pub. No.: US 2002/0015110 A1 (BROWN ELLIOTT), [0071]-[0078].	1-36																		
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.																				
<table border="0"> <tr> <td colspan="2">* Special categories of cited documents:</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> <td></td> </tr> <tr> <td>"E" earlier application or patent published on or after the international filing date</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> <td></td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"&" document member of the same patent family</td> <td></td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td></td> <td></td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> <td></td> </tr> </table>			* Special categories of cited documents:		"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone		"E" earlier application or patent published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art		"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family		"O" document referring to an oral disclosure, use, exhibition or other means			"P" document published prior to the international filing date but later than the priority date claimed		
* Special categories of cited documents:		"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																		
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																			
"E" earlier application or patent published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																			
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family																			
"O" document referring to an oral disclosure, use, exhibition or other means																				
"P" document published prior to the international filing date but later than the priority date claimed																				
Date of the actual completion of the international search 01 September 2004 (01.09.2004)		Date of mailing of the international search report 03 NOV 2004																		
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US Commissioner for Patents P.O. Box 1450 Alexandria, Virginia 22313-1450 Facsimile No. (703)305-3230		Authorized officer Jennifer Nguyen Telephone No. 703-305-3225																		

专利名称(译)	具有分裂蓝色子像素的新型液晶显示器中的图像劣化校正		
公开(公告)号	EP1647008A1	公开(公告)日	2006-04-19
申请号	EP2004754603	申请日	2004-06-04
[标]申请(专利权)人(译)	克雷沃耶提公司		
申请(专利权)人(译)	Clairvoyante公司 , INC.		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	CREDELLE THOMAS LLOYD STEWART ROGER GREEN		
发明人	CREDELLE, THOMAS, LLOYD STEWART, ROGER, GREEN		
IPC分类号	G09G3/36 G09G5/00 G09G5/02 G09G5/10 H04N3/14		
CPC分类号	G09G3/3648 G09G3/3614 G09G3/3685 G09G2300/0452 G09G2320/0204 G09G2320/0209 G09G2320/0233		
优先权	10/696236 2003-10-28 US 10/456839 2003-06-06 US		
其他公开文献	EP1647008A4		
外部链接	Espacenet		

摘要(译)

公开了用于校正液晶显示面板上的图像劣化信号的系统和方法。包括在第一方向上具有偶数个子像素的子像素重复组的面板可能由于其上的不完美的点反转方案而具有寄生电容和其他信号误差。公开了用于信号校正和将错误定位到特定子像素上的技术。