



US 20010011980A1

(19) **United States**(12) **Patent Application Publication**
Jang(10) **Pub. No.: US 2001/0011980 A1**(43) **Pub. Date: Aug. 9, 2001**(54) **APPARATUS AND METHOD FOR
PREVENTING A WHITE-SCREEN ERROR IN
A LIQUID CRYSTAL DISPLAY DEVICE****Publication Classification**(51) **Int. Cl.⁷** **G09G 3/36**(52) **U.S. Cl.** **345/87**(76) **Inventor: Kyeong-Kun Jang, Pyongtaek-shi (KR)**


Correspondence Address:


LONG ALDRIDGE & NORMAN LLP
701 Pennsylvania Avenue, N.W.
Washington, DC 20004 (US)(21) **Appl. No.: 09/749,451**(22) **Filed: Dec. 28, 2000**(30) **Foreign Application Priority Data**

Jul. 5, 1999 (KR) 1999-26942

(57) **ABSTRACT**


A system and method for preventing a white-screen error in a liquid crystal display (LCD) device operates by detecting an output voltage signal from a DC/DC converter and reducing a time delay between the output voltage signal and a data signal for the LCD gradually by a fixed value until a timing problem between the output voltage signal and the data signal is overcome. A software reset is executed when the time interval between the output voltage signal and the data signal is too great, causing the output voltage signal to shut down before the data signal is turned on. The process is repeated until the timing is proper such that the output voltage signal is detected to remain when the data signal is output. If the time delay is reduced to a predetermined threshold, then it is determined that a malfunction has occurred, and an alert is provided to a user.

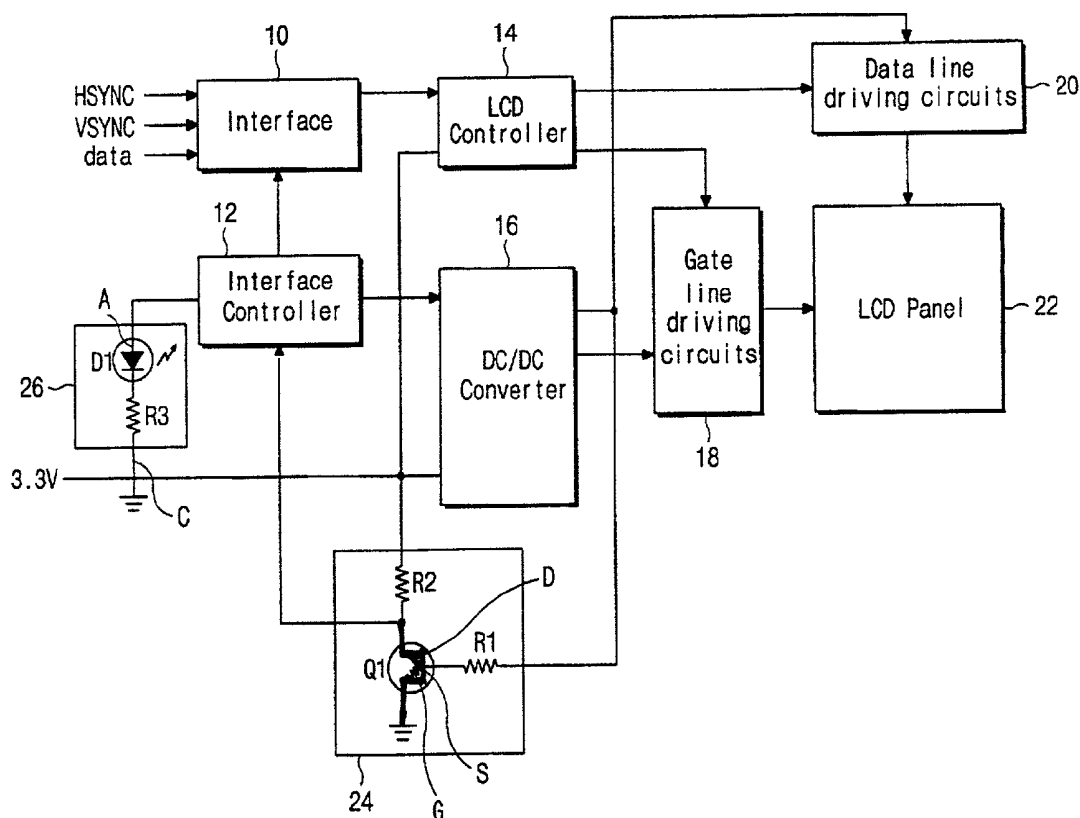

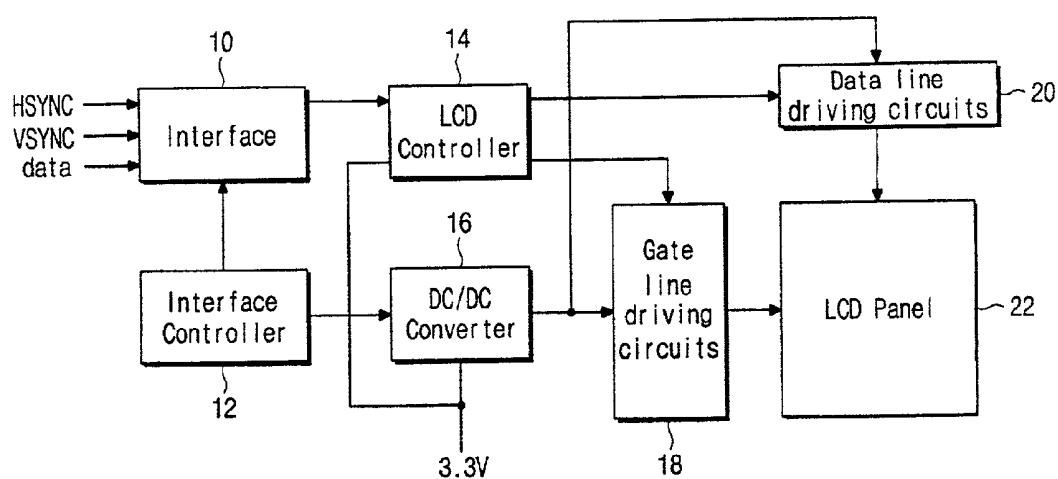


(related art)


Figure 1

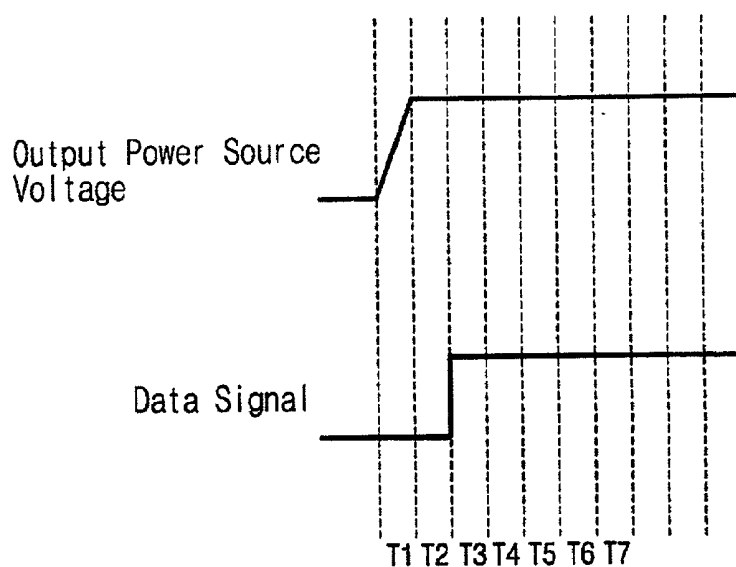

(related art)

Figure 2

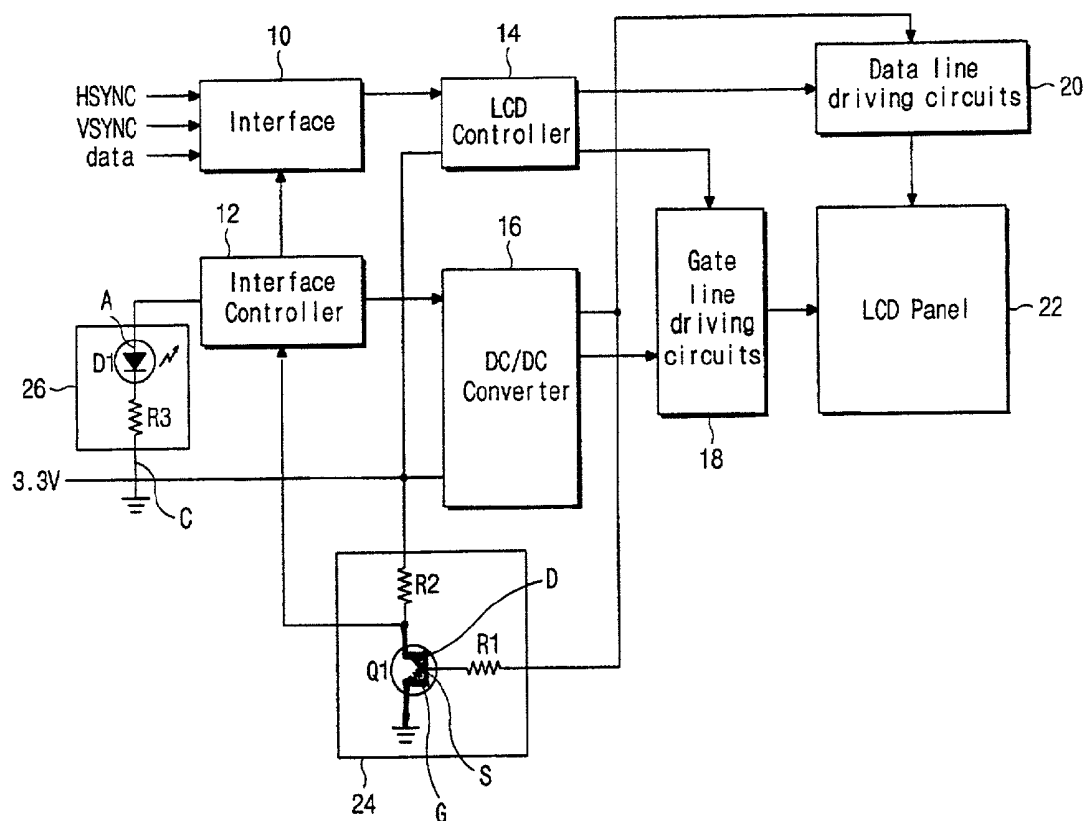*Figure 3*

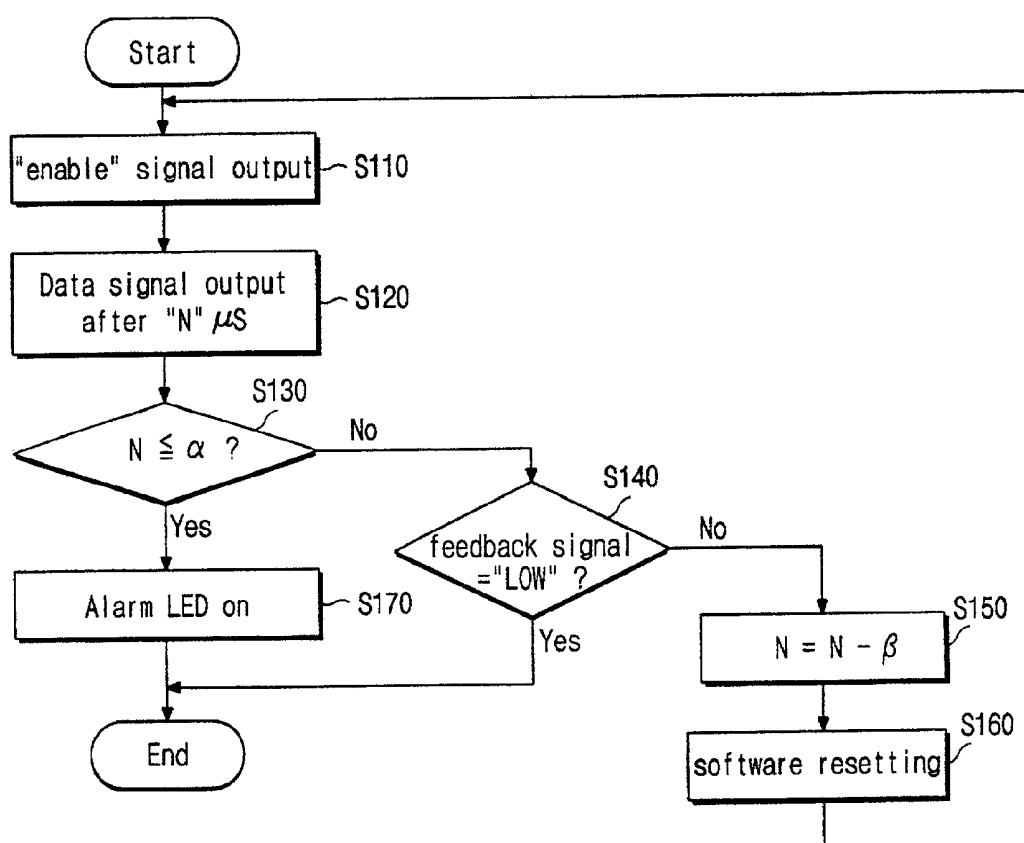*Figure 4*

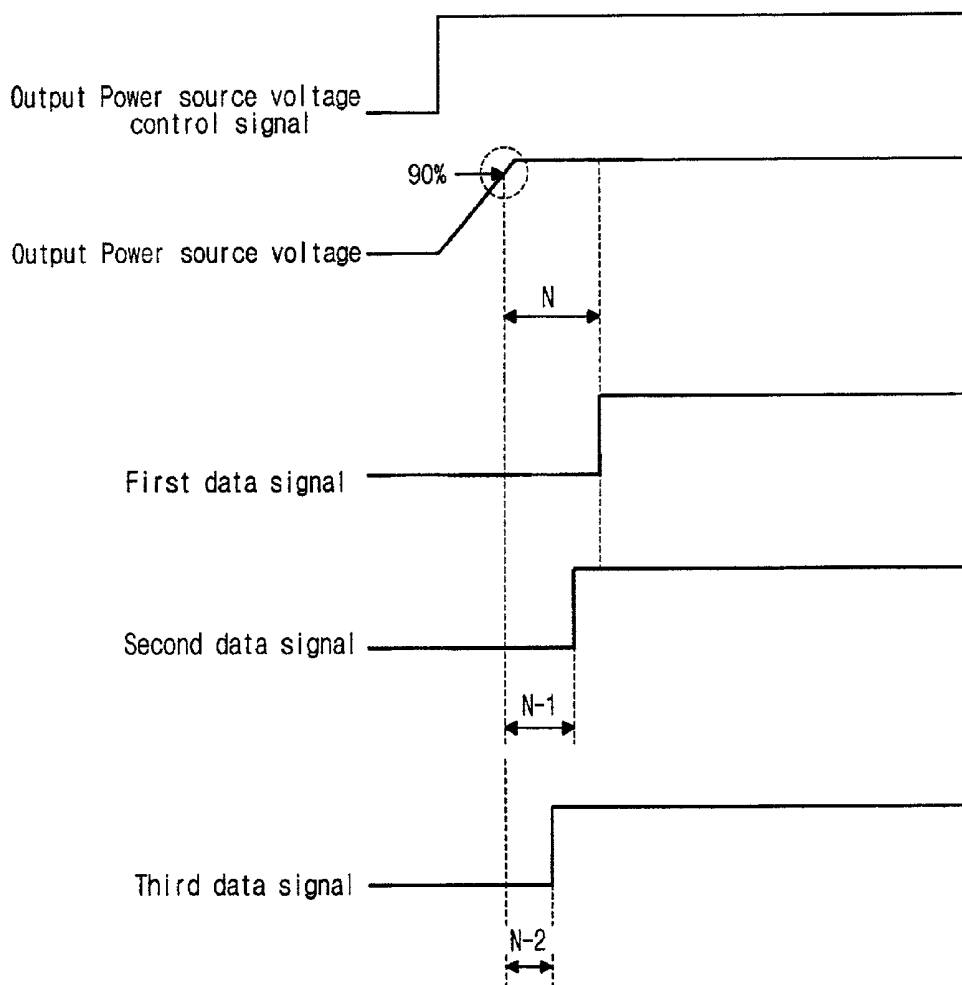


Figure 5

APPARATUS AND METHOD FOR PREVENTING A WHITE-SCREEN ERROR IN A LIQUID CRYSTAL DISPLAY DEVICE

[0001] This application is based on Korean Patent Application No. 1999-26942, filed on Jul. 5, 1999, which is hereby incorporated by reference for all purposes as if fully set forth herein.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display (LCD) device, and more particularly, to a method and apparatus that prevents a white-screen error from occurring in the LCD device, and an LCD device incorporating the method and apparatus.

[0004] 2. Discussion of the Related Art

[0005] LCD devices including display and drive portions are widely adopted as a display device for notebook computers or laptop computers because of a smaller size than conventional cathode ray tubes (CRTs). And recently, as the LCD devices become to display natural-like colors, desktop computers are also adopting the LCD device as a display device. The LCD device has advantages of low power consumption, low electromagnetic radiation, and small size compared with a CRT.

[0006] Now, with reference to **FIG. 1**, a detailed explanation of the drive portion of an LCD device used for a desktop computer will be provided.

[0007] An interface **10** receives horizontal synchronous signals "HSYNC," vertical synchronous signals "VSYNC," and image data signals "DATA." The interface **10** is electrically connected (hereinafter, connected) with an interface controller **12** and an LCD controller **14**, which is connected with a DC/DC converter **16**. In addition, the LCD controller **14** is connected with gate-line driving circuits **18** and data-line driving circuits **20**, while the gate-line driving circuits **18** and data-line driving circuits **20** are connected with gate lines and data lines of an LCD panel **22**. Though not shown in **FIG. 1**, the LCD panel **22** has a plurality of unit pixels arranged in a matrix shape, and each unit pixel has a thin film transistor (TFT). Gate and source electrodes of the TFTs are connected by means of the gate lines and data lines with the gate-line driving circuits **18** and the data-line driving circuits **20**, respectively.

[0008] From power source devices, or power supply circuits (not shown), a direct current (DC) supply voltage, for example, 3.3 VDC is applied to the DC/DC converter **16** and the LCD controller **14**. Therewith, the DC/DC converter **16** provides first, second, and third output power source voltages of -5, 16, and 8.7 VDC. Among the output power source voltages, the first and second output power source voltages -5 and 16 VDC are supplied for the gate-line driving circuits.

[0009] As the drive portion including the interface **10** et al. receives video signals from a video card of the desktop computer, the display portion including the LCD panel **22** displays images. The role and operation of each device shown in **FIG. 1** will be explained hereinafter.

[0010] When the video card transmits the video signals including HSYNC and VSYNC to the interface **10**, the

interface **10** processes them such that images displayed by the LCD panel **22** coincide with preset resolution and optimum display size. Herein, the interface controller **12** transmits interface control signals to the interface **10** such that the interface **10** operates according to the interface control signals. As a result, the interface **10** produces data signals which are applied to the LCD controller **14**.

[0011] The LCD controller **14** transmits video data signals to the data-line driving circuits **20** according to some clock signals, and applies gate start signals and timing signals to the gate-line driving circuits **18**. At this point, the DC/DC converter **16**, which is supplied 3.3 VDC from the power source (not shown), provides a plurality of different DC voltage levels to the gate-line driving circuits **18** and the data-line driving circuits **20**, respectively.

[0012] The data-line driving circuits **20** and the gate-line driving circuits **18** transmit pixel data and gate signals to the LCD panel **22**, and the LCD panel **22** displays certain images from the pixel data signals according to the gate signals.

[0013] Hereinafter, a white screen error of the above-mentioned LCD device will be explained with reference to **FIG. 2**.

[0014] As shown, the LCD device conventionally has a delay time between the output power source voltages, specifically the first and second output power source voltages that are applied to the gate-line driving circuits, and the data signals that are respectively applied by the DC/DC converter **16** and the interface **10**. That is to say, the output power source voltages begin to increase at a time period "T1" and reach their normal values at a subsequent time period "T2" while the data signals begin at a further subsequent time period "T3." Therefore, the output power source voltages go ahead of the data signals by the time period "T2," which is conventionally designed to be less than 20 ms inclusive. In other words, since there conventionally occurs an abnormal transient phase in the output power source voltages when the power source of the desktop computer is turned on or off, the output power source voltages should begin ahead of the data signals by a preset time period to assure a normal operation of the LCD device, namely, to exclude the abnormal state where the data signals are applied during the transient period "T1" of the output power source voltages.

[0015] However, when the delay time is too long, the output power source voltage is applied to the gate-line driving circuit too long without the display data signals being applied to the data-line driving circuit. In that abnormal case, an over-current is applied to the gate electrode of the TFT in the LCD panel such that a surge protector or breaker of the DC/DC converter powers down all of the output power source voltages. And as a result, while a back light is still illuminating, there exists no image data displayed on the LCD panel such that only a white color is shown to users, which is called as the white-screen error. The white screen error continues until the users turn off the main power for the desktop computer.

[0016] The above-mentioned problem causes users to distrust the overall product, such that repair service costs of vendors are increased.

SUMMARY OF THE INVENTION

[0017] Accordingly, the principles of the present invention relate to a liquid crystal display device that is designed to

substantially obviate one or more of the problems due to the limitations and disadvantages of the related art.

[0018] It is an object of the present invention to provide a method and apparatus for preventing the white-screen errors.

[0019] To achieve the above object, in one aspect the present invention provides A driving portion of a liquid crystal display device, comprising a data-line driving circuit; a gate-line driving circuit; an interface outputting data signals; a liquid crystal display controller receiving the data signals and outputting display data signals to the data-line driving circuit and timing signals to the gate-line driving circuit; a DC/DC converter supplying a plurality of output power source voltages to the gate-line driving circuit and the data-line driving circuit; a voltage detector detecting a voltage level of one of the output power source voltages supplied by the DC/DC converter and outputting a feedback signal; and an interface controller receiving the feedback signal from the voltage detector, outputting enable signals to the interface and to the DC/DC converter, and outputting a control signal to advance the data signals when the detected voltage level of the one output power source voltage is less than 90% of a preset voltage level.

[0020] Preferably, the voltage detector includes a transistor having gate, source and drain electrodes and being turned on and off according to the output power source voltage from the DC/DC converter.

[0021] Preferably, the transistor is a thin film transistor.

[0022] Also preferably, the voltage detector includes a first resistor electrically connecting the gate electrode of the transistor with an output terminal of the DC/DC converter and a second resistor electrically connecting the drain electrode of the transistor with the liquid crystal display controller, wherein the source electrode of the transistor is connected to ground, and wherein the drain electrode of the transistor is electrically connected with the interface controller.

[0023] The driving portion further includes an alarm device alerting users only when the feedback signals are abnormal in spite of outputting the data signals and the output power source voltage at the same time.

[0024] In the driving portion, the alarm device is preferably a light-emitting device emitting light according to a control signal applied from an interface controller.

[0025] Preferably, the light-emitting device includes a light-emitting diode and a resistor, wherein the light-emitting diode includes an anode electrode electrically connected with the interface controller, and a cathode electrode electrically connected with a first end of the resistor, and wherein a second end of the resistor is connected with ground.

[0026] In another aspect of the invention, a method of driving a liquid crystal display (LCD) device comprises providing a data signal for displaying an image on the liquid crystal display panel; supplying an output voltage signal used to drive the liquid crystal display panel to display the image; detecting a voltage level of the output voltage signal; providing a feedback signal indicating whether the voltage level exceeds a predetermined threshold; and in response to the feedback signal, adjusting a time interval between the output voltage signal and a start of the data signal.

[0027] Additional features and advantages of the invention will be set forth in the description that follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings. However, it should be understood that the written description and the specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only. Various changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0029] In the drawings:

[0030] **FIG. 1** is a block diagram illustrating driving portion and displaying portion of a conventional liquid crystal display device used for desktop computers;

[0031] **FIG. 2** illustrates signal waveforms of output power source voltage and data signals in the driving portion of the conventional liquid crystal display device of **FIG. 1**;

[0032] **FIG. 3** is a block diagram illustrating a driving portion and displaying portion according to a preferred embodiment of the present invention;

[0033] **FIG. 4** is a flow chart illustrating a program stored in the interface controller; and

[0034] **FIG. 5** is a graph illustrating waveforms of the data signals and output power source voltage applied from the driving portion of the liquid crystal display device for a desktop computer.

DETAILED DESCRIPTION OF AN ILLUSTRATED EMBODIMENT

[0035] Reference will now be made in detail to an embodiment of the present invention, an example of which is illustrated in the accompanying drawings.

[0036] **FIG. 3** shows a configuration of an LCD device used for desktop computers.

[0037] As shown, an interface **10** receives horizontal synchronous signals "HSYNC," vertical synchronous signals "VSYNC," and image data signals "DATA." The interface **10** is electrically connected (hereinafter, connected) with an interface controller **12** and an LCD controller **14**, which is connected with a DC/DC converter **16**. In addition, the LCD controller **14** is connected with gate-line driving circuits **18** and data-line driving circuits **20**, while the gate-line driving circuits **18** and data-line driving circuits **20** are connected with gate lines and data lines of an LCD panel **22**. Though not shown in **FIG. 1**, the LCD panel **22** has a plurality of unit pixels arranged in a matrix, and each unit pixel has a thin film transistor (TFT). Gate and source electrodes of the TFT are connected by the gate lines and data lines with the

gate-line driving circuits **18** and the data-line driving circuits **20**, respectively. The gate-line driving circuits **18** and the data-line driving circuits **20** have a tape automated bonding (TAB) shape and are mounted between printed circuit boards (PCBs).

[0038] The interface **10** receives video signals output by a video card mounted in a main body of the desktop computer. Namely, when a video card (not shown) of the desktop computer transmits video signals including HSYNC, VSYNC and data signals to the interface **10**, the interface **10** processes them such that certain images, displayed on the LCD panel **22**, coincide with preset resolution and optimum display size. Herein, the interface controller **12** transmits interface control signals to the interface **10** such that the interface **10** operates according to the interface control signals. As a result, the interface **10** produces data signals which are applied to the LCD controller **14**. In turn, the interface controller **14** produces video data signals which are provided to the data-line driving circuits **20**, and gate start and timing signals which are provided to the gate-line driving circuits **18**.

[0039] One or more output power source voltages from the DC/DC converter **16** are applied to the gate-line and data-line driving circuits **18** and **20**.

[0040] The data-line driving circuits **20** and the gate-line driving circuits **18** transmit pixel data and gate signals to the LCD panel **22**, and the LCD panel **22** displays certain images from the pixel data signals according to the gate signals.

[0041] One of the output power source voltages from the DC/DC converter **16** is also connected with a gate electrode "G" of a transistor "Q1" through a first resistor "R1." A source electrode "S" of the transistor Q1 is connected to a ground, and a drain electrode "D" is connected to two lines, such that a first line is connected through a second resistor "R2" with a main power source voltage, for example 3.3 VDC, that is input to the DC/DC converter **16**, while a second line is connected with the interface controller **12**. Further, the interface controller **12** is connected with an anode electrode "A" of a light-emitting diode (LED) "D1," and the cathode electrode "C" of the LED D1 is connected to ground through a third resistor "R3."

[0042] A voltage detector **24** preferably includes the transistor Q1, and first and second resistors R1 and R2. The voltage detector **24** detects the output power source voltages from the DC/DC converter **16** and applies feedback signals to the interface controller **12**. Various modifications will be applicable to the voltage detector **24**, if only the above-mentioned operation can be achieved.

[0043] Further, an alarm device **26** includes an LED D1 and a third resistor R3 to notify the users of an abnormal state, a white-screen error, as described in FIG. 2. Various modifications will also be applicable to the alarm device **26**, if only the above-mentioned operation can be achieved.

[0044] The role and operation of each component of the LCD device according to the preferred embodiment of the present invention will be explained hereinafter.

[0045] The horizontal synchronous signals "HSYNC," vertical synchronous signals "VSYNC," and image data signals "DATA" are input to the interface **10**. According to

the interface control signals from the interface controller **12**, the interface **10** processes and transmits the data signals to the LCD controller **14**. After a preset time interval, the LCD controller **14** transmits the display data signals to the data-line driving circuits.

[0046] When the power source (not shown) applies 3.3 VDC to the DC/DC converter **16**, the DC/DC converter **16** converts it and provides first, second, and third output power source voltages of, for example, -5, 16, and 8.7 VDC. Among the output power source voltages, the first and second output power source voltages -5 and 16 VDC are supplied to the gate-line driving circuits **18**, while 8.7 VDC is supplied to the data-line driving circuits **20**.

[0047] At this point, the first and second output power source voltages are also applied to the gate electrode G of the transistor Q1 of the voltage detector **24** such that the transistor Q1 is turned on only if the voltage level is above a preset value. And further, through drain signals from the drain electrode D of Q1, the interface controller **12** recognizes whether the DC/DC converter **16** supplies the output power source voltages or not.

[0048] For example, in the case of the 8.7 VDC being supplied from the DC/DC converter **16**, when the DC/DC converter supplies the third output power source voltage of 8.7 VDC normally, the transistor Q1 is turned on to apply a first feedback signal, a LOW signal, to the interface controller **12**. But, when the third output power source voltage of 8.7 VDC is abnormally stopped, the transistor Q1 is turned off such that a second feedback signal, a HIGH signal, is applied to the interface controller **12**. Namely, depending on the feedback signals, it is possible to detect whether the DC/DC converter **16** operates normally or not.

[0049] The above-mentioned method of checking the output power source voltages is to prevent the white-screen error. Now, referring to FIG. 4, a detailed explanation of a flow chart of the above-mentioned method will be provided.

[0050] As shown, in a first step, S110, the interface controller **12** transmits first and second enable signals to the interface **10** and the DC/DC converter **16**, respectively, for outputting the data signals and the output power source voltages.

[0051] In a second step, S120, the DC/DC converter **16** outputs the output power source voltages according to the second enable signal, and, after a delay time or a timing offset of N microseconds, the interface **10** outputs the data signals. The timing offset N is preferably 100 to 200 microseconds, which is changeable according to design concepts of the various manufacturing vendors.

[0052] In a third step, S130, the interface controller **12** determines whether the timing offset N is less than a first constant " α ," or not. Herein, the first constant " α " is assumed to be zero, though it is changeable according to design concepts of the various manufacturing vendors. Further, values of the first constant " α " depend on whether hardware of the driving portions is out of order, or not.

[0053] In a fourth step, S140, when the timing offset N is greater than 0, the interface controller **12** determines whether the feedback signal from the transistor Q1 is LOW or not. If the feedback signal is the LOW signal, the process ends since this means that the DC/DC converter operates

normally. At this point, any of the output power source voltages from the DC/DC converter can be used for applying the feedback signal. In this preferred embodiment, the 8.7 VDC output power source voltage is preferably employed. In the case of using the -5 VDC output power source voltage for the feedback signal, the interface controller 12 determines the normal operation of the DC/DC converter according to whether the feedback signal is HIGH, or not, instead.

[0054] Still in the fourth step, S140, if the feedback signal is not LOW, the process proceeds to a fifth step, S150. Therein, the timing offset N is changed to a corrected timing offset $N-\beta$ to prevent the white-screen error. A second constant β is preferably 1 μ s in this preferred embodiment, though it is changeable according to design concepts of the various manufacturing vendors.

[0055] Next, in a sixth step, S160, a software reset is facilitated such that it returns to the first step, S110, and the above-mentioned steps are repeated with the corrected timing offset $N-1$. Unless the feedback signal is LOW, the process repeats steps S140-S160 until the timing offset reaches 0.

[0056] As the timing offset is determined to be equal to 0 in the third step S130, the process proceeds to a seventh step, S170. In the seventh step, the LED D1 of the alarm device 26 operates to alert the user that the hardware of the DC/DC converter 16 is out of order. Thereafter, the process ends.

[0057] According to design concepts of manufacturing vendors, various methods are applicable for alerting the user. For example, the LED D1 preferably blinks its light on and off, or a plurality of LEDs can be used. Further, an alarm sound can be used instead of the LED. The third resistor R3 of the alarm device 26 provides a voltage loss for the LED D1 such that an appropriate voltage is applied to the LED D1. And the above-mentioned flow chart shown in FIG. 4 is stored as a program in a read only memory (ROM) inside or outside of the interface controller 12.

[0058] Preferably, the timing offset N that is preset in the interface controller 12 corresponds to a time difference between a 90% value point of the output voltage and a rising edge, or a start point, of the data signals. A greater timing offset N means that the output power source voltages appear further ahead of the data signals. Even though the timing offset N is preset in the interface controller 12, since the hardware can not be perfect, operation errors such as the white-screen error can still occur. However, as described previously, the preferred embodiment of the present invention prevents the white-screen error using the above-mentioned feedback system.

[0059] That is to say, if the offset timing is decreased by 1 μ s, the interface controller 12 applies a control signal to the interface 10 such that software reset is facilitated and the data signals are advanced. The software reset plays the same role as a conventional turning off and on of a computer system in the desktop computer.

[0060] As shown in FIG. 5, when the timing offset N is decreased by 1 to be $N-1$, the software reset is facilitated and the interface 10 outputs a second data signal that is advanced by 1 μ s with respect to the first data signal. Similarly, a third data signal further is advanced by 1 μ s with respect to the second data signal. Accordingly, the problem

that the data signals are applied before a stabilization of the output power source voltage is eliminated and the white-screen error is prevented.

[0061] Further, as shown in FIG. 5, the output power source voltage is assumed to reach the stabilization when it reaches the 90% point, so the 90% point of the output power source voltage is compared with the first to third (and further) data signals.

[0062] In short, the output power source voltage from the DC/DC converter is detected at first, and the timing offset between the data signal and the output power source voltage is gradually decreased such that the white-screen error that occurs randomly due to the timing problem between the output power source voltage and the data signal is overcome.

[0063] While the invention has been particularly shown and described with reference to the preferred embodiments thereof, it will be understood by those skilled in the art that the foregoing and other changes in form and details may be made therein without departing from the spirit and scope of the invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A driving portion of a liquid crystal display device, comprising:

- a data-line driving circuit;
- a gate-line driving circuit;
- an interface outputting data signals;
- a liquid crystal display controller receiving the data signals and outputting display data signals to the data-line driving circuit and timing signals to the gate-line driving circuit;
- a DC/DC converter supplying a plurality of output power source voltages to the gate-line driving circuit and the data-line driving circuit;
- a voltage detector detecting a voltage level of one of the output power source voltages supplied by the DC/DC converter and outputting a feedback signal; and
- an interface controller receiving the feedback signal from the voltage detector, outputting enable signals to the interface and to the DC/DC converter, and outputting a control signal to advance the data signals when the detected voltage level of the one output power source voltage is less than 90% of a preset voltage level.

2. The driving portion according to claim 1 wherein the voltage detector includes a transistor having gate, source and drain electrodes, and being turned on and off according to the one of the output power source voltages from the DC/DC converter.

3. The driving portion according to claim 2 wherein the transistor is a thin film transistor.

4. The driving portion according to claim 2 wherein the voltage detector includes:

- a first resistor electrically connecting the gate electrode of the transistor with an output terminal of the DC/DC converter;

and a second resistor electrically connecting the drain electrode of the transistor with the liquid crystal display controller,

wherein the source electrode of the transistor is connected to ground, and

wherein the drain electrode of the transistor is electrically connected with the interface controller.

5. The driving portion according to claim 1, further comprising an alarm device alerting a user only when the feedback signal is abnormal in spite of outputting the data signals and the output power source voltage at a same time.

6. The driving portion according to claim 5, wherein the alarm device is a light-emitting device emitting light according to a second control signal applied from the interface controller.

7. The driving portion according to claim 6, wherein the light-emitting device includes:

a light-emitting diode; and

a resistor,

wherein the light-emitting diode includes an anode electrode electrically connected with the interface controller, and a cathode electrode electrically connected with a first end of the resistor, and

wherein a second end of the resistor is connected with ground.

8. In a liquid crystal display device including:

a data-line driving circuit,

a gate-line driving circuit,

an interface controller outputting control signals according to a preset program,

an interface receiving video signals and converting said video signals to data signals according to a preset resolution and display size,

a liquid crystal display controller receiving the data signals from the interface and outputting display data signals to the data-line driving circuit and a timing signal to the gate-line driving circuit,

a DC/DC converter receiving a power source voltage and converting the power source voltage into a plurality of output power source voltages, and

a liquid crystal display panel receiving the display data signals from the data-line driving circuit and displaying images according to a signal from the gate-line driving circuit, a method of preventing a white-screen error, comprising:

(a) transmitting enable signals from the interface controller to the DC/DC converter and the interface;

(b) outputting the data signals from the interface after a timing offset N from a time of transmitting the enable signals;

(c) determining whether the timing offset N is less than a first constant α , the first constant α being preset corresponding to a time period indicating a hardware malfunction;

(d) when the timing offset N is greater than the first constant α , determining whether the output power source voltage supplied from the DC/DC converter is normal;

(e) decreasing the timing offset by a second constant β when the output power source voltage is abnormal; and

(f) repeating steps (a) through (e) until the output power source is determined to be normal.

9. The method according to claim 8 wherein whether the output power source voltage supplied from the DC/DC converter is normal is determined by a feedback signal from a voltage detector electrically connected with an output terminal of the DC/DC converter.

10. The method according to claim 9 wherein the voltage detector includes a transistor having gate, source and drain electrodes and being turned on and off according to the one of the output power source voltages from the DC/DC converter.

11. The method according to claim 10 wherein the transistor is a thin film transistor.

12. The method according to claim 10 wherein the voltage detector includes:

a first resistor electrically connecting the gate electrode of the transistor with an output terminal of the DC/DC converter, and

a second resistor electrically connecting the liquid crystal display controller with the drain electrode of the transistor, the source electrode of the transistor being connected to ground, and the drain electrode of the transistor being electrically connected with the interface controller.

13. The method according to claim 8, further comprising:

when the timing offset N is less than the first constant α , alerting the hardware malfunction of the DC/DC converter via an alarm device.

14. The method according to claim 13, wherein the alarm device is a light-emitting device emitting light according to one of the control signals from the interface controller.

15. The method according to claim 14, wherein the light-emitting device includes:

a light-emitting diode; and

a resistor,

wherein the light-emitting diode includes an anode electrode electrically connected with the interface controller, and a cathode electrode electrically connected with a first end of the resistor, and

wherein a second end of the resistor is connected with ground.

16. The method according to claim 8, further comprising facilitating a software reset before repeating to step (a).

17. A liquid crystal display (LCD) device, comprising:

a liquid crystal display panel having a plurality data lines, a plurality of gates lines, and a plurality of TFTs each connected with one of the gate lines and one of the data lines;

an interface receiving a video signal and outputting a data signal;

- a liquid crystal display controller receiving the data signal and outputting a video data signal and a timing signal;
- a data-line driving circuit receiving the video data signal from the liquid crystal display controller and providing pixel data to the data lines;
- a gate-line driving circuit receiving the timing signal from the liquid crystal display controller and providing gate signals to the gate lines;
- a DC/DC converter supplying an output power source voltage to the one of the data-line driving circuit and the gate line driving circuit;
- a voltage detector detecting a voltage level of the output power source voltage supplied by the DC/DC converter and outputting a feedback signal; and
- an interface controller receiving the feedback signal from the voltage detector, outputting enable signals to the interface and to the DC/DC converter, and outputting a control signal to advance the data signal when the detected voltage level of the output power source voltage is less than a preset voltage level.

18. The LCD device of claim 17, wherein the interface controller advances the data signal by a predetermined time offset, β .

19. The LCD device of claim 17, wherein the interface controller repeatedly supplies the feedback signal to advance the data signal until the data signal is advanced to within a predetermined time interval α of the enable signal supplied to the interface.

20. The LCD device of claim 19, wherein the interface controller repeatedly advances the data signal by a predetermined time offset, β .

21. The LCD device of claim 18, further comprising an alarm which alerts a user of a malfunction when the data signal is advanced to within the predetermined time interval α of the enable signal supplied to the interface.

22. The LCD device of claim 19, wherein the alarm comprises a light-emitting display.

23. A liquid crystal display (LCD) device, comprising:

- a liquid crystal display panel;
- means for supplying a data signal for displaying an image on the liquid crystal display panel;
- means for supplying an output voltage signal used to drive the liquid crystal display panel to display the image;
- a voltage detector detecting a voltage level of the output voltage signal and providing a feedback signal indicating whether the voltage level exceeds a predetermined threshold; and
- a controller receiving the feedback signal from the voltage detector and outputting control signals to the means for

supplying the data signal and the means for supplying the output voltage signal to adjust a time interval between the output voltage signal and a start of the data signal.

24. The LCD device of claim 23, wherein the means for supplying the output voltage signal comprises a DC/DC converter receiving a supply voltage and producing therefrom the output voltage signal.

25. The LCD device of claim 23, wherein the controller decreases the time interval between the output voltage signal and a start of the data signal in response to the feedback signal indicating that the voltage level does not exceed the predetermined threshold.

26. The LCD device of claim 25, wherein the controller decreases the time interval between the output voltage signal and a start of the data signal by a fixed offset, β .

27. The LCD device of claim 25, further comprising an alarm which alerts a user of a malfunction when the time interval between the output voltage signal and a start of the data signal is decreased to within a predetermined time interval α .

28. A method of driving a liquid crystal display (LCD) device, comprising:

providing a data signal for displaying an image on the liquid crystal display panel;

supplying an output voltage signal used to drive the liquid crystal display panel to display the image;

detecting a voltage level of the output voltage signal;

providing a feedback signal indicating whether the voltage level exceeds a predetermined threshold; and

in response to the feedback signal, adjusting a time interval between the output voltage signal and a start of the data signal.

29. The method of claim 28, further comprising performing a software reset for a computer associated with the LCD device.

30. The method of claim 28, wherein adjusting the time interval between the output voltage signal and a start of the data signal comprises decreasing the time interval between the output voltage signal and the start of the data signal in response to the feedback signal indicating that the voltage level does not exceed the predetermined threshold.

31. The method of claim 30, wherein the time interval is decreased by a fixed offset, β .

32. The method of claim 30, further comprising alerting a user of a malfunction when the time interval between the output voltage signal and the start of the data signal is decreased to within a predetermined time interval α .

* * * * *

专利名称(译)	用于防止液晶显示装置中的白屏错误的装置和方法		
公开(公告)号	US20010011980A1	公开(公告)日	2001-08-09
申请号	US09/749451	申请日	2000-12-28
[标]申请(专利权)人(译)	JANG KUN KYEONG		
申请(专利权)人(译)	JANG KYEONG-KUN		
当前申请(专利权)人(译)	JANG KYEONG-KUN		
[标]发明人	JANG KYEONG KUN		
发明人	JANG, KYEONG-KUN		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3648 G09G2330/02		
优先权	1019990026942 1999-07-05 KR		
其他公开文献	US6556192		
外部链接	Espacenet USPTO		

摘要(译)

用于防止液晶显示 (LCD) 装置中的白屏错误的系统和方法通过检测来自DC / DC转换器的输出电压信号并减少输出电压信号和LCD的数据信号之间的时间延迟来操作逐渐增加固定值，直到克服了输出电压信号和数据信号之间的时序问题。当输出电压信号和数据信号之间的时间间隔太大时，执行软件复位，导致输出电压信号在数据信号导通之前关闭。重复该过程直到定时正确，使得当输出数据信号时检测到输出电压信号保持。如果时间延迟减小到预定阈值，则确定发生了故障，并且向用户提供警报。

