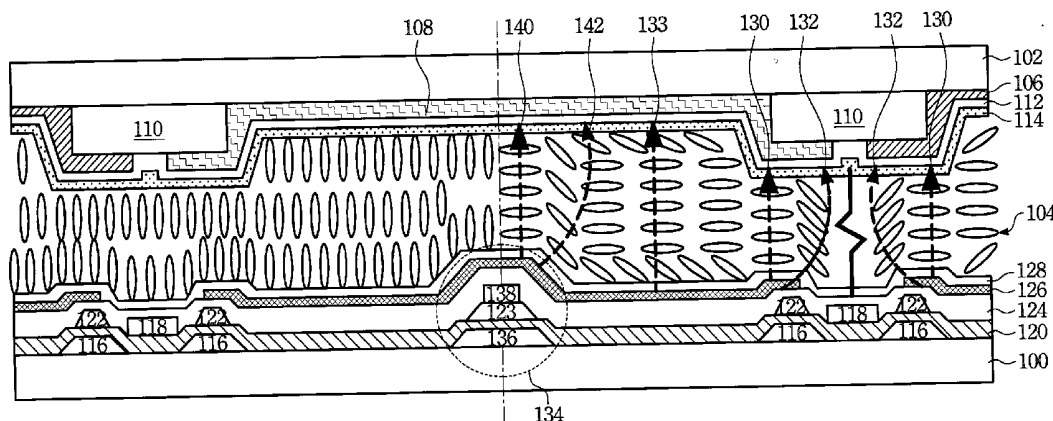


(43) **Pub. Date:** **Aug. 21, 2003**

ABSTRACT

(52) **U.S. Cl.** **349/110; 349/129**

A TFT-LCD having a first glass substrate provided for fabricating transistors, a second glass substrate provided for fabricating a color filter, and a liquid crystal layer interposed between the second and first glass substrates. The TFT-LCD comprises the following components. A color filter is formed beneath the second glass substrate which has plural color filter elements and a first black matrix, wherein each grid pattern of the first black matrix is disposed to surround a color filter element. And the color filter element formed beneath the second glass substrate extends outward to surfaces of the first black matrix. A common electrode is formed beneath the color filter, wherein a part of the common electrode, the pixel units, and the first black matrix are overlapped to have a downward protruding structure. A second black matrix is formed on the first glass substrate, wherein each grid pattern of the second black matrix is disposed under inner edges of the each grid pattern of the first black matrix. And a pixel electrode is formed on the first glass substrate and located under the color filter element, wherein the pixel electrode extends outward to overlap the second black matrix to have an upward protruding structure.



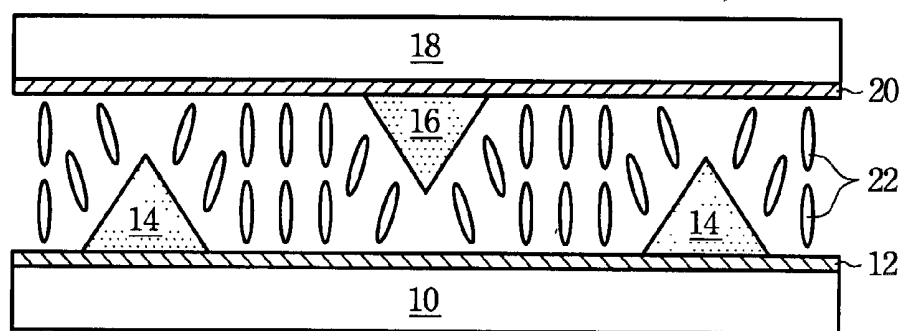


Fig. 1 A (Prior Art)

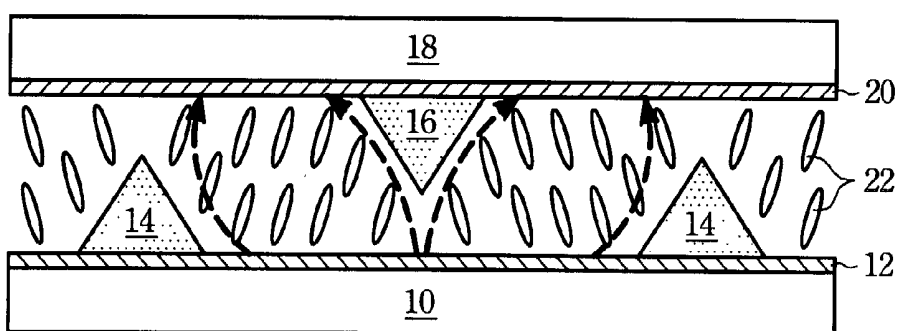


Fig. 1 B (Prior Art)

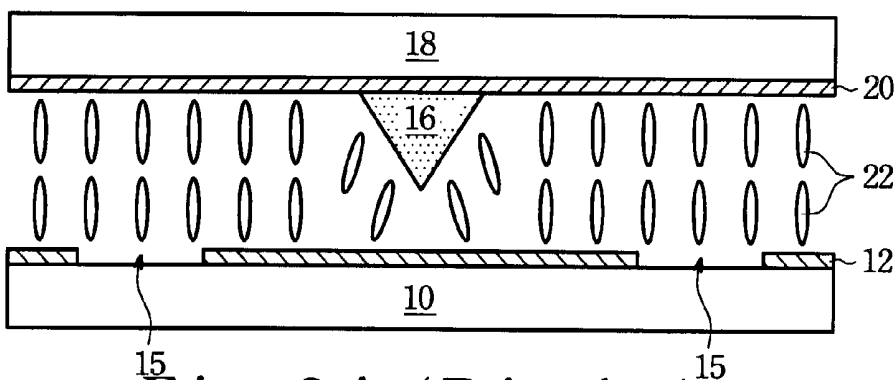


Fig. 2 A (Prior Art)

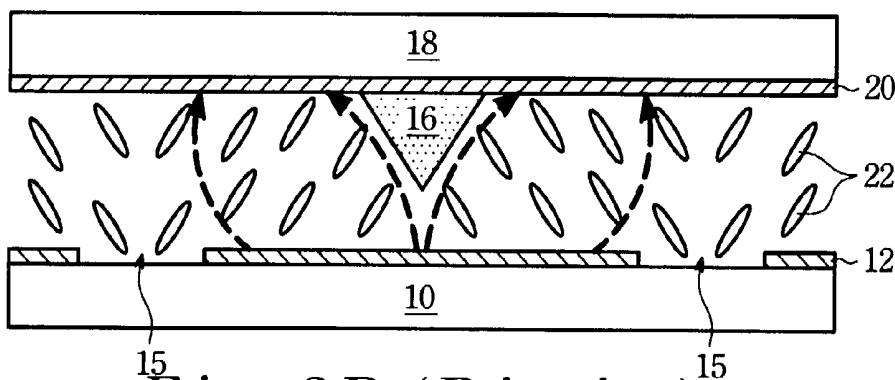


Fig. 2 B (Prior Art)

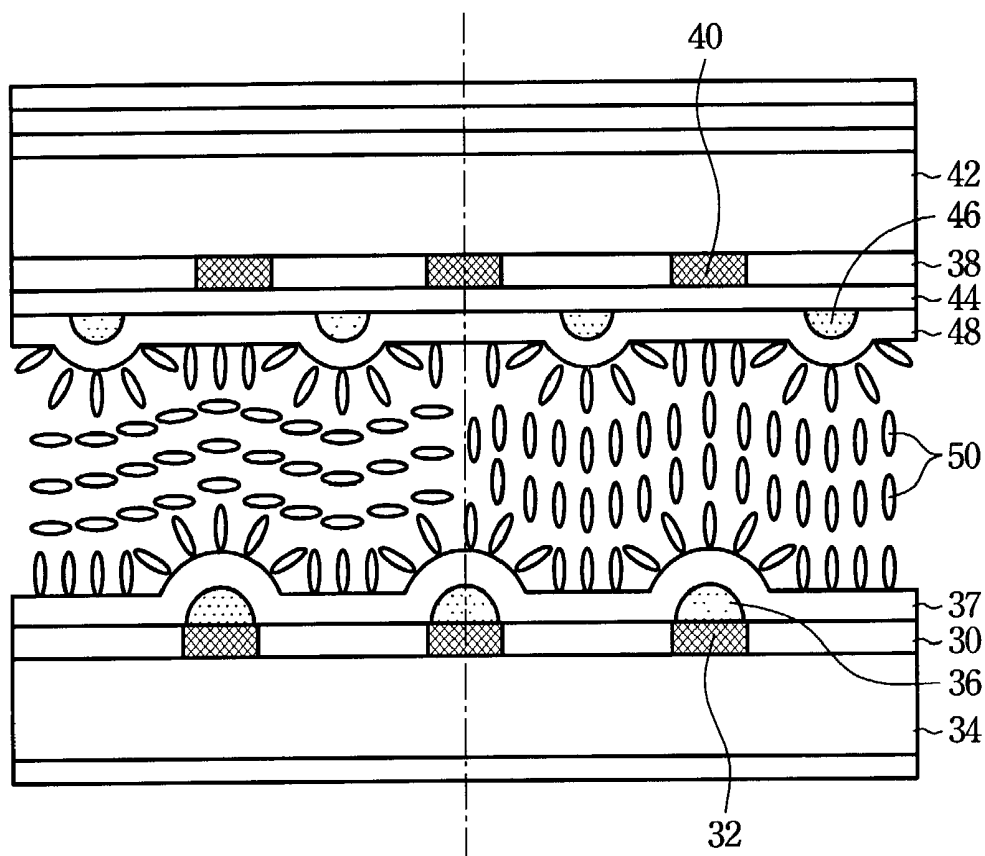


Fig. 3 (Prior Art)

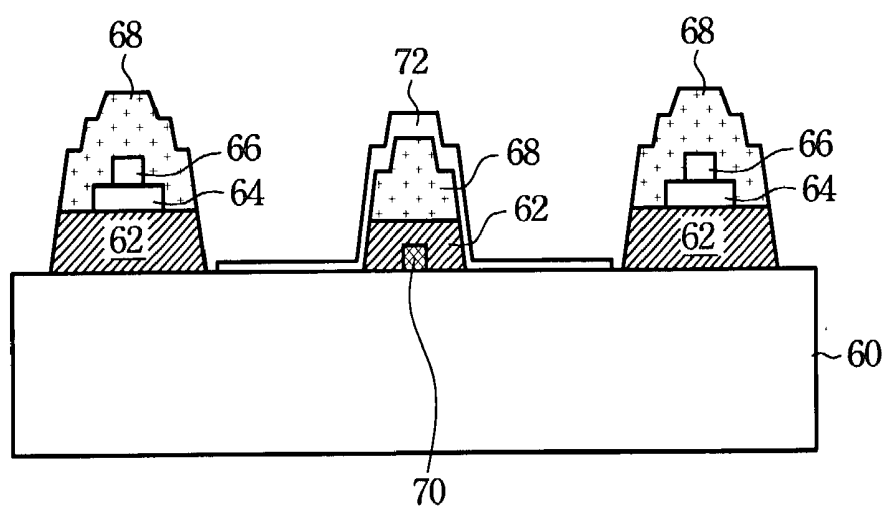


Fig. 4 (Prior Art)

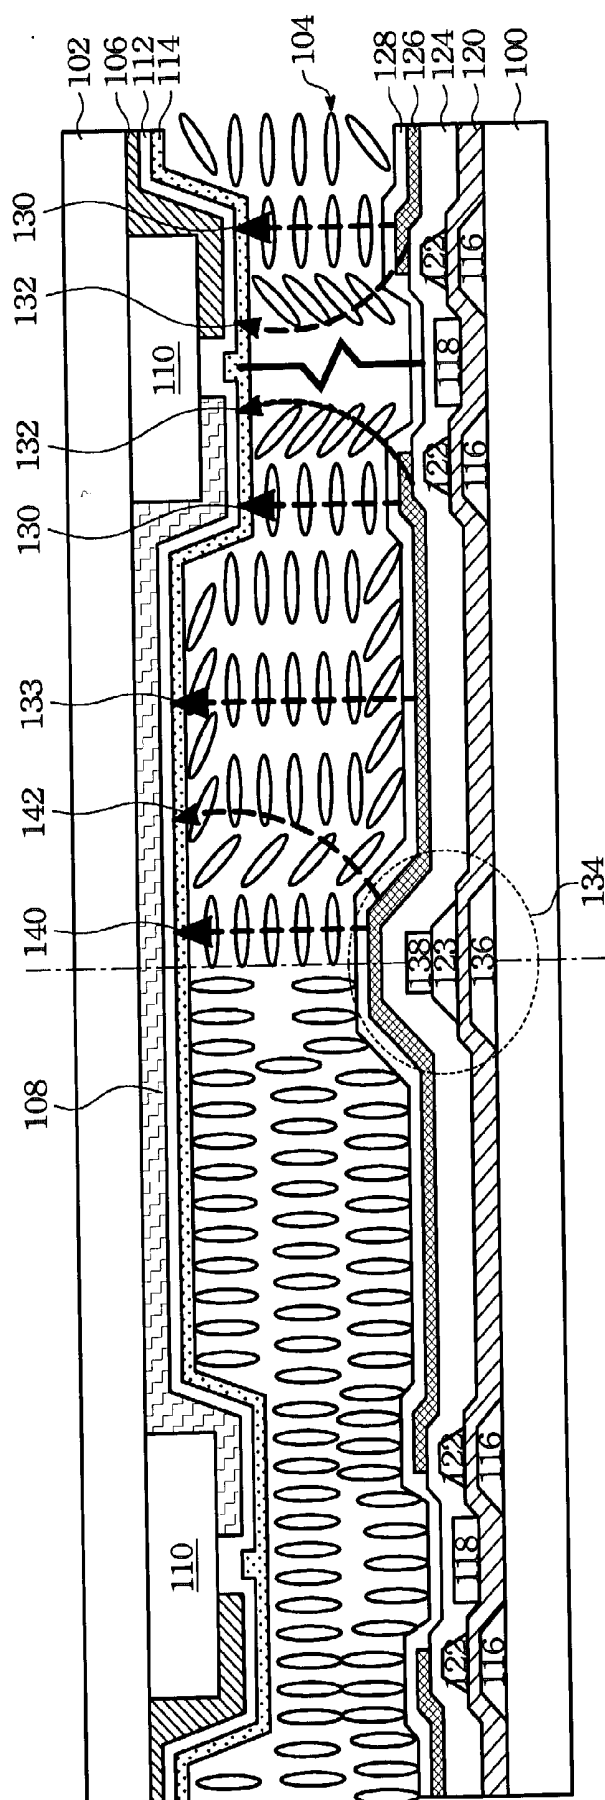


Fig. 5A

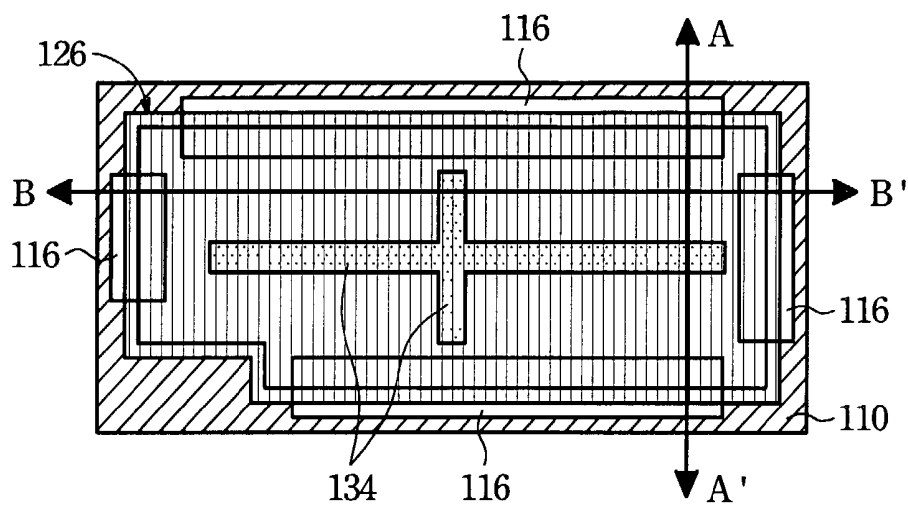


Fig. 5B

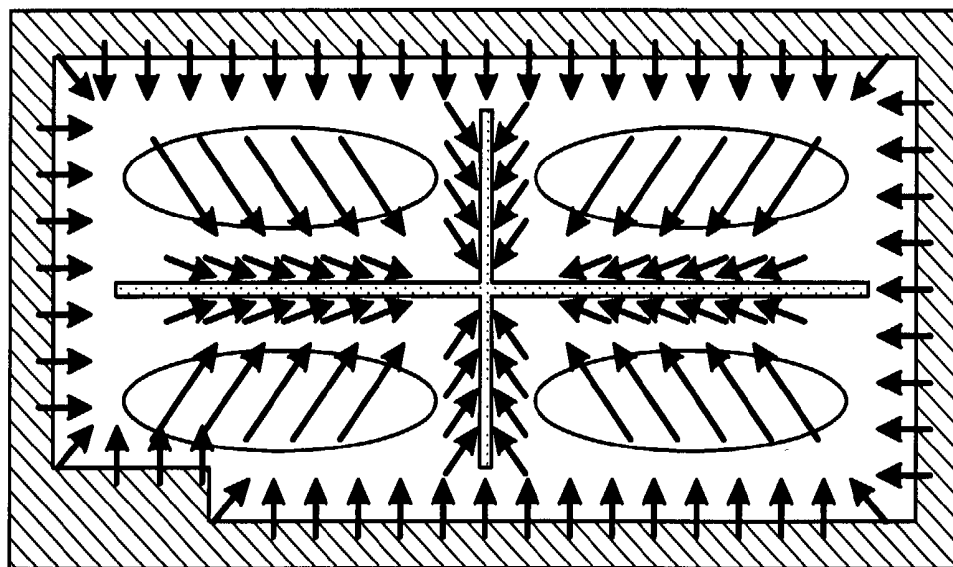


Fig. 5C

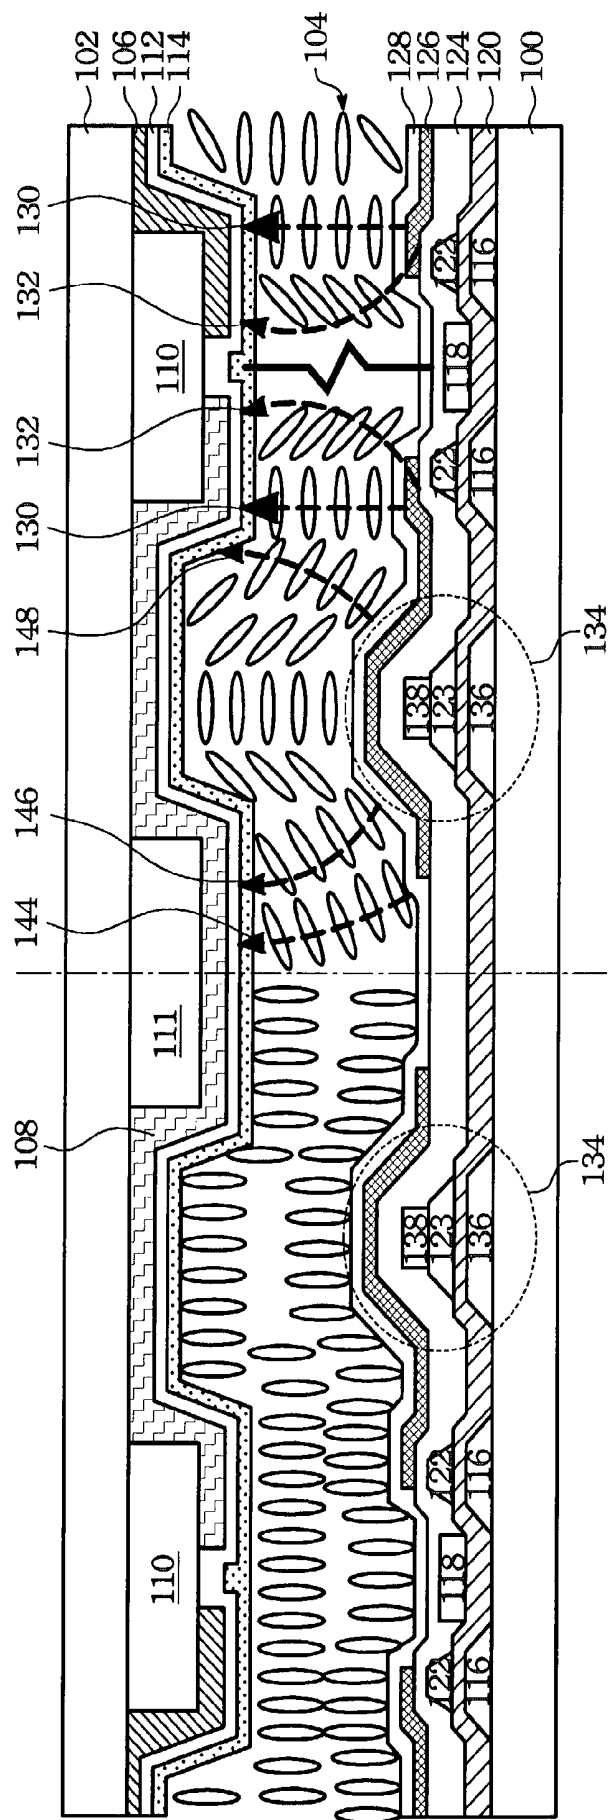


Fig. 6A

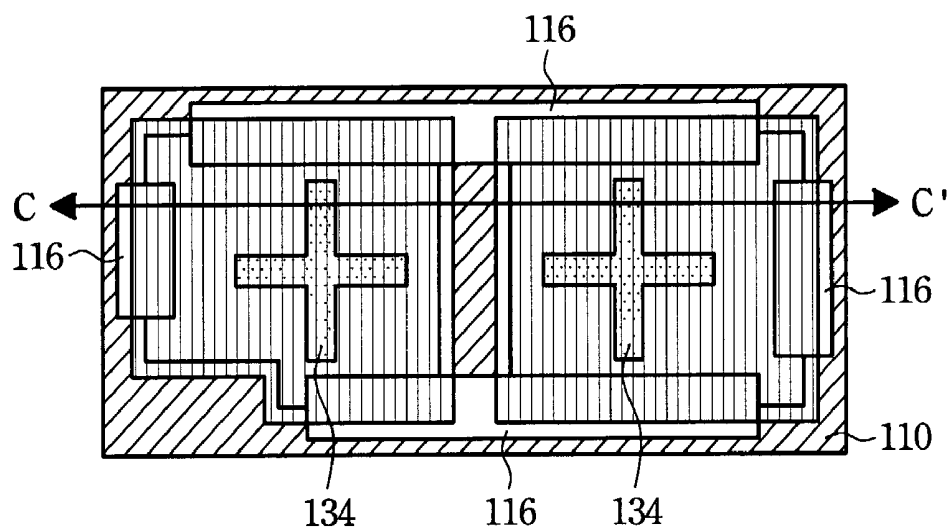


Fig. 6B

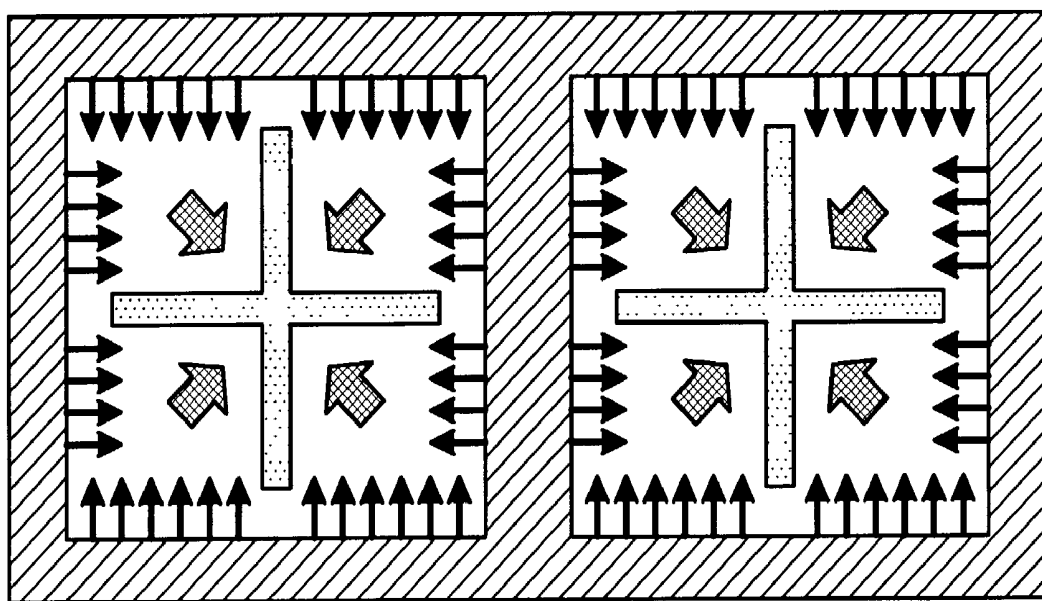


Fig. 6C

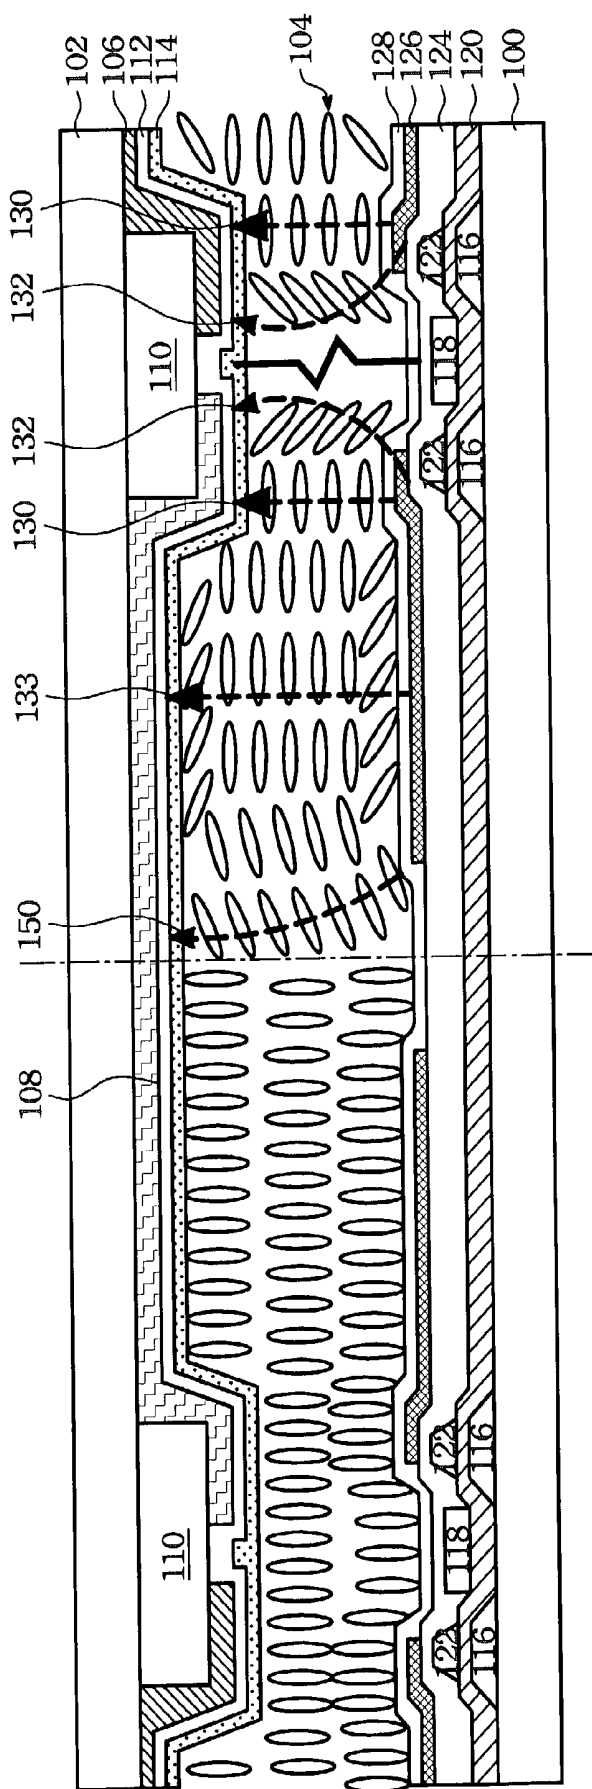


Fig. 7 A

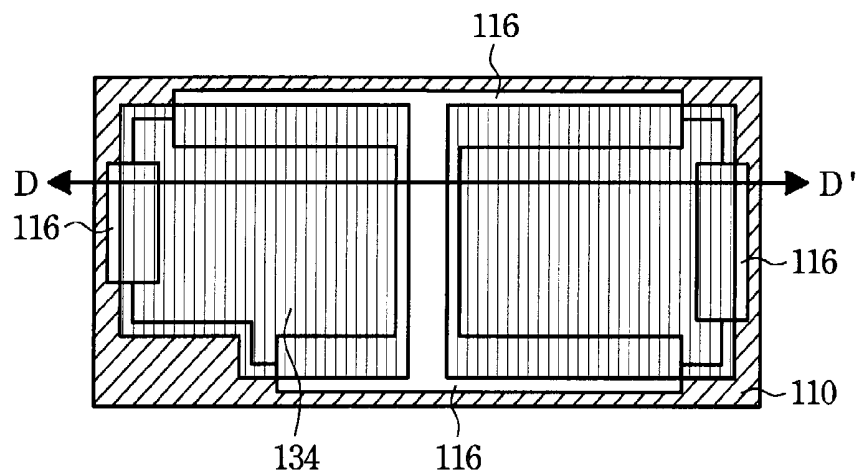


Fig. 7 B

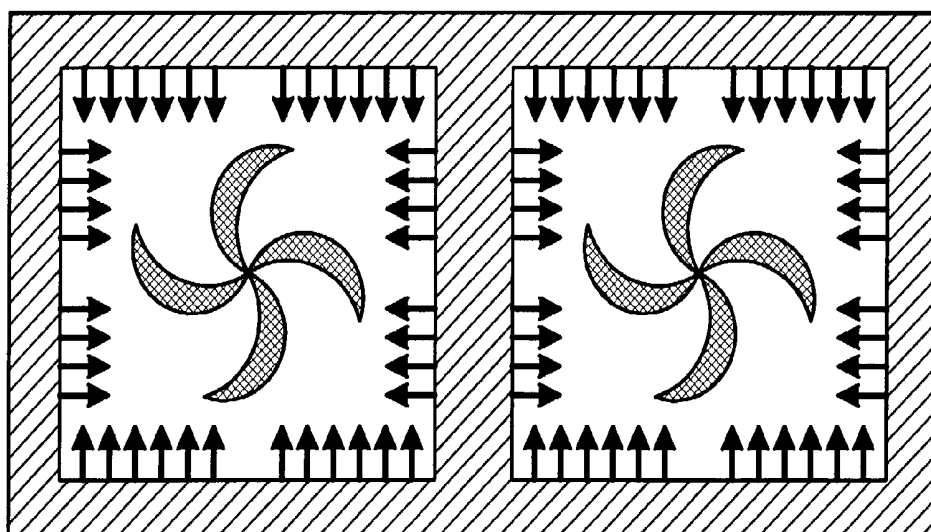


Fig. 7 C

LIQUID CRYSTAL DISPLAY WITH WIDE VIEWING ANGLE

FIELD OF THE INVENTION

[0001] The present invention relates to a TFT-LCD structure, and more specifically, to a TFT-LCD structure with a protruding structure composed of the black matrix (BM) for having the large electrical field and oblique electrical field to tilt the liquid crystal molecules in different directions for increasing the wide viewing angle.

BACKGROUND OF THE INVENTION

[0002] With the advance of techniques for manufacturing thin-film transistors, the liquid crystal displays (LCD) are widely applied in electrical products, such as PDAs, watches, laptops, digital cameras, mobile phones, etc. due to advantages as smaller size, portability, and lower power consumption. Further, after the industries endeavoring to research and develop new generation of manufacturing technique, the decreasing cost of production makes the TFT-LCD devices more popular and widely applied in various fields. For further promoting the quality and application of TFT-LCD devices, how to increase the wide viewing angle and shorten the response time of image are next important issues nowadays.

[0003] Please refer to FIG. 1A and 1B, these figures show the TFT-LCD devices with multi-domain vertical alignment (MVA) developed by Fujitsu. In the associated manufacturing process, after a pixel electrode 12 is deposited on a first glass substrate 10, a bump 14 is formed thereon for controlling the alignment of liquid crystal molecules. Similarly, in the fabricating process of the color filter, another bump 16 is defined too beneath an upper glass plate 18 and a common electrode 20.

[0004] Thus, a plurality of liquid crystal molecules 22 are held between the upper and first glass substrate 18 and 10. The arrangement of liquid crystal molecules 22 without the electric field is illustrated as FIG. 1A. Some liquid crystal molecules 22 adjacent to the bump 14 and 16 are inclined slightly by the affection of bump appearance. After supplying voltage to the pixel electrode 12 and the common electrode 20, the electrical field between the upper and first glass substrate 18 and 10 is getting oblique according to the appearance of the bumps 14 and 16 to drive the liquid crystal molecules 22 rotate in the predetermined directions, as shown in FIG. 1B. Thus, the wide viewing angle, the light transmitting efficiency and the image contrast all can be increased.

[0005] Another type of MVA TFT-LCD device provided by Fujitsu is shown in FIGS. 2A and 2B. In this type of TFT-LCD device, instead of forming the bump 14 for molecule alignment, the pixel electrode 12 is etched to form an opening 15 therein. And beneath the common electrode 20, the bump 16 is still formed and disposed staggered with the opening 15. Accordingly, when there is no electric field, the liquid crystal molecules 22 are slightly inclined by affection of the bump 16 as shown in FIG. 2A. And when the pixel electrode and the common electrode are supplied with voltage, the electrical field (as dotted line) is oblique due to affection of the opening 15 and the bump 16 as shown in FIG. 2B. Due to the affections of the bump 16 and the oblique electrical field, the liquid crystal molecules 22 can

rotate in the predetermined directions. It is noted that the bump 14 formed on the first glass substrate as shown in FIGS. 1A and 1B is not required in this type of TFT-LCD devices, so the step of forming the bump 14 can be omitted and the throughput can be promoted.

[0006] Please refer to FIG. 3, the TFT-LCD with back-side exposure multi-domains homeotropically aligned (BSE-MHA) developed by Industrial Research Institute of Taiwan (IRIT) is illustrated. After fabricating a pixel electrode 30 and bus-lines patterns 32 on a first glass substrate 34, surrounding wall bumps (SWB) 36 are defined on the bus-lines patterns 32, and an alignment film 37 is coated thereon. Besides, after defining a color filter 38 and a black matrix 40 beneath an upper glass plate 42, a common electrode 44 is formed beneath the color filter 38 and surrounding wall bumps 46 are next formed beneath the common electrode 44. And an alignment film 48 is then formed to cover the surrounding wall bumps 46 and the common electrode 44.

[0007] When there is no electric field, the most liquid crystal molecules 50 are vertical arranged on the right side of the dotted line in FIG. 3. However, some liquid crystal molecules 50 adjacent to the surrounding wall bump 36 and 46 are slightly inclined due to affection of the bump structures. When the pixel electrode 30 and the common electrode 44 are supplied with voltage to generate the electric field, the liquid crystal molecules 50 can rotate in predetermined directions by affections of the surrounding wall bump 36 & 46 and the oblique electrical field occurring therein to increase the brightness and the wide viewing angle as the left side of the dotted line. Notedly, no matter the MVA type or the BSE-MHA type of TFT-LCD, it is required extra procedures to form the bumps or blocks. And the associated manufacture is more complicated and the production period is prolonged.

[0008] Then please refer to FIG. 4, another type of TFT-LCD device by forming stacked bump composed of thin-film transistors is illustrated. The bumps stacked on the first glass substrate 60 include first and second bumps. The first bump comprises the stacked layers of a silicon nitride layer 62, an active layer 64, source/drain electrodes 66 and a passivation layer 68. And the second bump comprises the stacked layers of a gate structure 70, the silicon nitride layer 62 and the passivation layer 68. And a pixel electrode 72 is formed on the first glass substrate 60 between two adjacent the first bumps and on the second bump. Thus due to the affections of the bump appearance and oblique electrical field, the liquid crystal molecules can aligned in different directions to increase wide viewing angle and brightness and to shorten response time of the liquid crystal molecules.

[0009] However the associated manufacturing process is very difficult and complex because it is required to stack each layer precisely for forming the bump structures. Especially, following the promotion of the image quality, the occupied areas of the unit pixel and the thin film transistors are shrinkage, so how to deposit and align the later layer precisely onto the former layer and how to assure the gate structure and source/drain electrodes still can operate normally are both difficult.

SUMMARY OF THE INVENTION

[0010] A purpose of the present invention is to provide a TFT-LCD structure with increasing wide viewing angle and shorten response time that is fabricated by the original procedures and there is no requirement of any extra step.

[0011] The present invention discloses a TFT-LCD structure, which has a first glass substrate provided for fabricating the thin film transistors, a second glass substrate provided for fabricating the color filter, and a liquid crystal layer containing liquid crystal molecules therein interposed between the first and second glass substrate. The TFT-LCD comprises a color filter, a common electrode, a metal black matrix and a pixel electrode. The color filter is fabricated beneath the second glass substrate and has a pixel array which comprises plural color filter elements arranged in order. Each color filter element is adhered beneath the second glass substrate. The color filter also comprises a first insulating black matrix formed beneath the second glass substrate. And the grid pattern of the first insulating black matrix is disposed to surround each color filter element. The edges of the color filter element extend to the surfaces of the first insulating black matrix. Besides, a pattern of a second insulating black matrix is fabricated between the color filter elements and the second glass substrate, and is crossing the central region of the unit pixel to divide it into two parts.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The foregoing aspects and many of the attendant advantages of this invention will become more readily appreciated as the same becomes better understood by reference to the following detailed description, when taken in conjunction with the accompanying drawings, wherein:

[0013] FIGS. 1A, 1B illustrate the cross section view of the MVA (multi-domain vertical alignment) TFT-LCD and the alignments of liquid crystal molecules according to the prior art;

[0014] FIGS. 2A & 2B illustrate the cross section view of the MVA (multi-domain vertical alignment) TFT-LCD and the alignments of liquid crystal molecules according to the prior art;

[0015] FIG. 3 illustrates the cross section view of the BSE-MHA type of TFT-LCD and the alignments of the liquid crystal molecules according to the prior art;

[0016] FIG. 4 illustrates the cross section view of the EVA type of TFT-LCD and the alignments of the liquid crystal molecules according to the prior art;

[0017] FIGS. 5A, 5B and 5C illustrate the cross section view and top view of the TFT-LCD structure and the alignments of the liquid crystal molecules according to the first embodiment of the present invention;

[0018] FIGS. 6A, 6B and 6C illustrate the cross section view and top view of the TFT-LCD structure and the alignments of the liquid crystal molecules according to the second embodiment of the present invention; and

[0019] FIGS. 7A, 7B and 7C illustrate the cross section view and top view of the TFT-LCD structure and the alignments of the liquid crystal molecules according to the third embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0020] The present invention provides a TFT-LCD structure for enhancing the wide viewing angle. The black matrix formed in the color filter has protruding structures for increasing the electrical field on edges of each unit pixel region and producing the oblique electrical field to increase wide viewing angle. The detailed description is as follows.

[0021] First Embodiment:

[0022] Please refer to FIGS. 5A, 5B and 5C, which illustrate the TFT-LCDs with wide viewing angle and rapid response speed according to the present invention. FIG. 5A shows the cross-section view of a unit pixel of the TFT-LCD. The TFT-LCD structure comprises a first glass substrate 100 provided for fabricating thin-film transistors and a second glass substrate 102 provided for fabricating a color filter. And a liquid crystal layer 104 containing liquid crystal molecules is interposed between the first and second glass substrate 100 and 102. When the electric field supplied to the liquid crystal layer 104 is changed, the alignments and arrangements of the liquid crystal molecules are also changed to alter the transmitting angle of light therein.

[0023] The TFT-LCD also comprises a color filter 106 fabricated beneath the second glass substrate 102. The color filter 106 has plural color filter elements 108 and a black matrix 110. The color filter elements 108 are arranged in an array form, and each grid pattern of the black matrix 110 is disposed to surround a color filter element 108. In general, each color filter element 108 occupies a unit pixel region and dyed single color of green, red or blue. And in a preferred embodiment, the black matrix 110 can be made of insulating materials such as resin.

[0024] Still refer to FIG. 5A, each color filter element 108 is formed beneath the second glass substrate 102 and its edges extend outward to surfaces of the grid pattern of black matrix 110. The grid pattern of black matrix 110 can be applied to define the border of two adjacent color filter elements 108. Even though the two adjacent color filter elements 108 both extend to the surfaces of the black matrix 110, the two adjacent color filter elements 108 will not overlap and can expose a part of lower surfaces of the black matrix 110.

[0025] Besides, a common electrode 112 is fabricated beneath the color filter 106 to uniformly cover the color filter elements 108 and the black matrix 110. It is noted that the black matrix 110 has a considerable height and overlaps the color filter elements 108 and the common electrode 112 to form a downward protruding structure, as shown in FIG. 5A. In general, after fabricating the common electrode 112, an alignment film 114 is formed beneath the common electrode 112 to increase the aligning effect of the liquid crystal molecules.

[0026] Besides, several protruding structures can be fabricated on the first glass substrate 100 in the procedures of manufacturing the thin-film transistors. For instance, in the procedure of defining the gate structures, the floating black matrix (Floating BM) 116 made of metal material can be simultaneously fabricated on the first glass substrate 100. As shown in FIG. 5A, the pattern size of the floating black matrix 116 is smaller than that of the black matrix 110. And each grid pattern of the floating black matrix 116 is located under inner edges of the grid pattern of the black matrix 110. Thus, as shown in FIG. 5A, two patterns of the floating black matrix 116 are located under two edges of the grid pattern of the black matrix 110. Besides, the data-line pattern 118 of metal material is fabricated between two adjacent grid patterns of the floating black matrix 116. Namely the data-line pattern 118 formed on the first glass substrate 100 is just under the black matrix 110.

[0027] Besides, for increasing the height of the pixel electrode over the first glass substrate 100, an insulating

layer **120**, an insulating block **122** and a passivation layer **124** are fabricated in sequence and overlapped on the floating black matrix **116** to have an upward protruding structure. As described above, the floating black matrix **116** is manufactured in the procedure of defining the gate structure. Similarly, the insulating layer **120** and the insulating block **122** are fabricated in the procedures of defining the gate oxide and the etching stopper individually. After depositing the passivation layer **124** to cover the upward protruding structure, a pixel electrode **126** is then formed thereon. As shown in **FIG. 5A**, the pixel electrode **126** is located under the color filter element **108** and extending outward to surfaces of the floating black matrix **116**. Similarly, by overlapping the floating black matrix **116**, the insulating layer **120**, the insulating block **122** and the passivation layer **124**, the pixel electrode can be upward protruding.

[0028] It is noted that the edges of pixel electrode **126** can not extend over the pattern of the floating black matrix **116** for preventing from the cross talk between the pixel electrode **126** and data-line patterns **118**. Further, by overlapping these layers the distance from the pixel electrode **126** to the data-line patterns **118** can be prolonged. Namely, the pixel electrode **126** can not extend to cover the whole data-line patterns **118**. Thus, the data signals transferred through the data-line patterns **118** will not interference with the electrical signals transferred in the pixel electrode **126**. Similarly, after fabricating the pixel electrode **126**, an alignment film **128** is preferably deposited thereon. Please refer to **FIG. 5A**, on the left side of the central dotted line, the arrangements of the liquid crystal molecules without electric field between upper and first glass substrate **102** and **100** is shown.

[0029] When the voltage is supplied to the pixel electrode **126** and the common electrode **112** to generate electric field, the arrangements of the liquid crystal molecules are shown on the right side of the central dotted line in **FIG. 5A**. Because the gap between the black matrix **110** and the floating black matrix **116** decreases, the electrical field occurring therebetween (as the arrow **130**) is larger than that occurring in other parts of the unit pixel region (as the arrow **133**) in the liquid crystal layer **104**. And an oblique electrical field (as the arrow **132**) occurs between the pixel electrode **126** and the common electrode **112**. Accordingly, the liquid crystal molecules in the liquid crystal layer will rotate in different directions along the electrical field to have wide viewing angle effect.

[0030] It is noted that for the purpose of increasing the response speed and wide viewing angle effect, a protruding structure **134** is defined on the first glass substrate **100** in the procedures of defining the thin-film transistors. The protruding structure **134** composed of a metal block **136**, the insulating layer **120**, the insulating block **123**, a metal pattern **138** and the passivation layer **124**. The metal pattern **138** can be defined in the procedure of defining the data-line patterns **118**. In a preferred embodiment, the protruding structure **134** is located under the central part of the color filter element **108** to shorten the distance between the pixel electrode **126** and the common electrode **112**. Thus, when the pixel electrode **126** and the common electrode **112** are supplied with voltage, the electrical field on this region is getting large (as arrow **140**) and the oblique electrical field (as arrow **142**) occurs on the inclined edges of the protruding structure **134**.

[0031] Please refer to **FIG. 5B**, the top view of a unit pixel region is shown. As described above, the black matrix **110** is defined to surround the color filter element in the unit pixel region. And the floating black matrix **116** is defined on inner edges of the grid pattern of the black matrix **110**. As to the pixel electrode **126** fabricated on the first glass substrate can extend from the central region of the color filter element outward to top surfaces of the floating black matrix **116**. It is noted that the protruding structure **134** in this embodiment has a crisscross appearance and extend from the central region of the color filter element outward to four different directions. And the cross section views according to the A-A' line and the B-B' line both are shown as the cross section view in **FIG. 5A**.

[0032] Please refer to **FIG. 5C**, the rotating directions of the liquid crystal molecules after generating the electric field is illustrated. Because the crisscross protruding structure **134** on the central part in the unit pixel region makes the electrical field oblique as arrow **142**, the adjacent liquid crystal molecules can rotate toward the protruding structure **134**. In the meanwhile the liquid crystal molecules distributed on peripheral part of the unit pixel region can rotate toward the central part due to the large electrical field (arrow **130**) and the oblique electrical field (arrow **132**) to have four-domain vertical alignment and to increase the wide viewing angle.

[0033] Second Embodiment:

[0034] Please refer to **FIGS. 6A, 6B** and **6C**, these figures illustrate another TFT-LCD structure according to the present invention. As mentioned above, the color filter **106** is fabricated beneath the second glass substrate **102**. It is noted that the color filter **106** comprises the plural color filter elements **108** and the black matrix **110** has grid patterns which surround each color filter element **108**. Additionally the color filter **106** also has a black matrix **111** interposed between the color filter element **108** and the second glass substrate **102**. And the pattern of the black matrix **111** is located in the central region of the color filter element **108**. Thus, when the common electrode **112** is formed beneath the color filter **106**, except the downward protruding structure constructed of overlapped the black matrix **110** and the color filter element **108**, another protruding structure constructed of overlapped the black matrix **111** and the color filter element **108** also make the common electrode **112** downward protruding.

[0035] For increasing the alignment precision and stability of the liquid crystal molecules, after fabricating the pixel electrode **126** on the first glass substrate **100**, a lithography etching procedure is done to form an opening on the pixel electrode **126** under the pattern of the black matrix **111** to expose a part of the passivation layer **124**. Besides, a protruding structure **134** is fabricated on the first glass substrate **100** simultaneously in the process of manufacturing the thin-film transistors to increase aligning response speed of the liquid crystal molecules. The protruding structure **134** is located on the first glass substrate **100** between the black matrix **110** and **111**. Thus, when the voltage is supplied to the pixel electrode **126** and the common elec-

trode 112, an oblique electrical field (arrow 144) occurs between the opening edges of the pixel electrode 126 and the black matrix 111. Similarly, other oblique electrical fields (such as arrow 146 and 148) occur between the protruding structure 134 and the black matrix 111 & 110. As described above, the left and right sides of the central dotted line illustrate individually alignments of the liquid crystal molecules with the electric field or not.

[0036] Please refer to FIG. 6B, the top view of the unit pixel is shown. As mentioned above, the grid pattern of the black matrix 110 is disposed to surround each color filter element. And the grid pattern of the floating black matrix 116 is disposed under inner edges of each grid pattern of the black matrix 110. As to the pixel electrode 126 on the first glass substrate is divided into two parts by the through opening. It is noted that in this embodiment two protruding structures 134 are fabricated individually on the left and right parts of the unit pixel region. And each protruding structure 134 has a crisscross appearance. Further, in the central part of the unit pixel region and beneath the second glass substrate 102 the black matrix 111 is defined to divide the unit pixel region into two parts, as the left and right parts mentioned above. Besides, the cross section view according to the line C-C' is shown in FIG. 6A. Refer to FIG. 6C, the rotating directions of the liquid crystal molecules after generating electric field is illustrated. In this embodiment, the eight-domain vertical alignments are obtained to increase the wide viewing angle by introducing the black matrix 111, the opening of the pixel electrode and two crisscross protruding structures 134 in each unit pixel region.

[0037] Third Embodiment:

[0038] Except for the four-domain and eight-domain vertical alignments as above, the present invention also provides an embodiment of two-domain alignment. Please refer to FIG. 7A, as above, after the pixel electrode 126 is formed on the first glass substrate 100, a lithography etching procedure is next done to form an opening on the pixel electrode 126 for exposing a part of the passivation layer 124. In this embodiment, the opening of the pixel electrode 126 is located on the central part of the unit pixel region. Thus, when the voltage is supplied to the pixel electrode 126 and the common electrode 112, an oblique electrical field (arrow 150) occurring between the opening edges and the common electrode 112 makes the liquid crystal molecules rotate toward the opening edges of the pixel electrode 126. As described above, the left and right sides of the central dotted line illustrate individually alignments of the liquid crystal molecules with electric field or not.

[0039] Please refer to FIG. 7B, the top view of the unit pixel region is illustrated. The grid patterns of the black matrix 110 and the floating black matrix 116 are both disposed to surround a color filter element. As to the pixel electrode 126 on the first glass substrate is divided into left and right parts by the opening crossing thereon. The cross section view according to the line D-D' is shown in FIG. 7A. When the pixel electrode 126 and the common electrode are supplied with voltage, an oblique electrical field (as arrow 150) occurring between the opening edges and the common electrode makes the liquid crystal molecules in the central part of the unit pixel region rotate toward individually to two edges of the pixel electrode 126, and has the two-domain

vertical alignment as shown in FIG. 7C. It is noted that in this embodiment there is no protruding structure 134 formed on the first glass substrate. Thus the liquid crystal molecules distributed in the left and right parts of the unit pixel region will have twist toppling alignments.

[0040] Compared to the alignment of the liquid crystal molecules in the prior art, the TFT-LCD structures provided in the present invention have considerable advantages as follows:

[0041] (1) by applying the color filter with the insulating black matrix, the protruding structures can be formed on the peripheral part of the unit pixel region to have the large electrical field thereon and the oblique electrical field adjacent thereto for the purpose of rotating the liquid crystal molecules in predetermined directions to increase the wide viewing angle;

[0042] (2) by fabricating protruding structure on the first glass substrate and in the central part of the unit pixel region, the large electrical field and the oblique electrical field occurring thereon can shorten the response time of the alignments of the liquid crystal molecules according the electrical fields;

[0043] (3) because the above insulating black matrix and the protruding structure can be fabricated by the original process for defining the TFT-LCD devices, no extra step is required to form those black matrix and the protruding structure, and the producing periods will not be prolonged;

[0044] (4) besides, the above protruding structure is formed by stacking various material layers in the process of defining the thin film transistors. So the main function of the stack structure is to let the pixel electrode more closed to the common electrode of the second glass substrate. Thus even some alignment inaccuracy occurring in stacking material layers, the stacked protruding structure still can have the above function.

[0045] While the preferred embodiment of the invention has been illustrated and described, it will be appreciated that various changes can be made therein without departing from the spirit and scope of the invention.

What is claimed

1. A TFT-LCD having a first glass substrate with a plurality of transistors, a second glass substrate provided for fabricating a color filter, and a liquid crystal layer interposed between the second and first glass substrates, said TFT-LCD comprises:

a color filter formed beneath said second glass substrate having a plurality of color filter elements and a first black matrix, wherein each grid pattern of said first black matrix is disposed to surround each said color filter element, and said color filter element formed beneath said second glass substrate is occupying an unit pixel region and is extending outward to surfaces of said first black matrix;

a common electrode formed beneath said color filter, wherein a part of said common electrode, said pixel units, and said first black matrix are overlapped to form a downward protruding structure;

a second black matrix formed on said first glass substrate, wherein each grid pattern of said second black matrix is disposed under inner edges of said each grid pattern of said first black matrix; and

a pixel electrode formed on said first glass substrate and located under each said color filter element, wherein said pixel electrode is extending outward to overlap said second black matrix to have an upward protruding structure;

wherein when said pixel electrode and said common electrode are supplied with voltage to generate an electric field, said electrical field occurring between said first black matrix and said second black matrix is larger than said electric field occurring in other parts of said unit pixel region, and an oblique electrical field occurring on edges of said pixel electrode makes liquid crystal molecules in said liquid crystal layer rotate in predetermined directions to have wide viewing angle effect.

2. The TFT-LCD of claim 1, wherein said first black matrix is made of insulating materials.

3. The TFT-LCD of claim 1, wherein said first black matrix is a resin black matrix (Resin BM).

4. The TFT-LCD of claim 1, wherein said second black matrix is made of metal.

5. The TFT-LCD of claim 1, further comprises a bump interposed between said first glass substrate and said pixel electrode to shorten a distance from said pixel electrode to said common electrode.

6. The TFT-LCD of claim 1, wherein said pixel electrode has an opening therein to expose a part of said first glass substrate.

7. The TFT-LCD of claim 1, further comprises a third black matrix interposed between said second glass substrate and said color filter element, and on a central part of said unit pixel region.

8. A TFT-LCD having a first glass substrate with a plurality of transistors, a second glass substrate for manufacturing a color filter, and a liquid crystal layer interposed between the second and first glass substrates, said TFT-LCD comprises:

a color filter formed beneath said second glass substrate comprising:

a pixel matrix formed by arranging a plurality of color filter elements in array, wherein each said color filter element occupies an unit pixel region and is formed beneath said second glass substrate;

a first insulating black matrix formed beneath said second glass substrate, wherein each grid pattern of said first insulating black matrix is disposed to surround each said color filter element, and each said color filter element is extending outward to surfaces of said grid pattern of said first insulating black matrix;

a second insulating black matrix interposed between each said color filter element and said second glass substrate, and crossing a central part of said unit pixel region to divide it into two parts;

a common electrode formed beneath said color filter, wherein a part of said common electrode, said first insulating black matrix and said second insulating black matrix are overlapped to have a downward protruding structure;

a metal black matrix formed on said first glass substrate, wherein each grid pattern of said metal black matrix is disposed under inner edges of each said grid pattern of said first insulating black matrix; and

a pixel electrode, formed on said first glass substrate and located under each said color filter element, wherein said pixel electrode is extending outward to overlap said metal black matrix to have an upward protruding structure;

when said pixel electrode and said common electrode are supplied with voltage to generate an electric field, said large electrical field in said unit pixel region occurring between said first black matrix and said metal black matrix, and another said large electrical field occurring between said second insulating black matrix and said pixel electrode there under, and an oblique electrical field occurring on edges of said pixel electrode makes liquid crystal molecules in said liquid crystal layer rotate in predetermined directions to have wide viewing angle effect.

9. The TFT-LCD of claim 8, wherein said first insulating black matrix and said second insulating black matrix are formed of resin materials.

10. The TFT-LCD of claim 8, wherein said metal black matrix is manufactured simultaneously in a procedure of defining gate structures of thin film transistors.

11. The TFT-LCD of claim 8, further comprises a bump formed between said first glass substrate and said pixel electrode to shorten a distance from said pixel electrode to said common electrode.

12. The TFT-LCD of claim 8, wherein said pixel electrode has an opening therein to expose a part of said first glass substrate, when said pixel electrode and said common electrode are supplied with voltage to generate an electric field, an oblique electrical field occurs between opening edges of said pixel electrode and said common electrode which makes liquid crystal molecules in said liquid crystal layer rotate in predetermined directions for wide viewing angle effect.

13. A TFT-LCD having a first glass substrate with a plurality of transistors, a second glass substrate provided for manufacturing a color filter, and a liquid crystal layer disposed between the second and first glass substrates, said TFT-LCD comprises:

a color filter formed beneath said second glass substrate having a plurality of color filter elements arranged in array and a first black matrix, wherein each grid pattern of said first black matrix is disposed to surround each said color filter element, said color filter element occupying an unit pixel region is formed beneath said second glass substrate and extends outward to surfaces of said first black matrix;

a common electrode formed beneath said color filter, wherein said common electrode, said color filter element, said grid pattern of said first black matrix are overlapped to have a downward protruding structure;

a second black matrix formed on said first glass substrate, wherein each grid pattern of said second black matrix is disposed under inner edges of said each grid pattern of said first black matrix;

a data-line pattern formed on said first glass substrate and between two adjacent said grid patterns of said second black matrix; and

a pixel electrode formed on said first glass substrate and located under said color filter element, wherein said pixel electrode is extending outward to surfaces of said second black matrix, and said pixel electrode and said second black matrix are overlapped to have an upward protruding structure, and a central part of said pixel electrode has an opening to expose partial surfaces of said first glass substrate;

when said pixel electrode and said common electrode are supplied with voltage to generate an electric field, said electrical field occurring between said first black matrix and said second black matrix is larger than that occurring in other parts of said unit pixel region, and an oblique electrical field occurs between said pixel elec-

trode and said first black matrix, and another oblique electrical field occurring between opening edges of said pixel electrode and said common electrode makes liquid crystal molecules in said liquid crystal layer rotate in predetermined directions for having wide viewing angle effect.

14. The TFT-LCD of claim 13, wherein said first black matrix is made of insulating materials.

15. The TFT-LCD of claim 13, wherein said first black matrix is a resin black matrix (Resin BM).

16. The TFT-LCD of claim 13, wherein said second black matrix is made of metal.

17. The TFT-LCD of claim 13, further comprises a bump formed between said first glass substrate and said pixel electrode to shorten a distance from said pixel electrode to said common electrode.

* * * * *

专利名称(译)	具有宽视角的液晶显示器		
公开(公告)号	US20030156237A1	公开(公告)日	2003-08-21
申请号	US10/266768	申请日	2002-10-09
[标]申请(专利权)人(译)	瀚宇彩晶股份有限公司		
申请(专利权)人(译)	瀚宇彩晶股份有限公司.		
当前申请(专利权)人(译)	瀚宇彩晶股份有限公司.		
[标]发明人	LIN MING TIEN JEN TEAN SEN		
发明人	LIN, MING-TIEN JEN, TEAN-SEN		
IPC分类号	G02F1/1333 G02F1/1335 G02F1/1362		
CPC分类号	G02F1/133512 G02F1/136209 G02F1/133707 G02F1/133514		
优先权	091102925 2002-02-20 TW		
其他公开文献	US7209201		
外部链接	Espacenet USPTO		

摘要(译)

一种TFT-LCD，具有用于制造晶体管的第一玻璃基板，用于制造滤色器的第二玻璃基板，以及插入在第二和第一玻璃基板之间的液晶层。TFT-LCD包括以下组件。在第二玻璃基板下方形成滤色器，该滤色器具有多个滤色器元件和第一黑色矩阵，其中第一黑色矩阵的每个栅格图案设置为围绕滤色器元件。并且形成在第二玻璃基板下方的滤色器元件向外延伸到第一黑色矩阵的表面。在滤色器下方形成公共电极，其中公共电极的一部分，像素单元和第一黑色矩阵重叠以具有向下突出的结构。在第一玻璃基板上形成第二黑色矩阵，其中第二黑色矩阵的每个栅格图案设置在第一黑色矩阵的每个栅格图案的内边缘下方。并且像素电极形成在第一玻璃基板上并位于滤色器元件下方，其中像素电极向外延伸以与第二黑色矩阵重叠以具有向上突出的结构。

