



(11) **EP 2 365 386 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
09.01.2013 Bulletin 2013/02

(51) Int Cl.:
G02F 1/1362^(2006.01) G02F 1/1343^(2006.01)
G02F 1/139^(2006.01)

(21) Application number: **11002346.2**

(22) Date of filing: **27.01.2010**

(54) **Liquid crystal display**

Flüssigkristallanzeige

Affichage à cristaux liquides

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(30) Priority: **29.05.2009 KR 20090047425**

(43) Date of publication of application:
14.09.2011 Bulletin 2011/37

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
10000787.1 / 2 256 543

(73) Proprietor: **Samsung Display Co., Ltd.
Yongin-City, Gyeonggi-Do (KR)**

(72) Inventors:
• **Kim, Sung-Woon**
Suwon-si
Gyeonggi-do (KR)
• **Kim, Hee-Seop**
Hwaseong-si
Gyeonggi-do (KR)

- **Kim, Hyang-Yul**
Hwaseong-si
Chungcheongnam-do (KR)
- **Jang, Joo-Nyung**
Seongnam-si
Gyeonggi-do (KR)
- **Woo, Hwa-Sung**
Asan-si
Chungcheongnam-do (KR)
- **Shin, Cheol**
Hwaseong-si
Gyeonggi-do (KR)
- **Shin, Dong-Chul**
Seoul
Gyeonggi-do (KR)

(74) Representative: **Weitzel, Wolfgang**
Patentanwalt
Friedenstrasse 10
89522 Heidenheim (DE)

(56) References cited:
EP-A1- 0 717 304 WO-A1-2004/086129
GB-A- 2 431 279 US-A1- 2007 002 253
US-A1- 2009 135 322

EP 2 365 386 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

(a) Field of the Invention

[0001] The present invention relates to a liquid crystal display.

(b) Description of the Related Art

[0002] A liquid crystal display ("LCD") is a widely used type of flat panel display ("FPD"), and typically includes two display panels on which field generating electrodes, such as pixel electrodes and a common electrode, are disposed, and a liquid crystal layer interposed between the two display panels. Voltages are applied to the field generating electrodes to generate an electric field in the liquid crystal layer. The electric field determines orientations of liquid crystal molecules in the liquid crystal layer, and controls polarization of incident light to display an image.

[0003] The LCD may further include switching elements connected to pixel electrodes, and signal lines such as gate lines and data lines, for example, which control the switching elements and apply voltages to the pixel electrodes.

[0004] The LCD typically receives an input image signal from an external source, e.g., a graphics controller, and the input image signal includes luminance information for each pixel, and the luminance information includes grayscale values. Each pixel receives the data voltage corresponding to the luminance information. The data voltage is applied to each pixel, and a difference between the data voltage and the common voltage is a pixel voltage. Each pixel thereby displays a luminance representing a gray level of the image signal based on the pixel voltage. A range of the pixel voltage applied to the liquid crystal display may vary based on a driver.

[0005] In a conventional LCD, the driver of the liquid crystal display may be disposed on the display panel as an integrated circuit ("IC") chip, or disposed on a flexible circuit film and attached to the display panel. However, the IC chip increases the manufacturing cost of the liquid crystal display. Particularly, the cost of the driver of the liquid crystal display is substantially increased as the number of data lines applying the data voltage is increased.

[0006] The following documents contain background art relevant to the invention.

[0007] W02004086129 discloses a liquid crystal display having two pixel electrodes per pixel, each electrode being controlled by a thin film transistor. The first pixel electrode is capacitively coupled to the second electrode (fig. 6, Ccpb).

[0008] GB2431279 discloses an IPS mode LCD, having also two pixel electrodes per pixel (fig. 4, items 404 and 405), each connected to a TFT (fig. 3, items T1 and

T2) and electrically connected to each other by a holding capacitor (fig. 3, C_{ST}).

[0009] EP0717304 discloses also an IPS mode LCD having a storage capacitor connected to two pixels electrodes (fig. 21 and 22).

[0010] US/2007002253 discloses a layout aiming at reducing the number of data lines for LCDs having a two electrodes per pixel structure (fig. 11, fig. 8 and par. [0216]).

[0011] US/2009135322 discloses an LCD device having a two pixel-electrode structure (fig. 5). Each pixel is addressed with three TFTs (fig. 1). The first and second TFTs enable to load the same data voltage on the first and second pixel electrode respectively; the third TFT is used to adjust the voltage of the first pixel electrode via a storage capacitor (fig. 1, C-down and par. [0015]).

BRIEF SUMMARY OF THE INVENTION

[0012] The invention discloses a liquid crystal display according to claim 1.

[0013] Exemplary embodiments of the present invention provide a liquid crystal display ("LCD") having advantages that include, but are not limited to, increased contrast ratio and viewing angle, improved response speed of liquid crystal molecules, and reduced cost of the driver of the liquid crystal display by decreasing a required number of data lines.

[0014] In an exemplary embodiment, the first pixel electrode includes first branches, the second pixel electrode includes second branches, and the first branches of the first pixel electrode and the second branches of the second pixel electrode are alternately disposed on the first substrate.

[0015] In an exemplary embodiment, the first gate line is adapted to receive a gate-on signal, and the first pixel electrode and the first capacitive electrode are adapted to receive a first data voltage from the data line, and the second gate line is adapted to receive the gate-on signal, and the second pixel electrode and the second capacitive electrode are adapted to receive the second data voltage from the data line, and voltages of the first pixel electrode and the first capacitive electrode may be substantially increased.

[0016] In an exemplary embodiment, the first gate line is adapted to receive a gate-on signal, the second pixel electrode and the second capacitive electrode are adapted to receive the common voltage through the third switching element.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The above and other aspects, advantages and features of the present invention will become more apparent by describing in further detail exemplary embodiments thereof with reference to the accompanying drawings, in which:

FIG. 1 is a block diagram of an exemplary embodiment of a liquid crystal display according to the present invention;

FIG. 2 is a schematic equivalent circuit diagram of an exemplary embodiment of a pixel according to the present invention;

FIG. 3 is a partial cross-sectional view of an exemplary embodiment of a liquid crystal display according to the present invention;

FIG. 4 is a plan view illustrating a layout of an exemplary embodiment of pixel electrodes of a liquid crystal display according to the present invention;

FIG. 5 is a schematic circuit diagram of an example not according to the invention of four pixels of a liquid crystal display;

FIG. 6 is a signal timing diagram of an example not according to the invention of wave forms of signals applied to one pixel of the liquid crystal display in FIG. 5;

FIG. 7 is a plan view illustrating a layout of an example not according to the invention of four pixels of a liquid crystal display in FIG. 5;

FIG. 8 is a schematic circuit diagram of an alternative example not according to the invention of four pixels of a liquid crystal display ;

FIG. 9 is a schematic circuit diagram of an exemplary embodiment of two pixels of a liquid crystal display;

FIG. 10 is a partial cross-sectional view of an example not according to the invention of a storage capacitor in a liquid crystal display ;

FIG. 11 is a schematic circuit diagram of an example not according to the invention of two pixels of a liquid crystal display;

FIG. 12 is a schematic circuit diagram of an example not according to the invention of one pixel according;

FIG. 13 is a schematic circuit diagram of another example not according to the invention of one pixel in a liquid crystal display;

FIG. 14 is a signal timing diagram of an example not according to the invention of waveforms of signals applied to the one pixel of the liquid crystal display in FIG. 13; and

FIG. 15 is a schematic circuit diagram of an exemplary embodiment of one pixel in a liquid crystal display according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0018] The invention now will be described more fully hereinafter with reference to the accompanying drawings, in which various embodiments are shown. This invention may, however, be embodied in many different forms, and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like reference numerals refer to like elements throughout.

[0019] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and the present disclosure, and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

[0020] Exemplary embodiments are described herein with reference to cross section illustrations that are schematic illustrations of idealized embodiments. As such, variations from the shapes of the illustrations as a result, for example, of manufacturing techniques and/or tolerances, are to be expected. Thus, embodiments described herein should not be construed as limited to the particular shapes of regions as illustrated herein but are to include deviations in shapes that result, for example, from manufacturing. For example, a region illustrated or described as flat may, typically, have rough and/or non-linear features. Moreover, sharp angles that are illustrated may be rounded. Thus, the regions illustrated in the figures are schematic in nature and their shapes are not intended to illustrate the precise shape of a region and are not intended to limit the scope of the present claims.

[0021] FIG. 1 is a block diagram of an exemplary embodiment of a liquid crystal display according to the present invention, and FIG. 2 is a schematic equivalent circuit diagram of an exemplary embodiment of a pixel according to an exemplary embodiment of the present invention.

[0022] As shown in FIG. 1, the liquid crystal display includes a liquid crystal panel assembly 300, a gate driver 400, a data driver 500, a gray voltage generator 800 and a signal controller 600.

[0023] As shown in FIG. 2, the liquid crystal panel assembly 300 includes a lower panel 100 and an upper panel 200 disposed to, e.g., facing, the lower panel 100, and a liquid crystal layer 3 interposed between the lower panel 100 and the upper panel (hereinafter collectively referred to as "display panels 100 and 200).

[0024] The liquid crystal capacitor C_{lc} includes a first pixel electrode PE_a and a second pixel electrode PE_b of the lower panel 100 as two terminals thereof, and the liquid crystal layer 3 between the first pixel electrode PE_a and the second pixel electrode PE_b is a dielectric. The first pixel electrode PE_a is connected to a first switching element (not shown in FIG. 2), and the second pixel electrode PE_b is connected to a second switching element (not shown). The first switching element and the second switching element are connected to corresponding gate lines (not shown) and data lines (not shown).

[0025] The liquid crystal layer 3 has dielectric anisotropy, and liquid crystal molecules of the liquid crystal layer 3 may be arranged such that their longitudinal axes are aligned substantially vertical to surfaces of the display panels 100 and 200 when an electric field is not applied

in the liquid crystal layer 3. The liquid crystal layer 3 may have positive dielectric anisotropy.

[0026] The first pixel electrode PEa and the second pixel electrode PEb may be disposed on two different layers or on a same layer, and the liquid crystal panel assembly may further include a common electrode (not shown) disposed on one panel of the lower panel 100 and the upper panel 200. Separate electrodes (not shown) disposed on the lower panel 100 may overlap the first and second pixel electrodes PEa and PEb via an insulator interposed therebetween, and thereby form a first storage capacitor (not shown) and a second storage capacitor (not shown), which assist the liquid crystal capacitor Clc.

[0027] In an exemplary embodiment, when a display panel displays colors, each pixel PX may display one of primary colors (spatial division), or each pixel PX may display primary colors in turn (temporal division). In an exemplary embodiment, the primary colors may be spatially or temporally synthesized, and a predetermined color is thereby displayed. The primary colors may be three primary colors, such as red, green and blue, for example. In an exemplary embodiment, as shown in FIG. 2, each pixel PX may include a color filter CF, corresponding to one of the primary colors, disposed on the upper panel 200. In an alternative exemplary embodiment, the color filter CF may be disposed on or below the first and second pixel electrodes PEa and PEb of the lower panel 100.

[0028] In an exemplary embodiment, the liquid crystal panel assembly 300 includes at least one polarizer (not shown) which provides light polarization.

[0029] An operation of a liquid crystal display according to an exemplary embodiment of the present invention will be described hereafter.

[0030] FIG. 3 is a partial cross-sectional view of an exemplary embodiment of a liquid crystal display according to the present invention.

[0031] As shown in FIG. 2 and FIG. 3, when a data line connected to a pixel PX receives a data voltage, the data voltage is applied to the pixel PX through the first and second switching elements turned on by the gate signal. When the first and second switching elements turned on by the gate signal, the first pixel electrode PEa receives a first data voltage through the first switching element, and the second pixel electrode PEb receives a second data voltage through the second switching element. In an exemplary embodiment, two data voltages, e.g., the first data voltage and the second data voltage, applied to the first and second pixel electrodes PEa and PEb, respectively, may be data voltages corresponding to a luminance to be displayed by the pixel PX, and may have opposite polarities with respect to a reference voltage Vref.

[0032] The difference between the two data voltages applied to the first and second subpixels PXa and PXb may be a charged voltage of the liquid crystal capacitors Clc, e.g., a pixel voltage. When a potential difference is

generated between two terminals of the liquid crystal capacitor Clc, as shown in FIG. 3, an electric field parallel to the surfaces of the display panel 100 and 200 is generated in the liquid crystal layer 3 between the first pixel electrode PEa and the second pixel electrode PEb. When liquid crystal molecules 31 have positive dielectric anisotropy, the liquid crystal molecules 31 are arranged such that the longitudinal axes thereof are aligned to be parallel to a direction of the electric field, and inclination degrees of the liquid crystal molecules 31 may vary based on a magnitude of the pixel voltage. When the liquid crystal molecules 31 are aligned as described above, the liquid crystal layer 3 is referred to as an electrically-induced optical compensation ("EOC") mode liquid crystal layer. In an exemplary embodiment, a degree of a change of polarization of light passing through the liquid crystal layer 3 may vary based on the inclination degree of the liquid crystal molecules 31. The change of the polarization may change transmittance of the light by the polarizer, and the pixel PX thereby displays a predetermined luminance.

[0033] In an exemplary embodiment, when one pixel PX receives the two data voltages having opposite polarities with respect to the reference voltage Vref, a driving voltage is substantially increased and a response speed and a transmittance of the liquid crystal molecule are thereby substantially increased. In an exemplary embodiment, when the polarities of the two data voltages applied to one pixel PX are opposite to each other, degradation of the display quality due to flicker is substantially prevented under driving types such as a column inversion or a row inversion, for example, as the degradation is substantially prevented under a dot inversion.

[0034] In an exemplary embodiment, when the first and second switching elements are turned off in one pixel PX, the two data voltages applied to the first and second pixel electrodes PEa and PEb are substantially decreased by a kickback voltage such that the charging voltage of the pixel PX is substantially maintained, and display characteristics of the liquid crystal display are thereby effectively improved.

[0035] A layout of an exemplary embodiment of the first and second pixel electrodes PEa and PEb of a pixel PX of the liquid crystal panel assembly according to the present invention will be described hereafter. FIG. 4 is a plan view of a layout of an exemplary embodiment of pixel electrodes of a pixel of a liquid crystal display.

[0036] As shown in FIG. 4, an overall contour of the pixel electrodes PE including the first pixel electrode PEa and the second pixel electrode PEb has a quadrangle shape. The first pixel electrode PEa and the second pixel electrode PEb are engaged with each other with a gap 91 therebetween. The first and second pixel electrodes PEa and PEb, respectively, are substantially mirror symmetric with respect to an imaginary transverse center line CL. The first pixel electrode PEa includes a first upper region disposed above the imaginary transverse center line CL and a first lower region disposed below the im-

imaginary transverse center line CL, and the second pixel electrode PEb includes a second upper region disposed above the imaginary transverse center line CL and a second lower region disposed below the imaginary transverse center line CL.

[0037] The first pixel electrode PEa includes an upper projection, a lower projection, a first left longitudinal stem, a first transverse stem extending to a right direction from a center of the first left longitudinal stem, first upper branches and first lower branches. The first upper branches disposed above the imaginary transverse center line CL extend substantially obliquely in an upper right direction from the first left longitudinal stem and from the first transverse stem. The first lower branches disposed below the imaginary transverse center line CL extend substantially obliquely in a lower right direction from the first left longitudinal stem and the first transverse stem. An angle between the first upper and lower branches and the gate line 121 or an angle between the first upper and lower branches and the transverse center line CL may be about 45 degrees.

[0038] The second pixel electrode PEb includes a middle projection, a second right longitudinal stem, a second upper transverse stem, a second lower transverse stem, second upper branches and second lower branches. The second upper transverse stem and the second lower transverse stem extend substantially horizontally to a left direction from a lower end and an upper end of the longitudinal stem, respectively. The second upper branches disposed above the imaginary transverse center line CL extends substantially obliquely in a lower left direction from the second right longitudinal stem or the second upper transverse stem. The second lower branches disposed below the imaginary transverse center line CL extends substantially obliquely in an upper left direction from the second right longitudinal stem or the second lower transverse stem. An angle between the second upper and lower branches of the second pixel electrode PEb and the gate line 121 or an angle between the second upper and lower branches of the second pixel electrode PEb and the imaginary transverse center line CL may be about 45 degrees. An angle between the second upper branches adjacent to the imaginary transverse center line CL and the second lower branches adjacent to the imaginary transverse center line CL may be about 90 degrees.

[0039] The first upper and lower branches of the first subpixel electrode PEa and the second upper and lower branches of the second subpixel electrode PEb are alternately disposed by engaging the upper and lower branches of the first subpixel electrodes PEa with the upper and lower branches of the second subpixel electrodes PEb, respectively, with a predetermined gap 91 therebetween, and thereby formed in a pectinated pattern.

[0040] In an alternative exemplary embodiment, the first and second pixel electrodes PEa and PEb of the pixel PX of the liquid crystal display may be in a different

shape in which at least a portions the first pixel electrode PEa and at least a portion of the second pixel electrode PEb are alternately disposed in a same layer.

[0041] An arrangement and driving method of pixels and signal lines of an example of a liquid crystal display not according to the present invention will be described hereafter with reference to FIG. 5 and FIG. 6. FIG. 5 is a schematic circuit diagram of an example of four pixels of the liquid crystal display not according to the present invention, and FIG. 6 is a signal timing diagram illustrating an example of wave forms of signals applied to one pixel of the liquid crystal display of FIG. 5.

[0042] Referring back to FIG. 2 and as shown in FIG. 5, a liquid crystal display may include a first pixel PX(m, n) and a second pixel PX(m, n+1) adjacent to the first pixel PX(m, n) in a pixel row direction, a third pixel PX(m+1, n) and a fourth pixel PX(m+1 and n+1), respectively, adjacent to the first pixel PX(m, n) and the second pixel PX(m, n+1) in a pixel column direction, and signal lines Gi(a), Gi(b), Gi+1(a), Gi+1(b), Dj, Dj+1, and Dj+2 connected thereto. The signal lines Gi(a), Gi(b), Gi+1(a), Gi+1(b), Dj, Dj+1, and Dj+2 include pairs of gate lines which transmit gate signals (alternatively referred to as "scanning signals"), for example, a i-th (where "i" is a natural number less than or equal to "n") pair of gate lines Gi(a) and Gi(b), and a (i+1)-th pair of gate lines Gi+1(a) and Gi+1(b), and data lines which transmit data voltages including aj-th (where "j" is a natural number less than or equal to "m") data line, e.g. a first data line Dj, a (j+1)-th data line, e.g., a second data line Dj+1, and a (j+2)-th data line, e.g., a third data line Dj+2.

[0043] The first pixel PX(m, n) is connected to a first upper gate line Gi(a), which is one of the i-th pair of gate lines Gi(a) and Gi(b), the first data line Dj and the second data line Dj+1. The first pixel PX(m, n) includes a first switching element Qa connected to the first gate line Gi(a) and the first data line Dj, a second switching element Qb connected to the first upper gate line Gi(a), and the second data line Dj+1, a liquid crystal capacitor Clc connected to the first and second switching elements Qa and Qb, and a first storage capacitor Csta and a second storage capacitor Cstb connected to the liquid crystal capacitor Clc. An alternative exemplary embodiment may not include the first and second storage capacitors Csta and Cstb. The first and second switching elements Qa and Qb, may be three terminal elements, such as thin film transistors, for example. The first storage capacitor Csta may include a control terminal connected to the first upper gate line Gi(a), an input terminal connected to the first data line Dj, and an output terminal connected to the liquid crystal capacitor Clc and the first storage capacitor Csta, and the second storage capacitor Cstb may include a control terminal connected to the first gate line Gi(a), an input terminal connected to the second data line Dj+1, and a second output terminal connected to the liquid crystal capacitor Clc and the second storage capacitor Cstb. The liquid crystal capacitor Clc includes the first pixel electrode PEa and the second pixel electrode PEb as

two terminals thereof, and the liquid crystal layer 3 between the first pixel electrode and the second pixel electrode may be a dielectric. The first pixel electrode PEa is connected to the first switching element Qa, and the second pixel electrode PEb is connected to the second switching element Qb.

[0044] The second pixel PX(m, n+1) adjacent to the first pixel PX(m, n) in the pixel row direction is connected to a first lower gate line Gi(b), which is the other of the i-th pair of gate lines Gi(a) and Gi(b), the second data line and the third data line Dj+2. The second pixel PX(m, n+1) includes a first switching element Qa connected to the second gate line Gi(b) and the second data line Dj+1, a second switching element Qb connected to the first lower gate line Gi(b) and the third data line Dj+2, a liquid crystal capacitor Clc connected to the first and second switching elements Qa and Qb, and a first storage capacitor Csta and a second storage capacitor Cstb connected to the liquid crystal capacitor Clc.

[0045] The third pixel PX(m+1, n) adjacent to the first pixel PX(m, n) in the pixel column direction is connected to the second upper gate line Gi+1(a), which is one of the (i+1)-th pair of gate lines Gi+1(a) and Gi+1(b), the third data line Dj and the second data line Dj+1, and includes a first switching elements Qa connected to the second upper Gi+1(a) and the first data line Dj, a second switching element Qb connected to the second upper gate line Gi+1(a) and the second data line Dj+1, a liquid crystal capacitor Clc connected to the first and second switching elements Qa and Qb, and a first storage capacitor Csta and a second storage capacitor Cstb connected to the liquid crystal capacitor Clc.

[0046] The fourth pixel PX(m+1, n+1) adjacent to the second pixel PX(m, n+1) in the pixel column direction is connected to the second lower gate line Gi+1(b) which is the other of the (i+1)-th pair of gate lines Gi+1(a) and Gi+1(b), the second data line Dj+1, and the third data line Dj+2, and includes a first switching elements Qa connected to the second lower gate line Gi+1(b) and the second data line Dj+1 and a second switching element Qb connected to the second lower gate line Gi+1(b) and the third data line Dj+2, a liquid crystal capacitor Clc connected to the first and second switching elements Qa and Qb, and a first storage capacitor Csta and a second storage capacitor Cstb connected to the liquid crystal capacitor Clc.

[0047] The first pixel PX(m, n) and the second pixel PX(m, n+1) adjacent to each other in the pixel row direction are both connected to the second data line Dj+1, and the third pixel PX(m+1, n) and the fourth pixel PX(m+1, n+1) are both connected to the second data line Dj+1.

[0048] As shown in FIG. 5 and FIG. 6, when the first upper gate line Gi(a) of the i-th pair of gate lines Gi(a) and Gi(b) receives a gate-on voltage, a first data voltage is applied to the first pixel PX(m, n) through the first and second switching elements Qa and Qb of the first pixel PX(m, n) that are turned on. In an exemplary embodiment, the first pixel electrode PEa of the first pixel PX(m,

n) receives the first data voltage from the first data line Dj through the first switching element Qa of the first pixel PX(m, n), and the second pixel electrode PEb of the first pixel PX(m, n) receives a second data voltage from the second data line Dj+1 through the second switching element Qb of the first pixel PX(m, n). When the first lower gate line Gi(b) of the i-th pair of gate lines Gi(a) and Gi(b) receives the gate-on voltage, the second data voltage is applied to the second pixel PX(m, n+1) through the first and second switching elements of the second pixel PX(m, n+1) that are turned on. The first pixel electrode PEa of the second pixel PX(m, n+1) receives the second data voltage from the second data line Dj+1 through the first switching element Qa of the second pixel PX(m, n+1), and the second pixel electrode PEb of the second pixel PX(m, n+1) receives a third data voltage from the third data line Dj+2 through the second switching element Qb of the second pixel PX(m, n+1). Accordingly, a data voltage to be transmitted to the second pixel electrode PEb of the first pixel PX(m, n) is applied to the second data line Dj+1 during a time that the first upper gate line Gi(a) receives the gate-on signal, and a data voltage to be transmitted to the first pixel electrode PEa of the second pixel PX(m, n+1) is applied to the second data line Dj+1 during a time that the first lower gate line Gi(b) receives the gate-on signal.

[0049] Voltages applied to the first and second pixel electrodes PEa and PEb of the first pixel PX(m, n) and the third pixel PX(m, n+1) are data voltages corresponding to a luminance for the first pixel PX(m, n) and the third pixel PX(m, n+1) to be respectively displayed, and have opposite polarities with respect to the reference voltage Vref, for example, a common voltage Vcom of a common electrode (not shown). In an example, when a polarity of the first data voltage applied to the first data line Dj is positive, a polarity of the second data voltage applied to the second data line Dj+1 is negative and a polarity of the third data voltage applied to the third data line Dj+2 is positive. When the polarity of the first data voltage applied to the first data line Dj is negative, the polarity of the second data voltage applied to the second data line Dj+1 is positive and the polarity of the third data voltage applied to the third data line Dj+2 is negative. As described above, the data lines of an exemplary embodiment of a liquid crystal display according to the present invention may be driven with a column inversion.

[0050] In a conventional liquid crystal display, two pixels adjacent to each other in the pixel row direction are connected to one gate line and four different data lines. That is, the first and second switching elements connected to the first and second pixel electrodes of each of the two pixels are connected to a same gate line, but they are connected to different data lines such that they receive the data voltages through the different data lines.

[0051] In an example of a liquid crystal display not according to the present invention, two pixels of the liquid crystal display adjacent to each other in the pixel row direction are respectively connected to one gate line of

a pair of gate lines and the other gate line of the pair of gate lines, and connected to three data lines by sharing a middle data line of the three data lines disposed in a middle portion of the two pixels adjacent to the two pixels. Accordingly, a number of data lines is reduced, and the cost of the driver of the liquid crystal display is thereby substantially reduced. In an example, gate lines are disposed in pairs, and a number of gate lines is thereby substantially increased, however gate signals are gate on/off signals, and an operation of a gate driver is thereby simplified, while the manufacturing cost is reduced.

[0052] An example of the pixel of the liquid crystal display shown in FIG. 5 will be described hereafter with reference to FIG. 7. FIG. 7 is a plan view illustrating a layout of an example of four pixels of the liquid crystal display shown in FIG. 5.

[0053] Referring back to FIG. 5 and as shown in FIG. 7, an example of the liquid crystal display includes the first pixel PX(m, n) and the second pixel PX(m, n+1), the third pixel PX(m+1, n) and the fourth pixel PX(m+1, n+1) respectively adjacent to the first pixel PX(m, n) and the second pixel PX(m, n+1) in the pixel column direction, pairs of gate lines, for example, a pair of gate lines including a first upper gate line 121a1 and a first lower gate line 121b1, and a pair of gate lines including a second upper gate line 121a2 and a second lower gate line 121b2, and data lines, for example, a first data line 171a, a second data line 171 b and a third data line 171c connected thereto. Each of the first pixel PX(m, n), the second pixel PX(m, n+1), the third pixel PX(m+1, n), and the fourth pixel PX(m+1, n+1) includes a first pixel electrode 191a and a second pixel electrode 191b connected to a first switching element and a second switching element, respectively. The first switching element and the second switching element may be three terminal elements such as thin film transistors, for example. The first switching element and the second switching element, respectively, include control electrodes, e.g., a first gate electrode 124a and a second gate electrode 124b, input electrodes, e.g., a first source electrode 173a and a second source electrode 173b, and output electrodes, e.g., a drain electrode 175a and a second drain electrode 175b. The control electrodes of the first and second switching elements are respectively connected to one line and the other line of the pair of gate lines 121a and 121b, the input electrodes of the first and second switching elements are respectively connected to one line and another line of the data lines 171 a, 171 b and 171 c, and the output electrodes of the first and second switching elements are respectively connected to the first pixel electrode 191a and the second pixel electrode 191 b through a first contact hole 185a and a second contact hole 185b. The first pixel electrode 191a and the second pixel electrode 191b may be substantially alternately disposed on a same layer.

[0054] In an example, the liquid crystal display includes a storage electrode line 131 and storage electrodes 135a and 135b, and the storage electrodes 135a

and 135b overlap the first pixel electrode 191a and the second pixel electrode 191b thereby forming storage capacitors.

[0055] An alternative example of an arrangement and driving method of pixels and signal lines of an example of a liquid crystal display not according to the present invention will be described hereafter with reference to FIG. 2 and FIG. 8. FIG. 8 is a schematic circuit diagram of an alternative example of four pixels of a liquid crystal display not according to the present invention.

[0056] As shown in FIG. 8, the liquid crystal display includes a first pixel PX(m, n) and a second pixel PX(m, n+1) adjacent to the first pixel PX(m, n) in the pixel row direction, a third pixel PX(m+1, n) and a fourth pixel PX(m+1, n+1) respectively adjacent to the first pixel PX(m, n) and the second pixel PX(m, n+1) in the pixel column direction, gate lines connected thereto, for example, a first gate line Gi and a second gate line Gi+1, and pairs of data lines connected thereto, for example, a first pair of data lines Dj and Dj', a second pair of data lines Dj+1 and Dj+1', and a third pair of data lines Dj+2 and Dj+2'.

[0057] The first gate line Gi including a first upper line and a first lower line and the second gate line Gi+1 including a second upper line and second lower line are disposed along the pixel column direction. The first pair of data lines Dj and Dj' including a first data line Dj and a second data line Dj', the second pair of data lines Dj+1 and Dj+1' including a first data line Dj+1 and a second data line Dj+1', and the third pair of data lines Dj+2 and Dj+2' including a first data line Dj+2 and a second data line Dj+2' are disposed along the pixel row direction.

[0058] A control terminal of the first switching element Qa of the first pixel and a control terminal of the second switching element Qb of the first pixel respectively connected to the first pixel electrode PEa and the second pixel electrode PEb of the first pixel PX(m, n) are connected to the first upper line of the i-th gate line, e.g., the first gate line Gi, and an input terminal of the first switching element Qa and an input terminal of the second switching element Qb are respectively connected to one data line of the j-th pair of data lines, e.g., the second data line Dj' of the first pair of data lines Dj and Dj', and one data line of the (j+1)-th pair of data lines, e.g., the second data line Dj+1' of the second pair of data lines Dj+1 and Dj+1'.

[0059] A control terminal of the first switching element Qa of the second pixel and a control terminal of the second switching element Qb of the second pixel, respectively connected to the first pixel electrode PEa and the second pixel electrode PEb of the second pixel PX(m, n+1) adjacent to the first pixel PX(m, n) in the pixel row direction, are connected to an upper line of the (i+1)-th gate line, e.g., the second upper line of the second gate line Gi+1, and an input terminal of the first switching element Qa of the first pixel and an input terminal of the second switching element Qb of the first pixel are respectively connected to one data line of the (j+1)-th pair of data lines, e.g., the second data line Dj+1' of the second pair of data lines Dj+1 and Dj+1', and one data line of the

(j+2)-th pair of data lines, e.g., the second data line D_{j+2} ' of the third pair of data lines D_{j+2} and D_{j+2}' .

[0060] A control terminal of the first switching elements Q_a of the third pixel and a control terminal of the second switching element Q_b of the third pixel, respectively connected to the first pixel electrode PE_a and the second pixel electrode PE_b of the third pixel $PX(m+1, n)$ adjacent to the first pixel $PX(m, n)$ in the pixel column direction, are connected to a lower line of the i -th gate line, e.g., the first lower line of the first gate line G_i , and an input terminal of the first switching element of the third pixel and an input terminal of the second switching element of the third pixel are respectively connected to one data line of the j -th pair of data lines, e.g., the first data line D_j of the first pair of data lines D_j and D_j' and one data line of the (j+1)-th pair of data lines, e.g., the second data line D_{j+1}' of the second pair of data lines D_{j+1} and D_{j+1}' .

[0061] A control terminal of the first switching element of the fourth pixel and a control terminal of the second switching element Q_b of the fourth pixel, respectively connected to the first pixel electrode PE_a and the second pixel electrode PE_b of the fourth pixel $PX(m+1, n+1)$ adjacent to the second pixel $PX(m, n+1)$ in the pixel column direction and the third pixel $PX(m+1, n)$ in the pixel row direction, are connected to the second branch of the (i+1)-th gate line, e.g., the second lower line of the second gate line G_{i+1} , and an input terminal of the first switching element of the fourth pixel and an input terminal of the second switching element Q_b of the fourth pixel are respectively connected to one data line of the (j+1)-th pair of data lines, e.g., the first data line D_{j+1} of the second pair of data lines D_{j+1} and D_{j+1}' and one data line of the (j+2)-th pair of data lines, e.g., the first data line D_{j+2} of the third pair of data lines D_{j+2} and D_{j+2}' . As described above, the first pixel $PX(m, n)$ and the second pixel $PX(m, n+1)$ adjacent to each other in the pixel row direction are connected to one data line, e.g., the second data line D_{j+1}' of the second pair of data lines D_{j+1} and D_{j+1}' , and the third pixel $PX(m+1, n)$ and the fourth pixel $PX(m+1, n+1)$ adjacent to each other in the pixel row direction are connected to one data line, e.g., the first data line D_{j+1} of the second pair of data lines D_{j+1} and D_{j+1}' , in an exemplary embodiment of the liquid crystal display. In an exemplary embodiment, the first pixel $PX(m, n)$ and the third pixel $PX(m+1, n)$ adjacent to each other in the pixel column direction are respectively connected to an upper line and a lower line of one gate line, e.g., the first upper line and the first lower line of the first gate line G_i and thereby receives gate on/off voltages through the one gate line, e.g., the first gate line G_i , and the second pixel $PX(m, n+1)$ and the fourth pixel $PX(m+1, n+1)$ adjacent to each other in the pixel column direction are respectively connected to an upper line and a lower line of one gate line, e.g., the second upper line and the second lower line of the second gate line G_{i+1} and thereby receives the gate on/off voltages through the one gate line, e.g., the second gate line G_{i+1} . Accordingly, the number of data lines and the number of gate lines are reduced,

and the cost of the driver of the liquid crystal display is thereby substantially reduced and the driving speed is thereby increased.

[0062] An alternative example of an arrangement of pixels and signal lines of a liquid crystal display not according to the present invention will be described hereafter with reference to FIG. 9. FIG. 9 is a schematic circuit diagram of an example of two neighboring pixels of a liquid crystal display not according to the present invention.

[0063] An arrangement of an example of pixels and signal lines of the liquid crystal display shown in FIG. 9 is substantially similar to the arrangement of pixels and signal lines of an exemplary embodiment shown in FIG. 5. In an alternative example, the first pixel $PX(m, n)$ is connected to the first upper gate line $G_i(a)$ of the i -th pair of gate lines $G_i(a)$ and $G_i(b)$, the first data line D_j and the second data line D_{j+1} , and the second pixel $PX(m, n+1)$ adjacent to the first pixel $PX(m, n)$ in the pixel row direction is connected to the first lower gate line $G_i(b)$ of the i -th pair of gate lines $G_i(a)$ and $G_i(b)$, the second data line D_{j+1} and the third data line D_{j+2} . The first pixel $PX(m, n)$ and the second pixel $PX(m, n+1)$ adjacent to each other in the pixel row direction are connected to the middle data line of the three data line, e.g., the second data line D_{j+1} .

[0064] In an alternative example, as shown in FIG. 5, two terminals of a storage capacitor C_{st} of a pixel are connected to an output terminal of a first switching element Q_a of the pixel and a second switching element Q_b of the pixel.

[0065] FIG. 10 is a partial cross-sectional view of an example of a storage capacitor C_{st} in a liquid crystal display not according to the present invention.

[0066] As shown in FIG. 10, a first pixel electrode PE_a of a pixel is connected to a storage capacitance electrode 178 through a contact hole 186, and a voltage that the first pixel electrode PE_a receives is thereby transmitted to the storage capacitance electrode 178. The storage capacitance electrode 178 overlaps the second pixel electrode PE_b via an insulating layer 180, and the storage capacitance electrode 178 and the second pixel electrode PE_b thereby form the storage capacitor C_{st} .

[0067] An example of an arrangement of pixels and signal lines, and a driving method of a liquid crystal display will be described hereafter with reference to FIG. 11 and FIG. 2. FIG. 11 is a schematic circuit diagram of an example of two pixels of a liquid crystal display not according to the present invention.

[0068] Referring back to FIG. 2 and as shown in FIG. 11, an example of the liquid crystal display includes the first pixel $PX(m, n)$ and the second pixel $PX(m, n+1)$ adjacent to each other in the pixel row direction, and gate lines connected thereto, e.g., a first gate line G_i , a second gate line G_{i+1} , and a third gate line G_{i+2} , and data lines connected thereto, e.g., a first data line D_j , a second data line D_{j+1} , and a third data line D_{j+2} .

[0069] The first pixel $PX(m, n)$ includes a first switching

element Qa connected to the i-th gate line, e.g., the first gate line Gi, and the j-th data line, e.g., the first data line Dj, a second switching element Qb connected to the (i+1)-th gate line, e.g., the second gate line Gi+1, and the (j+1)-th data line, e.g., the second data line Dj+1, a first storage capacitor Csta connected to the first switching element Qa of the first pixel and a second storage capacitor Cstb connected to the second switching element Qb of the first pixel. The first pixel PX(m, n) further includes a third switching element Qc connected to the (i+2)-th gate line, e.g., the third gate line Gi+2, and an output terminal of the second switching element Qb of the first pixel.

[0070] The first pixel electrode PEa of the first pixel is connected to the first switching element Qa of the first pixel, and the second pixel electrode PEb of the first pixel is connected to the second switching element Qb of the first pixel through the third switching element Qc of the first pixel.

[0071] The second pixel PX(m, n+1) adjacent to the first pixel PX(m, n) in the pixel row direction includes a first switching element Qa connected to the i-th gate line, e.g., the first gate line Gi, and the (j+1)-th data line, e.g., the second data line Dj+1, a second switching element Qb connected to the (i+1)-th gate line, e.g., the second gate line Gi+1, and the (j+2)-th data line, e.g., the third data line Dj+2, and a first storage capacitor Csta connected to the first switching element Qa of the second pixel and a second storage capacitor Cstb connected to a second switching element Qb of the second pixel. In an example, the second pixel PX(m, n+1) further includes a third switching element Qc connected to the (i+2)-th gate line, e.g., the third gate line Gi+2, and to an output terminal of the second switching element Qb of the second pixel.

[0072] The first pixel PX(m, n) and the second pixel PX(m, n+1) adjacent to each other in the pixel row direction are connected to the (j+1)-th data line, e.g., the second data line Dj+1.

[0073] When the first gate line Gi receives a gate-on voltage, a first data voltage and a second data voltage are respectively applied to the first pixel PX(m, n) through the first switching element Qa of the first pixel that is thereby turned on and to the second pixel PX(m, n+1) through the first switching element Qa of the second pixel that is thereby turned on. That is, the first pixel electrode PEa of the first pixel PX(m, n) receives the first data voltage from the first data line Dj through the first switching element Qa of the first pixel and a point A of the first pixel thereby receives the first data voltage, and the first pixel electrode PEa of the second pixel PX(m, n+1) receives the second data voltage from the second data line Dj+1 through the first switching element Qa of the second pixel and a point A of the second pixel thereby receives the second data voltage.

[0074] When the first gate line Gi receives a gate-off voltage and the second gate line Gi+1 receives the gate-on voltage, the point A of the first pixel and the point A

of the second pixel are floated, and the first data voltage is applied to the first pixel PX(m, n) through the second switching element of the first pixel that is thereby turned on, and the second data voltage is applied to the second pixel PX(m, n+1) through the second switching element of the second pixel that is thereby turned on. That is, the second pixel electrode PEb of the first pixel PX(m, n) and the second pixel electrode PEb of the second pixel PX(m, n+1) respectively receive the second data voltages from the second data line Dj+1 through the second switching element Qb of the first pixel and the third data voltage from the third data line Dj+2 through the second switching element Qb of the second pixel.

[0075] When the second gate line Gi+1 receives the gate-off voltage and the third gate line Gi+2 receives the gate-on voltage, the output terminal of the second switching element Qb of the first pixel and the output terminal of the second switching element Qb of the second pixel are floated, and the third switching element Qc of the first pixel and the third switching element Qc of the second pixel are turned-on, and the first data voltage and second data voltage respectively charged and applied to the second pixel electrode PEb of the first pixel and to the second pixel electrode PEb of the second pixel are respectively transmitted to a point B of the first pixel through the third switching element Qc of the first pixel and to a point B of the second pixel through the third switching element Qc of the second pixel. Accordingly, voltages of predetermined magnitudes are charged between the point A and the point B of the first pixel forming two terminals of the liquid crystal capacitor Clc of the first pixel and between the point A and the point B of the second pixels forming two terminals of the liquid crystal capacitor Clc of the second pixels, respectively. In an example, data voltages respectively applied to the two terminals of the liquid crystal capacitor Clc of the first and second pixel may correspond to luminances of the first pixel PX(m, n) and the second pixel PX(m, n+1) to be displayed, and have opposite polarities with respect to the common voltage Vcom. In an example data voltages applied to the first and second pixel electrodes PEa and PE of the first pixel and the first and second pixel electrodes PEa and PE of the second pixel may correspond to luminances of the pixel PX(m, n) and the second pixel PX(m, n+1) to be displayed and have opposite polarities with respect to the reference electrode Vref. When the first data voltage applied to the first data line Dj is positive, the second data voltage applied to the second data line Dj+1 is negative and the third data voltage applied to the third data line Dj+2 is positive, and when the first data voltage applied to the first data line Dj is negative, the second data voltage applied to the second data line Dj+1 is positive and the third data voltage applied to the third data line Dj+2 is negative. As described above, the data lines of an example of the liquid crystal display not according to the present invention may be driven with a column inversion.

[0076] In a conventional liquid crystal display, when one terminal of a liquid crystal capacitor of the conven-

tional liquid crystal display has been charged and thereby floated with one voltage, and the other terminal of the liquid crystal capacitor is being charged with another voltage having polarity opposite to a polarity of the one voltage, it is difficult for the liquid crystal capacitor of the conventional liquid crystal display to be charged with a predetermined magnitude. However, in an example of the liquid crystal display not according to the present invention, for example, the first and second data voltages respectively applied to the first and second pixel electrodes PEa and PEb of the first pixel through the first and second switching elements Qa and Qb of the first pixel during respective gate-on times is charged to the liquid crystal capacitor Clc of the first pixel through the output terminal of the first and second switching elements Qa and Qb of the first pixel that have been floated during a gate-off time. Accordingly, the liquid crystal capacitor Clc of the first pixel may be charged when the two terminals of the liquid crystal capacitor Clc are floated, and the first and second data voltages having opposite polarities may be charged with a predetermined magnitude.

[0077] An arrangement and driving method of signal lines and pixels of an example of a liquid crystal display will be described hereafter with reference to FIG. 2 and FIG. 12. FIG. 12 is a schematic circuit diagram of an example of a pixel of a liquid crystal display not according to the present invention.

[0078] As shown in FIG. 12, an example of the liquid crystal display includes a first pixel PX(m) and a second pixel PX(m+1) adjacent to each other in the pixel column direction, and gate lines, e.g., a first gate line Gi, a second gate line Gi+1, and a third gate line Gi+2, and pairs of data lines, e.g., a first pair of data lines Dj and Dj' and a second pair of data lines Dj+1 and Dj+1' connected thereto.

[0079] The first gate line Gi including a first upper line and a first lower line, the second gate line Gi+1 including a second upper line and a second lower line, and the third gate line Gi+2 including a third upper line and a third lower line are disposed along the pixel column direction. The first pair of data lines Dj and Dj' including a first data line Dj and a second data line Dj', and the second pair of data lines Dj+1 and Dj+1' including a first data Dj+1 and a second data line Dj+1', are disposed along the pixel row.

[0080] The control terminal of the first switching element Qa of the first pixel PX(m) connected to the first pixel electrode PEa of the first pixel PX(m) is connected to the first upper line of the first gate line Gi, and the input terminal thereof is connected to one data line of the j-th pair of data lines, e.g., the second data line Dj' of the first pair of data lines Dj and Dj'. The control terminal of the second switching element Qb of the first pixel PX(m) connected to the second pixel electrode PEb of the first pixel PX(m) is connected to the second upper line of the second gate line Gi+1, and the input terminal thereof is connected to one data line of the (j+1)-th pair of data lines, e.g., the second data line Dj+1' of the second pair of data

lines Dj+1 and Dj+1'. The input terminal of the third switching element Qc of the first pixel PX(m) connected to the output terminal of the second switching element Qb of the first pixel PX(m) is connected to the third upper line of the third gate line Gi+2.

[0081] The control terminal of the first switching element Qa of the second pixel PX(m+1) connected to the first pixel electrode PEa of the second pixel PX(m+1) is connected to the first lower line of the first gate line Gi, and the input terminal thereof is connected to one data line of the j-th pair of data lines, e.g. the first data line Dj of the first pair of data lines Dj and Dj'. The control terminal of the second switching element Qb of the second pixel PX(m+1) connected to the second pixel electrode PEb of the second pixel PX(m+1) is connected to the second lower line of the second gate line Gi+1, and the input terminal thereof is connected to one data line of the (j+1)-th pair of data lines, e.g., the first data line Dj+1 of the second pair of data lines Dj+1 and Dj+1'. The input terminal of the third switching element Qc of the second pixel PX(m+1) connected to the output terminal of the second switching element Qb of the second pixel PX(m+1) is connected to the third lower line of the third gate line Gi+2.

[0082] As described above, in an example of a liquid crystal display, the control terminal of the first switching elements Qa of the first pixel PX(m) connected to the first pixel electrode PEa of the first pixel PX(m) and the control terminal of the first switching element Qa of the second pixel PX(m+1) connected to the first pixel electrode PEa of the second pixel PX(m+1) adjacent to the first pixel PX(m) in the pixel column direction are respectively connected to the first upper line and the first lower line of the first gate line Gi, and thereby receive the gate on/off voltages from one gate line, e.g., the first gate line Gi. The control terminal of the second switching element Qb of the first pixel PX(m) and the control terminal of the second switching element Qb of the second pixel PX(m+1) are respectively connected to the second upper line and the second lower line of the same gate line Gi+1, and thereby receive the gate on/off voltages from one gate line, e.g., the second gate line Gi+1. The input terminal of the third switching element Qc of the first pixel (PX(m) connected to the output terminal of the second switching element Qb of the first pixel PX(m) and the input terminal of the third switching element Qc of the second pixel PX(m+1) connected to the output terminal of the second switching element Qb of the second pixel PX(m+1) are respectively connected to the third upper line and the third lower line of the third gate line Gi+2, and thereby receive the gate on/off voltages from one gate line, e.g., the third gate line Gi+2. Accordingly, the driving speed is substantially increased.

[0083] An arrangement and a driving method of pixels and signal lines of an example of a liquid crystal display will be described hereafter with reference to FIG. 2, FIG. 13 and FIG. 14.

[0084] FIG. 13 is a schematic circuit diagram of an ex-

emple of one pixel in a liquid crystal display not according to the present invention, and FIG. 14 is a signal timing diagram illustrating an exemple of waveforms of a signal applied to the one pixel of the liquid crystal display in FIG. 13.

[0085] Referring back to FIG. 2 and as shown in FIG. 13, an exemple of a liquid crystal display includes the first switching element Qa connected to the first pixel electrode PEa of the pixel PX, the second switching element Qb connected to the second pixel electrode PEB of the pixel PX, gate lines including a first gate line Gi and a second gate line Gi+1, and a data line Dj. In an exemple, the liquid crystal display includes the liquid crystal capacitor Clc and a step-up capacitor Cb connected to the first and second switching elements Qa and Qb. The control terminal of the first switching element Qa is connected to the first gate line Gi, and the input terminal thereof is connected to the data line Dj. The control terminal of the second switching element Qb is connected to the second gate line Gi+1, and the input terminal thereof is connected to the data line Dj. The output terminal of the first switching element Qa and The output terminals of second switching element Qb are connected to the liquid crystal capacitor Clc and the step-up capacitor Cb. Two terminals of the step-up capacitor Cb are connected to the first switching element Qa and the second switching element Qb.

[0086] A driving method of an exemple of a liquid crystal display in FIG. 13 will be described hereafter with reference to FIG. 14.

[0087] Referring back to FIG. 13 and as shown in FIG. 14, when the first gate line Gi receives the gate-on signal and the first switching element Qa is thereby turned on, the first pixel electrode PEa receives one data voltage from the data line Dj and a point A is charged with the one data voltage.

[0088] When the first gate line Gi receives a gate-off signal, the second gate line Gi+1 receives a gate-on signal, and the second switching element Qb is thereby turned on, the second pixel electrode PEB receives other data voltage through the data line Dj, and a point B is charged with the other data voltage. When a voltage of the point A Va is increased, a voltage of the point B Vb is thereby increased, and a voltage charged between the two terminals of the liquid crystal capacitor Clc connected to the point A and the point B is thereby changed and a magnitude of the charging voltage is thereby varied based on a capacity of the step-up capacitor Cb. Accordingly, by changing a capacity of the step-up capacitor Cb, the voltage charged to the liquid crystal capacitor Clc when the pixel receives two gate-on signals, is changed to have a predetermined magnitude.

[0089] In an exemple of a the liquid crystal display, the magnitude of the voltage charged to the liquid crystal capacitor may be changed by using two gate lines, one data line, and a step-up capacitor. Accordingly, compared to a liquid crystal display driven with one gate line and two data lines, a number of data lines is reduced,

and the cost of the driver of the liquid crystal display is thereby substantially reduced.

[0090] Next, signal lines and a pixel arrangement of a liquid crystal display according to an exemplary embodiment of the present invention will be described with reference to FIG. 15. FIG. 15 is a schematic circuit diagram of an exemplary embodiment of one pixel of a liquid crystal display according to an exemplary embodiment of the present invention.

[0091] As shown in FIG. 15, an arrangement of a pixel and signal lines of an exemplary embodiment of the liquid crystal display is substantially similar to the liquid crystal display in FIG. 13 except for a fourth switching element Qd connected to the first gate line Gi and the point B of the step-up capacitor Cb. The control terminal of the fourth switching element Qd is connected to the first gate line Gi, and the input terminal thereof is connected to a common voltage point Vcom. Accordingly, when the first gate line Gi receives the gate-on signal such that the first pixel electrode PEa of the pixel PX receives a data voltage, the point B of the step-up capacitor Cb and one terminal of the liquid crystal capacitor Clc are changed with the common voltage Vcom. The point B of the step-up capacitor Cb and the one terminal of the liquid crystal capacitor Clc is refreshed by being charged with the common voltage Vcom which is the reference voltage to the point B of the step-up capacitor Cb and the one terminal of the liquid crystal capacitor Clc, and thereby minimize an influence of the voltages charged during a previous frame to the point B of the step-up capacitor Cb and the one terminal of the liquid crystal capacitor Clc.

[0092] According to exemplary embodiments of the present invention as described herein provide advantages which include, but are not limited to, a high contrast ratio and a wide viewing angle, fast response speed of the liquid crystal, and a low manufacturing cost by substantially reducing number of signal lines in a liquid crystal display.

[0093] The present invention should not be construed as being limited to the exemplary embodiments set forth herein. Rather, these exemplary embodiments are provided so that this disclosure will be thorough and complete and will fully convey the concept of the present invention to those skilled in the art.

[0094] While the present invention has been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the scope of the present invention which is defined by the following claims.

Claims

1. A liquid crystal display comprising:
 - a first substrate (100);

- a second substrate (200) disposed opposite to the first substrate (100);
 a liquid crystal layer (3) interposed between the first and second substrates (100; 200) and including dielectric liquid crystal molecules (31);
 a first gate line (Gi) disposed on the first substrate (100) and adapted to transmit a first gate signal;
 a second gate line (Gi+1) disposed on the first substrate (100) and adapted to transmit a second gate signal;
 a data line (Dj) disposed on the first substrate (100);
 a first switching element (Qa) connected to the first gate line (Gi) and the data line (Dj);
 a second switching element (Qb) connected to the second gate line (Gi+1) and the data line (Dj);
 a first pixel electrode (PEa) connected to the first switching element (Qa);
 a second pixel electrode (PEb) connected to the second switching element (Qb) and separated from the first pixel electrode (PEa); and
 a step-up capacitor (Cb) including a first capacitance electrode and a second capacitance electrode connected to the first and second switching elements (Qa; Qb), respectively, and which overlap each other with an insulating layer disposed therebetween,
 wherein the first pixel electrode (PEa), second pixel electrode (PEb) and the liquid crystal between the first and second pixel electrodes (PEa, PEb) form a first liquid crystal capacitor **characterized by**
 a third switching element (Qd) including a control terminal connected to the first gate line (Gi), an output terminal connected to the second pixel electrode (PEb) and the second capacitive electrode, and an input terminal connected to a common voltage supply.
2. The liquid crystal display of claim 1, wherein the first pixel electrode (PEa) includes first branches, the second pixel electrode (PEb) includes second branches, and the first branches of the first pixel electrode (PEa) and the second branches of the second pixel electrode (PEb) are alternately disposed on the first substrate (100).
3. The liquid crystal display of claim 2, wherein the first gate line (Gi) is adapted to receive a gate-on signal, and the first pixel electrode (PEa) and the first capacitance electrode are adapted to receive a first data voltage from the data line (Dj), and the second gate line (Gi+1) is adapted to receive the gate-on signal, and the second pixel electrode (PEb) and the second capacitance electrode (178) are adapted to receive a second data voltage from the

data line (Dj).

4. The liquid crystal display of claim 1, wherein the first gate line (Gi) is adapted to receive a gate-on signal, and the second pixel electrode (PEb) and the second capacitance electrode are adapted to receive the common voltage through the third switching element (Qd).

Patentansprüche

1. Flüssigkristallanzeige, umfassend:

ein erstes Substrat (100);
 ein zweites Substrat (200), das gegenüber dem ersten Substrat (100) angeordnet ist;
 eine Flüssigkristallschicht (3), die zwischen dem ersten und dem zweiten Substrat (100; 200) eingefügt ist und dielektrische Flüssigkristallmoleküle (31) umfasst;
 eine erste Gate-Leitung (Gi), die auf dem ersten Substrat (100) angeordnet und dazu geeignet ist, ein erstes Gate-Signal zu übertragen;
 eine zweite Gate-Leitung (Gi+1), die auf dem ersten Substrat (100) angeordnet und dazu geeignet ist, ein zweites Gate-Signal zu übertragen;
 eine Datenleitung (Dj), die auf dem ersten Substrat (100) angeordnet ist;
 ein erstes Schaltelement (Qa), das mit der ersten Gate-Leitung (Gi) und der Datenleitung (Dj) verbunden ist;
 ein zweites Schaltelement (Qb), das mit der zweiten Gate-Leitung (Gi+1) und der Datenleitung (Dj) verbunden ist;
 eine erste Pixelelektrode (PEa), die mit dem ersten Schaltelement (Qa) verbunden ist;
 eine zweite Pixelelektrode (PEb), die mit dem zweiten Schaltelement (Qb) verbunden und von der ersten Pixelelektrode (PEa) getrennt ist; und
 einen Aufwärtskondensator (Cb), der eine erste kapazitive Elektrode und eine zweite kapazitive Elektrode umfasst, die mit dem ersten bzw. dem zweiten Schaltelement (Qa; Qb) verbunden sind und die einander mit einer dazwischen eingefügten Isolierschicht überlappen,
 wobei die erste Pixelelektrode (PEa), die zweite Pixelelektrode (PEb) und der Flüssigkristall zwischen der ersten und der zweiten Pixelelektrode (PEa, PEb) einen ersten Flüssigkristallkondensator bilden,
gekennzeichnet durch
 ein drittes Schaltelement (Qd), das einen mit der ersten Gate-Leitung (Gi) verbundenen Steueranschluss, einen mit der zweiten Pixelelektrode (PEb) und der zweiten kapazitiven Elektrode verbundenen Ausgangsanschluss und einen

mit einer gemeinsamen Spannungsversorgung verbundenen Eingangsanschluss umfasst.

2. Flüssigkristallanzeige gemäß Anspruch 1, wobei die ersten Pixelelektrode (PEa) erste Verzweigungen umfasst, die zweite Pixelelektrode (PEb) zweite Verzweigungen umfasst, und die ersten Verzweigungen der ersten Pixelelektrode (PEa) und die zweiten Verzweigungen der zweiten Pixelelektrode (PEb) abwechselnd auf dem ersten Substrat (100) angeordnet sind. 5
3. Flüssigkristallanzeige gemäß Anspruch 2, wobei die erste Gate-Leitung (Gi) dazu geeignet ist, ein Gate-on-Signal zu empfangen und die erste Pixelelektrode (PEa) und die erste kapazitive Elektrode geeignet sind, eine erste Datenspannung von der Datenleitung (Dj) zu empfangen, und die zweite Gate-Leitung (Gi +1) dazu geeignet ist, das Gate-on-Signal zu empfangen und die zweiten Pixelelektrode (PEb) und die zweiten kapazitive Elektrode (178) dazu geeignet sind, eine zweite Datenspannung von der Datenleitung (Dj) zu empfangen. 10 15 20 25
4. Flüssigkristallanzeige gemäß Anspruch 1, wobei die ersten Gate-Leitung (Gi) dazu geeignet ist, ein Gate-on-Signal zu empfangen und die zweiten Pixelelektrode (PEb) und die zweite kapazitive Elektrode dazu geeignet sind, die gemeinsame Spannung durch das dritte Schaltelement (Qd) zu empfangen. 30

Revendications

1. Un écran à cristaux liquides comprenant :

Un premier substrat (100) ; 40
 Un deuxième substrat (200) disposé à l'opposé du premier substrat (100) ;
 Une couche de cristaux liquides (3) interposée entre le premier et le deuxième substrats (100, 200) et comprenant des molécules de cristaux liquides diélectriques (31) ; 45
 Une première ligne de barrière (Gi) disposée sur le premier substrat (100) et adaptée pour transmettre un premier signal de barrière ;
 Une deuxième ligne de barrière (Gi+1) disposée sur le premier substrat (100) et adaptée pour transmettre un deuxième signal de barrière ; 50
 Une ligne de donnée (Dj) disposée sur le premier substrat (100) ;
 Un premier élément de commutation (Qa) connecté à la première ligne de barrière (Gi) et la ligne de donnée (Dj) ; 55
 Un deuxième élément de commutation (Qb)

connecté à la deuxième ligne de barrière (Gi+1) et à la ligne de donnée (Dj) ;

Une première électrode à pixel (PEa) connectée au premier élément de commutation (Qa) ;

Une deuxième électrode à pixel (PEb) connectée au deuxième élément de commutation (Qb) et séparée de la première électrode à pixel (PEa) ; et

Un condensateur croissant (Cb) comprenant une première électrode de capacitance et une deuxième électrode de capacitance connectées au premier et deuxième éléments de commutation (Qa ; Qb), respectivement, et qui se chevauchent l'une et l'autre avec une couche d'isolation disposée entre elles,

Où la première électrode à pixel (PEa), une deuxième électrode à pixel (PEb) et les cristaux liquides entre la première et la deuxième électrodes à pixel (PEa, PEb) forment un premier condensateur à cristaux liquides **caractérisé par**

Un troisième élément de commutation (Qd) comprenant un terminal de contrôle connecté à la première ligne de barrière (Gi), un terminal de sortie connecté à la deuxième électrode à pixel (PEb) et la deuxième électrode capacitive, et un terminal d'entrée connecté à une alimentation en tension ordinaire.

2. L'écran à cristaux liquides de la revendication 1, où La première électrode à pixel (PEa) inclut des premiers embranchements, La deuxième électrode à pixel (PEb) inclut des deuxièmes embranchements, et 30

Les premiers embranchements de la première électrode à pixel (PEa) et les deuxièmes embranchements de la deuxième électrode à pixel (PEb) sont alternativement disposés sur le premier substrat (100). 35

3. L'écran à cristaux liquides de la revendication 2, où La première ligne de barrière (Gi) est adaptée pour recevoir un signal de barrière sous tension, et la première électrode à pixel (PEa) et la première électrode de capacitance sont adaptées pour recevoir une première tension de donnée à partir de la ligne de donnée (Dj), et 45

La deuxième ligne de barrière (Gi+1) est adaptée pour recevoir le signal de barrière sous tension, et la deuxième électrode à pixel (PEb) et la deuxième électrode de capacitance (178) sont adaptées pour recevoir une deuxième tension de donnée à partir de la ligne de donnée (Dj).

4. L'écran à cristaux liquides de la revendication 1, où La première ligne de barrière (Gi) est adaptée pour recevoir un signal de barrière sous tension, et la deuxième électrode à pixel (PEb) et la deuxième 55

électrode de capacitance sont adaptées pour recevoir la tension ordinaire au travers du troisième élément de commutation (Qd).

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

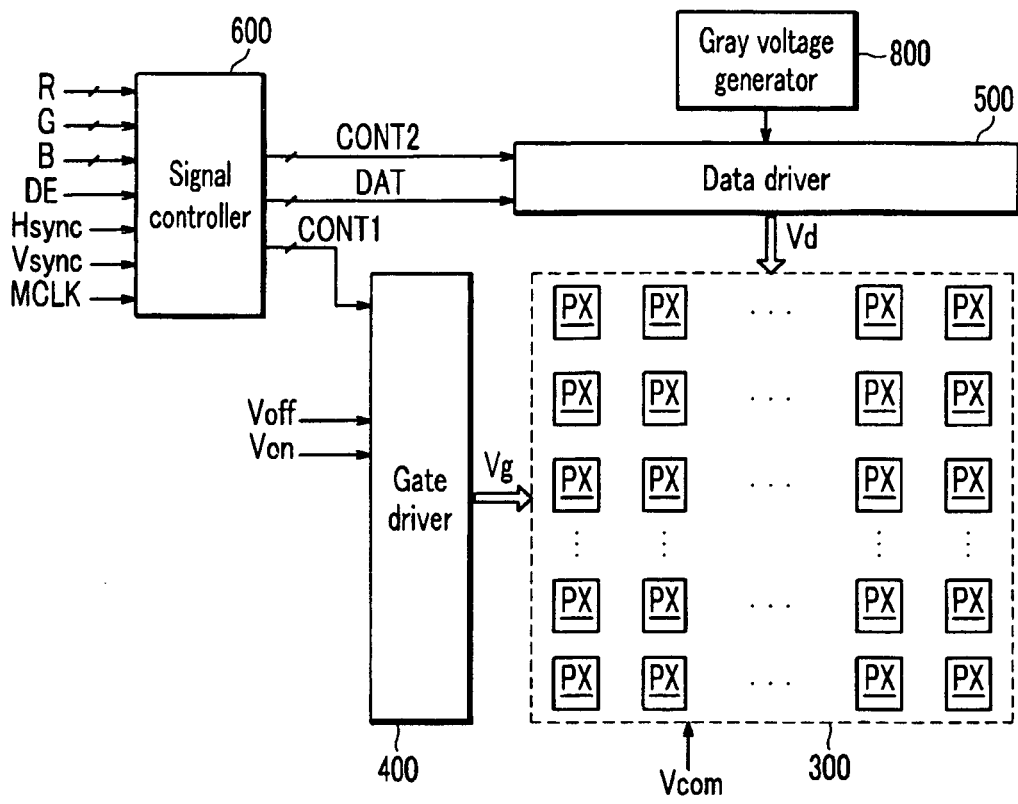


FIG. 2

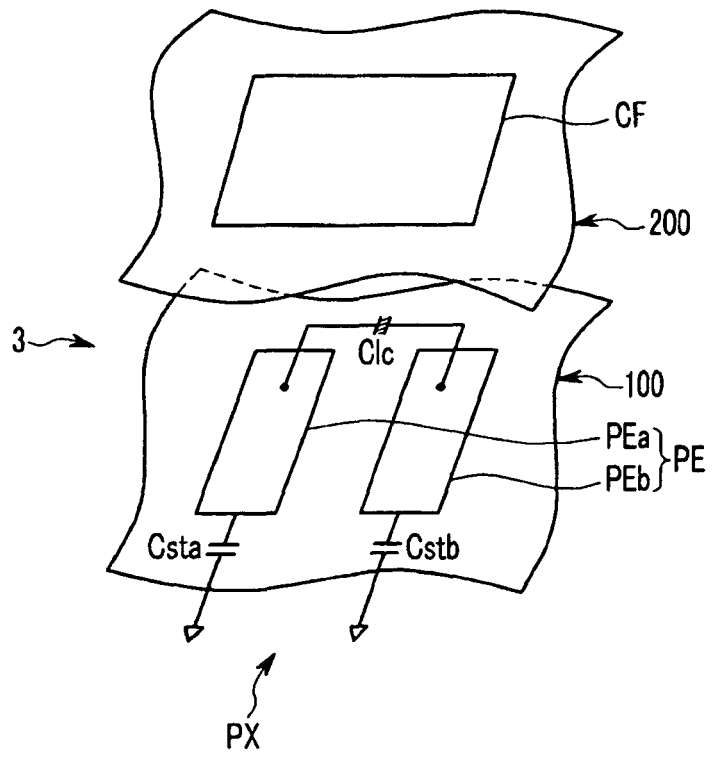


FIG. 3

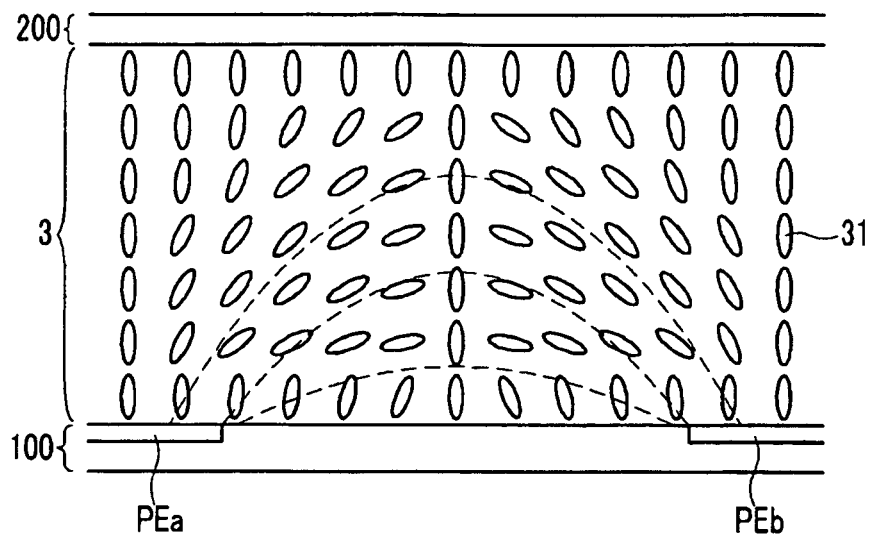


FIG. 4

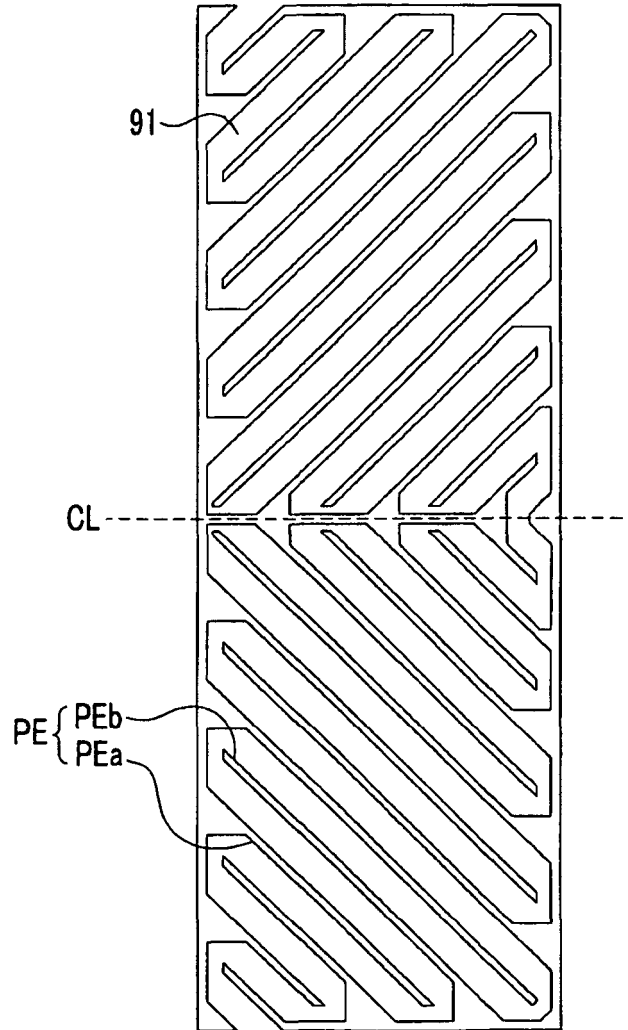


FIG. 5

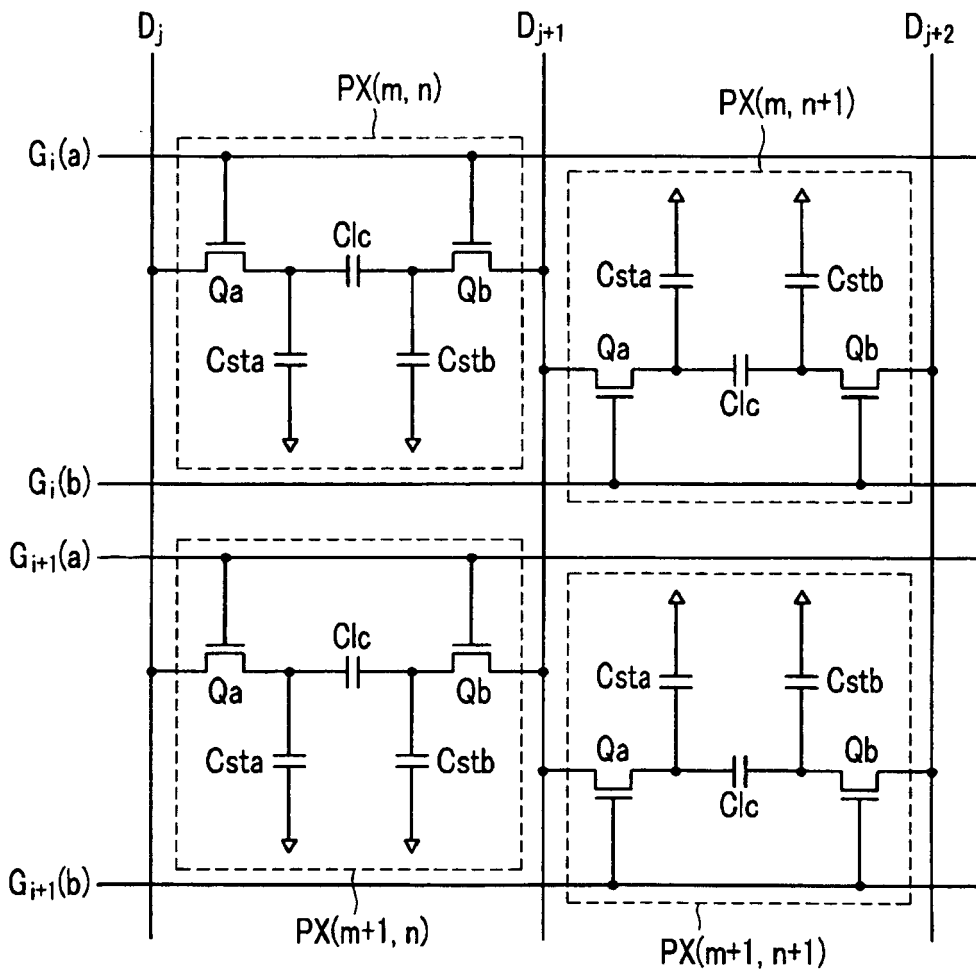


FIG. 6

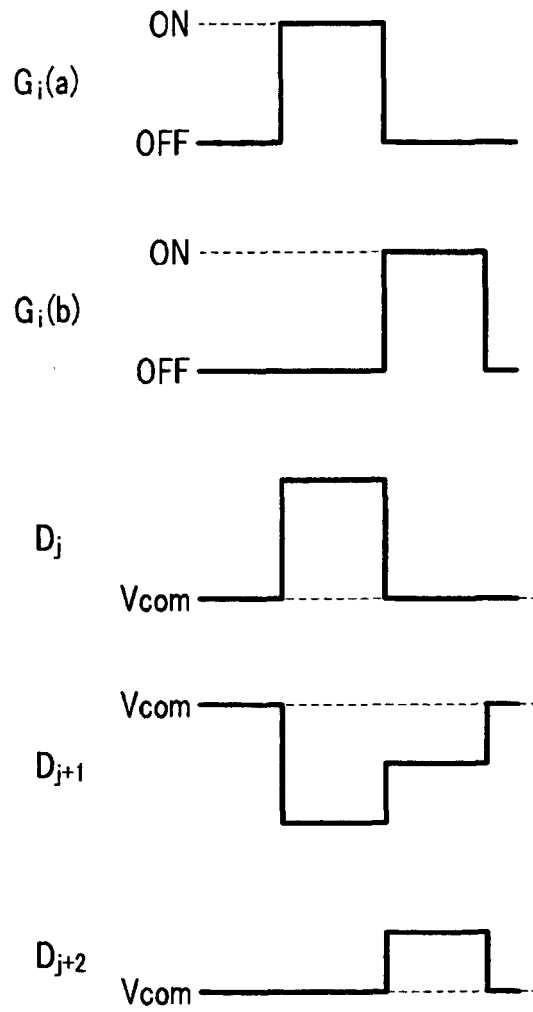


FIG. 7

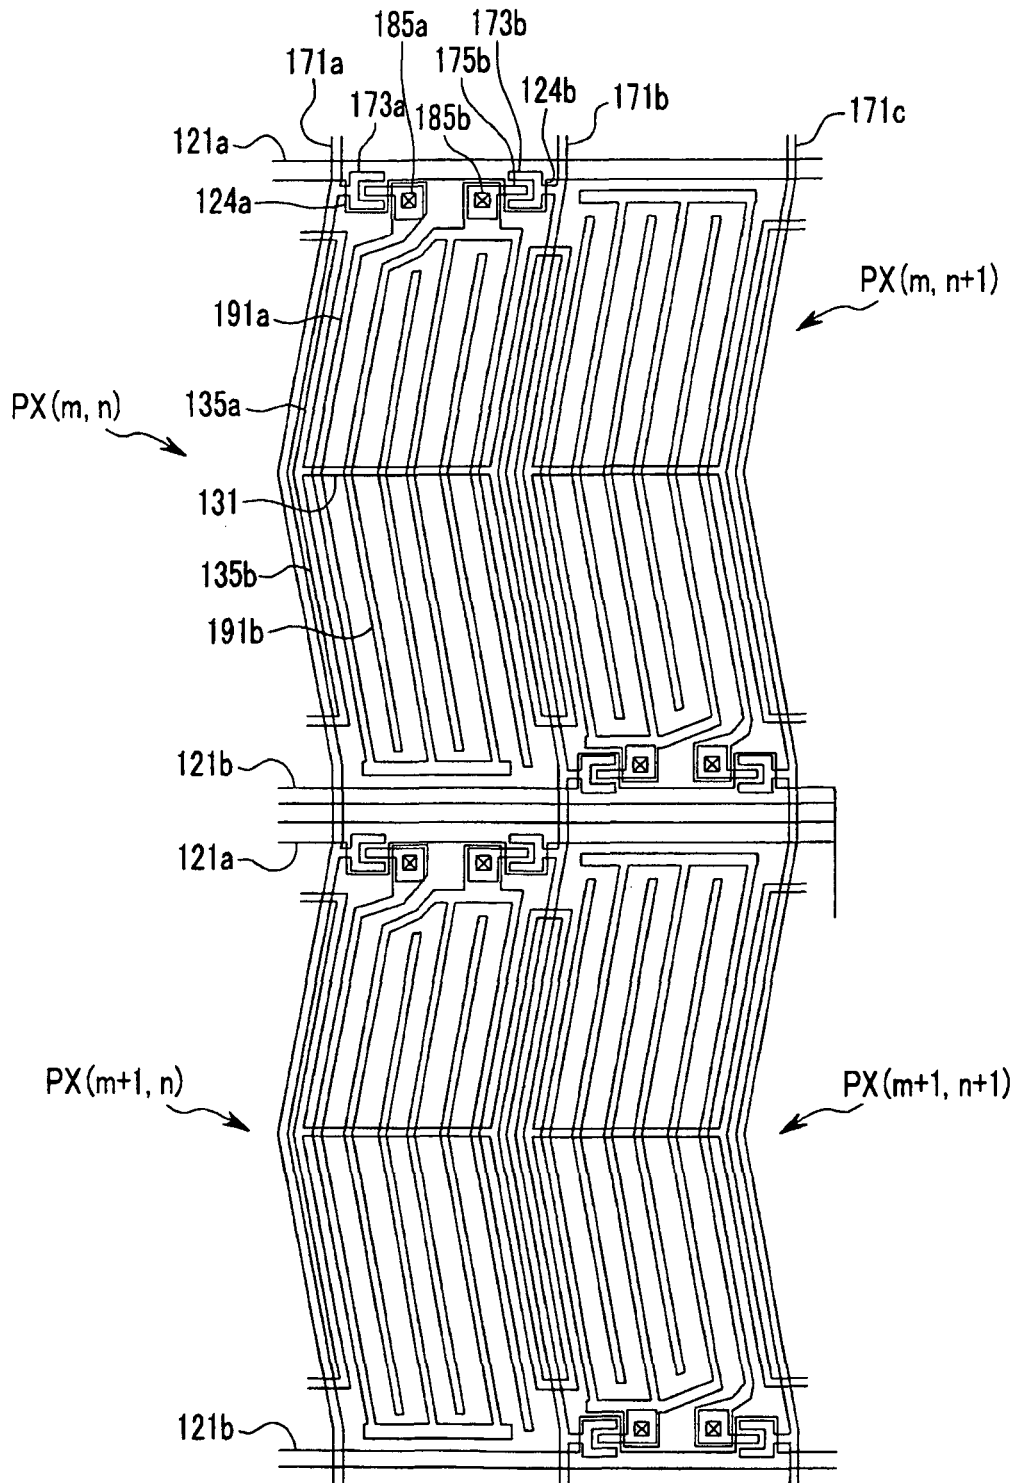


FIG. 8

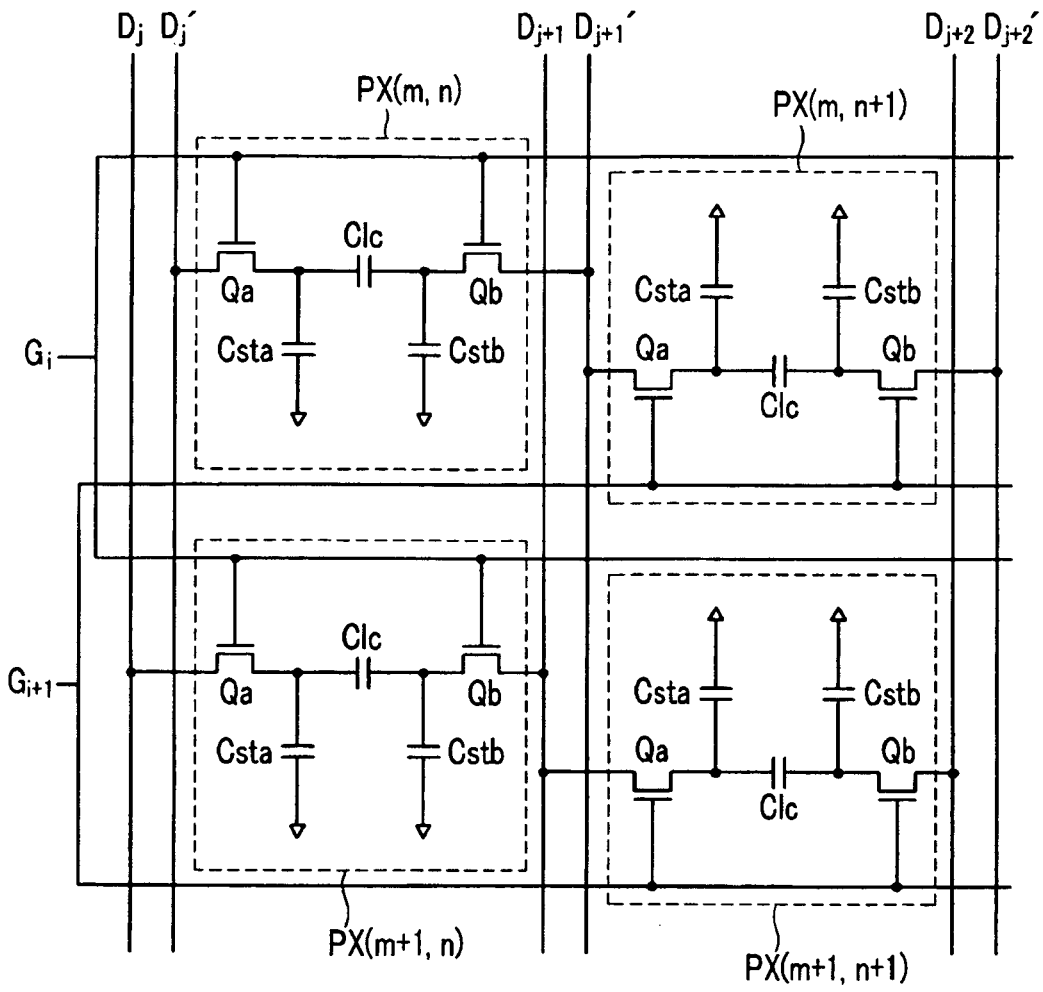


FIG. 9

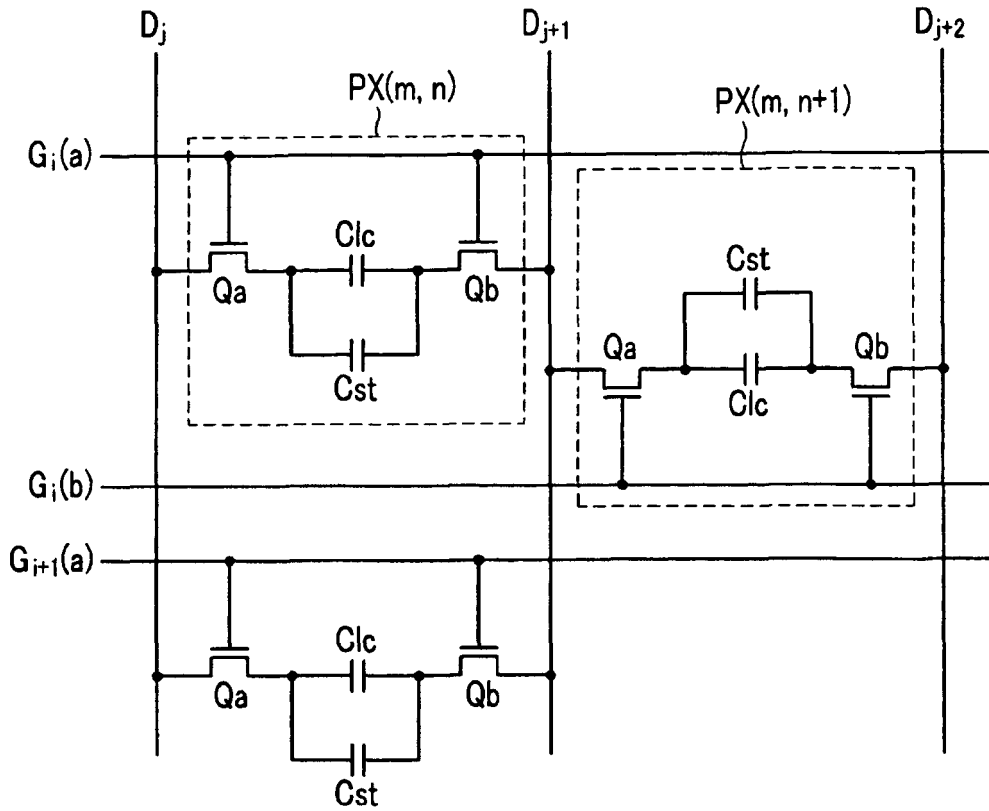


FIG. 10

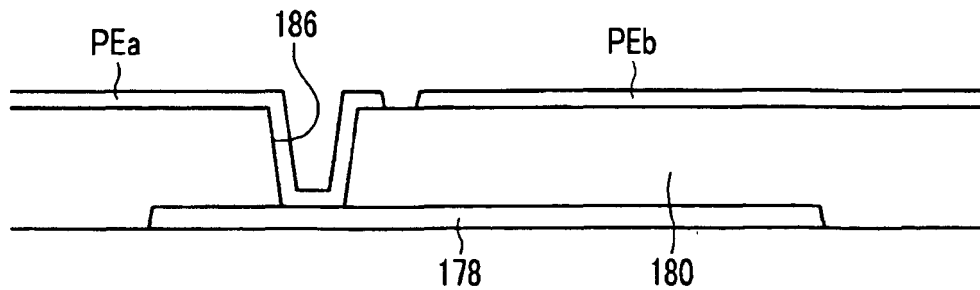


FIG. 12

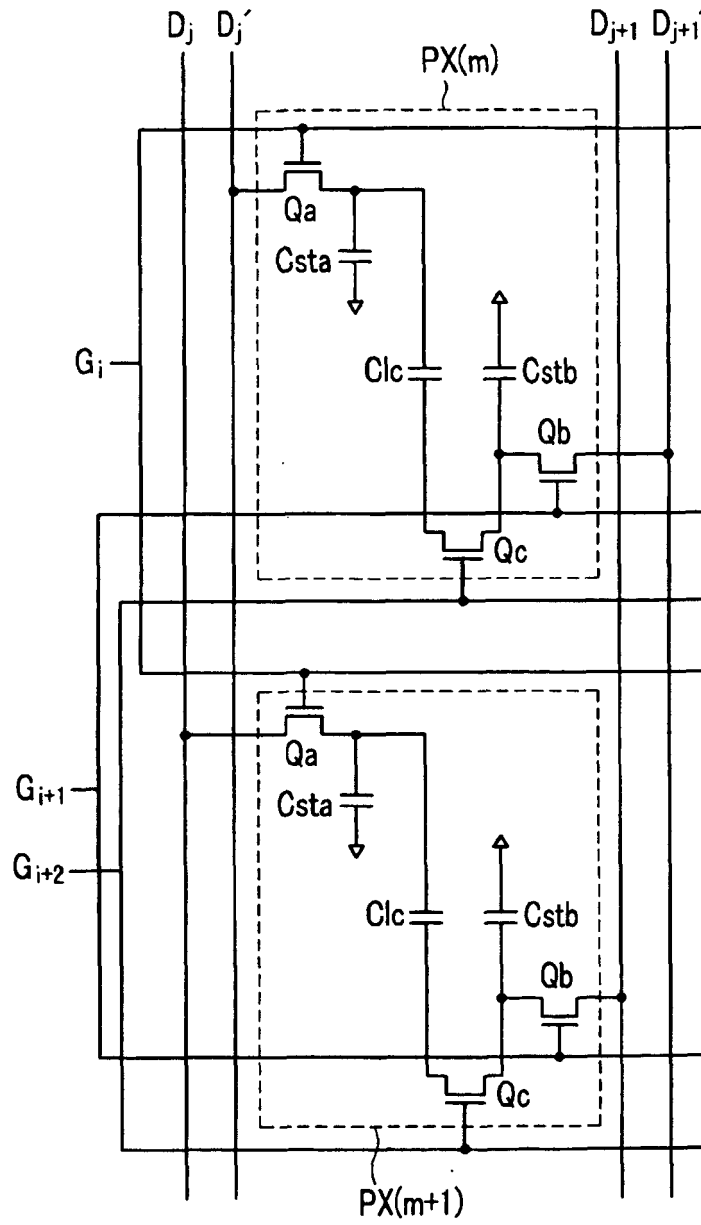


FIG. 13

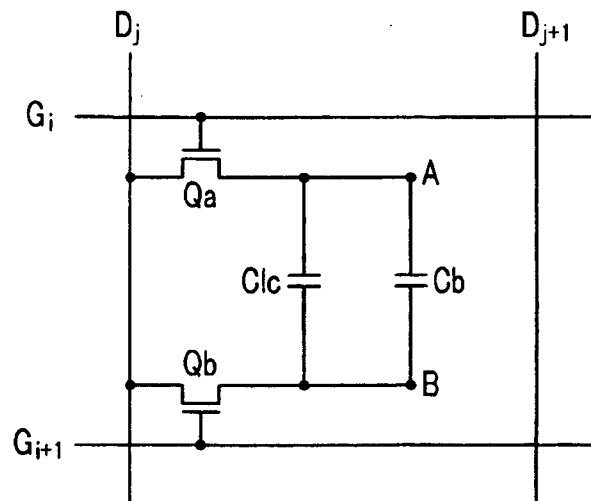


FIG. 14


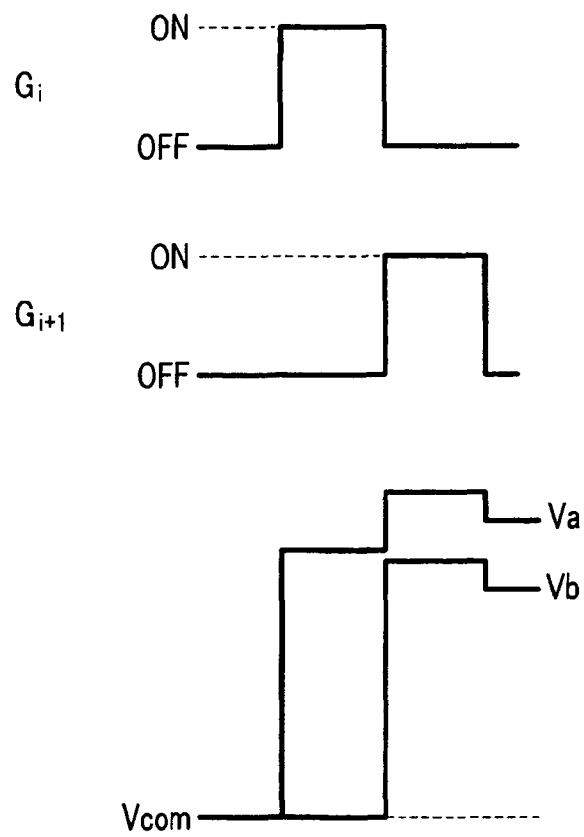


FIG. 15

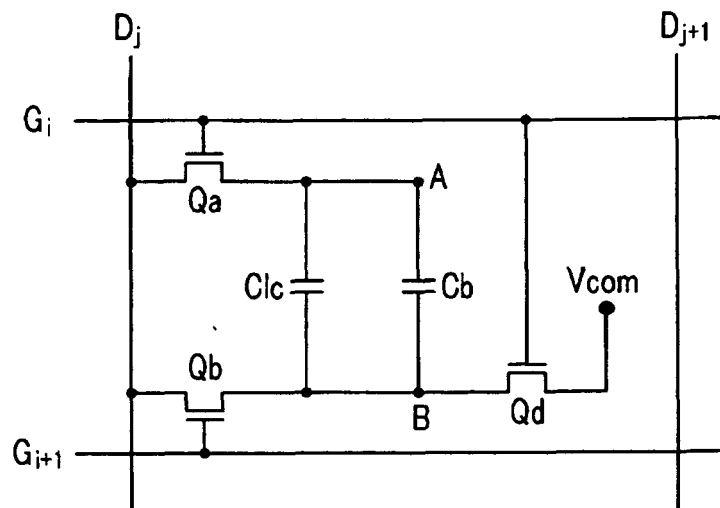

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2004086129 A [0007]
- GB 2431279 A [0008]
- EP 0717304 A [0009]
- US 2007002253 A [0010]
- US 2009135322 A [0011]

| | | | |
|----------------|---|---------|------------|
| 专利名称(译) | 液晶显示器 | | |
| 公开(公告)号 | EP2365386B1 | 公开(公告)日 | 2013-01-09 |
| 申请号 | EP2011002346 | 申请日 | 2010-01-27 |
| [标]申请(专利权)人(译) | 三星电子株式会社 | | |
| 申请(专利权)人(译) | SAMSUNG ELECTRONICS CO. , LTD. | | |
| 当前申请(专利权)人(译) | 三星DISPLAY CO. , LTD. | | |
| [标]发明人 | KIM SUNG WOON KIM HEE SEOP KIM HYANG YUL JANG JOO NYUNG WOO HWA SUNG SHIN CHEOL SHIN DONG CHUL | | |
| 发明人 | KIM, SUNG-WOON KIM, HEE-SEOP KIM, HYANG-YUL JANG, JOO-NYUNG WOO, HWA-SUNG SHIN, CHEOL SHIN, DONG-CHUL | | |
| IPC分类号 | G02F1/1362 G02F1/1343 G02F1/139 | | |
| CPC分类号 | G02F1/136286 G02F1/134363 G02F1/136213 G02F1/13624 G02F1/1368 G02F1/1393 | | |
| 代理机构(译) | 韦策尔, WOLFGANG | | |
| 优先权 | 1020090047425 2009-05-29 KR | | |
| 其他公开文献 | EP2365386A1 | | |
| 外部链接 | Espacenet | | |

摘要(译)

一种液晶显示器, 包括: 第一基板和与第一基板相对设置的第二基板;液晶层夹在第一和第二基板之间并包括液晶分子;第一栅极线, 设置在第一基板上并传输第一栅极信号;第二栅极线, 设置在第一基板上并传输第二栅极信号;数据线设置在第一基板上;第一开关元件, 连接到第一栅极线和数据线;第二开关元件, 连接第二栅极线和数据线;第一像素电极, 连接第一开关元件;第二像素电极, 连接第二开关元件并与第一像素电极分离;升压电容器, 包括分别连接到第一和第二开关元件的第一电容电极和第二电容电极, 它们彼此重叠, 绝缘层设置在它们之间, 其中液晶分子 (31) 由第一像素电极和第二像素电极之间的电场。液晶层可以是电感应光学补偿 (EOC) 模式液晶层。

FIG. 1

