



(11)

**EP 2 290 434 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:

**23.11.2016 Bulletin 2016/47**

(51) Int Cl.:

**G02F 1/133** <sup>(2006.01)</sup> **G02F 1/13357** <sup>(2006.01)</sup>  
**G09G 3/20** <sup>(2006.01)</sup> **G09G 3/34** <sup>(2006.01)</sup>  
**G09G 3/36** <sup>(2006.01)</sup> **H04N 5/66** <sup>(2006.01)</sup>

(21) Application number: **09731168.2**

(86) International application number:

**PCT/JP2009/057392**

(22) Date of filing: **10.04.2009**

(87) International publication number:

**WO 2009/125850 (15.10.2009 Gazette 2009/42)**

**(54) DISPLAY CONTROL APPARATUS AND METHOD AND PROGRAM**

ANZEIGEBEDIENUNGANORDNUNG, VERFAHREN UND PROGRAMM

DISPOSITIF, PROCÉDÉ ET PROGRAMME DE COMMANDE D’AFFICHAGE

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL  
PT RO SE SI SK TR**

(74) Representative: **Cougard, Jean-Marie et al**

**Cabinet Beau de Loménie  
158, rue de l’Université  
75340 Paris Cedex 07 (FR)**

(30) Priority: **11.04.2008 JP 2008103389**

(56) References cited:

**EP-A1- 1 705 636 EP-A1- 1 788 550  
EP-A1- 2 247 165 WO-A1-2007/141721  
WO-A2-03/077013 JP-A- 2007 183 499  
US-A1- 2001 035 853 US-A1- 2006 087 486**

(43) Date of publication of application:

**02.03.2011 Bulletin 2011/09**

(73) Proprietor: **Sony Corporation**

**Tokyo 108-0075 (JP)**

- **TRENTACOSTE ET AL: "Photometric image processing for high dynamic range displays", JOURNAL OF VISUAL COMMUNICATION AND IMAGE REPRESENTATION, ACADEMIC PRESS, INC, US, vol. 18, no. 5, 5 September 2007 (2007-09-05), pages 439-451, XP022231050, ISSN: 1047-3203, DOI: DOI:10.1016/J.JVCIR.2007.06.006**

(72) Inventors:

- **HIRAMATSU, Takeshi  
Tokyo 108-0075 (JP)**
- **ASANO, Mitsuyasu  
Tokyo 108-0075 (JP)**
- **INADA, Tetsuji  
Tokyo 108-0075 (JP)**
- **NISHIDA, Koji  
Tokyo 108-0075 (JP)**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 2 290 434 B1**

**Description**

## Technical Field

5 **[0001]** The present invention relates to a display control apparatus and method, and a program, in particular, a display control apparatus and method, and a program with which a luminance deficiency by a back light can be suppressed.

## Background Art

10 **[0002]** Up to now, as a liquid crystal display apparatus utilising a transmission type liquid crystal panel, one is proposed with which a dynamic range expansion of a luminance of an image to be displayed is realized by changing an amount of incident light for each of display areas (blocks) on the liquid crystal panel with use of a plurality of back lights (for example, see Patent Document 1).

15 **[0003]** In this manner, in a case where the light is incident from the respective plural back lights on the respective corresponding display areas of the liquid crystal panel, as shown in Fig. 1, the light amount that should be emitted from the respective back lights is obtained from an image signal of the image to be displayed.

**[0004]** That is, in Fig. 1, an image signal with a step-like wave pattern indicated by an arrow A11 is input to a light emission amount calculation unit 11 and a division unit 12, and in the light emission amount calculation unit 11, on the basis of the image signal, the light amount that should be emitted from one back light 13 is calculated. Also, in the division unit 12, by dividing the supplied image signal by the light amount from the light emission amount calculation unit 11, a transmittance of the light in a display area of a liquid crystal panel 14 corresponding to the back light 13 is calculated. It should be noted that in the wave pattern of Fig. 1, the lateral axis represents a horizontal position of the back light, and a center position represents a center position in the display area of the back light 13.

25 **[0005]** Herein, as the size of the one back light 13 is larger than the size of a pixel in the display area of the liquid crystal panel 14, the light amount of the back light 13 is calculated from a pixel value of each pixel for the image displayed in the display area of the liquid crystal panel 14 corresponding to the back light 13.

**[0006]** Then, when the light amount is calculated, the back light 13 emits the light on the basis of the light amount calculated by the light emission amount calculation unit 11, and the light is incident on the liquid crystal panel 14. According to this, from the back light 13, a light with a wave pattern indicated by an arrow A12 is projected. That is, as the light from the back light 13 is diffused, the light amount at the center of the light is the largest, and the light amount decreases as being away from the center.

30 **[0007]** Also, the liquid crystal panel 14 transmits the light from the back light 13 with a wave pattern indicated by an arrow A13, that is, at a transmittance calculated by the division unit 12. According to this, in the display area of the liquid crystal panel 14, as indicated by an arrow A14, an image almost the same as the image of the input image signal is displayed.

## Related Art Document

## Patent Document

40 **[0008]** Patent Document 1: Japanese Unexamined Patent Application Publication No. 2007-322901.  
**[0009]** Patent document US 2006/087486 A1 dated 27 April 2006 discloses a liquid crystal display having a display module, a programmable voltage generator and a driving circuit, the latter being coupled to the programmable voltage generator and to the back light module for adjusting the brightness level of the light sources inside the back light module according to a plurality of driving voltage signals.

45 **[0010]** Patent document EP 1788550 A1 dated 23 May 2007 discloses a display apparatus for controlling the brightness values of a plurality of light sources corresponding to blocks of a display panel.

**[0011]** Patent document EP 1705636 A1 dated 27 September 2006 discloses a display apparatus comprising a display screen divided into a plurality region, a backlight including a plurality of sets of light sources and a control unit for detecting display luminance in each region, computing the emission luminance of each light source, computing a correction value for each pixel and delivering a display driving signal generated on the basis of the correction value of each pixel.

50 **[0012]** Document WO 03/077013 A2 dated 18 September 2003 discloses a high dynamic range display device comprising a light modulator and a light source, said light source including an array of controllable light emitters. The controllable-emitters and elements of the light modulator may be controlled to adjust the intensity of light emanating from corresponding areas on the screen.

55 **[0013]** Document US 2001/035853 A1 dated 1st November 2001 discloses an assembly of display device and illumination system. The illumination system comprises a plurality of light-emitting diodes which are individually driven. In the case of failure of one of the LEDs, appropriate measures can be taken in the illumination system to compensate for the

effect of this failure.

#### Disclosure of Invention

#### 5 Technical Problem

**[0014]** Incidentally, when the light emission amount is decided for each of the plural display areas, in a case where a light emission amount equal to or larger than an upper limit of the back light to be mounted is calculated as an expected value or a case where the other center block light emission amount is desired to be allocated to a surrounding block, if the light emission amount is simply distributed, the necessary luminance at the center block may not be secured in some cases.

**[0015]** In particular, in a case where a light emission pattern after the allocation is circularized while imitating a natural diffusion, if simply changed, a light emission efficiency tends to decrease.

**[0016]** The present invention has been made in view of the above-mentioned circumstances and is aimed at suppressing the luminance deficiency by the back light. Technical Solution

**[0017]** The invention is disclosed in the appended set of claims.

#### Advantageous Effects

**[0018]** According to an aspect of the present invention, the luminance deficiency by the back light can be suppressed.

#### Brief Description of Drawings

#### **[0019]**

**[Fig. 1]** Fig. 1 shows a configuration of a conventional liquid crystal display apparatus.  
**[Fig. 2]** Fig. 2 shows a configuration example of an embodiment of a display apparatus to which the present invention is applied.  
**[Fig. 3]** Fig. 3 is an explanatory diagram for describing a configuration example of a display control unit of Fig. 2.  
**[Fig. 4]** Fig. 4 is a flow chart for describing a display processing.  
**[Fig. 5]** Fig. 5 is a flow chart for describing a back light luminance calculation processing.  
**[Fig. 6]** Fig. 6 is an explanatory diagram for describing a contribution rate.  
**[Fig. 7]** Fig. 7 is an explanatory diagram for describing an example of sharing a luminance.  
**[Fig. 8]** Fig. 8 is an explanatory diagram for describing a first adjacent block to a third adjacent block.  
**[Fig. 9]** Fig. 9 is an explanatory diagram for describing a weight corresponding to a spread shape.  
**[Fig. 10]** Fig. 10 is an explanatory diagram for describing a configuration example of a general-use personal computer.

#### Best Modes for Carrying Out the Invention

**[0020]** Hereinafter, with reference to the drawings, embodiments to which the present invention is applied will be described.

**[0021]** Fig. 2 shows a configuration example of an embodiment of a display apparatus to which the present invention is applied.

45 -

**[0022]** A display apparatus 61 is composed of a display control unit 81, back light control units 82-1 to 82-N, back lights 83-1 to 83-N, a liquid crystal panel control unit 84, and a liquid crystal panel 85.

**[0023]** The display apparatus 61 is, for example, a liquid crystal display apparatus such as a liquid crystal display, and to the display control unit 81 of the display apparatus 61, an image signal of a display image to be displayed on the liquid crystal panel 85 is input.

**[0024]** On the basis of the input image signal, the display control unit 81 calculates a light amount of the light projected from the back lights 83-1 to 83-N, in more detail, a back luminance indicating a luminance of the light to be supplied to the back light control units 82-1 to 82-N.

**[0025]** Also, on the basis of the image signal, for each of the display areas (blocks) in the liquid crystal panel 85 where a majority of the light from the respective back lights 83-1 to 83-N is incident, the display control unit 81 calculates a transmittance of the respective pixels in the display area to be supplied to the liquid crystal panel control unit 84. This transmittance is set as a value, for example, from 0 to 1.

**[0026]** It should be noted that the pixel in the display area of the liquid crystal panel 85 is the display unit of the image and referred to as one cell composed of the respective areas where the respective lights of R, G, and B are transmitted.

**[0027]** On the basis of the back light luminance supplied from the display control unit 81, the back light control units 82-1 to 82-N controls the back lights 83-1 to 83-N to emit the light. Also, the back lights 83-1 to 83-N emit the light by the control of the back light control units 82-1 to 82-N, and the light is incident on the liquid crystal panel 85.

**[0028]** It should be noted that the back lights 83-1 to 83-N are respectively configured to emit the light in the area for one block when the entire back light is divided into N display areas (blocks). In view of the above, hereinafter, the blocks corresponding to the back lights 83-1 to 83-N in the entire back light are referred to as blocks B1 to BN while being associated with a value after the hyphen of the respective reference symbols. Therefore, the back lights 83-1 to 83-N are respectively configured to emit the light in the display areas of the blocks B1 to BN of the entire back light. Alternatively, the light is emitted in the display areas of the blocks B1 to BN by the back lights 83-1 to 83-N.

**[0029]** The liquid crystal panel control unit 84 causes the liquid crystal panel 85 to transmit the light at the transmittance of the respective pixels supplied from the display control unit 81, that is, the aperture rate. The liquid crystal panel 85 transmits the light incident on the respective pixels in the display areas from the back lights 83-1 to 83-N at the transmittance instructed from the liquid crystal panel control unit 84 and displays the display image.

**[0030]** It should be noted that hereinafter, in a case where it is unnecessary to distinguish the respective back light control units 82-1 to 82-N and the back lights 83-1 to 83-N individually, those are simply referred to as back light control unit 82 and back light 83, respectively, and other configurations are also similarly referred to. Also, an overall configuration of the back light composed of the plurality of back lights 83 represents the entire back light.

**[0031]** In the display apparatus 61, the back light 83 serving as a light source is arranged on a back face of the liquid crystal panel 85, and a majority of the light projected from the back light 83 is incident on the display areas (blocks) of the liquid crystal panel 85 opposing the back light 83. For example, at majority of the light emitted from the back light 83-1 is incident on a part on an upper left side in the illustration of the liquid crystal panel 85. Therefore, in the illustration of the liquid crystal panel 85, in a case where an image is displayed in which the upper left side is bright and other parts are dark, it is possible to cause only the back light 83-1 to emit the light at a high luminance to some extent and the other back lights 83-2 to 83-N to emit the light at a relatively low luminance. According to this, it is possible to suppress the power consumption of the back light 83, and also the dynamic range of the luminance of the display image can be further expanded.

**[0032]** It should be noted that the transmission type liquid crystal panel 85 is provided to the display apparatus 61, but without a limit to the liquid crystal panel, any transmission type display panel for displaying an image while transmitting the light from the back light 83 may also be used.

**[0033]** Next, with reference to Fig. 3, a configuration example of a more detailed embodiment of the display control unit 81 of Fig. 2 will be described.

**[0034]** The display control unit 81 is composed of a necessary light emission level calculation unit 101, a deficiency determination unit 102, a first neighborhood block light emission level calculation unit 103, a spread shape weight addition unit 104, a deficiency determination unit 105, a second neighborhood block light emission level calculation unit 106, a spread shape weight addition unit 107, a deficiency determination unit 108, a third neighborhood block light emission level calculation unit 109, a spread shape weight addition unit 110, a light emission level management unit 111, an output unit 112, an incident luminance calculation unit 113, a division unit 114, a light emission profile memory 115, and a setting unit 116.

**[0035]** The image signal input to the display control unit 81 of the display apparatus 61 is supplied to the necessary light emission level calculation unit 101 of the display control unit 81 and the division unit 123. This image signal is set, for example, as an image signal of a moving image.

**[0036]** On the basis of the supplied image signal, through a processing which will be described below, the necessary light emission level calculation unit 101 calculates the back light luminance of the light projected by the respective back lights 83 as the light emission level among the areas in the display image based on the image signal on the basis of the luminance (necessary luminance) of the area displayed on each block of the liquid crystal panel 85 corresponding to the respective blocks of the back light 83 and supplies the back light luminance to the deficiency determination unit 102.

**[0037]** It should be noted that the respective display areas of the liquid crystal panel 85 corresponding to the back lights 83 are areas obtained by virtually dividing the entire display area of the liquid crystal panel 85 and refer to areas where a majority of the light from the one back light 83 immediately below the back face of the liquid crystal panel 85 is incident.

**[0038]** For example, if the display area of the liquid crystal panel 85 is virtually divided into N areas in Fig. 2, the respective display areas corresponding to the respective back lights 83-1 to 83-N are the corresponding respective areas on the display areas. Hereinafter, the display area of the liquid crystal panel 85 corresponding to the back light 83 is also referred to as partial display area.

**[0039]** The deficiency determination unit 102 compares the light emission level for each of the respective blocks with the largest light emission level at which the light can be emitted in the respective blocks to determine as to the presence

or absence of the deficiency in the light amount which can be emitted. In a case where it is determined that the deficiency is not caused, the deficiency determination unit 102 supplies the supplied light emission level to the light emission level management unit 111 as the back light luminance in the back light 83 in the corresponding block and stores the light emission level in a memory 111a. In a case where the light emission level with respect to the same block is already stored in the memory 111a, the light emission level management unit 111 compares with the supplied light emission level and stores the larger one of the light emission levels.

**[0040]** Also, in a case where it is determined that the deficiency is generated, the deficiency determination unit 102 supplies information on the largest light emission level of the back light 83 corresponding to the block where it is determined that the deficiency is generated to the first neighborhood block light emission level calculation unit 103.

**[0041]** The first neighborhood block light emission level calculation unit 103 reads out the respective profiles of first neighborhood blocks from the light emission profile memory 115 and calculates a light emission level at a time of emitting the light so as to compensate the deficiency with respect to the necessary luminance in an attention block on the basis of a total sum of contribution rates to the attention block of the diffused light caused by the light emission in the respective blocks to be supplied to the spread shape weight addition unit 104. The first neighborhood blocks mentioned herein are eight pieces of blocks adjacent to the block (attention block) where it is determined that the deficiency is generated in the horizontal direction, the vertical direction, and the oblique direction. Also, the light emission profile memory 115 stores information on a distribution of contribution rates by diffusion for each of the respective blocks of the back light 83.

**[0042]** The spread shape weight addition unit 104 adds a weight with respect to the light emission levels of the respective blocks of the first neighborhood blocks while corresponding to a diffusion shape to the surrounding by the light emission in the blocks of the respective back lights 83 previously set by the setting unit 116 which is provided with an operation function such as a button or a mouse to be supplied to the deficiency determination unit.

**[0043]** The deficiency determination unit 105 compares the light emission level necessary in the first neighborhood blocks with the largest light emission level at which the light can be emitted in the back light 83 of the respective blocks of the first neighborhood blocks to determine as to the presence or absence of a deficiency or the light amount at which the light can be emitted. In a case where it is determined that the deficiency is not caused, the deficiency determination unit 105 supplies the supplied necessary light emission level of the first neighborhood blocks and the largest light emission level of the attention block as the back light luminance in the back light 83 in the corresponding block to the light emission level management unit 111 and stores the light emission levels in the memory 111a. In a case where the light emission level with respect to the same block is already stored in the memory 111a, the light emission level management unit 111 compares with the supplied light emission level and stores the larger one of the light emission levels.

**[0044]** Also, in a case where a deficiency is generated even at the largest light emission level with respect to the necessary light emission level of the first neighborhood blocks, the deficiency determination unit 105 supplies the information on the largest light emission level of the back light 83 corresponding to the attention block where it is determined that the deficiency is generated and the largest light emission level of the first neighborhood blocks to the second neighborhood block light emission level calculation unit 106.

**[0045]** The second neighborhood block light emission level calculation unit 106 reads out the respective profiles of the second neighborhood blocks from the light emission profile memory 115, and on the basis of a total sum of the contribution rates to the attention block of the light diffused by the light emission of the respective blocks, calculates light emission levels at a time of emitting the light so as to compensate the deficiency with respect to the necessary luminance by the attention block and the first neighborhood blocks to be supplied to the spread shape weight addition unit 107. The second neighborhood blocks mentioned herein are 16 blocks adjacent to the first neighborhood blocks where it is determined that the deficiency is generated in the horizontal direction, the vertical direction, and the oblique direction at locations far from the processing handling blocks.

**[0046]** The spread shape weight addition unit 107 adds a weight with respect to the light emission levels of the respective blocks of the second neighborhood blocks while corresponding to a diffusion shape to the surrounding by the light emission in the blocks of the respective back lights 83 previously set by the setting unit 116 which is provided with the operation function such as the button or the mouse to be supplied to the deficiency determination unit 108.

**[0047]** The deficiency determination unit 108 compares the light emission level necessary in the second neighborhood blocks with the largest light emission level at which the light can be emitted in the back light 83 of the respective blocks of the second neighborhood blocks to determine as to the presence or absence of a deficiency of the light amount at which the light can be emitted. In a case where it is determined that the deficiency is not caused, the deficiency determination unit 108 supplies the supplied necessary light emission level of second neighborhood blocks, the largest light emission level of the attention block, and the largest light emission level of the first neighborhood blocks as the back light luminance in the back light 83 in the corresponding block to the light emission level management unit 111 to be stored in the memory 111a. In a case where the light emission level with respect to the same block is already stored in the memory 111a, the light emission level management unit 111 compares with the supplied light emission level and stores the larger one of the light emission levels.

**[0048]** Also, in a case where a deficiency is generated even at the largest light emission level with respect to the

necessary light emission level of the second neighborhood blocks, the deficiency determination unit 108 supplies the information on the largest light emission level of the back light 83 corresponding to the attention block where it is determined that the deficiency is generated, the largest light emission level of the first neighborhood blocks, and the largest light emission level of the second neighborhood blocks to the third neighborhood block light emission level calculation unit 109.

**[0049]** The third neighborhood block light emission level calculation unit 109 reads out the respective profiles of third neighborhood blocks from the light emission profile memory 115, and on the basis of a total sum of the contribution rates to the attention block of the light diffused by the light emission of the respective blocks, calculates light emission levels at a time of emitting the light so as to compensate the deficiency with respect to the necessary luminance by the attention block, the first neighborhood blocks, and the second neighborhood blocks to be supplied to the spread shape weight addition unit 110. The third neighborhood blocks mentioned herein are 24 blocks adjacent to the second neighborhood blocks where it is determined that the deficiency is generated in the horizontal direction, the vertical direction, and the oblique direction at locations far from the processing handling blocks.

**[0050]** The spread shape weight addition unit 110 adds a weight with respect to the light emission levels of the respective blocks of the third neighborhood blocks while corresponding to a diffusion shape to the surrounding by the light emission in the blocks of the respective back lights 83 previously set by the setting unit 116 which is provided with the operation function such as the button or the mouse to be supplied as the back light luminance in the back light 83 in the corresponding block to the light emission level management unit 111, and stores the light emission levels in the memory 111a. In a case where the light emission level already stored in the memory 111a exists, the light emission level management unit 111 compares with the supplied light emission level and stores the larger one of the light emission levels.

**[0051]** The output unit 112 supplies the light emission levels stored in the memory 111a of the light emission level management unit 111 while corresponding to the respective blocks B1 to BN of the respective back lights 83-1 to 83-N as the back light luminance to the back light control units 82-1 to 82-N and the incident luminance calculation unit 113.

**[0052]** On the basis of the back light luminance supplied from the output unit 112, the incident luminance calculation unit 113 calculates a pixel incident luminance indicating a luminance of the light estimated to be incident on the pixel from the back light 83 for the respective pixels in the respective blocks of the liquid crystal panel 85 corresponding to the back light 83. That is, in a case where the back light 83 emits the light at the supplied back light luminance, the pixel incident luminance is information indicating the luminance of the light estimated to be incident on the pixel in the respective partial display areas from the back light 83.

**[0053]** For example, in a case where the corresponding back light 83 emits the light, the incident luminance calculation unit 113 previously holds a profile indicating how the light projected from the back light 83 is diffused as a distribution of a contribution rate in accordance with a distance. Then, when the back light 83 emits the light at the back light luminance supplied from the output unit 112, by using the held profile, the incident luminance calculation unit 113 obtains the luminance of the light estimated to be incident on the respective pixels in the respective blocks of the liquid crystal panel 85 corresponding to the back light 83 from the back light 83 and sets the luminance for each of those pixels as the pixel incident luminance.

**[0054]** When the incident luminance calculation unit 113 obtains the pixel incident luminance for each of the pixels in the respective blocks, those pixel incident luminances are supplied to the division unit 114.

**[0055]** The division unit 114 divides the signal value of the supplied image signal, in more detail, the luminance obtained from the signal value by the pixel incident luminance from the incident luminance calculation unit 113 to calculate the transmittance of the respective pixels in the respective blocks. Then, the division unit 114 supplies the calculated transmittance for each of the pixels to the liquid crystal panel control unit 84.

**[0056]** For example, a pixel attracting attention in the respective blocks is referred to as attention pixel. Also, a pixel incident luminance of the attention pixel is set as CL, a back light luminance of the back light 83 is set as BL, and also a luminance at the pixel on the display image at the same position as the attention pixel, that is, the pixel on the display image where the image displayed at the attention pixel is displayed is set as IL. Furthermore, a transmittance of the light in the attention pixel is set as T.

**[0057]** In this case, when the back light 83 emits the light at the back light luminance BL, the luminance of the light incident from the back light 83 on the attention pixel, that is, the pixel incident luminance of the attention pixel is CL. Then, when the attention pixel transmits the light of the pixel incident luminance CL incident from the back light 83 at the transmittance T, the luminance of the light projected from the attention pixel, that is, the luminance of the attention pixel perceived by a user viewing the liquid crystal panel 85 (hereinafter, which will be also referred to a display luminance OL) is represented by the pixel incident luminance CL x the transmittance T. When the display luminance OL is equal to the luminance IL of the pixel of, as the same image as the display image is displayed on the liquid crystal panel 85, if the display luminance OL is equal to the luminance IL, the following expression (1) is established.

The transmittance  $T = (\text{the luminance IL of the pixel of the display image}) /$   
 (the pixel incident luminance CL)

... (1)

**[0058]** Therefore, the division unit 114 divides the supplied signal value of the image signal indicating the pixel value of the pixel of the display image corresponding to the attention pixel, in more detail, the luminance IL of the pixel of the display image by the pixel incident luminance of the attention pixel CL supplied from the incident luminance calculation unit 113, so that it is possible to calculate the appropriate transmittance T of the attention pixel.

**[0059]** Next, with reference to a flow chart of Fig. 4, a display processing by the display apparatus 61 of Fig. 2 will be described.

**[0060]** In step S11, the display control unit 81 executes a back light luminance calculation processing which will be described below, calculates the back light luminance of the back light 83 for each block on the basis of the input image signal, and supplies the calculated back light luminance to the incident luminance calculation unit 113 and the back light control unit 82. It should be noted that the back light luminance calculation processing will be described below in detail with reference to a flow chart of Fig. 5.

**[0061]** In step S12, on the basis of the back light luminance supplied from the output unit 112, the incident luminance calculation unit 113 calculates the pixel incident luminance for each pixel of the respective blocks of the liquid crystal panel 85 corresponding to the back light 83. The incident luminance calculation unit 113 supplies the calculated pixel incident luminance to the division unit 114.

**[0062]** In step S13, the division unit 114 divides the supplied image signal by the pixel incident luminance supplied from the incident luminance calculation unit 113 to obtain the transmittance of the pixel for each pixel of the respective blocks to be supplied to the liquid crystal panel control unit 84.

**[0063]** In step S14, on the basis of the back light luminance supplied from the incident luminance calculation unit 113, the back light control unit 82 causes the back light 83 to emit the light at the back light luminance. Also, the back light 83 emits the light on the basis of the control of the back light control unit 82, so that the light at the specified back light luminance is incident on the liquid crystal panel 85.

**[0064]** It should be noted that the above-mentioned processing in steps S11 to S14 is collectively performed for the respective blocks by the display control unit 81. Also, the processing in step S14 is individually performed by each of the back light control unit 82-1 to the back light control unit 82-N and each of the back light 83-1 to the back light 83-N.

**[0065]** In step S15, the liquid crystal panel control unit 84 controls the operation of the liquid crystal panel 85 on the basis of the transmittance for each pixel in the display area of the liquid crystal panel 85 supplied from the display control unit 81 to change the transmittance of each pixel.

**[0066]** In step S16, on the basis of the control of the liquid crystal panel control unit 84, the liquid crystal panel 85 changes the transmittance of the pixel in the display area into the transmittance specified for each pixel to transmit the light incident from the back light 83, so that the display image is displayed.

**[0067]** In step S17, the display apparatus 61 determines whether or not the display of the display image is ended. For example, in a case where the user instructs the end of the display of the display image or the display image for all the frames of the supplied image signal is displayed, it is determined to end.

**[0068]** In step S17, in a case where it is determined that the display of the display image is not ended, the processing is returned to step S11, and the above-mentioned processing is repeatedly performed. That is, for the display image in the next frame, the back light luminance and the transmittance are obtained, and the display image thereof is displayed.

**[0069]** In contrast to this, in step S17, in a case where it is determined that the display of the display image is end, the respective units of the display apparatus 61 ends the performed processing, and the display processing is ended.

**[0070]** In this manner, when the image signal is supplied, the display apparatus 61 obtains the back light luminance and the transmittance to display the display image.

**[0071]** Next, with reference to the flow chart of Fig. 5, the back light luminance calculation processing which is the processing in step S11 in the flow chart of Fig. 4 will be described.

**[0072]** In step S21, the necessary light emission level calculation unit 101 sets any one of the unprocessed blocks as a processing target block.

**[0073]** In step S22, on the basis of the input image signal, the necessary light emission level calculation unit 101 obtains a necessary luminance p and calculates a light emission level of the processing target block corresponding to the necessary luminance p to be supplied to the deficiency determination unit 102. To be more specific, the necessary light emission level calculation unit 101 reads out a profile of the processing target block from the light emission profile memory 115, obtains a contribution rate r (the unit is %) with respect to the block set as the processing target, and rebates with respect to the necessary luminance p to obtain the necessary light emission level  $L_n (= p/(r/100))$ . Herein, the contribution rate is indicated, for example, by a profile represented by a curve in Fig. 6, which represents, when the

processing target block is set as a block  $B(x)$ , a contribution ratio of the light emitted from the processing target block  $B(x)$  while corresponding to a distance from the block. That is, in a case where the back light 83 corresponding to the processing target block  $B(x)$  emits the light, as being diffused, the light not only contributes for the light emission in the block corresponding to itself but also contributes for the light emission in the adjacent blocks and further adjacent blocks.

For this reason, by the light emitted by the back light 83 corresponding to the processing target block  $B(x)$  shown in Fig. 6, the contribution rate to the processing target block  $B(x)$  is, for example, a value in the vicinity of a contribution rate  $\alpha_1$ . Also, the contribution rates to blocks  $B(x - 1)$  and  $B(x + 1)$  adjacent to the processing target block  $B(x)$  are values in the vicinity of a contribution rate  $\alpha_2$ , and further, the contribution rates to blocks  $B(x - 2)$  and  $B(x + 2)$  adjacent to the blocks  $B(x - 1)$  and  $B(x + 1)$  are values in the vicinity of a contribution rate  $\alpha_3$ .

**[0074]** It should be noted that as shown in the curved line of Fig. 6, as the contribution rate decreases in accordance with the distance from the center position of the blocks while taking the largest value immediately above the center position of the blocks where the light is emitted, in the case of considering in units of block, to suppress the luminance deficiency, the light emission level is calculated by using the largest value of the outermost peripheral part of the blocks as the reference for the computation.

**[0075]** In step S23, the deficiency determination unit 102 determines whether or not the deficiency of the largest light emission level  $Lm1$  of the back light 83 corresponding to the processing target block is generated with respect to the necessary light emission level  $L_n$ .

**[0076]** In step S23, for example, in a case where the necessary light emission level  $L_n$  is a light emission level  $\Delta a$  equivalent to 280% when the largest light emission level  $Lm1$  is set as 100% as shown in the left part of Fig. 7, in a case where it is determined that the deficiency of the largest light emission level  $Lm1$  of the back light 83 corresponding to the processing target block is generated with respect to the necessary light emission level  $L_n$ , the deficiency determination unit 102 supplies a status where the deficiency is generated together with the information on the largest light emission level  $Lm1$  of the back light 83 corresponding to the processing target block and the necessary luminance  $p$  to the first neighborhood block light emission level calculation unit 103.

**[0077]** In step S24, the first neighborhood block light emission level calculation unit 103 reads out the profiles of the respective blocks belonging to first adjacent blocks. Herein, as shown in Fig. 8, the first adjacent blocks are, for example, eight blocks  $B11$  to  $B18$  adjacent to the block (attention block) where it is determined that the deficiency is generated in the horizontal direction, the vertical direction, and the oblique direction when the processing target block  $B1$  is set as the center.

**[0078]** In step S25, the first neighborhood block light emission level calculation unit 103 calculates the light emission level of the respective blocks belonging to the first adjacent blocks to be supplied to the spread shape weight addition unit 104 together with the information on the largest light emission level  $Lm1$  of the back light 83 corresponding to the processing target block and the necessary luminance  $p$ . That is, on the basis of the profiles of the respective blocks, the first neighborhood block light emission level calculation unit 103 rebates at the contribution rate in accordance with the distance and calculates the light emission level of the back light 83 corresponding to the respective blocks of the first adjacent blocks necessary for satisfying the deficient luminance through the light emission by the back light 83 corresponding to the processing target block.

**[0079]** For example, in the case of the block  $B14$  in Fig. 8, as it is considerable that the contribution rate to the processing target block  $B1$  is a value in a vicinity of  $\alpha_2$  as shown in Fig. 6, the light emission level is calculated so that the deficient luminance with respect to the necessary luminance  $p$  through the light emission by the back light 83 corresponding to the processing target block  $B1$  can be shared  $1/8$  each. It should be noted that strictly speaking, as the distances to the processing target block are different in the blocks  $B11$ ,  $B13$ ,  $B16$ , and  $B18$  and the blocks  $B12$ ,  $B14$ ,  $B15$ , and  $B17$ , contribution rates  $\alpha_x$  and  $\alpha_y$  are respectively obtained for the two types of the distance, and the light emission levels are respectively set. Also, for example, by using a unified contribution rate from an average distance of the blocks  $B11$  to  $B18$ , the processing may be simplified through a processing by using a contribution rate  $\alpha_z$  in which the eight blocks are unified as one group. It should be noted that hereinafter, the description proceeds as it is supposed that for the blocks  $B11$  to  $B18$ , through a unification by using the average of the distances from the processing target block, a light emission level  $L_o$  is obtained as the necessary light emission level.

**[0080]** In step S26, the spread shape weight addition unit 103 obtains the light emission levels of the respective blocks belonging to the first adjacent blocks adds a weight in accordance with a spread shape previously set by the setting unit 116 to be supplied together with the information on the largest light emission level  $Lm1$  of the back light 83 corresponding to the processing target block, the necessary luminance  $p$  to the deficiency determination unit 105. The spread shape indicates in which shape the light is diffused as the back light 83 corresponding to one block emits the light. For example, in a case where the spread shape is set as square, as the blocks  $B11$  to  $B18$  belonging to the first adjacent blocks shown in Fig. 8 are disposed in a square shape and are the same as the diffusing shape, it is not necessary to add a weight, and a weight is evenly added to any of the blocks, so that the necessary light emission level  $L_o$  is output as it is.

**[0081]** On the other hand, for example, in a case where the spread shape is circular, as shown in Fig. 9, while setting the processing target block  $B1$  as the center, in accordance with a ratio of an occupying area belonging to a circular



shape in the case of structuring the circular shape, for example, the weight of the blocks B11, B13, B16, and B18 is set as 0.7, and the weight of the other blocks B12, B14, B15, and B17 is set as 1.3 or the like, so that the respective necessary light emission levels are output as  $0.7 \times L_o$  and  $1.3 \times L_o$ .

[0082] In step S27, the deficiency determination unit 105 determines whether or not a deficiency in the largest light emission level  $L_{m2}$  of the back light 83 corresponding to the respective blocks belonging to the first adjacent blocks is generated with respect to the necessary light emission level  $L_o$  belonging to the first adjacent blocks.

[0083] In step S27, for example, in a case where it is determined that the necessary light emission level  $L_o$  is deficient in the largest light emission level  $L_{m2}$  of the back light 83 corresponding to the blocks belonging to the first adjacent blocks, the processing proceeds to step S28.

[0084] In step S28, the deficiency determination unit 105 supplies a status where the deficiency is generated together with the information on the largest light emission level  $L_{m1}$  of the back light 83 corresponding to the processing target block, the largest light emission level  $L_{m2}$  of the back light 83 corresponding to the first adjacent blocks, and the necessary luminance  $p$  to the first neighborhood block light emission level calculation unit 106. Furthermore, the second neighborhood block light emission level calculation unit 106 reads out profiles of the respective blocks belonging to second adjacent blocks. Herein, for example, as shown in Fig. 8, when the processing target block B1 is set as the center, the second adjacent blocks are 16 blocks of blocks B21 to B36 respectively adjacent to the first adjacent blocks in the horizontal direction, the vertical direction, and the oblique direction.

[0085] In step S29, the second neighborhood block light emission level calculation unit 106 calculates the light emission levels of the respective blocks belonging to the second adjacent blocks to be supplied to the spread shape weight addition unit 107 together with the information on the largest light emission level  $L_{m1}$  of the back light 83 corresponding to the processing target block, the largest light emission level  $L_{m2}$  of the blocks belonging to the first adjacent blocks, and the necessary luminance  $p$ . That is, the second neighborhood block light emission level calculation unit 106 rebates at the contribution rate in accordance with the distance on the basis of the profiles of the respective blocks and calculates the light emission level of the back light 83 corresponding to the respective blocks of the second adjacent blocks necessary to satisfy the deficiency through the light emission by the back light 83 corresponding to the processing target block and the first adjacent blocks.

[0086] For example, in the case of Fig. 8, the second neighborhood block light emission level calculation unit 106 sets the light emission level so that it is possible to share  $1/16$  of the luminance deficient with respect to the necessary luminance  $p$  through the light emission by the back light 83 corresponding to the processing target block B1 and the first adjacent blocks B11 to B18. It should be noted that as described above, strictly speaking, as distances to the processing target block are different in the blocks B21 to B36, the contribution rates in accordance with the respective distances are obtained. However, similarly as in the first adjacent blocks, the second neighborhood block light emission level calculation unit 106 uses the unified contribution rate from the average distance of the blocks B21 to B36 and uses a contribution rate  $\alpha_u$  in which the 16 blocks are unified as the one group to perform the processing so as to simplify the processing, so that a unified light emission level  $L_p$  with respect to the blocks B21 to B36 is calculated.

[0087] In step S30, the spread shape weight addition unit 107 obtains the light emission levels of the respective blocks belonging to the second adjacent blocks and adds a weight corresponding to the spread shape previously set by the setting unit 116 to be supplied to the deficiency determination unit 108 together with the information on the largest light emission levels  $L_{m1}$  and  $L_{m2}$  of the back light 83 corresponding to the largest light emission level of the processing target block and the first adjacent blocks, and the necessary luminance  $p$ . For example, in a case where the spread shape is square, as the blocks B21 to B36 belonging to the second adjacent blocks shown in Fig. 8 are disposed in a square shape, a weight is evenly added to any of the blocks, so that the necessary light emission level  $L_p$  is output as it is.

[0088] On the other hand, for example, in a case where the spread shape is circular, as shown in Fig. 9, while setting the processing target block B1 as the center, in accordance with a ratio of an occupying area to a ratio configuring the circular shape, for example, the weight for the blocks B21, B25, B32, and B36 is set as 0.7, the weight for the blocks B22, B24, B26, B27, B30, B31, B33, and B35 is set as 1.1, and the weight for the other blocks B23, B28, B29, and B34 is set as 1.4 or the like, so that the output is performed while the respective necessary light emission levels are set as  $0.7 \times L_p$ ,  $1.1 \times L_p$ , and  $1.4 \times L_p$ .

[0089] In step S31, the deficiency determination unit 108 determines whether or not a deficiency in the largest light emission level  $L_{m3}$  of the back light 83 corresponding to the respective blocks belonging to the second adjacent blocks with respect to the necessary light emission level  $L_p$  is generated.

[0090] In step S31, for example, in a case where it is determined that the necessary light emission level  $L_p$  is deficient in the largest light emission level  $L_{m3}$  of the back light 83 corresponding to the blocks belonging to the second adjacent blocks, the processing proceeds to step S31.

[0091] In step S32, the deficiency determination unit 108 supplies a status where the deficiency is generated to the third neighborhood block light emission level calculation unit 109 together with the information on the largest light emission level  $L_{m1}$  of the back light 83 corresponding to the processing target block, the largest light emission level  $L_{m2}$  of the back light 83 corresponding to the first adjacent blocks, the largest light emission level  $L_{m3}$  of the back light 83 corre-

sponding to the second adjacent blocks, and the necessary luminance  $p$ . Furthermore, the third neighborhood block light emission level calculation unit 109 reads out the profiles of the respective blocks belonging to third adjacent blocks. Herein, as shown in Fig. 8, the third adjacent blocks are, for example, 24 blocks of the blocks B41 to B64 adjacent to the respective second adjacent blocks in the horizontal direction, the vertical direction, and the oblique direction when

is set as the center.  
**[0092]** In step S33, the third neighborhood block light emission level calculation unit 109 calculates the light emission levels of the respective blocks belonging to the third adjacent blocks to be supplied to the spread shape weight addition unit 110 together with the information on the largest light emission level  $Lm1$  of the back light 83 corresponding to the processing target block, the largest light emission level  $Lm2$  of the blocks belonging to the first adjacent blocks, the largest light emission level  $Lm3$  of the back light 83 corresponding to the second adjacent blocks, and the necessary luminance  $p$ . That is, the third neighborhood block light emission level calculation unit 109 rebates at the contribution rate in accordance with the distance on the basis of the profiles of the respective blocks and calculates the light emission level of the back light 83 corresponding to the respective blocks of the third adjacent blocks which is necessary for satisfying the deficient luminance through the light emission of the back light 83 corresponding to the processing target block, the first adjacent blocks, and the second adjacent blocks.

**[0093]** For example, the third neighborhood block light emission level calculation unit 109 sets the light emission level so that  $1/24$  of the deficient luminance with respect to the necessary luminance  $p$  can be shared through the light emission by the back light 83 corresponding to the processing target block B1, the first adjacent blocks B11 to B18, and the second adjacent blocks B21 to B36. It should be noted that as described above, strictly speaking, as the distances to the processing target block are different in the blocks B41 to B64, the contribution rates in accordance with the distance are obtained. However, similarly as in the first adjacent blocks, the processing is simplified through the processing by using a contribution rate at unified from the average distance of the blocks B41 to B64 and unifying the 24 blocks into one group, and a light emission level  $Lq$  unified with respect to the blocks B41 to B64 is set.

**[0094]** In step S34, similarly as in the spread shape weight addition units 104 and 107, the spread shape weight addition unit 110 obtains the light emission levels of the respective blocks belonging to the third adjacent blocks and adds a weight corresponding to the spread shape previously set by the setting unit 116 to be supplied to the light emission level management unit 111.

**[0095]** On the other hand, in steps S23, S27, and S30, in a case where the deficiency is not generated in the light emission level, the necessary light emission level (the light emission level at which the light can be emitted)  $Ln$  of the processing target block at that time, or the largest light emission level  $Lm1$  of the processing target block and the necessary light emission level (the light emission level at which the light can be emitted)  $Lo$  of the first adjacent blocks, or the largest light emission level  $Lm1$  of the processing target block, the largest light emission level  $Lm2$  of the first adjacent blocks, and the necessary light emission level (the light emission level at which the light can be emitted)  $Lp$  of the second adjacent blocks are respectively supplied to the light emission level management unit 111.

**[0096]** In step S35, the light emission level management unit 111 accesses the memory 111a to determine whether or not regarding the supplied light emission levels set in the respective blocks of the processing target block, the first adjacent blocks, the second adjacent blocks, and the third adjacent blocks, the light emission level for the corresponding light emission levels already exist.

**[0097]** In step S35, in a case where the information on the light emission levels already stored exists, in step S36, the light emission levels are compared to select the larger one of the light emission levels.

**[0098]** In step S37, the light emission level management unit 111 stores the light emission level supplied from the spread shape weight addition unit 110 (or, the deficiency determination unit 102, 105, or 108) in the memory 111a for each block.

**[0099]** It should be noted that in step S35, in a case where the information on the light emission levels already stored does not exist, the processing in step S36 is skipped.

**[0100]** In step S37, the necessary light emission level calculation unit 101 determines whether or not the unprocessed block exists. In a case where the unprocessed block exists, the processing returns to step S21, and until it is determined that the unprocessed block does not exist, the processing in steps S21 to S37 is repeatedly performed. Then, in step S37, in a case where it is determined that the unprocessed block does not exist, in step S38, the output unit 112 supplies the information on the light emission levels stored in the memory 111a to the respective back light control units 82 and also supplies to the incident luminance calculation unit 113.

**[0101]** As a result, for example, as shown in the right part of Fig. 7, if the light emission level of the processing target block is virtually up to about 200% at maximum, the processing target block emits the light at the largest light emission level  $Lm1$ , the first adjacent blocks emits the light at the largest light emission level  $Lm2$ , the second adjacent blocks emits the light at the largest light emission level  $Lm3$ , and the third adjacent blocks emits the light at the necessary light emission level  $Lq$ . With the luminance contributed to the processing target block (center block) through the respective light emissions, it is possible to enable the right emission at a level (200%) beyond a level at which the light can be emitted independently (100%). Even when an expected value equal to or larger than the luminance at which the light

can be emitted independently is calculated, it is possible to suppress the luminance deficiency. It should be noted that as the light emission level beyond the light emission level at which the light can be emitted independently, the example of 200% has been described, but depending on a performance of the back light 83, the larger light emission level can also be realized.

**[0102]** Also, when the light emission levels are redundantly calculated with respect to the respective blocks, the largest light emission level is regularly selected. Even when a small light emission level is set with the weight addition based on the spread shape, through the computation while setting the other blocks as the processing targets, the value replaces when the large light emission level is calculated as the necessary light emission level, and it is possible to suppress the luminance deficiency due to the weight addition.

**[0103]** It should be noted that in the above, the example in which the neighborhood block groups from the first neighborhood blocks to the third neighborhood blocks are set while corresponding to the processing target block has been described, but it may also suffice that the neighborhood blocks is set in accordance with the distance from the processing target block, so that the neighborhood block group composed of other configurations may be structured in accordance with the distance from the processing target block.

**[0104]** According to the present invention, it is possible to suppress the luminance deficiency by the back light.

**[0105]** Incidentally, the above-mentioned series of processings can be executed by hardware but can also be executed by software. In a case where the above-mentioned series of processings is executed by the software, a program structuring the software is installed from a recording medium into a computer incorporated in dedicated-use hardware or, for example, a general-use personal computer or the like which is capable of executing various functions by installing various programs.

**[0106]** Fig. 10 shows a configuration example of the general-use personal computer. This personal computer accommodates a CPU (Central Processing Unit) 1001. To the CPU 1001, an input and output interface 1005 is connected via a bus 1004. To the bus 1004, a ROM (Read Only Memory) 1002 and a RAM (Random Access Memory) 1003 are connected.

**[0107]** To the input and output interface 1005, an input unit 1006 composed of an input device such as a key board or a mouse with which the user inputs an operation command, an output unit 1007 for outputting a processing operation screen and an image of a processing result to a display device, a storage unit 1008 composed of a hard disk drive or the like for storing programs and various data, and a communication unit 1009 composed of a LAN (Local Area Network) adapter or the like for executing a communication processing via a network represented by the internet are connected. Also, a drive 1010 is connected for reading and writing data with respect to a removable media 1011 such as a magnetic disk (including a flexible disk), an optical disk (including a CD-ROM (Compact Disc-Read Only Memory) and a DVD (Digital Versatile Disc)), an opto-magnetic disk (including an MD (Mini Disc)), or a semiconductor memory.

**[0108]** The CPU 1001 executes various processings while following the programs stored in the ROM 1002 or the programs read from the removable media 1011 such as the magnetic disk, the optical disk, the opto-magnetic disk, or the semiconductor memory installed into the storage unit 1008 and loaded from the storage unit 1008 to the RAM 1003.

The RAM 1003 appropriately stores data and the like necessary for the CPU 1001 to execute the various processings.

**[0109]** It should be noted that in the present specification, steps for describing the program recorded in the recording medium include not only the processing executed in a time sequence manner while following the stated order but also the processing executed in parallel or individually instead of not necessarily being processed in the time sequence manner.

#### Explanation of Reference Numerals

**[0110]** 61 DISPLAY APPARATUS, 81-1 TO 81-N, 81 DISPLAY CONTROL UNIT, 82-1 TO 82-N, 82 BACK LIGHT CONTROL UNIT, 83-1 TO 83-N, 83 BACK LIGHT, 84 LIQUID CRYSTAL PANEL CONTROL UNIT, 85 LIQUID CRYSTAL PANEL, 101 NECESSARY LIGHT EMISSION LEVEL CALCULATION UNIT, 102 DEFICIENCY DETERMINATION UNIT, 103 FIRST NEIGHBORHOOD BLOCK LIGHT EMISSION LEVEL CALCULATION UNIT, 104 SPREAD SHAPE ADDITION UNIT, 105 DEFICIENCY DETERMINATION UNIT, 106 SECOND NEIGHBORHOOD BLOCK LIGHT EMISSION LEVEL CALCULATION UNIT, 107 SPREAD SHAPE ADDITION UNIT, 108 DEFICIENCY DETERMINATION UNIT, 109 THIRD NEIGHBORHOOD BLOCK LIGHT EMISSION LEVEL CALCULATION UNIT, 110 SPREAD SHAPE ADDITION UNIT, 111 LIGHT EMISSION LEVEL MANAGEMENT UNIT, 111a MEMORY, 112 OUTPUT UNIT, 113 INCIDENT LUMINANCE CALCULATION UNIT, 114 DIVISION UNIT

#### Claims

1. A display apparatus (61) comprising:

a plurality of back lights (83) serving as a light source for a liquid crystal panel (85), wherein said back lights are composed of a plurality of blocks, the plurality of blocks comprising an attention block, first neighborhood

blocks adjacent to said attention block and second neighborhood blocks adjacent to said first neighborhood blocks and being in a neighborhood of the attention block farther than the first neighborhood blocks; and a display control unit (81) comprising:

necessary attention block light emission level calculation means (101) configured to calculate a light emission level in the attention block as a necessary attention block light emission level which satisfies a necessary luminance of the attention block based on an image signal;  
 first deficiency determination means (102) configured to compare the light emission level supplied by said necessary attention block light emission level calculation means (101) for said attention block with a first largest light emission level (Lm1) at which light can be emitted in the attention block to determine as to the presence or absence of a first deficiency in the light amount which can be emitted by said attention block, wherein said presence of a first deficiency in the attention block is determined only when the light emission level supplied by said necessary attention block light emission level calculation means (101) for the attention block equals to or is larger than said first largest light emission level;  
 necessary first neighborhood block light emission level calculation means (103) configured to calculate, when said presence of a first deficiency is determined in said attention block, a light emission level of the first neighborhood blocks as a necessary first neighborhood block light emission level to compensate said first deficiency in said attention block based on: the necessary attention block light emission level, the first largest light emission level and a total sum of contribution rates to the attention block of diffused light caused by the light emission in the first neighborhood blocks;  
 second deficiency determination means (105) configured to compare the necessary first neighborhood block light emission level supplied by said first neighborhood block light emission level calculation means (103) with a second largest light emission level (Lm2) at which light can be emitted in the first neighborhood blocks to determine as to the presence or absence of a second deficiency in the light amount which can be emitted by said first neighborhood blocks, wherein said presence of a second deficiency in the first neighborhood blocks is determined only when the necessary first neighborhood block light emission level equals to or is larger than said second largest light emission level (Lm2); and  
 back light light-emission control means (111) configured, when the presence of a first deficiency is determined in said attention block, to cause the back light in the attention block to emit light at the first largest light emission level and back lights in the first neighborhood blocks to emit light at the necessary first neighborhood block light emission level;

**characterized in that:**

the display control unit further comprises necessary second neighborhood block light emission level calculation means (106) configured to calculate, when said presence of a second deficiency is determined in the first neighborhood blocks, a light emission level of the second neighborhood blocks as a necessary second neighborhood block light emission level to compensate said second deficiency by a light emission contribution amount to the attention block through light emission in the second neighborhood blocks, the light emission level of the second neighborhood blocks being calculated based on: the necessary attention block light emission level, the first and second largest light emission levels (Lm1, Lm2) and a total sum of contribution rates to the attention block of diffused light caused by the light emission in the first and second neighborhood blocks; and  
 the back light light-emission control means (111) is further configured, when the presence of a second deficiency is determined in said first neighborhood blocks, to cause the back light in the attention block and the back lights in the first neighborhood blocks to emit the light at the respective first and second largest light emission levels (Lm1, Lm2) and back lights in the second neighborhood blocks to emit the light at the necessary second neighborhood block light emission level.

2. The display apparatus according to Claim 1, wherein the attention block is set as the center of said first neighborhood blocks and the center of said second neighborhood blocks.

3. The display apparatus according to Claim 1 or 2 further comprising:

first weight addition means (104) configured to set a weight on the light emission level of the first neighborhood blocks calculated by the necessary first neighborhood block light emission level calculation means (103) while corresponding to a shape of the light spread from the attention block.

4. The display apparatus according to Claim 3 further comprising:

second weight addition means (107) configured to set a weight on the light emission level of the second neighborhood blocks calculated by the necessary second neighborhood block light emission level calculation unit while corresponding to the shape of the light spread from the attention block.

- 5 5. A display control method for controlling a plurality of back lights (61) serving as a light source for a liquid crystal panel (85), wherein said back lights are composed of a plurality of blocks, the plurality of blocks comprising an attention block, first neighborhood blocks adjacent to said attention block and second neighborhood blocks adjacent to said first neighborhood blocks and being in a neighborhood of the attention block farther than the first neighborhood blocks, said display control method comprising:

10 a necessary attention block light emission level calculation step (S22) of calculating a light emission level in the attention block as a necessary attention block light emission level which satisfies a necessary luminance of the attention block based on an image signal;

15 a first deficiency determination step (S23) of comparing the light emission level for said attention block with a first largest light emission level (Lm1) at which light can be emitted in the attention block to determine as to the presence or absence of a first deficiency in the light amount which can be emitted by said attention block, wherein said presence of a first deficiency in the attention block is determined only when said light emission level for the attention block equals to or is larger than said first largest light emission level for the attention block; a necessary first neighborhood block light emission level calculation step (S24, S25) of calculating, when said  
20 presence of a first deficiency is determined in said attention block, a light emission level of the first neighborhood blocks as a necessary first neighborhood block light emission level to compensate said first deficiency in said attention block based on: the necessary attention block light emission level, the first largest light emission level (Lm1) and a total sum of contribution rates to the attention block of diffused light caused by the light emission in the first neighborhood blocks;

25 a second deficiency determination step (S27) of comparing the necessary first neighborhood block light emission level with a second largest light emission level (Lm2) at which light can be emitted in the first neighborhood blocks to determine as to the presence or absence of a second deficiency in the light amount which can be emitted by said first neighborhood blocks, wherein said presence of a second deficiency in the first neighborhood blocks is determined only when the necessary first neighborhood block light emission level equals to or is larger than said second largest light emission level (Lm2); and  
30 a first back light light-emission control step of causing, when said presence of a first deficiency is determined in said attention block, the back light in the attention block to emit the light at the first largest light emission level and back lights in the first neighborhood blocks to emit the light at the necessary first neighborhood block light emission level;

35 **characterized in that** the display control method further comprises:

40 a necessary second neighborhood block light emission level calculation step (S28, S29) of calculating, when said presence of a second deficiency is determined in the first neighborhood blocks, a light emission level of the second neighborhood blocks as a necessary second neighborhood block light emission level to compensate said second deficiency by a light emission contribution amount to the attention block through light emission in the second neighborhood blocks, the light emission level of the second neighborhood blocks being calculated based on: the necessary attention block light emission level, the first and second largest light emission levels (Lm1, Lm2) and on a total sum of contribution rates to the attention block of diffused light caused by the light emission in the first and second neighborhood blocks; and  
45 a second back light light-emission control step of causing, when said presence of a second deficiency is determined in said first neighborhood blocks, the back light in the attention block and the back lights in the first neighborhood blocks to emit the light at the respective first and second largest light emission levels (Lm1, Lm2) and back lights in the second neighborhood blocks to emit the light at the necessary second neighborhood block light emission level.

6. A program comprising instructions for carrying out the method of claim 5 when said program is run on a computer.

## 55 Patentansprüche

1. Anzeigevorrichtung (61), umfassend:

eine Vielzahl von Hintergrundleuchten (83), die als Lichtquelle für einen Flüssigkristallschirm (85) dienen, wobei die Hintergrundleuchten aus einer Vielzahl von Blöcken zusammengesetzt sind, wobei die Vielzahl von Blöcken einen Aufmerksamkeitsblock, erste Nachbarschaftsblöcke, die dem Aufmerksamkeitsblock benachbart sind, und zweite Nachbarschaftsblöcke, die den ersten Nachbarschaftsblöcken benachbart und in einer ferneren Nachbarschaft des Aufmerksamkeitsblocks als die ersten Nachbarschaftsblöcke sind, umfasst, und eine Anzeigesteuerungseinheit (81), umfassend:

ein Berechnungsmittel (101) für den erforderlichen Aufmerksamkeitsblocklichtemissionspegel, das dazu ausgebildet ist, einen Lichtemissionspegel in dem Aufmerksamkeitsblock als erforderlichen Aufmerksamkeitsblocklichtemissionspegel, der eine erforderliche Leuchtdichte des Aufmerksamkeitsblocks erfüllt, basierend auf einem Bildsignal zu berechnen,

ein erstes Mangelfeststellungsmittel (102), das dazu ausgebildet ist, den Lichtemissionspegel, der durch das Berechnungsmittel (101) für den erforderlichen Aufmerksamkeitsblocklichtemissionspegel für den Aufmerksamkeitsblock bereitgestellt wird, mit einem erstgrößten Lichtemissionspegel ( $L_{m1}$ ), auf dem Licht in dem Aufmerksamkeitsblock emittiert werden kann, zu vergleichen, um festzustellen, ob in der Lichtmenge, die durch den Aufmerksamkeitsblock emittiert werden kann, ein erster Mangel vorhanden ist oder nicht, wobei das Vorhandensein eines ersten Mangels in dem Aufmerksamkeitsblock nur dann festgestellt wird, wenn der Lichtemissionspegel, der durch das Berechnungsmittel (101) für den erforderlichen Aufmerksamkeitsblocklichtemissionspegel für den Aufmerksamkeitsblock bereitgestellt wird, größer gleich dem erstgrößten Lichtemissionspegel ist,

ein Berechnungsmittel (103) für den erforderlichen Lichtemissionspegel für die ersten Nachbarschaftsblöcke, das, wenn das Vorhandensein eines ersten Mangels in dem Aufmerksamkeitsblock festgestellt wird, dazu ausgebildet ist, einen Lichtemissionspegel der ersten Nachbarschaftsblöcke als erforderlichen Lichtemissionspegel für die ersten Nachbarschaftsblöcke, um den ersten Mangel in dem Aufmerksamkeitsblock auszugleichen, zu berechnen basierend auf: dem erforderlichen Aufmerksamkeitsblocklichtemissionspegel, dem erstgrößten Lichtemissionspegel und einer Gesamtsumme von Beitragsmengen von diffundiertem Licht, das durch die Lichtemission in den ersten Nachbarschaftsblöcken bewirkt wird, zu dem Aufmerksamkeitsblock,

ein zweites Mangelfeststellungsmittel (105), das dazu ausgebildet ist, den erforderlichen Lichtemissionspegel für die ersten Nachbarschaftsblöcke, der durch das

Berechnungsmittel (103) für den erforderlichen Lichtemissionspegel für die ersten Nachbarschaftsblöcke bereitgestellt wird, mit einem zweitgrößten Lichtemissionspegel ( $L_{m2}$ ), auf dem Licht in den ersten Nachbarschaftsblöcken emittiert werden kann, zu vergleichen, um festzustellen, ob in der Lichtmenge, die durch die ersten Nachbarschaftsblöcke emittiert werden kann, ein zweiter Mangel vorhanden ist oder nicht, wobei das Vorhandensein eines zweiten Mangels in den ersten Nachbarschaftsblöcken nur dann festgestellt wird, wenn der erforderliche Lichtemissionspegel für die ersten Nachbarschaftsblöcke größer gleich dem zweitgrößten Lichtemissionspegel ( $L_{m2}$ ) ist, und

ein Hintergrundleuchtenlichtemissionssteuerungsmittel (111), das dazu ausgebildet ist, wenn in dem Aufmerksamkeitsblock das Vorhandensein eines ersten Mangels festgestellt wird, zu bewirken, dass die Hintergrundleuchte in dem Aufmerksamkeitsblock Licht auf dem erstgrößten Lichtemissionspegel emittiert und Hintergrundleuchten in den ersten Nachbarschaftsblöcken Licht auf dem erforderlichen Lichtemissionspegel für die ersten Nachbarschaftsblöcke emittieren,

**dadurch gekennzeichnet, dass:**

die Anzeigesteuerungseinheit ferner ein Berechnungsmittel (106) für den erforderlichen Lichtemissionspegel für die zweiten Nachbarschaftsblöcke umfasst, das,

wenn das Vorhandensein eines zweiten Mangels in den ersten Nachbarschaftsblöcken festgestellt wird, dazu ausgebildet ist, einen Lichtemissionspegel der zweiten Nachbarschaftsblöcke als erforderlichen Lichtemissionspegel für die zweiten Nachbarschaftsblöcke zu berechnen, um den zweiten Mangel durch eine Lichtemissionsbeitragsmenge zu dem Aufmerksamkeitsblock durch Lichtemission in den zweiten Nachbarschaftsblöcken auszugleichen, wobei der Lichtemissionspegel der zweiten Nachbarschaftsblöcke berechnet wird basierend auf: dem erforderlichen Aufmerksamkeitsblocklichtemissionspegel, dem erst- und dem zweitgrößten Lichtemissionspegel ( $L_{m1}$ ,  $L_{m2}$ ) und einer Gesamtsumme der Beitragsmengen von diffundiertem Licht, das durch die Lichtemission in den ersten und den zweiten Nachbarschaftsblöcken bewirkt wird, zu dem Aufmerksamkeitsblock, und

das Hintergrundleuchtenlichtemissionssteuerungsmittel (111) ferner dazu ausgebildet ist, wenn das Vorhandensein eines zweiten Mangels in den ersten Nachbarschaftsblöcken festgestellt wird, zu bewirken, dass die

Hintergrundleuchte in dem Aufmerksamkeitsblock und die Hintergrundleuchten in den ersten Nachbarschaftsblöcken das Licht auf den jeweiligen erst- und zweitgrößten Lichtemissionspegeln ( $L_{m1}$ ,  $L_{m2}$ ) emittieren und Hintergrundleuchten in den zweiten Nachbarschaftsblöcken das Licht auf dem erforderlichen Lichtemissionspegel für die zweiten Nachbarschaftsblöcke emittieren.

2. Anzeigevorrichtung nach Anspruch 1, wobei der Aufmerksamkeitsblock als Mittelpunkt der ersten Nachbarschaftsblöcke und als Mittelpunkt der zweiten Nachbarschaftsblöcke angeordnet ist.

3. Anzeigevorrichtung nach Anspruch 1 oder 2, ferner umfassend:

ein erstes Gewichtungsadditionsmittel (104), das dazu ausgebildet ist, eine Gewichtung bezüglich des Lichtemissionspegels der ersten Nachbarschaftsblöcke, der durch das Berechnungsmittel (103) für den erforderlichen Lichtemissionspegel für die ersten Nachbarschaftsblöcke berechnet wird, einzustellen, wobei sie einer Form des Lichts, das sich von dem Aufmerksamkeitsblock ausbreitet, entspricht.

4. Anzeigevorrichtung nach Anspruch 3, ferner umfassend:

ein zweites Gewichtungsadditionsmittel (107), das dazu ausgebildet ist, eine Gewichtung bezüglich des Lichtemissionspegels der zweiten Nachbarschaftsblöcke, der durch die Berechnungseinheit für den erforderlichen Lichtemissionspegel für die zweiten Nachbarschaftsblöcke berechnet wird, einzustellen, wobei sie der Form des Lichts, das sich von dem Aufmerksamkeitsblock ausbreitet, entspricht.

5. Anzeigesteuerungsverfahren zum Steuern einer Vielzahl von Hintergrundleuchten (61), die als Lichtquelle für einen Flüssigkristallschirm (85) dienen, wobei die Hintergrundleuchten aus einer Vielzahl von Blöcken zusammengesetzt sind, wobei die Vielzahl von Blöcken einen Aufmerksamkeitsblock, erste Nachbarschaftsblöcke, die dem Aufmerksamkeitsblock benachbart sind, und zweite Nachbarschaftsblöcke, die den ersten Nachbarschaftsblöcken benachbart sind und in einer fernereren Nachbarschaft des Aufmerksamkeitsblocks als die ersten Nachbarschaftsblöcke sind, umfasst, wobei das Anzeigesteuerungsverfahren umfasst:

einen Berechnungsschritt (S22) für den erforderlichen Aufmerksamkeitsblocklichtemissionspegel zum Berechnen eines Lichtemissionspegels in dem Aufmerksamkeitsblock als erforderlichen Aufmerksamkeitsblocklichtemissionspegel, der eine erforderliche Leuchtdichte des Aufmerksamkeitsblocks erfüllt, basierend auf einem Bildsignal,

einen Feststellschritt (S23) für einen ersten Mangel zum Vergleichen des Lichtemissionspegels für den Aufmerksamkeitsblock mit einem erstgrößten Lichtemissionspegel ( $L_{m1}$ ), auf dem Licht in dem Aufmerksamkeitsblock emittiert werden kann, um festzustellen, ob in der Lichtmenge, die durch den Aufmerksamkeitsblock emittiert werden kann, ein erster Mangel vorhanden ist oder nicht, wobei das Vorhandensein eines ersten Mangels in dem Aufmerksamkeitsblock nur dann festgestellt wird, wenn der Lichtemissionspegel für den Aufmerksamkeitsblock größer gleich dem erstgrößten Lichtemissionspegel für den Aufmerksamkeitsblock ist,

einen Berechnungsschritt (S24, S25) für den erforderlichen Lichtemissionspegel für die ersten Nachbarschaftsblöcke zum Berechnen, wenn das Vorhandensein eines ersten Mangels in dem Aufmerksamkeitsblock festgestellt wird, eines Lichtemissionspegels der ersten Nachbarschaftsblöcke als erforderlichen Lichtemissionspegel für die ersten Nachbarschaftsblöcke, um den ersten Mangel in dem Aufmerksamkeitsblock auszugleichen, basierend auf: dem erforderlichen Aufmerksamkeitsblocklichtemissionspegel, dem erstgrößten Lichtemissionspegel ( $L_{m1}$ ) und einer Gesamtsumme der Beitragsmengen von diffundiertem Licht, das durch die Lichtemission in den ersten Nachbarschaftsblöcken bewirkt wird, zu dem Aufmerksamkeitsblock,

einen Feststellschritt (S27) für einen zweiten Mangel zum Vergleichen des erforderlichen Lichtemissionspegels für die ersten Nachbarschaftsblöcke mit einem zweitgrößten Lichtemissionspegel ( $L_{m2}$ ), auf dem Licht in den ersten Nachbarschaftsblöcken emittiert werden kann, um festzustellen, ob in der Lichtmenge, die durch die ersten Nachbarschaftsblöcke emittiert werden kann, ein zweiter Mangel vorhanden ist oder nicht, wobei das Vorhandensein eines zweiten Mangels in den ersten Nachbarschaftsblöcken nur dann festgestellt wird, wenn der erforderliche Lichtemissionspegel für die ersten Nachbarschaftsblöcke größer gleich dem zweitgrößten Lichtemissionspegel ( $L_{m2}$ ) ist, und

einen ersten Hintergrundleuchtenlichtemissionssteuerungsschritt zum Bewirken, wenn in dem Aufmerksamkeitsblock das Vorhandensein eines ersten Mangels festgestellt wird, dass die Hintergrundleuchte in dem Aufmerksamkeitsblock das Licht auf dem erstgrößten Lichtemissionspegel emittiert und Hintergrundleuchten in den ersten Nachbarschaftsblöcken Licht auf dem erforderlichen Lichtemissionspegel für die ersten Nachbar-

schaftsblöcke emittieren,

**dadurch gekennzeichnet, dass** das Anzeigesteuerungsverfahren ferner umfasst:

einen Berechnungsschritt (S28, S29) für den erforderlichen Lichtemissionspegel für die zweiten Nachbarschaftsblöcke zum Berechnen, wenn das Vorhandensein eines zweiten Mangels in den ersten Nachbarschaftsblöcken festgestellt wird, eines Lichtemissionspegels der zweiten Nachbarschaftsblöcke als erforderlichen Lichtemissionspegel für die zweiten Nachbarschaftsblöcke, um den zweiten Mangel durch eine Lichtemissionsbeitragsmenge zu dem Aufmerksamkeitsblock durch Lichtemission in den zweiten Nachbarschaftsblöcken auszugleichen, wobei der Lichtemissionspegel der zweiten Nachbarschaftsblöcke berechnet wird basierend auf: dem erforderlichen Aufmerksamkeitsblocklichtemissionspegel, dem erst- und dem zweitgrößten Lichtemissionspegel (Lm1, Lm2) und einer Gesamtsumme der Beitragsmengen von diffundiertem Licht, das durch die Lichtemission in den ersten und den zweiten Nachbarschaftsblöcken bewirkt wird, zu dem Aufmerksamkeitsblock, und einen zweiten Hintergrundleuchtenlichtemissionssteuerungsschritt zum Bewirken, wenn das Vorhandensein eines zweiten Mangels in den ersten Nachbarschaftsblöcken festgestellt wird, dass die Hintergrundleuchte in dem Aufmerksamkeitsblock und die Hintergrundleuchten in den ersten Nachbarschaftsblöcken das Licht auf den jeweiligen erst- und zweitgrößten Lichtemissionspegeln (Lm1, Lm2) emittieren und Hintergrundleuchten in den zweiten Nachbarschaftsblöcken das Licht auf dem erforderlichen Lichtemissionspegel für die zweiten Nachbarschaftsblöcke emittieren.

6. Programm, umfassend Anweisungen zum Durchführen des Verfahrens nach Anspruch 5, wenn das Programm auf einem Rechner ausgeführt wird.

## Revendications

1. Appareil d'affichage (61) comprenant :

une pluralité de dispositifs de rétroéclairage (83) servant de source lumineuse à un panneau à cristaux liquides (85), lesdits dispositifs de rétroéclairage se composant d'une pluralité de blocs, la pluralité de blocs comprenant un bloc cible, des premiers blocs voisins, adjacents audit bloc cible et des seconds blocs voisins, adjacents auxdits premiers blocs voisins et se trouvant dans un voisinage du bloc cible plus éloigné que les premiers blocs voisins ; et

une unité de commande d'affichage (81) comprenant :

un moyen de calcul du niveau nécessaire d'émission de lumière du bloc cible (101), conçu pour calculer un niveau d'émission de lumière du bloc cible, en tant que niveau nécessaire d'émission de lumière du bloc cible répondant à une luminance nécessaire du bloc cible, sur la base d'un signal d'image ;

un moyen de détermination de première insuffisance (102) conçu pour comparer le niveau d'émission de lumière fourni par ledit moyen de calcul du niveau nécessaire d'émission de lumière du bloc cible (101) pour ledit bloc cible avec un premier niveau maximum d'émission de lumière (Lm1) auquel la lumière peut être émise dans le bloc cible pour déterminer la présence ou l'absence d'une première insuffisance de la quantité de lumière pouvant être émise par ledit bloc cible, dans lequel ladite présence d'une première insuffisance dans le bloc cible n'est déterminée que lorsque le niveau d'émission de lumière fourni par ledit moyen de calcul du niveau nécessaire d'émission de lumière du bloc cible (101) pour le bloc cible est supérieur ou égal audit premier niveau maximal d'émission de lumière ;

un moyen de calcul du niveau nécessaire d'émission de lumière des premiers blocs voisins (103), conçu pour calculer, lorsque ladite présence d'une première insuffisance est déterminée dans ledit bloc cible, un niveau d'émission de lumière des premiers blocs voisins, en tant que niveau nécessaire d'émission de lumière des premiers blocs voisins pour compenser ladite première insuffisance dans ledit bloc cible, sur la base : du niveau nécessaire d'émission de lumière du bloc cible, du premier niveau maximum d'émission de lumière et d'une somme totale de taux d'apport de lumière diffuse au bloc cible, causé par l'émission de lumière dans les premiers blocs voisins ;

un moyen de détermination de seconde insuffisance (105) conçu pour comparer le niveau nécessaire d'émission de lumière des premiers blocs voisins, fourni par ledit moyen de calcul du niveau d'émission de lumière des premiers blocs voisins (103) avec un second niveau maximum d'émission de lumière (Lm2) auquel la lumière peut être émise dans les premiers blocs voisins, pour déterminer la présence ou l'absence d'une seconde insuffisance de la quantité de lumière pouvant être émise par lesdits premiers blocs voisins,



dans lequel ladite présence d'une seconde insuffisance dans les premiers blocs voisins n'est déterminée que lorsque le niveau nécessaire d'émission de lumière des premiers blocs voisins est supérieur ou égal audit second niveau maximum d'émission de lumière (Lm2) ; et

un moyen de commande d'émission de lumière de rétroéclairage (111), conçu pour faire, lorsque la présence d'une première insuffisance est déterminée dans ledit bloc cible, que le dispositif de rétroéclairage du bloc cible émette de la lumière au premier niveau maximum d'émission de lumière et que les dispositifs de rétroéclairage des premiers blocs voisins émettent de la lumière au niveau nécessaire d'émission de lumière des premiers blocs voisins ;

**caractérisé en ce que :**

l'unité de commande d'affichage comprend en outre un moyen de calcul du niveau nécessaire d'émission de lumière des seconds blocs voisins (106), conçu pour calculer, lorsque ladite présence d'une seconde insuffisance est déterminée dans les premiers blocs voisins, un niveau d'émission de lumière des seconds blocs voisins en tant que niveau nécessaire d'émission de lumière des seconds blocs voisins pour compenser ladite seconde insuffisance par une quantité d'apport d'émission de lumière au bloc cible, au moyen de l'émission de lumière des seconds blocs voisins, le niveau d'émission de lumière des seconds blocs voisins étant calculé sur la base : du niveau nécessaire d'émission de lumière du bloc cible, des premier et second niveaux maxima d'émission de lumière (Lm1, Lm2) et d'une somme totale de taux d'apport de lumière diffuse au bloc cible, causé par l'émission de lumière dans les premiers et seconds blocs voisins ; et

le moyen de commande d'émission de lumière de rétroéclairage (111) est conçu en outre pour faire, lorsque la présence d'une seconde insuffisance est déterminée dans lesdits premiers blocs voisins, que le dispositif de rétroéclairage du bloc cible et les dispositifs de rétroéclairage des premiers blocs voisins émettent la lumière aux premier et second niveaux maxima respectifs d'émission de lumière (Lm1, Lm2) et que les dispositifs de rétroéclairage des seconds blocs voisins émettent la lumière au niveau nécessaire d'émission de lumière pour les seconds blocs voisins.

**2.** Appareil d'affichage selon la revendication 1, dans lequel le bloc cible est défini comme centre desdits premiers blocs voisins et comme centre desdits seconds blocs voisins.

**3.** Appareil d'affichage selon la revendication 1 ou 2, comprenant en outre :

un premier moyen de contribution de facteur de pondération (104) conçu pour établir un facteur de pondération du niveau d'émission de lumière des premiers blocs voisins, facteur de pondération qui est calculé par le moyen de calcul du niveau nécessaire d'émission de lumière des premiers blocs voisins (103), en fonction d'une forme de la lumière diffusée à partir du bloc cible.

**4.** Appareil d'affichage selon la revendication 3, comprenant en outre :

un second moyen de contribution de facteur de pondération (107) conçu pour établir un facteur de pondération du niveau d'émission de lumière des seconds blocs voisins, facteur de pondération qui est calculé par l'unité de calcul du niveau nécessaire d'émission de lumière des seconds blocs voisins, en fonction de la forme de la lumière diffusée à partir du bloc cible.

**5.** Procédé de commande d'affichage pour commander une pluralité de dispositifs de rétroéclairage (61) servant de source lumineuse à un panneau à cristaux liquides (85), dans lequel lesdits dispositifs de rétroéclairage se composent d'une pluralité de blocs, la pluralité de blocs comprenant un bloc cible, des premiers blocs voisins, adjacents audit bloc cible, et des seconds blocs voisins, adjacents auxdits premiers blocs voisins et se trouvant dans un voisinage du bloc cible plus éloigné que les premiers blocs voisins, ledit procédé de commande d'affichage comprenant :

une étape de calcul du niveau nécessaire d'émission de lumière du bloc cible (S22) consistant à calculer un niveau d'émission de lumière du bloc cible en tant que niveau nécessaire d'émission de lumière du bloc cible répondant à une luminance nécessaire du bloc cible, sur la base d'un signal d'image ;

une étape de détermination d'une première insuffisance (S23) consistant à comparer le niveau d'émission de lumière dudit bloc cible avec un premier niveau maximum d'émission de lumière (Lm1) auquel la lumière peut être émise dans le bloc cible pour déterminer la présence ou l'absence d'une première insuffisance de la quantité de lumière pouvant être émise par ledit bloc cible, dans lequel ladite présence d'une première insuffisance dans le bloc cible n'est déterminée que lorsque ledit niveau d'émission de lumière du bloc cible est supérieur ou égal

audit premier niveau maximal d'émission de lumière du bloc cible;

une étape de calcul du niveau nécessaire d'émission de lumière des premiers blocs voisins (S24, S25), consistant à calculer, lorsque ladite présence d'une première insuffisance est déterminée dans ledit bloc cible, un niveau d'émission de lumière des premiers blocs voisins, en tant que niveau nécessaire d'émission de lumière des premiers blocs voisins pour compenser ladite première insuffisance dans ledit bloc cible, sur la base : du niveau nécessaire d'émission de lumière du bloc cible, du premier niveau maximum d'émission de lumière (Lm1) et d'une somme totale de taux d'apport de lumière diffuse au bloc cible, causé par l'émission de lumière dans les premiers blocs voisins ;

une étape de détermination d'une seconde insuffisance (S27) consistant à comparer le niveau nécessaire d'émission de lumière des premiers blocs voisins avec un second niveau maximum d'émission de lumière (Lm2) auquel la lumière peut être émise dans les premiers blocs voisins, pour déterminer la présence ou l'absence d'une seconde insuffisance de la quantité de lumière pouvant être émise par lesdits premiers blocs voisins, dans lequel ladite présence d'une seconde insuffisance dans les premiers blocs voisins n'est déterminée que lorsque le niveau nécessaire d'émission de lumière des premiers blocs voisins est supérieur ou égal audit second niveau maximum d'émission de lumière (Lm2) ; et

une étape de première commande d'émission de lumière de rétroéclairage consistant, lorsque ladite présence d'une première insuffisance est déterminée dans ledit bloc cible, à faire que le dispositif de rétroéclairage du bloc cible émette la lumière au premier niveau maximum d'émission de lumière et que les dispositifs de rétroéclairage des premiers blocs voisins émettent la lumière au niveau nécessaire d'émission de lumière des premiers blocs voisins ;

**caractérisé en ce que** le procédé de commande d'affichage comprend en outre :

une étape de calcul du niveau nécessaire d'émission de lumière des seconds blocs voisins (S28, S29) consistant à calculer, lorsque ladite présence d'une seconde insuffisance est déterminée dans les premiers blocs voisins, un niveau d'émission de lumière des seconds blocs voisins en tant que niveau nécessaire d'émission de lumière des seconds blocs voisins pour compenser ladite seconde insuffisance par une quantité d'apport d'émission de lumière au bloc cible, au moyen de l'émission de lumière des seconds blocs voisins, le niveau d'émission de lumière des seconds blocs voisins étant calculé sur la base : du niveau nécessaire d'émission de lumière du bloc cible, des premier et second niveaux maxima d'émission de lumière (Lm1, Lm2) et d'une somme totale de taux d'apport de lumière diffuse au bloc cible, causé par l'émission de lumière dans les premiers et seconds blocs voisins ; et

une étape de seconde commande d'émission de lumière de rétroéclairage consistant, lorsque ladite présence d'une seconde insuffisance est déterminée dans lesdits premiers blocs voisins, à faire que le dispositif de rétroéclairage du bloc cible et les dispositifs de rétroéclairage des premiers blocs voisins émettent la lumière aux premier et second niveaux maxima respectifs d'émission de lumière (Lm1, Lm2) et que les dispositifs de rétroéclairage des seconds blocs voisins émettent la lumière au niveau nécessaire d'émission de lumière des seconds blocs voisins.

- 6.** Programme comprenant des instructions destinées à mettre en oeuvre le procédé selon la revendication 5, lorsque ledit programme est exécuté sur un ordinateur.

FIG. 1

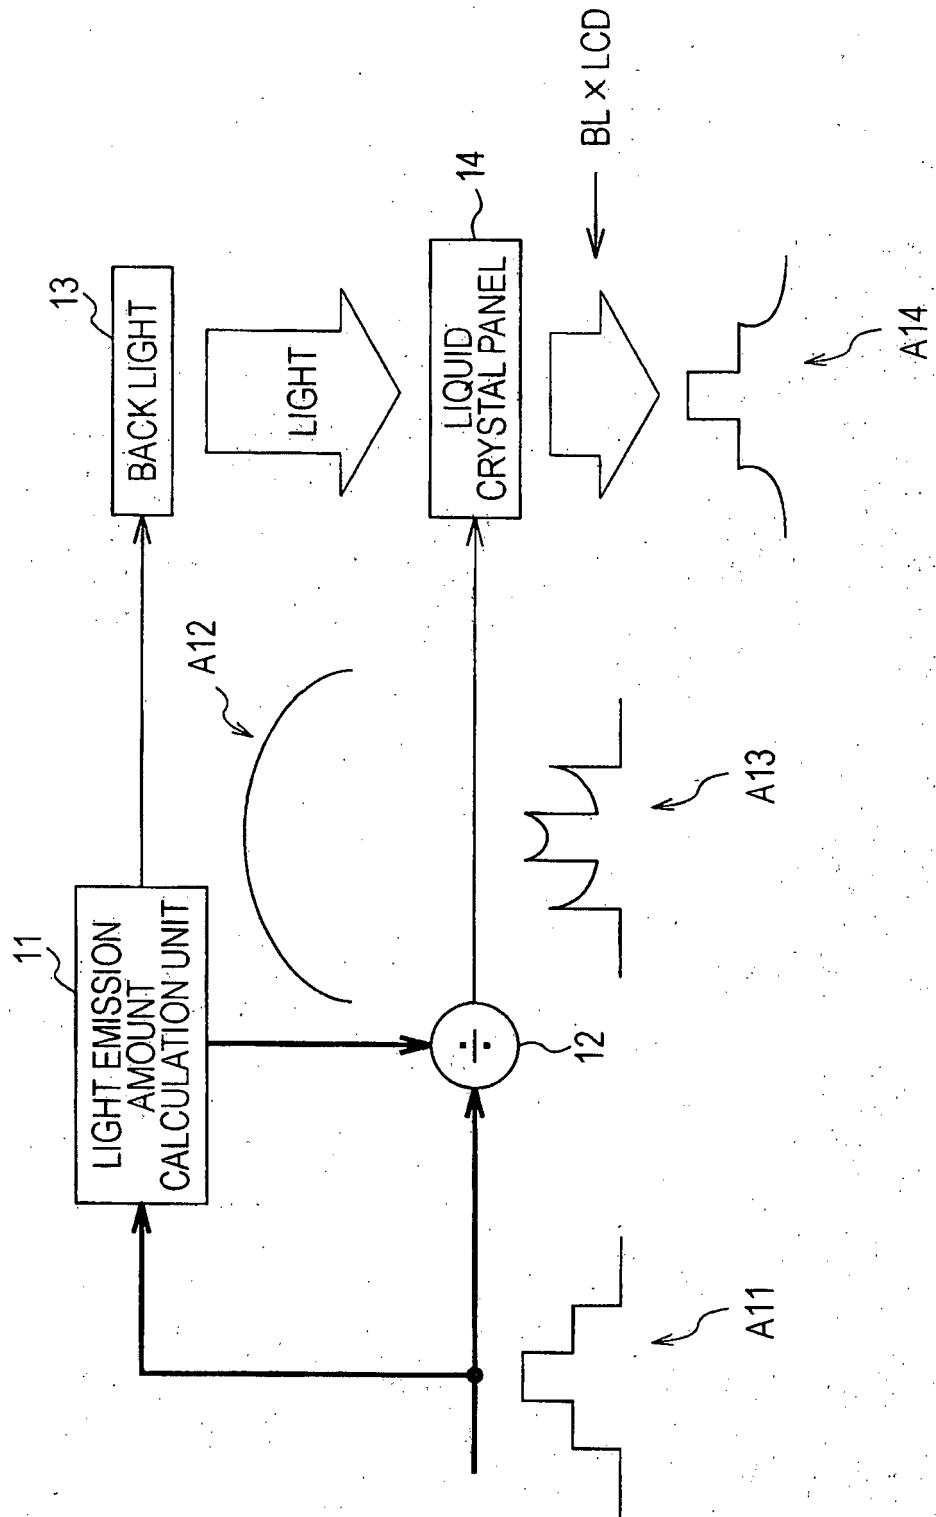


FIG. 2

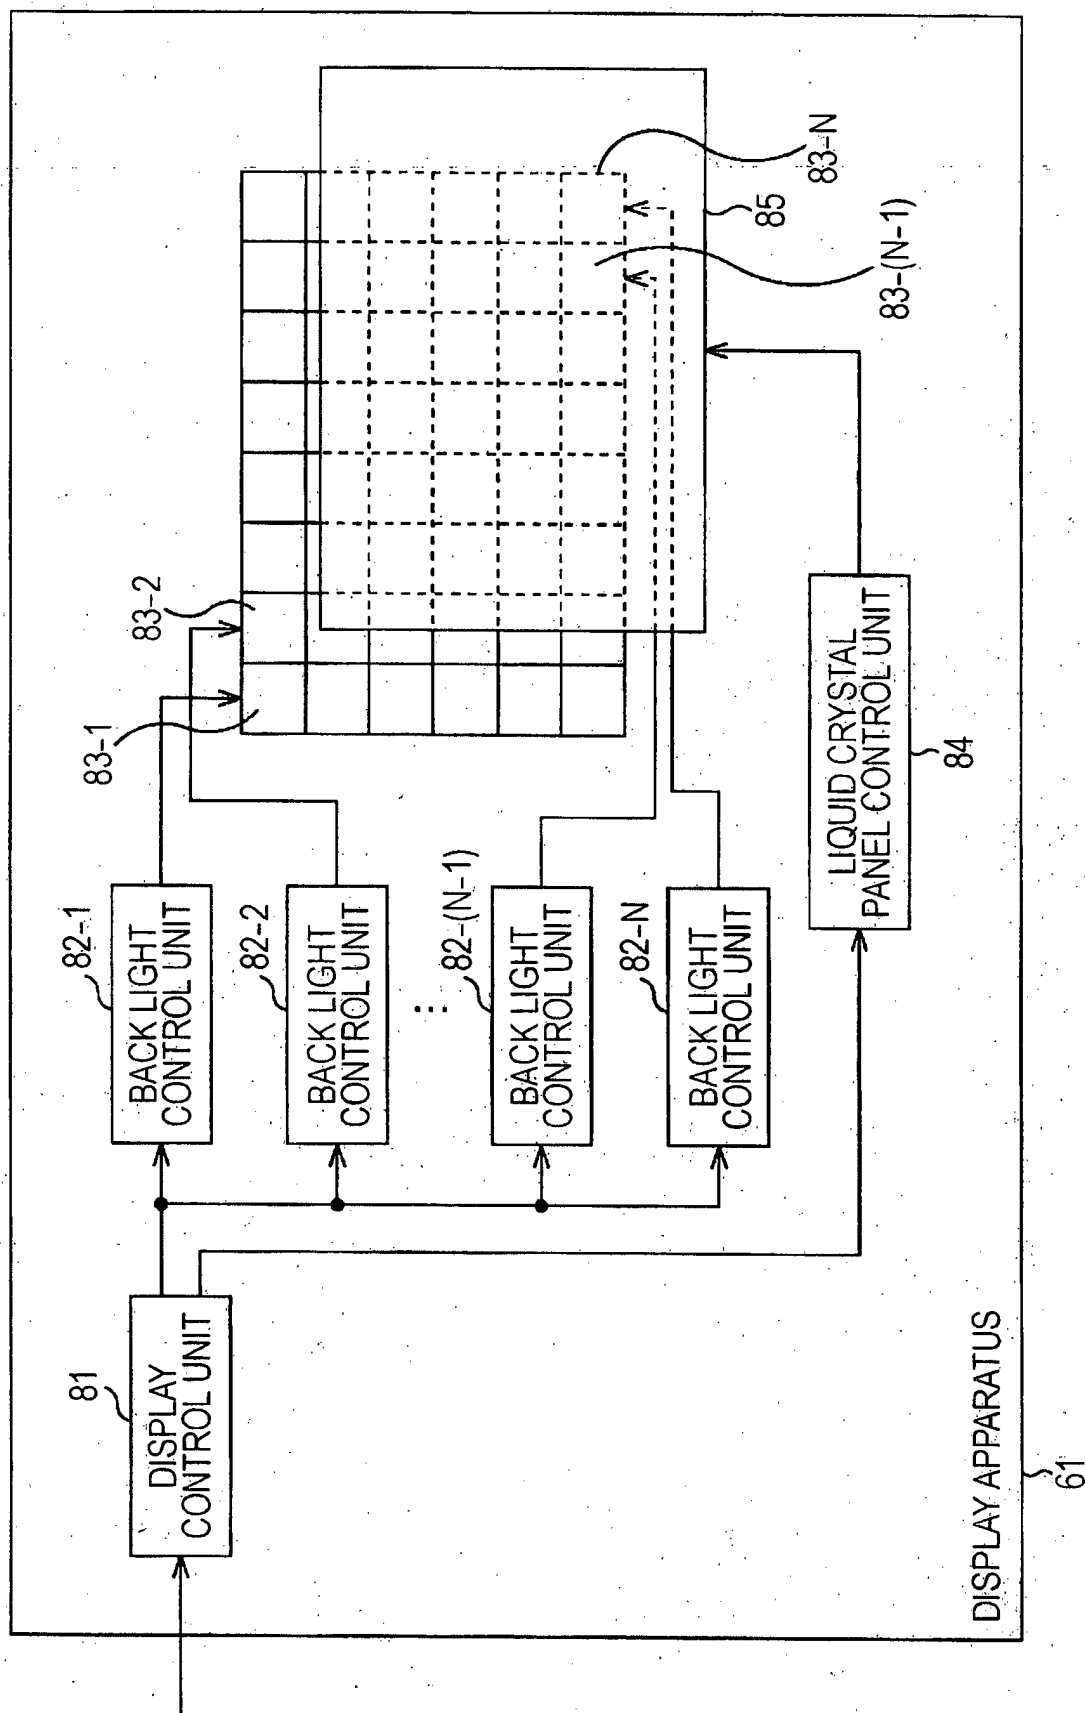


FIG. 3

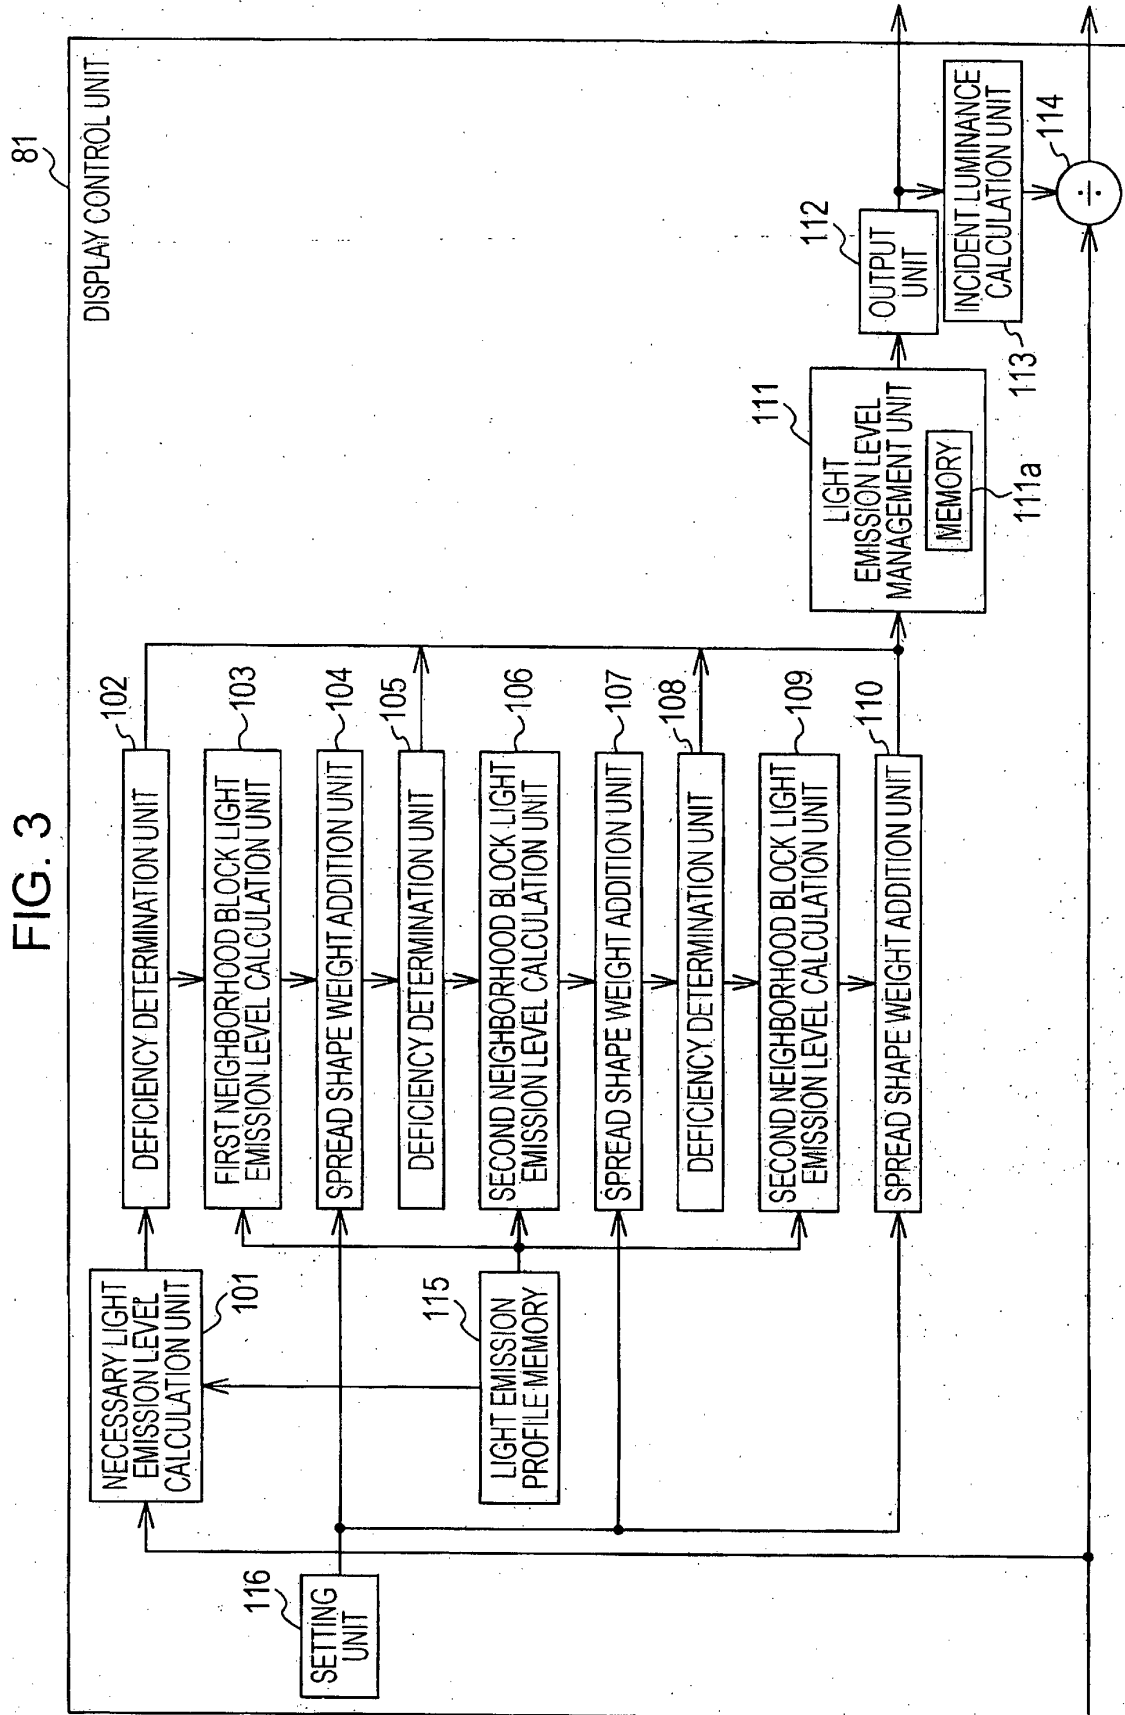


FIG. 4

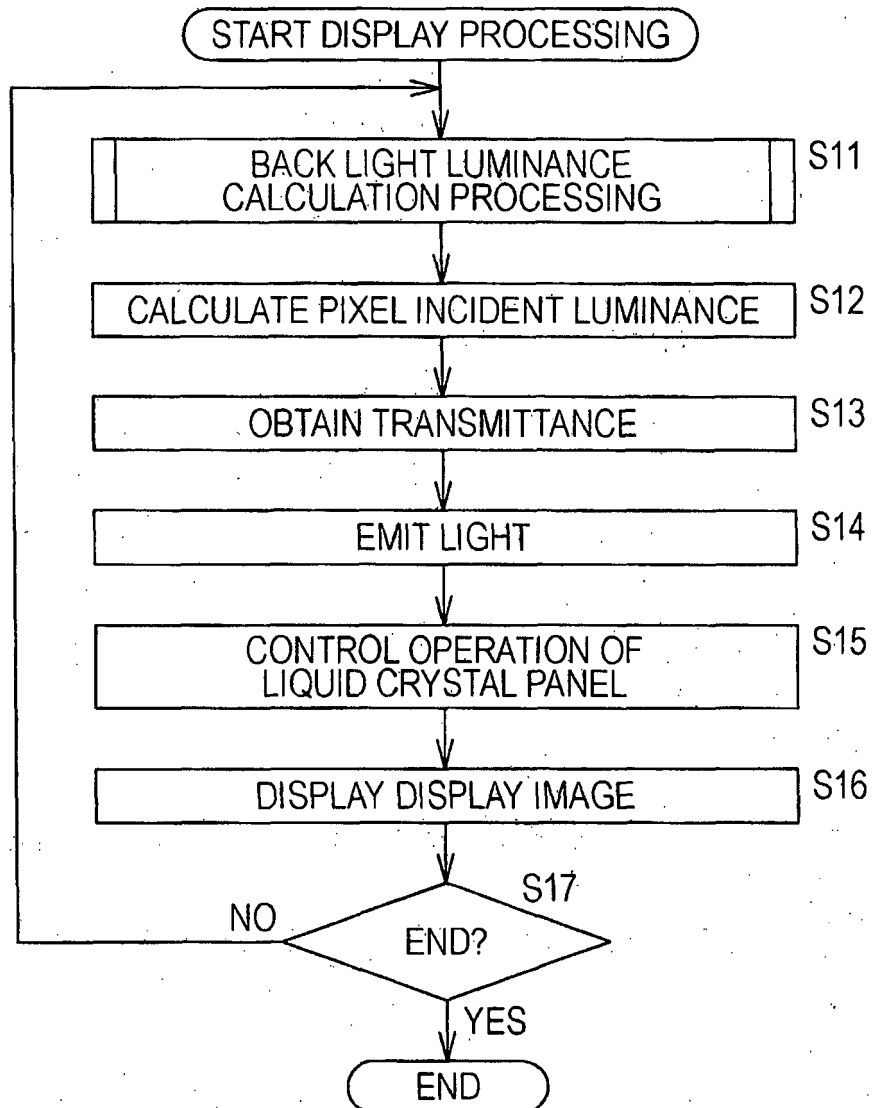


FIG. 5

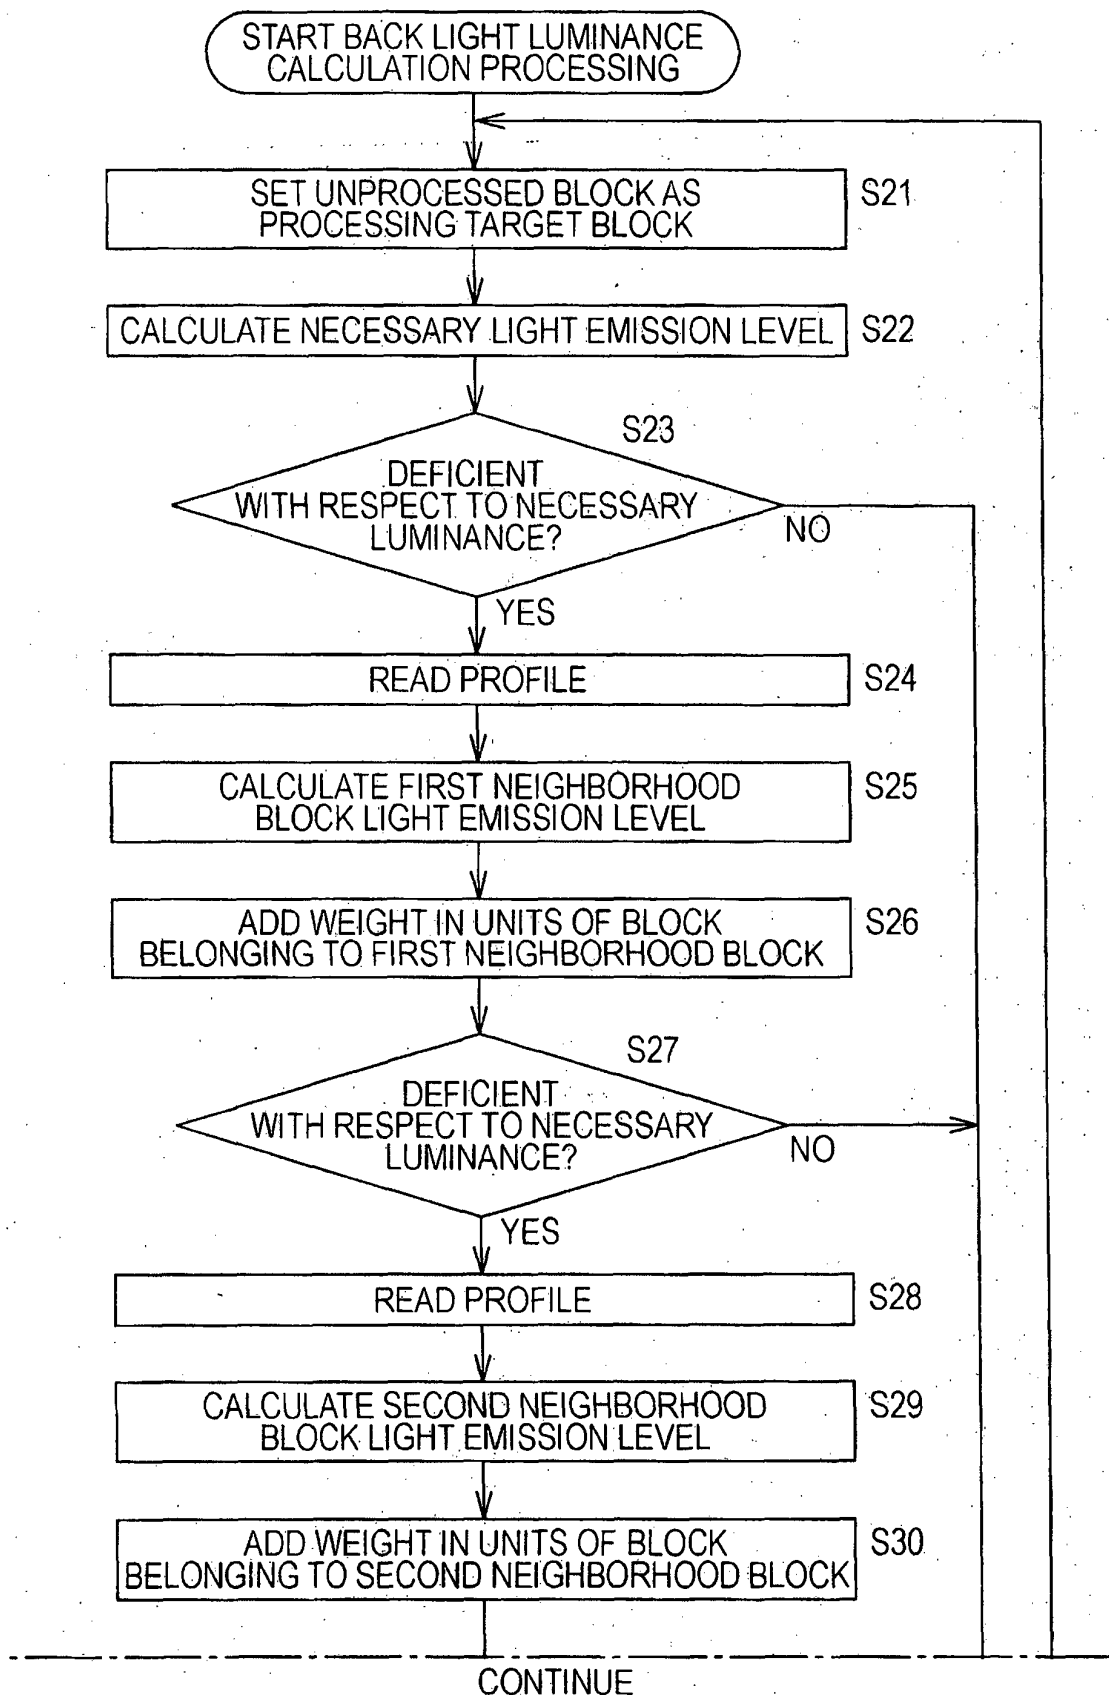


FIG.5 CONTINUED

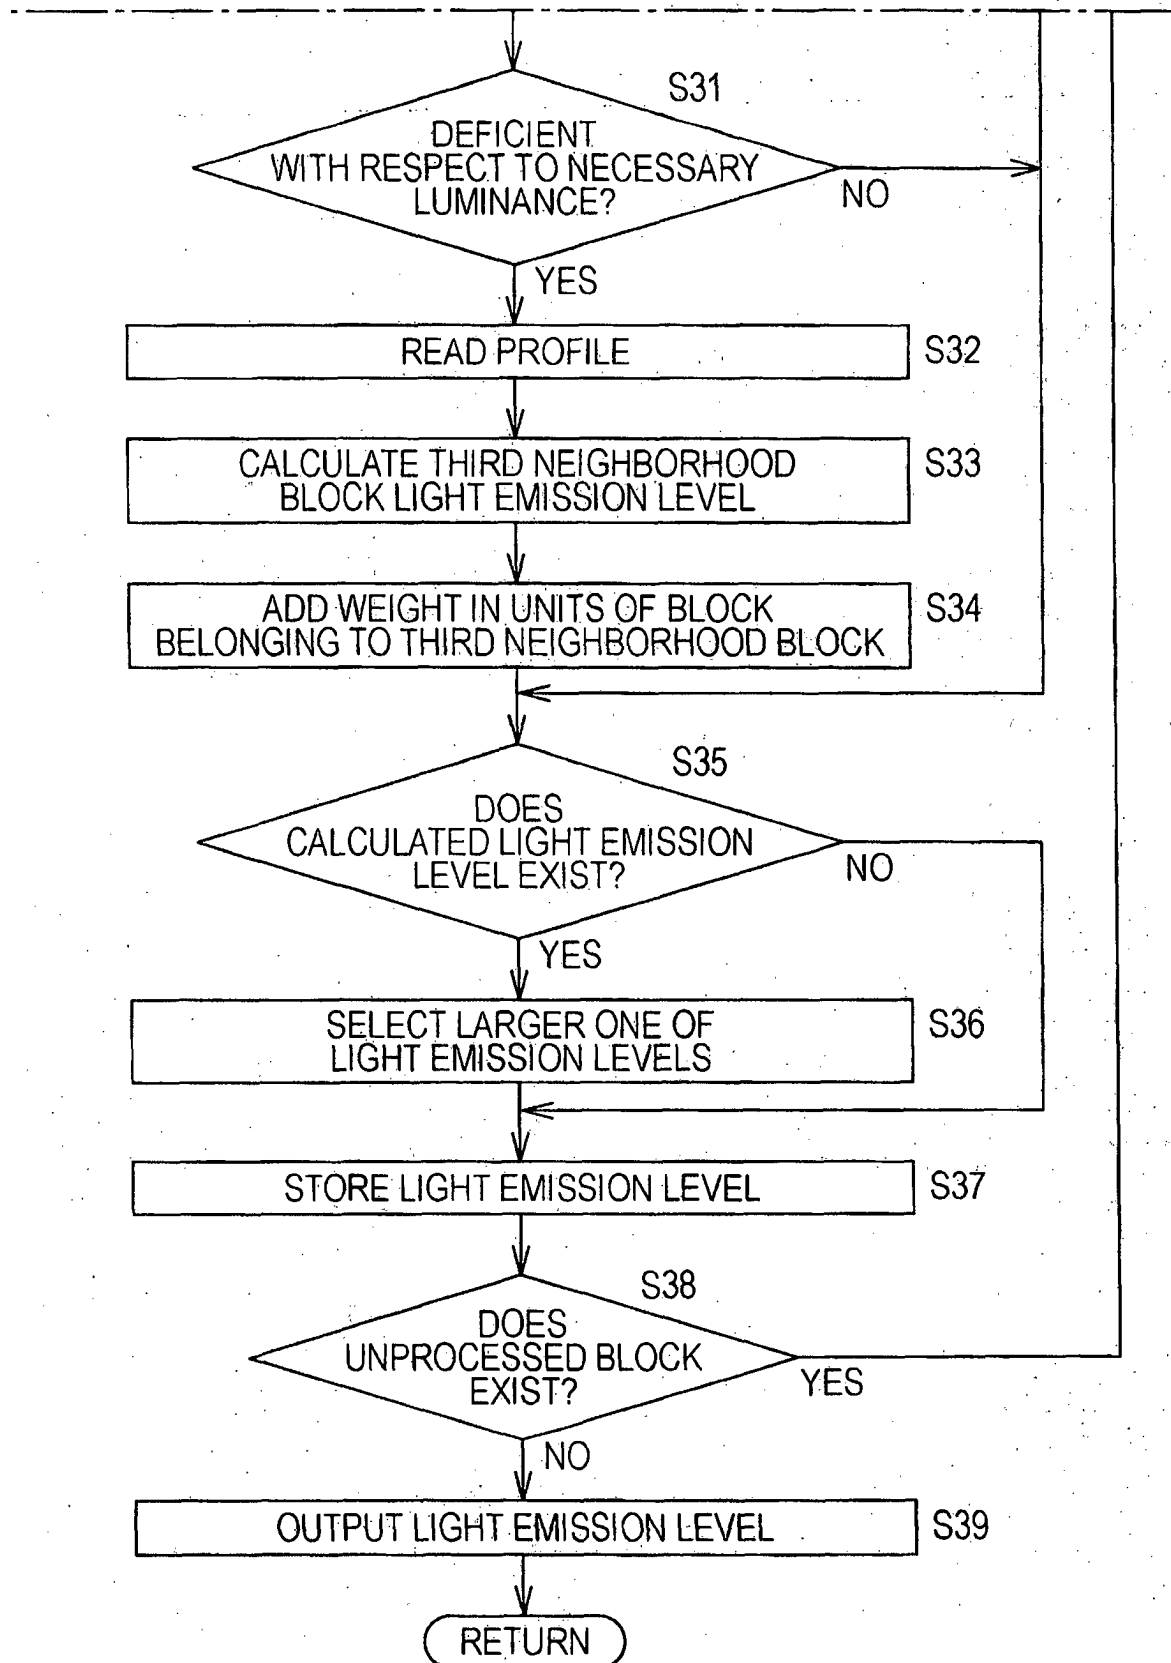




FIG. 6

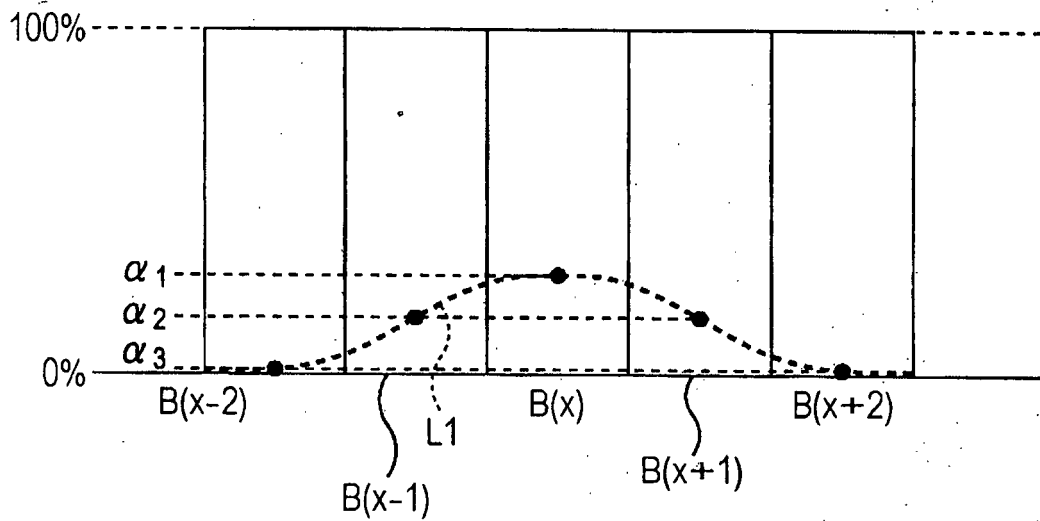


FIG. 7

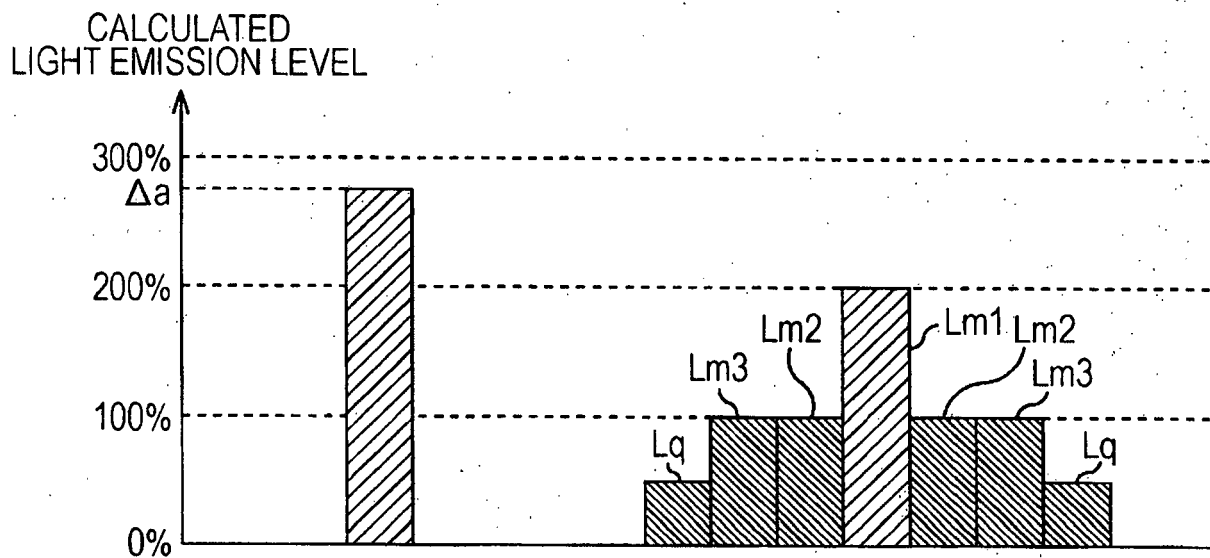


FIG. 8

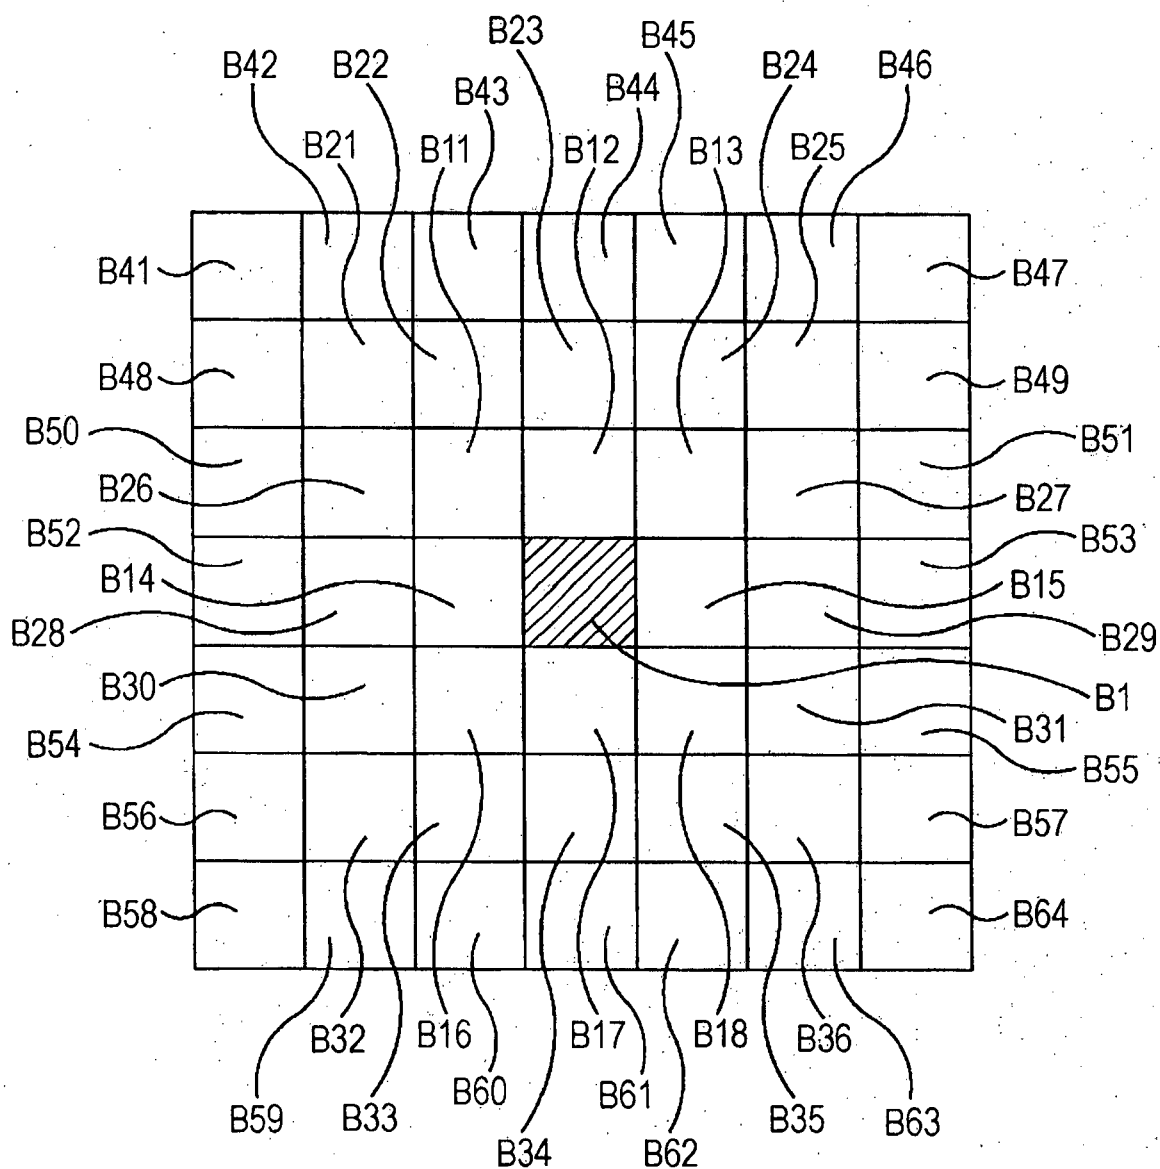


FIG. 9


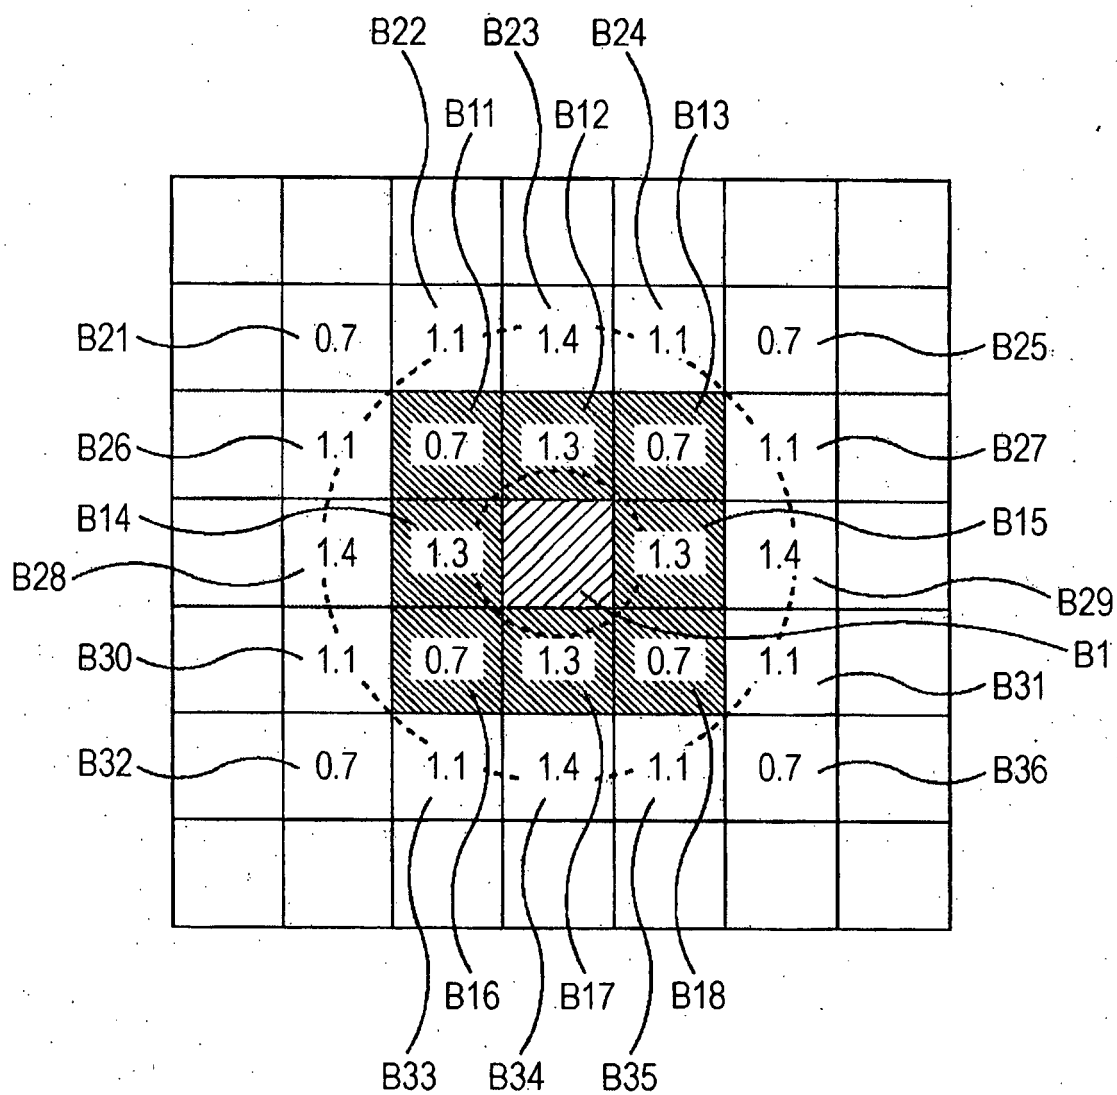


FIG. 10

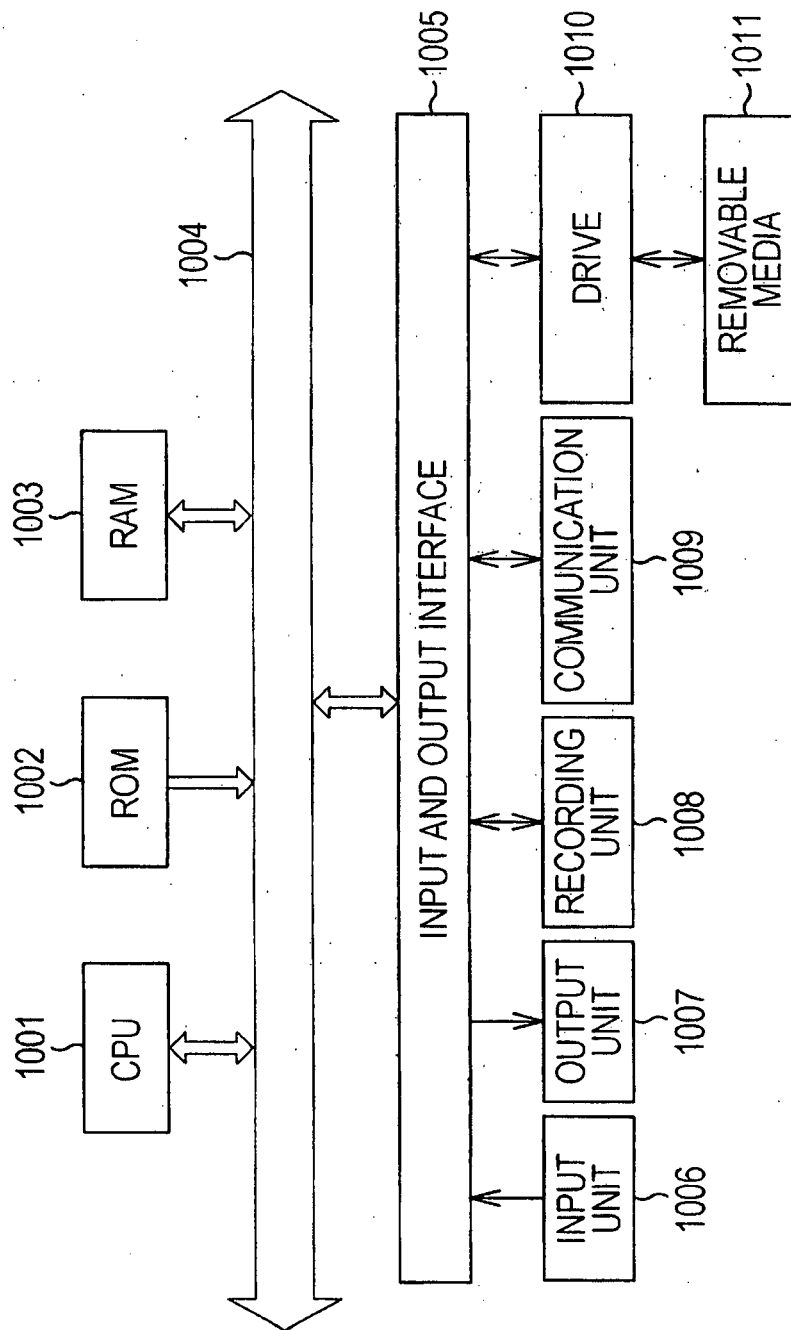

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 2007322901 A [0008]
- US 2006087486 A1 [0009]
- EP 1788550 A1 [0010]
- EP 1705636 A1 [0011]
- WO 03077013 A2 [0012]
- US 2001035853 A1 [0013]

|                |                                                                           |         |            |
|----------------|---------------------------------------------------------------------------|---------|------------|
| 专利名称(译)        | 显示控制设备和方法 and 程序                                                          |         |            |
| 公开(公告)号        | <a href="#">EP2290434B1</a>                                               | 公开(公告)日 | 2016-11-23 |
| 申请号            | EP2009731168                                                              | 申请日     | 2009-04-10 |
| [标]申请(专利权)人(译) | 索尼公司                                                                      |         |            |
| 申请(专利权)人(译)    | 索尼公司                                                                      |         |            |
| 当前申请(专利权)人(译)  | 索尼公司                                                                      |         |            |
| [标]发明人         | HIRAMATSU TAKESHI<br>ASANO MITSUYASU<br>INADA TETSUJI<br>NISHIDA KOJI     |         |            |
| 发明人            | HIRAMATSU, TAKESHI<br>ASANO, MITSUYASU<br>INADA, TETSUJI<br>NISHIDA, KOJI |         |            |
| IPC分类号         | G02F1/133 G02F1/13357 G09G3/20 G09G3/34 G09G3/36 H04N5/66                 |         |            |
| CPC分类号         | G09G3/3426 G09G2320/0646 G09G2360/16                                      |         |            |
| 优先权            | 2008103389 2008-04-11 JP                                                  |         |            |
| 其他公开文献         | EP2290434A1<br>EP2290434A4                                                |         |            |
| 外部链接           | <a href="#">Espacenet</a>                                                 |         |            |

#### 摘要(译)

显示控制装置和方法以及程序技术领域本发明涉及一种显示控制装置和方法，以及可以抑制背光的亮度不足的程序。整个背光被分成N个显示区域（块）（B1-BN）。必要的发光水平计算单元（101）基于图像信号计算满足必要亮度的关注块中的背光的必要关注块发光水平。第一邻域块发光水平计算单元（103）在亮度不足于在注意块中的背光可以发光的最大发光水平的情况下，计算第一发光水平通过注意块的第一邻域块中的光发射，通过对注意块的发光贡献量来满足关注块的亮度不足的邻域块，其满足关注块中的背光的不足亮度。注意块中的背光以可以发射光的最大发光水平发射光，并且第一邻域区块中的后照光以第一邻近区块发光水平发射光。本发明可以应用于利用透射型液晶面板的液晶显示装置。

$$\text{The transmittance } T = \frac{\text{(the luminance } IL \text{ of the pixel of the display image)}}{\text{(the pixel incident luminance } CL)}$$

“(1)”