



US 20080001901A1

(19) **United States**(12) **Patent Application Publication**
Lee(10) **Pub. No.: US 2008/0001901 A1**(43) **Pub. Date: Jan. 3, 2008**(54) **LIQUID CRYSTAL PANEL, DATA DRIVER,
LIQUID CRYSTAL DISPLAY DEVICE
HAVING THE SAME AND DRIVING
METHOD THEREOF****Publication Classification**(51) **Int. Cl.**
G09G 3/36

(2006.01)

(52) **U.S. Cl. 345/100**(76) **Inventor: Ju Young Lee, Gumi-si (KR)**(57) **ABSTRACT**


Correspondence Address:

MCKENNA LONG & ALDRIDGE LLP**Song K. Jung****1900 K Street, N.W.****Washington, DC 20006**

A liquid crystal display panel includes a plurality of gate lines; a plurality of first data lines and a plurality of second data lines crossing the gate lines; and a plurality of pixels defined by crossings of a plurality of gate lines with a plurality of first data lines and a plurality of second data lines, wherein each of the pixels includes: a first thin film transistor connected to a gate line and one of the first data line; a second thin film transistor connected to one of the gate lines and one of the second data lines; and a liquid crystal cell connected to the first and second thin film transistors that drive the liquid crystal cell using a potential difference between first and second data voltages supplied to the one of the first data lines and the one of the second data lines.

(21) **Appl. No.: 11/638,390**(22) **Filed: Dec. 14, 2006**(30) **Foreign Application Priority Data**

Jun. 29, 2006 (KR) 10-2006-0059214

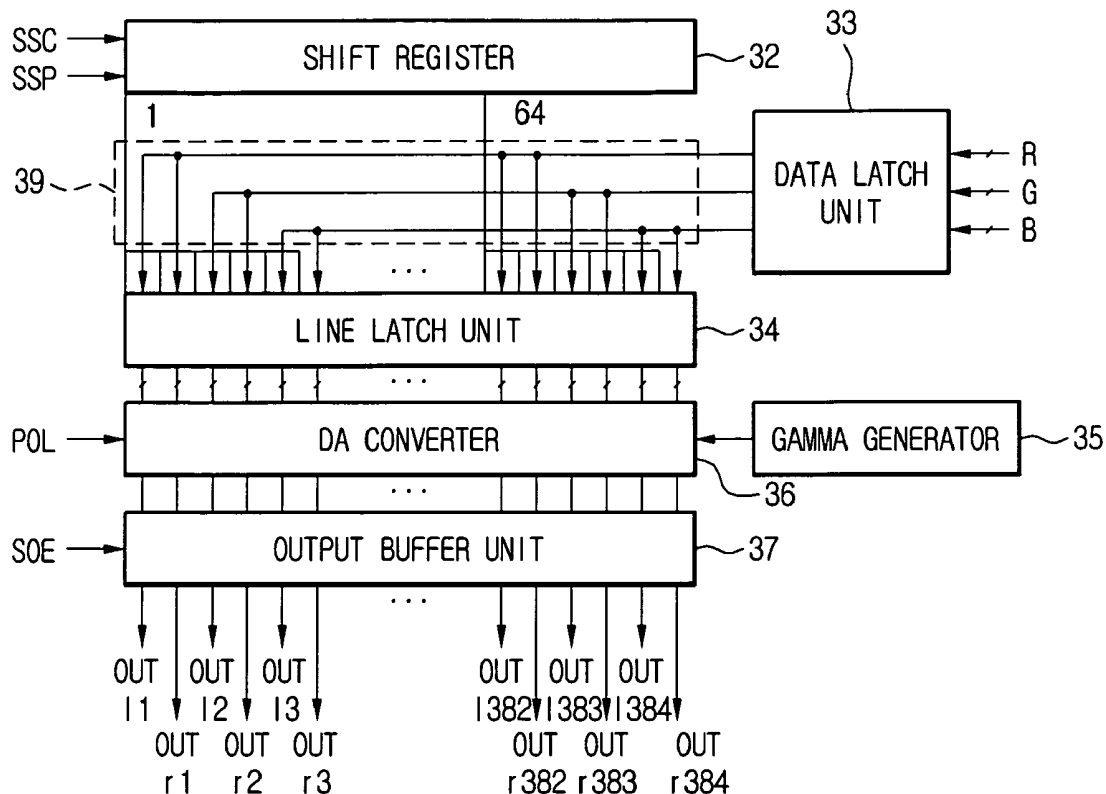30

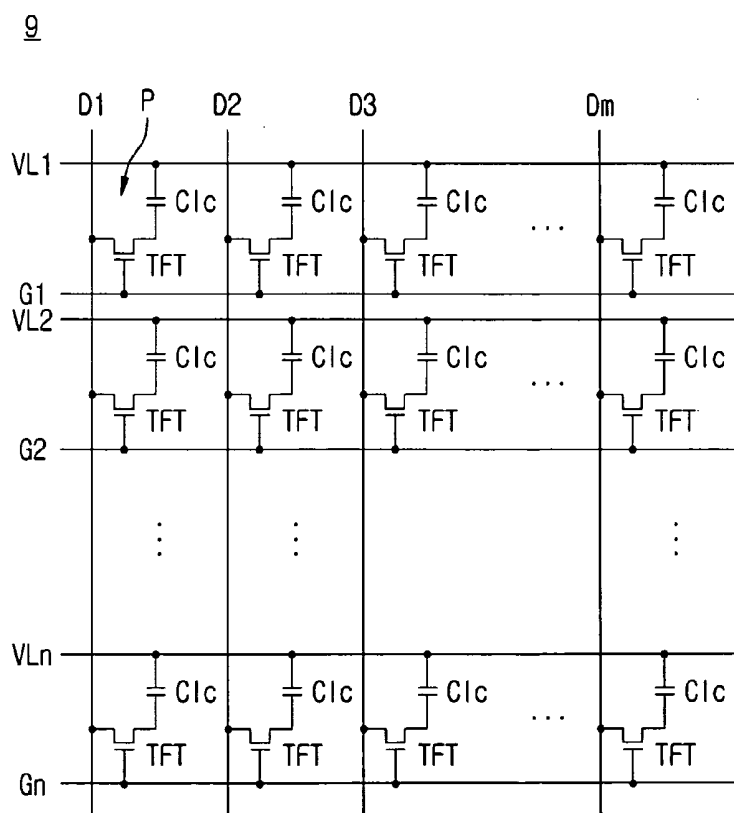


FIG. 3 (RELATED ART)

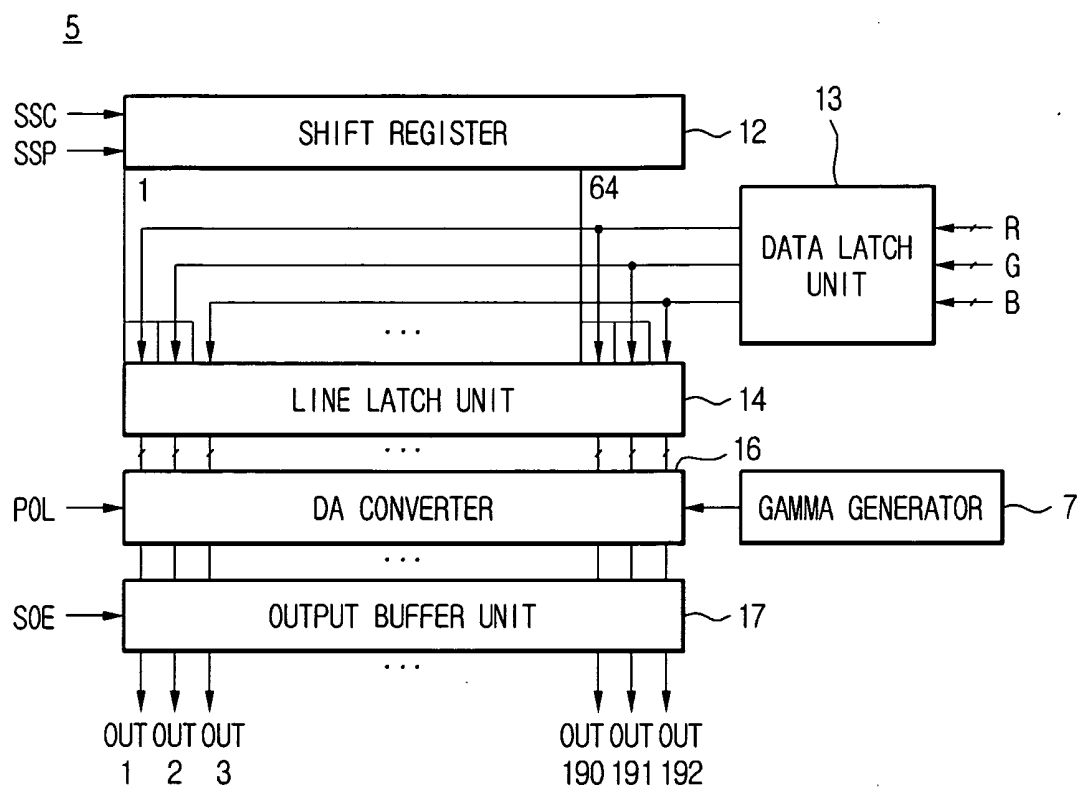


FIG. 4

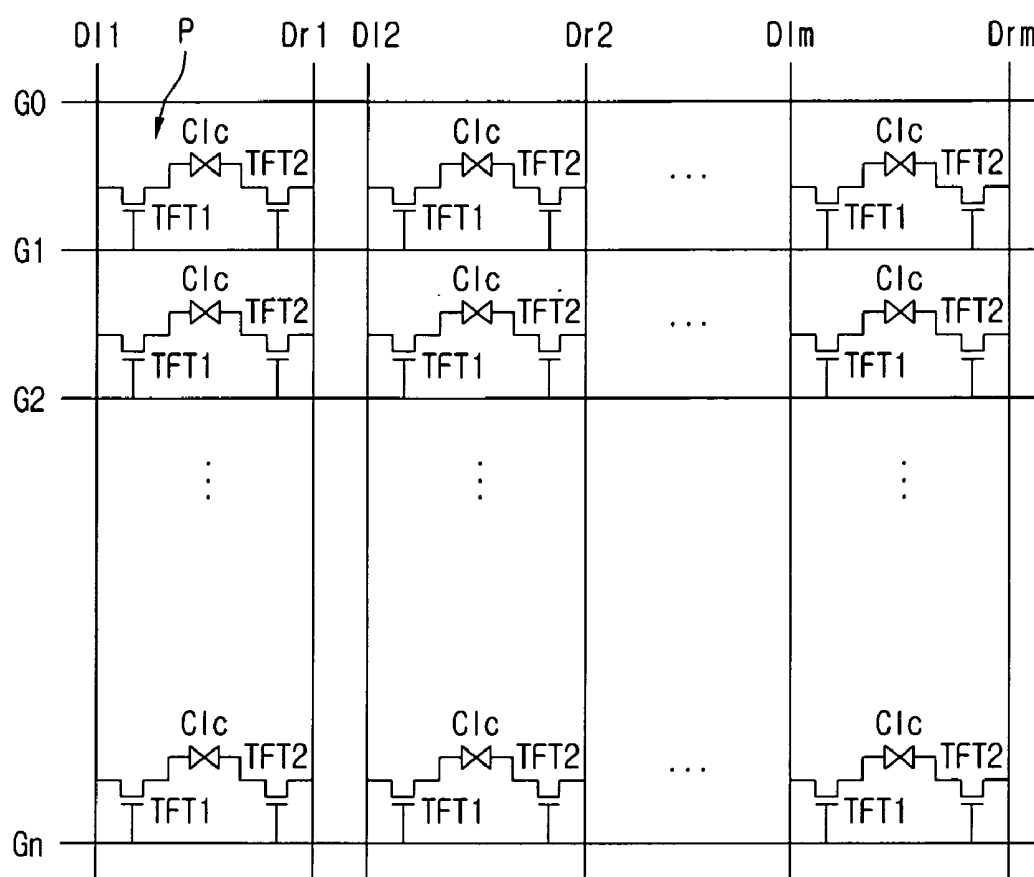
66

FIG. 5

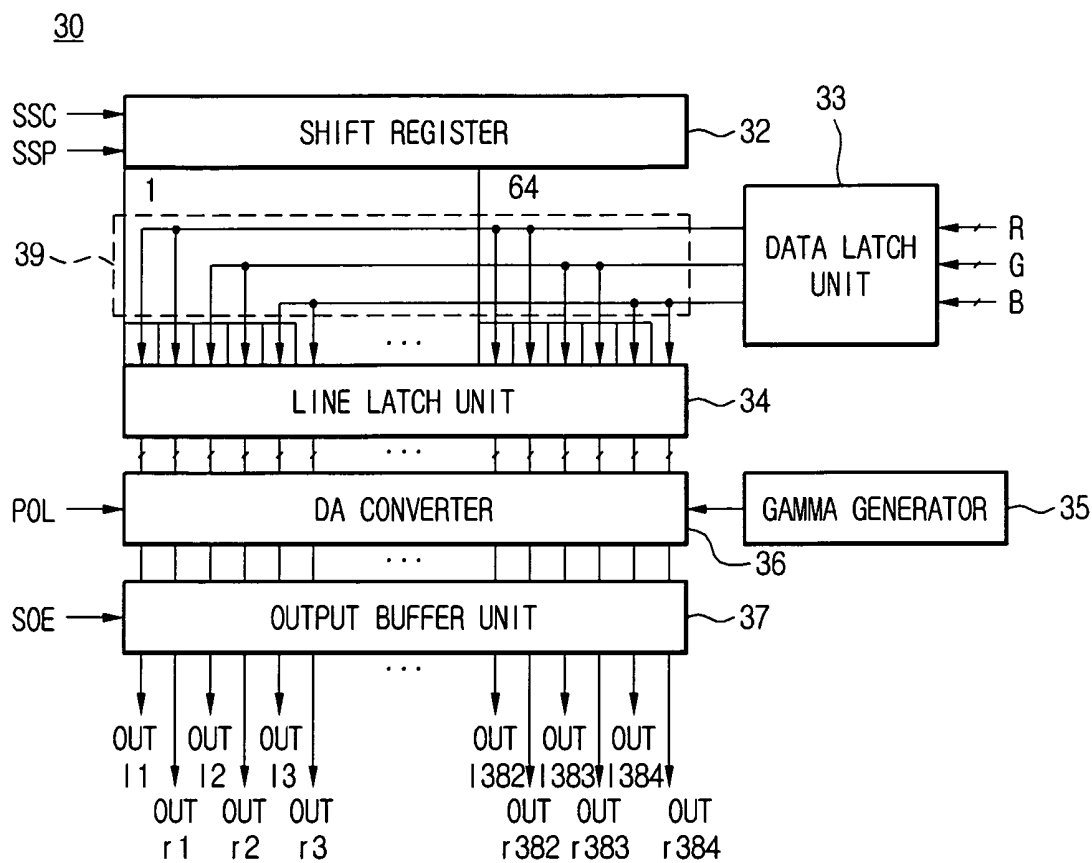


FIG. 6

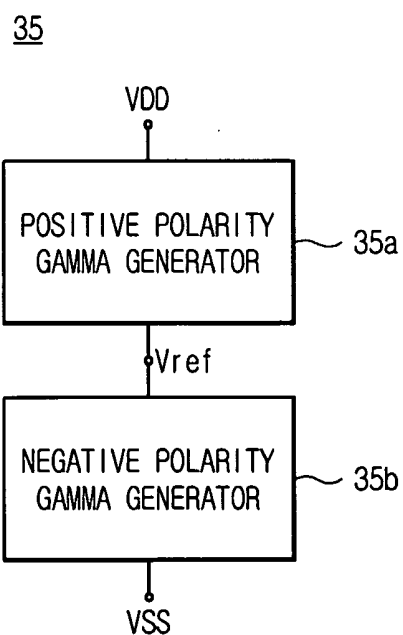


FIG. 7

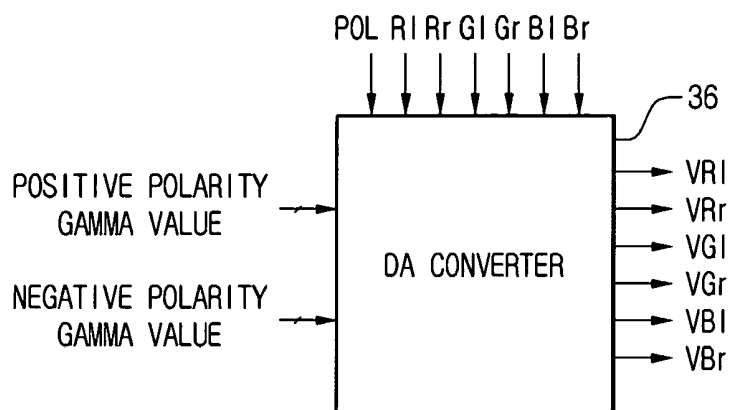


FIG. 8

36

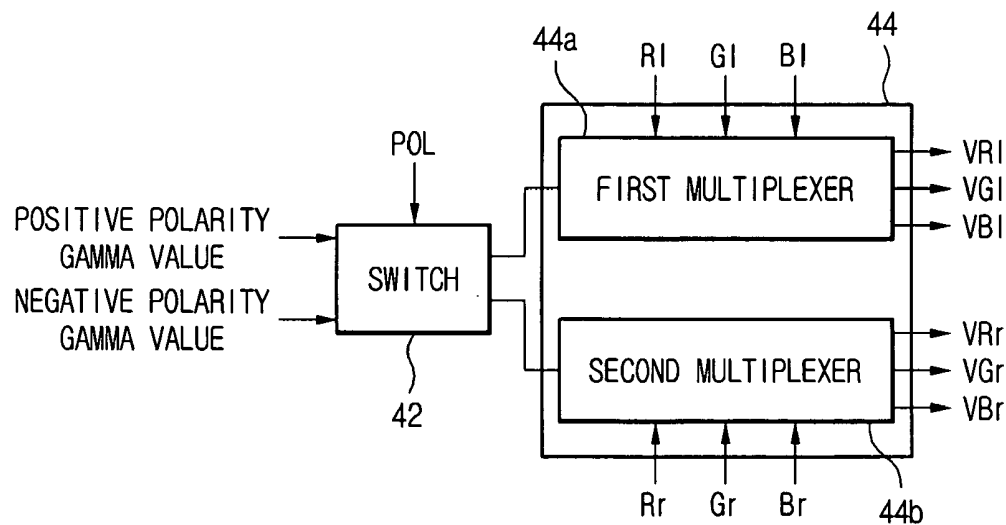


FIG. 9

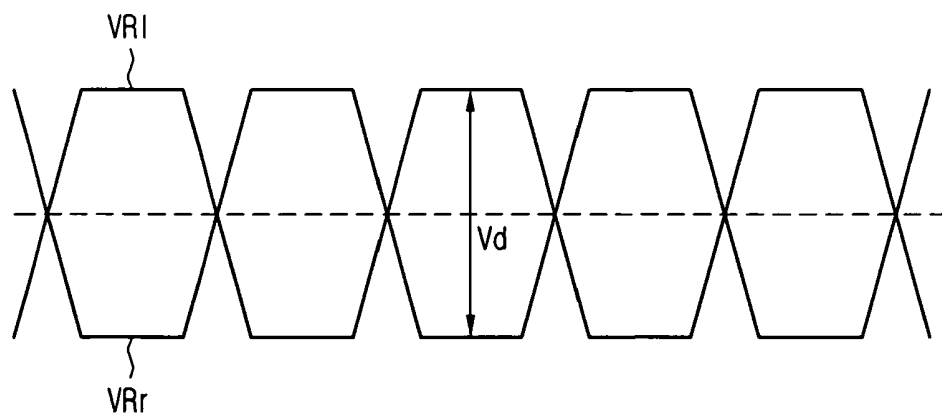


FIG. 10


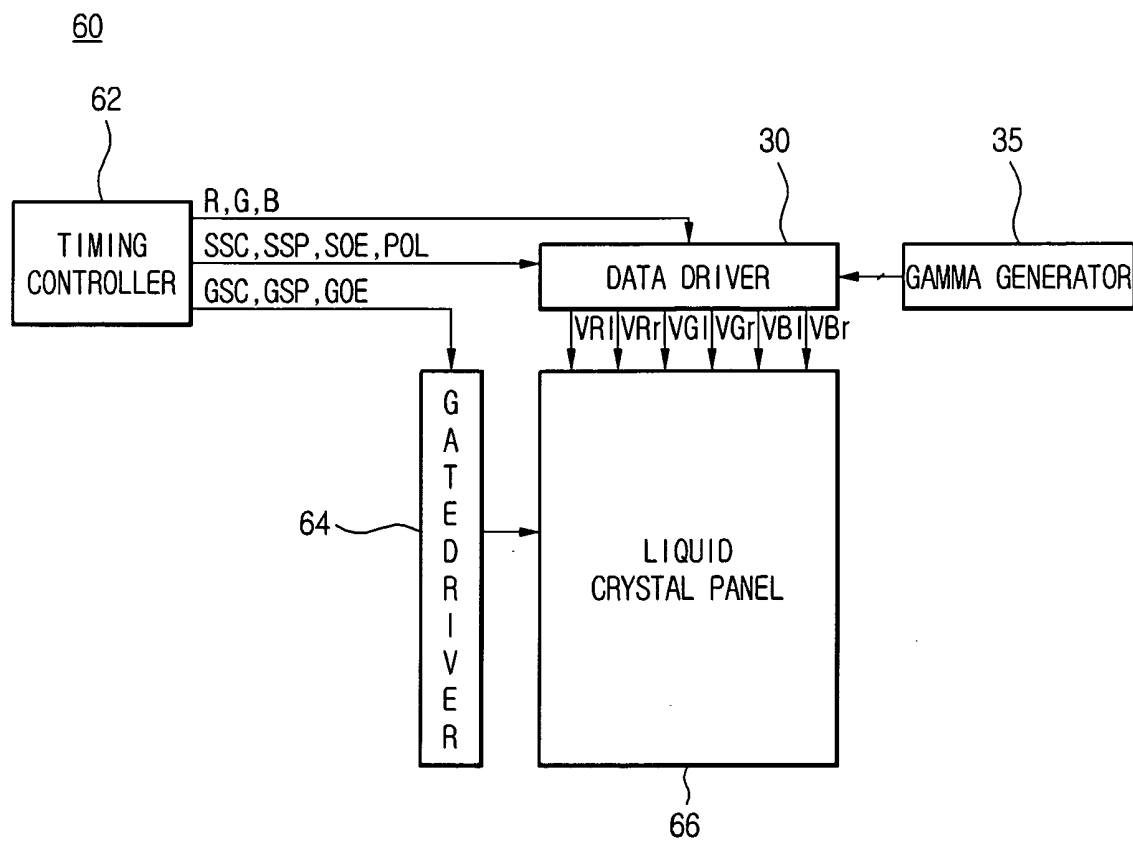


FIG. 11

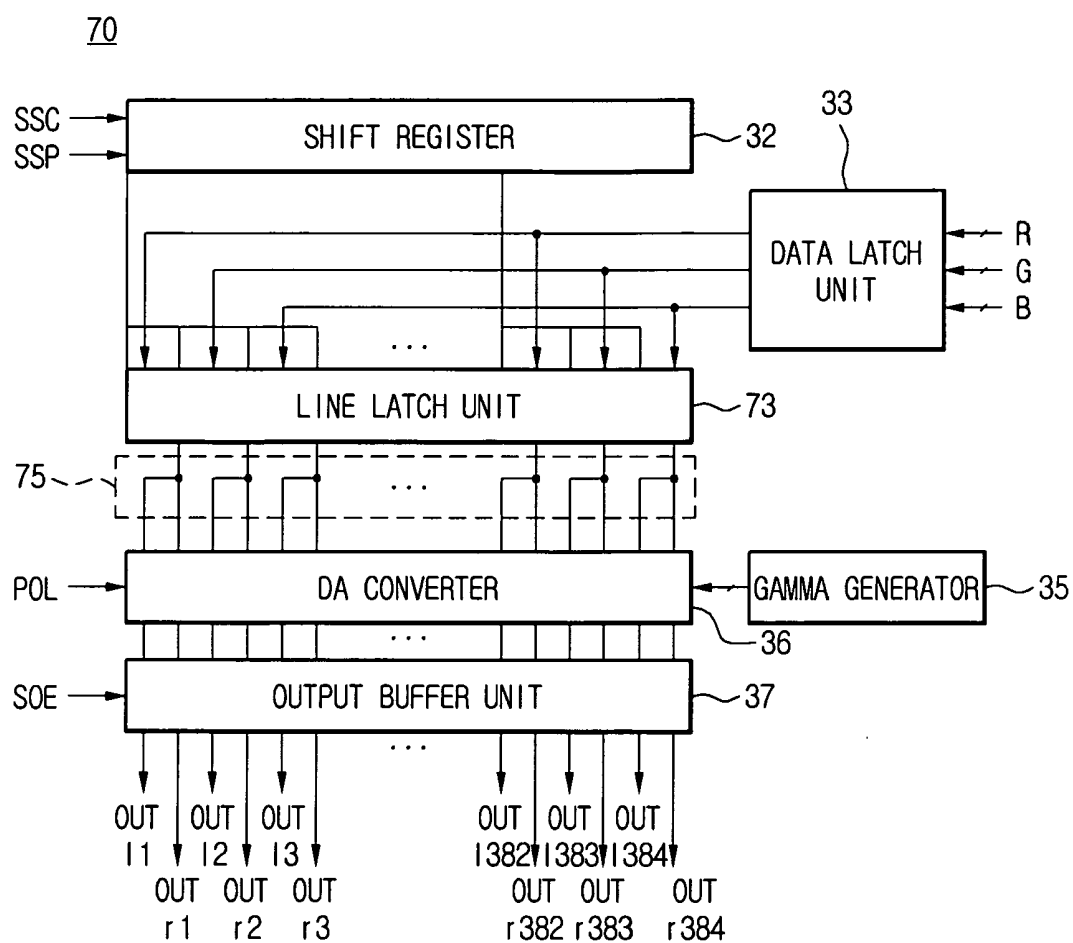

**LIQUID CRYSTAL PANEL, DATA DRIVER,
LIQUID CRYSTAL DISPLAY DEVICE
HAVING THE SAME AND DRIVING
METHOD THEREOF**

[0001] This application claims the benefit of Korean Patent Application No. 10-2006-0059214, filed on Jun. 29, 2006, which is hereby incorporated by reference for all purposes as if fully set forth herein.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display (LCD) device, and more particularly, to a liquid crystal display panel, a data driver, an LCD device using the same, and a driving method for an LCD device.

[0004] 2. Discussion of the Related Art

[0005] With the rise of an information society the demand for display devices has increased. To meet the demand, various types of display devices including liquid crystal display (LCD) devices, plasma display panels (PDP), electro luminescent devices (ELD), and vacuum fluorescent displays (VFD). Some of these devices are currently in use as display devices.

[0006] Among the various types of display devices, the LCD device has been widely used because of advantages including excellent image quality, light weight, compact profile, and low power consumption. Accordingly, the LCD device has been in various applications including as a monitor for a portable apparatuses and as a display panel for televisions.

[0007] In the typical LCD device, data are respectively supplied to a matrix of pixels, and a desired image can be displayed by controlling the light transmittances of the pixels.

[0008] FIG. 1 is a block diagram of a related art LCD device. FIG. 2 is a circuit diagram illustrating a liquid crystal display panel of FIG. 1, and FIG. 3 is a block diagram illustrating a data driver of the liquid crystal display panel of FIG. 1.

[0009] Referring to FIG. 1, the related art LCD device includes a liquid crystal display panel 9, a gate driver 3, a gamma generator 7, a data driver 5, a common voltage generator 8, and a timing controller 1. The liquid crystal display panel 9 includes a plurality of pixels arranged in a matrix. The gate driver 3 supplies a scan signal to the liquid crystal display panel 9. The data driver 5 supplies a data voltage based on the gamma voltage corresponding to R, G and B data signals forming an image to the liquid crystal display panel 9. The common voltage generator 8 generates a common voltage Vcom to be applied to the liquid crystal display panel 9. The timing controller 1 generates a control signal for controlling the gate driver 3 and the data driver 5.

[0010] The liquid crystal display panel 9 may have various structures depending upon the mode of operation of the liquid crystal display panel 9. The liquid crystal display panel of FIG. 2 operates in an in-plane switching (IPS) mode.

[0011] Referring to FIG. 2, a plurality of gate lines G1 to Gn and a plurality of data lines D1 to Dm are arranged on the liquid crystal display panel 9 such that the plurality of gate lines G1 to Gn cross the plurality of data lines D1 to Dm. A plurality of pixels P is defined by crossings of the

plurality of gate lines G1 to Gn with the plurality of data lines D1 to Dm. Each pixel P includes a thin film transistor (TFT) connected to a gate line G1 to Gn and the data line D1 to Dm, and a pixel electrode (not shown) connected to the TFT. Although not shown, the pixel P also includes a common electrode branched from the common line VL1 to VLn.

[0012] A data voltage is applied to the pixel electrode, and a common voltage Vcom is applied to the common electrode resulting in a potential difference (i.e., voltage difference) between the data voltage and the common voltage Vcom applied to the pixel electrode and the common electrode. Molecules of a liquid crystal layer existing between the pixel electrode and the common electrode are driven by means of the potential difference. Liquid crystal cells represented as capacitors (C1c) are formed by the liquid crystal molecules of each pixel. Although not shown, a storage capacitor for maintaining the data voltage applied to the pixel for one frame (or one frame period) may be formed between the gate line G1 to Gn and the pixel electrode.

[0013] The timing controller 1 generates a control signal for driving the liquid crystal display panel 9 using image data and synchronization signal input from an external source such as an external video card. The control signal includes a first control signal that controls the gate driver 3, and a second control signal that controls the data driver 5. The first control signal includes a gate shift clock (GSC), a gate start pulse (GSP), and a gate output enable (GOE) signal. The second control signal includes source shift clock (SSC), source start pulse (SSP), source output enable (SOE) signal, and a polarity control (POL) signal.

[0014] The gate driver 3 sequentially supplies the scan signals to the respective gate lines G1 to Gn in response to the first control signal supplied from the timing controller 1. Accordingly, each of the respective gate lines G1 to Gn of the liquid crystal display panel 9 is activated in sequence. By activation it is meant that the TFTs connected to a respective gate lines G1 to Gn are turned on by the scan signal. When the TFTs are turned on, the data voltage supplied from the data driver 5 is supplied to the pixel electrode via the TFT connected to the activated gate line.

[0015] Referring to FIG. 3, the data driver 5 includes a data latch unit 13, a shift register 12, a line latch unit 14, a digital to analog (DA) converter 16, and an output buffer unit 17.

[0016] The data latch unit 13 latches n-bit R, G and B data signals supplied from the timing controller 1 in units of pixels. The shift register 12 sequentially generates the latch enable signals that control the line latch unit 14 to latch the R, G and B data signals latched in the data latch unit 13 in synchronization with the SSC signal, when the SSP signal is applied to the shift register 12. In response to the latch enable signals that are sequentially generated at the shift register 12, the R, G and B data signals latched in the data latch unit 13 are latched in the line latch unit 14 in sequence. For example, the R, G and B data signals are simultaneously latched in the line latch unit 14 in response to a first latch enable signal output from the shift register 12. Similarly, the R, G and B data signals are simultaneously latched in the line latch unit 14 in response to a second latch enable signal output from the shift register 12. Through a sequence of such operations, the line latch unit 14 latches a volume of data corresponding to one horizontal display line.

[0017] The line latch unit 14 can latch the data signals corresponding to a preset number of channels. As illustrated in FIG. 3, the line latch 14 can latch the data signals corresponding to 192 channels OUT1 to OUT192.

[0018] For example, when the number of the data lines of the liquid crystal display panel 9 is 576, the number of channels of the data driver 5 corresponding to the respective data lines should also be 576. However, since the number of channels for a data driver IC is 192 in the data driver 5 of FIG. 3, the data driver 5 can provide 576 channels by including three data driver ICs each having 192 channels.

[0019] The DA converter 16 converts the R, G and B data signals latched at the line latch unit 14 into R, G and B data voltages corresponding to a gamma voltage supplied from the gamma generator 7. The DA converter 16 may generate the R, G and B data voltages using one of a positive polarity gamma voltage and a negative polarity gamma voltage supplied from the gamma generator 7.

[0020] The output buffer unit 17 outputs the R, G and B data voltages to the respective channels OUT1 to OUT192 in response to the SOE signal. Each channel is connected to a respective data line of the liquid crystal display panel 9.

[0021] By using the data driver of the above-described configuration, the related art LCD device may alternately supply a data voltage based on the positive polarity gamma voltage and the data voltage based on the negative polarity gamma voltage to operate the related art LCD in an inversion mode.

[0022] However, the related art LCD device includes a plurality of common lines corresponding to the number of gate lines in the liquid crystal display panel 9. Because a pixel includes one or more common lines as well as the gate and data lines, the overall aperture ratio of the related art LCD device is decreased.

[0023] In addition, the related art LCD device has an inherent limitation affecting the voltage difference between the voltages for driving liquid crystals, i.e., the voltage difference between the data voltage and the common voltage. Because the common voltage is typically set to half of the data voltage, the potential difference between the common voltage and the data voltage is limited and increasing the data voltage produces only a limited increase in the potential difference. Accordingly, a limit is encountered when attempting to increase the potential difference to obtain a high brightness level to enhance the image quality of the display.

[0024] Moreover, the limitation on the potential difference between the data voltage and the common voltage limits improving a response speed of the liquid crystal by operating the display with an increased potential difference.

[0025] Furthermore, because the related art LCD device requires a common line and circuitry for generating the common voltage to be supplied to the common line, problems including a complicated fabrication process, high fabrication cost, and low aperture ratio are created.

SUMMARY OF THE INVENTION

[0026] Accordingly, the present invention is directed to a liquid crystal display panel, a data driver, a liquid crystal display device having the same and a driving method thereof that substantially obviates one or more problems due to limitations and disadvantages of the related art.

[0027] An advantage of the present invention is to provide a liquid crystal display panel, a data driver, an LCD device having the same, and a driving method thereof, which can be driven with high voltage.

[0028] Another advantage of the present invention is to provide a liquid crystal display panel, a data driver, an LCD device having the same, and a driving method thereof, which can provide an image having high brightness.

[0029] Another advantage of the present invention is to provide a liquid crystal display panel, a data driver, an LCD device having the same, and a driving method thereof, which can improve an image quality by increasing a response speed of a liquid crystal.

[0030] And still another advantage of the present invention to provide a liquid crystal display panel, a data driver, an LCD device having the same, and a driving method thereof, which can provide a simple fabrication process, a low fabrication cost and an improved aperture ratio because there is not required an apparatus for generating a common voltage.

[0031] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. These and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0032] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described herein, a liquid crystal display panel includes: a plurality of gate lines; a plurality of first data lines and a plurality of second data lines crossing the gate lines; and a plurality of pixels defined by crossings of a plurality of gate lines with a plurality of first data lines and a plurality of second data lines, wherein each of the pixels includes: a first thin film transistor connected to a gate line and one of the first data line; a second thin film transistor connected to one of the gate lines and one of the second data lines; and a liquid crystal cell connected to the first and second thin film transistors that drive the liquid crystal cell using a potential difference between first and second data voltages supplied to the one of the first data lines and the one of the second data lines.

[0033] In another aspect of the present invention, there is provided a data driver for driving a liquid crystal display panel including a plurality of gate lines, a plurality of first data lines and a plurality of second data lines crossing the gate lines, and a plurality of pixels defined by crossings of a plurality of gate lines with a plurality of first data lines and a plurality of second data lines, wherein each of the pixels includes a first thin film transistor connected to the gate line and the first data line, a second thin film transistor connected to the gate line and the second data line, and a liquid crystal cell connected between the first and second thin film transistors, wherein the data driver includes: a division unit that divides an input data signal into first and second data signals; a shift register that sequentially outputs a latch enable signal; a latch unit that latches the divided first and second data signals in response to the latch enable signal; and a digital to analog converter that outputs first and second data voltages corresponding to the first and second data signals using a plurality of positive polarity gamma voltages and a plurality of negative polarity gamma voltages, wherein a volt-

age level of each first data voltage is symmetric to that of a respective second data voltage with respect to a reference voltage.

[0034] In another aspect of the present invention, there is provided a data driver for driving a liquid crystal display panel including a plurality of gate lines, a plurality of first data lines and a plurality of second data lines crossing the gate lines, and a plurality of pixels defined by crossings of a plurality of gate lines with a plurality of first data lines and a plurality of second data lines, wherein each of the pixels includes: a first thin film transistor connected to the gate line and the first data line, a second thin film transistor connected to the gate line and the second data line, and a liquid crystal cell connected between the first and second thin film transistors, the data driver including: a shift register that sequentially outputs a latch enable signal; a latch unit that latches an input data signal in response to the latch enable signal; a division unit that divides the input data signal into first and second data signals; and a digital to analog converter that outputs first and second data voltages corresponding to the first and second data signals using a plurality of positive polarity gamma voltages and a plurality of negative polarity gamma voltages, wherein a voltage level of each first data voltage is symmetric to a voltage level of the respective second data voltage with respect to a reference voltage.

[0035] In still another aspect of the present invention, there is provided a liquid crystal display device including: a liquid crystal display panel including a plurality of pixels arranged in a matrix, wherein each pixel is defined by an crossing of a gate line with a first data line and a second data line; a gate driver supplying a scan signal that activates the gate line; and a data driver that supplies first and second data voltages to the first and second data lines using first and second data signals, wherein the first and second data voltage are different from each other, a voltage level of the first data voltage being symmetric to that of the second data voltage with respect to a reference voltage.

[0036] In yet another aspect of the present invention, there is provided a method of driving a liquid crystal display device including a driving unit for driving a liquid crystal display panel having a plurality of pixels arranged in a matrix, wherein each pixel is defined by an crossing of a gate line with a first data line and a second data line, the method including: supplying a scan signal for activating the gate line; supplying first and second data voltages to the first and second data lines, wherein the first and second data voltage are different from each other; and displaying an image on the liquid crystal display panel using potential difference between the first and second data voltages, wherein a voltage level of the first data voltage is symmetric to that of the second data voltage with respect to a reference voltage.

[0037] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0038] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention.

[0039] In the drawings:

[0040] FIG. 1 is a block diagram of a related art liquid crystal display device (LCD) device;

[0041] FIG. 2 is a circuit diagram illustrating a liquid crystal display panel of the LCD device of FIG. 1;

[0042] FIG. 3 is a block diagram illustrating a data driver of the LCD device of FIG. 1;

[0043] FIG. 4 is a circuit diagram illustrating a liquid crystal display panel according to an embodiment of the present invention;

[0044] FIG. 5 is a block diagram of a data driver according to a first embodiment of the present invention for driving the liquid crystal display panel of FIG. 4;

[0045] FIG. 6 is a block diagram illustrating a gamma generator of the data driver of FIG. 5;

[0046] FIG. 7 is a schematic view illustrating a digital to analog (DA) converter of the data driver of FIG. 5;

[0047] FIG. 8 is a block diagram illustrating the DA converter of FIG. 7 in detail;

[0048] FIG. 9 is a waveform diagram illustrating a data voltage supplied from the data driver of FIG. 5;

[0049] FIG. 10 is a block diagram of a liquid crystal display (LCD) device including the liquid crystal display panel of FIG. 4 and the data driver of FIG. 5; and

[0050] FIG. 11 is a block diagram of a data driver according to a second embodiment of the present invention for driving the liquid crystal display panel of FIG. 4.

DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

[0051] Reference will now be made in detail to embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0052] FIG. 4 is a circuit diagram illustrating a liquid crystal display panel according to an embodiment of the present invention.

[0053] Referring to FIG. 4, a plurality of gate lines G1 to Gn, a plurality of first data lines D11 to D1m, and a plurality of second data lines Dr1 to Drm are arranged on the liquid crystal display panel 9 such that the plurality of gate lines G1 to Gn cross the plurality of first and second data lines D11 to Dm and Dr1 to Drm. A plurality of pixels P are defined by crossings of the plurality of gate lines G1 to Gn with the pluralities of first and second data lines D11 to Dm and Dr1 to Drm. Therefore, a pixel P is defined by a crossing of a gate line G2 with a first data line D11 and a second data line Dr1. All of the pixels may be constructed in the manner described above.

[0054] More specifically, each pixel P includes a first thin film transistor TFT1 connected to the first data line D11, a second thin film transistor TFT2 connected to the gate line G2 and the second data line Dr1, a first pixel electrode connected to the first thin film transistor TFT1, a second pixel electrode connected to the second thin film transistor TFT2, and a liquid crystal cell C1c connected between the first and second pixel electrodes. Herein, the liquid crystal cell C1c denotes a capacitor formed by a liquid crystal layer existing between the first and second pixel electrodes.

[0055] In the first thin film transistor TFT1, a gate electrode is connected to the gate line G2, a source electrode is connected to the first data line D11, and a drain electrode is connected to the liquid crystal cell C1c. In the second thin

film transistor TFT2, a gate electrode is connected to the gate line G2, a source electrode is connected to the second data line Dr1, and a drain electrode is connected to the liquid crystal cell C1c. Actually, the first pixel electrode is connected between the drain electrode of the first thin film transistor TFT1 and the liquid crystal cell C1c, and the second pixel electrode is connected between the drain electrode of the second thin film transistor TFT2 and the liquid crystal cell C1c. However, for the sake of illustrative convenience, the drain electrode of the first thin film transistor TFT1 and the drain electrode of the second thin film transistor TFT2 are illustrated as being directly connected to the liquid crystal cell C1c.

[0056] The respective gates of the first and second thin film transistors TFT1 and TFT2 are commonly connected to the same gate line G2 and the respective drains thereof are commonly connected to the liquid crystal cell C1c through corresponding pixel electrodes, whereas the source electrodes thereof are connected to the first and second data lines D11 and Drm, respectively.

[0057] The first and second thin film transistors TFT1 and TFT2 are simultaneously turned on by a scan signal applied to the gate line G2, and the liquid crystal cell C1c is driven by a potential difference, i.e., a voltage difference between the first and second data voltages supplied to the first and second data lines D11 and Dr1.

[0058] Although not shown, a storage capacitor Cst may be formed between a gate line G1 of an adjacent previous cell and a pixel electrode.

[0059] The scan signal, i.e., a gate high voltage Vgh, is sequentially supplied to each of the respective gate lines G1 to Gn for one horizontal period H, and a gate low voltage Vgl is then supplied after the lapse of one horizontal period H to a next frame.

[0060] When the scan signal, i.e., the gate high voltage Vgh, is supplied to a respective gate line G1 to Gn, the first and second thin film transistors TFT1 and TFT2 connected to the respective gate line G1 to Gn are simultaneously turned on.

[0061] First and second voltages may be applied to the first and second data lines D11 to Dm and Dr1 to Drm, respectively, wherein the first and second voltages are different from each other. The first voltage may be generated from the second data voltage or alternatively the second voltage may be generated from the first voltage. For example, when the first data voltage is generated from a positive polarity gamma voltage, the second data voltage may be generated from a negative polarity gamma voltage that is symmetric to the positive polarity gamma voltage with respect to a predetermined reference voltage Vref. Further, when the second data voltage is generated from the negative polarity gamma voltage, the first data voltage may be generated from a positive polarity gamma voltage that is symmetric to the negative polarity gamma voltage with respect to the predetermined reference voltage Vref.

[0062] By way of example, when the negative polarity gamma voltage is in a range of about 1V to about 8V, the positive polarity gamma voltage is in range of about 8V to about 15V, and the reference voltage Vref is 8V, the second data voltage may be selected as an 11V positive polarity gamma voltage to be symmetric to a 5V negative polarity gamma voltage first data voltage with respect to the 8V reference voltage Vref. In other words, the 5V negative polarity gamma voltage is lower than the 8V reference

voltage Vref by 3V, and the 11V positive polarity gamma voltage is higher by 3V than the 8V reference voltage making the 5V negative polarity gamma voltage and the 11V positive polarity gamma voltage symmetric to each other with respect to the 8V reference voltage Vref. When one of the first and second data voltages, e.g., the first data voltage, is given, the other data voltage, e.g., the second data voltage may be easily generated using the above voltage symmetry relationship. The second data voltage when generated from the first data voltage may be referred to as a mirror voltage.

[0063] As shown in FIG. 4, the common line for supplying the common voltage in the liquid crystal display panel 66 may be omitted. When the common line is omitted because the common voltage is not used, circuitry for generating the common voltage may also be omitted. By omitting both the common line and the circuitry for generating the common voltage in the liquid crystal display panel according to an embodiment of the present invention, the fabrication process is simplified and fabrication cost can be reduced. In addition, by omitting the common line in the liquid crystal display panel according to the present invention, the aperture ratio can be improved because the common line does not occupy area in a pixel.

[0064] Furthermore, since the common voltage supplied through the common line may be omitted in a liquid crystal display panel according to the present invention, it is possible to reduce power consumption.

[0065] The first and second data voltages are supplied to the first and second data lines D11 to Dm and Dr1 to Drm of each pixel P so that the liquid crystal cell C1c is formed by a potential difference between the first and second data voltages. Therefore, the liquid crystal is driven by the potential difference between the first and second data voltages.

[0066] Accordingly, since the potential difference is determined by the first and second data voltages in the liquid crystal display panel 66 of the present invention, it is possible to generate higher potential differences than the potential difference between the common voltage and the data voltage in the related art. Thus, the liquid crystal can be driven with high voltage and further high brightness image can be obtained.

[0067] By way of comparison, the liquid crystal is driven by the potential difference between the common voltage and the data voltage in the related art, whereas the liquid crystal is driven by potential difference between the symmetric first and second data voltages in the present invention.

[0068] For inversion driving, the first and second data lines D11 to Dm and Dr1 to Drm may be inverted in units of frames. For example, when the first data voltage based on the positive polarity gamma voltage is supplied to the first data line D11 to D1m and the second data voltage based on the negative polarity gamma voltage is supplied to the second data line Dr1 to Drm during a first frame, the first data voltage based on the negative polarity gamma voltage may be supplied to the first data line D11 to D1m and the second data voltage based on the positive polarity gamma voltage may be supplied to the second data line Dr1 to Drm during a next second frame.

[0069] A method for generating symmetric first and second data voltages will be more fully illustrated with reference to FIGS. 5 to 9 of the accompanying drawings.

[0070] FIG. 5 is a block diagram of a data driver according to a first embodiment of the present invention for driving the liquid crystal display panel of FIG. 4. FIG. 6 is a block diagram illustrating a gamma generator of the data driver of FIG. 5. FIG. 7 is a schematic view illustrating a digital to analog (DA) converter of the data driver of FIG. 5. FIG. 8 is a block diagram illustrating the DA converter of FIG. 7 in detail. FIG. 9 is a waveform diagram illustrating a data voltage supplied from the data driver of FIG. 5.

[0071] Referring to FIG. 5, the data driver 30 includes a data latch unit 33, a shift register 32, a line latch unit 34, a DA converter 36 and an output buffer unit 37.

[0072] The data driver 30 of FIG. 5 may include a single data driver IC. More generally, the data driver 30 may include a plurality of data driver ICs. For the sake of illustrative convenience, it is illustrated that the data driver 30 has one data driver IC in the present invention. When several data driver ICs are used, the respective data driver ICs are connected in parallel and the shift registers 32 included in the respective data driver ICs are cascade-connected. Accordingly, after an operation of a shift register included in a first data driver IC is completed, a shift register included in a second data driver IC starts operating. Through a sequence of such operations, the plurality of data driver ICs are controlled in cascade.

[0073] The data latch unit 33 latches n-bit R, G and B data signals in units of pixels.

[0074] The shift register 32 sequentially generates latch enable signals enabling the line latch unit 34 to latch the R, G and B data signals latched in the data latch unit 33 in synchronization with a SSC signal when a SSP signal is applied to the shift register 32.

[0075] The R, G and B data signals latched in the data latch unit 33 may be latched in the line latch unit 34 according to the latch enable signals.

[0076] In the data driver according to the illustrated embodiment of the present invention, however, the R, G and B data signals latched in the data latch unit 33 are not directly latched in the line latch unit 34 but are latched after they are divided into first and second data signals. That is, the R data signal is divided into first and second R data signals R1 and Rr, and the first and second R data signals R1 and Rr are then latched in the line latch unit 34. Likewise, the G data signal is divided into first and second G data signals G1 and Gr, and the first and second G data signals G1 and Gr are then latched. Also, the B data signal is divided into first and second B data signals B1 and Br, and the first and second B data signals B1 and Br are then latched. Thus, each of the R, G and B data signals may be divided into two data signals having the same data value, i.e., the first and second data signals R1/Rr, G1/Gr and B1/Br, and then the divided two data signals are latched in the line latch unit 34. The divided first and second data signals, e.g., the first and second R data signals R1 and Rr, have the same data value as the original data signal before it is divided, e.g., the R data signal. For example, when the original data signal R is 001111, the first and second data signals R1 and Rr are also 001111.

[0077] The data driver 30 may further include a division unit 39 for dividing the R, G and B data signals into the first and second data signals R1/Rr, G1/Gr and B1/Br, respectively. As illustrated in FIG. 5, the division unit 39 may be simply implemented by dividing one line into two lines each

carrying the divided signals. Alternatively, the division unit 30 may be implemented as a separate circuit.

[0078] The first and second data signals divided from each of the R, G and B data signals are latched in the line latch unit 34 in response to the latch enable signal output from the shift register 32. Since the first and second data signals R1/Rr, G1/Gr and B1/Br are divided from the R, G and B data signals, six first and second data signals R1/Rr, G1/Gr and B1/Br are latched in the line latch unit 34 by one latch enable signal output from the shift register 32. Therefore, the first and second data signals R1/Rr, G1/Gr and B1/Br are sequentially latched in sixes in the line latch unit 34 according to the respective latch enable signals. Through a sequence of operations as described above, the line latch unit 34 can latch the first and second data signals R1/Rr, G1/Gr and B1/Br corresponding to one horizontal display line.

[0079] The DA converter 36 converts the first and second data signals R1/Rr, G1/Gr and B1/Br latched at the line latch unit 34 into first and second data voltages corresponding to a gamma voltage supplied from the gamma generator 35. The DA converter 36 may generate the first and second data voltages using one of a positive polarity gamma voltage or a negative polarity gamma voltage supplied from the gamma generator 35.

[0080] Referring to FIG. 6, the gamma generator 35 includes a positive polarity gamma generator 35a and a negative polarity gamma generator 35b. The positive polarity gamma generator 35a generates a plurality of positive polarity gamma voltages between a first supply voltage VDD and a reference voltage Vref, and the negative polarity gamma generator 35b generates a plurality of negative polarity gamma voltages between the reference voltage Vref and a second supply voltage VSS. The gamma voltage is provided for converting a digital data signal to a corresponding analog signal, i.e., a data voltage, in the DA converter 36. The data voltages having different voltage levels are generated using voltage division between two voltages, for example, between the first supply voltage VDD and the reference voltage Vref, and between the reference voltage Vref and the second supply voltage VSS. Here, each voltage level represents a gamma voltage. The gamma voltage is supplied to the DA converter 36 and may be subdivided to correspond to each gray scale. Alternatively, the gamma voltage may be generated in the gamma generator 35 to correspond to each gray scale level. In the illustrated embodiment of the present invention, the gamma voltage generator 35 generates the gamma voltage corresponding to each gray scale. When the gray scale range is 0 to 255, the positive polarity gamma generator 35a generates 256 types of gamma voltages corresponding to respective gray scale levels, and the negative polarity gamma generator 35b generates 256 types of gamma voltages corresponding to respective gray scale levels.

[0081] The positive polarity gamma voltage and the negative polarity gamma voltage have voltage levels which are symmetric to each other with respect to the reference voltage Vref. For instance, it is assumed that the first supply voltage VDD, the reference voltage Vref and the second supply voltage VSS are 15V, 8V and 1V, respectively. When the gray scale is 125, the negative polarity gamma voltage of 4V is generated to be symmetric to a 12V positive polarity gamma voltage with respect to the 8V reference voltage Vref. Each of the positive and negative polarity gamma generators 35a and 35b can generate full gray scale, and the

gamma voltages of the respective gamma generators **35a** and **35b** generate symmetric voltage levels with respect to the reference voltage V_{ref} .

[0082] The DA converter **36** may include a switch **42** and a multiplexer **44**, as shown in FIGS. 7 and 8.

[0083] The multiplexer **44** includes first and second multiplexers **44a** and **44b**. The first multiplexer **44a** outputs first data voltages VR_1 , VG_1 and VB_1 corresponding to the first data signal R_1 , G_1 and B_1 , and the second multiplexer **44b** outputs second data voltages VR_r , VGr and VBr corresponding to the second data signal R_r , Gr and Br .

[0084] The first multiplexer **44a** selects the gamma voltage corresponding to the first data signal R_1 , G_1 and B_1 among a plurality of the positive polarity gamma voltages or a plurality of negative polarity gamma voltages to output the selected gamma voltage as the first data voltage VR_1 , VG_1 and VB_1 . Likewise, the second multiplexer **44b** selects the gamma voltage corresponding to the second data signal R_r , Gr and Br among a plurality of the positive polarity gamma voltages or a plurality of negative polarity gamma voltages to output the selected gamma voltage as the second data voltages VR_r , VGr and VBr . The positive polarity gamma voltage is generated at the positive polarity gamma generator **35a**, and the negative polarity gamma voltage is generated at the negative polarity gamma generator **35b**.

[0085] The positive and negative polarity gamma voltages, which are supplied to the first and second multiplexers **44a** and **44b**, may be alternately supplied in units of dot, line or frame. Here, a dot refers to a pixel. As occasion demands, the pixel may be configured to include three dots.

[0086] For example, during the first frame, the positive polarity gamma voltage is supplied to the first multiplexer **44a** and the negative polarity gamma voltage is supplied to the second multiplexer **44b**. Thereafter, during the second frame, the negative polarity gamma voltage may be supplied to the first multiplexer **44a** and the positive polarity gamma voltage may be supplied to the second multiplexer **44b**.

[0087] In order to alternately supply the positive and negative polarity gamma voltages to the first and second multiplexers **44a** and **44b** in units of a dot, line or frame, the switch **42** is connected to a front end of the multiplexer **44**. Therefore, the positive and negative polarity gamma voltages are switched in units of a dot, line or frame by the switch **42** in response to the POL signal, so that the positive and negative polarity gamma voltages can be alternately supplied to the first and second multiplexers **44a** and **44b**.

[0088] When the plurality of positive polarity gamma voltages are supplied to the first multiplexer **44a** and the plurality of positive polarity gamma voltages are supplied to the second multiplexer **44b**, the first multiplexer **44a** selects the positive polarity gamma voltage corresponding to the first data signal R_1 , G_1 and B_1 among the plurality of positive polarity gamma voltages to output the selected gamma voltage as the first data voltage VR_1 , VG_1 and VB_1 , and the second multiplexer **44b** selects the gamma voltage corresponding to the second data signal R_r , Gr and Br among the plurality of negative polarity gamma voltages to output the selected gamma voltage as the second data voltages VR_r , VGr and VBr . The first and second data voltages have voltage levels which are symmetric to each other with respect to the reference voltage V_{ref} .

[0089] Consequently, DA converter **36** outputs the first and second data voltages VR_1 , VG_1 , VB_1 , VR_r , VGr and

VBr corresponding to the first and second data signals R_1 , G_1 , B_1 , R_r , Gr and Br , using the positive and negative polarity gamma voltages.

[0090] In FIG. 5, the output buffer unit **37** outputs the first and second data voltages VR_1 , VG_1 , VB_1 , VR_r , VGr and VBr output from the DA converter **36** to respective channels OUT **11** to OUT **r384** in response to the POL signal. The number of channels may be correspondent to the number of the data lines $D1_1$ to $D1_m$ and Dr_1 to Dr_m of the liquid crystal display panel **66**.

[0091] The first and second data voltages VR_1 , VG_1 , VB_1 , VR_r , VGr and VBr are generated corresponding to the R , G and B data signals, and then the first and second data voltages VR_1 , VG_1 , VB_1 , VR_r , VGr and VBr are supplied to the respective pixels of the liquid crystal display panel **66**. For example, the first data voltage VR_1 , VG_1 and VB_1 may be supplied to the first data lines $D1_1$, $D1_2$, . . . , $D1_m$, and the second data voltage VR_r , VGr and VBr may be supplied to the second data lines Dr_1 , Dr_2 , . . . , Dr_m .

[0092] The data driver **30** alternately inverts the first and second data voltage's VR_1 , VG_1 , VB_1 , VR_r , VGr and VBr in units of dot, line, or frame based on the reference voltage V_{ref} using the positive and negative polarity gamma voltages so that it is possible to obtain the waveform diagram of FIG. 9.

[0093] For example, during the first frame, the first data voltages VR_1 , VG_1 and VB_1 may be generated from the positive polarity gamma voltage, and the second data voltages VR_r , VGr and VBr may be generated from the negative polarity gamma voltage. Thereafter, during the second frame, the first data voltages VR_1 , VG_1 and VB_1 may be generated from the negative polarity gamma voltage, and the second data voltages VR_r , VGr and VBr may be generated from the positive polarity gamma voltage. By alternately using the positive and negative voltages at every frame, it is possible to generate the first and second data voltages VR_1 , VG_1 , VB_1 , VR_r , VGr and VBr .

[0094] The liquid crystal corresponding to each pixel P of the liquid crystal display panel **66** is driven by the potential difference V_d , i.e., the voltage difference between first data voltages VR_1 , VG_1 and VB_1 and the second data voltages VR_r , VGr and VBr generated at the data driver **30**. Therefore, in comparison with the related art in which the liquid crystal is driven by the potential difference between the common voltage and the data voltage, the liquid crystal can be driven by the potential difference between first data voltages VR_1 , VG_1 and VB_1 and the second data voltages VR_r , VGr and VBr which are generated using the reference voltage corresponding to the common voltage of the related art without the use of the common voltage. By supplying higher potential differences to the liquid crystal in comparison with the related art, it is possible to improve the image quality by increasing a response speed of the liquid crystal.

[0095] FIG. 10 is a block diagram of a liquid crystal display (LCD) device including the liquid crystal display panel of FIG. 4 and the data driver of FIG. 5.

[0096] Referring to FIG. 10, an LCD device **60** includes a liquid crystal display panel **66**, a gate driver **64** supplying a scan signal to the liquid crystal display panel **66**, a data driver **30**, and a timing controller **62** generating a control signal for controlling the gate driver **64** and the data driver **30**. Herein, the liquid crystal display panel **66** includes a plurality of pixels arranged in a matrix, a plurality of gate line connected to the respective pixels, and first and second

data lines crossing the gate lines. In addition, each pixel is configured with a first TFT connected to the gate line and the first data line, a second TFT connected to the gate line and the second data line, and a liquid cell connected therebetween. The data driver 30 generates first and second data voltages for R, G and B data signals using a gamma voltage, and supplies the first and second data voltage to the first and second data lines of the liquid crystal display panel 66.

[0097] The liquid crystal display panel 66 has the same configuration, operation as described above with reference to FIG. 4 and the data driver 30 has the same configuration, operation as described above with reference to FIG. 5 and a detailed description for these components will be omitted.

[0098] The timing controller 62 generates a control signal for driving the gate driver 64 and the data driver 30 using image data and synchronization signal inputted from an external video card. The control signal includes a first control signal controlling the gate driver 64, and a second control signal controlling the data driver 30. The first control signal includes a gate shift clock (GSC), gate start pulse (GSP), and a gate output enable (GOE). The second control signal includes source shift clock (SSC), source start pulse (SSP), source output enable (SOE), and POL.

[0099] The gate driver 64 sequentially supplies the scan signals to the respective gate lines in response to the first control signal supplied from the timing controller 62. Accordingly, the respective gate lines of the liquid crystal display panel 66 are activated in sequence. That is, the first and second thin film transistors TFT1 and TFT2 of each pixel connected to the activated gate line are turned on. Thus, the first and second data voltages supplied from the data driver 30 can be supplied to respective pixel electrodes via the first and second thin film transistors TFT1 and TFT2 connected to the activated gate line.

[0100] The data driver 30 generates the first and second data voltages for the R, G and B data signals in response to the second control signal and then supplies the first and second data signals to the first and second data lines included in each pixel of the liquid crystal display panel 66.

[0101] The first and second data voltages have voltage levels which are symmetric to each other with respect to the reference voltage V_{ref} . For instance, if the reference voltage V_{ref} and the first data voltage are 8V and 6V, respectively, the second data voltage is 10V to be symmetric to the first data voltage with respect to the reference voltage.

[0102] When the first and second data voltages are supplied to the first and second data lines included in the respective pixels of the liquid crystal display panel 66 and the first and second thin film transistors TFT1 and TFT2 are turned on by the scan signal, the first and second data voltages are supplied to the first and second pixel electrodes connected to the first and second thin film transistors TFT1 and TFT2 via the first and second thin film transistors TFT1 and TFT2. Therefore, the liquid crystal of the pixel is driven by the potential difference between the first and second data voltages.

[0103] Accordingly, since the LCD device 60 according to the illustrated embodiment of the present invention uses the liquid crystal display panel 66 in which the common line may be omitted, the fabrication process is simplified and fabrication cost can be reduced, and the aperture ratio may be improved.

[0104] In addition, the pixel of the liquid crystal display panel 66 has the first and second data lines in LCD device

60 according to an embodiment of the present invention, and has the data driver for supplying the first and second data voltages to the first and second data lines, which makes it possible to drive the liquid crystal by the potential difference between the first and second data voltages. Therefore, as the potential difference between the first and second data voltages is increased to thereby increase the response speed of the liquid crystal, the image quality is improved.

[0105] Meanwhile, the data driver 30 of FIG. 5 has a structure such that the R, G and B data signals output from the data latch unit 33 are divided into the first and second data signals and the divided data signals are then latched in the latch unit 34.

[0106] As described above, the R, G and B data signals may be divided at a front end of the line latch unit 34.

[0107] In the second embodiment of the present invention, the R, G and B data signals can be divided between the line latch unit and the DA converter 36.

[0108] FIG. 11 is a block diagram of a data driver according to a second embodiment of the present invention for driving the liquid crystal of FIG. 4.

[0109] Referring to FIG. 11, the data driver according to the second embodiment of the present invention has a similar structure as that shown in FIG. 5. That is, the data driver 70 according to the present invention includes a data latch unit 33, a shift register 32, a line latch unit 73, a DA converter 36 and an output buffer 37. Therefore, each element of the data driver 70 according to the second embodiment of the present invention has been illustrated in detail in FIG. 5 so that further descriptions will be omitted herein. However, the line latch unit 73 is somewhat different from that of FIG. 5, as will be more fully illustrated below.

[0110] In the data driver 70 according to the second embodiment of the present invention, the R, G and B data signals may be divided into first and second data signals between the line latch unit 73 and the DA converter 36. To this end, the data driver 70 may further include a division unit 75 between the line latch unit 73 and the DA converter 36.

[0111] The R, G and B data signals output from the line latch unit 73 are divided into the first and second data signals and thereafter the divided first and second data signals are supplied to the DA converter 36. The DA converter 36 outputs the first and second data voltages corresponding to the first and second data signals using the positive and negative polarity gamma voltages in the first and second multiplexers 44a and 44b, as illustrated in FIGS. 7 and 8.

[0112] The data driver 70 according to the second embodiment of the present invention divides the R, G and B data signals latched in the line latch unit 73 into the first and second data signals so that an occupation area of the line latch unit 73 is reduced to half of the line latch unit 34 of the data driver 30 of FIG. 5. As a result, it is possible to reduce fabrication cost and reduce occupation area of the circuitry.

[0113] As described above, according to embodiments the present invention, the liquid crystal display panel may omit the common line and circuitry for generating the common voltage to provide a simple fabrication process, low fabrication cost and improved aperture ratio.

[0114] According to embodiments of the present invention, since the pixel of the liquid crystal display panel includes the first and second data lines, and includes the data driver for supplying the first and second data voltages to the first and second data lines, the liquid crystal can be driven

by the potential difference between the first and second data voltages. Therefore, the potential difference between the first and second data voltages can be increased, which makes it possible to improve the image quality as the response speed of the liquid crystal is increased due driving with higher potential differences.

[0115] According to an embodiment of the present invention, the R, G and B data may be divided after the R, G and B data are latched in the line latch unit so that the occupation area of the line latch unit and fabrication cost may be reduced.

[0116] Through use of embodiments of the present invention, by increasing the potential difference between the first and second data voltages for driving the liquid crystal display panel, it is possible to obtain high image brightness to increase display quality.

[0117] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A liquid crystal display panel, comprising:
 - a plurality of gate lines;
 - a plurality of first data lines and a plurality of second data lines crossing the gate lines; and
 - a plurality of pixels defined by crossings of a plurality of gate lines with a plurality of first data lines and a plurality of second data lines,
 wherein each of the pixels comprises:
 - a first thin film transistor connected to a gate line and one of the first data lines;
 - a second thin film transistor connected to the gate line and one of the second data lines; and
 - a liquid crystal cell connected to the first and second thin film transistors that drive the liquid crystal cell using a potential difference between first and second data voltages supplied to the one of the first data lines and the one of the second data lines.
2. The liquid crystal display panel according to claim 1, including a data driver that generates the first data voltage symmetric with respect to a reference voltage to the second data voltage.
3. The liquid crystal display panel according to claim 2, wherein the first and second data voltages are inverted at each predetermined period with respect to the reference voltage.
4. The liquid crystal display panel according to claim 3, wherein the predetermined period is one of a dot unit, a line unit and a frame unit.
5. A data driver for driving a liquid crystal display panel including a plurality of gate lines, a plurality of first data lines and a plurality of second data lines crossing the gate lines, and a plurality of pixels defined by crossings of a plurality of gate lines with a plurality of first data lines and a plurality of second data lines, wherein each of the pixels includes a first thin film transistor connected to a gate line and a first data line, a second thin film transistor connected to the gate line and the second data line, and a liquid crystal cell connected between the first and second thin film transistors,

the data driver comprising:

- a division unit that divides an input data signal into first and second data signals;
 - a shift register that sequentially outputs a latch enable signal;
 - a latch unit that latches the divided first and second data signals in response to the latch enable signal; and
 - a digital to analog converter that outputs first and second data voltages corresponding to the first and second data signals using a plurality of positive polarity gamma voltages and a plurality of negative polarity gamma voltages, wherein a voltage level of each first data voltage is symmetric to that of a respective second data voltage with respect to a reference voltage.
6. The data driver according to claim 5, wherein the first and second data signals have a same data value.
 7. The data driver according to claim 5, wherein the first and second data signals have a same data value as the input data signal undivided at the division unit.
 8. The data driver according to claim 5, wherein voltage levels of the plurality of positive polarity gamma voltages are symmetric to respective voltage levels of the plurality of negative polarity gamma voltages with respect to the reference voltage.
 9. The data driver according to claim 5, wherein the digital to analog converter comprises:
 - a first multiplexer that outputs the first data voltage corresponding to the first data signal;
 - a second multiplexer that outputs the second data voltage corresponding to the second data signal; and
 - a switch that alternately supplies the plurality of positive polarity gamma voltages and the plurality of negative polarity gamma voltages to the first and second multiplexers at every predetermined period.
 10. The data driver according to claim 9, wherein the predetermined period is one of a dot unit, a line unit and a frame unit.
 11. The data driver according to claim 9, wherein the first multiplexer selects one of a gamma voltage corresponding to the first data signal among the plurality of positive polarity gamma voltages and the plurality of negative polarity gamma voltages to output the selected gamma voltage as the first data voltage.
 12. The data driver according to claim 9, wherein the second multiplexer selects one of gamma voltage corresponding to the second data signal among the plurality of positive polarity gamma voltages and the plurality of negative polarity gamma voltages to output the selected gamma voltage as the second data voltage.
 13. A data driver for driving a liquid crystal display panel including a plurality of gate lines, a plurality of first data lines and a plurality of second data lines crossing the gate lines, and a plurality of pixels defined by crossings of a plurality of gate lines with a plurality of first data lines and a plurality of second data lines, wherein each of the pixels includes a first thin film transistor connected to the gate line and the first data line, a second thin film transistor connected to the gate line and the second data line, and a liquid crystal cell connected between the first and second thin film transistors,
 - the data driver comprising:
 - a shift register that sequentially outputs a latch enable signal;
 - a latch unit that latches an input data signal in response to the latch enable signal;

- a division unit that divides the input data signal into first and second data signals; and
- a digital to analog converter that outputs first and second data voltages corresponding to the first and second data signals using a plurality of positive polarity gamma voltages and a plurality of negative polarity gamma voltages, wherein a voltage level of each first data voltage is symmetric to a voltage level of the respective second data voltage with respect to a reference voltage.
14. The data driver according to claim 13, wherein the first and second data signals have the same data value.
15. The data driver according to claim 13, wherein the first and second data signals have the same data value as the input data signal undivided at the division unit.
16. The data driver according to claim 13, wherein the digital to analog converter comprises:
- a first multiplexer that outputs the first data voltage corresponding to the first data signal;
 - a second multiplexer that outputs the second data voltage corresponding to the second data signal; and
 - a switch for alternately supplying the plurality of positive polarity gamma voltages and the plurality of negative polarity gamma voltages to the first and second multiplexers at every predetermined period.
17. The data driver according to claim 16, wherein the predetermined period is one of a dot unit, a line unit and a frame unit.
18. The data driver according to claim 16, wherein the first multiplexer selects one of a gamma voltage corresponding to the first data signal among the plurality of positive polarity gamma voltages and the plurality of negative polarity gamma voltages to output the selected gamma voltage as the first data voltage.
19. The data driver according to claim 16, wherein the second multiplexer selects one of a gamma voltage corresponding to the second data signal among the plurality of positive polarity gamma voltages and the plurality of negative polarity gamma voltages to output the selected gamma voltage as the second data voltage.
20. A liquid crystal display device comprising:
- a liquid crystal display panel including a plurality of pixels arranged in a matrix, wherein each pixel is defined by an crossing of a gate line with a first data line and a second data line;
 - a gate driver supplying a scan signal that activates the gate line; and
 - a data driver that supplies first and second data voltages to the first and second data lines using first and second data signals, wherein the first and second data voltage are different from each other, a voltage level of the first data voltage being symmetric to that of the second data voltage with respect to a reference voltage.
21. The liquid crystal display device according to claim 20, wherein the first and second data signals have a same data value.
22. The liquid crystal display device according to claim 20, wherein the first and second data signals have a same data value as an undivided input data signal.
23. The liquid crystal display device according to claim 20, wherein the digital to analog converter comprises:
- a first multiplexer that outputs the first data voltage corresponding to the first data signal;
 - a second multiplexer that outputs the second data voltage corresponding to the second data signal; and
 - a switch for alternately supplying the plurality of positive polarity gamma voltages and the plurality of negative polarity gamma voltages to the first and second multiplexers at every predetermined period.
24. The liquid crystal display device according to claim 23, wherein the predetermined period is one of a dot unit, a line unit and a frame unit.
25. The liquid crystal display device according to claim 23, wherein the first multiplexer selects one of a gamma voltage corresponding to the first data signal among the plurality of positive polarity gamma voltages and the plurality of negative polarity gamma voltages to output the selected gamma voltage as the first data voltage.
26. The liquid crystal display device according to claim 23, wherein the second multiplexer selects one of a gamma voltage corresponding to the second data signal among the plurality of positive polarity gamma voltages and the plurality of negative polarity gamma voltages to output the selected gamma voltage as the second data voltage.
27. A method of driving a liquid crystal display device including a driving unit for driving a liquid crystal display panel having a plurality of pixels arranged in a matrix, wherein each pixel is defined by an crossing of a gate line with a first data line and a second data line, the method comprising:
- supplying a scan signal for activating the gate line;
 - supplying first and second data voltages to the first and second data lines, wherein the first and second data voltage are different from each other; and
 - displaying an image on the liquid crystal display panel using potential difference between the first and second data voltages,
- wherein a voltage level of the first data voltage is symmetric to that of the second data voltage with respect to a reference voltage.
28. The method according to claim 27, wherein the first and second data voltages are generated from an input data signal.
29. The method according to claim 27, wherein the supplying of the first and second data voltages comprises:
- dividing an input data signal into the first and second data signals; and
 - outputting the first and second data voltages corresponding to the first and second data signals using a plurality of positive polarity gamma voltages and a plurality of negative polarity gamma voltages.
30. The method according to claim 29, wherein the first and second data signals have a same data value.
31. The method according to claim 29, wherein the first and second data signals have a same data value as the input data signal.

专利名称(译)	液晶面板，数据驱动器，具有该液晶面板的液晶显示装置及其驱动方法		
公开(公告)号	US20080001901A1	公开(公告)日	2008-01-03
申请号	US11/638390	申请日	2006-12-14
[标]申请(专利权)人(译)	李周映		
申请(专利权)人(译)	LEE YOUNG JU		
当前申请(专利权)人(译)	LEE YOUNG JU		
[标]发明人	LEE JU YOUNG		
发明人	LEE, JU YOUNG		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3614 G09G3/3659 G09G2320/0673 G09G2310/027 G09G2320/0252 G09G3/3688		
优先权	1020060059214 2006-06-29 KR		
其他公开文献	US7760179		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示面板包括多条栅极线;多条第一数据线和多条第二数据线与栅极线交叉;多个像素由多条栅极线与多条第一数据线和多条第二数据线的交叉限定的多个像素，其中每个像素包括：连接到栅极线的第一薄膜晶体管和其中一个第一条数据线;第二薄膜晶体管，连接到一条栅极线和一条第二数据线;液晶单元连接到第一和第二薄膜晶体管，第一和第二薄膜晶体管利用提供给第一数据线之一和第二数据线之一的第一和第二数据电压之间的电位差驱动液晶单元。

