



US 20080238853A1

(19) **United States**(12) **Patent Application Publication**
Tu et al.(10) **Pub. No.: US 2008/0238853 A1**(43) **Pub. Date: Oct. 2, 2008**(54) **LIQUID CRYSTAL DISPLAY AND DISPLAY
PANEL THEREOF**(30) **Foreign Application Priority Data**


Mar. 28, 2007 (TW) 96110706

(75) Inventors: **Chang-Ching Tu**, Taipei County
(TW); **Yu-Chieh Fang**, Kaohsiung
City (TW)**Publication Classification**(51) **Int. Cl.**
G09G 3/36 (2006.01)(52) **U.S. Cl.** **345/98**

Correspondence Address:

**JIANQ CHYUN INTELLECTUAL PROPERTY
OFFICE**
**7 FLOOR-1, NO. 100, ROOSEVELT ROAD, SEC-
TION 2**
TAIPEI 100 (TW)(57) **ABSTRACT**

A liquid-crystal-display (LCD) and a display panel thereof are provided. The display panel includes a plurality of pixel row units and a plurality of switch units. Each pixel row unit is connected between a scan line and a potential switch line. The first end of each switch unit receives the common voltage provided by the display panel, and the second end of each switch unit is connected to its corresponding potential switch line. Thus, not only the flicker-noise of the display panel is reduced, but also the display-quality of the LCD is promoted.

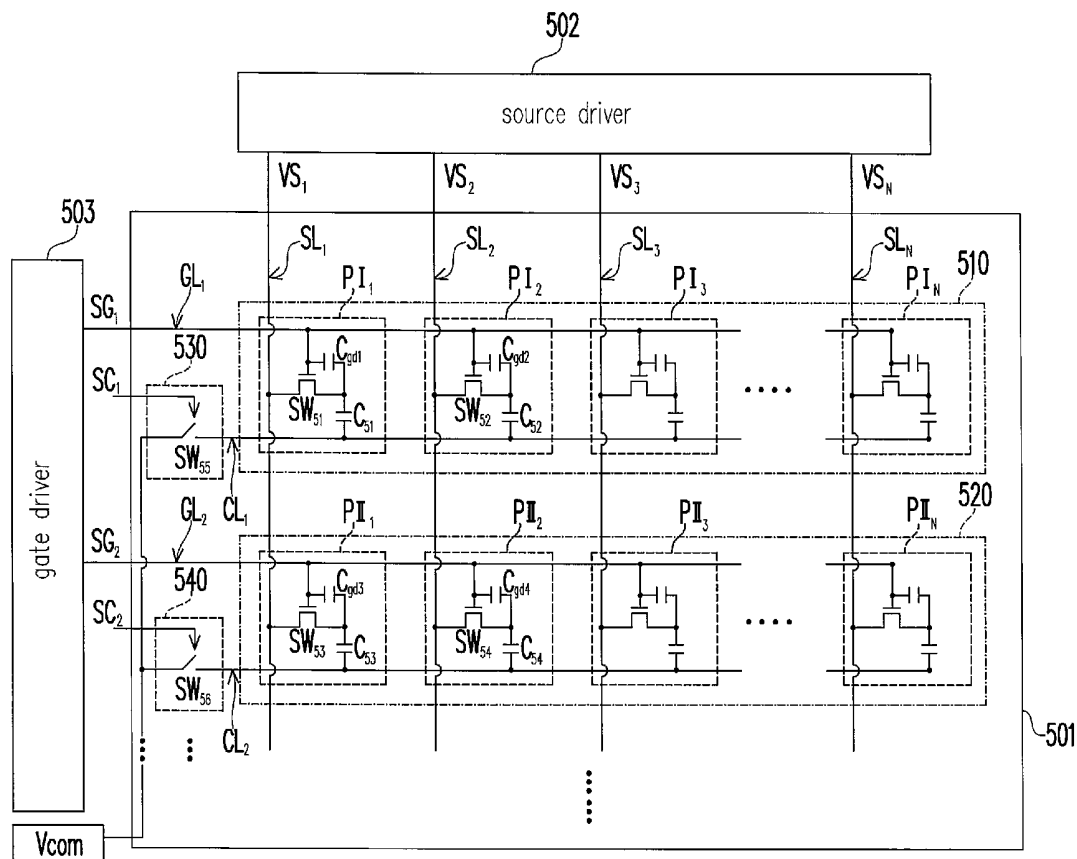(73) Assignee: **CHUNGHWA PICTURE TUBES,
LTD.**, Taipei (TW)(21) Appl. No.: **11/936,801**(22) Filed: **Nov. 8, 2007**

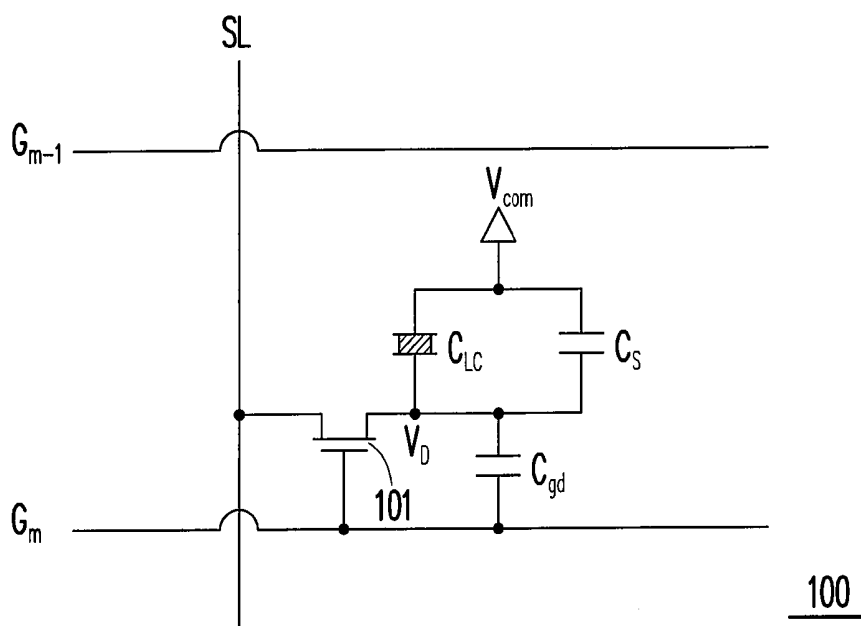


FIG. 1 (PRIOR ART)

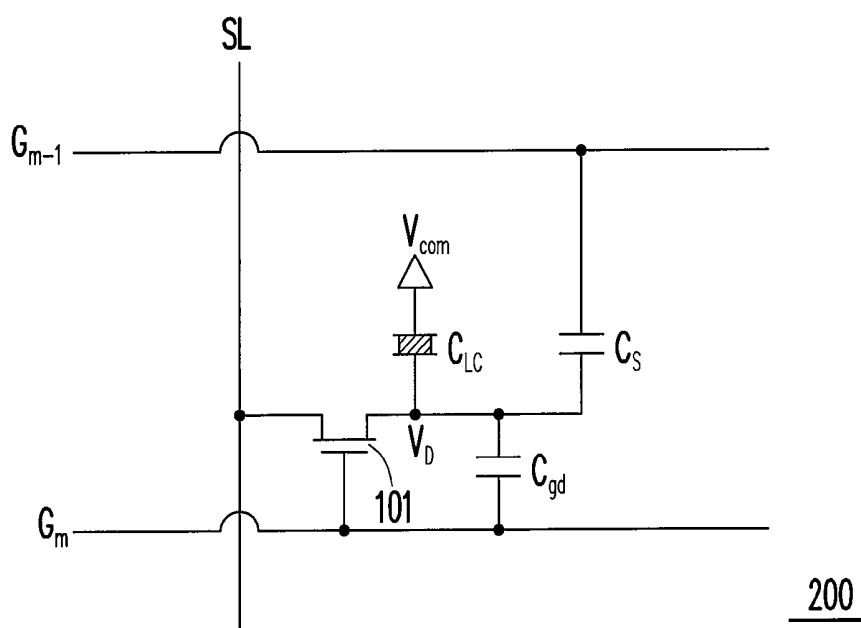


FIG. 2 (PRIOR ART)

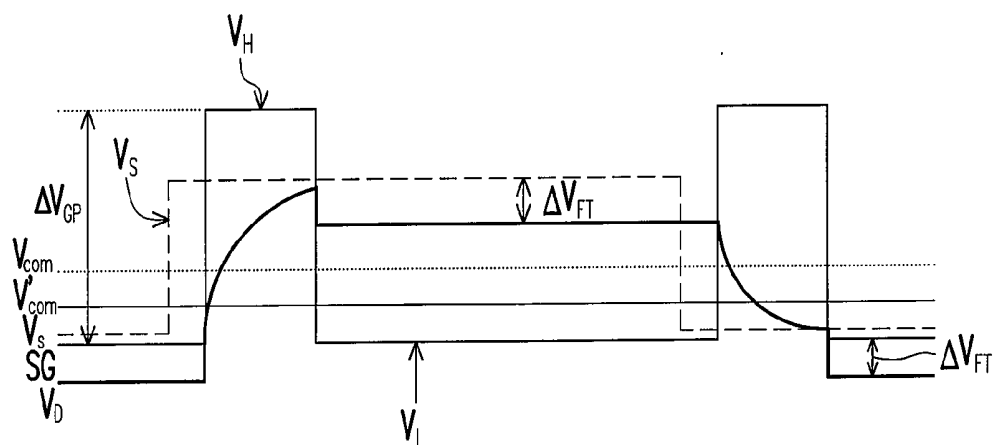


FIG. 3 (PRIOR ART)

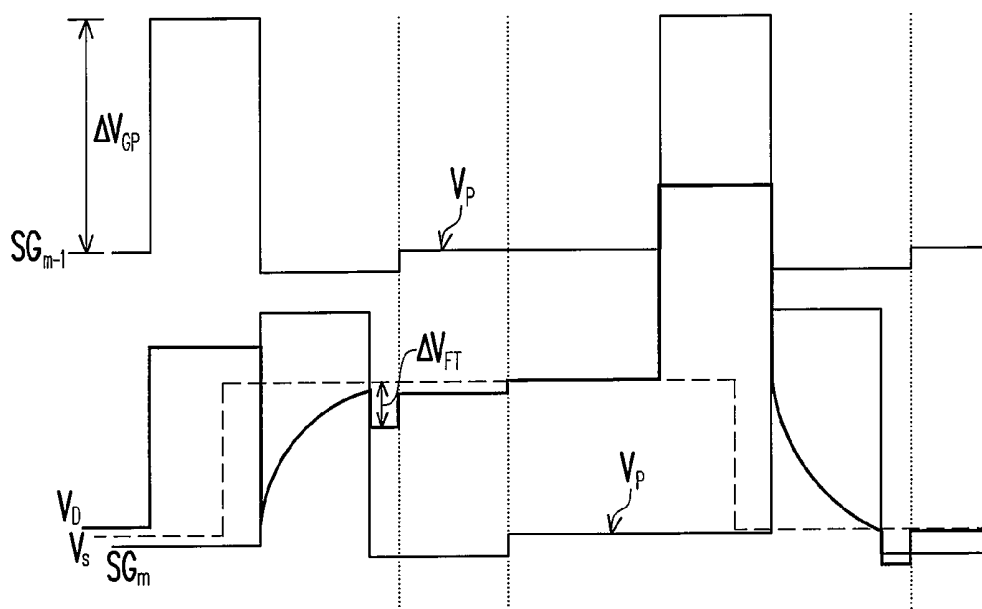


FIG. 4 (PRIOR ART)

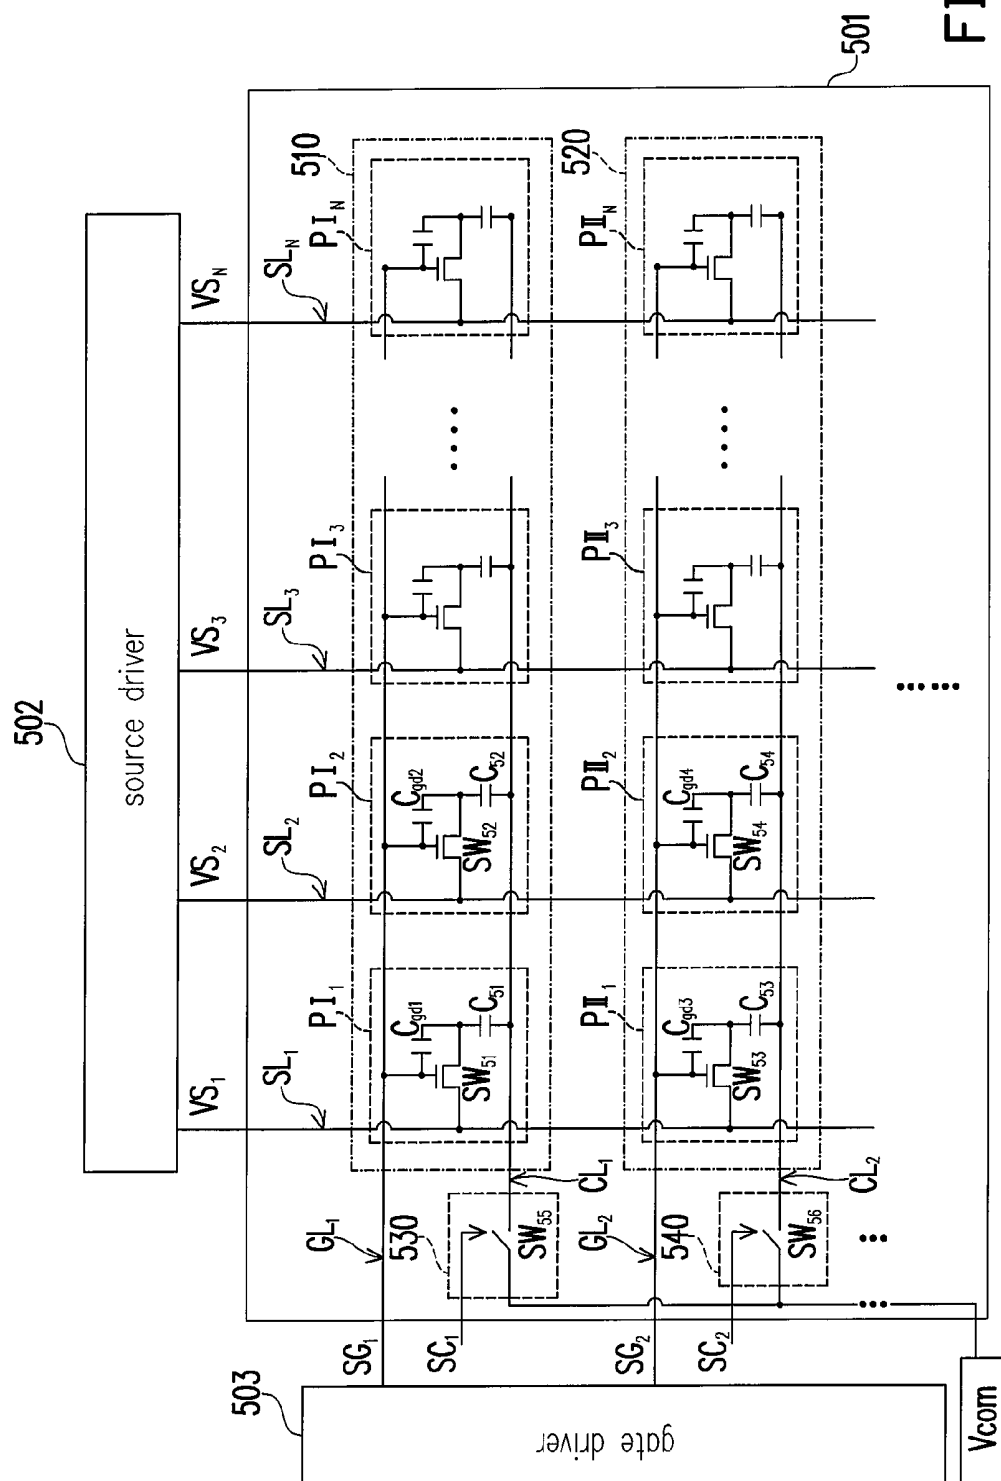


FIG. 5

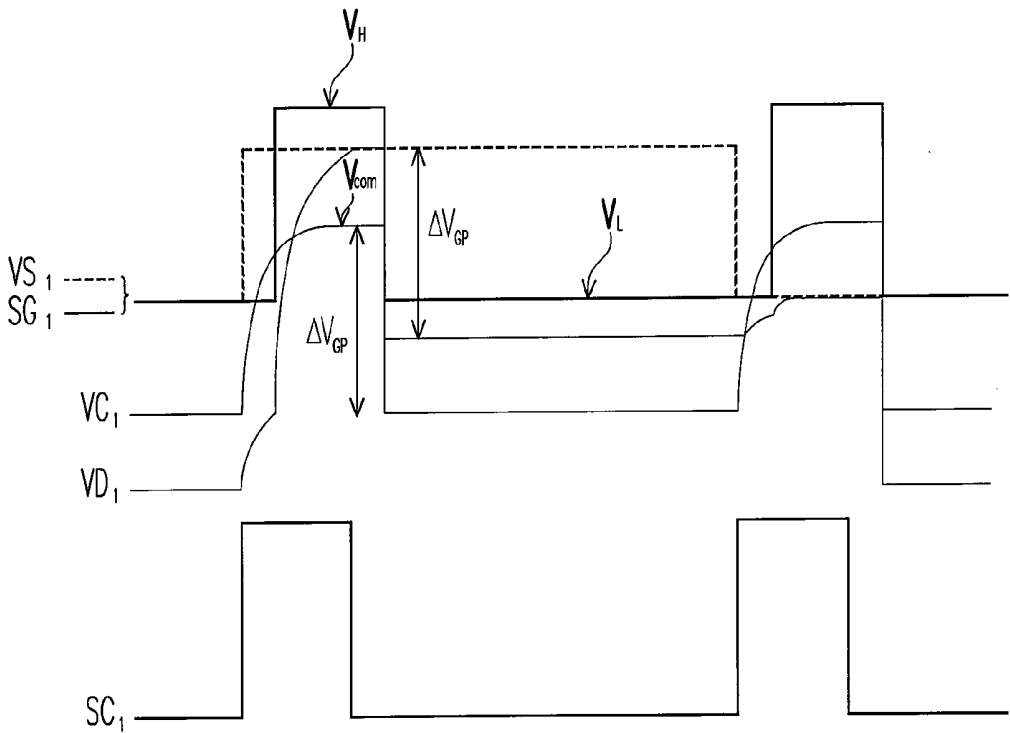


FIG. 6

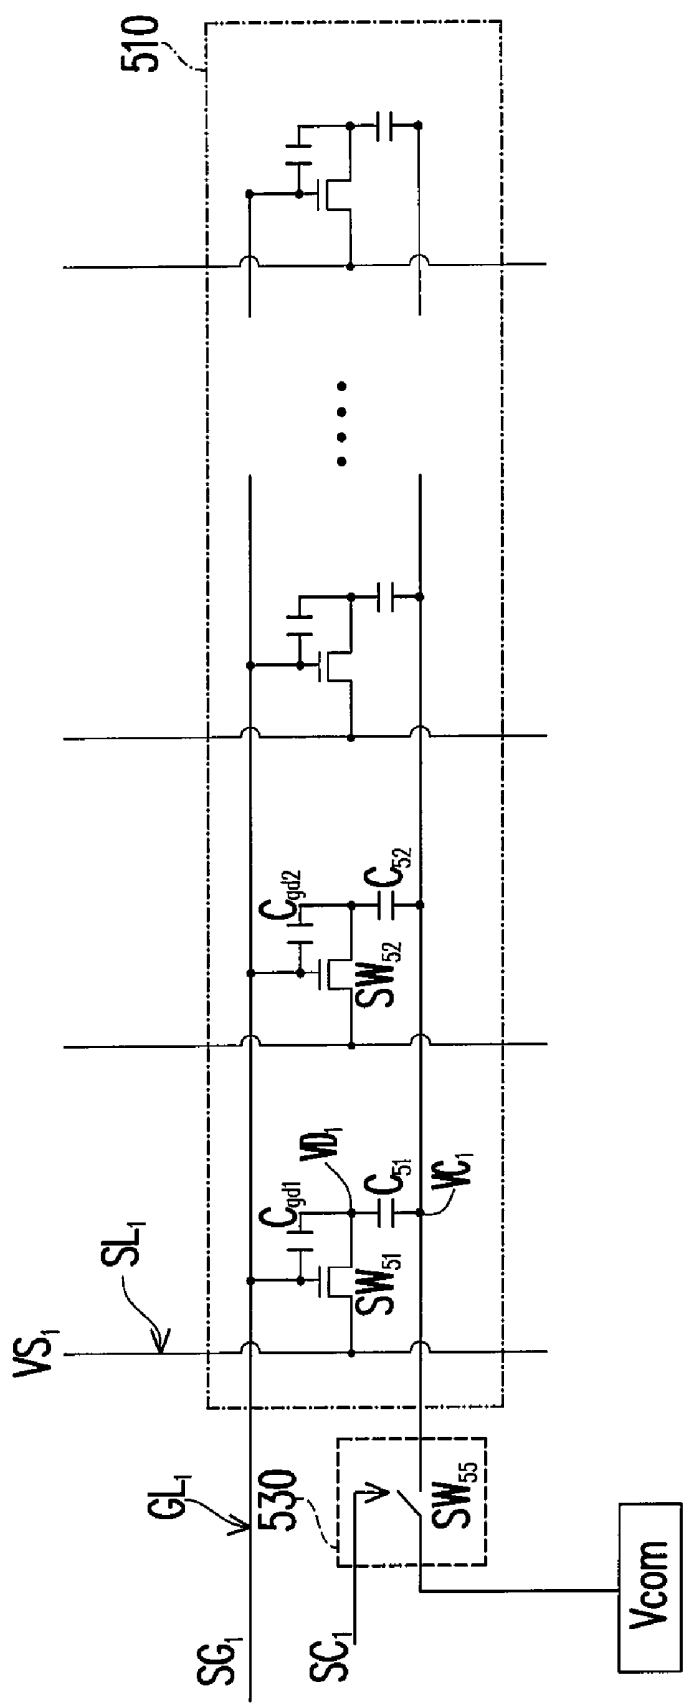


FIG. 7A

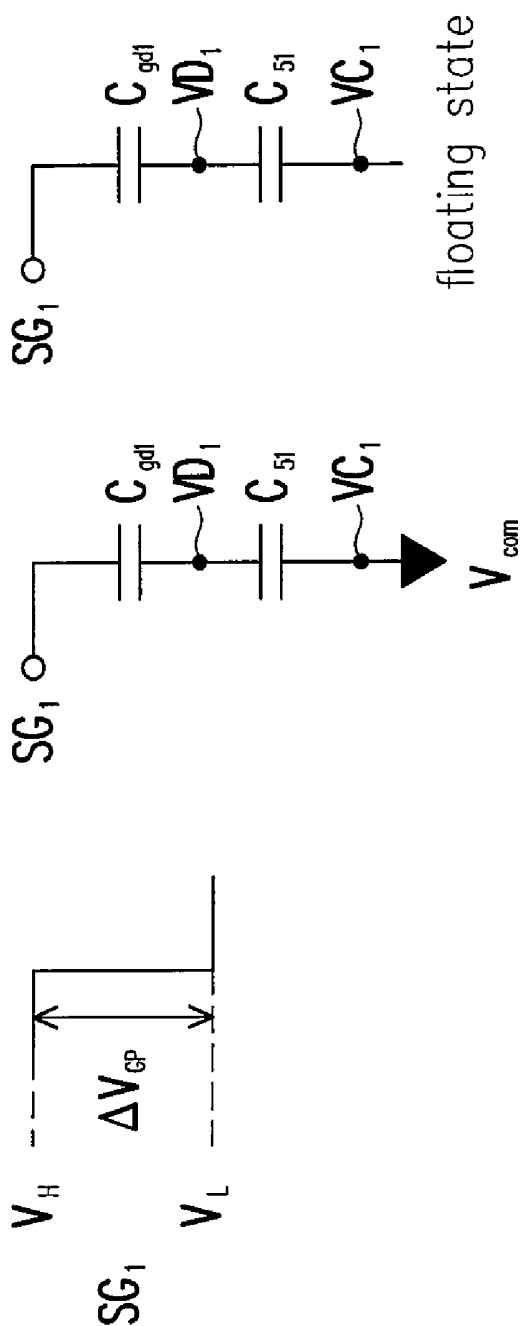


FIG. 7B

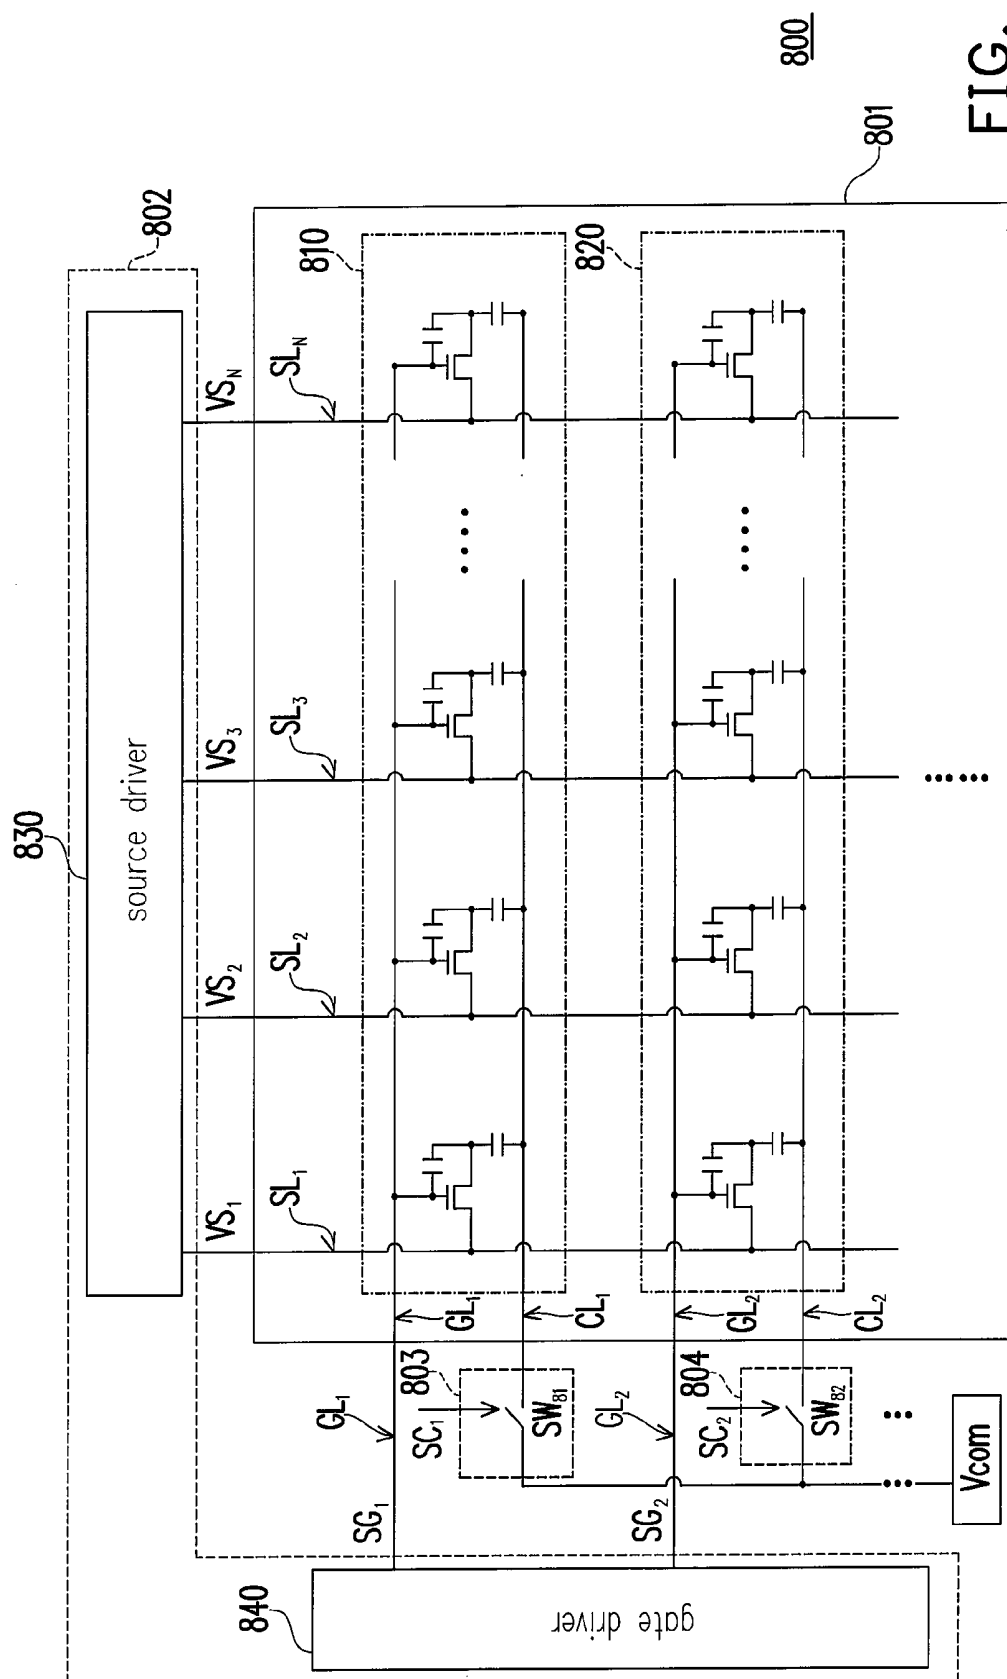


FIG. 8

LIQUID CRYSTAL DISPLAY AND DISPLAY PANEL THEREOF

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the priority benefit of Taiwan application serial no. 96110706, filed on Mar. 28, 2007. All disclosure of the Taiwan application is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention generally relates to a liquid crystal display and display panel thereof, and more particularly, to a liquid crystal display and display panel thereof which may selectively receive a common voltage by using pixel row units.

[0004] 2. Description of Related Art

[0005] Nowadays, a liquid crystal display (LCD) is widely used, and has replaced cathode ray tube (CRT) display. Therefore, it has become one of the mainstream display for the next generation displays. With the development of the semiconductor technology, several large size liquid crystal displays have been developed, but which also poses another technical challenge, namely flicker noise tends to be more serious in larger size display panel.

[0006] There are two kinds of structures for the pixel units in a conventional display panel, one is as shown in the schematic view for illustrating the structure, of a pixel unit **100** in FIG. 1, and the other is as shown in the schematic view for illustrating the structure of a pixel unit **200** in FIG. 2. Referring to FIG. 1 and FIG. 2, the pixel units **100** and **200** respectively comprise a transistor **101**, a liquid crystal capacitance CLC, a storage capacitance C_S , and a parasitic capacitance C_{gd} . And the greatest difference is that the design of the storage capacitance C_S is on a common voltage (Vcom) (C_S on common) in the pixel unit **100**, and the design of the storage capacitance C_S is on a scan line G_{m-1} (C_S on gate) in the pixel unit **200**.

[0007] Regardless of the structure for pixel unit used, when a gate signal SG outputted from a gate driver (not shown) is rapidly reduced from a high potential V_H to a low potential V_L to result in turning off the transistor **101**, and coupling effect caused by the parasitic capacitance C_{gd} will result in decrease in the drain voltage V_D of the transistor **101** by a potential difference ΔV_{FT} , which may be expressed by the equation (1):

$$\Delta V_{FT} = \frac{C_{gd}}{C_{gd} + C_S + C_{LC}} \Delta V_{GP} \quad (1)$$

wherein $\Delta V_{GP} = V_H - V_L$, and the potential difference ΔV_{FT} is referred to as a feed-through voltage. We can know from the equation (1) that because the feed-through voltages ΔV_{FT} of the pixel units in conventional display panels are not completely same, there will result in flicker noises of display panels, so as to increase the flicker noise of the liquid crystal display.

[0008] In order to decrease the flicker noise generated by feed-through effect mentioned above, known methods have developed various methods for resolving the problem, comprising:

[0009] 1. modifying the common voltage provided to the display panel according to the feed-through voltage ΔV_{FT} ; and

[0010] 2. using the driving method of a third or fourth order gate signal.

[0011] FIG. 3 is a waveform diagram for illustrating the related methods mentioned above. It is suitable for the pixel unit **100** disclosed above. Referring to FIG. 1 and FIG. 3, when the gate signal SG is a high potential V_H , the transistor **101** is turned on. At the same time, the source voltage V_S transmitted over the data line SL will be stored on the liquid crystal capacitance V_{LC} , such that the potential of the drain voltage V_D will be changed to as the potential of the source voltage V_S . However, when the gate signal SG is rapidly reduced from the high potential V_H to the low potential V_L , the potential of drain voltage V_D will be reduced by a feed-through voltage ΔV_{FT} . In order to eliminate the flicker noise caused by the feed-through voltage ΔV_{FT} , the related method 1 modifies the common voltage V_{com} of the display panel to the optimum common voltage V'_{com} .

[0012] However, it must perform a complicated hand measurement to determine the optimum common voltage V'_{com} provided to the display panel at the beginning of modifying the common voltage V_{com} by the related method 1. Furthermore, the properties of each display panel are not completely the same, so the optimum common voltage V'_{com} determined above will not meet completely each display panel.

[0013] FIG. 4 is a waveform diagram for illustrating the related method mentioned above. It is suitable for the pixel unit **200** disclosed above. Referring to FIG. 2 and FIG. 4, when the potential of the drain voltage V_D is reduced by a quality of a feed-through voltage ΔV_{FT} , the potential of the drain voltage V_D will be stepped charged to the potential of the source voltage V_S by the compensating voltage V_P provided by the gate signals SG_{m-1} and SG_m during the low potential period in the related method 2.

[0014] However, the compensating voltage V_P provided by the related method 2 will be calculated out according to a theoretical equation, but the gate signal SG is generated by the gate driver in the liquid crystal display in the actual application. Thus, during the period of increasing the accuracy on the compensating voltage V_P , the complexity of the design on the gate driver is also increased. Therefore, when the related method 2 eliminates the flicker noise of the liquid crystal display, the complexity of the design on the gate driver is also increased. As the result, the liquid crystal display will have more layout area and more waste of the power.

SUMMARY OF THE INVENTION

[0015] Accordingly, the present invention is directed to a display panel with many switch units for controlling the time points at that the pixel row units receive the common voltage of the display panel. Thus, the common voltage of the display panel is maintained at an optimal potential, and the design of the circuit on the gate driver is simple. At the result, the problems caused by the feed-through effect may be effectively reduced.

[0016] The present invention is also directed to a liquid crystal display including the advantages of the display panel mentioned above. Thus, not only the problems caused by the feed-through effect may be reduced but also the flicker noise of the display panel may be reduced, and thereby promote the display-quality of the LCD.

[0017] The present invention provides a display panel. The display panel comprises a plurality of pixel row units and a plurality of switch units. Each the pixel row unit is connected between a scan line and a potential switch line. The first end of each switch unit receives the common voltage provided by the display panel, and the second end of each switch unit is connected to its corresponding potential switch line. Thereby, each switch unit conducts its first end and its second end before the high potential transition of its corresponding gate signal, such that its corresponding pixel row units receive the common voltage derived from the display panel. Furthermore, each switch unit disconnects its first end and its second end before the low potential transition of its corresponding gate signal, such that its corresponding pixel row units will be switched to a floating state.

[0018] In one embodiment of the present invention, each pixel row unit mentioned above comprises N pixel units, and the N pixel units correspond to N data lines one by one, wherein N represents integer that is greater than zero. Each pixel unit comprises a first switch and a storage circuit. The first switch is used to determine whether its corresponding data line is electrically connected to the storage circuit. The storage circuit is used to determine the gray level of the display panel.

[0019] It is noted that the forementioned storage circuit comprises at least a liquid crystal capacitance, and the first switch is a transistor. Furthermore, the forementioned data line is electrically connected to the source driver of the liquid crystal display.

[0020] In one embodiment of the present invention, each switch unit includes at least a switch. And the gate driver of the liquid crystal display generates the forementioned the gate signals and a plurality of potential switch signals, each switch unit may determine the conductive state between the first end and the second end according to its corresponding potential switch signal.

[0021] According to another aspect, the present invention provides a liquid crystal display comprising a display panel, a plurality of switch units, and a driving unit. The display panel comprises at least a plurality of pixel row units and each pixel row unit is connected between a scan line and a potential switch line. The first end of each switch unit is used to receive the common voltage of the display panel, and the second end of each switch unit is electrically connected to the potential switch line. Thereby, each switch unit conducts its first end and second end before the high potential transition of its corresponding gate signal, such that its corresponding pixel row unit receives the common voltage derived from the display panel. Furthermore, each switch unit disconnects its first end and second end before the low potential transition of its corresponding gate signal, such that its corresponding pixel row unit may be switched to a floating state. The driving unit is used to drive the display panel.

[0022] In one embodiment of the present invention, the driving unit comprises a gate driver and a source driver, wherein the gate driver may be used to generate the gate signals, and the source driver may be used to generate the source voltages required for driving the pixel row units.

[0023] The liquid crystal display and display panel thereof provided by the present invention may employ the switch units to control the time points at that the pixel row units receive the common voltage of the display panel. Therefore,

not only the flicker noise of the display panel is reduced but also the display-quality of the liquid crystal display may be effectively promoted.

[0024] These and other exemplary embodiments, features, aspects, and advantages of the present invention will be described and became more apparent from the detailed description of exemplary embodiments when read in conjunction with accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and constitute a part of this specification. The drawings illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention.

[0026] FIG. 1 is a schematic view illustrating a structure of a pixel unit of a conventional display panels.

[0027] FIG. 2 is a schematic view illustrating a structure of another pixel unit of a conventional display panel.

[0028] FIG. 3 is a waveform diagram for illustrating a conventional method 1.

[0029] FIG. 4 is a waveform diagram for illustrating a conventional method 2.

[0030] FIG. 5 is a schematic view illustrating a structure of a display panel according to an embodiment of the present invention.

[0031] FIG. 6 is a waveform diagram for illustrating the display panel of FIG. 5.

[0032] FIG. 7A is a schematic view illustrating a structure of a portion of the display panel of FIG. 5.

[0033] FIG. 7B is a diagram illustrating the operating principle of the pixel unit PI_1 .

[0034] FIG. 8 is a schematic view illustrating a structure of the liquid crystal display according to another embodiment of the present invention.

DESCRIPTION OF THE EMBODIMENTS

[0035] Reference will now be made in detail to the present preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers are used in the drawings and the description to refer to the same or like parts.

[0036] The main technical features of the present invention are that pixel row units may selectively receive the common voltage from a display panel in conjunction with the conductive state between two ends of switch units, thereby the flicker noise caused by a feed-through effect may be eliminated. The display panel and the liquid crystal display of the present invention will be explained below, however, this is not intended to limit the scope of the present invention, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention.

[0037] FIG. 5 is a schematic view illustrating a structure of the display panel according to one embodiment of the present invention. Referring to FIG. 5, a display panel 501 comprises a plurality of pixel row units and a plurality of switch units. In order to distinctly represent each member, FIG. 5 only illustrates pixel row units 510 and 520, and switch units 530 and 540. The pixel row units 510 are connected between a scan line GL_1 and a potential switch line CL_1 , and the pixel row units 520 are connected between a scan line GL_2 and a poten-

tial switch line CL_2 . The first end of the switch unit **530** is used to receive the common voltage V_{com} of the display panel **501**, and the second end of the switch unit **530** are electrically connected to the potential switch line CL_1 . Furthermore, the first end of the switch unit **540** is used to receive the common voltage V_{com} of the display panel **501**, and the second end of the switch unit **540** is electrically connected to the potential switch line CL_2 .

[0038] The pixel row units **510** comprise N pixel units PI_1 to PI_N . Wherein N pixel units PI_1 to PI_N respectively correspond to N data lines SL_1 to SL_N , and N represents an integer that is greater than zero. Furthermore, each of the pixel units PI_1 to PI_N comprises a switch, a storage circuit, and a parasitic capacitance. It is noted that the switch of each of the pixel units PI_1 to PI_N comprises a transistor, and the storage circuit mentioned above comprises at least a liquid crystal capacitance.

[0039] For example, the pixel unit PI_1 comprises a switch SW_{51} , a storage circuit (liquid crystal capacitance C_{51}), and a parasitic capacitance C_{gd1} . Wherein the first end of the switch SW_{51} is electrically connected to the corresponding data line SL_1 , and the controlling end of the switch SW_{51} is electrically connected to a scan line GL_1 . The storage circuit (liquid crystal capacitance C_{51}) is connected between the second end of the switch SW_{51} and the potential switch line CL_1 . The parasitic capacitance C_{gd1} is electrically connected to the scan line GL_1 and the second end of the switch SW_{51} .

[0040] Similarly, the pixel unit PI_2 includes a switch SW_{52} , a storage circuit (liquid crystal capacitance C_{52}), and a parasitic capacitance C_{gd2} . Wherein the first end of the switch SW_{52} is electrically connected to the corresponding data line SL_2 , and the controlling end of the switch SW_{52} is electrically connected to a scan line GL_1 . The storage circuit (liquid crystal capacitance C_{52}) is connected between the second end of the switch SW_{52} and the potential switch line CL_1 . The parasitic capacitance C_{gd2} is electrically connected to the scan line GL_1 and the second end of the switch SW_{52} . Similarly, the detailed structures of the pixel units PI_3 to PI_N may be deduced, and the detailed description thereof is omitted.

[0041] The structures of the forementioned pixel row units **520** are similar to those of the pixel row units **510**. The pixel row unit **520** comprises N pixel units PII_1 to PII_N . Wherein the N pixel units PII_1 to PII_N also respectively correspond to N data lines SL_1 to SL_N . Furthermore, each of the pixel units PII_1 to PII_N comprises a switch, a storage circuit, and a parasitic capacitance. Similarly, the switch of each of the pixel units PII_1 to PII_N comprises a transistor, and the storage circuit comprises at least a liquid crystal capacitance.

[0042] For example, the pixel unit PII_1 comprises a switch SW_{53} , a storage circuit (liquid crystal capacitance C_{53}), and a parasitic capacitance C_{gd3} . Wherein the first end of the switch SW_{53} is electrically connected to the corresponding data line SL_1 , and the controlling end of the switch SW_{53} is electrically connected to a scan line GL_2 . The storage circuit (liquid crystal capacitance C_{53}) is connected between the second end of the switch SW_{53} and the potential switch line CL_2 . The parasitic capacitance C_{gd3} is electrically connected to the scan line GL_2 and the second end of the switch SW_{53} .

[0043] Similarly, the pixel unit PII_2 includes a switch SW_{54} , a storage circuit (liquid crystal capacitance C_{54}), and a parasitic capacitance C_{gd4} . Wherein the first end of the switch SW_{54} is electrically connected to the corresponding data line SL_2 , and the controlling end of the switch SW_{54} is electrically connected to a scan line GL_2 . The storage circuit (liquid

crystal capacitance C_{54}) is connected between the second end of the switch SW_{54} and the potential switch line CL_2 . The parasitic capacitance C_{gd4} is electrically connected to the scan line GL_2 and the second end of the switch SW_{54} . Similarly, we can deduce the detailed structures of the pixel units PII_3 to PII_N , and the detailed description is thereof omitted.

[0044] The display panel **501** is suitable for a liquid crystal display, and the source driver **502** and the gate driver **503** contained in the liquid crystal display are well known to those skilled in the art. Wherein the source driver **502** is electrically connected to the data line SL_1 to SL_N , and the gate driver **503** is electrically connected to the scan line GL_1 and GL_2 . Herein the source driver **502** is used to generate source voltages VS_1 to VS_N required for driving the pixel row units **510** and **520**. The gate driver **503** is used to generate gate signals SG_1 and SG_2 required for switching the pixel row units **510** and **520**.

[0045] FIG. 6 is a waveform diagram for illustrating the display panel of FIG. 5. For illustration purpose, referring to FIG. 7A, the pixel row unit **510** and the switch unit **530** are taken as examples, and node voltages VD_1 and VC_1 are shown in FIG. 7A. Referring to FIG. 6 and FIG. 7A, the pixel unit PI_1 may receive the gate signal SG_1 via the scan line GL_1 , and receive the source voltage VS_1 via the data line SL_1 . The switch unit **530** may determine the conductive state between its first end and its second end according to a potential switch signal SC_1 , and the potential switch signal SC_1 may be provided by the gate driver **503**, or may be provided by other members according to the design. It is noted that the switch unit **530** includes at least a switch SW_{55} .

[0046] Before the gate signal SG_1 is switched from a low potential V_L to a high potential V_H , that is before the high potential V_H transition of the gate signal SG_1 , the switch unit **530** will conduct its first end and second end according to the potential switch signal SC_1 (for example, a logic 1). Thus, when the gate signal SG_1 is a high potential V_H , the second end of the storage circuit (liquid crystal capacitance C_{51}) is electrically connected to the common voltage V_{com} , and the potential of the node voltage VC_1 will be also changed to the potential of the common voltage V_{com} according to this. At the same time, because the switch SW_{51} is turned on, the source voltage VS_1 will charge the storage circuit (liquid crystal capacitance C_{51}), such that the potential of the node voltage VD_1 will be changed to the potential of the source voltage VS_1 .

[0047] Before the gate signal SG_1 is switched from a high potential V_H to a low potential V_L , that is before the low potential V_L transition of the gate signal SG_1 , the switch unit **530** will disconnect its first end and its second end according to the potential switch signal SC_1 (for example, a logic 0). At the same time, referring to the operating principle of the pixel unit PI_1 as shown in FIG. 7B, if the second end of the storage circuit (liquid crystal capacitance C_{51}) is always electrically connected to the common voltage V_{com} ($VC_1 = V_{com}$), and the gate signal SG_1 is switched from a high potential V_H to a low potential V_L , the potential difference ΔV_{GP} caused by the gate signal SG_1 will be respectively stored in the liquid crystal capacitance C_{51} and the parasitic capacitance C_{gd1} according to the law of dividing voltage. In other words, the potential of the node voltage VD_1 will be changed at the same time, and the amount of charges stored in the storage circuit (liquid crystal capacitance C_{51}) will also be changed correspondingly, wherein the variation of the node voltage VD_1 is: $\Delta VD_1 = \Delta V_{GP} * C_{gd1} / (C_{gd1} + C_{51})$

[0048] However, in the embodiment of FIG. 7, when the gate signal SG_1 is switched from a high potential V_H to a low

potential V_L , the second end of the storage circuit (liquid crystal capacitance C_{51}) is on a floating-state, and each of the potentials of the node voltage V_D , and VC_1 will be reduced by a potential difference ΔV_{GP} based on the charge conservation theory (as shown in FIG. 6). Thus, before and after the low potential transition of the gate signal SG_1 , the amount of charges stored in the storage circuit (liquid crystal capacitance C_{51}) will remain unchanged. In other words, the pixel units **510** will not change the gray level of the display panel **501**.

[0049] The other pixel units PI_2 to PI_N of the pixel row units **510** will receive the common voltage V_{com} before the high potential V_H transition of the gate signal SG_1 in conjunction with the controlling of the switch units **530**, and will be switched to a floating-state before the low potential V_L transition of the gate signal SG_1 . Thereby, they will operate similar to the pixel unit PI_1 , and the flicker noise of the display panel **501** may be eliminated.

[0050] Referring to FIG. 5, the operation mechanism of the pixel row units **520** and the switch unit **540** is identical to that of the pixel row units **510** and the switch unit **530**. The switch unit **540** may also determine the conductive state between its first end and its second end according to a potential switch signal SC_2 , and the potential switch signal SC_2 may be provided by the gate driver **503**, or may be provided by other members according to the design. It is noted that the switch unit **540** includes at least a switch SW_{56} .

[0051] The switch unit **540** will be controlled by the potential switch signal SC_2 , such that the pixel units PII_2 to PII_N will receive the common voltage V_{com} before the high potential transition of the gate signal SG_2 , and will be switched to a floating-state before the low potential transition of the gate signal SG_2 . Thus, before and after the low potential transition of the gate signal SG_2 , the feed-through effect caused by the parasitic capacitance (for example, C_{gd3} , C_{gd4}) will not change the amount of charges stored in the storage circuit (for example, liquid crystal capacitance C_{53} , C_{54}). The rest may be deduced by analogy, it is understood that any of the pixel row units in the display panel **501** may eliminate the flicker noise caused by the feed-through effect under the control of the corresponding switch unit.

[0052] FIG. 8 is a schematic view illustrating a structure of the liquid crystal display according to another embodiment of the present invention. Referring to FIG. 8, a liquid crystal display **800** comprises a display panel **801**, a driving unit **802**, and a plurality of switch units, wherein the display panel **801** comprises a plurality of pixel row units. In order to clearly illustrate each member, only switch units **803** and **804** and pixel row units **810** and **820** are illustrated. The embodiment in FIG. 8 is extended from the embodiment in FIG. 5, thus the structure of each pixel row unit in the display panel **801** is the same with the structure of each pixel row unit of the embodiment in FIG. 5.

[0053] However, the main difference between the display panel **801** and the display panel **501** is that the display panel **801** is not configured with a switch unit. In order to obtain the function of the display panel **501**, the embodiment in FIG. 8 will have the functions of a plurality of switch units in the display panel **501** (for example, switch units **530** and **540**) by using a plurality of switch units (for example, the switch units **803** and **804**) configured out of the display panel **801**.

[0054] Thus, the structure of the embodiment in FIG. 8 is the same as that of the embodiment in FIG. 5. The pixel row units **810** are connected between a scan line GL_1 and a poten-

tial switch line CL_1 , and the pixel row units **820** is connected between a scan line GL_2 and a potential switch line CL_2 . The first end of the switch unit **803** is used to receive the common voltage V_{com} , and the second end of the switch unit **803** is electrically connected to the potential switch line CL_1 . And the first end of the switch unit **804** is used to receive the common voltage V_{com} , and the second end of the switch unit **804** is electrically connected to the potential switch line CL_2 . Furthermore, the driving unit **802** is electrically connected to the display panel **801**.

[0055] Furthermore, the driving unit **802** comprises a source driver **830** and a gate driver **840**. The source driver **830** is electrically connected to the data lines SL_1 to SL_N , and the gate driver **840** is electrically connected to the scan lines GL_1 and GL_2 . It is noted that each switch unit in the liquid crystal display **800** comprises at least a switch. For example, the switch unit **803** comprises the switch SW_{81} , and the switch unit **804** comprises the switch SW_{82} .

[0056] Referring to FIG. 8 again, the source driver **830** is used to generate the source voltages VS_1 to VS_N required for driving the pixel row units **810** and **820**. The gate driver **840** is used to generate the gate signals SG_1 and SG_2 required for switching the pixel row units **810** and **820**. Furthermore, the switch units **803** and **804** will determine the conductive state between their first ends and second ends respectively according to the potential switch signals SC_1 and SC_2 . Wherein, the potential switch signals SC_1 and SC_2 may be provided by the gate driver **840**, or may be provided by other members required for design.

[0057] Before the gate signal SG_1 is switched from a low potential to a high potential, that is before the high potential transition of the gate signal SG_1 , the switch unit **803** will conduct its first end and second end according to the potential switch signal SC_1 . And the pixel row unit **810** regards the common voltage V_{com} as a reference point to receive the source voltage VS_1 to VS_N from the source driver **830**.

[0058] However, before the gate signal SG_1 is switched from a high potential to a low potential, that is, before the low potential transition of the gate signal SG_1 , the switch unit **803** will disconnect its first end and second end according to the potential switch signal SC_1 . And the pixel row unit **810** are switched to a floating-state, thus the flicker noise caused by the feed-through effect will be suppressed. The mutual operation mechanism of the pixel row unit **820** and the switch unit **804** may be deduced by analogy. Other details may be referred to description of the above embodiment.

[0059] In summary, according to an embodiment of the present invention, a switch unit is used to control the time points at that the pixel row units receive the common voltage of the display panel. Thus, before and after the low potential transition of a gate signal, the gray level of the display panel may not be affected by a feed-through effect. In other words, not only the flicker-noise of a display panel is reduced, but also the display-quality of a liquid crystal display is promoted.

[0060] It will be apparent to those skilled in the art that various modifications and variations can be made to the structure of the present invention without departing from the scope or spirit of the invention. In view of the foregoing, it is intended that the present invention cover modifications and variations of this invention provided they fall within the scope of the following claims and their equivalents.

What is claimed is:

1. A display panel, suitable for a liquid crystal display, the display panel comprising:

a plurality of pixel row units, each pixel row unit being connected between a scan line and a potential switch line, and receiving a gate signal by its corresponding scan line;

a plurality of switch units, each having a first end and a second end, wherein the first end of each switch unit receives a common voltage of the display panel, and the second end of each switch unit is electrically connected to its corresponding potential switch line, and each switch unit conducts its first end and its second end before the high potential transition of its corresponding gate signal, and disconnects its first end and its second end before the low potential transition of its corresponding gate signal.

2. The display panel according to claim 1, wherein each pixel row unit includes N pixel units respectively corresponding to N data lines, and wherein N represents an integer that is greater than zero, wherein each pixel unit comprises:

a first switch, having a first end, a second end and a controlling end, the first end being electrically connected to its corresponding data line, the controlling end being electrically connected to its corresponding scan line; and a storage circuit, connected between the second end of the first switch and its corresponding potential switch line, for determining a gray level of the display panel.

3. The display panel according to claim 2, wherein the storage circuit comprises at least a liquid crystal capacitance.

4. The display panel according to claim 2, wherein the first switch is a transistor.

5. The display panel according to claim 2, wherein each pixel unit further comprises a parasitic capacitance electrically connected to its corresponding scan line and the second end of the first switch.

6. The display panel according to claim 2, wherein the data lines are electrically connected to a source driver of the liquid crystal display.

7. The display panel according to claim 1, wherein the scan lines are electrically connected to a gate driver of the liquid crystal display.

8. The display panel according to claim 7, wherein the gate driver of the liquid crystal display generates gate signals and a plurality of potential switch signals, each switch unit may determine the conductive state between its first end and its second end according to its corresponding potential switch signal.

9. The display panel according to claim 1, wherein each switch unit comprises at least a switch.

10. A liquid crystal display, comprising:

a display panel, comprising:

a plurality of pixel row units, each pixel row unit being connected between a scan line and a potential switch

line, and receiving a gate signal by its corresponding scan line;

a plurality of switch units, each having a first end and a second end, wherein the first end of each switch unit is used to receive a common voltage of the display panel, and the second end of each switch unit is electrically connected to its corresponding potential switch line, and each switch unit conducts its first end and its second end before the high potential transition of its corresponding gate signal, and disconnects its first end and its second end before the low potential transition of its corresponding gate signal; and

a driving unit electrically connected to the display panel, for driving the display panel.

11. The liquid crystal display according to claim 10, wherein the driving unit comprises:

a gate driver electrically connected to the scan lines for generating the gate signals; and

a source driver for generating a plurality of source voltages for driving the pixel row units.

12. The liquid crystal display according to claim 11, wherein the gate driver generates a plurality of potential switch signals, each switch unit determines the conductive state between its first end and its second end according to its corresponding potential switch signal.

13. The liquid crystal display according to claim 10, wherein each pixel row unit includes N pixel units, and N pixel units respectively correspond to N data lines, N represents an integer that is greater than zero, wherein each pixel unit comprises:

a first switch, having a first end, a second end and a controlling end, the first end being electrically connected to its corresponding data line, the controlling end being electrically connected to its corresponding gate line; and a storage circuit, connected between the second end of the first switch and its corresponding potential switch line, for determining a gray level of the display panel.

14. The liquid crystal display according to claim 13, wherein the storage circuit comprises at least a crystal capacitance.

15. The liquid crystal display according to claim 13, wherein the first switch is a thin film transistor.

16. The liquid crystal display according to claim 13, wherein each pixel unit further comprise:

a parasitic capacitance electrically connected to its corresponding scan line and the second end of the first switch.

17. The liquid crystal display according to claim 13, wherein each switch unit comprises at least a switch.

* * * * *

专利名称(译)	液晶显示器及其显示面板		
公开(公告)号	US20080238853A1	公开(公告)日	2008-10-02
申请号	US11/936801	申请日	2007-11-08
[标]申请(专利权)人(译)	中华映管股份有限公司		
申请(专利权)人(译)	中华映管股份有限公司.		
当前申请(专利权)人(译)	中华映管股份有限公司.		
[标]发明人	TU CHANG CHING FANG YU CHIEH		
发明人	TU, CHANG-CHING FANG, YU-CHIEH		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3655 G09G2320/0219 G09G2320/0247		
优先权	096110706 2007-03-28 TW		
其他公开文献	US8098222		
外部链接	Espacenet USPTO		

摘要(译)

提供一种液晶显示器 (LCD) 及其显示面板。显示面板包括多个像素行单元和多个开关单元。每个像素行单元连接在扫描线和电位开关线之间。每个开关单元的第一端接收显示面板提供的公共电压，每个开关单元的第二端连接到其对应的电位开关线。因此，不仅降低了显示面板的闪烁噪声，而且提高了LCD的显示质量。

