



US 20070211007A1


(19) **United States**(12) **Patent Application Publication**
Su et al.(10) **Pub. No.: US 2007/0211007 A1**(43) **Pub. Date: Sep. 13, 2007**(54) **LOW COLOR-SHIFT LIQUID CRYSTAL
DISPLAY AND DRIVING METHOD
THEREFOR**(30) **Foreign Application Priority Data**

Mar. 9, 2006 (TW) 95107989

(75) Inventors: **Jenn-Jia Su**, Budai Township
(TW); **Ming-Feng Tien**, Tainan
City (TW); **Chia-Leng Yang**,
Hsinchu City (TW); **Ting-Jui**
Chang, Taipei City (TW); **Po-Lun**
Chen, Chiayi City (TW)**Publication Classification**(51) **Int. Cl.**
G09G 3/36 (2006.01)(52) **U.S. Cl.** **345/92**(57) **ABSTRACT**

A liquid crystal display including a number of scan lines, a number of data lines, a pixel, a first switch circuit, and a second switch circuit is provided. The scan lines include an N^{th} scan line and an $(N+1)^{\text{th}}$ scan line, where N is a positive integer. The pixel includes a first sub-pixel and a second sub-pixel. The first switch circuit is coupled to both the N^{th} scan line and the $(N+1)^{\text{th}}$ scan line and is used for controlling the second sub-pixel. The second switch circuit is coupled to the N^{th} scan line and is used for controlling the first sub-pixel. The pixel is used for displaying a red, a green, a blue, or a white color.

Correspondence Address:

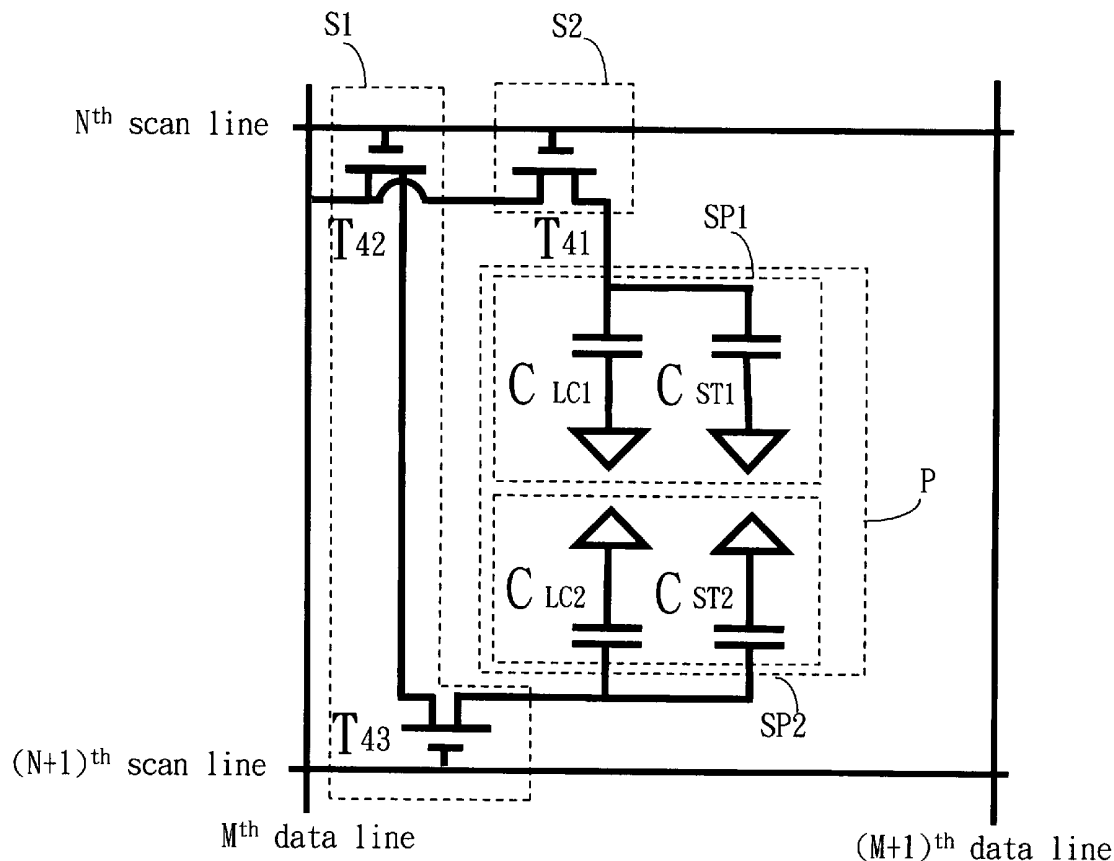RABIN & Berdo, PC
1101 14TH STREET, NW, SUITE 500
WASHINGTON, DC 20005(73) Assignee: **AU OPTRONICS CORP.**,
Hsinchu (TW)(21) Appl. No.: **11/525,087**(22) Filed: **Sep. 22, 2006**

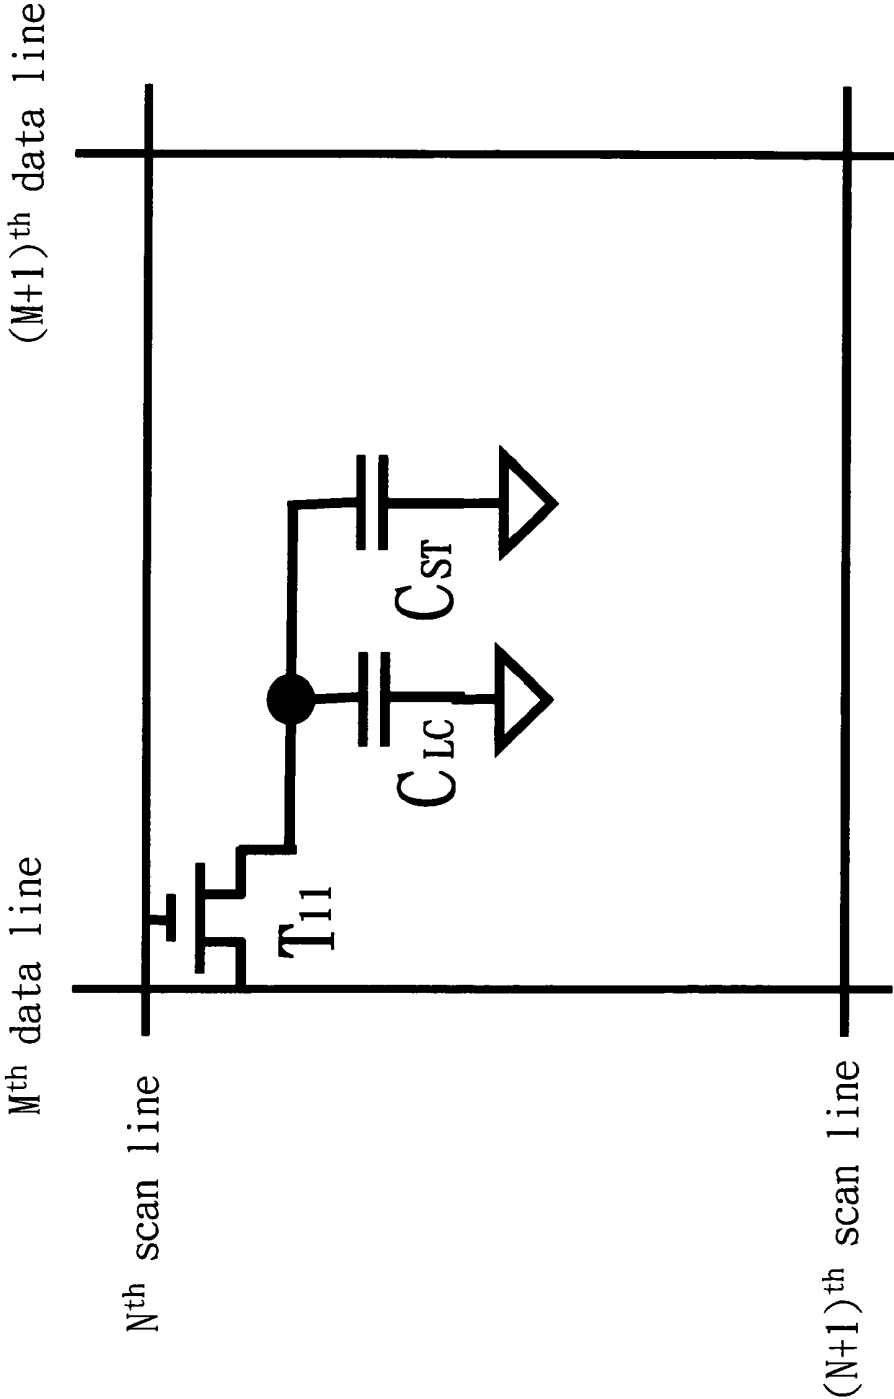


FIG. 1 (RELATED ART)

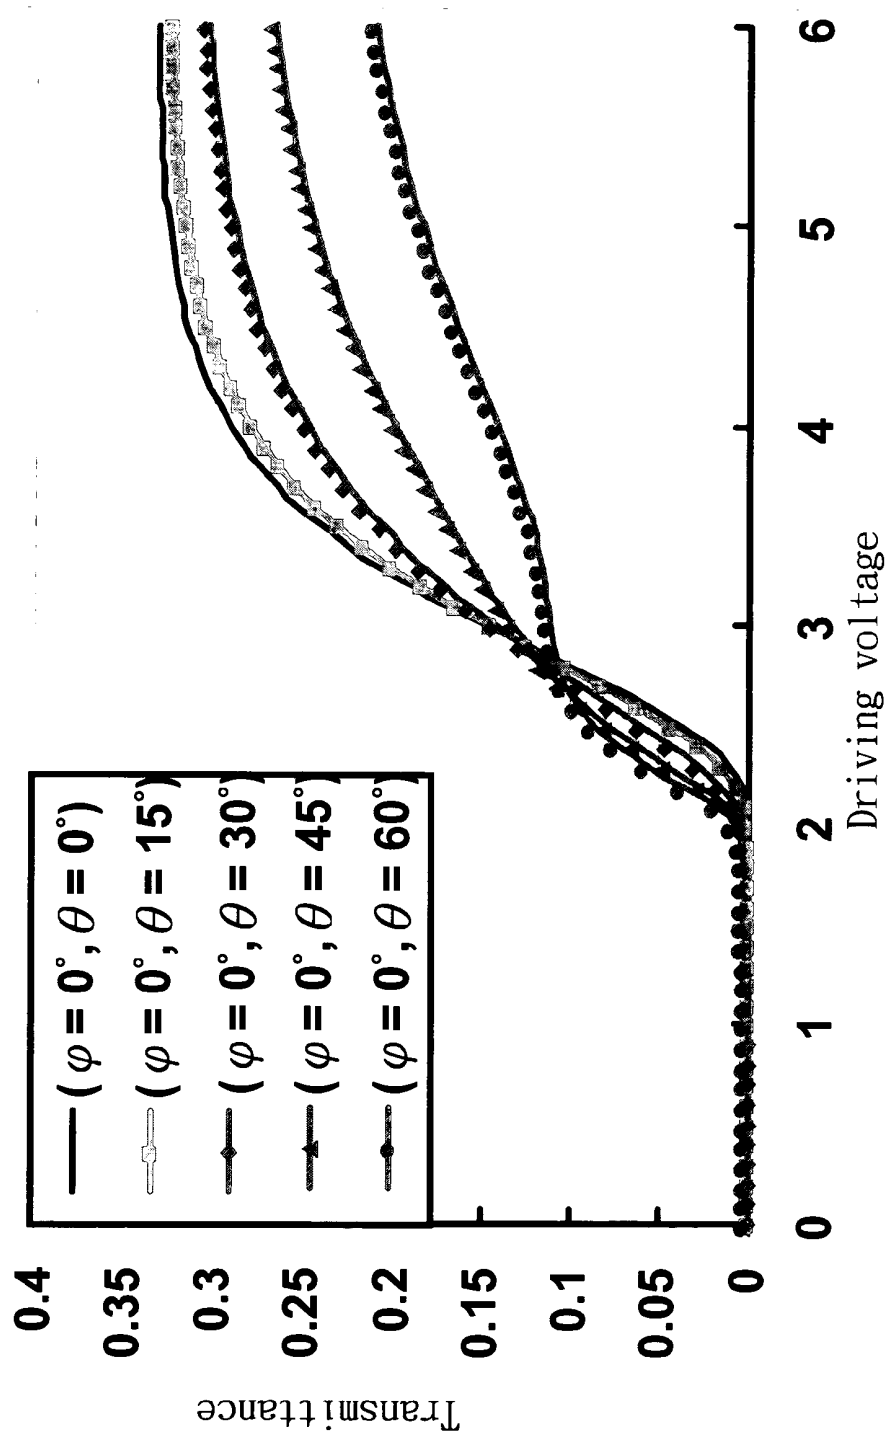


FIG. 2 (RELATED ART)

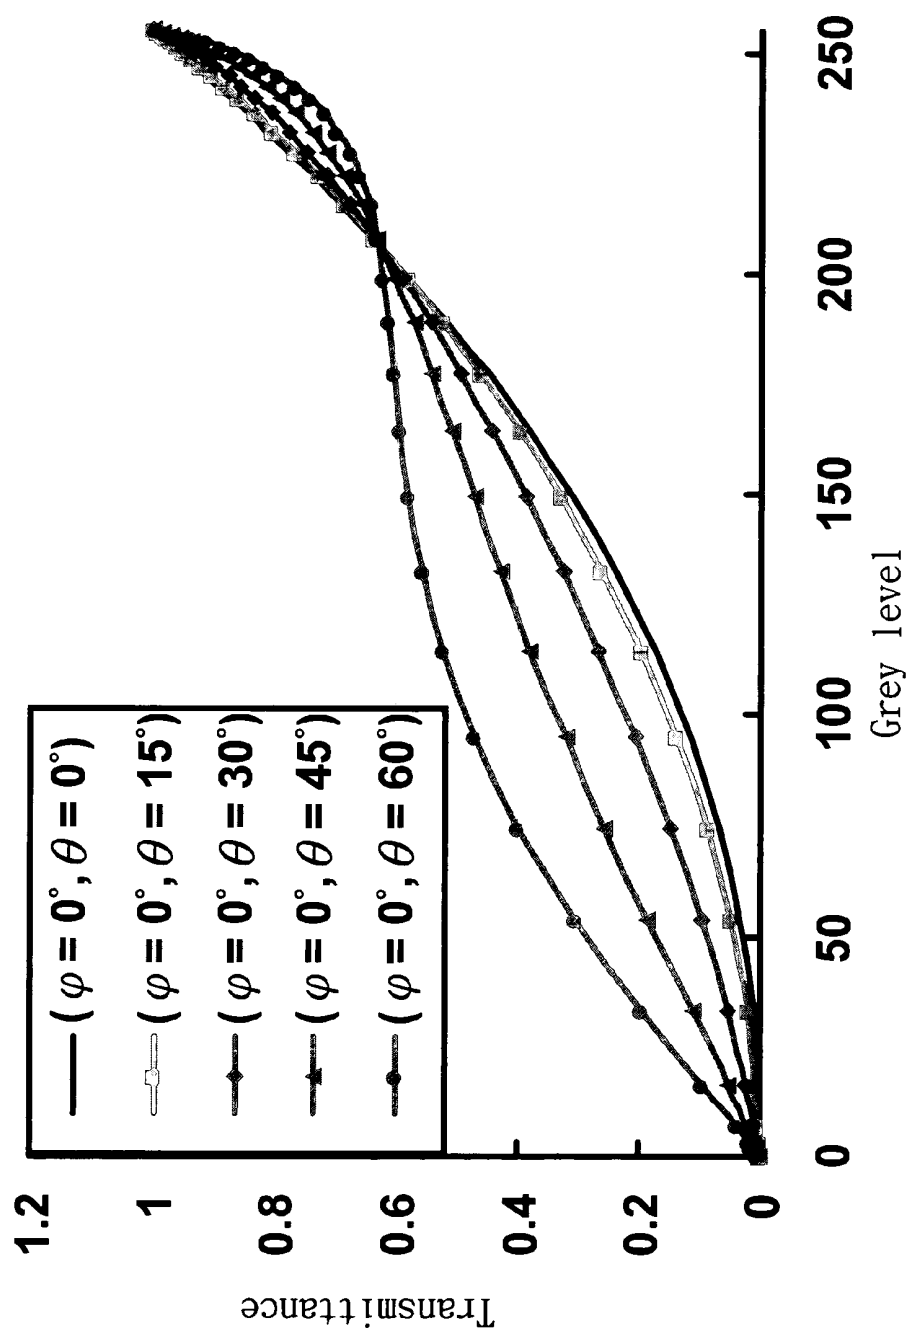


FIG. 3 (RELATED ART)

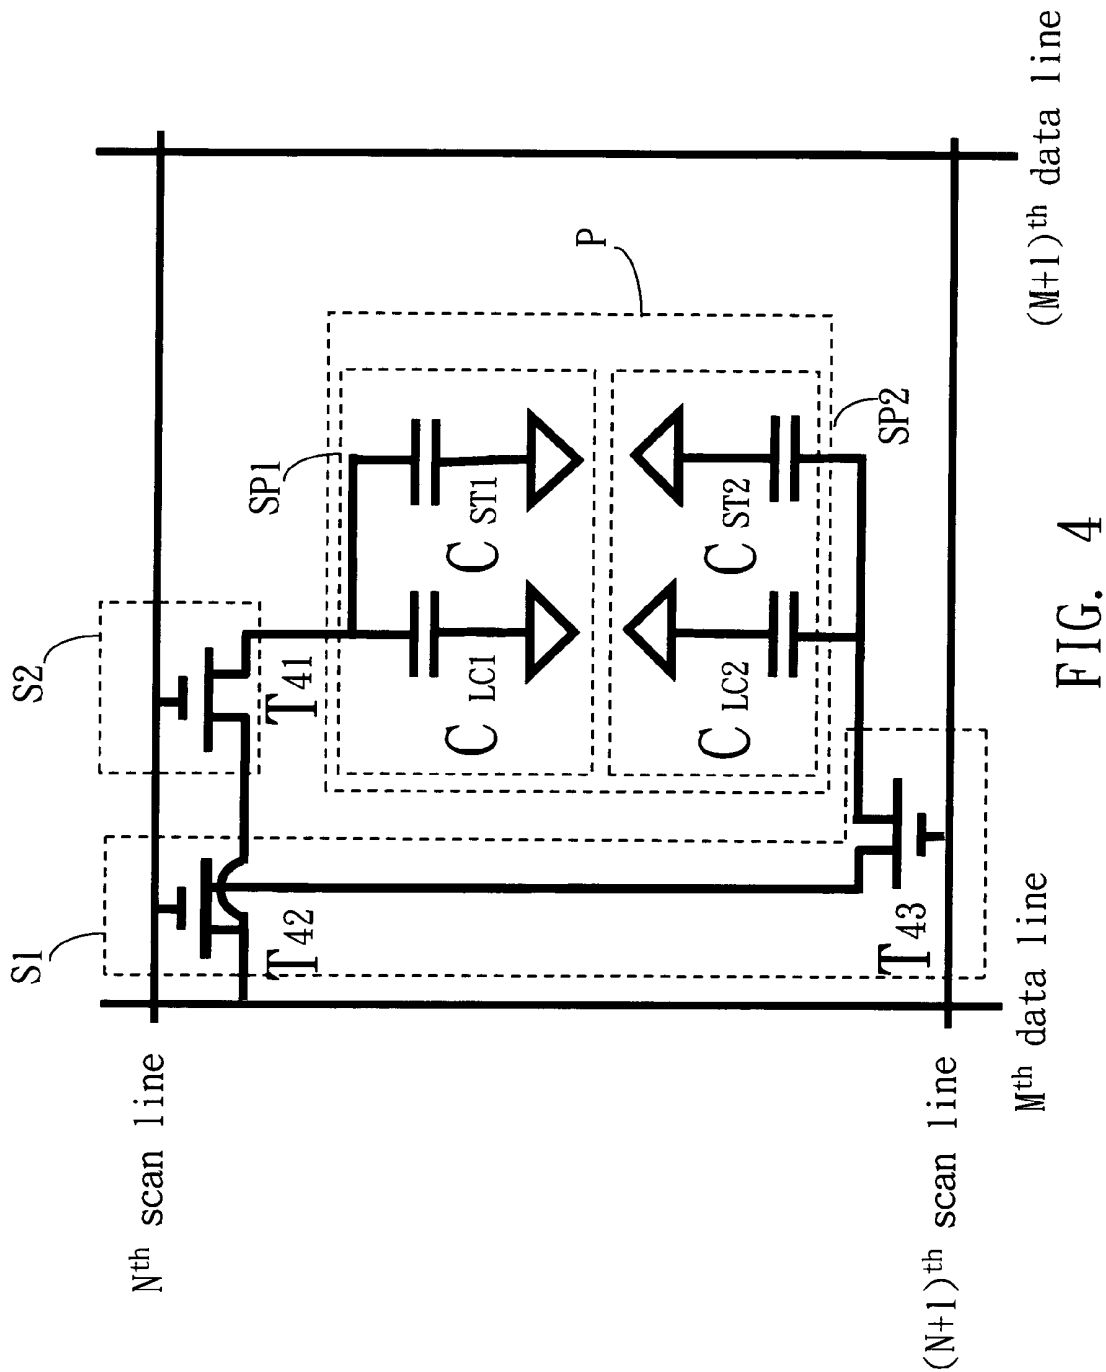


FIG. 4

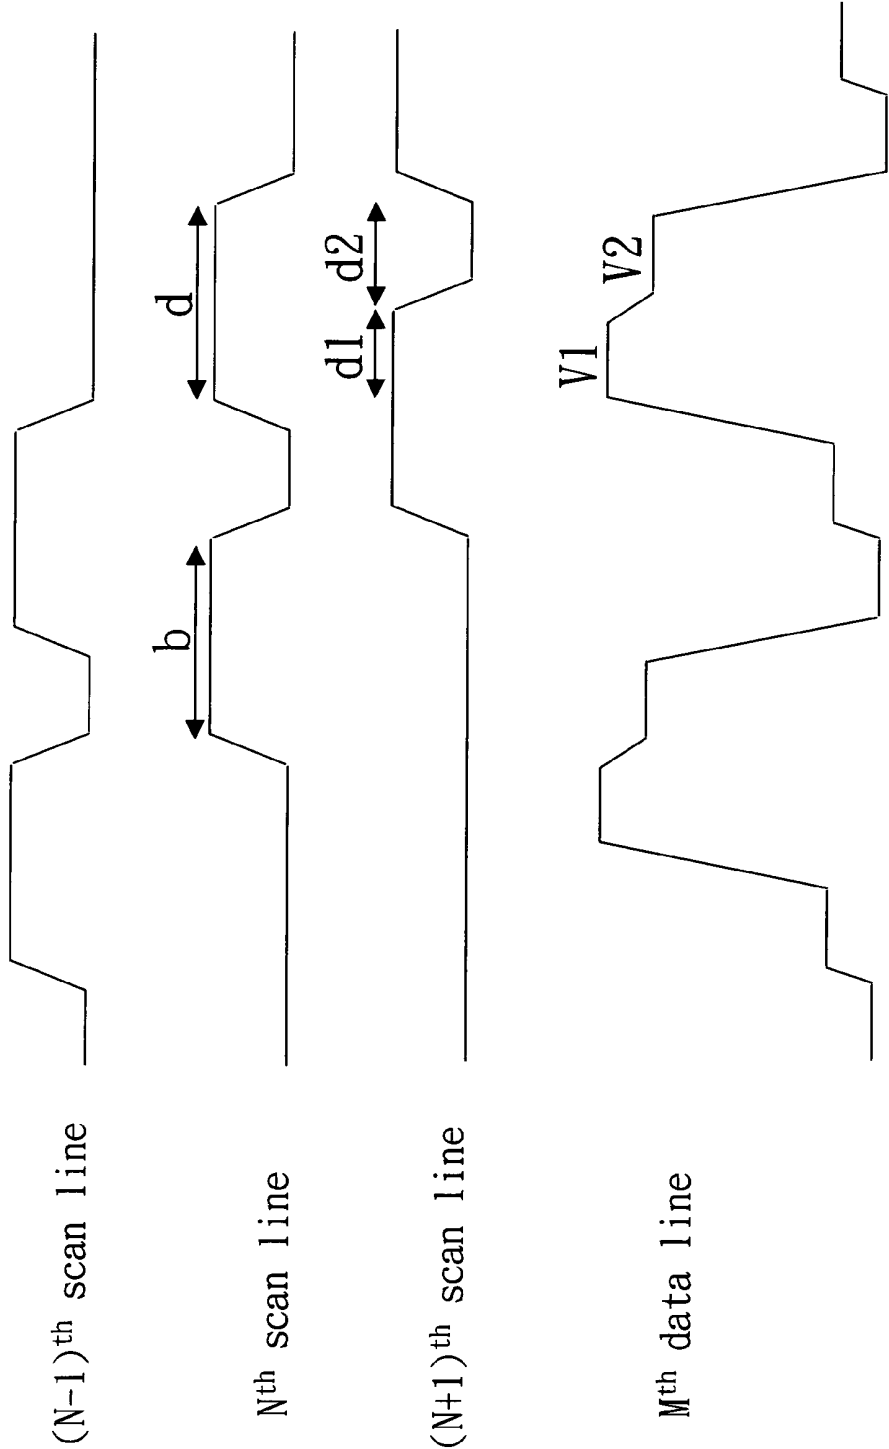


FIG. 5

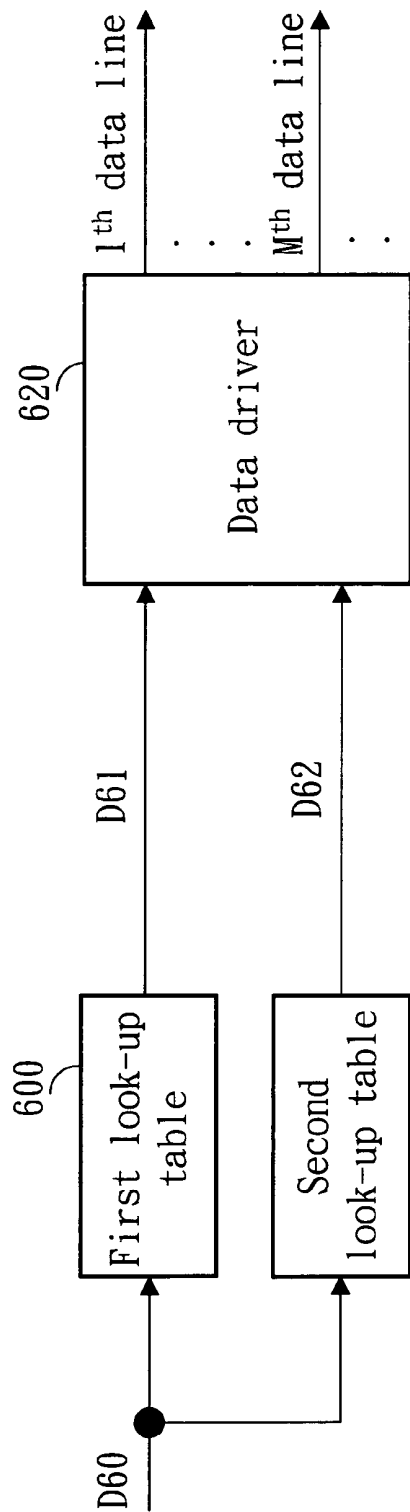


FIG. 6A





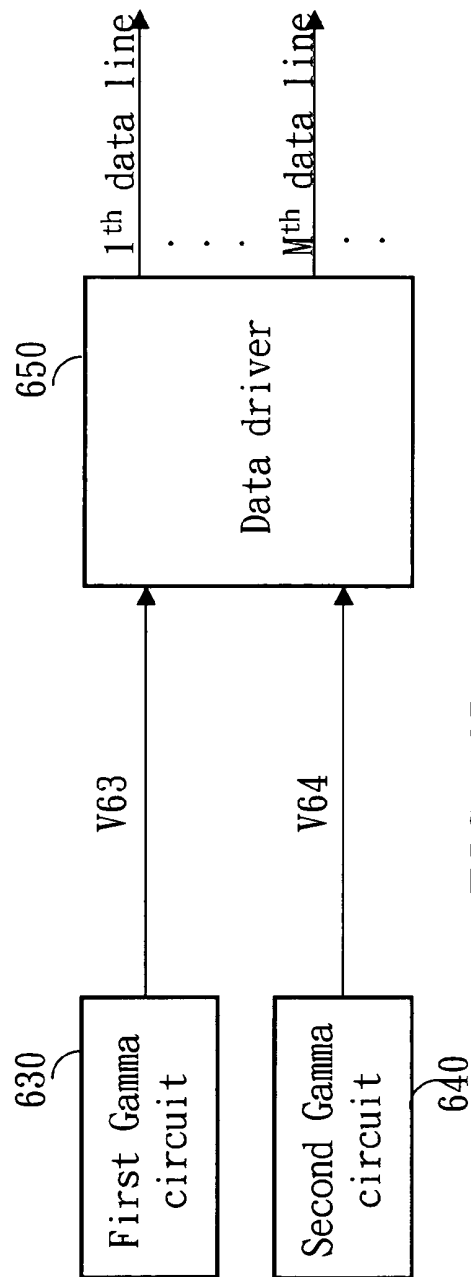


FIG. 6B

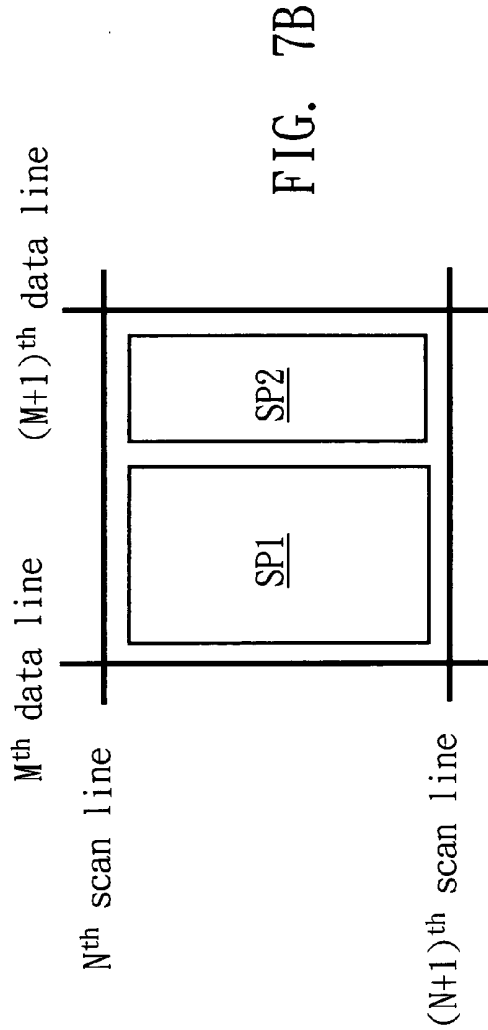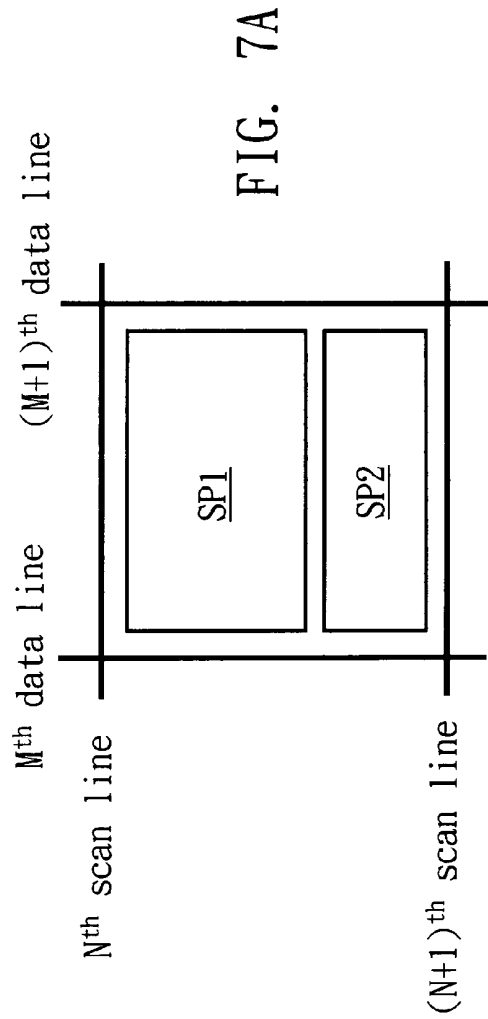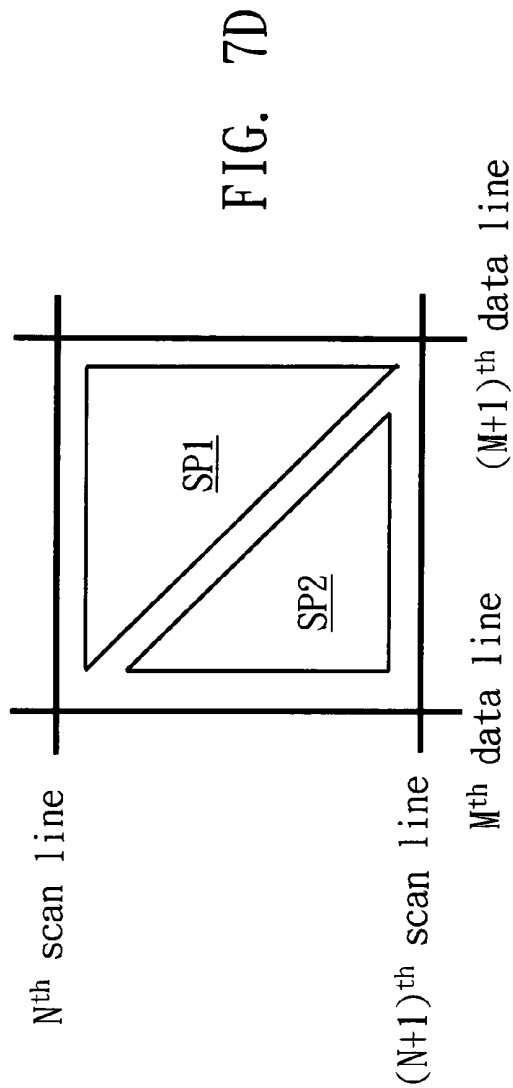

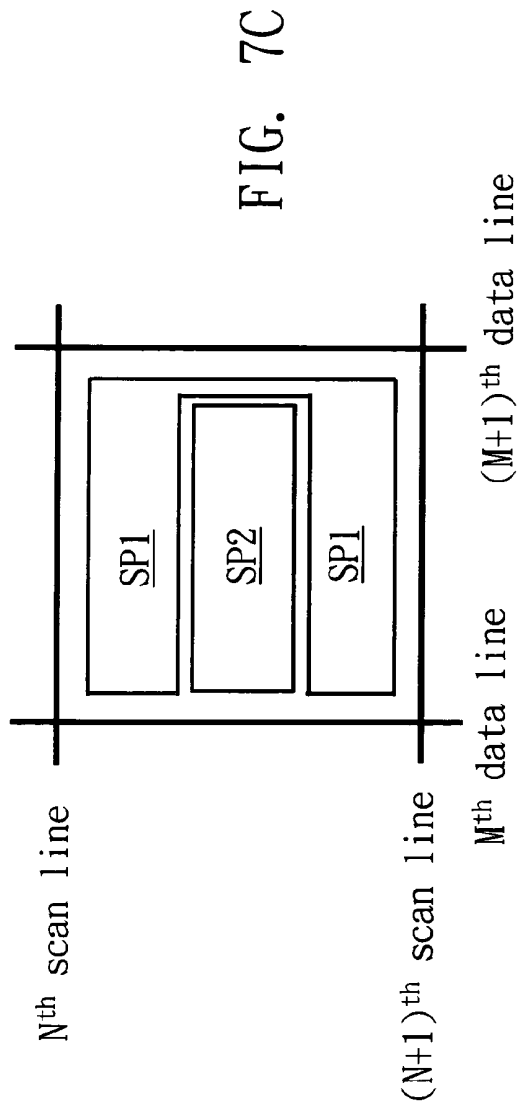

LOW COLOR-SHIFT LIQUID CRYSTAL DISPLAY AND DRIVING METHOD THEREFOR

[0001] This application claims the benefit of Taiwan Patent application Serial No. 95107989, filed Mar. 9, 2006, the subject matter of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The invention relates in general to a liquid crystal display and a driving method therefor, and more particularly to a low color-shift liquid crystal display and a driving method therefor.

[0004] 2. Description of the Related Art

[0005] Along with the trend in thinning the thickness of display, liquid crystal display is currently widely applied in various electronic products such as mobile phone, notebook, and color TV, and so on. However, in a conventional color liquid crystal display, only one driving voltage is provided to a pixel during a frame period, therefore the corresponding liquid crystal tilts to an angle and results in color-shift due to the change in the view-angle. As shown in FIG. 1, a conventional pixel equivalent circuit diagram is shown. The pixel is disposed at the junction of the M^{th} data line and the N^{th} scan line. The equivalent circuit includes a thin film transistor T_{11} , a liquid crystal capacitor C_{LC} , and a storage capacitor C_{ST} . As shown in FIG. 1, the pixel is controlled by the thin film transistor T_{11} , such that only one driving voltage is provided to the pixel during a frame period.

[0006] FIG. 2 is a transmittance vs. driving voltage diagram of a conventional liquid crystal display under different view-angles (θ). FIG. 3 is a grey level vs. driving voltage diagram of a conventional liquid crystal display under different view-angles (θ). As shown in FIG. 2 and FIG. 3, under the same driving voltage or the same grey level, different view-angles will result in different levels of transmittance, hence causing color-shift to the display frame. Therefore, how to improve color-shift to enhance the image quality of liquid crystal display has become an imminent challenge to the liquid crystal display industry.

SUMMARY OF THE INVENTION

[0007] It is therefore an object of the invention to provide a color-shift liquid crystal display and a driving method therefor capable of effectively reducing color-shift to improve the image quality of the display.

[0008] The invention achieves the above-identified object by providing a liquid crystal display including a number of scan lines, a number of data lines, a pixel, a first switch circuit, and a second switch circuit. The scan lines include an N^{th} scan line and an $(N+1)^{th}$ scan line, where N is a positive integer. The pixel includes a first sub-pixel and a second sub-pixel. The first switch circuit is coupled to the N^{th} scan line and the $(N+1)^{th}$ scan line and is used for controlling the second sub-pixel. The second switch circuit is coupled to the N^{th} scan line and is used for controlling the first sub-pixel. The pixel is used for displaying a red, a green, a blue, or a white color.

[0009] Other objects, features, and advantages of the invention will become apparent from the following detailed

description of the preferred but non-limiting embodiments. The following description is made with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 (Related Art) is a conventional pixel equivalent circuit diagram;

[0011] FIG. 2 (Related Art) is a transmittance vs. driving voltage diagram of a conventional liquid crystal display under different view-angles;

[0012] FIG. 3 (Related Art) is a grey level vs. driving voltage diagram of a conventional liquid crystal display under different view-angles;

[0013] FIG. 4 is a pixel equivalent circuit diagram of a liquid crystal display according to a preferred embodiment of the invention;

[0014] FIG. 5 is a method for driving the pixel of a liquid crystal display according to a preferred embodiment of the invention;

[0015] FIG. 6A is a first circuit block diagram for driving a data line according to a preferred embodiment of the invention;

[0016] FIG. 6B is a second circuit block diagram for driving a data line according to a preferred embodiment of the invention; and

[0017] FIG. 7A-FIG. 7D are respective layout diagrams of a first sub-pixel and a second sub-pixel according to a preferred embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0018] Referring to FIG. 4, a pixel equivalent circuit diagram of a liquid crystal display according to a preferred embodiment of the invention is shown. The pixel P is disposed at the junction of the M^{th} data line and the N^{th} scan line and includes a first sub-pixel $SP1$, a second sub-pixel $SP2$, a first switch circuit $S1$, and a second switch circuit $S2$. The first sub-pixel $SP1$ is equalized by a liquid crystal capacitor C_{LC1} and a storage capacitor C_{ST1} . The second sub-pixel $SP2$ is equalized by a liquid crystal capacitor C_{LC2} and a storage capacitor C_{ST2} .

[0019] The first switch circuit $S1$ includes a thin film transistor T_{42} and a thin film transistor T_{43} . The second switch circuit $S2$ includes a thin film transistor T_{41} . The thin film transistor T_{41} includes a first gate, a first source and a first drain. The first gate is controlled by the N^{th} scan line. The first source is coupled to the M^{th} data line. The first drain is coupled to the first sub-pixel $SP1$. The thin film transistor T_{42} includes a second gate, a second source and a second drain. The second gate is controlled by the N^{th} scan line. The second source is coupled to the M^{th} data line. The thin film transistor T_{43} includes a third gate, a third source and a third drain. The third gate is controlled by the $(N+1)^{th}$ scan line. The third source is coupled to the second drain. The third drain is coupled to the second sub-pixel $SP2$.

[0020] When the thin film transistor T_{42} and the thin film transistor T_{43} are turned on at the same time, a sub-pixel voltage $V1$ is transmitted to the first sub-pixel $SP2$ by the M^{th} data line. When the thin film transistor T_{41} is turned on but the thin film transistor T_{43} is not turned on, a sub-pixel voltage $V2$ is transmitted to the first sub-pixel $SP1$ by the M^{th} data line.

[0021] 18 Referring to both FIG. 4 and FIG. 5, FIG. 5 is a method for driving the pixel of a liquid crystal display according to a preferred embodiment of the invention. As shown in FIG. 5, during a frame period, the voltage level of the N^{th} scan line is maintained at high level for a duration b and a duration d. The duration d includes a duration d1 and a duration d2. The voltage level of the $(N+1)^{th}$ scan line is at a high level during the duration d1 and is at a low level during the duration d2. Therefore, the sub-pixel voltage V1 is provided to the first sub-pixel SP1 and the second sub-pixel SP2 respectively during the duration d1, and the sub-pixel voltage V2 is only provided to the first sub-pixel SP1 during the duration d2. Meanwhile, the first sub-pixel SP1 is driven by the sub-pixel voltage V2, and the second sub-pixel SP2 is driven by the sub-pixel voltage V1. Therefore, the total charge time for the first sub-pixel SP1 equals (d1+d2), but the total charge time for the second sub-pixel SP2 is d1 only.

[0022] The view-angle characteristic of the pixel P is the average of the accumulated sum of the view-angle characteristic of the first sub-pixel SP1 and the second sub-pixel SP2. Through appropriate design, the arrangement of the liquid crystal molecules of the first sub-pixel SP1 and the second sub-pixel SP2, the view-angle characteristic of the first sub-pixel SP1 and the view-angle characteristic of the second sub-pixel SP2 are compensated by each other, hence reducing the color-shift caused due to difference in view-angle. Besides, the data line of the present embodiment of the invention is driven according to the dot inversion mode. However, other modes such as the frame inversion mode, the row inversion mode and the column inversion mode are also applicable to the present embodiment of the invention.

[0023] Referring to FIG. 6A, a first circuit block diagram for driving a data line according to a preferred embodiment of the invention is shown. As shown in FIG. 6A, the circuit block diagram includes a first look-up table 600, a second look-up table 610 and a data driver 620. The first look-up table 600 is used for outputting a first sub-pixel data value D61 for controlling the first sub-pixel SP1 according to original pixel data D60. The second look-up table 610 is used for outputting a second sub-pixel data value D62 for controlling the second sub-pixel SP2 according to the original pixel data D60. The data driver 620 is used for outputting a sub-pixel voltage V1 and a sub-pixel voltage V2 respectively corresponding to the first sub-pixel SP1 and the second sub-pixel SP2 to the M^{th} data line according to the first sub-pixel data value D61 and the second sub-pixel data value D62. By using the first look-up table 600 and the second look-up table 610 to control the sub-pixel voltage V1 and the sub-pixel voltage V2 respectively, the pixel P has two voltages within. Therefore, each grey level can be optimized to achieve optimum display effect.

[0024] When selecting a sub-pixel voltage V1 and a sub-pixel voltage V2 corresponding to each grey level, the present embodiment of the invention obtains an optimized view-angle for each grey level according to a trial-and-error method. Moreover, under the circumstances of certain grey levels such as the normally white state, the sub-pixel voltage V1 can be designed to be equal to the sub-pixel voltage V2 so as to avoid transmittance loss.

[0025] Referring to FIG. 6B, a second circuit block diagram for driving a data line according to a preferred embodiment of the invention is shown. As shown in FIG. 6B, the circuit block diagram includes a first Gamma circuit 630, a

second Gamma circuit 640 and a data driver 650. The first Gamma circuit 630 is used for generating a first group Gamma voltage V63 corresponding to the first sub-pixel SP1. The second Gamma circuit 640 is used for generating a second group Gamma voltage V64 corresponding to the second sub-pixel SP2. The data driver 650 is used for respectively outputting a sub-pixel voltage V1 and a sub-pixel voltage V2 corresponding to the first sub-pixel SP1 and the second sub-pixel SP2 to the M^{th} data line according to the first group Gamma voltage V63 and the second group Gamma voltage V64. Likewise, the above effect achieved by using the first look-up table 600 and the second look-up table 610 which differs with the first look-up table 600 can also be achieved by using the first Gamma circuit 630 and the second Gamma circuit 640 which differs with the first Gamma circuit 630, and the same procedures are not repeated here.

[0026] Referring to FIGS. 7A~FIG. 7D, respective layout diagrams of the first sub-pixel SP1 and the second sub-pixel SP2 according to a preferred embodiment of the invention are shown. The arrangement of the first sub-pixel SP1 and the second sub-pixel SP2 is top down in FIG. 7A, left-to-right in FIG. 7B, alternating in FIG. 7C, and diagonally facing each other in triangular shapes in FIG. 7D. In the present embodiment of the invention, since the total charge time for the second sub-pixel SP2 is shorter than the total charge time for the first sub-pixel SP1, the layout area of the first sub-pixel SP1 is larger than the layout area of the second sub-pixel SP2 to prevent the second sub-pixel SP2 from having insufficient charge time. The preferable ratio of the layout area of the first sub-pixel SP1 to the layout area of the second sub-pixel SP2 ranges approximately 9:1~1:1.

[0027] According to the present embodiment of the invention, a pixel is divided into a first sub-pixel and a second sub-pixel, and by means of different driving methods, the two sub-pixels of the pixel are respectively driven by two different voltages, causing two different angles of inclination to the liquid crystal such that the optical effect in the display domain of the two sub-pixels can compensate for each other. Take the multi-domain vertical alignment liquid crystal display for example. The conventional four display domains are changed into eight display domains, such that the difference between the luminance when the display is viewed from a front view-angle and the luminance when the display is viewed from a slant view-angle is compensated, and that the view-angle effect of the liquid crystal display using eight display domains is better than the view-angle effect of the liquid crystal display using four display domains. Take the transmissive liquid crystal display for example. The pixels in the reflective area and the pixels in the transmissive area are driven by two different voltages respectively, such that the optical effect in the reflective area is matched to the optical effect in the transmissive area. If a twisted nematic liquid crystal display is used, the color-shift caused by the difference in view-angle can also be reduced by increasing the number of display domains.

[0028] While the invention has been described by way of example and in terms of a preferred embodiment, it is to be understood that the invention is not limited thereto. On the contrary, it is intended to cover various modifications and similar arrangements and procedures, and the scope of the appended claims therefore should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements and procedures.

What is claimed is:

1. A liquid crystal display, comprising:
 - a plurality of scan lines having an N^{th} scan line and an $(N+1)^{th}$ scan line, where N is a positive integer;
 - a plurality of data lines having an M^{th} data line, where M is a positive integer;
 - a pixel having a first sub-pixel and a second sub-pixel, the first sub-pixel and the second sub-pixel being both disposed between the N^{th} scan line and the $(N+1)^{th}$ scan line, the first sub-pixel and the second sub-pixel being both disposed on the same side of the M^{th} data line;
 - a first switch circuit, electrically coupled to both the N^{th} scan line and the $(N+1)^{th}$ scan line, for controlling the second sub-pixel; and
 - a second switch circuit, electrically coupled to the N^{th} scan line, for controlling the first sub-pixel.
2. The liquid crystal display of claim 1, wherein the first switch circuit comprises:
 - a first transistor having a first gate, a first source and a first drain, the first gate being controlled by the N^{th} scan line, the first source being coupled to the M^{th} data line; and
 - a second transistor having a second gate, a second source and a second drain, the second gate being controlled by the $(N+1)^{th}$ scan line, the second source being coupled to the first drain, the second drain being coupled to the second sub-pixel, wherein when the first transistor and the second transistor are turned on at the same time, the second sub-pixel receives a sub-pixel voltage from the M^{th} data line via the first transistor and the second transistor.
3. The liquid crystal display of claim 1, wherein the ratio of the layout area of the first sub-pixel to the layout area of the second sub-pixel ranges approximately from 9:1 to 1:1.
4. The liquid crystal display of claim 1, wherein the layout area of the first sub-pixel is larger than the layout area of the second sub-pixel.
5. The liquid crystal display of claim 1, further comprising:
 - a first look-up table for outputting a first sub-pixel data value to control the first sub-pixel according to an original pixel data;
 - a second look-up table for outputting a second sub-pixel data value to control the second sub-pixel according to the original pixel data; and
 - a data driver, electrically coupled to the data lines, for outputting a first sub-pixel voltage and a second sub-pixel voltage corresponding to the first sub-pixel and the second sub-pixel, respectively, according to the first sub-pixel data value and the second sub-pixel data value.
6. The liquid crystal display of claim 1, further comprising:
 - a first Gamma circuit for generating a first group Gamma voltage corresponding to the first sub-pixel;
 - a second Gamma circuit for generating a second group Gamma voltage corresponding to the second sub-pixel; and
 - a data driver, electrically coupled to the data lines, for outputting a first sub-pixel voltage and a second sub-pixel voltage corresponding to the first sub-pixel and the second sub-pixel, respectively, according to the first group Gamma voltage and the second group Gamma voltage.
7. A method for driving a liquid crystal display, the liquid crystal display comprising a plurality of data lines, a plurality of scan lines and a pixel, the scan lines comprising an N^{th} scan line and an $(N+1)^{th}$ scan line, N being a positive integer, the data lines comprising an M^{th} data line, M being a positive integer, the pixel having a first sub-pixel and a second sub-pixel, the first sub-pixel and the second sub-pixel being disposed between the N^{th} scan line and the $(N+1)^{th}$ scan line, the first sub-pixel and the second sub-pixel being disposed on the same side with the M^{th} data line, the method comprising:
 - generating a first pulse signal and a second pulse signal on the first the scan line during a frame period, the second pulse signal having a duration;
 - generating a third pulse signal and a fourth pulse signal on the second scan line during the frame period;
 - transmitting a second sub-pixel voltage on the M^{th} data line to the second sub-pixel when the second pulse signal and the third pulse signal are overlapped during the duration; and
 - transmitting a first sub-pixel voltage on the M^{th} data line to the first sub-pixel when the second pulse signal and the third pulse signal are not overlapped during the duration.
8. The method of claim 7, further comprising:
 - generating a first sub-pixel data value to control the first sub-pixel according to an original pixel data;
 - generating a second sub-pixel data value to control the second sub-pixel according to the original pixel data; and
 - generating a first sub-pixel voltage and a second sub-pixel voltage corresponding to the first sub-pixel and the second sub-pixel, respectively, according to the first sub-pixel data value and the second sub-pixel data value.
9. The method of claim 7, further comprising:
 - generating a first group Gamma voltage corresponding to the first sub-pixel;
 - generating a second group Gamma voltage corresponding to the second sub-pixel; and
 - generating a first sub-pixel voltage and a second sub-pixel voltage corresponding to the first sub-pixel and the second sub-pixel, respectively, according to the first group Gamma voltage and the second group Gamma voltage.

* * * * *

专利名称(译)	低色移液晶显示器及其驱动方法		
公开(公告)号	US20070211007A1	公开(公告)日	2007-09-13
申请号	US11/525087	申请日	2006-09-22
[标]申请(专利权)人(译)	友达光电股份有限公司		
申请(专利权)人(译)	友达光电.		
当前申请(专利权)人(译)	友达光电.		
[标]发明人	SU JENN JIA TIEN MING FENG YANG CHIA LENG CHANG TING JUI CHEN PO LUN		
发明人	SU, JENN-JIA TIEN, MING-FENG YANG, CHIA-LENG CHANG, TING-JUI CHEN, PO-LUN		
IPC分类号	G09G3/36		
CPC分类号	G09G3/2074 G09G3/3637 G09G3/3648 G09G2320/0285 G09G2300/0809 G09G2320/028 G09G2300/0456		
优先权	095107989 2006-03-09 TW		
其他公开文献	US7907131		
外部链接	Espacenet USPTO		

摘要(译)

提供一种液晶显示器，包括多条扫描线，多条数据线，像素，第一开关电路和第二开关电路。扫描线包括第N扫描线和第(N+1)扫描线，其中N是正整数。像素包括第一子像素和第二子像素。第一开关电路耦合到第N扫描线和第(N+1)扫描线，并用于控制第二子像素。第二开关电路耦接第N扫描线，用以控制第一子像素。像素用于显示红色，绿色，蓝色或白色。

