



US007116384B2

(12) **United States Patent**  
**Chen**

(10) **Patent No.:** **US 7,116,384 B2**  
(45) **Date of Patent:** **Oct. 3, 2006**

(54) **METHOD FOR MANUFACTURING A PANEL OF TFT LCD HAVING PARTICULAR TFT STRUCTURE ABOVE PIXEL ELECTRODE**

(75) Inventor: **Hung-De Chen**, Gueishan (TW)

(73) Assignee: **Quanta Display Inc.**, Tao Yuan Shien (TW)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 260 days.

(21) Appl. No.: **10/902,855**

(22) Filed: **Aug. 2, 2004**

(65) **Prior Publication Data**

US 2005/0243230 A1 Nov. 3, 2005

(30) **Foreign Application Priority Data**

Apr. 30, 2004 (TW) ..... 93112234 A

(51) **Int. Cl.**

**G02F 1/136** (2006.01)

**H01L 21/00** (2006.01)

(52) **U.S. Cl.** ..... **349/47; 349/43; 438/158**

(58) **Field of Classification Search** ..... **349/43, 349/47, 51; 438/30**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,023,021 B1 \* 4/2006 Yamazaki et al. .... 257/98

\* cited by examiner

*Primary Examiner*—Andrew Schechter



*Assistant Examiner*—Lucy Chien

(74) *Attorney, Agent, or Firm*—Bacon & Thomas

(57) **ABSTRACT**

A method for manufacturing a panel of a thin film transistor liquid crystal display device with three mask processes is disclosed. The method includes following steps: forming a transparent conductive layer, a first insulating layer, and a second metal layer on a transparent substrate in sequence; forming a source area, a drain area, a transparent electrode area, and data signal lines through a half-tone photolithography and an etching; forming a semiconducting layer and a second insulating layer on the substrate in sequence; forming a semiconducting channel area in a thin film transistor area and contacts on the source area, the drain area, and the data signal lines through a photolithography and an etching; forming a third metal layer and a third insulating layer on the substrate in sequence; forming scanning signal lines and gate lines through a photolithography and an etching.

**16 Claims, 10 Drawing Sheets**

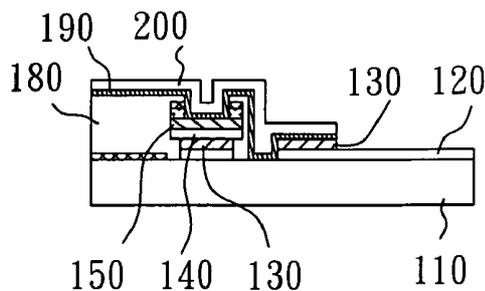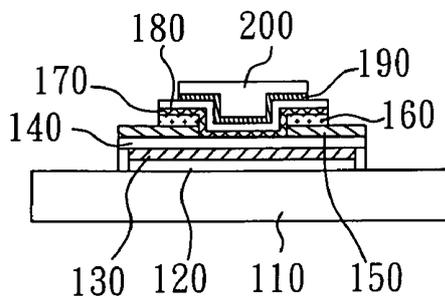

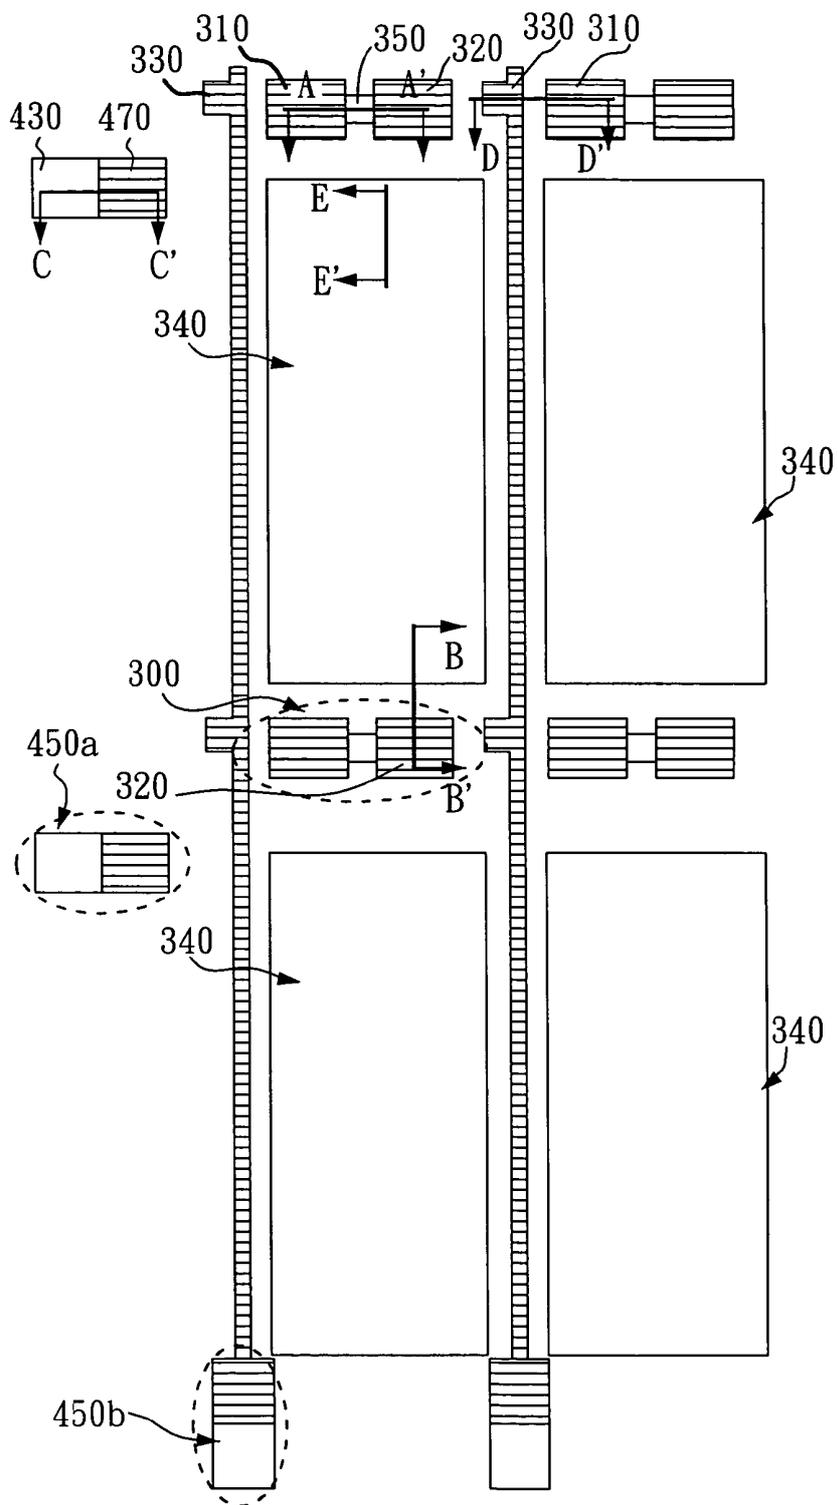


FIG. 1

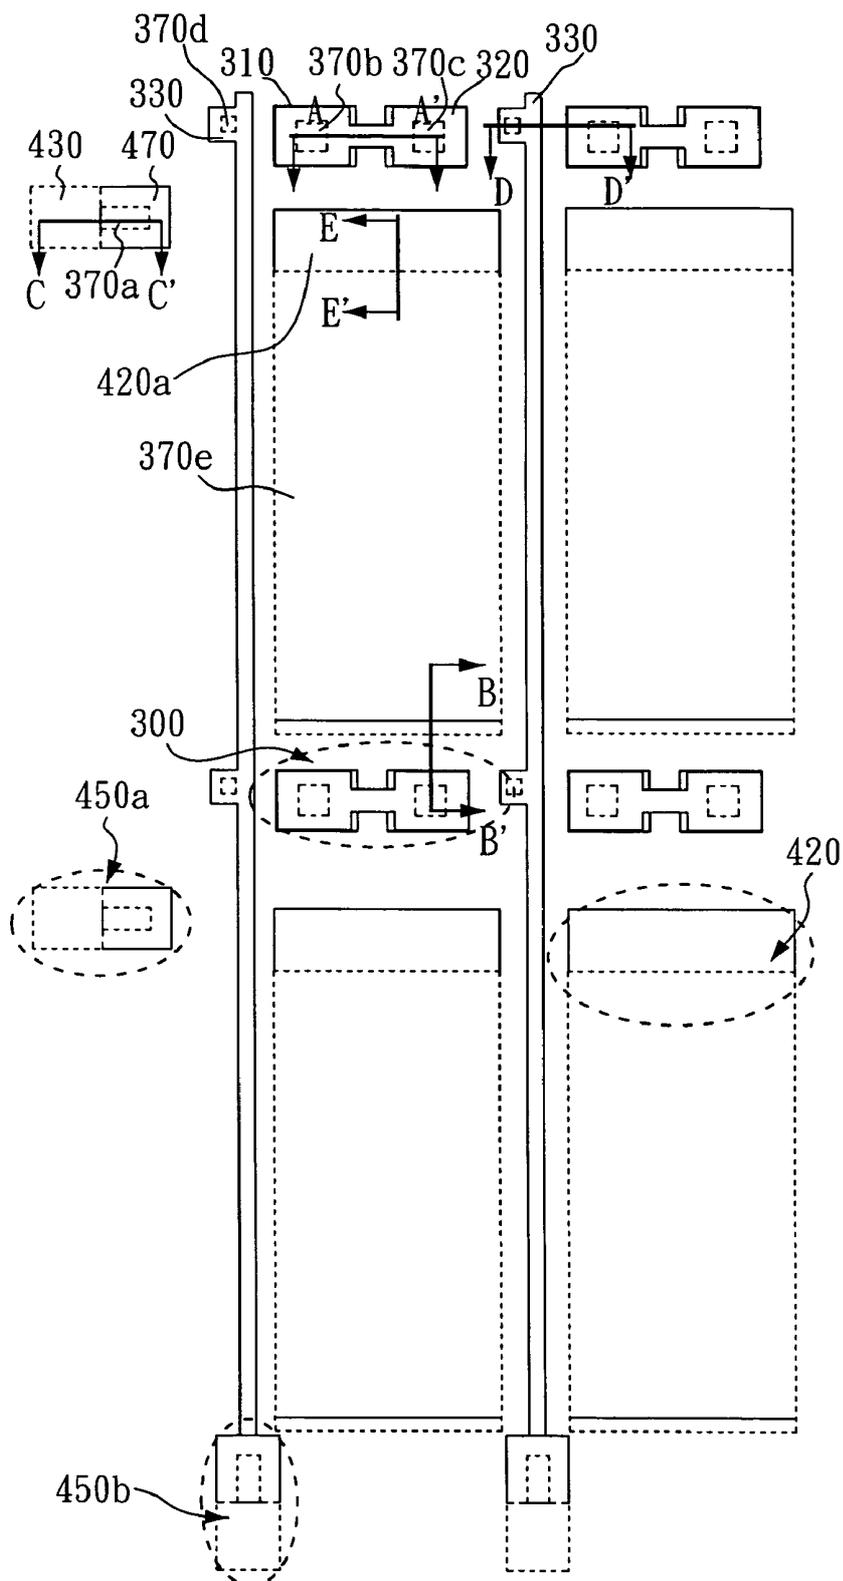


FIG. 2

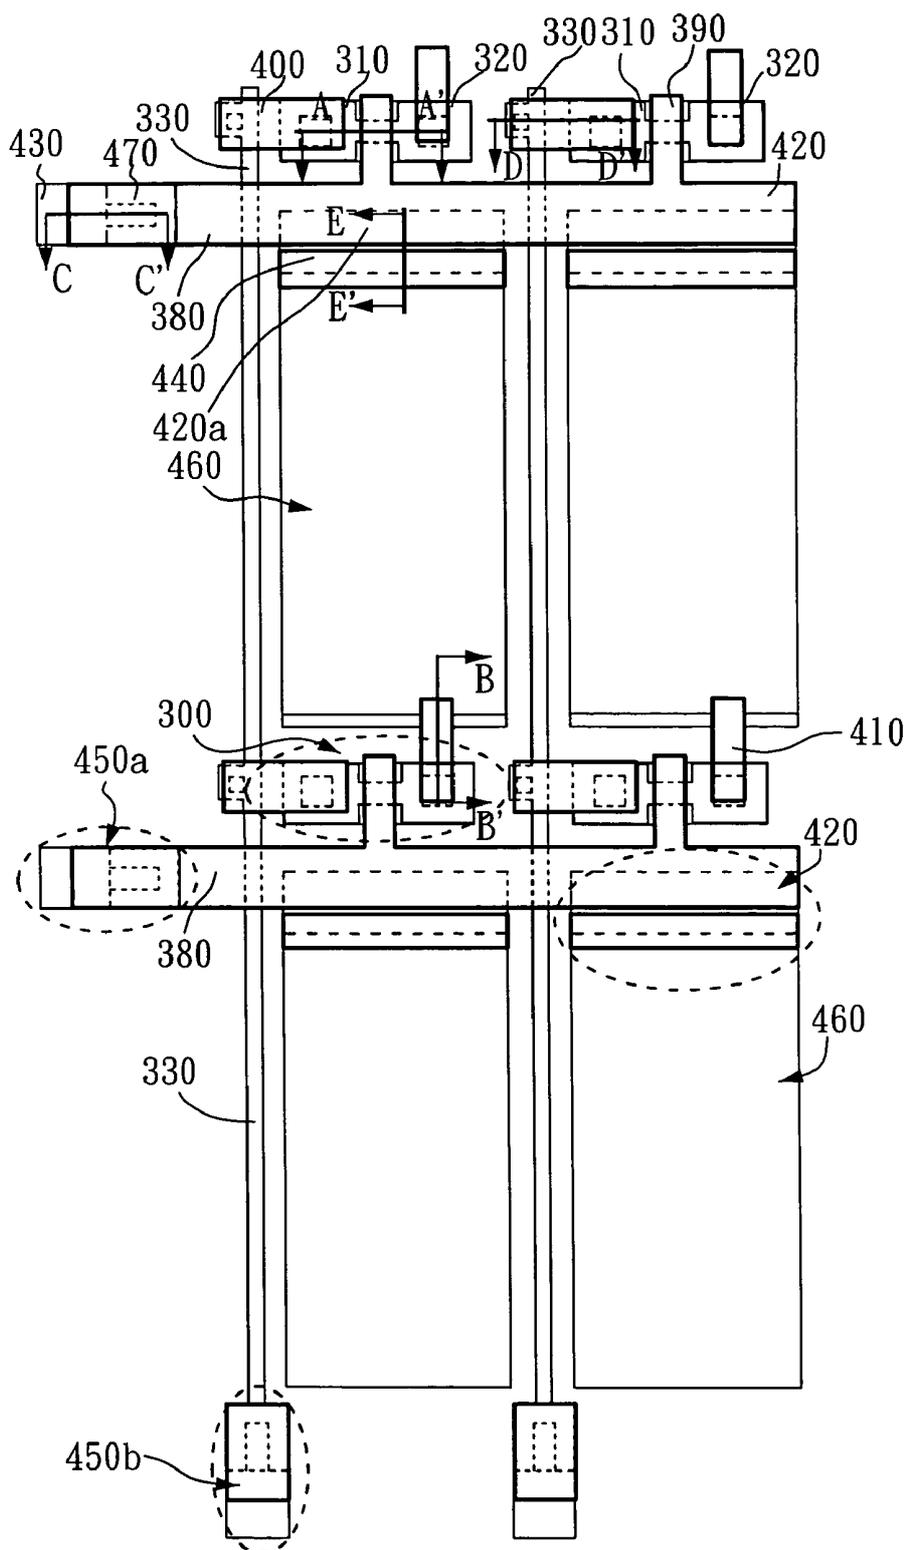


FIG. 3

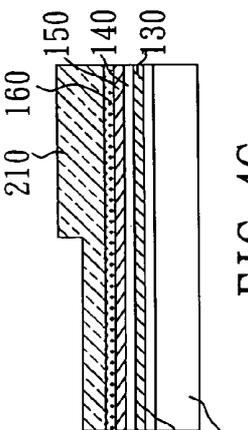


FIG. 4C

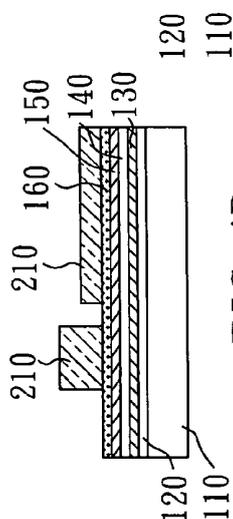


FIG. 4B

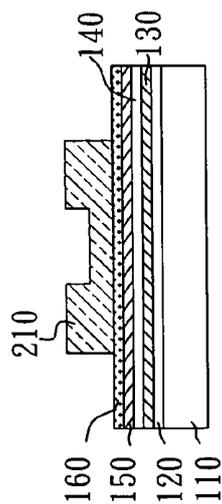


FIG. 4A

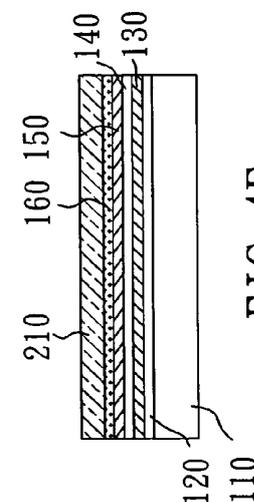


FIG. 4E

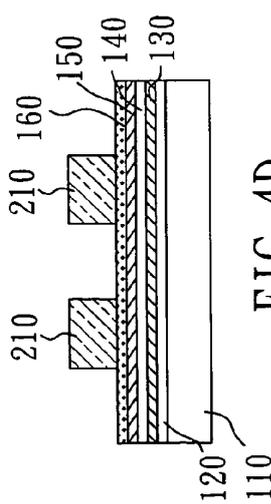


FIG. 4D

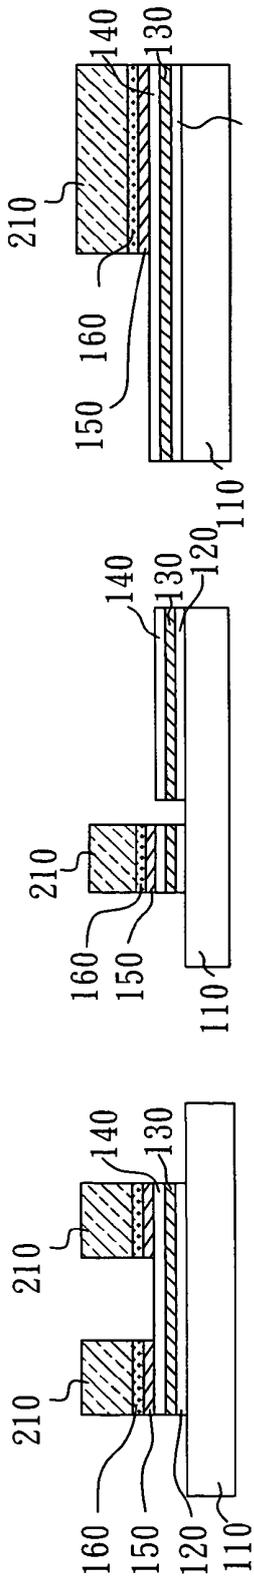


FIG. 5A

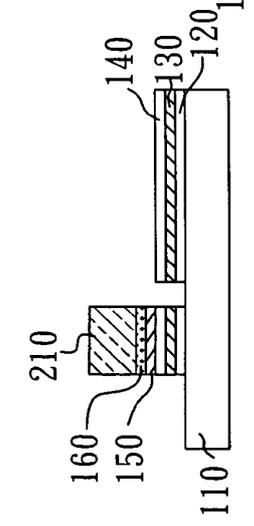


FIG. 5B

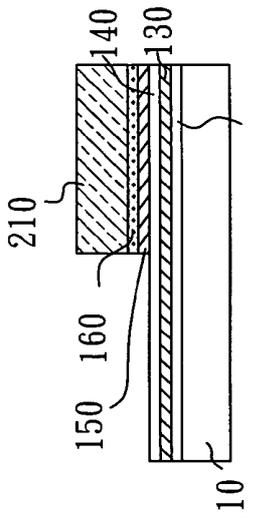


FIG. 5C

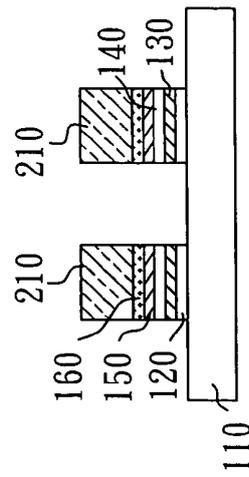


FIG. 5D

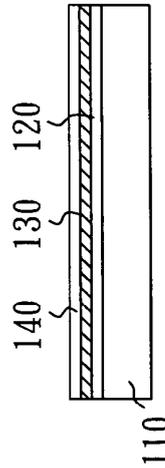


FIG. 5E

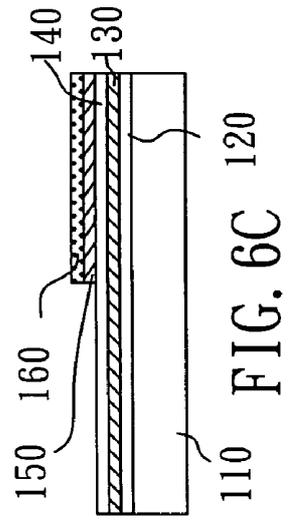


FIG. 6A

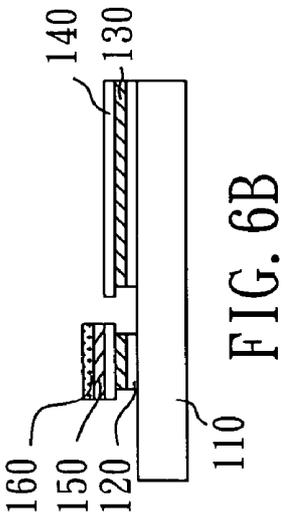


FIG. 6B

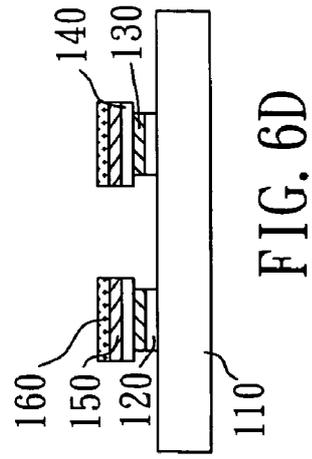


FIG. 6C

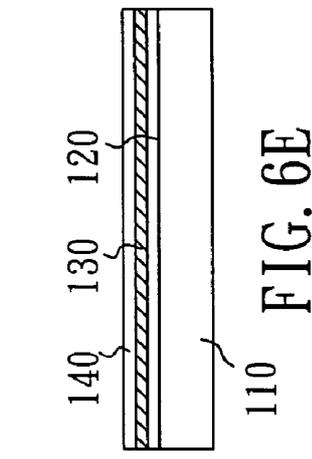


FIG. 6D

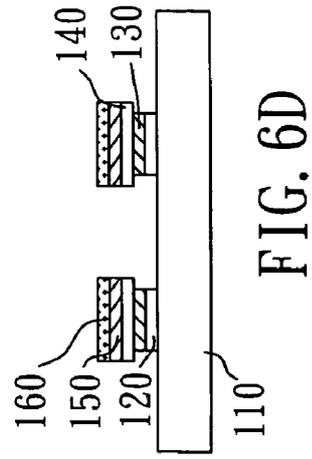


FIG. 6E

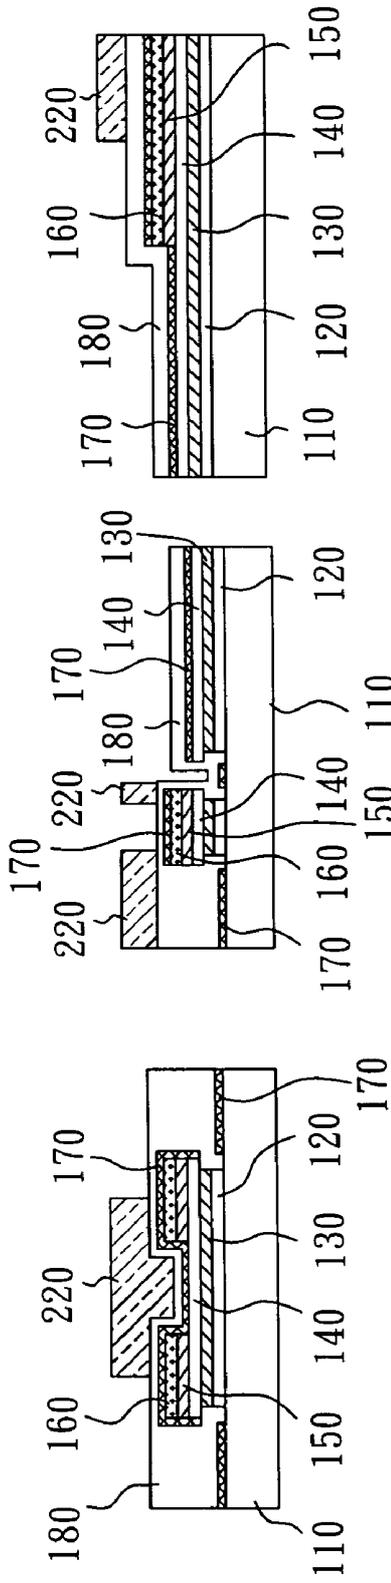


FIG. 7C

FIG. 7B

FIG. 7A

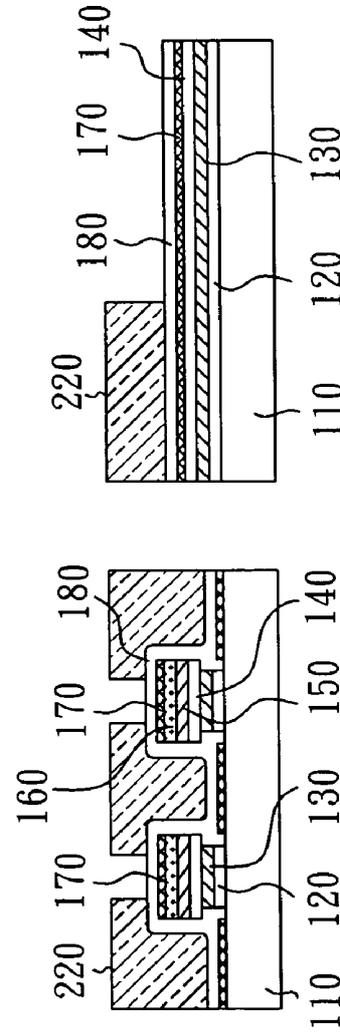


FIG. 7E

FIG. 7D



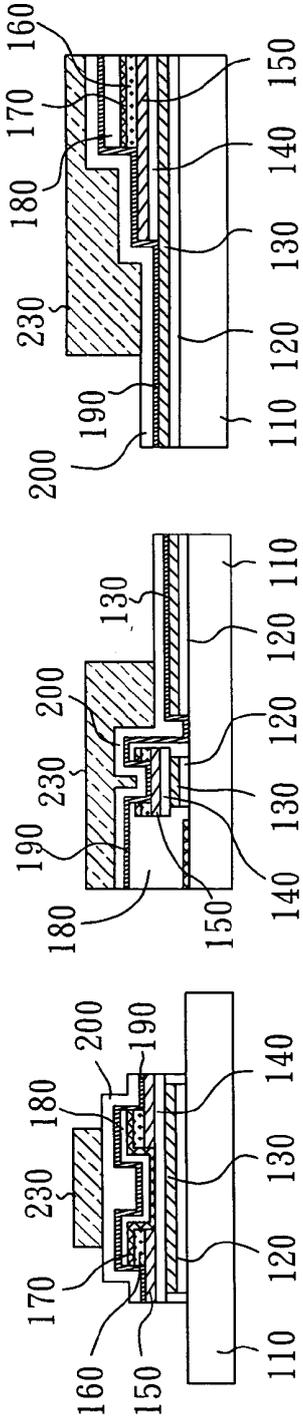


FIG. 9C

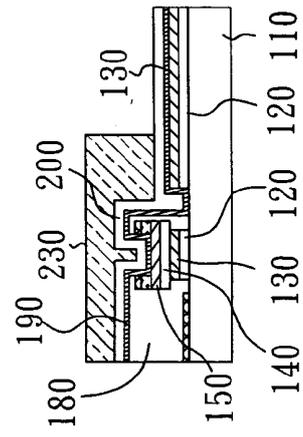


FIG. 9B

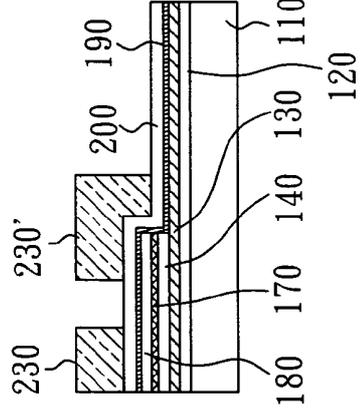


FIG. 9E

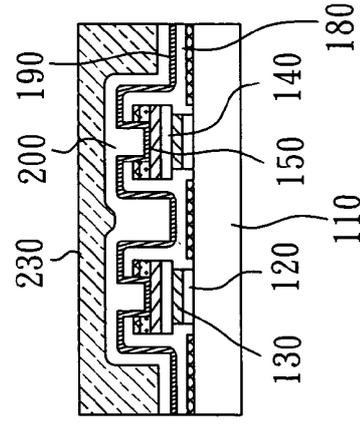


FIG. 9D

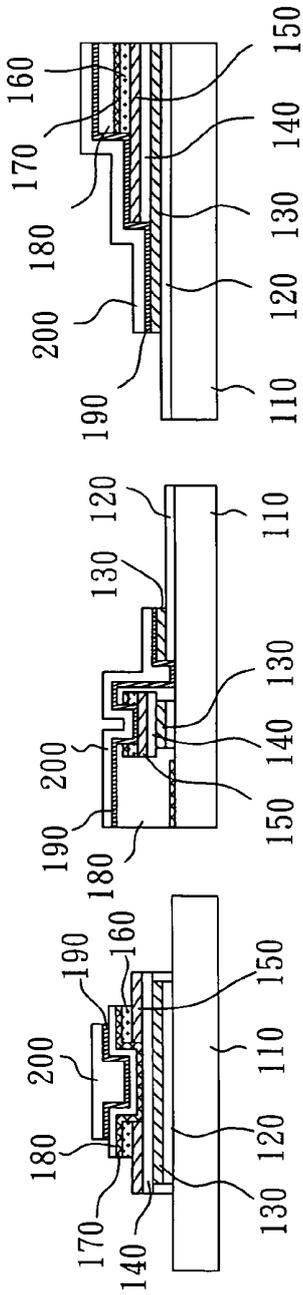


FIG. 10A

FIG. 10B

FIG. 10C

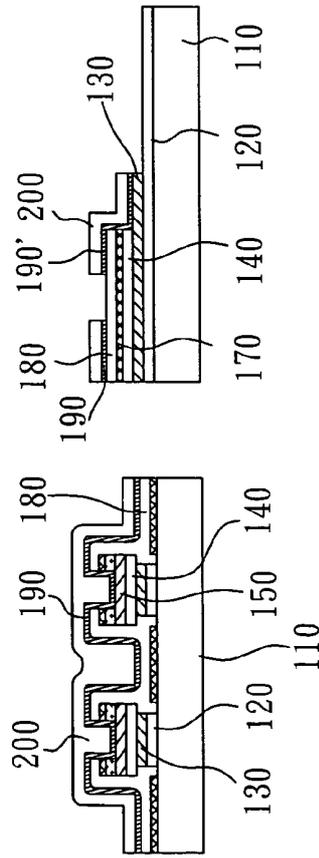


FIG. 10D

FIG. 10E

## METHOD FOR MANUFACTURING A PANEL OF TFT LCD HAVING PARTICULAR TFT STRUCTURE ABOVE PIXEL ELECTRODE

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention relates to a method for manufacturing a panel of a thin film transistor liquid crystal display device and, more particularly, to a method for manufacturing a panel of a thin film transistor liquid crystal display device with three mask processes.

#### 2. Description of Related Art

Comparing with the cathode ray tube display, the liquid crystal display (LCD) has advantages on low power consumption, small occupied space, and free of irradiation. Depending on the liquid crystal operating principle, LCD device includes various specifications, which mainly classify to a passive matrix liquid crystal display (PM LCD) and a thin film transistor liquid crystal display (TFT LCD), wherein PM LCD further comprises twisted nematic (TN), super twisted nematic (STN), double layer twisted nematic (DSTN). The difference between these two specifications, the PM LCD and the TFT LCD, is about the orientation of the liquid crystal molecules affected by an electric field in the liquid crystal. The arrangement of liquid crystal molecules for the PM LCD automatically returns to the original direction while current off and then is rotated to other direction in the next recharge, so the PM LCD lacks of memory. But the arrangement of liquid crystal molecules for the TFT LCD doesn't return to the original direction while current off, so the TFT LCD can keep the memory.

When applied to a LCD TV, PM LCD, even a STN LCD, has disadvantages on low response speed and high limitation of colors. However, the TFT LCD can control the arrangement of liquid crystal molecules to induce the lights with various refractions while passing through therein. Furthermore, with combination of an orientation layer, a polarizer, or a color filter, an image can be generated with high resolution, wide view angle, high response speed, and high contrast. As a result, the TFT LCD can be applied in a field of a high-definition television (HDTV).

But the TFT LCD is still not popular in a consumer market due to the chief disadvantage on the high cost, especially the photolithography step for manufacturing a panel thereof. So how to reduce the photolithography process steps becomes the main research recently.

Therefore, it is desirable to provide an improved speech recognition method to mitigate and/or obviate the aforementioned problems.

### SUMMARY OF THE INVENTION

The object of the present invention is to provide a method for manufacturing a panel of a thin film transistor liquid crystal display device with only three mask processes, which efficiently reduce the producing cost and simplify the overall process.

To achieve the object, the method for manufacturing a panel of a thin film transistor liquid crystal display device of the present invention, having a thin film transistor area and a pixel electrode area within every pixel area, which is defined by a plurality of data signal lines and scanning signal lines, includes following steps: providing a transparent substrate; forming a transparent conductive layer, a first insulating layer, and a second metal layer on the substrate in sequence; forming a source area and a drain area in the

second metal layer within every thin film transistor area, forming a transparent electrode area in the transparent conductive layer within every pixel electrode area, and forming the data signal lines in the second metal layer at two peripheral sides of every pixel area through a halftone photolithography and an etching; forming a semiconducting layer and a second insulating layer on the substrate in sequence; forming a semiconducting channel area in the semiconducting layer within the thin film transistor area, and forming a plurality of contacts on the source area, the drain area, and the data signal lines through a photolithography and an etching; forming a third metal layer and a third insulating layer on the substrate in sequence; and forming the scanning signal lines, a plurality of gate lines connected with the scanning signal lines, a plurality of first connecting lines between the source area and the data signal lines, and a plurality of second connecting lines between the drain area and the transparent electrode area through a photolithography and an etching.

The method for manufacturing a panel of a thin film transistor liquid crystal display device with three mask processes preferably comprises forming a pattern of a peripheral circuit in the transparent conductive layer located around the edges of a TFT LCD panel simultaneously with forming the source area, the drain area, the transparent electrode area, and the data signal lines, wherein at least one end of the peripheral circuit is electrically connected with the data signal line or the scanning signal line and the other end of the peripheral circuit is electrically connected with an external driver for controlling the data signal lines or the scanning signal lines. The structure of the peripheral circuit connected with the data signal lines and the one connected with the scanning signal lines can be equivalent or non-equivalent. In addition, after forming a transparent conductive layer, a first metal layer is preferably formed between the transparent conductive layer and the first insulating layer for forming a channel shielding layer located in the thin film transistor area to prevent the abnormal operation of the TFT resulting from the lights transmitting from the transparent substrate. The etching for forming an undercut of the transparent conductive layer after the halftone photolithography is an over-etching, thereby the semiconducting layer and the transparent conductive layer are not connected each other in order to avoid circuit shorting. After forming the second metal layer, an n+ silicon layer is preferably formed on the surface of the second metal layer in order to form an Ohmic contact layer for the thin film transistor to enhance the operating efficiency.

The method for manufacturing a panel of a TFT LCD device may further comprises forming a plurality of capacitors to storage the signal within every pixel area, wherein the bottom plate of the capacitor is extended from the pixel electrode area, and includes the second metal layer, the first metal layer, or the combination of both the first metal layer and the second metal layer; the top plate of the capacitor comprises the third metal layer. The top plate of the capacitor may be part of the scanning signal lines in order to increase the aperture ratio of the TFT LCD. The semiconducting layer generally is an amorphous silicon layer, and a polysilicon layer is acceptable. The transparent conductive layer generally is made of indium-tin oxide (ITO) or indium-zinc oxide (IZO). The first insulating layer, the second insulating layer, and the third insulating layer preferably are made of SiO<sub>2</sub>, Si<sub>3</sub>N<sub>4</sub>, and Si(OH)<sub>4</sub>. The second insulating layer may be an organic insulating layer. Furthermore, the third insulating layer may be a passivation layer for preventing the TFT from moisture and scratch.

Other objects, advantages, and novel features of the invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a top view of the first mask of one preferred embodiment according to the invention;

FIG. 2 is a top view of the second mask of one preferred embodiment according to the invention;

FIG. 3 is a top view of the third mask of one preferred embodiment according to the invention;

FIG. 4A is a cross-sectional view along the line A-A' after the photolithography at step (c) according to the invention;

FIG. 4B is a cross-sectional view along the line B-B' after the photolithography at step (c) according to the invention;

FIG. 4C is a cross-sectional view along the line C-C' after the photolithography at step (c) according to the invention;

FIG. 4D is a cross-sectional view along the line D-D' after the photolithography at step (c) according to the invention;

FIG. 4E is a cross-sectional view along the line E-E' after the photolithography at step (c) according to the invention;

FIG. 5A is a cross-sectional view along the line A-A' during the etching at step (c) according to the invention;

FIG. 5B is a cross-sectional view along the line B-B' during the etching at step (c) according to the invention;

FIG. 5C is a cross-sectional view along the line C-C' during the etching at step (c) according to the invention;

FIG. 5D is a cross-sectional view along the line D-D' during the etching at step (c) according to the invention;

FIG. 5E is a cross-sectional view along the line E-E' during the etching at step (c) according to the invention;

FIG. 6A is a cross-sectional view along the line A-A' after the over-etching at step (c) according to the invention;

FIG. 6B is a cross-sectional view along the line B-B' after the over-etching at step (c) according to the invention;

FIG. 6C is a cross-sectional view along the line C-C' after the over-etching at step (c) according to the invention;

FIG. 6D is a cross-sectional view along the line D-D' after the over-etching at step (c) according to the invention;

FIG. 6E is a cross-sectional view along the line E-E' after the over-etching at step (c) according to the invention;

FIG. 7A is a cross-sectional view along the line A-A' after the photolithography at step (e) according to the invention;

FIG. 7B is a cross-sectional view along the line B-B' after the photolithography at step (e) according to the invention;

FIG. 7C is a cross-sectional view along the line C-C' after the photolithography at step (e) according to the invention;

FIG. 7D is a cross-sectional view along the line D-D' after the photolithography at step (e) according to the invention;

FIG. 7E is a cross-sectional view along the line E-E' after the photolithography at step (e) according to the invention;

FIG. 8A is a cross-sectional view along the line A-A' after the etching at step (e) according to the invention;

FIG. 8B is a cross-sectional view along the line B-B' after the etching at step (e) according to the invention;

FIG. 8C is a cross-sectional view along the line C-C' after the etching at step (e) according to the invention;

FIG. 8D is a cross-sectional view along the line D-D' after the etching at step (e) according to the invention;

FIG. 8E is a cross-sectional view along the line E-E' after the etching at step (e) according to the invention;

FIG. 9A is a cross-sectional view along the line A-A' after the photolithography at step (g) according to the invention;

FIG. 9B is a cross-sectional view along the line B-B' after the photolithography at step (g) according to the invention;

FIG. 9C is a cross-sectional view along the line C-C' after the photolithography at step (g) according to the invention;

FIG. 9D is a cross-sectional view along the line D-D' after the photolithography at step (g) according to the invention;

FIG. 9E is a cross-sectional view along the line E-E' after the photolithography at step (g) according to the invention;

FIG. 10A is a cross-sectional view along the line A-A' after the etching at step (g) according to the invention;

FIG. 10B is a cross-sectional view along the line B-B' after the etching at step (g) according to the invention;

FIG. 10C is a cross-sectional view along the line C-C' after the etching at step (g) according to the invention;

FIG. 10D is a cross-sectional view along the line D-D' after the etching at step (g) according to the invention;

FIG. 10E is a cross-sectional view along the line E-E' after the etching at step (g) according to the invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

With reference to the bottom half part in FIG. 3, there is shown a thin film transistor area **300**, a pixel electrode area **460**, and a capacitor area **420** in every pixel area, which is surrounded by data signal lines **330** and scanning signal lines **380**. In addition, a pattern of a peripheral circuit, the combination of the peripheral circuit area **450a** with the peripheral circuit area **450b**, is formed outside the pixel areas on the panel of the TFT LCD device. The data signal lines **330** and the scanning signal lines **380** are controlled by signals from an external driver respectively through the peripheral circuit area **450b** and the peripheral circuit area **450a**. In this embodiment, the structure of the peripheral circuit area **450a** connected with the scanning signal lines **380** is as same as that of the peripheral circuit area **450b** connected with the data signal lines **330**, so the manufacturing flow of the peripheral circuit area **450b** in the following description will be omitted. In the following, the line A-A' shown in FIG. 1~FIG. 3 is from the source area **310** to the drain area **320**. The line B-B' shown in FIG. 1~FIG. 3 is from the drain area **320** to the pixel electrode area **460**. The line C-C' shown in FIG. 1~FIG. 3 is from the peripheral circuit area **450a** to the scanning signal line **380**. The line D-D' shown in FIG. 1~FIG. 3 is from the data signal lines **330** to the source area **310**. The line E-E' shown in FIG. 1~FIG. 3 is the profile of a top plate and a bottom plate of the capacitor area **420**.

The method for manufacturing a panel of a TFT LCD device comprises following steps:

Firstly, a transparent substrate **110** is provided at step (a).

Then, a transparent conductive layer **120**, a first metal layer **130**, a first insulating layer **140**, a second metal layer **150**, and an n+ silicon layer **160** are forming on the substrate in sequence at step (b).

A source area **310**, a drain area **320**, a plurality of channel shielding layers **350**, a pixel transparent conductive area **340**, data signal lines **330**, and a transparent peripheral circuit **430** are defined through a halftone photolithography at step (c). With reference to FIG. 1, there is shown the halftone mask with three exposure-type sections. The section inside the blank blocks is partially exposed, such as using the mask having slot-type area, the one marked by line-filled block is not exposed, and the rest is full exposed to removed all the layer on the transparent substrate **110**. After the halftone photolithography, the photoresist layer **210** for defining the source area **310**, the channel shielding layers **350**, and the drain area **320** along the line A-A' is formed as shown in FIG.4A, the photoresist layer **210** for

defining the drain area **320** and the pixel transparent conductive area **340** along the line B-B' is formed as shown in FIG. 4B, the photoresist layer **210** for defining the transparent peripheral circuit **430** and the peripheral second metal area **470** along the line C-C' is formed as shown in FIG. 4C, the photoresist layer **210** for defining the data signal lines **330** and the source area **310** along the line D-D' is formed as shown in FIG. 4D, and the photoresist layer **210** for defining the bottom plate of the capacitor area **420** overlapping with pixel transparent conductive area **340** along the line E-E' is formed as shown in FIG. 4E, wherein the peripheral second metal area **470** within the peripheral circuit area **450a** is useless but that within the peripheral circuit area **450b** is an extended part from the data signal lines **330**. The pixel transparent conductive area **340** is mainly taken as a pixel electrode, and the top edge thereof is taken as the bottom plate of the capacitor area **420**. Both the source area **310** and the drain area **320** are over the channel shielding layers **350**. The channel shielding layers **350** is almost covered all the thin film transistor area **300**.

After the etching, the source area **310** and the drain area **320** are formed in the second metal layer **150**, an Ohmic contact layer is formed in the n+ silicon layer **160**, and the channel shielding layer is formed in the first metal layer **130** lying on the whole thin film transistor area **300**, as shown in FIG. 5A. The drain area **320** made of the second metal layer **150** and the pixel transparent conductive area **340** made of the transparent conductive layer **120** are formed, as shown in FIG. 5B. The transparent peripheral circuit **430** in the transparent conductive layer **120** is formed in the whole peripheral circuit area **450a** and the peripheral second metal area **470** is left at the right hand side of the peripheral circuit area **450a** in order to equalize the structures both in the peripheral circuit area **450a** and in the peripheral circuit area **450b**, as shown in FIG. 5C. The data signal lines **330** in the second metal layer **150** is shown at the left hand side in FIG. 5D and the source area **310** in the second metal layer **150** is shown at the right hand side in FIG. 5D. The bottom plate of the capacitor area **420** is formed by removing the second metal layer **150** and keeping the first metal layer, which is electrically connected with pixel transparent conductive area **340**, as shown in FIG. 5E.

An over-etching in the transparent conductive layer **120** and the first metal layer **130** is performed for forming an undercut next. After removing the photoresist layer **210**, the structures along the line A-A', line B-B', line C-C', line D-D', and line E-E' are shown in FIG. 6A, FIG. 6B, FIG. 6C, FIG. 6D, and FIG. 6E, respectively.

Both an amorphous silicon layer **170** and a second insulating layer **180** are formed on the transparent substrate **110** in sequence at step (d). Due to the undercut structure, the amorphous silicon layer **170** is not connected with both the transparent conductive layer **120** and the first metal layer **130**. As a result, there is no current interaction between the transparent conductive layer **120** and the amorphous silicon layer **170**.

The following step (e) is defining a plurality of contacts **370b**, **370c**, **370a**, and **370d** respectively on the source area **310**, the drain area **320**, the peripheral circuit area **450a**, and data signal lines **330** by photolithography. An opening **370e** is defined above the pixel transparent conductive area **340**. All the contacts and the opening **370e** are shown in the dash-line block in FIG. 2. The photoresist layer **220** for defining the contact **370b** on the source area **310** and the contact **370c** on the drain area **320** is formed as shown in FIG. 7A. The photoresist layer **220** for defining the contact **370c** on the drain area **320** and the opening **370e** on the pixel

transparent conductive area **340** is formed as shown in FIG. 7B. The photoresist layer **220** for defining the contact **370a** on both the transparent peripheral circuit **430** and the partial of the peripheral second metal area **470** is formed as shown in FIG. 7C. The photoresist layer **220** for defining the contact **370d** on the data signal lines **330** and the contact **370b** on the source area **310** is formed as shown in FIG. 7D. The photoresist layer **220** for defining the bottom plate area **420a** in the amorphous silicon layer **170** of the capacitor area **420** is formed as shown in FIG. 7E.

After the etching, the contact **370b** on the source area **310** and the contact **370c** on the drain area **320** are formed as shown in FIG. 8A. A semiconducting channel area of the TFT is formed in the amorphous silicon layer **170** between the contact **370b** and the contact **370c**. The main remained layers on the pixel transparent conductive area **340** are the transparent conductive layer **120** and the first metal layer **130** as shown in FIG. 8B. Both the transparent peripheral circuit **430** and the partial of the peripheral second metal area **470** are exposed due to the formation of the contact **370a** within the peripheral circuit area **450a** as shown in FIG. 8C. The contact **370d** on the data signal lines **330** and the contact **370b** on the source area **310** are formed as shown in FIG. 8D. The bottom plate area **420a** in the amorphous silicon layer **170** of the capacitor area **420** is formed as shown in FIG. 8E.

After removing the photoresist layer **220**, a third metal layer **190** and a third insulating layer **200** are formed on the transparent substrate in sequence at step (f).

With reference to FIG. 3, there is shown the mask pattern in bold-line block for forming the scanning signal lines **380**, a plurality of gate lines **390** connected with the scanning signal lines **380**, a plurality of first connecting lines **400** between the source area **310** and the data signal lines **330**, a plurality of second connecting lines **410** between the drain area **320** and the pixel transparent conductive area **340**, and a plurality of third connecting lines **440** for connected both the first metal layer **130** and the amorphous silicon layer **170** within the capacitor area **420**, wherein the pixel transparent conductive area **340** is approximately combined the capacitor area **420** with the pixel electrode area **460**. To go into detail, the photoresist layer **230** for defining the gate lines **390** of the TFT is shown in FIG. 9A. The photoresist layer **230** for defining the second connecting lines **410** between the drain area **320** and the pixel transparent conductive area **340** is shown in FIG. 9B. The photoresist layer **230** for defining the scanning signal lines **380** with one end electrically connected to the transparent peripheral circuit **430** through the first metal layer **130** is shown in FIG. 9C. The photoresist layer **230** for defining the first connecting line **400** between the source area **310** and the data signal line **330** is shown in FIG. 9D. The photoresist layer **230** for defining the top plate in the capacitor area **420**, the part of scanning signal lines **380**, is shown at left hand side in FIG. 9E. The photoresist layer **230'** for defining the third connecting lines **440** for connected both the first metal layer **130** and the amorphous silicon layer **170** within the capacitor area **420** is shown at right hand side in FIG. 9E.

Finally, after etching and removing the photoresist layer **230**, a TFT is formed in the thin film transistor area **300**, of which the structure includes the Ohmic contact layer in the n+ silicon layer **160**, the semiconducting channel area in the amorphous silicon layer **170**, the source area **310** and the drain area **320** in the second metal layer **150**, the gate line **390** in the second metal layer **190**, and the channel shielding layer in the first metal layer **130** as shown in FIG. 10A. The structure along the drain area to the pixel electrode area **460**

is shown in FIG. 10B. The second metal layer 150 in the drain area 320 is electrically connected with the transparent conductive layer 120 in the pixel electrode area 460 through the second connecting lines 410. The structure of the peripheral circuit area 450a is shown in FIG. 10C. The transparent peripheral circuit 430 in the transparent conductive layer 120 is electrically connected with the scanning signal lines 380 in the third metal layer 190 through the first metal layer 130. Furthermore, the scanning signal lines 380 in the third metal layer 190 is also connected with the peripheral second metal area 470. If the structure shown in FIG. 10C is in peripheral circuit area 450b, the peripheral second metal area 470 is connected with one end of the data signal lines 330. As a result, the transparent peripheral circuit 430 can control the signal of the data signal lines 330 through the first metal layer 130 and the third metal layer 190. The structure from the data signal line 330 to the source area 310 is shown in FIG. 10D. The data signal line 330 is connected with the source area 310 through the first connecting line 400 in the third metal layer 190. The structure of the capacitor area 420 is shown in FIG. 10E. All components of the bottom plate, the transparent conductive layer 120, the amorphous silicon layer 170, and the first metal layer 130, are electrically connected one another through the third connecting lines 440 in the third metal layer 190, so all the components are with the same electric potential. The top plate in the capacitor area 420 is part of scanning signal lines 380 in the third metal layer 190.

In this embodiment, the method for manufacturing a panel of a TFT LCD device having a TFT and a pixel electrode can be achieved by using only three mask processes, so this will efficiently reduce the producing cost and simplify the overall process.

Although the present invention has been explained in relation to its preferred embodiment, it is to be understood that many other possible modifications and variations can be made without departing from the spirit and scope of the invention as hereinafter claimed.

What is claimed is:

1. A method for manufacturing a panel of a thin film transistor liquid crystal display device, which has a thin film transistor area and a pixel electrode area within every pixel area defined by a plurality of data signal lines and scanning signal lines, comprising following steps:

- (a) providing a transparent substrate;
- (b) forming a transparent conductive layer, a first insulating layer, and a second metal layer on the transparent substrate in sequence;
- (c) forming a source area and a drain area in the second metal layer within every thin film transistor area, forming a transparent electrode area in the transparent conductive layer within every pixel electrode area, and forming the data signal lines in the second metal layer at two peripheral sides of every pixel area through a halftone photolithography and an etching;
- (d) forming a semiconducting layer and a second insulating layer on the transparent substrate in sequence;
- (e) forming a semiconducting channel area in the semiconducting layer within the thin film transistor area, and forming a plurality of contacts on the source area, the drain area, and the data signal lines through a photolithography and an etching;

(f) forming a third metal layer and a third insulating layer on the transparent substrate in sequence; and

(g) forming the scanning signal lines, a plurality of gate lines connected with the scanning signal lines, a plurality of first connecting lines between the source area and the data signal lines, and a plurality of second connecting lines between the drain area and the pixel electrode area through a photolithography and an etching.

2. The method as claimed in claim 1, further comprising forming a first metal layer between the transparent conductive layer and the first insulating layer at step (b) in order to form a channel shielding layer located in the thin film transistor area at step (c).

3. The method as claimed in claim 1, further comprising forming a pattern of a peripheral circuit of the transparent conductive layer at step (c), wherein at least one end of the peripheral circuit is electrically connected with the data signal line or the scanning signal line after step (g).

4. The method as claimed in claim 3, wherein the data signal lines or the scanning signal lines are controlled by signals from an external driver through the pattern of the peripheral circuit.

5. The method as claimed in claim 1, wherein the etching at step (c) further comprises forming an undercut of the transparent conductive layer through an over-etching, thereby the semiconducting layer and the transparent conductive layer are not connected each other at step (d).

6. The method as claimed in claim 1, further comprising forming an n+ silicon layer on a surface of the second metal layer at step (b) in order to form an Ohmic contact layer for the thin film transistor.

7. The method as claimed in claim 1, further comprising forming a bottom plate of a capacitor having the second metal layer and the transparent conductive layer within every pixel area at step (c), and forming a top plate of the capacitor having the third metal layer at step (g).

8. The method as claimed in claim 2, further comprising forming a bottom plate of a capacitor having the first metal layer and the transparent conductive layer within every pixel area at step (c), and forming a top plate of the capacitor having the third metal layer at step (g).

9. The method as claimed in claim 7, wherein the capacitor is at one side of the scanning signal line in order to increase the aperture ratio of the TFT LCD.

10. The method as claimed in claim 8, wherein the capacitor is at one side of the scanning signal line in order to increase the aperture ratio of the TFT LCD.

11. The method as claimed in claim 1, wherein the semiconducting layer is an amorphous silicon layer.

12. The method as claimed in claim 1, wherein the transparent conductive layer is made of ITO or IZO.

13. The method as claimed in claim 1, wherein the second insulating layer is made of SiO<sub>2</sub>, Si<sub>3</sub>N<sub>4</sub>, and Si(OH)<sub>4</sub>.

14. The method as claimed in claim 1, wherein the second insulating layer is an organic insulating layer.

15. The method as claimed in claim 1, wherein the third insulating layer is made of SiO<sub>2</sub>, Si<sub>3</sub>N<sub>4</sub>, and Si(OH)<sub>4</sub>.

16. The method as claimed in claim 1, wherein the third insulating layer is a passivation layer.

\* \* \* \* \*

专利名称(译)	用于制造在像素电极上方具有特定TFT结构的TFT LCD面板的方法		
公开(公告)号	<a href="#">US7116384</a>	公开(公告)日	2006-10-03
申请号	US10/902855	申请日	2004-08-02
[标]申请(专利权)人(译)	广辉电子股份有限公司		
申请(专利权)人(译)	广辉INC.		
当前申请(专利权)人(译)	友达光电股份有限公司		
[标]发明人	CHEN HUNG DE		
发明人	CHEN, HUNG-DE		
IPC分类号	G02F1/136 H01L21/00 G02F1/1368 G02F1/133 G02F1/1343 G02F1/1345 G02F1/1362 H01L21/336 H01L21/77 H01L27/12 H01L29/786		
CPC分类号	G02F1/1362 H01L27/1288 H01L27/1214 G02F1/13454 G02F1/136213 G02F2001/136236 G02F2001/136231 H01L27/124		
优先权	093112234 2004-04-30 TW		
其他公开文献	US20050243230A1		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

公开了一种用于制造具有三种掩模工艺的薄膜晶体管液晶显示装置的面板的方法。该方法包括以下步骤：依次在透明基板上形成透明导电层，第一绝缘层和第二金属层；通过半色调光刻和蚀刻形成源区，漏区，透明电极区和数据信号线；在基板上依次形成半导体层和第二绝缘层；在薄膜晶体管区域中形成半导体沟道区，并通过光刻和蚀刻在源区，漏区和数据信号线上接触；依次在基板上形成第三金属层和第三绝缘层；通过光刻和蚀刻形成扫描信号线和栅极线。

