



US 20100007594A1

(19) **United States**

(12) **Patent Application Publication**

Lai et al.

(10) **Pub. No.: US 2010/0007594 A1**

(43) **Pub. Date: Jan. 14, 2010**

(54) **MULTI-DOMAIN VERTICAL ALIGNMENT LIQUID CRYSTAL DISPLAY**

Publication Classification

(75) Inventors: **Ming-Sheng Lai**, Hsinchu (TW); **Hsueh-Ying Huang**, Hsinchu (TW); **Chen-Kuo Yang**, Hsinchu (TW); **Min-Feng Chiang**, Hsinchu (TW)

(51) **Int. Cl.**
G09G 3/36 (2006.01)
(52) **U.S. Cl.** **345/98**

(57) **ABSTRACT**


In a multi-domain vertical alignment liquid crystal display wherein a pixel that has two sub-pixels, an additional switching element is used to achieve a voltage differential between the electrode voltage potential in one sub-pixel and the other during and after the charge-sharing period. The electrodes in the sub-pixels are connected to each other through a charge-sharing capacitor and a controlling switching element, such as another transistor. Before the charge-sharing period, the controlling switching element is operated in a non-conducting state and the voltage potentials of the sub-pixel electrodes are substantially equal. During the charge-sharing period, the controlling switching element is operated in a conducting state to facilitate charge-sharing. The additional switching element is used to achieve the voltage differential more effectively and without additional capacitors.

Correspondence Address:
WARE FRESSOLA VAN DER SLUYS & ADOLPHSON, LLP
BRADFORD GREEN, BUILDING 5, 755 MAIN STREET, P O BOX 224
MONROE, CT 06468 (US)

(73) Assignee: **AU Optonics Corporation**

(21) Appl. No.: **12/218,224**

(22) Filed: **Jul. 10, 2008**

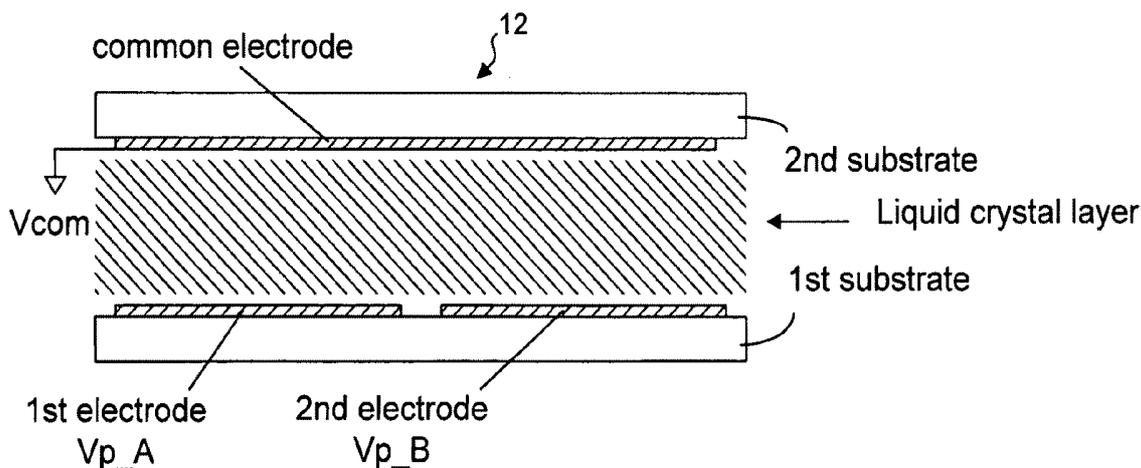

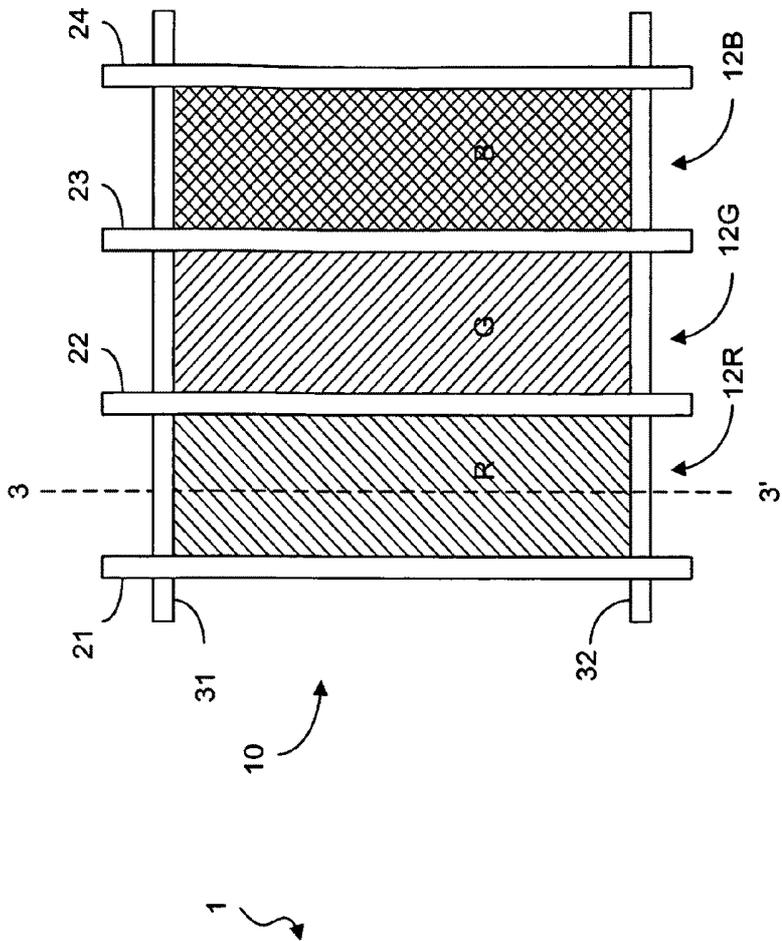


FIG. 1
(prior art)

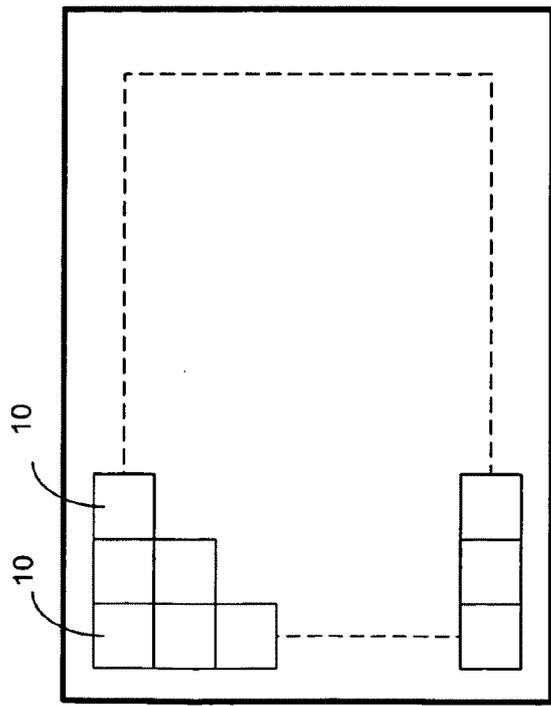


FIG. 2a
(prior art)

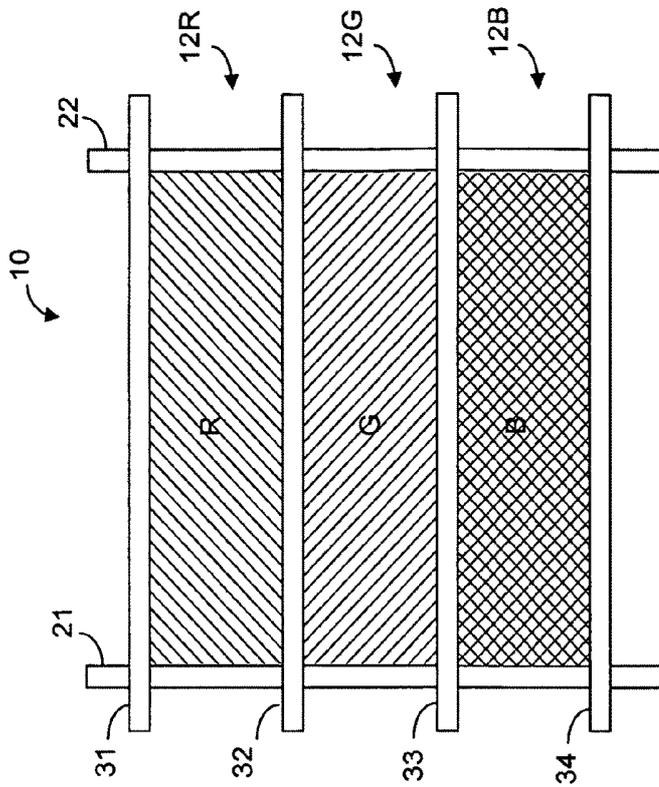
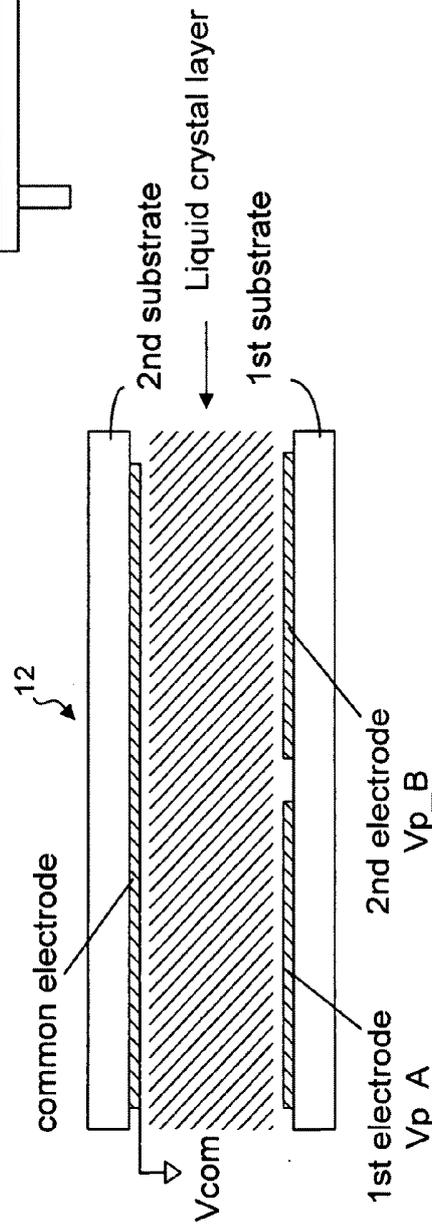


FIG. 2b
(prior art)

FIG. 3



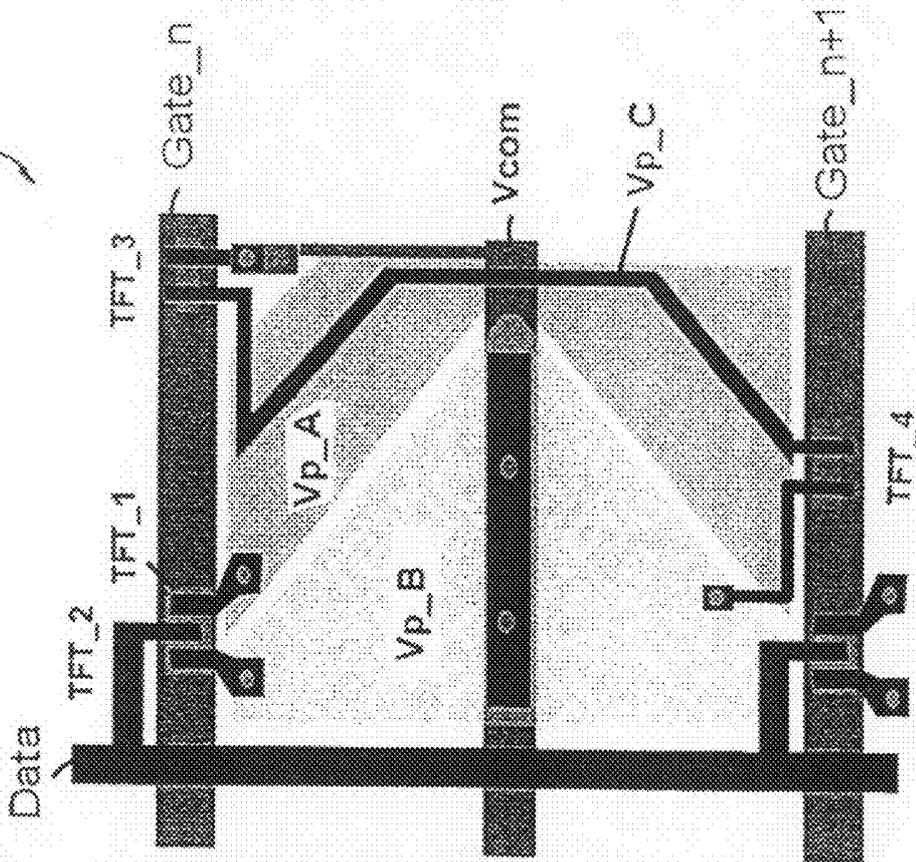


FIG. 4

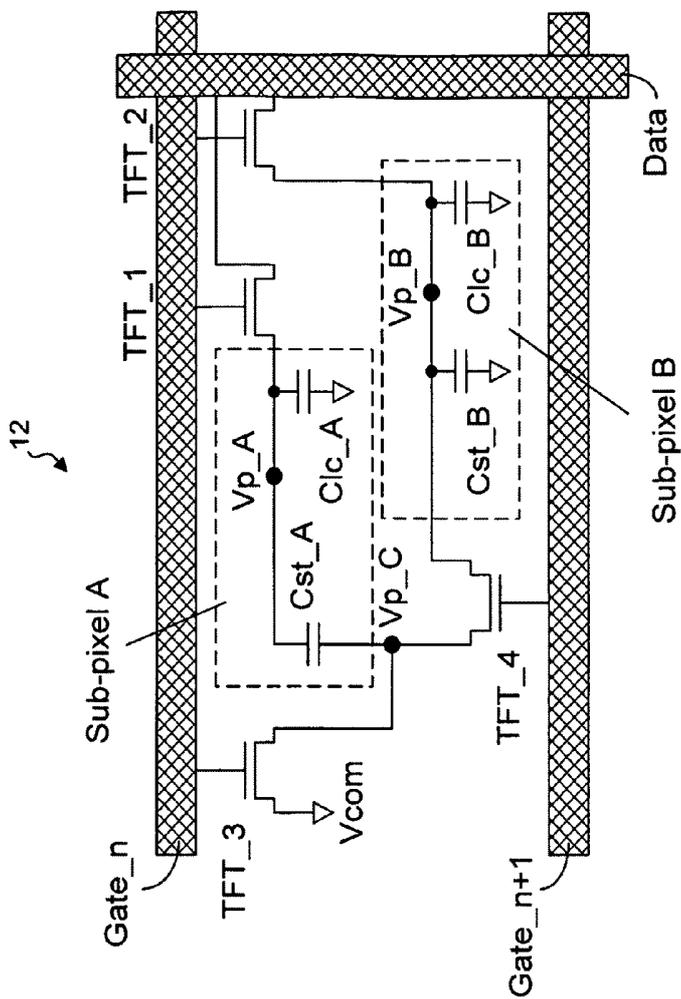


FIG. 5a

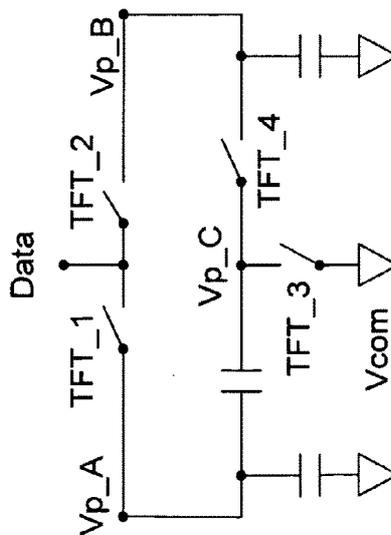


FIG. 5b

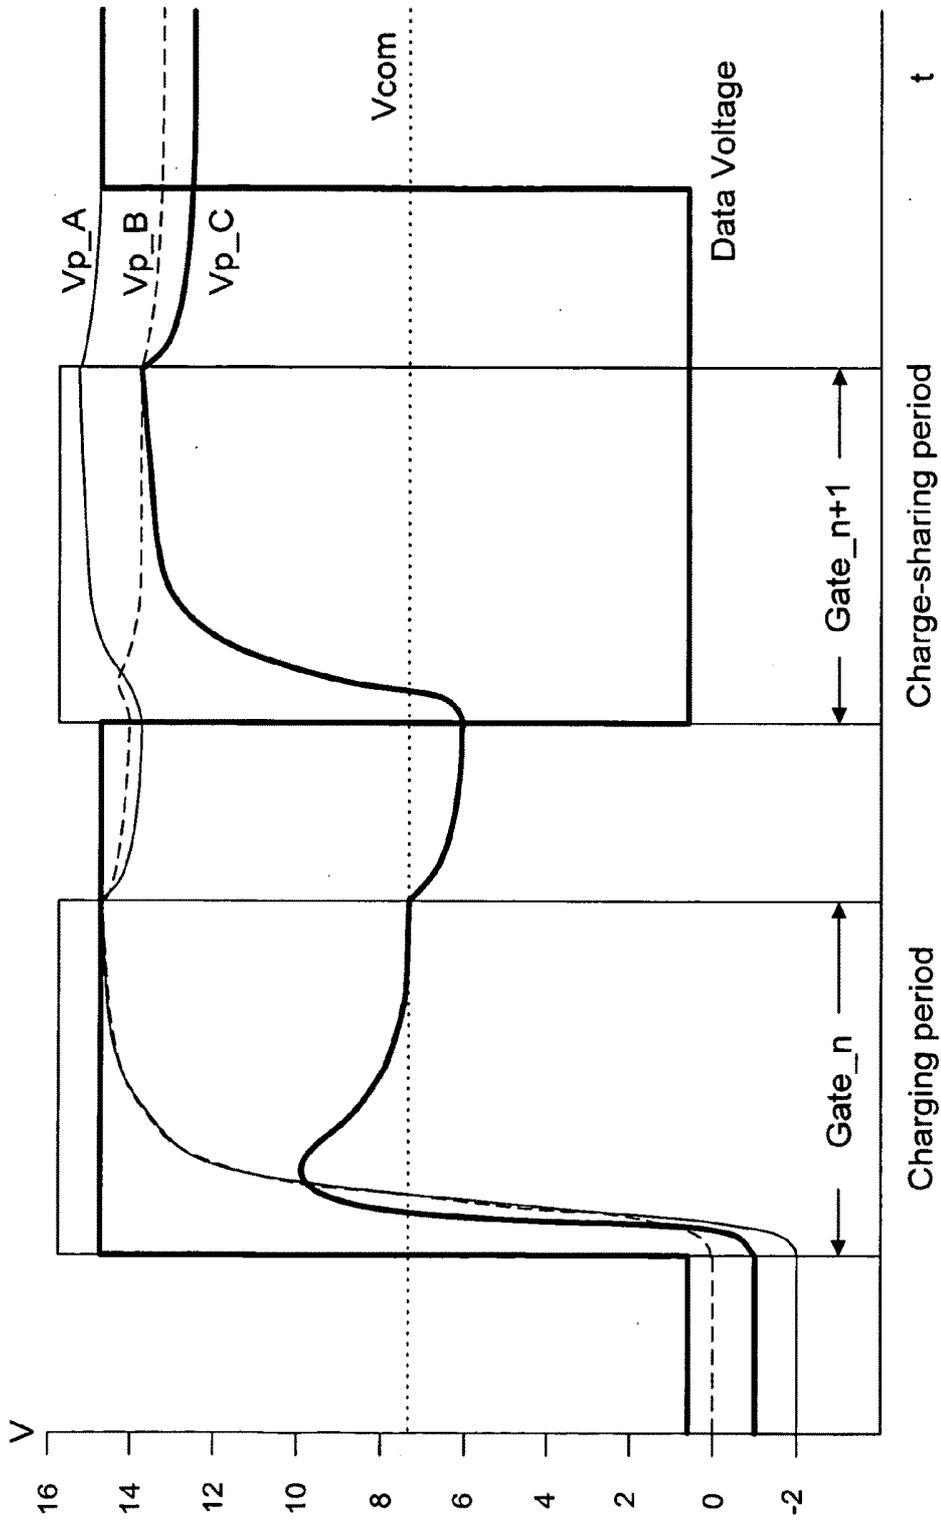


FIG. 6a

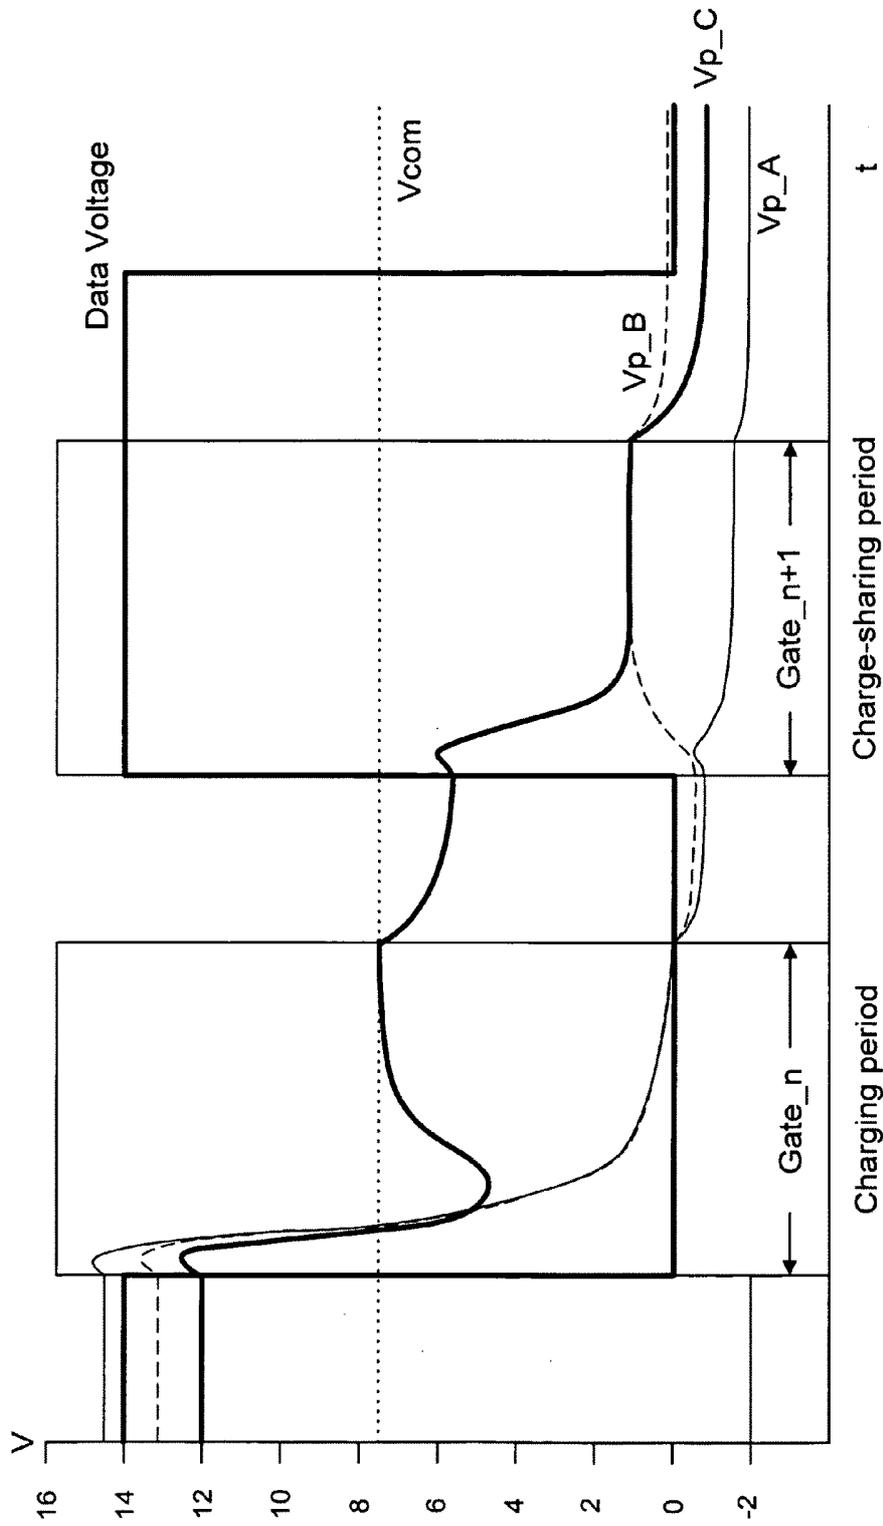


FIG. 6b

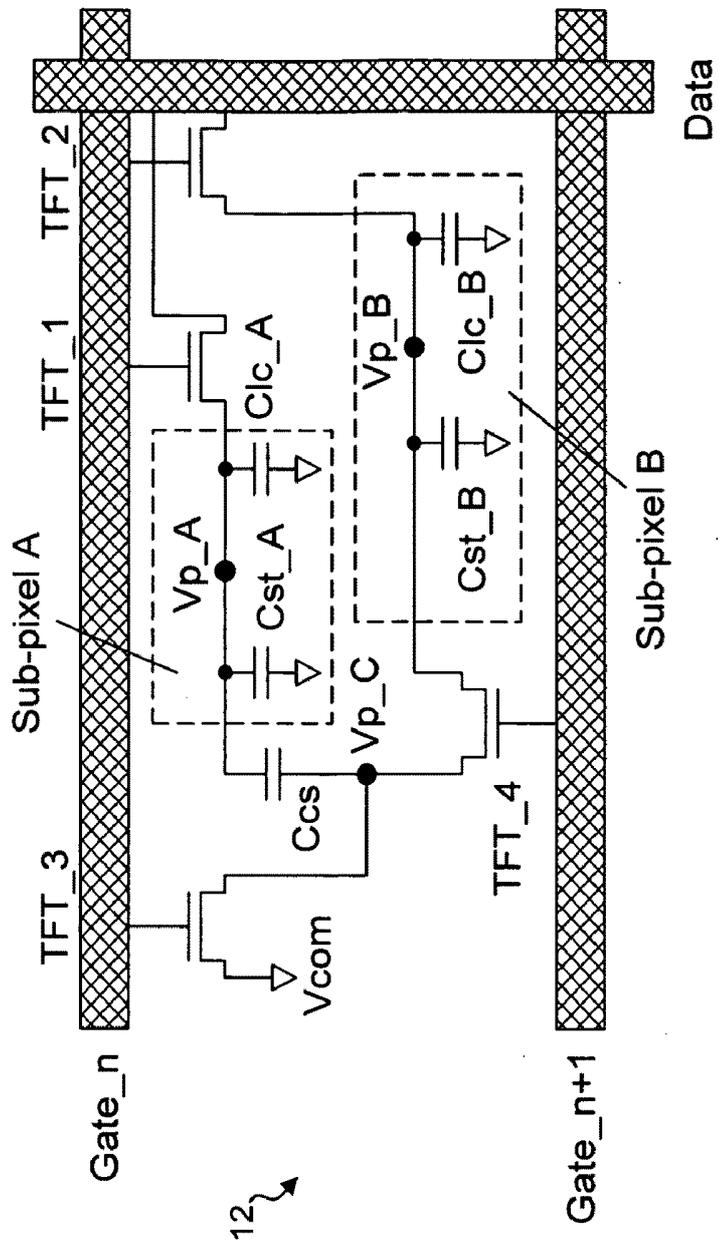


FIG. 7

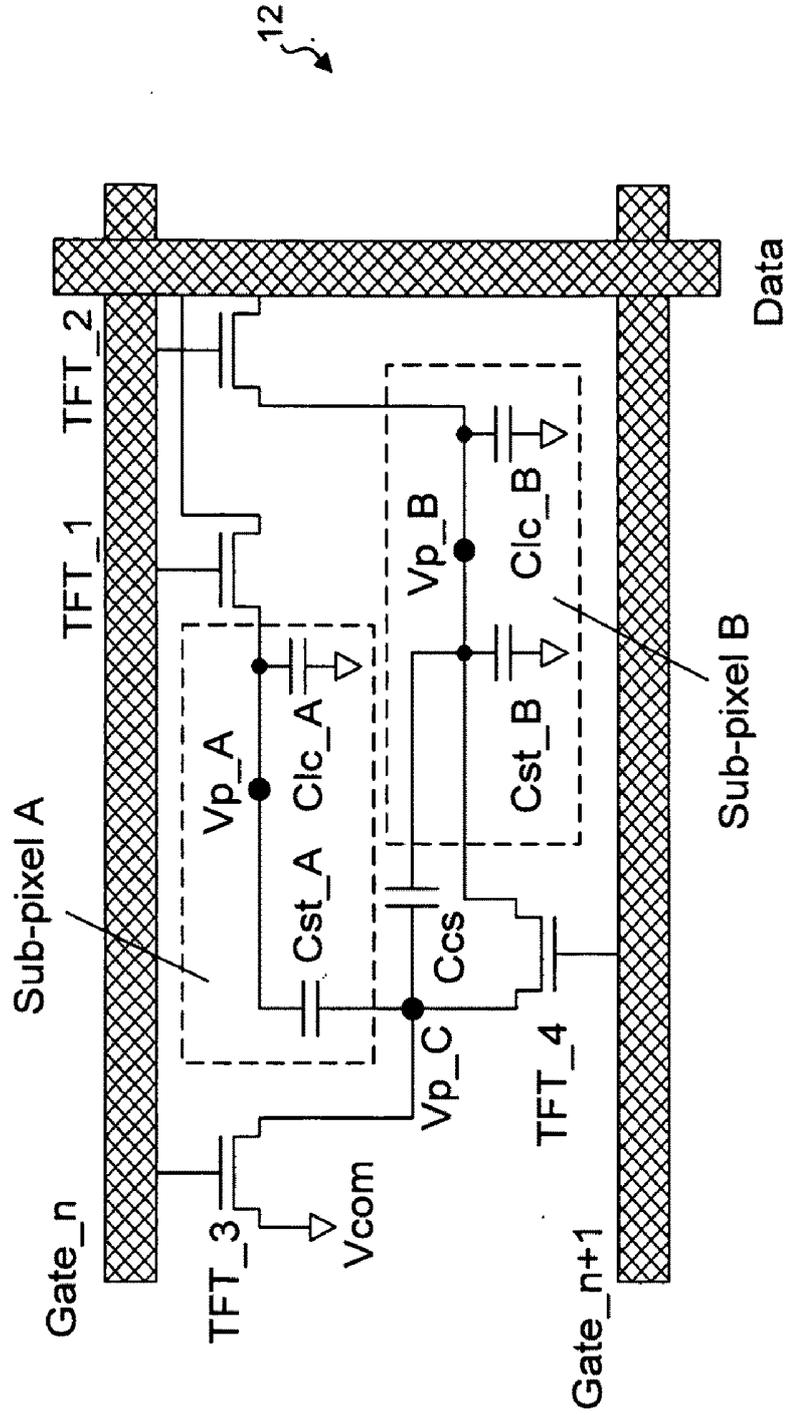


FIG. 8

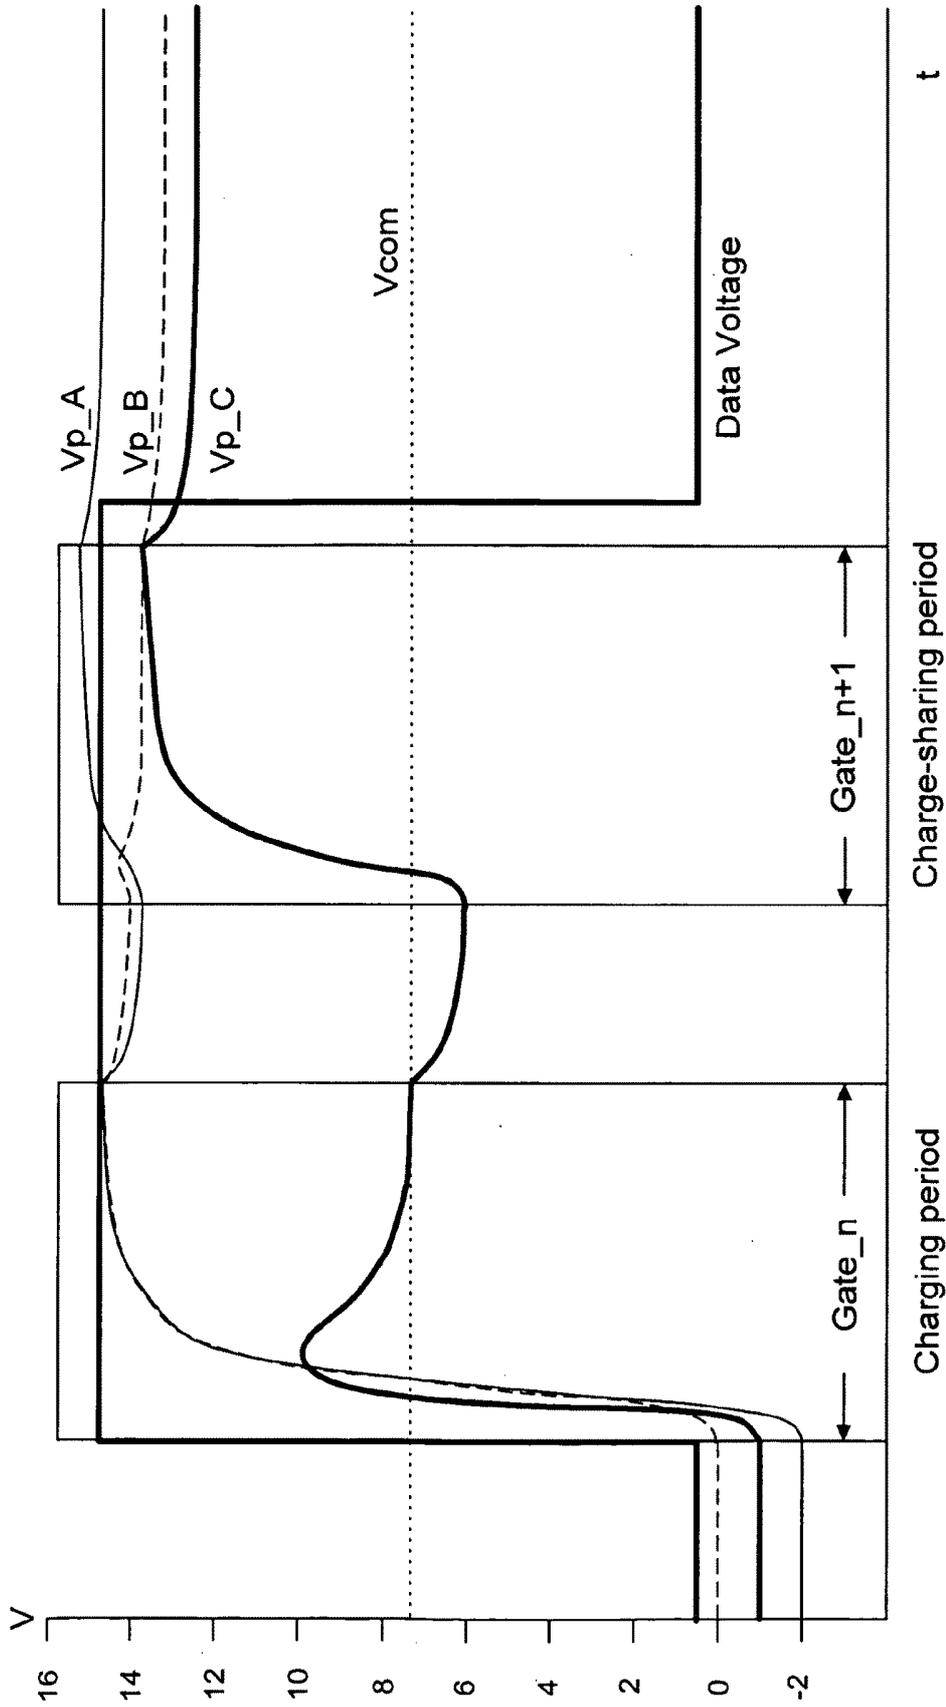


FIG. 9a

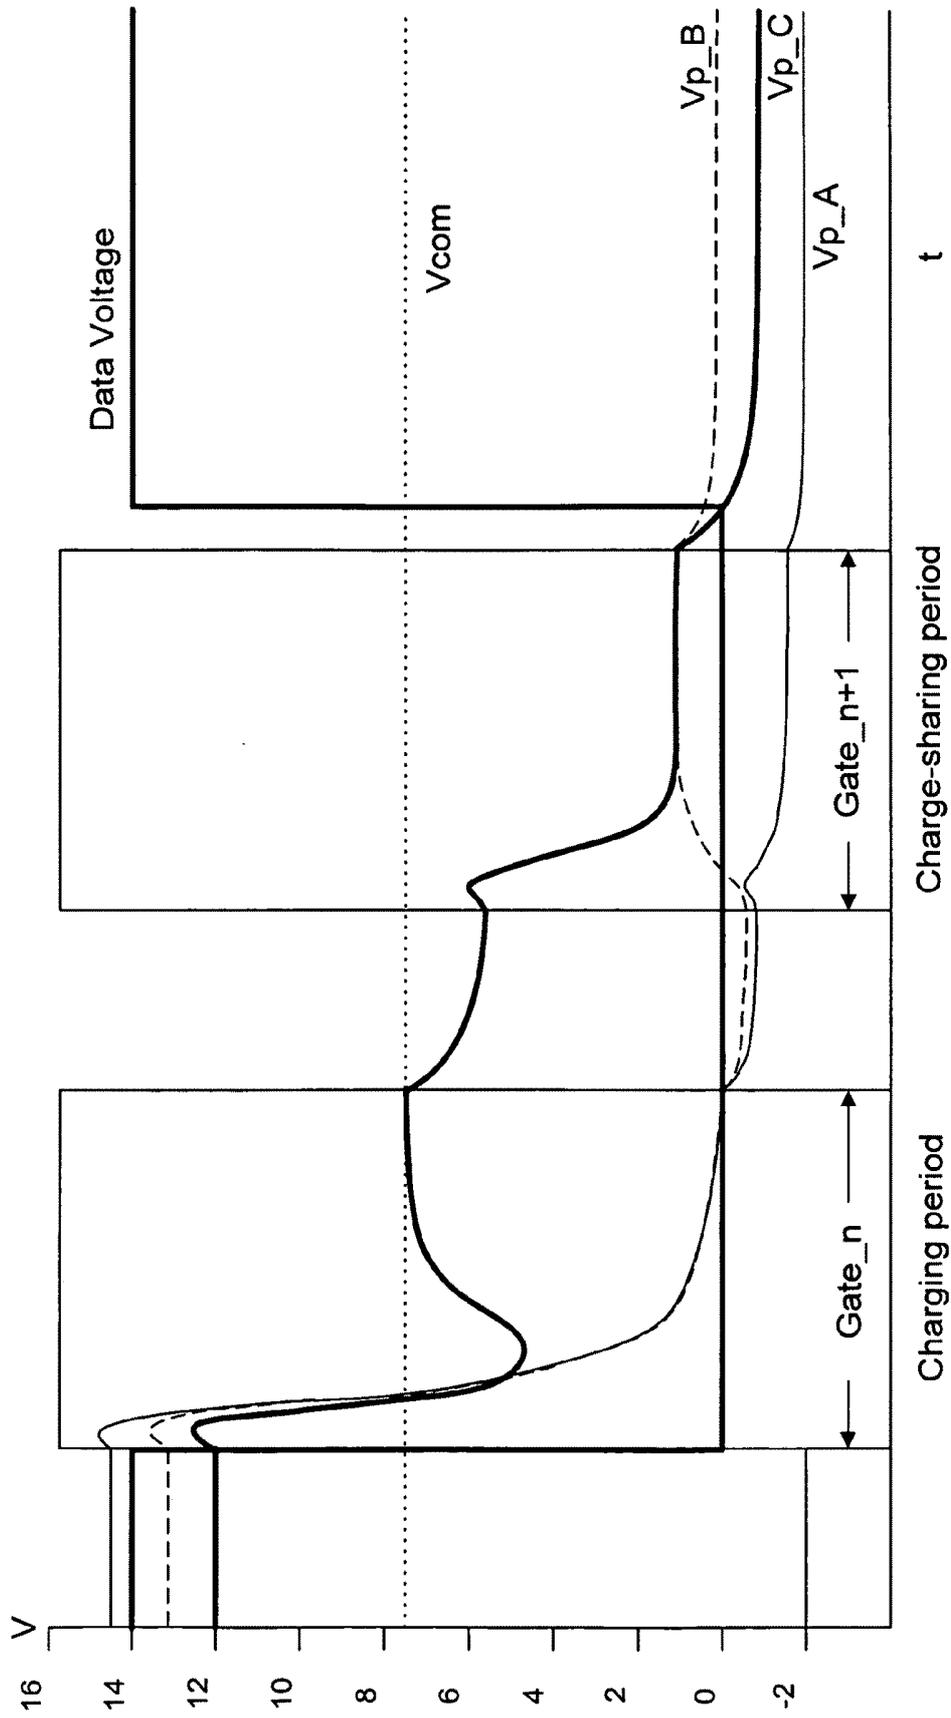


FIG. 9b

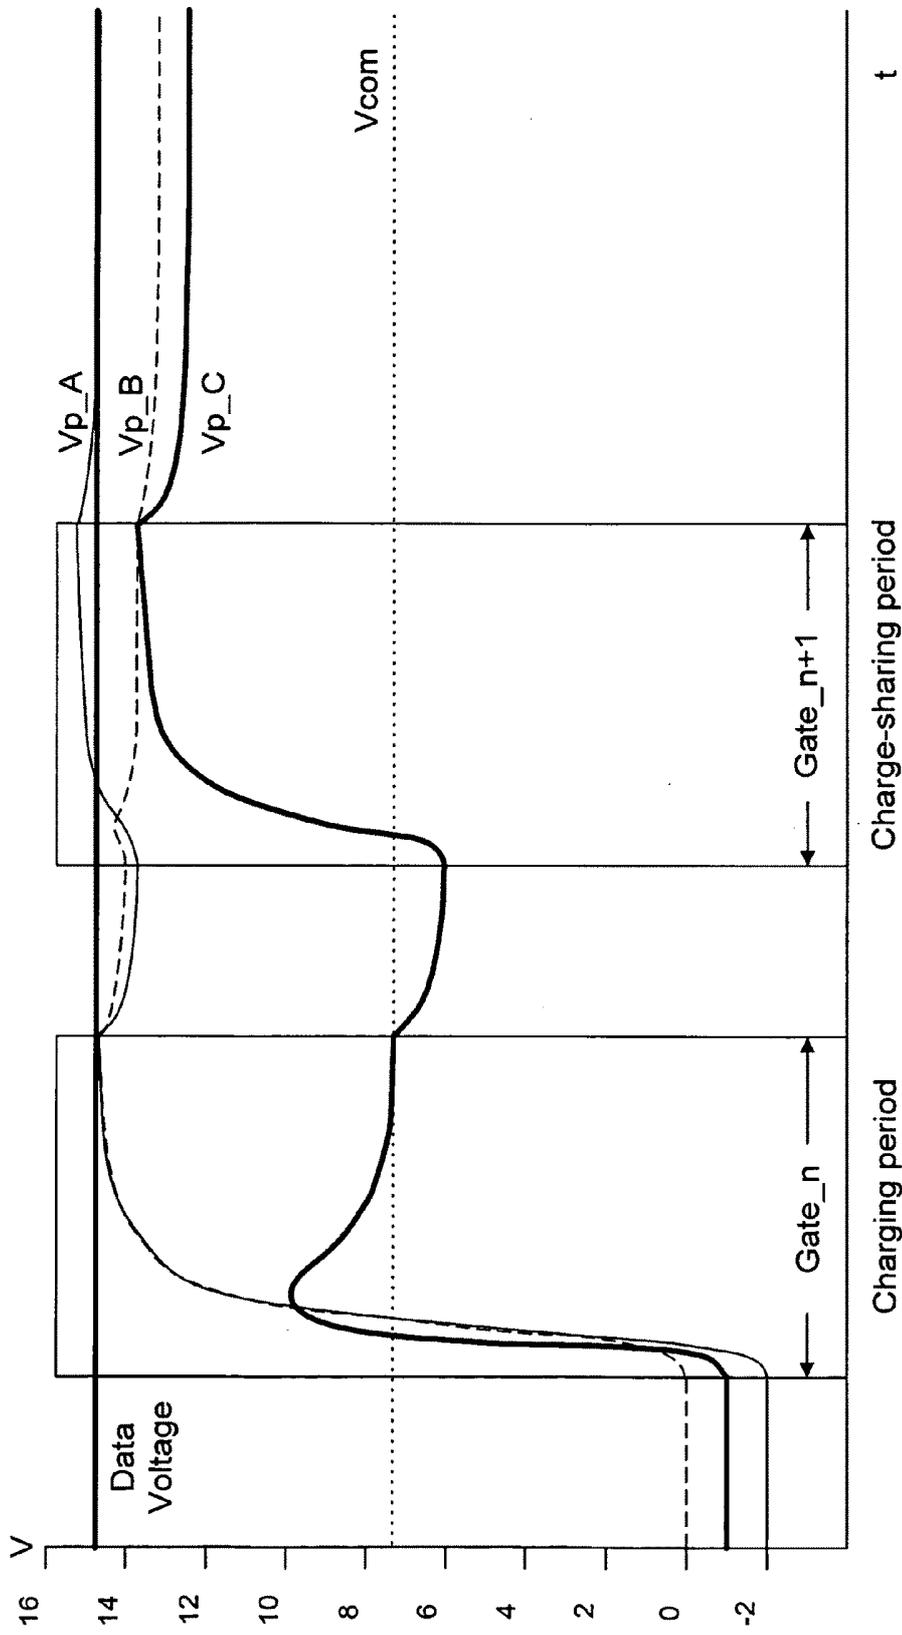


FIG. 10a

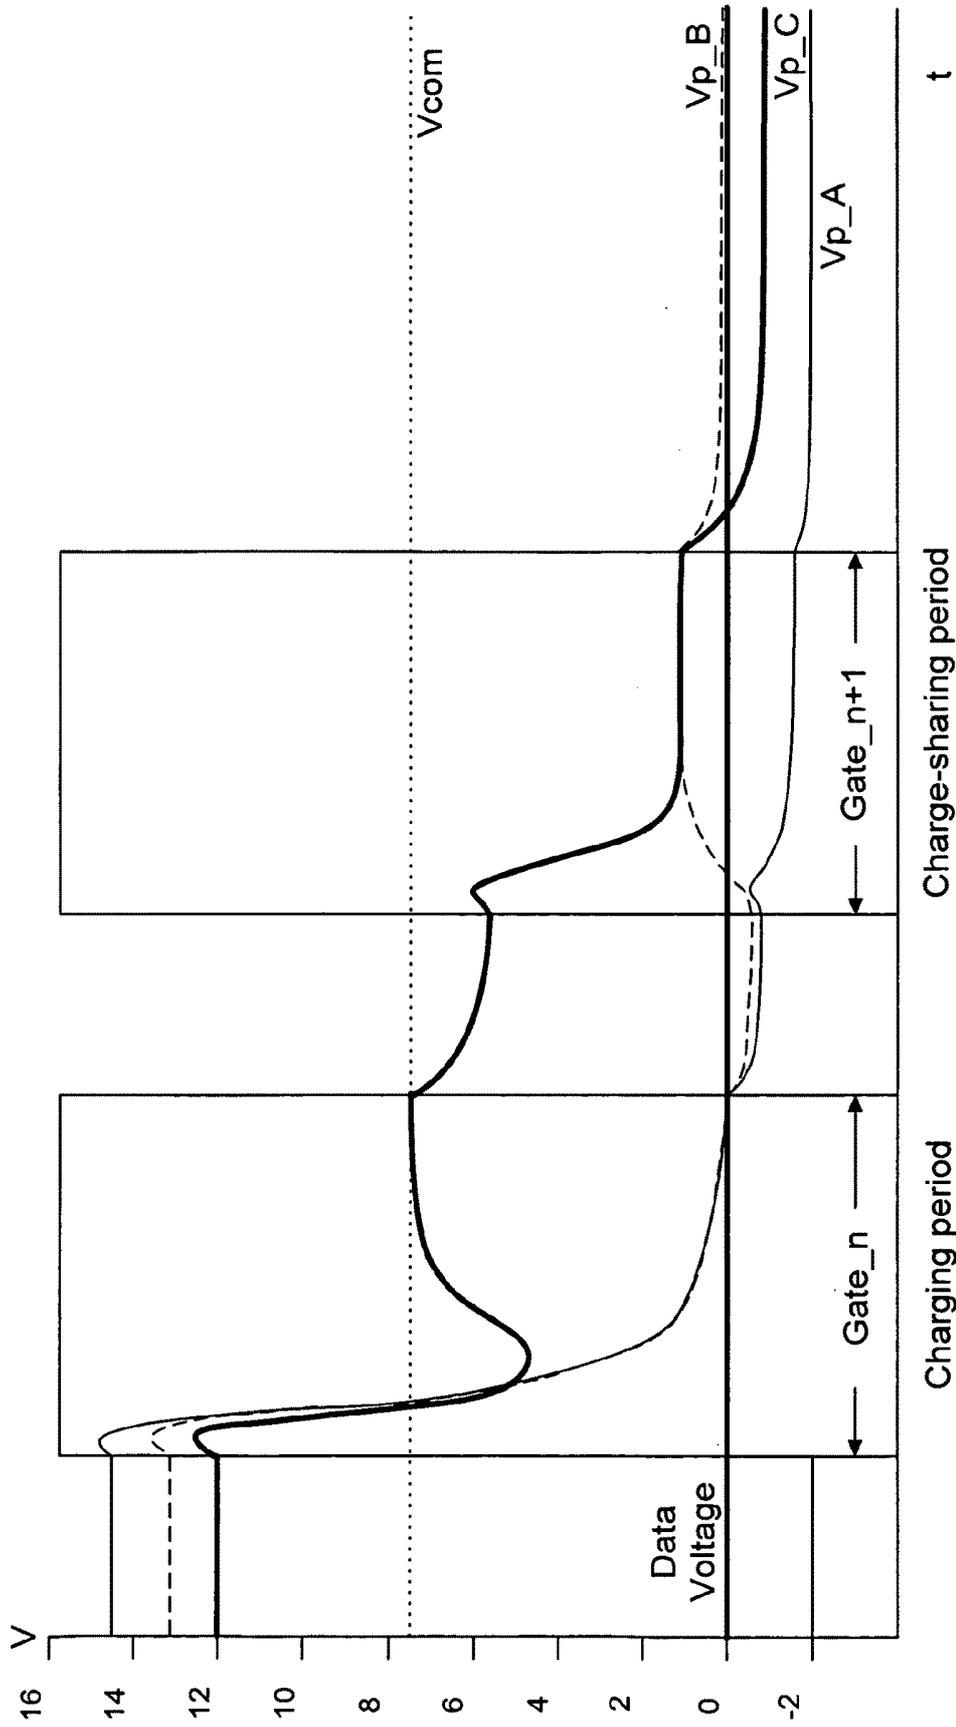


FIG. 10b

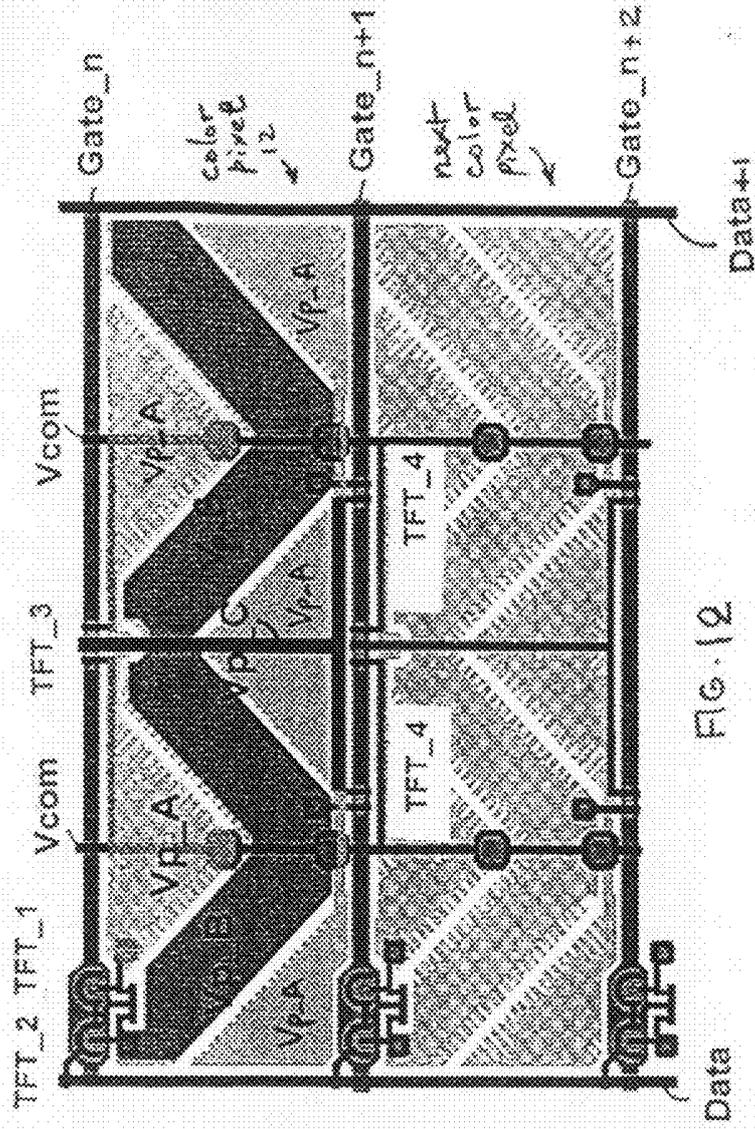
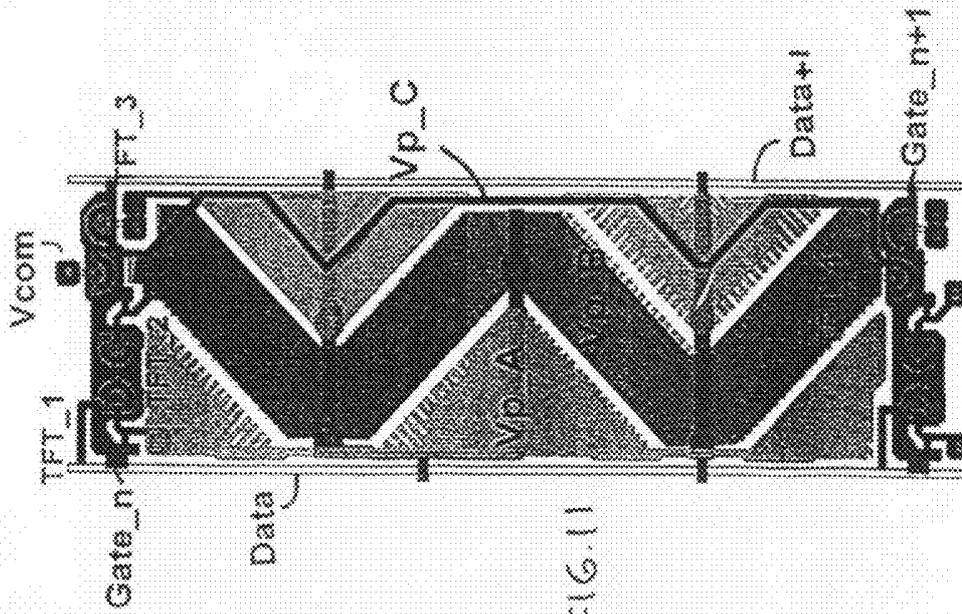


FIG. 12

MULTI-DOMAIN VERTICAL ALIGNMENT LIQUID CRYSTAL DISPLAY

FIELD OF THE INVENTION

[0001] The present invention relates generally to a liquid crystal display and, more particularly, to a multi-domain vertical alignment (MVA) liquid crystal display (LCD).

BACKGROUND OF THE INVENTION

[0002] As known in the art, a color liquid crystal display (LCD) panel **1** has a two-dimensional array of pixels **10**, as shown in FIG. **1**. Each of the pixels comprises a plurality of sub-pixels, usually in three primary colors of red (R), green (G) and blue (B). These RGB color components can be achieved by using respective color filters. FIG. **2a** illustrates a plan view of the pixel structure in a conventional transmissive LCD panel. As shown in FIG. **2a**, a pixel **10** can be divided into three sub-pixels **12R**, **12G** and **12B**. Three data lines **21**, **22** and **23** are used to separately provide data line signals to sub-pixels **12R**, **12G** and **12B**. The data line **24** is used to provide data line signals to the neighboring pixel column. Also, a single gate line **31** is used to activate the pixel **10**. The gate line **32** is used to provide a gate line to the neighboring pixel row. It should be noted that the color sub-pixels **12R**, **12G** and **12B** can also be arranged in a different orientation. As shown in FIG. **2b**, a single data line **21** is used to provide data line signals to all three color sub-pixels **12R**, **12G** and **12B**, and three gate lines **31**, **32** and **33** are used to separately activate the color sub-pixels **12R**, **12G** and **12B**. The data line **22** is used for providing data line signals to the neighboring pixel column and the gate line **34** is used for activating the neighboring pixel row. The pixel **10** as shown in FIG. **2a** is also known as a tri-gate pixel.

[0003] In a vertical alignment (VA) liquid crystal display (LCD), the liquid crystal molecules in the display are aligned substantially along a vertical axis that is perpendicular to the substrates in the absence of an electric field. When the voltage above a certain value is applied to electrodes formed on the substrates, the molecules are aligned in a different direction, away from the vertical axis. VA-LCD has the advantages of a wider viewing angle and a higher contrast ratio than the conventional LCD.

[0004] A VA-LCD can be further improved by introducing cutouts or protrusions in each pixel so as to change the orientations of the liquid crystals into different domains. This type of VA-LCD is known as multi-domain VA-LCD or MVA-LCD. MVA-LCD further widens the viewing angle. It is known that, in an MVA-LCD display, the lateral visibility is far inferior than the frontal visibility.

[0005] In a patterned vertical alignment liquid crystal display (PVA-LCD), the lateral visibility can be improved by dividing a pixel into two sub-pixels, wherein the applied voltage in one sub-pixel is shared by the other through capacitive coupling, such that the voltages in the two sub-pixels are different. Thus, each pixel has two electrodes, as shown in the schematic presentation of FIG. **3**. As shown in FIG. **3**, a liquid crystal display has a first substrate, a second substrate and a liquid crystal layer disposed between the first and second substrates. In each sub-pixel **12**, a common electrode, connected to a common voltage V_{com} , is provided on one substrate, and two separate electrodes are located on the other substrate to provide two different vertical electric fields, at least in a time period after the pixel **12** is activated by a gate

line signal. Typically, the pixel **12** is associated with a number of capacitors, such as the charge capacitance of the liquid crystal layer in the sub-pixel and various charge storage capacitors fabricated in the sub-pixels in order to maintain the voltage potential between the upper and lower electrodes after the gate line signal has passed. When the gate line signal is "on", it drives a TFT, for example, to charge up these capacitors so that the voltage level on the electrode in each sub-pixel is substantially equal to the signal on the data line, at least before the gate line signal has passed. In a PVA-LCD, the voltage potentials in the two sub-pixels after the gate line signal has passed are different. In prior art, this is achieved by using one or more capacitors for charge sharing.

SUMMARY OF INVENTION

[0006] In a color liquid crystal display (LCD), such as a multi-domain vertical alignment liquid crystal display wherein a pixel that has two sub-pixels, the present invention uses an additional switching element, such as a transistor, to achieve a voltage differential between the electrode voltage potential in one sub-pixel and that in another sub-pixel during and after the charge-sharing period. In general, the electrodes in the sub-pixels are connected to each other through a charge-sharing capacitor and a controlling switching element, such as another transistor. Before the charge-sharing period, the controlling switching element is operated in a non-conducting state and the voltage potentials of the sub-pixel electrodes are substantially equal. During the charge-sharing period, the controlling switching element is operated in a conducting state to facilitate charge-sharing. The additional switching element is used to achieve the voltage differential more effectively and without additional capacitors.

[0007] Thus, the first aspect of the present invention is a method for use in a liquid crystal display having a plurality of pixels, wherein at least some of the pixels have a first sub-pixel and a second sub-pixel, and wherein each of said pixels comprises a charge sharing period subsequent to a charging period. The method comprises:

[0008] providing a first electrode in the first sub-pixel and a second electrode in the second sub-pixel; and

[0009] providing a capacitor having a first capacitor end and a second capacitor end, the first capacitor end connected to the first electrode, wherein

[0010] during the charging period:

[0011] electrically connecting the first and second electrodes to a data line having data line voltage level relative to a first voltage source;

[0012] electrically connecting the second capacitor end to a second voltage source, and

[0013] during the charge-sharing period:

[0014] electrically disconnecting the first and second electrodes from the data line;

[0015] electrically disconnecting the second capacitor end from the second voltage source; and

[0016] electrically connecting a second capacitor end to the second electrode, wherein the data line voltage level is provided such that a voltage potential on the first electrode relative to the first voltage source is different from a voltage potential on the second electrode relative to the first voltage source during the charge-sharing period.

[0017] In positive charging, the data line voltage level is higher than the second voltage source during the charging period such that the voltage potential on the first electrode

relative to the first voltage source is higher than the voltage potential on the second electrode relative to the first voltage source during the charge-sharing period.

[0018] In negative charging, the data line voltage level is lower than the second voltage source during the charging period such that the voltage potential on the first electrode relative to the first voltage source is lower than the voltage potential on the second electrode relative to the first voltage source during the charge-sharing period.

[0019] According to one embodiment of the present invention, the first voltage source and the second voltage source are electrically connected to each other.

[0020] According to one embodiment of the present invention, the first electrode is connected to the data line via a first switching element and the second electrode is connected to the data line via a second switching element, and the second capacitor end is connected to the second voltage source via a third switching element, each of the first, second and third switching elements operable in a conducting state and in a non-conducting state, and wherein during the charging period, each of the first, second and third switching elements is operated in the conducting state, and during the charge-sharing period, each of the first, second and third switching elements is operated in the non-conducting state. The second capacitor end can be connected to the second electrode via a fourth switching element operable in a conducting state and in a non-conducting state, and wherein during the charging period, the fourth switching element is operated in the non-conducting state and during the charge-sharing period, the fourth switching element is operated in the conducting state. Each of said pixels comprises a first gate line for providing a first gate signal during the charging period, and wherein each of the first, second and third switching elements comprises a transistor having a gate terminal connected to the gate line so that each of the first, second and third switching elements is caused to operate in the conducting state by the gate signal. Each of said pixels further comprises a second gate line for providing a second gate signal during the charge sharing period, and wherein the fourth switching element comprises a further transistor having a gate terminal connected to the second gate line so that the fourth switching element is caused to operate in the conducting state by the second gate signal. Each of the first, second, third and fourth switching elements is operated in the non-conducting state in a time period subsequent to the charge-sharing period and in a time period between the charging period and the charge-sharing period.

[0021] The present invention relates to a color LCD in which each of said pixels is one of a plurality of color-sections of a color pixel, and the color sections comprise a red, a blue and a green color section.

[0022] The second aspect of the present invention is a liquid crystal display, comprising:

[0023] a first substrate,

[0024] a second substrate; and

[0025] a liquid crystal layer, disposed between the first and second substrates, for forming a plurality of pixels, at least some of the pixels having a first sub-pixel and a second sub-pixel, wherein each of said pixels comprises a charge sharing period subsequent to a charging period, and wherein

[0026] the first sub-pixel comprises a first electrode located on the first substrate for applying a first voltage potential on the liquid crystal layer in the first sub-pixel relative to a first

voltage level on the second substrate, and wherein the first electrode is electrically connected to a first end of a capacitor; and

[0027] the second sub-pixel comprises a second electrode located on the first substrate for applying a second voltage potential on the liquid crystal layer in the second sub-pixel layer relative to the first voltage level, wherein

[0028] during the charging period:

[0029] the first and second electrodes are electrically connected to a data line having a data line voltage level relative to the first voltage level;

[0030] a second end of the capacitor is electrically connected to a voltage source having a second voltage level; and

[0031] during the charge-sharing period:

[0032] the first and second electrodes are electrically disconnected from the data line;

[0033] the second end of the capacitor is electrically disconnected from the voltage source; and

[0034] the second end of the capacitor is electrically connected to the second electrode, wherein the data line voltage level is provided such that the first voltage level is different from the second voltage level during the charge-sharing period.

[0035] In positive charging, the data line voltage level is higher than the second voltage source during the charging period such that the voltage potential on the first electrode relative to the first voltage source is higher than the voltage potential on the second electrode relative to the first voltage source during the charge-sharing period.

[0036] In negative charging, the data line voltage level is lower than the second voltage source during the charging period such that the voltage potential on the first electrode relative to the first voltage source is lower than the voltage potential on the second electrode relative to the first voltage source during the charge-sharing period.

[0037] According to one embodiment of the present invention, the liquid crystal display further comprises:

[0038] a first switching element for electrically connecting the first electrode to the data line;

[0039] a second switching element for electrically connecting the second electrode to the data line;

[0040] a third switching element for electrically connecting the second end of the capacitor to the voltage source, wherein each of the first, second and third switching elements is operable in a conducting state and in a non-conducting state, and wherein during the charging period, each of the first, second and third switching elements is operated in the conducting state, and during the charge-sharing period, each of the first, second and third switching elements is operated in the non-conducting state; and

[0041] a fourth switching element for electrically connecting the second end of the capacitor to the second electrode, the fourth switching operable in a conducting state and in a non-conducting state, wherein during the charging period, the fourth switching element is operated in the non-conducting state and during the charge-sharing period, the fourth switching element is operated in the conducting state. The first voltage level can be equal to the second voltage level.

[0042] According to one embodiment of the present invention, each of said pixels comprises a first gate line for providing a first gate signal during the charging period, and wherein each of the first, second and third switching elements comprises a transistor having a gate terminal connected to the gate

line so that each of the first, second and third switching elements is caused to operate in the conducting state by the gate signal. Each of said pixels further comprises a second gate line for providing a second gate signal during the charge sharing period, and wherein the fourth switching element comprises a further transistor having a gate terminal connected to the second gate line so that the fourth switching element is caused to operate in the conducting state by the second gate signal. Each of the first, second, third and fourth switching elements is adapted to operate in the non-conducting state in a time period subsequent to the charge-sharing period, and each of the first, second, third and fourth switching elements is adapted to operate in the non-conducting state in a time period between the charging period and the charge-sharing period.

[0043] The liquid crystal display is a color LCD wherein each of said pixels is one of a plurality of color-sections of a color pixel, and the color sections comprise a red, a blue and a green color section.

BRIEF DESCRIPTION OF THE DRAWINGS

[0044] FIG. 1 is a schematic representation showing a typical LCD panel.

[0045] FIG. 2 is a schematic representation showing a plan view of the pixel structure in a typical LCD panel.

[0046] FIG. 2*b* is a schematic representation showing a plan view of the pixel structure in a LCD panel having tri-gate pixels.

[0047] FIG. 3 is a schematic representation showing a cross sectional view of a pixel having two pair of electrodes to align the liquid crystal molecules in two sub-pixels.

[0048] FIG. 4 shows a design layout of a pixel, according to one embodiment of the present invention.

[0049] FIG. 5*a* is a circuit diagram of a pixel in an LCD, according to one embodiment of the present invention.

[0050] FIG. 5*b* is an equivalent circuit of the circuit diagram of FIG. 5*a*.

[0051] FIG. 6*a* shows a timing chart with various signals associated with a pixel in positive charging according to the present invention, wherein the data line driving is according to a dot inversion driving method.

[0052] FIG. 6*b* shows a timing chart with various signals associated with a pixel in a negative charging, wherein the data line driving is according to a dot inversion driving method.

[0053] FIG. 7 is a circuit diagram of a pixel of an LCD, according to another embodiment of the present invention.

[0054] FIG. 8 is a circuit diagram of a pixel of an LCD, according to yet another embodiment of the present invention.

[0055] FIG. 9*a* shows a timing chart with various signals associated with a pixel in positive charging according to the present invention, wherein the data line driving is according to a 2-line inversion driving method.

[0056] FIG. 9*b* shows a timing chart with various signals associated with a pixel in a negative charging, wherein the data line driving is according to a 2-line inversion driving method.

[0057] FIG. 10*a* shows a timing chart with various signals associated with a pixel in positive charging according to the present invention, wherein the data line driving is according to a column inversion driving method.

[0058] FIG. 10*b* shows a timing chart with various signals associated with a pixel in a negative charging, wherein the data line driving is according to a column inversion driving method.

[0059] FIG. 11 shows a different layout of a pixel, according to another embodiment of the present invention.

[0060] FIG. 12 shows the layout of a pixel, according to a different embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0061] It is known that a color liquid crystal display (LCD) has a two-dimensional array of pixels, as shown in FIG. 1, and each pixel is divided into a plurality of color sub-pixels 12R, 12G and 12B, as shown in FIG. 2*a*. The major difference between different color sub-pixels is that different color filters are used to filter the transmitted light through the liquid crystal layer. The basic structure of the different color sub-pixels is substantially the same. Thus, the present invention will be described in reference to any one of the color sub-pixels 12R, 12G and 12B. For simplicity, each of the color sub-pixels is described as a pixel 12, and each of the pixel 12 is divided into two sub-pixels. The two sub-pixels have two separate electrodes for maintaining two voltage potentials in order to provide two different electric fields in the same pixel 12.

[0062] As shown in FIG. 4 and FIG. 5*a*, the electrode in one sub-pixel is associated with the voltage potential V_{p_A} , and the electrode of the other sub-pixel is associated with voltage potential V_{p_B} . Typically, a pixel 12 is associated with two gate lines: a gate line $Gate_n$ and a gate line $Gate_n+1$, similar to gate line 31 and 32 as shown in FIG. 2*a*. The gate line $Gate_n$ is used to electrically connect each of the electrodes associated with V_{p_A} and V_{p_B} to a data line (similar to data line 21 in FIG. 2*a*) through a switching element or thin-film transistor (TFT). In the pixel 12, according to various embodiments of the present invention, four TFTs are used as switching elements. As shown in FIG. 5*a*, the electrode in sub-pixel A is connected to the data line through TFT_1 and the electrode in sub-pixel B is connected to the data line through TFT_2. The sub-pixel A is associated with C_{lc_A} , the charge capacitance of the liquid crystal layer in the sub-pixel, and C_{st_A} , a charge storage capacitor fabricated in the sub-pixel A in order to maintain the voltage potential between the electrode and a common voltage across the liquid crystal layer (see FIG. 3). Likewise, the sub-pixel B is associated with C_{lc_B} , the charge capacitance of the liquid crystal layer in the sub-pixel, and C_{st_B} , a charge storage capacitor fabricated in the sub-pixel B in order to maintain the voltage potential between the electrode and the common voltage across the liquid crystal layer.

[0063] In the embodiment, as shown in FIG. 5*a*, the storage capacitor C_{st_A} has two ends: the first end is connected to the electrode in sub-pixel A and the second end is connected to a voltage source V_{com} through the switching element TFT_3. Each of the switching elements TFT_1, TFT_2 and TFT_3 is connected to the gate line $Gate_n$ so that when the gate line signal is "on" in the charging period, these switching elements are operated in a conducting state. As such, the voltage potential V_{p_C} is charged up to V_{com} , the voltage potentials V_{p_A} and V_{p_B} are substantially charged up the data line voltage level during the charging period (see FIG. 6*a*). A fourth switching element TFT_4 is used to electrically connect the second end of the storage capacitor C_{st_A} to the electrode in sub-pixel B. The gate of TFT_4 is connected to

the gate line Gate_{n+1} so that when the gate line signal in Gate_{n+1} is “on”, it causes TFT₄ to operate in a conducting state during a “charge-sharing period” subsequent to the charging period (see FIG. 6a).

[0064] An equivalent circuit of the pixel structure as shown in FIG. 5a is illustrated in FIG. 5b. During the charging period or when the gate line signal in Gate_n is “on”, each of the switching elements TFT₁, TFT₂ and TFT₃ is operated in a conducting state. At the end of the charging period, the voltage potential Vp_A and the voltage potential Vp_B are substantially equal to the voltage level of the data line signal, and the voltage level Vp_C is substantially equal to Vcom (see FIG. 6a). After the gate line signal in Gate_n has passed, each of the switching elements TFT₁, TFT₂ and TFT₃ is operated in a non-conducting state. Because of the storage and liquid crystal capacitance Cst_A, Cst_B, Clc_A and Clc_B, the voltage potentials Vp_A, Vp_B and Vp_C are only slightly lowered due to discharge. Nevertheless, Vp_B is substantially higher than Vp_C. During the charge-sharing period as TFT₄ is operated in the conducting state, Vp_B decreases and becomes equal to Vp_C. At the same time, Vp_A increases because Vp_C is now higher than Vcom. As a result, Vp_A, the voltage potential in sub-pixel A is higher than Vp_B, the voltage potential in sub-pixel B. This voltage potential difference is substantially maintaining after the gate line signal Gate_{n+1} has passed. As such, the vertical electric field in sub-pixel A is higher than the vertical electric field in sub-pixel B. Accordingly, liquid crystal molecules in the same pixels can be aligned differently in different domains, thereby improving the color quality of the liquid crystal display. It should be noted that one end of each of the capacitance Clc_A, Clc_B and the capacitor Cst_B (see FIG. 5b) is generally connected to Vcom on the second substrate as shown on FIG. 3. In one embodiment of the present invention, the same Vcom is also connected to TFT₃ (the drain terminal, for example) as shown in FIGS. 5A, 7 and 8. As such, the voltage Vp_C near the end of the charging period is substantially equal to Vcom as shown in FIG. 6a. In a different embodiment of the present invention, the DC voltage source that is connected to TFT₃ is different from Vcom and the DC voltage source can be provided on the first substrate or the second substrate. For example, the DC voltage can be lower or higher than Vcom. The drain voltage on TFT₃ can be optimized in order to balance the voltage differential (Vp_A-Vp_B) between positive frame and negative frame.

[0065] In the timing chart as shown in FIG. 6a, the data voltage, or the voltage level of the data line, is higher than Vcom during the charging period (positive charging), but it is lower than Vcom in the charge sharing period. Thus, in the positive charging period,

$$\text{Data voltage} = Vp_A = Vp_B > Vp_C = Vcom$$

In the charge-sharing period,

$$Vp_A > Vp_B = Vp_C > Vcom$$

It should be noted that, the present invention is also applicable in negative charging. In negative charging, the data voltage is lower than Vcom during the charging period, but it is higher than Vcom in the charge sharing period, as shown in FIG. 6b. Thus, in the negative charging period,

$$\text{Data voltage} = Vp_A = Vp_B < Vp_C = Vcom$$

In the charge-sharing period,

$$Vp_A < Vp_B = Vp_C < Vcom$$

[0066] FIGS. 7 and 8 show different embodiments of the present invention. In the embodiment as shown in FIG. 7, a capacitor Ccs, instead of Cst_A, is used for charge-sharing between sub-pixel A and sub-pixel B. Thus, the first end of capacitor Ccs is electrically connected to the electrode in sub-pixel A. The second end of capacitor Ccs is connected to Vcom via TFT₃ and to the electrode in sub-pixel B via TFT₄. The operation principle of the pixel structure in this embodiment is similar to that in the embodiment as shown in FIG. 5a.

[0067] In the embodiment as shown in FIG. 8, an additional capacitor Ccs is connected by Vp_C and Vp_B.

[0068] FIG. 9 shows an exemplary design layout of a color pixel similar to any one of color pixels 12R, 12G and 12B in FIG. 2a. In FIG. 9, Gate_n and Gate_{n+1} are equivalent to the gate lines 31 and 32 in FIG. 2a. The data line Data is connected to the electrodes for Vp_A and Vp_B via TFT₁ and TFT₂, respectively. The electrically conducting patch for Vp_C is connected to the electrode for Vp_B via TFT₄ and is connected to Vcom via TFT₃. Data+1 is a data line for the neighboring color pixel.

[0069] The present invention can also be used in a liquid crystal display having an array of tri-gate pixels as shown in FIG. 2b. FIG. 10 shows an exemplary design layout of a color pixel similar to any one of color pixels 12R, 12G and 12B in FIG. 2b. In FIG. 10, Data and Data+1 are equivalent to the data lines 21 and 22 in FIG. 2b. Data is connected to the electrodes for Vp_A and Vp_B via TFT₁ and TFT₂, respectively. Data+1 is a data line for the neighboring color pixel. If the color pixel 12 as shown in FIG. 10 is equivalent to the sub-color pixel 12R as shown in FIG. 2b, then Gate_n, Gate_{n+1} and Gate_{n+2} are equivalent to the gate lines 31, 32 and 33 in FIG. 2b.

[0070] In a prior art PVA-LCD, an additional capacitor connected between Vp_C and Vcom is used for charge-sharing between Vp_A and Vp_B during the charge-sharing period. This additional capacitor occupies part of the area of the color pixel 12, thereby reducing the aperture ratio of the color pixel. Furthermore, the voltage potential Vp_C is always higher than Vcom at the end of the charging period. In contrast, according to various embodiments of the present invention, the voltage potential Vp_C is substantially equal to Vcom at the end of the charging period. Accordingly, before charge-sharing, the voltage potential difference between Vp_B and Vp_C in a prior art PVA-LCD is smaller than the voltage potential difference between Vp_B and Vp_C, according to various embodiments of the present invention. Consequently, after charge-sharing, the voltage potential difference between Vp_A and Vp_B in a prior art PVA-LCD is also smaller than the voltage potential difference between Vp_A and Vp_B, according to various embodiment of the present invention. For the above reasons, the color quality of a liquid crystal display, according to the charge-sharing approach of the present invention, is substantially improved.

[0071] The timing-charts as shown in FIGS. 6a and 6b show the data voltage level in a dot inversion driving method. In the dot inversion driving method, the data line voltage level is high in the charging period and low in the charge-sharing period in Frame N; the data line voltage is low in the charging period and high in the charge-sharing period in Frame N+1. It should be noted that the present invention is also applicable in a 2-line inversion driving method and in a column driving method. In positive charging accordance with the 2-line inversion driving method, the data line voltage is high during

both the charging period and the charge-sharing period in Frame N, as shown in FIG. 9a. In negative charging accordance with the 2-line inversion driving method, the data line voltage is low during both the charging period and the charge-sharing period in Frame N+1, as shown in FIG. 9b. In positive charging accordance with the column inversion driving method, the data line voltage is high in Frame N, as shown in FIG. 10a. In negative charging accordance with the 2-line inversion driving method, the data line voltage is low in Frame N+1, as shown in FIG. 10b.

[0072] In sum, according to various embodiments of the present invention, the method for use in a liquid crystal display having a plurality of pixels comprises the steps of:

[0073] providing a first electrode in the first sub-pixel and a second electrode in the second sub-pixel; and

[0074] providing a capacitor having a first capacitor end and a second capacitor end, the first capacitor end connected to the first electrode, wherein

[0075] during the charging period:

[0076] electrically connecting the first and second electrodes to a data line having data line voltage level relative to a first voltage source;

[0077] electrically connecting the second capacitor end to a second voltage source, and

[0078] during the charge-sharing period:

[0079] electrically disconnecting the first and second electrodes from the data line;

[0080] electrically disconnecting the second capacitor end from the second voltage source; and

[0081] electrically connecting a second capacitor end to the second electrode, wherein the data line voltage level is higher or lower than the second voltage source in the charging period, such that a voltage potential on the first electrode relative to the first voltage source is higher or lower than a voltage potential on the second electrode relative to the first voltage source during the charge-sharing period.

[0082] The first voltage source and the second voltage are electrically connected to each other. The first electrode can be connected to the data line via a first switching element and the second electrode is connected to the data line via a second switching element, and the second capacitor end is connected to the second voltage source via a third switching element, each of the first, second and third switching elements operable in a conducting state and in a non-conducting state, and wherein during the charging period, each of the first, second and third switching elements is operated in the conducting state, and during the charge-sharing period, each of the first, second and third switching elements is operated in the non-conducting state. The second capacitor end can be connected to the second electrode via a fourth switching element operable in a conducting state and in a non-conducting state, and wherein during the charging period, the fourth switching element is operated in the non-conducting state and during the charge-sharing period, the fourth switching element is operated in the conducting state. Each of said pixels comprises a first gate line for providing a first gate signal during the charging period, and wherein each of the first, second and third switching elements comprises a transistor having a gate terminal connected to the gate line so that each of the first, second and third switching elements is caused to operate in the conducting state by the gate signal. Each of said pixels further comprises a second gate line for providing a second gate signal during the charge sharing period, and wherein the

fourth switching element comprises a further transistor having a gate terminal connected to the second gate line so that the fourth switching element is caused to operate in the conducting state by the second gate signal. Each of the first, second, third and fourth switching elements is operated in the non-conducting state in a time period subsequent to the charge-sharing period, and in the non-conducting state in a time period between the charging period and the charge-sharing period.

[0083] The liquid crystal display, according to various embodiments of the present invention, comprising: a first substrate, a second substrate; and a liquid crystal layer, disposed between the first and second substrates, for forming a plurality of pixels, at least some of the pixels having a first sub-pixel and a second sub-pixel, wherein each of said pixels comprises a charge sharing period subsequent to a charging period, and wherein

[0084] the first sub-pixel comprises a first electrode located on the first substrate for applying a first voltage potential on the liquid crystal layer in the first sub-pixel relative to a first voltage level on the second substrate, and wherein the first electrode is electrically connected to a first end of a capacitor; and

[0085] the second sub-pixel comprises a second electrode located on the first substrate for applying a second voltage potential on the liquid crystal layer in the second sub-pixel relative to the first voltage level, wherein

[0086] during the charging period:

[0087] the first and second electrodes are electrically connected to a data line having a data line voltage level relative to the first voltage level;

[0088] a second end of the capacitor is electrically connected to a voltage source having a second voltage level; and

[0089] during the charge-sharing period:

[0090] the first and second electrodes are electrically disconnected from the data line;

[0091] the second end of the capacitor is electrically disconnected from the voltage source; and

[0092] the second end of the capacitor is electrically connected to the second electrode, wherein the data line voltage level is higher or lower than the second voltage level during the charging period, such that the first voltage level is higher or lower than the second voltage level during the charge-sharing period.

[0093] The liquid crystal display further comprises a first switching element for electrically connecting the first electrode to the data line; a second switching element for electrically connecting the second electrode to the data line, a third switching element for electrically connecting the second end of the capacitor to the same or a different voltage source, wherein each of the first, second and third switching elements is operable in a conducting state and in a non-conducting state, and wherein during the charging period, each of the first, second and third switching elements is operated in the conducting state, and during the charge-sharing period, each of the first, second and third switching elements is operated in the non-conducting state; and a fourth switching element for electrically connecting the second end of the capacitor to the second electrode, the fourth switching operable in a conducting state and in a non-conducting state, wherein during the charging period, the fourth switching element is operated in

the non-conducting state and during the charge-sharing period, the fourth switching element is operated in the conducting state.

[0094] According to one embodiment of the present invention, each of said pixels comprises a first gate line for providing a first gate signal during the charging period, and wherein each of the first, second and third switching elements comprises a transistor having a gate terminal connected to the gate line so that each of the first, second and third switching elements is caused to operate in the conducting state by the gate signal. Each of said pixels further comprises a second gate line for providing a second gate signal during the charge sharing period, and wherein the fourth switching element comprises a further transistor having a gate terminal connected to the second gate line so that the fourth switching element is caused to operate in the conducting state by the second gate signal. Each of the first, second, third and fourth switching elements is adapted to operate in the non-conducting state in a time period subsequent to the charge-sharing period, and in the non-conducting state in a time period between the charging period and the charge-sharing period.

[0095] Although the present invention has been described with respect to one or more embodiments thereof, it will be understood by those skilled in the art that the foregoing and various other changes, omissions and deviations in the form and detail thereof may be made without departing from the scope of this invention.

What is claimed is:

1. A method for use in a liquid crystal display having a plurality of pixels, wherein at least some of the pixels have a first sub-pixel and a second sub-pixel, and wherein each of said pixels comprises a charge sharing period subsequent to a charging period, said method comprising:

providing a first electrode in the first sub-pixel and a second electrode in the second sub-pixel; and

providing a capacitor having a first capacitor end and a second capacitor end, the first capacitor end connected to the first electrode, wherein

during the charging period:

electrically connecting the first and second electrodes to a data line having data line voltage level relative to a first voltage source;

electrically connecting the second capacitor end to a second voltage source, and

during the charge-sharing period:

electrically disconnecting the first and second electrodes from the data line;

electrically disconnecting the second capacitor end from the second voltage source; and

electrically connecting the second capacitor end to the second electrode, wherein the data line voltage level is provided such that a voltage potential on the first electrode relative to the first voltage source is different from a voltage potential on the second electrode relative to the first voltage source during the charge-sharing period.

2. The method of claim 1, wherein the data line voltage level is higher than the second voltage source during the charging period such that the voltage potential on the first electrode relative to the first voltage source is higher than the voltage potential on the second electrode relative to the first voltage source during the charge-sharing period.

3. The method of claim 1, wherein the data line voltage level is lower than the second voltage source during the charging

period such that the voltage potential on the first electrode relative to the first voltage source is lower than the voltage potential on the second electrode relative to the first voltage source during the charge-sharing period.

4. The method of claim 1, wherein the first voltage source and the second voltage source are electrically connected to each other.

5. The method of claim 1, wherein the first electrode is connected to the data line via a first switching element and the second electrode is connected to the data line via a second switching element, and the second capacitor end is connected to the second voltage source via a third switching element, each of the first, second and third switching elements operable in a conducting state and in a non-conducting state, and wherein during the charging period, each of the first, second and third switching elements is operated in the conducting state, and during the charge-sharing period, each of the first, second and third switching elements is operated in the non-conducting state.

6. The method of claim 5, wherein the second capacitor end is connected to the second electrode via a fourth switching element operable in a conducting state and in a non-conducting state, and wherein during the charging period, the fourth switching element is operated in the non-conducting state and during the charge-sharing period, the fourth switching element is operated in the conducting state.

7. The method of claim 6, wherein each of said pixels comprises a first gate line for providing a first gate signal during the charging period, and wherein each of the first, second and third switching elements comprises a transistor having a gate terminal connected to the gate line so that each of the first, second and third switching elements is caused to operate in the conducting state by the gate signal.

8. The method of claim 7, wherein each of said pixels further comprises a second gate line for providing a second gate signal during the charge sharing period, and wherein the fourth switching element comprises a further transistor having a gate terminal connected to the second gate line so that the fourth switching element is caused to operate in the conducting state by the second gate signal.

9. The method of claim 8, wherein each of the first, second, third and fourth switching elements is operated in the non-conducting state in a time period subsequent to the charge-sharing period.

10. The method of claim 8, wherein each of the first, second, third and fourth switching elements is operated in the non-conducting state in a time period between the charging period and the charge-sharing period.

11. The method of claim 1, wherein each of said pixels is one of a plurality of color-sections of a color pixel.

12. The method of claim 11, wherein the color sections comprise a red, a blue and a green color section.

13. A liquid crystal display, comprising:

a first substrate,

a second substrate; and

a liquid crystal layer, disposed between the first and second substrates, for forming a plurality of pixels, at least some of the pixels having a first sub-pixel and a second sub-pixel, wherein each of said pixels comprises a charge sharing period subsequent to a charging period, and wherein

the first sub-pixel comprises a first electrode located on the first substrate for applying a first voltage potential on the liquid crystal layer in the first sub-pixel relative to a first

- voltage level on the second substrate, and wherein the first electrode is electrically connected to a first end of a capacitor; and
- the second sub-pixel comprises a second electrode located on the first substrate for applying a second voltage potential on the liquid crystal layer in the second sub-pixel layer relative to the first voltage level, wherein during the charging period:
- the first and second electrodes are electrically connected to a data line having a data line voltage level relative to the first voltage level;
 - a second end of the capacitor is electrically connected to a voltage source having a second voltage level; and
- during the charge-sharing period:
- the first and second electrodes are electrically disconnected from the data line;
 - the second end of the capacitor is electrically disconnected from the voltage source; and
 - the second end of the capacitor is electrically connected to the second electrode, wherein the data line voltage level is provided such that the first voltage level is different from the second voltage level during the charge-sharing period.
- 14.** The liquid crystal display of claim **13**, wherein the data line voltage level is higher than the second voltage source during the charging period such that the voltage potential on the first electrode relative to the first voltage source is higher than the voltage potential on the second electrode relative to the first voltage source during the charge-sharing period.
- 15.** The liquid crystal display of claim **13**, wherein the data line voltage level is lower than the second voltage source during the charging period such that the voltage potential on the first electrode relative to the first voltage source is lower than the voltage potential on the second electrode relative to the first voltage source during the charge-sharing period.
- 16.** The liquid crystal display of claim **13**, wherein the first voltage level is substantially equal to the second voltage level.
- 17.** The liquid crystal display of claim **13**, further comprising:
- a first switching element for electrically connecting the first electrode to the data line;
 - a second switching element for electrically connecting the second electrode to the data line, and
 - a third switching element for electrically connecting the second end of the capacitor to the voltage source, wherein each of the first, second and third switching

elements is operable in a conducting state and in a non-conducting state, and wherein during the charging period, each of the first, second and third switching elements is operated in the conducting state, and during the charge-sharing period, each of the first, second and third switching elements is operated in the non-conducting state.

18. The liquid crystal display of claim **17**, further comprising:

- a fourth switching element for electrically connecting the second end of the capacitor to the second electrode, the fourth switching element operable in a conducting state and in a non-conducting state, wherein during the charging period, the fourth switching element is operated in the non-conducting state and during the charge-sharing period, the fourth switching element is operated in the conducting state.

19. The liquid crystal display of claim **18**, wherein each of said pixels comprises a first gate line for providing a first gate signal during the charging period, and wherein each of the first, second and third switching elements comprises a transistor having a gate terminal connected to the gate line so that each of the first, second and third switching elements is caused to operate in the conducting state by the gate signal.

20. The liquid crystal display of claim **19**, wherein each of said pixels further comprises a second gate line for providing a second gate signal during the charge sharing period, and wherein the fourth switching element comprises a further transistor having a gate terminal connected to the second gate line so that the fourth switching element is caused to operate in the conducting state by the second gate signal.

21. The liquid crystal display of claim **20**, wherein each of the first, second, third and fourth switching elements is adapted to operate in the non-conducting state in a time period subsequent to the charge-sharing period.

22. The liquid crystal display of claim **20**, wherein each of the first, second, third and fourth switching elements is adapted to operate in the non-conducting state in a time period between the charging period and the charge-sharing period.

23. The liquid crystal display of claim **13**, wherein each of said pixels is one of a plurality of color-sections of a color pixel.

24. The liquid crystal display of claim **23**, wherein the color sections comprise a red, a blue and a green color section.

* * * * *

专利名称(译)	多域垂直对准液晶显示器		
公开(公告)号	US20100007594A1	公开(公告)日	2010-01-14
申请号	US12/218224	申请日	2008-07-10
[标]申请(专利权)人(译)	友达光电股份有限公司		
申请(专利权)人(译)	友达光电股份有限公司		
当前申请(专利权)人(译)	友达光电股份有限公司		
[标]发明人	LAI MING SHENG HUANG HSUEH YING YANG CHEN KUO CHIANG MIN FENG		
发明人	LAI, MING-SHENG HUANG, HSUEH-YING YANG, CHEN-KUO CHIANG, MIN-FENG		
IPC分类号	G09G3/36		
CPC分类号	G02F1/136213 G02F1/13624 G02F2001/134345 G09G3/3648 G09G2330/023 G09G2300/0443 G09G2300/0447 G09G2300/0465 G09G2310/0251 G09G2300/0426		
其他公开文献	US8373633		
外部链接	Espacenet USPTO		

摘要(译)

在多域垂直配向液晶显示器中，其中具有两个子像素的像素，附加的开关元件用于在充电期间和之后实现一个子像素中的电极电压电势与另一个子像素中的电极电压电势之间的电压差。分享期。子像素中的电极通过电荷共享电容器和控制开关元件（例如另一晶体管）彼此连接。在电荷共享时段之前，控制开关元件在非导通状态下操作，并且子像素电极的电压电位基本相等。在电荷共享时段期间，控制开关元件在导通状态下操作以促进电荷共享。附加的开关元件用于更有效地实现电压差，而无需额外的电容器。

