



US 20080158120A1

(19) **United States**(12) **Patent Application Publication**
An et al.(10) **Pub. No.: US 2008/0158120 A1**(43) **Pub. Date: Jul. 3, 2008**(54) **LIQUID CRYSTAL DISPLAY DEVICE
INCLUDING IMAGE SENSOR AND METHOD
OF DRIVING THE SAME****Publication Classification**(51) **Int. Cl.**
G09G 3/36

(2006.01)

(52) **U.S. Cl. 345/88**(57) **ABSTRACT**(75) **Inventors:** **Cheung-Hwan An**, Seoul (KR);
Yong-Won Jo, Gyeonggi-do (KR)**Correspondence Address:**
SEYFARTH SHAW, LLP
815 CONNECTICUT AVENUE, N.W., SUITE 500
WASHINGTON, DC 20006(73) **Assignee:** **LG.PHILIPS LCD CO., LTD.**,
Seoul (KR)(21) **Appl. No.:** **11/798,299**(22) **Filed:** **May 11, 2007**(30) **Foreign Application Priority Data**

Dec. 29, 2006 (KR) 10-2006-0138466

A liquid crystal display device includes a first data line and a second data line, the first and second data lines substantially parallel to one another, a first gate line, the first gate line crossing the first data line and the second data line, a display sub-pixel defined by the crossing of the first gate line and the first data line, a sensing sub-pixel defined by the crossing of the first gate line and the second data line, and a first switching element for connecting the second data line connected to one of a sensing processing unit and a ground terminal, wherein the display sub-pixel transmits light supplied from a light source in accordance to a data signal applied to the first data line, and the sensing sub-pixel senses light incident on the liquid crystal display device and generates charges corresponding to the sensed light.

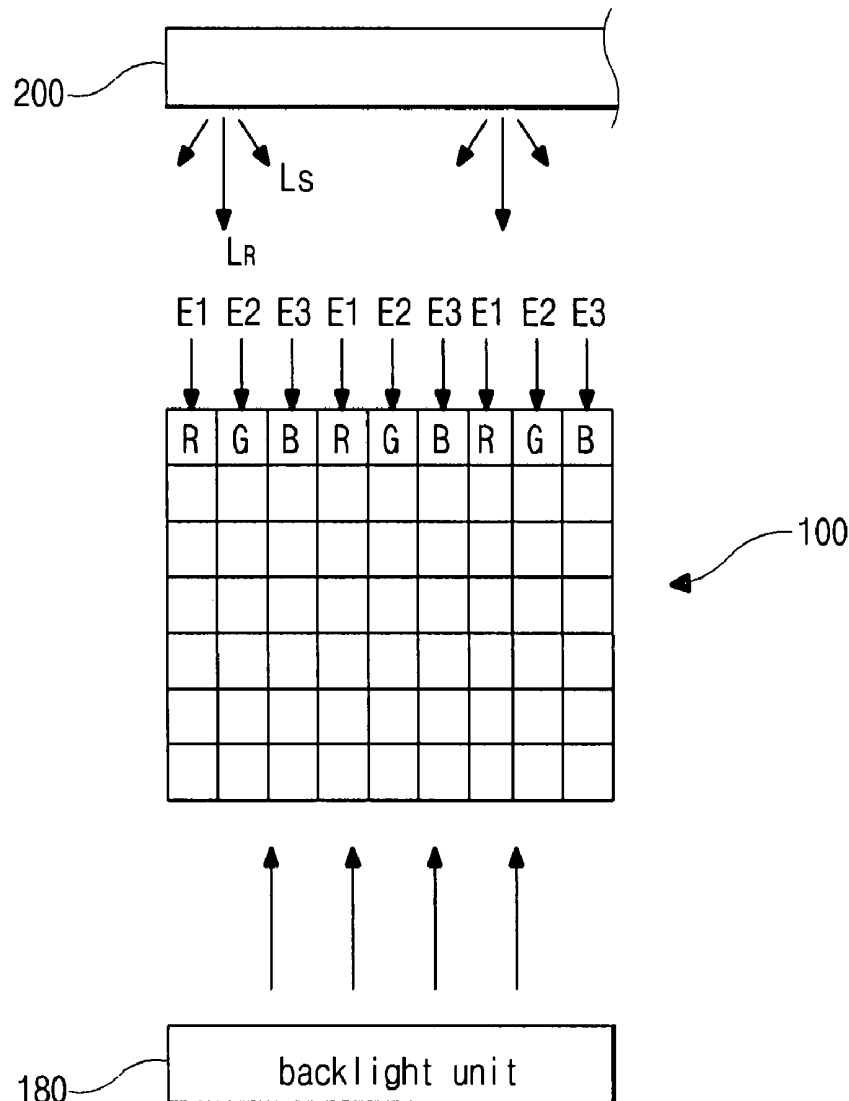


FIG. 1
RELATED ART

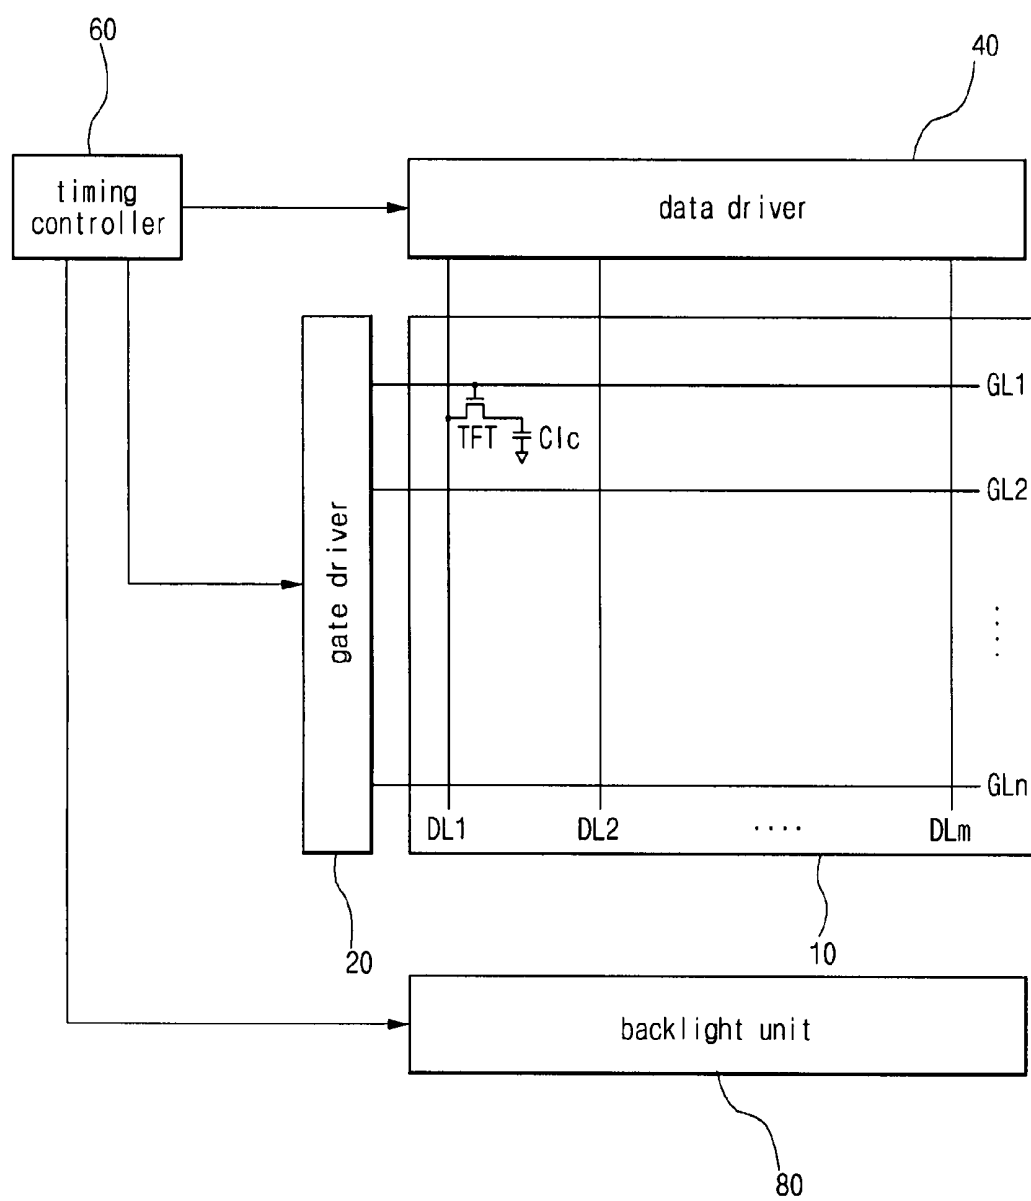


FIG. 2

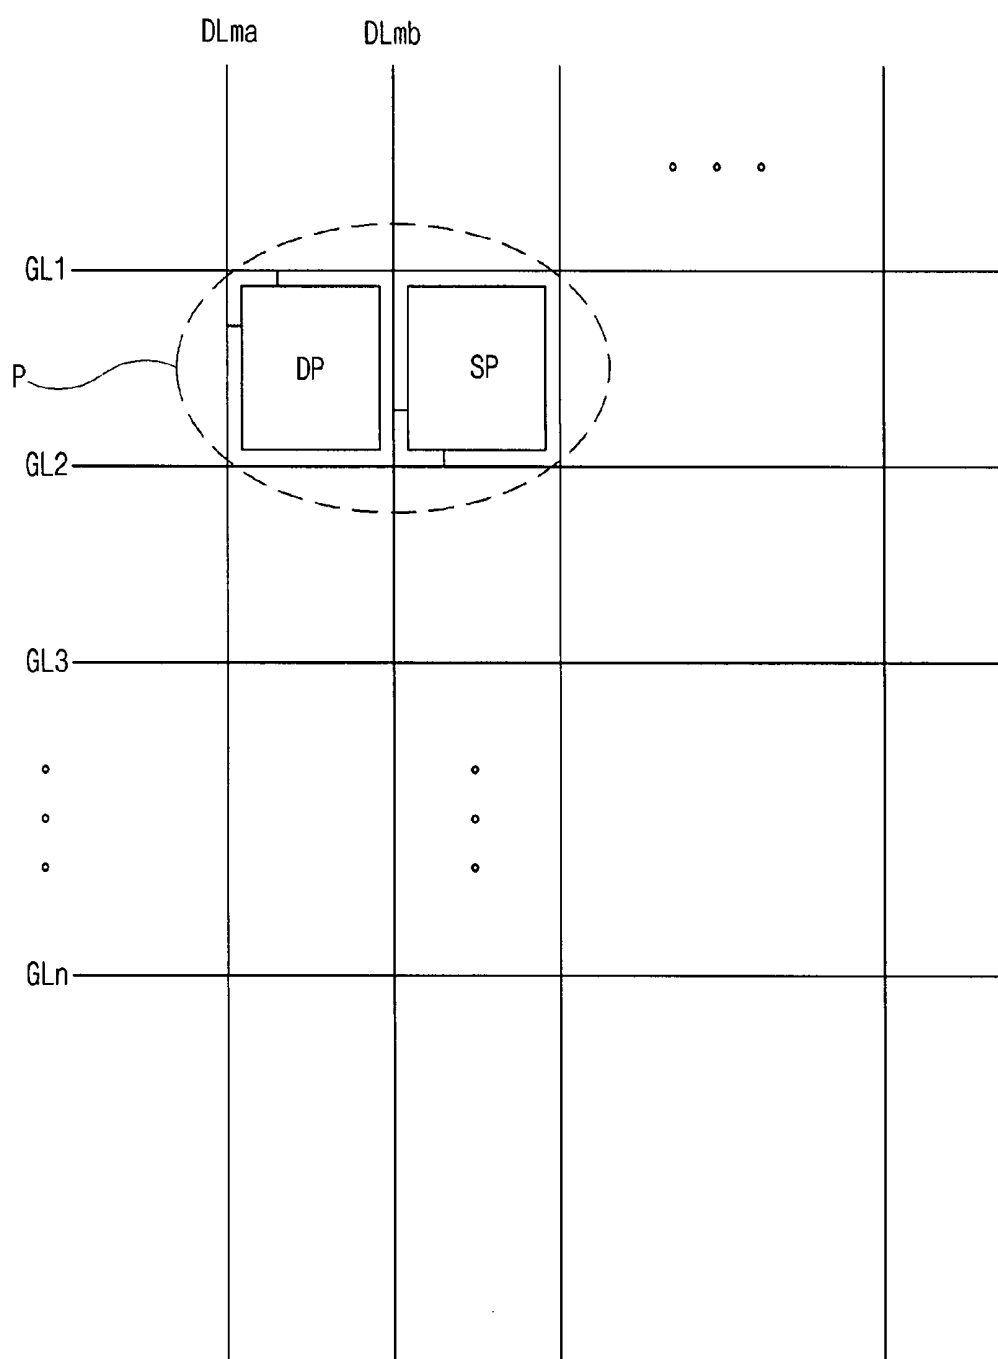


FIG. 3

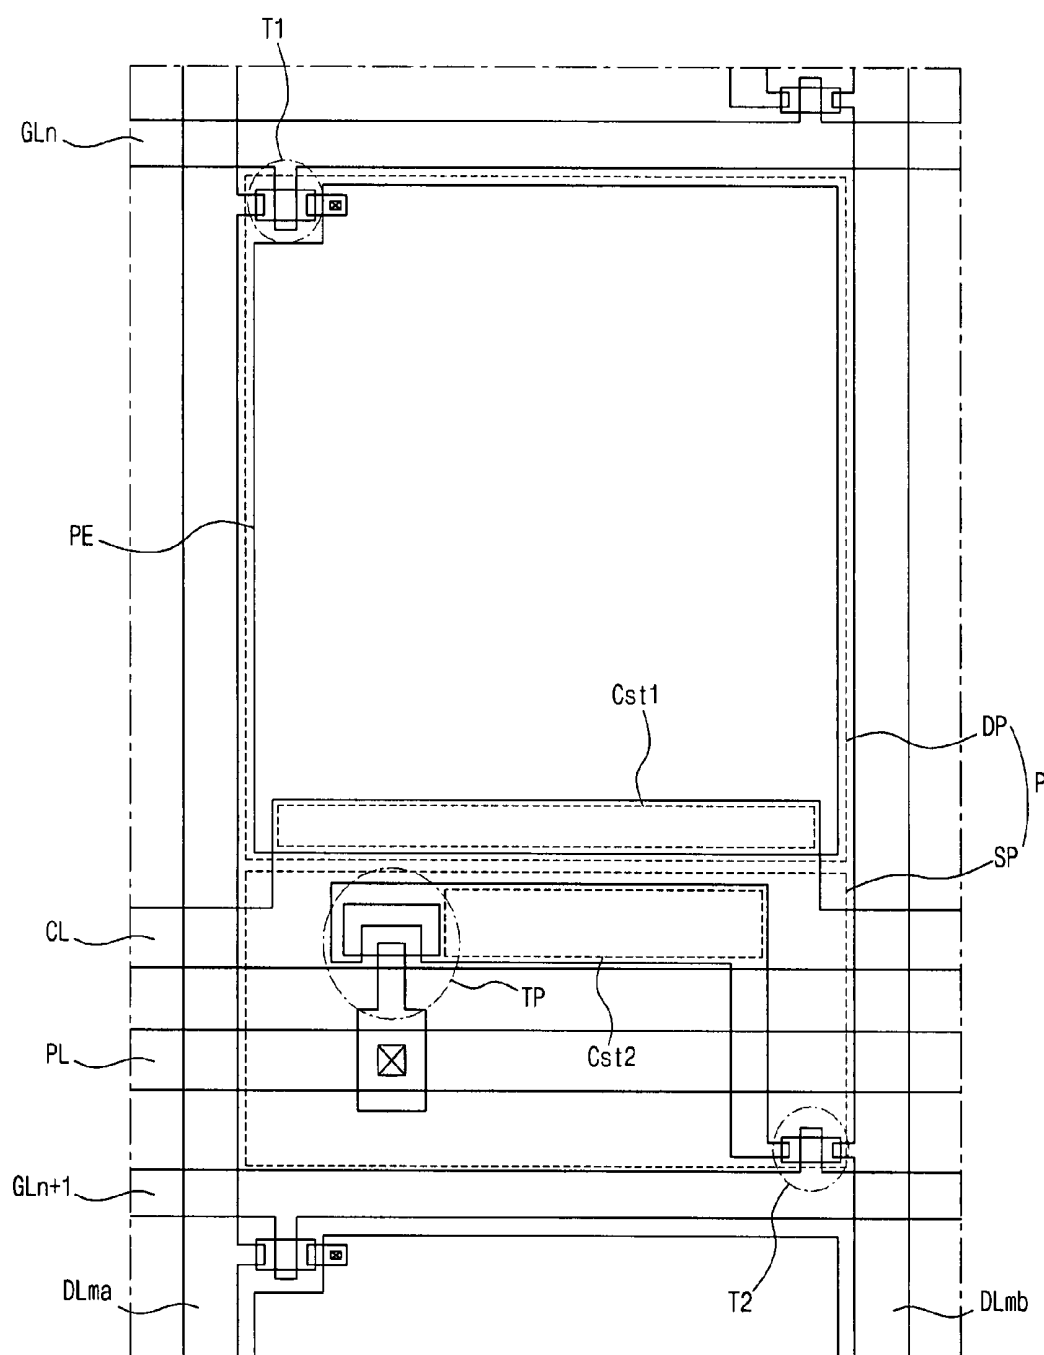


FIG. 4

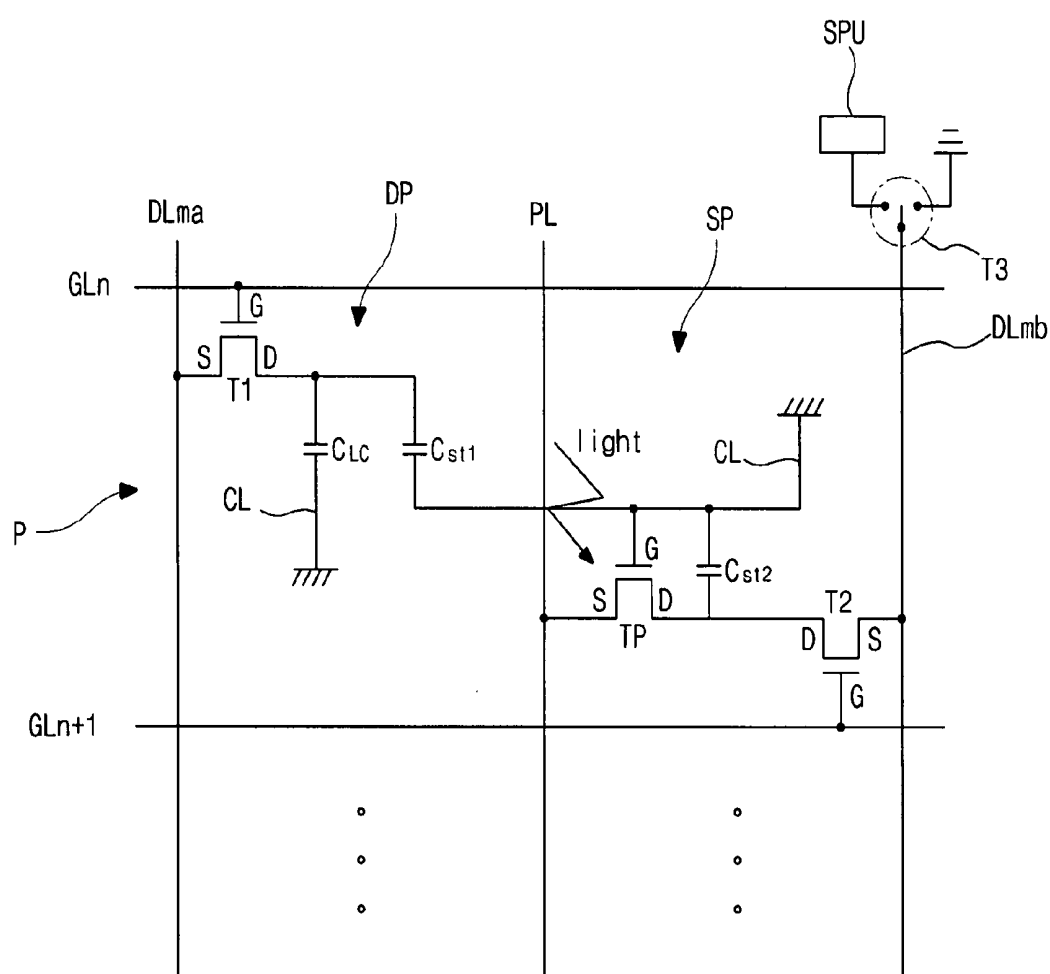


FIG. 5

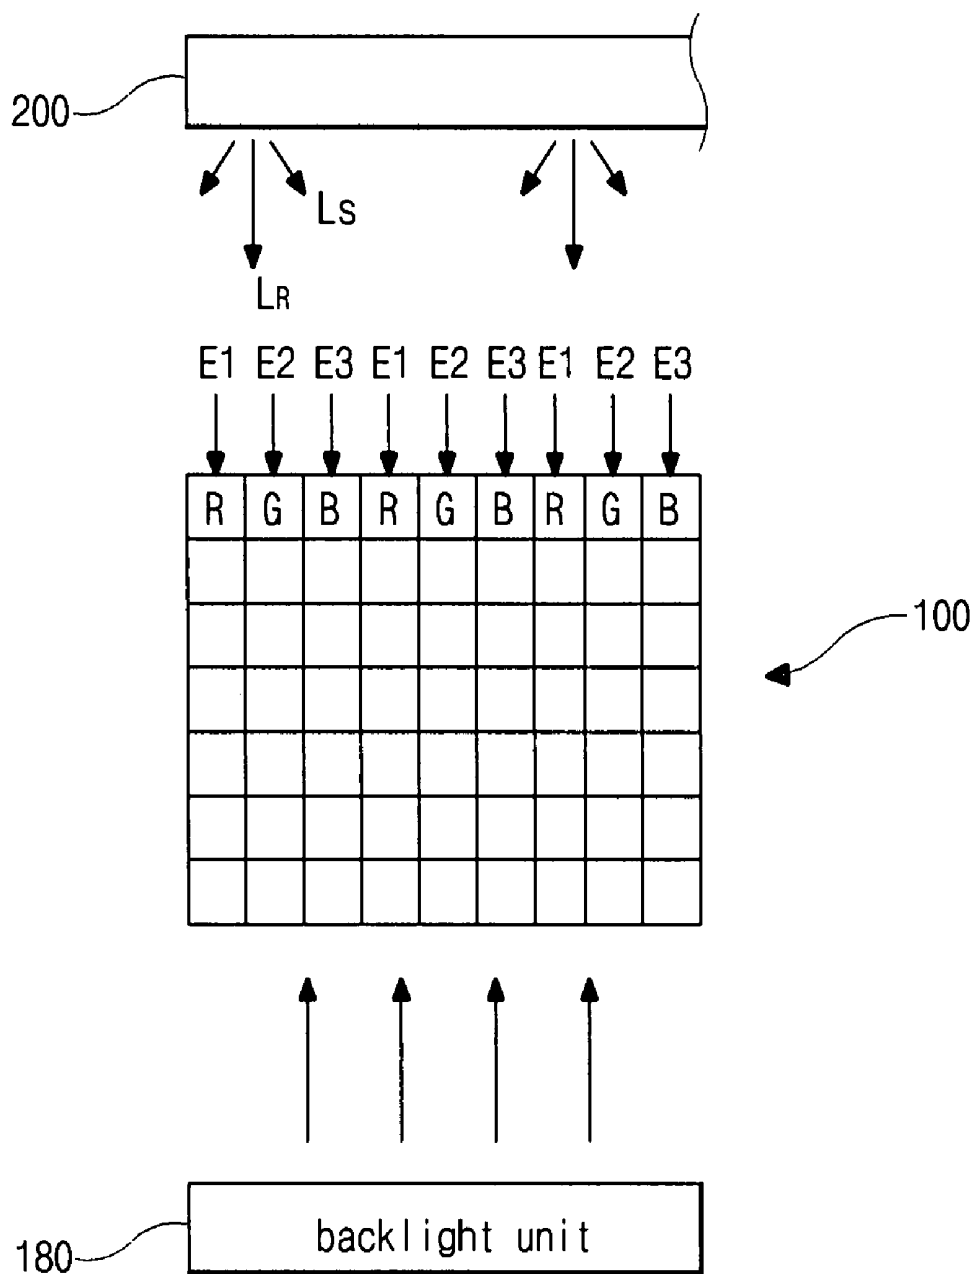


FIG. 6


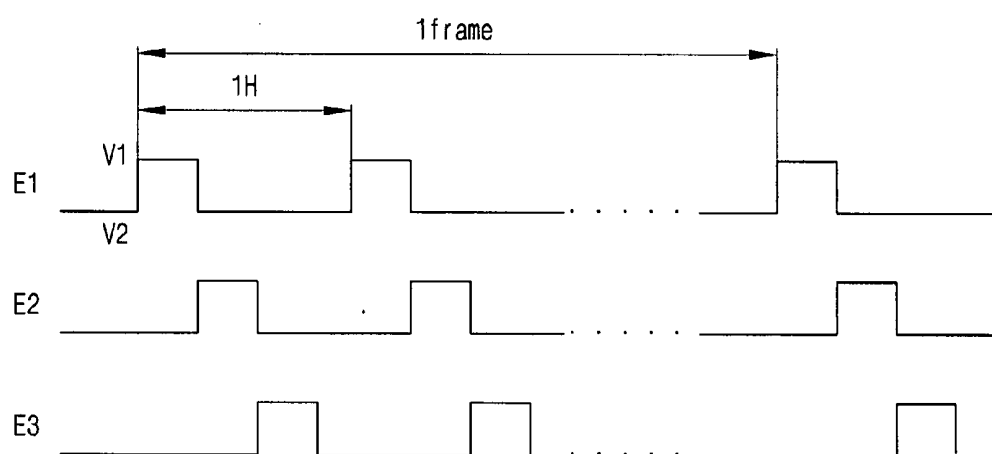


FIG. 7

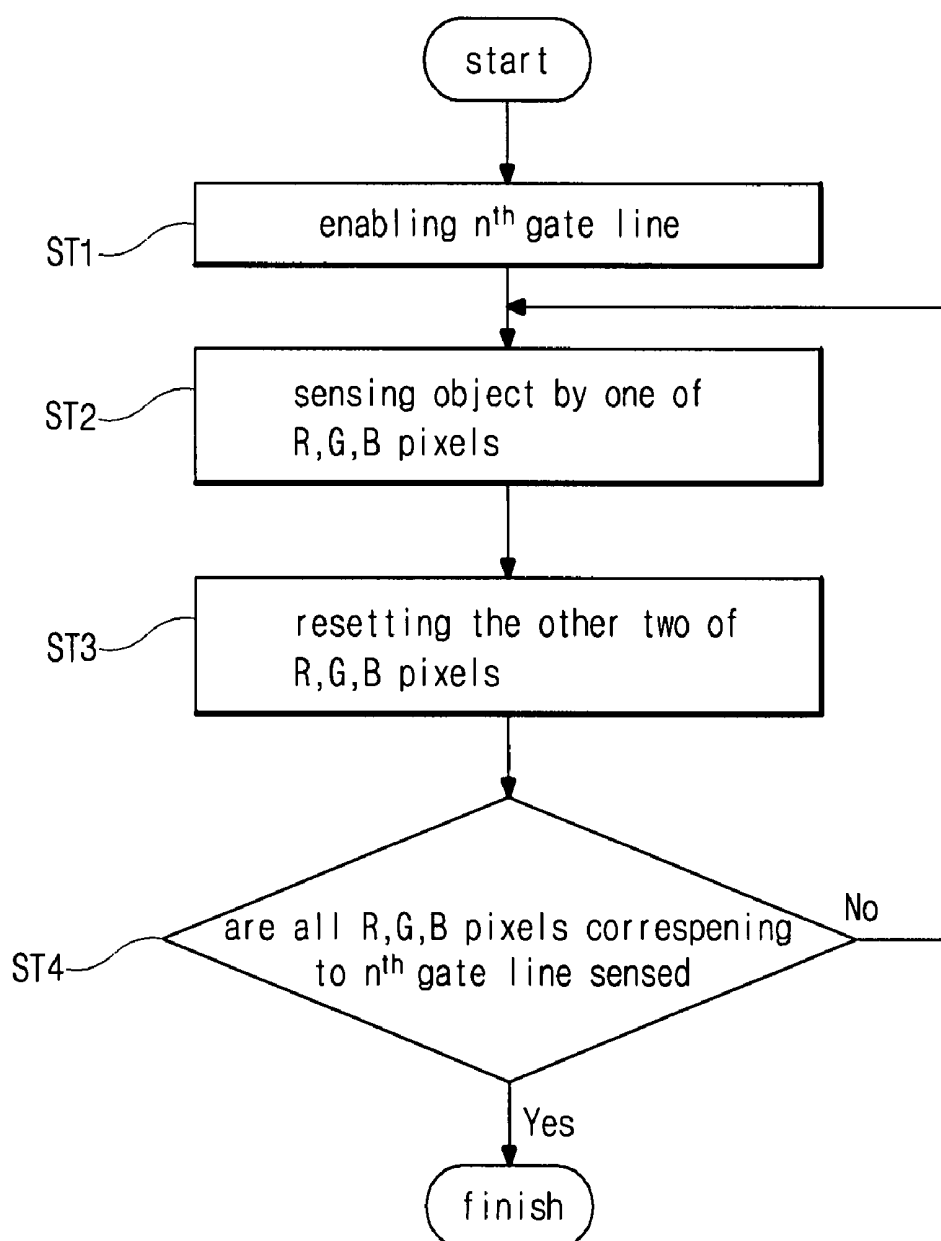

**LIQUID CRYSTAL DISPLAY DEVICE
INCLUDING IMAGE SENSOR AND METHOD
OF DRIVING THE SAME**

[0001] The invention claims the benefit of Korean Patent Application No. 10-2006-0138466 filed in Korea on Dec. 29, 2006, which is hereby incorporated by reference in its entirety.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] Embodiments of the invention relate to a liquid crystal display device, and more particularly, to a liquid crystal display device and the method of driving the same. Although embodiments of the invention are suitable for a wide scope of applications, they are particularly suitable for obtaining a liquid crystal display device including an image sensor and the method of driving the same.

[0004] 2. Discussion of the Related Art

[0005] Liquid crystal display (LCD) devices use the optical anisotropy and polarization properties of liquid crystal molecules to produce an image. The liquid crystal molecules have long and thin shapes, and have the optical anisotropy property, such that the liquid crystal molecules can be aligned along an alignment direction. The liquid crystal molecules also have the polarization property, such that the alignment direction can be changed according to an intensity of an applied electric field. In particular, the arrangement of the liquid crystal molecules can be changed by varying the intensity of the electric field. Consequently, light transmittance of the liquid crystal molecules is controlled by the electric field, and the LCD device displays images due to the changes in light transmittance.

[0006] In general, an LCD device includes a liquid crystal panel and a driving circuit. The liquid crystal panel includes first and second substrates spaced apart from each other and a liquid crystal layer between the first and second substrates. The first substrate, which is commonly referred to as an array substrate, has a thin film transistor and a pixel electrode, and the second substrate, which is commonly referred to as a color filter substrate, has a color filter layer and a common electrode. The driving circuit electrically drives the liquid crystal panel. Since the LCD device is a non-emissive type device, the LCD device includes a light source, such as a backlight unit, under the liquid crystal panel.

[0007] FIG. 1 is a schematic diagram illustrating an LCD device according to the related art. In FIG. 1, an LCD device includes a liquid crystal panel 10, a gate driver 20, a data driver 40, a timing controller 60 and a backlight unit 80. The liquid crystal panel 10 includes a plurality of gate lines GL1 to GLn and a plurality of data lines DL1 to DLm on a substrate. The plurality of gate lines GL1 to GLn cross the plurality of data lines DL1 to DLm to define a plurality of pixel regions. Each of the pixel regions includes a thin film transistor TFT and a liquid crystal capacitor C_{lc} to display images. The gate driver 20 and the data driver 40 supply driving signals and image signals to the liquid crystal panel 10 through the plurality of gate lines GL1 to GLn and the plurality of data lines DL1 to DLm, and the timing controller 60 controls the gate driver 20 and the data driver 40. The backlight unit 80 is disposed under the liquid crystal panel 10 and supplies light onto the liquid crystal panel 10.

[0008] A thin film transistor has been explored for applications as a switching element and also as an image sensing element. The thin film transistor, when functioning as an image sensing element, stores information corresponding to intensity of light and outputs the stored information in response to an external control signal. For example, the thin film transistor, when functioning as an image sensing element, may be used as an image reader of an image treating machine, such as a scanner and a digital duplicator.

[0009] Recently, a multi-functional electronic device has been the subject of research and development so that instead of using several traditional goods, a single device can achieve the same results. In addition, a device including an image sensing element is required to have various functions.

[0010] Accordingly, an LCD device including an image sensor has been researched and developed. Since an LCD device including an image sensor displays and senses images, such an LCD device including an image sensor has advantages in space utilization and production cost. In an LCD device including an image sensor, however, since a selected pixel receives a sensed data corresponding to an adjacent pixel due to light scattering, a sensed data corresponding to the selected pixel may be interfered.

SUMMARY OF THE INVENTION

[0011] Accordingly, embodiments of the invention is directed to a liquid crystal display device and the method of driving the same that substantially obviate one or more of the problems due to limitations and disadvantages of the related art.

[0012] An object of the embodiments of the invention is to provide a liquid crystal display device including an image sensor where an interference of a sensed data is prevented and a method of driving the same.

[0013] Additional features and advantages of embodiments of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of embodiments of the invention. The objectives and other advantages of the embodiments of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0014] To achieve these and other advantages and in accordance with the purpose of embodiments of the invention, as embodied and broadly described, a liquid crystal display device includes a first data line and a second data line, the first and second data lines substantially parallel to one another, a first gate line, the first gate line crossing the first data line and the second data line, a display sub-pixel defined by the crossing of the first gate line and the first data line, a sensing sub-pixel defined by the crossing of the first gate line and the second data line, and a first switching element for connecting the second data line connected to one of a sensing processing unit and a ground terminal, wherein the display sub-pixel transmits light supplied from a light source in accordance to a data signal applied to the first data line, and the sensing sub-pixel senses light incident on the liquid crystal display device and generates charges corresponding to the sensed light.

[0015] In another aspect, a liquid crystal display device includes a plurality of first sub-pixels, the first sub-pixels activated to display an image by selectively transmitting light irradiated from a rear side of the device, and a plurality of second sub-pixels, the second sub-pixels selectively activated

to sense one color light irradiated onto a front side of the device, wherein the first sub-pixels and the second sub-pixels locate alternatively with one another.

[0016] In another aspect, a method of driving a liquid crystal display device includes in a display mode, sequentially activating a first color display sub-pixel, a second color display sub-pixel and a third color display sub-pixel, and in a sensing mode, during a first sub-period, activating a first color sensing sub-pixel, during a second sub-period, activating a second color sensing sub-pixel, and during a third sub-period, activating a third color sensing sub-pixel.

[0017] In another aspect, a method of driving a liquid crystal display device having first, second and third pixels, each of the first, second and third pixels having a display sub-pixel and a sensing sub-pixel includes transmitting a first light through the display sub-pixel and sensing a second light in the sensing sub-pixel of one of the first, second and third pixels, and shielding the first light in the display sub-pixels of the other two of the first, second and third pixels.

[0018] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of embodiments of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] The accompanying drawings, which are included to provide a further understanding of embodiments of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of embodiments of the invention. In the drawings:

[0020] FIG. 1 is a schematic diagram illustrating an LCD device according to the related art;

[0021] FIG. 2 is a schematic diagram illustrating a liquid crystal display device according to an embodiment of the invention;

[0022] FIG. 3 is a plan view schematic diagram illustrating an array substrate for an LCD device according to an embodiment of the invention;

[0023] FIG. 4 is an equivalent circuit diagram schematically illustrating an LCD device according to an embodiment of the invention;

[0024] FIG. 5 is a schematic diagram illustrating a method of driving an LCD device according to an embodiment of the invention;

[0025] FIG. 6 is a timing chart illustrating display data signals for an LCD device in a sensing mode according to an embodiment of the invention; and

[0026] FIG. 7 is a flow chart illustrating a sensing process in an LCD device according to an embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0027] Reference will now be made in detail to the preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings.

[0028] FIG. 2 is a schematic diagram illustrating a liquid crystal display device according to an embodiment of the invention. In FIG. 2, a liquid crystal display (LCD) device having a display mode and a sensing mode includes a pixel P having a display sub-pixel DP and a sensing sub-pixel SP. The display sub-pixel DP and the sensing sub-pixel SP are used for the display mode and the sensing mode, respectively. In

addition, the LCD device includes a plurality of gate lines GL1 . . . GLn, a display data line DLma and a sensing data line DLmb. The gate lines GL1 . . . GLn cross the display data line DLma and the sensing data line DLmb. The display sub-pixel is defined by crossing of the gate lines GL1 . . . GLn and the display data line DLma, and the sensing sub-pixel is defined by crossing of the gate lines GL1 . . . GLn and the sensing data line DLmb.

[0029] A first switching element (not shown) in the display sub-pixel DP is turned on/off in response to a gate signal through the gate line GLn and a display data signal through the display data line DLma is transmitted to the display sub-pixel DP when the first switching element is turned on. Accordingly, the display sub-pixel displays images by changing a transmittance of a liquid crystal layer in response to the display data signal. In addition, an image sensor in the sensing sub-pixel SP senses light reflected from an object and generates charges corresponding to the reflected light. A second switching element (not shown) in the sensing sub-pixel SP is turned on/off in response to a sensing gate signal through the gate line GLn and a sensing data signal corresponding to the charges is transmitted to a sensing processing unit through the sensing data line DLmb when the second switching element is turned on.

[0030] Although the display sub-pixel DP and the sensing sub-pixel SP are connected to different gate lines to drive the display sub-pixel DP and the sensing sub-pixel SP independently in FIG. 2, the display sub-pixel DP and the sensing sub-pixel SP alternatively may be connected to the same gate line.

[0031] FIG. 3 is a plan view schematic diagram illustrating an array substrate for an LCD device according to an embodiment of the invention. In FIG. 3, a gate line GLn, a next gate line GL_{n+1}, a common line CL, a power line PLn, a display data line DLma and a sensing data line DLmb are formed on a substrate. The gate line GLn, the next gate line GL_{n+1}, the common line CL and the power line PLn are parallel to one another, and the display data line DLma and the sensing data line DLmb are parallel to each other. The gate line GLn, the next gate line GL_{n+1}, the common line CL and the power line PLn may be formed of the same material as one another, and the display data line DLma and the sensing data line DLmb may be formed of the same material as each other. Further, the gate line GLn, the next gate line GL_{n+1}, the common line CL and the power line PLn cross the display data line DLma and the sensing data line DLmb. A pixel P is defined by crossing of the gate line GLn, the display data line DLma and the sensing data line DLmb. The pixel P includes a display sub-pixel DP and a sensing sub-pixel SP.

[0032] The display sub-pixel DP includes a first switching element T1 of a thin film transistor (TFT), a first storage capacitor Cst1 and a liquid crystal capacitor (not shown). A gate electrode of the first switching element T1 is connected to the first gate line GLn and a source electrode of the first switching element T1 is connected to the display data line DLma. A pixel electrode PE in the display sub-pixel DP is connected to a drain electrode of the first switching element T1. The pixel electrode PE overlaps the common line CL to form the first storage capacitor Cst1.

[0033] The sensing sub-pixel SP includes a sensing element TP of a TFT, a second storage capacitor Cst2 and a second switching element T2 of a TFT. A source electrode of the sensing element TP is connected to the power line PL and a gate electrode of the sensing element TP is connected to the

common line CL. A drain electrode of the sensing element TP overlaps the common line CL to form the second storage capacitor Cst2 and is connected to a source electrode of the second switching element T2. A gate electrode of the second switching element T2 is connected to the next gate line GL_{n+1} and a drain electrode of the second switching element T2 is connected to the sensing data line DLmb.

[0034] The display sub-pixel DP displays images in accordance with a display data signal applied to the pixel electrode PE through the display data line DLma in a display mode, while the sensing sub-pixel SP senses images and a sensing processing unit (not shown) reads a sensing data signal corresponding to the sensed images through the sensing data line DLmb in a sensing mode.

[0035] Although the power line PL is shown to be parallel to the gate line GLn in FIG. 3, the power line PL may be parallel to and formed of the same material as the display and sensing data lines DLma and DLmb in another embodiment. In addition, although the second switching element T2 is connected to the next gate line GL_{n+1} in FIG. 3, the second switching element T2 may be connected to the corresponding gate line GLn or a previous gate line (not shown). Further, although not shown, an LCD device includes an array substrate, a color filter substrate and a liquid crystal layer between the array substrate and the color filter substrate. In addition, the color filter substrate includes a color filter layer and a common electrode.

[0036] FIG. 4 is an equivalent circuit diagram schematically illustrating an LCD device according to an embodiment of the invention. In FIG. 4, an LCD device includes a pixel having a display sub-pixel DP and a sensing sub-pixel SP. The display sub-pixel DP is defined by crossing of an n^{th} gate line GLn, an m^{th} display data line DLma and a power line PL, and the sensing sub-pixel SP is defined by crossing of an $(n+1)^{th}$ gate line GL_{n+1} , an m^{th} sensing data line DLmb and a power line PL.

[0037] The display sub-pixel DP displaying images includes a first switching element T1, a liquid crystal capacitor C_{LC} and a first storage capacitor Cst1. The first switching element T1 may include a thin film transistor (TFT). A gate electrode of the first switching element T1 is connected to the n^{th} gate line GLn and a source electrode of the first switching element T1 is connected to the m^{th} display data line DLma. A drain electrode of the first switching element T1 is connected to first electrodes of the liquid crystal capacitor C_{LC} and the first storage capacitor Cst1. Second electrodes of the liquid crystal capacitor C_{LC} and the first storage capacitor Cst1 may be grounded through a common line CL.

[0038] The sensing sub-pixel SP sensing images include an image sensor TP, a second storage capacitor Cst2, and a second switching element T2. The image sensor TP and the second switching element T2 may respectively include a thin film transistor (TFT). In addition, the image sensor TP may include a photo transistor. A gate electrode of the image sensor TP is grounded through the common line CL and a source electrode of the image sensor TP is connected to a power line PL. A drain electrode of the image sensor TP is connected to a first electrode of the second storage capacitor Cst2 and a drain electrode of the second switching element T2. A second electrode of the second storage capacitor Cst2 is grounded through the common line CL. A gate electrode of the second switching element T2 is connected to the $(n+1)^{th}$

gate line GL_{n+1} and a source electrode of the second switching element T2 is connected to the m^{th} sensing data line DLmb.

[0039] In FIG. 4, to drive a display mode and a sensing mode independently, the display sub-pixel DP and the sensing sub-pixel SP are connected to the n^{th} and $(n+1)^{th}$ gate lines GLn and GL_{n+1} , respectively. In another embodiment, however, the display sub-pixel DP and the sensing sub-pixel SP may be connected to the same gate line or connected to n^{th} and $(n-1)^{th}$ gate lines GLn and GL_{n-1} (not shown), respectively.

[0040] The LCD device according to an embodiment of the invention can be driven in the display mode and in the sensing mode. In the display mode, a gate signal is sequentially supplied to the n^{th} and $(n+1)^{th}$ gate lines GLn and GL_{n+1} . For example, when the gate signal of a high level voltage is supplied to the n^{th} gate line GLn, the first switching element T1 is turned on. A display data signal supplied to the m^{th} display data line DLma is transmitted to the liquid crystal capacitor C_{LC} and the first storage capacitor Cst1 through the first switching element T1. Accordingly, the liquid crystal capacitor changes transmittance of a liquid crystal layer of the liquid crystal capacitor C_{LC} , thereby displaying images corresponding to the display data signal. Although not shown in FIG. 4, a backlight unit supplies light to the liquid crystal capacitor C_{LC} . When the gate signal of a low level voltage is supplied to the n^{th} gate line GLn, the first switching element T1 is turned off and a voltage of the liquid crystal capacitor C_{LC} is maintained using charges in the first storage capacitor Cst1.

[0041] In the sensing mode, the gate signal is sequentially supplied to the n^{th} and $(n+1)^{th}$ gate lines GLn and GL_{n+1} . For example, when the gate signal of a high level voltage is supplied to the n^{th} gate lines GLn, the first switching element T1 is turned on and the display data signal corresponding to a brightest image is applied to the display sub-pixel DP. The brightest image corresponds to the maximum transmittance of the display sub-pixel DP. Accordingly, light from the backlight unit passes through the display sub-pixel DP, incident on an object that may be in front of the LCD device, and reflects back to the LCD device from the object.

[0042] The reflected light enters the image sensor TP of the sensing sub-pixel SP and a photo current corresponding to an intensity of the reflected light is generated in the image sensor TP. The photo current of the image sensor TP is stored in the second storage capacitor Cst2 as charges corresponding to the intensity of the reflected light. When the gate voltage of a high level voltage is supplied to the $(n+1)^{th}$ gate line GL_{n+1} , the second switching element T2 is turned on and the charges in the second storage capacitor Cst2 are read by a sensing processing unit SPU through the m^{th} sensing data line DLmb as a sensing data signal. The sensing processing unit SPU may include a read out integrated circuit (ROIC) and the sensing data signal may be stored in an additional memory.

[0043] When the LCD device according to an embodiment of the invention displays and senses color images, the pixel P may be classified into red, green and blue pixels R, G and B. In the sensing mode, the LCD device sequentially senses and reads red, green and blue colors of the images. Accordingly, while a selected color is sensed and read in the selected colored pixel, a display data signal corresponding to a darkest image is applied to the display sub-pixel DP of the other colored pixels and light from the backlight unit is blocked. The darkest image corresponds to the minimum transmittance of the display sub-pixel DP. As a result, the other colors

are not sensed and read while the selected color is sensed and read and a sensing accuracy of the LCD device is improved.

[0044] However, the reflected light corresponding to the selected color may enter the other colored pixels due to light scattering and abnormal charges may be stored in the second storage capacitor in the sensing sub-pixel of the other colored pixels. To reset the abnormal charges, the LCD device according to an embodiment of the invention may further include a third switching element T3, such as three-way switch connected to the m^{th} sensing data line DLmb. The m^{th} sensing data line DLmb may be connected to the sensing processing unit SPU or may be grounded by the third switching element T3. While the normal charges of the sensing data signal are stored in the second storage capacitor Cst2, the m^{th} sensing data line DLmb is connected to the sensing processing unit SPU and the normal charges are read. While the abnormal charges are stored in the second storage capacitor Cst2, the m^{th} sensing data line DLmb is grounded and the abnormal charges are reset. Accordingly, the third switching element T3 connects m^{th} sensing data line DLmb to the sensing processing unit SPU in sync with the display data signal corresponding to the brightest image.

[0045] FIG. 5 is a schematic diagram illustrating a method of driving an LCD device according to an embodiment of the invention, and FIG. 6 is a timing chart illustrating display data signals for an LCD device in a sensing mode according to an embodiment of the invention. In FIG. 5, an LCD device operating in a display mode and a sensing mode includes a liquid crystal panel 100 and a backlight unit 180. An object 200 for sensing is disposed in front of the LCD device. The liquid crystal panel 100 includes red, green and blue pixels R, G and B displaying and sensing red, green and blue colors, respectively. The backlight unit 180 supplies light to the liquid crystal panel 100.

[0046] In the sensing mode, the light from the backlight unit 180 passes through a display sub-pixel DP (of FIG. 4), incidents on the object 200 and reflects from the object 200. The reflected light enters a sensing sub-pixel SP (of FIG. 4) to be stored as a sensing data signal and a sensing processing unit SPU (of FIG. 4) reads the sensing data signal to recognize the object. A gate signal is sequentially supplied to gate lines of the liquid crystal panel 100. During one horizontal time period, the gate signal of a high level voltage is supplied to a selected gate line, and a display data signal is applied to the display sub-pixel DP (of FIG. 4) corresponding to the selected gate line. Here, the display data signal is not applied to the red, green and blue pixels R, G and B at the same time. Accordingly, the display data signal may be classified into first, second and third display data signals E1, E2 and E3 for the red, green and blue pixels R, G and B, respectively.

[0047] As shown in FIG. 6, for example, each of the first, second and third display data signals E1, E2 and E3 of the sensing mode has a first voltage V1 corresponding to a brightest image and a second voltage corresponding to the darkest image. The first voltage V1 is maintained during about one-third of one horizontal time period H1 and the second voltage V2 is maintained during about two-third of the one horizontal time period H2. In addition, the first voltage V1 is repeated every horizontal time period H1. While the first display data signal E1 has the first voltage V1, the second and third display data signals E2 and E3 have the second voltage V2. Similarly, the third and first display data signals E3 and E1 have the second voltage V2 while the second display data signal E2 has the first voltage V1, and the first and second display data signals E1 and E2 have the second voltage V2 while the third display data signal E3 has the first voltage V1. Accordingly, one of the first, second and third display data signals E1, E2

and E3 has the first voltage V1 and the other two of the first, second and third display data signals E1, E2 and E3 have the second voltage V2. Further, the first, second and third display data signals E1, E2 and E3 sequentially have the first voltage V1 during the one horizontal time period H1.

[0048] Referring again to FIG. 5, when the first voltage V1 of the display data signal is applied to the display sub-pixel DP (of FIG. 4), the display sub-pixel DP transmits light from the backlight unit 180. In addition, when the second voltage V2 of the display data signal is applied to the display sub-pixel DP, the display sub-pixel DP shields light from the backlight unit 180. Since the first, second and third display data signals E1, E2 and E3 sequentially have the first voltage V1 (of FIG. 6), the display sub-pixels DPs of the red, green and blue pixels R, G and B sequentially transmits light from the backlight unit 180, and red, green and blue colored light are sequentially irradiated onto the object 200.

[0049] For example, the display sub-pixel DP of the red pixel R may transmit light and the display sub-pixels DPs of the green and blue pixels G and B may shield light during the first one-third of the one horizontal time period 1H (of FIG. 6). Similarly, the display sub-pixel DP of the green pixel G may transmit light and the display sub-pixels DPs of the blue and red pixels B and R may shield light during the second one-third of the one horizontal time period 1H. In addition, the display sub-pixel DP of the blue pixel B may transmit light and the display sub-pixels DPs of the red and green pixels R and G may shield light during the third one-third of the one horizontal time period 1H. Therefore, red, green and blue colored light sequentially reflect from the object and the reflected red, green and blue colored light L_R are sequentially sensed by the sensing sub-pixels SPs (of FIG. 4) of the red, green and blue pixels R, G and B.

[0050] For example, during the first one-third of the one horizontal time period 1H, the red colored light is irradiated onto the object. Although most of the red colored light reflects with an orthogonal angle with respect to a surface of the object, some of the red colored light is scattered at the object with an oblique angle with respect to the surface of the object. Accordingly, the reflected red colored light L_R enters the sensing sub-pixel SP of the red pixel R and the scattered red colored light L_S enters the sensing sub-pixels SPs of adjacent green and blue pixels G and B. In the sensing sub-pixel SP of the red pixel R, the reflected red light L_R is sensed by the image sensor TP and stored in the second storage capacitor Cst2 as a normal sensing data signal. The normal sensing data signal is transmitted to the sensing processing unit SPU (of FIG. 4) through the m^{th} sensing data line DLmb while the second switching element T2 is turned on. In the sensing sub-pixels SPs of the adjacent green and blue pixels G and B, the scattered red light L_S is sensed by the image sensors TPs and is stored in the second storage capacitor Cst2 as a dummy sensing data signal. The dummy sensing data signal distorts normal sensing data signals corresponding to the reflected green and blue colored light in the subsequent second and third one-thirds of the one horizontal time period 1H.

[0051] To solve the above problem of the dummy sensing data signal, the dummy sensing data signal may be reset. As shown in FIG. 4, a third switching element T3 is connected to the m^{th} sensing data line DLmb to select one of the sensing processing unit SPU such as a read out integrated circuit ROIC and the ground terminal. Accordingly, during the first one-third of the one horizontal time period 1H, the third switching element T3 of the red pixel R connects the m^{th} sensing data line DLmb and the sensing processing unit SPU, and the third switching elements T3 of the green and blue pixels G and B ground the m^{th} sensing data line DLmb. As a

result, during the first one-third of the one horizontal time period $1H$, the normal sensing data signal corresponding to the reflected red colored light L_R is transmitted to the sensing processing unit SPU and the dummy sensing data signal corresponding to the scattered red colored light L_S is transmitted to the ground terminal, i.e., the dummy sensing data signal is reset to discharge the second storage capacitor $Cst2$ in the green and blue pixels G and B.

[0052] Similarly, during the second one-third of the one horizontal time period $1H$, the m^{th} sensing data line $DLmb$ of the green pixel G is connected to the sensing processing unit SPU and the m^{th} sensing data lines $DLmb$ of the blue and red pixels B and R are grounded. Accordingly, the normal sensing data signal corresponding to the reflected green colored light L_G is transmitted to the sensing processing unit SPU and the dummy sensing data signal corresponding to the scattered green colored light L_S is reset. Similar process is performed during the third one-third of the one horizontal time period $1H$.

[0053] In the LCD device according to an embodiment of the invention, since the reflected red, green and blue colored light are sequentially and independently sensed, interference between colors is prevented and a sensing property is improved. In addition, since the dummy sensing data signal corresponding to the scattered light is reset, distortion by the dummy sensing data signal is prevented and the sensing property is further improved.

[0054] FIG. 7 is a flow chart illustrating a sensing process in an LCD device according to an embodiment of the invention. As shown in FIG. 7, at a first step ST1, an n^{th} gate line is enabled. For example, a gate signal of a high level voltage is supplied to the n^{th} gate line and a first switching element T1 (of FIG. 4) is turned on.

[0055] At a second step ST2, an object is sensed by one of red, green and blue pixels R, G and B (of FIG. 5). For example, a first voltage V1 (of FIG. 6) corresponding to a brightest image is applied to a display sub-pixel DP (of FIG. 4) of the red pixel R and a second voltage V2 (of FIG. 6) corresponding to the darkest image is applied to display sub-pixels DP of the green and blue pixels G and B. Accordingly, light from a backlight unit 180 (of FIG. 5) passes through the display sub-pixel DP of the red pixel R and is blocked in the display sub-pixels DP of the green and blue pixels G and B. The light reflecting from the object is sensed by a sensing sub-pixel SP (of FIG. 4) of the red pixel R and stored as a normal sensing data signal.

[0056] At a third step ST3, sensing data signals of the other two of red, green and blue pixels R, G and B are reset. When light passing through the display sub-pixel DP of the red pixel R is scattered at the object, the scattered light is stored in the sensing sub-pixel SP of the green and blue pixels G and B as a dummy sensing data signal. While the n^{th} gate line is enabled, the second switching element T2 (of FIG. 4) is turned on. As a result, the dummy sensing data signals of the green and blue pixels G and B are reset, while the normal sensing data signal of the red pixel R is transmitted to a sensing processing unit SPU. If the scattered light is negligible, the third step ST3 may be omitted.

[0057] At a fourth step ST4, whether all the red, green and blue pixels R, G and B corresponding to the n^{th} gate line are sensed is judged. If all the red, green and blue pixels R, G and B corresponding to the n^{th} gate line are not sensed (No), the second to fourth steps ST2 to ST4 are repeated. If all the red, green and blue pixels R, G and B corresponding to the n^{th} gate line are sensed (Yes), the sensing process for the n^{th} gate line is finished and a sensing process for an $(n+1)^{th}$ gate line will be performed.

[0058] Consequently, in the LCD device according to an embodiment of the invention and the method of driving the same, interference between light of different colors is prevented because red, green and blue pixels sequentially sense images. Moreover, distortion by dummy sensing data signals is prevented because the dummy sensing data signals due to scattered light is reset before reading a normal sensing data signal. As a result, a sensing property is improved.

[0059] It will be apparent to those skilled in the art that various modifications and variations can be made in the liquid crystal display device and the method of driving the same of embodiments of the invention without departing from the spirit or scope of the invention. Thus, it is intended that embodiments of the invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A liquid crystal display device, comprising:

- a first data line and a second data line, the first and second data lines substantially parallel to one another;
- a first gate line, the first gate line crossing the first data line and the second data line;
- a display sub-pixel defined by the crossing of the first gate line and the first data line;
- a sensing sub-pixel defined by the crossing of the first gate line and the second data line; and
- a first switching element for connecting the second data line to one of a sensing processing unit and a ground terminal,

wherein the display sub-pixel transmits light supplied from a light source in accordance to a data signal applied to the first data line, and

the sensing sub-pixel senses light incident on the liquid crystal display device and generates charges corresponding to the sensed light.

2. The device according to claim 1, wherein the display sub-pixel includes a second switching element connected to the first gate line and the first data line.

3. The device according to claim 1, wherein the sensing sub-pixel includes a third switching element for sensing the incident light and a fourth switching element for selectively applying the charges to the second data line.

4. The device according to claim 3, wherein the third switching element is connected to a common line and a power line, and the fourth switching element is connected to the second data line and one of the first gate line and a next gate line.

5. A liquid crystal display device, comprising:

- a plurality of first sub-pixels, the first sub-pixels activated to display an image by selectively transmitting light irradiated from a rear side of the device; and
 - a plurality of second sub-pixels, the second sub-pixels selectively activated to sense one color light irradiated onto a front side of the device;
- wherein the first sub-pixels and the second sub-pixels locate alternatively with one another.

6. The device according to claim 5, wherein the first sub-pixels include a first color display sub-pixel, a second color display sub-pixel and a third color display sub-pixel, the first, second and third color display sub-pixels sequentially driven.

7. The device according to claim 5, wherein the second sub-pixels include a first color sensing sub-pixel, a second color sensing sub-pixel and a third color sensing sub-pixel, the first, second and third color sensing sub-pixels sequentially generating intensity signals.

8. The device according to claim 7, further comprising:
a sensing processing unit, the sensing processing unit selectively connected to receive the intensity signals from one of the first, second and third color sensing sub-pixels.
9. The device according to claim 5, further comprising:
a plurality of gate lines, first data lines, second data lines, power lines and common lines, the gate lines crossing the first data lines to define the plurality of first sub-pixels, the gate lines crossing the second data lines to define the plurality of second sub-pixels.
10. A method of driving a liquid crystal display device comprising:
in a display mode, sequentially activating a first color display sub-pixel, a second color display sub-pixel and a third color display sub-pixel; and
in a sensing mode,
during a first sub-period, activating a first color sensing sub-pixel;
during a second sub-period, activating a second color sensing sub-pixel; and
during a third sub-period, activating a third color sensing sub-pixel.
11. The method according to claim 10, wherein
the color display sub-pixels include a red color display sub-pixel, a green display sub-pixel and a blue display sub-pixel,
the color sensing sub-pixels include a red color sensing sub-pixel, a green sensing sub-pixel and a blue sensing sub-pixel, and
in the sensing mode, activating the color sensing sub-pixels includes:
supplying a gate signal of a high level voltage to an n^{th} gate line to turn on at least three first switching elements and at least three second switching elements connected to the n^{th} gate line;
sequentially supplying a first display data signal to one of the red, green and blue display sub-pixels through one of a red display data line, a green display data line and a blue display data line; and
reading a sensing data signal in the red, green and blue sensing sub-pixels through a red sensing data line, a green sensing data line and a blue sensing data line, respectively.
12. The method according to claim 11, further comprising:
in the sensing mode, supplying a second display data signal to two of the red, green and blue display sub-pixels through two of the red, green and blue display data lines, the second display data signal having a voltage lower than the first display data signal and each of the red, green and blue display sub-pixels receiving one of the first and second display data signals at a time period.
13. The method according to claim 12, wherein the first and second display data signals respectively correspond to maximum and minimum transmittances of each of the red, green and blue display sub-pixels.
14. The method according to claim 11, wherein the reading the sensing data signal includes transmitting the sensing data signal in one of the red, green and blue sensing sub-pixels to a sensing processing unit through one of the red sensing data line, the green sensing data line and the blue sensing data line.
15. The method according to claim 10, wherein
the color display sub-pixels include a red color display sub-pixel, a green display sub-pixel and a blue display sub-pixel,
the color sensing sub-pixels include a red color sensing sub-pixel, a green sensing sub-pixel and a blue sensing sub-pixel, and
in the sensing mode, activating the color sensing sub-pixels includes:
supplying a gate signal of a high level voltage to an n^{th} gate line to turn on at least three first switching elements connected to the n^{th} gate line;
supplying the gate signal of a high level voltage to an $(n+1)^{th}$ gate line to turn on at least three second switching elements connected to the $(n+1)^{th}$ gate line;
sequentially supplying a first display data signal to the red, green and blue display sub-pixels through a red display data line, a green display data line and a blue display data line, respectively; and
reading a sensing data signal in the red, green and blue sensing sub-pixels through a red sensing data line, a green sensing data line and a blue sensing data line, respectively.
16. The method according to claim 15, further comprising:
in the sensing mode, supplying a second display data signal to two of the red, green and blue display sub-pixels through two of the red, green and blue display data lines, the second display data signal having a voltage lower than the first display data signal and each of the red, green and blue display sub-pixels receiving one of the first and second display data signals at a time period.
17. The method according to claim 16, wherein the first and second display data signals respectively correspond to maximum and minimum transmittances of each of the red, green and blue display sub-pixels.
18. The method according to claim 15, wherein the reading the sensing data signal includes transmitting the sensing data signal in one of the red, green and blue sensing sub-pixels to a sensing processing unit through one of the red sensing data line, the green sensing data line and the blue sensing data line.
19. The method according to claim 10, further comprising:
during the first sub-period, resetting the second color sensing sub-pixel and the third color sensing sub-pixel;
during the second sub-period, resetting the first color sensing sub-pixel and the third color sensing sub-pixel; and
during the third sub-period, resetting the first color sensing sub-pixel and the second color sensing sub-pixel.
20. The method according to claim 10, wherein the resetting the sensing sub-pixels includes grounding charges generated at the sensing sub-pixels.
21. A method of driving a liquid crystal display device having first, second and third pixels, each of the first, second and third pixels having a display sub-pixel and a sensing sub-pixel, comprising:
transmitting a first light through the display sub-pixel and sensing a second light in the sensing sub-pixel of one of the first, second and third pixels; and
shielding the first light in the display sub-pixels of the other two of the first, second and third pixels.
22. The method according to claim 21, wherein the transmitting and shielding the first light are repeated to sequentially transmit the first light through the display sub-pixel of each one of the first, second and third pixels.
23. The method according to claim 21, further comprising:
while sensing the second light, sensing a third light in the sensing sub-pixels of the other two of the first, second and third pixels, and resetting a sensing data signal corresponding to the third light in the other two of the first, second and third pixels.

专利名称(译)	包括图像传感器的液晶显示装置及其驱动方法		
公开(公告)号	US20080158120A1	公开(公告)日	2008-07-03
申请号	US11/798299	申请日	2007-05-11
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG.PHILIPS LCD CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	AN CHEUNG HWAN JO YONG WON		
发明人	AN, CHEUNG-HWAN JO, YONG-WON		
IPC分类号	G09G3/36 G02F1/133 G02F1/1343 G02F1/1368 G09G3/20		
CPC分类号	G02F1/1362 H01L27/14645 H01L31/125 H01L27/14689 H01L27/14678		
优先权	1020060138466 2006-12-29 KR		
其他公开文献	US8519943		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示装置包括第一数据线和第二数据线，第一和第二数据线基本上彼此平行，第一栅极线，第一栅极线与第一数据线和第二数据线交叉，显示器由第一栅极线和第一数据线的交叉限定的子像素，由第一栅极线和第二数据线的交叉限定的感测子像素，以及用于连接第二数据线的的第一开关元件传感处理单元和接地端子中的一个，其中显示子像素根据施加到第一数据线的的数据信号传输从光源提供的光，并且传感子像素感测入射在液体上的光晶体显示装置产生与感测光对应的电荷。

