



US 20040169625A1

(19) **United States**

(12) **Patent Application Publication**

Park et al.

(10) **Pub. No.: US 2004/0169625 A1**

(43) **Pub. Date: Sep. 2, 2004**

(54) **LIQUID CRYSTAL DISPLAY PANEL, LIQUID CRYSTAL DISPLAY DEVICE HAVING THE SAME, AND METHOD OF MANUFACTURING THE SAME**

(76) Inventors: **Won-Sang Park, Gyeonggi-do (KR);
Kee-Han Uh, Gyeonggi-do (KR);
Hyung-Guel Kim, Gyeonggi-do (KR);
Jong-Hwan Cho, Gyeonggi-do (KR);
Sang-Jin Park, Gyeonggi-do (KR);
Jae-Hoon Jung, Gyeonggi-do (KR);
Young-Bae Jung, Gyeonggi-do (KR)**

Correspondence Address:

**GRAY CARY WARE & FREIDENRICH LLP
2000 UNIVERSITY AVENUE
E. PALO ALTO, CA 94303-2248 (US)**

(21) Appl. No.: **10/699,142**

(22) Filed: **Oct. 30, 2003**

(30) **Foreign Application Priority Data**

Feb. 28, 2003 (KR) 2003-12768

Apr. 17, 2003 (KR) 2003-24380

Publication Classification

(51) **Int. Cl. 7 G09G 3/36**

(52) **U.S. Cl. 345/87**

(57) **ABSTRACT**

A liquid crystal display panel includes a first substrate, a second substrate and a liquid crystal layer. The first substrate includes a plurality of pixels and a plurality of sensing parts. Each of the sensing parts generates an output signal containing location information in response to an input signal. The location information indicates a location where the input signal is inputted. The second substrate is connected to the first substrate. The second substrate faces the first substrate. The liquid crystal layer is interposed between the first substrate and the second substrate. The liquid crystal display device needs no additional touch panel, so that no air space exists between the liquid crystal display panel and the touch panel. Therefore, a display quality is enhanced.

700

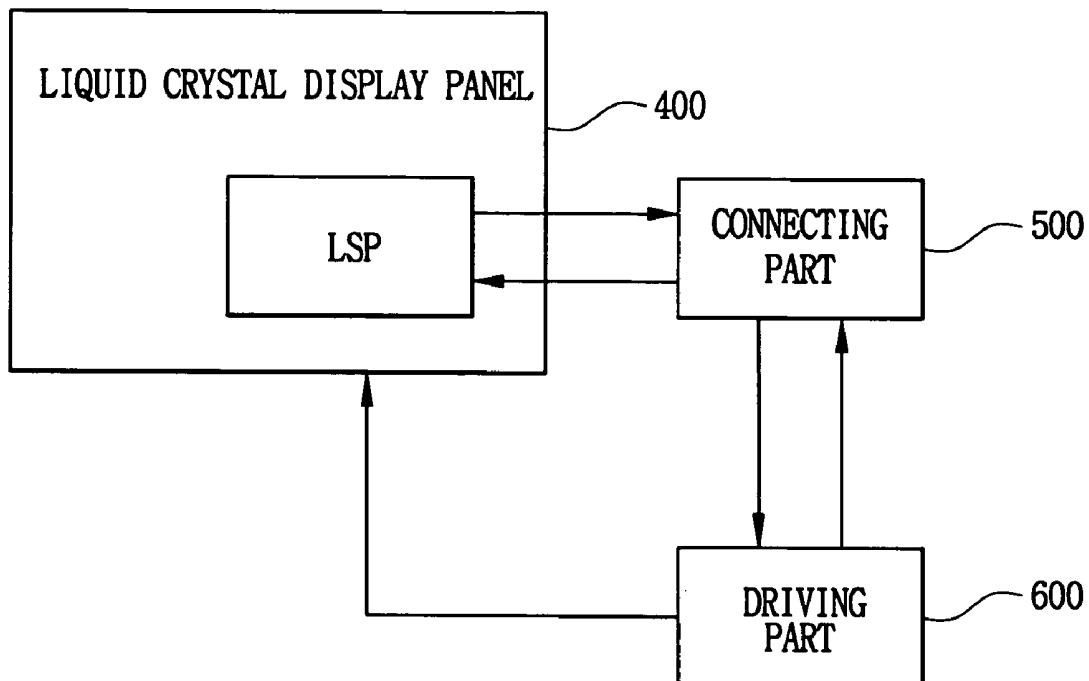


FIG.1

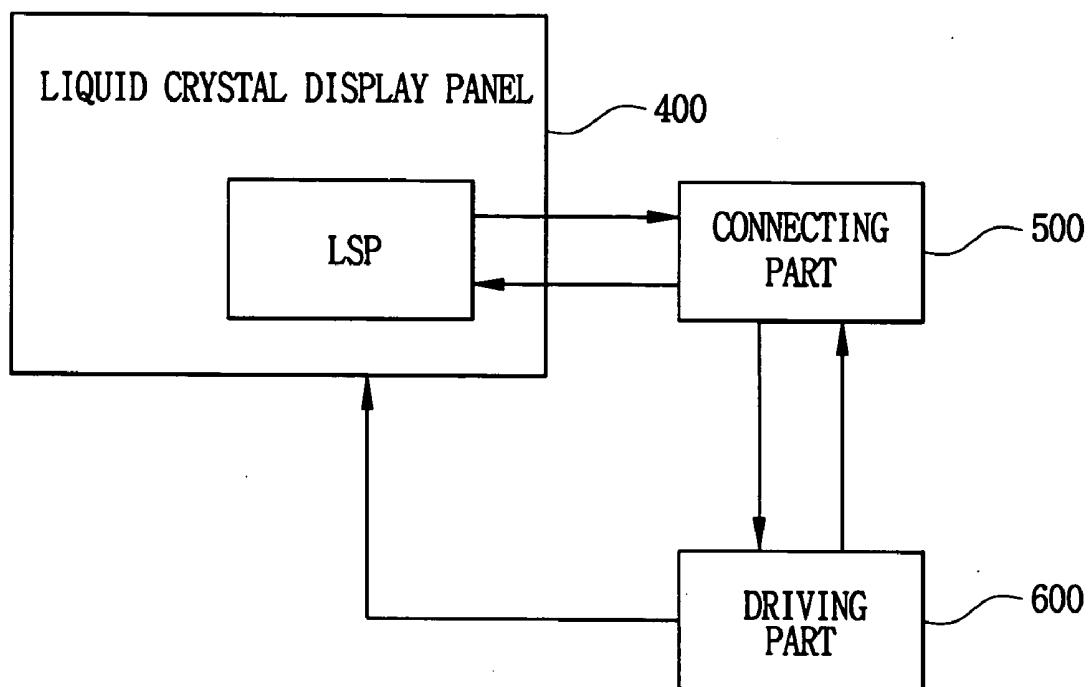
700

FIG. 2

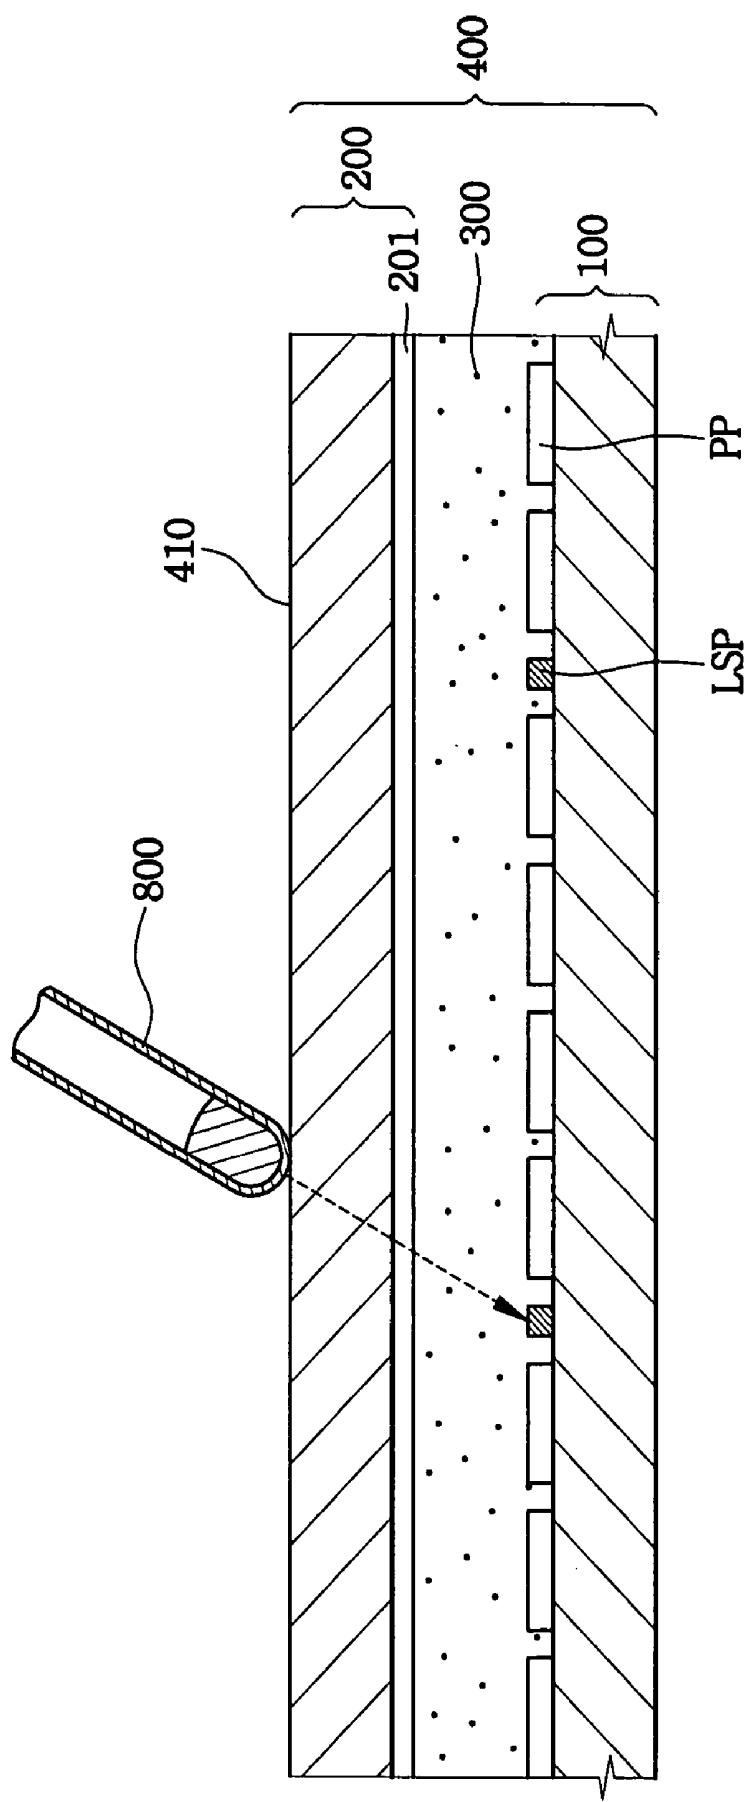


FIG. 3

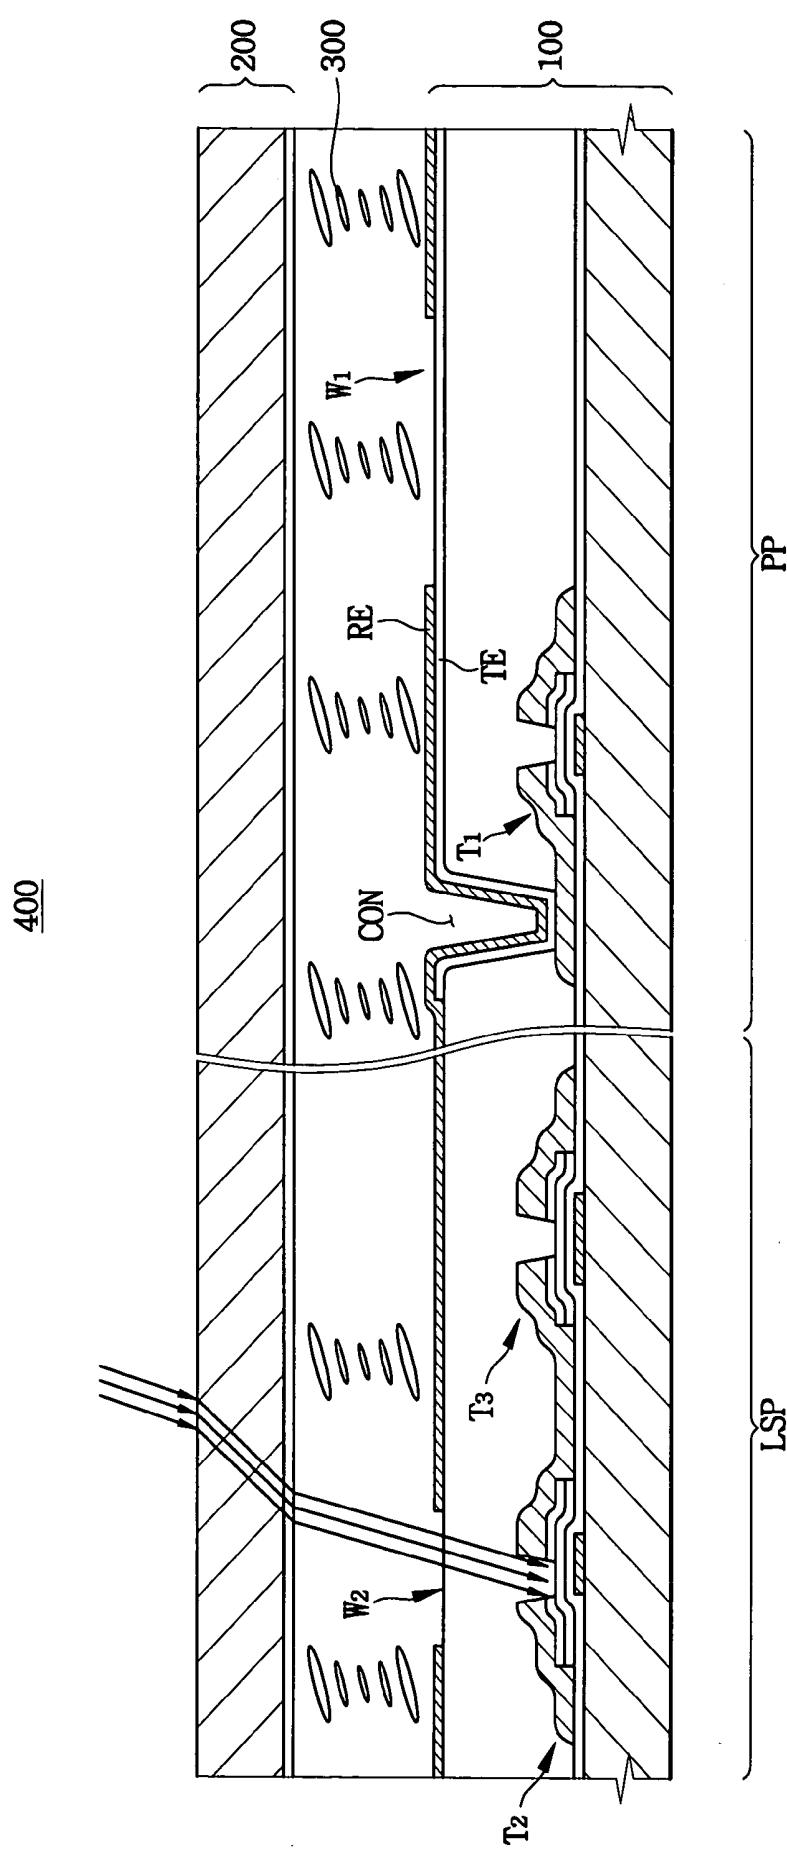


FIG. 4

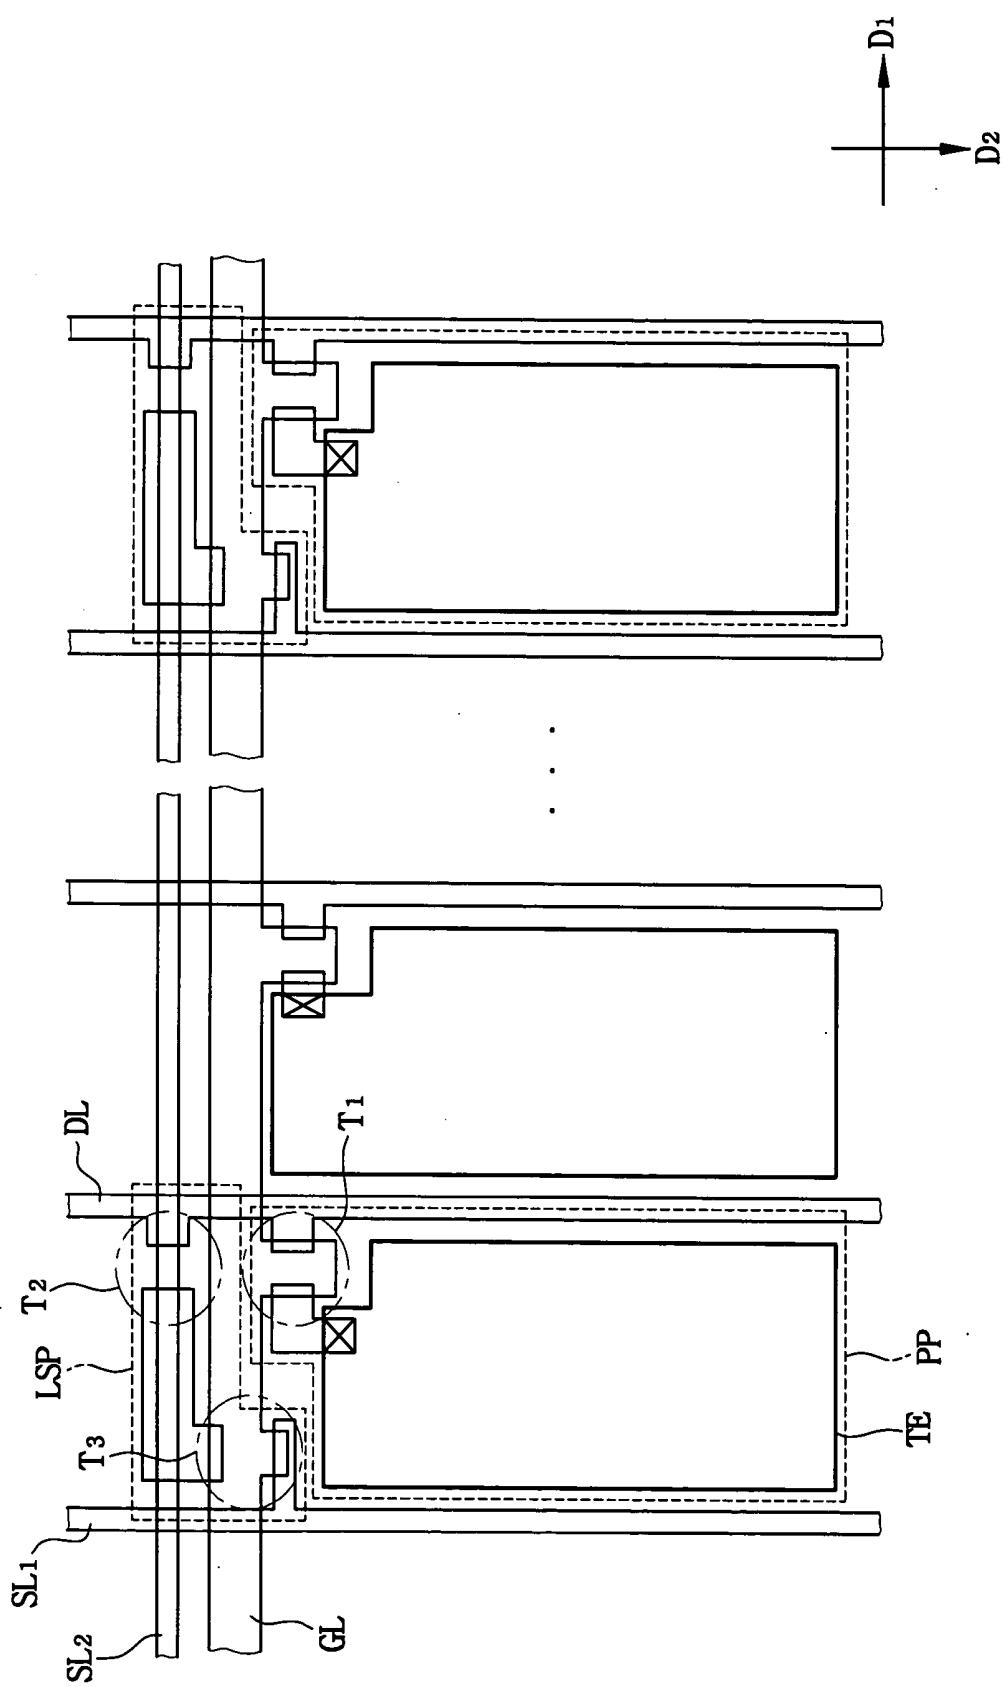


FIG. 5

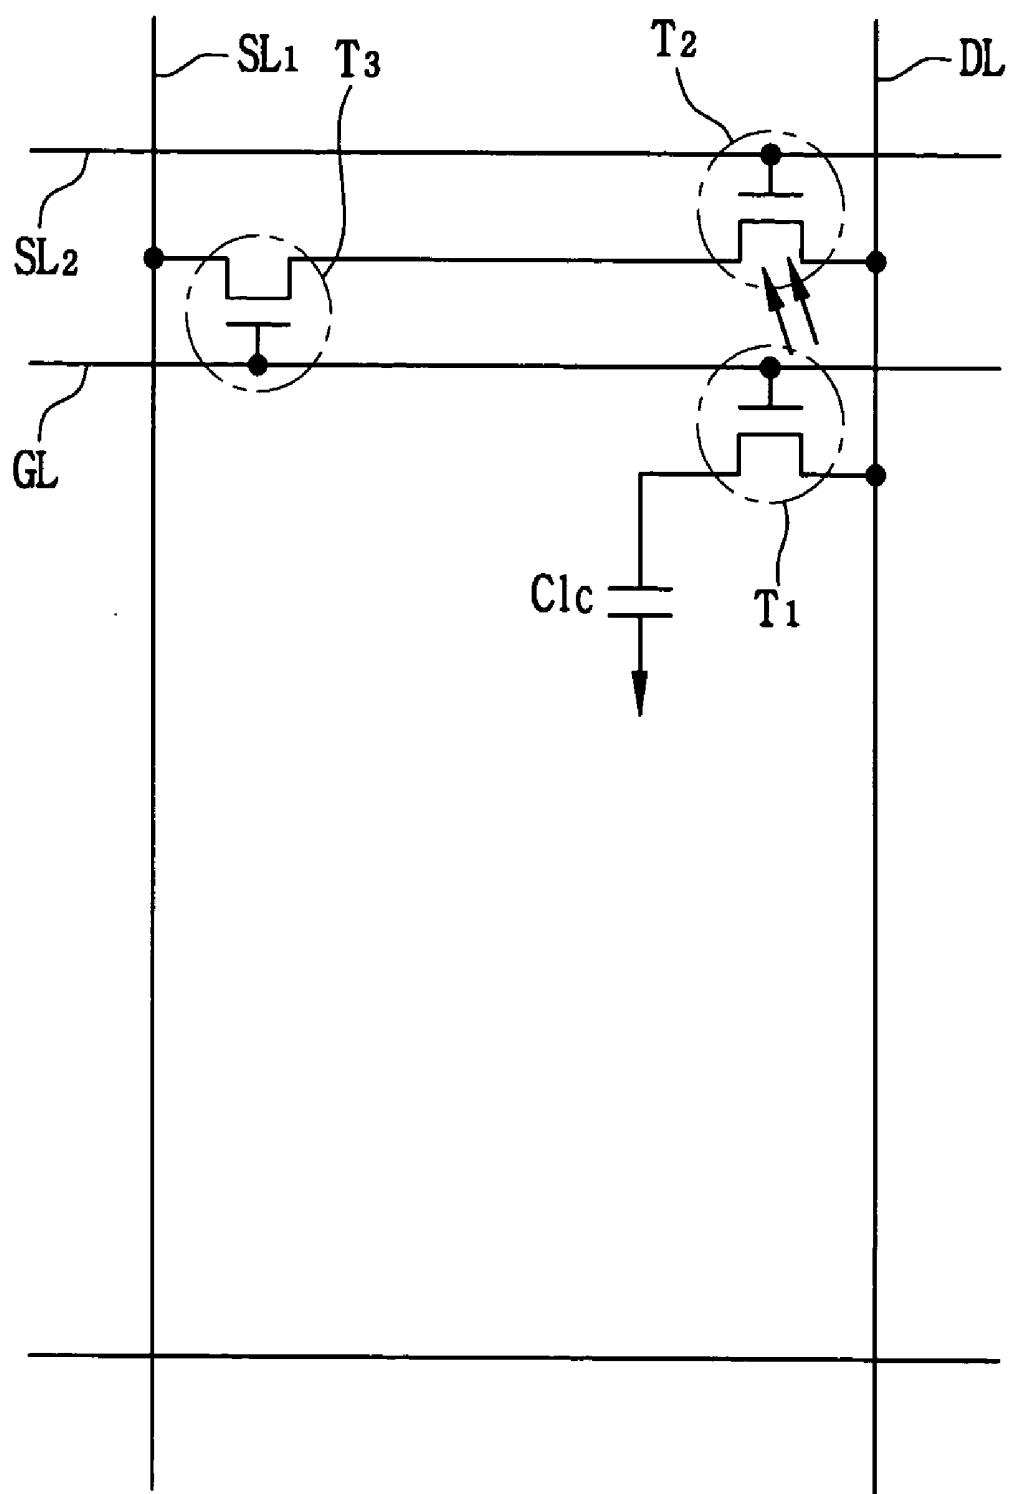


FIG. 6A

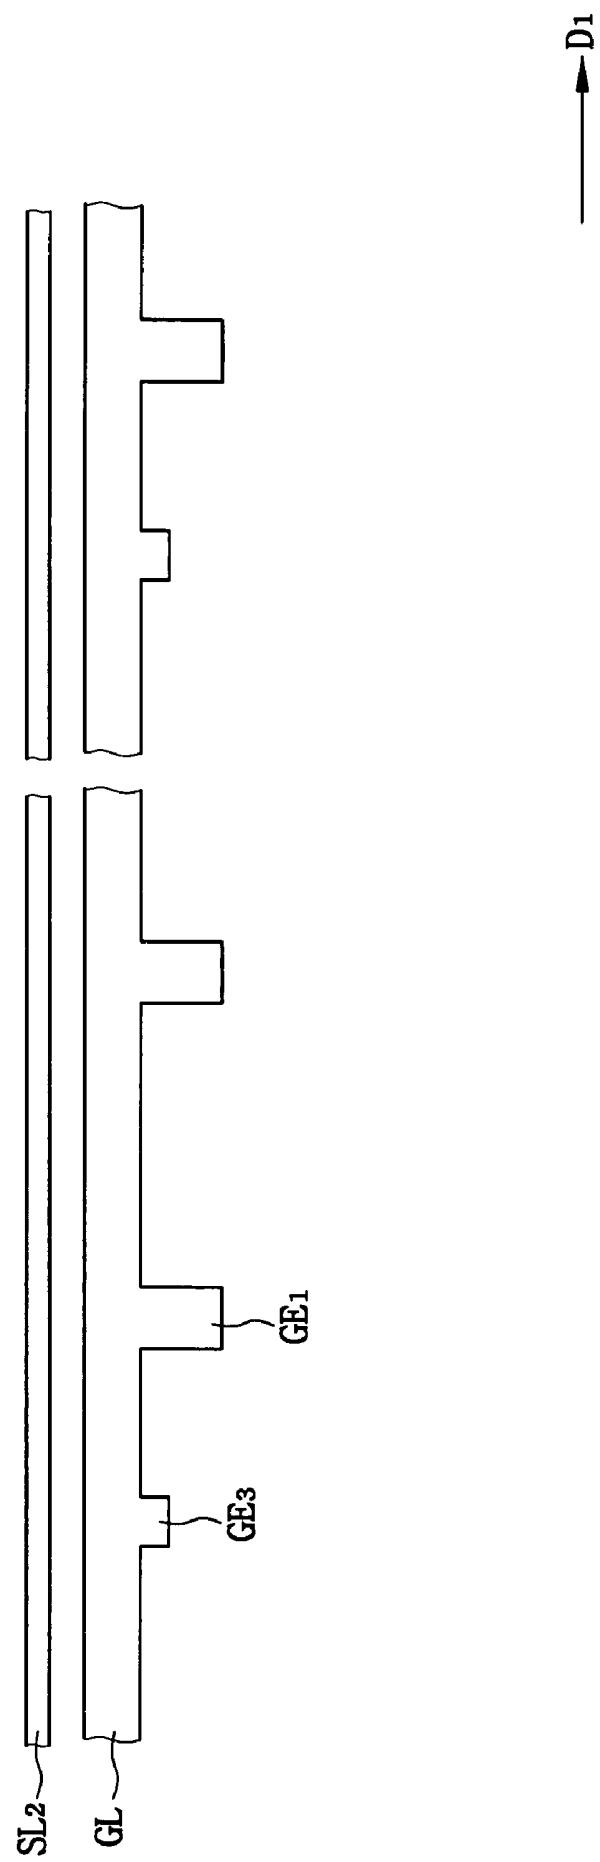


FIG. 6B

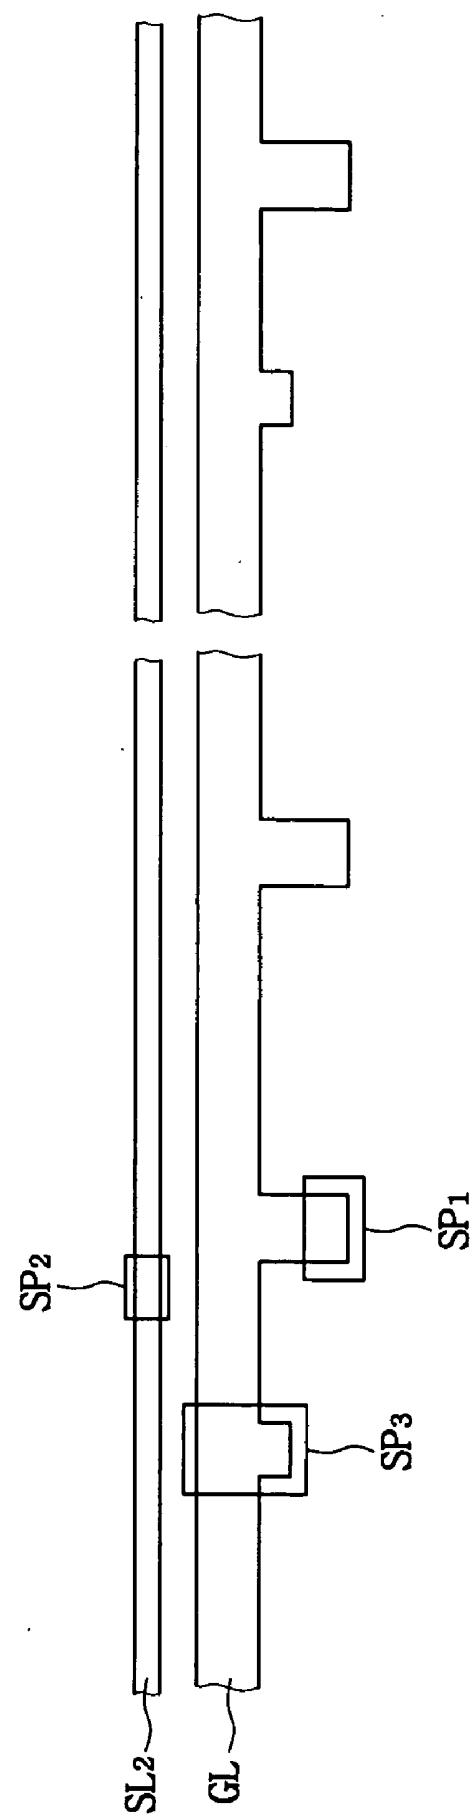


FIG. 6C

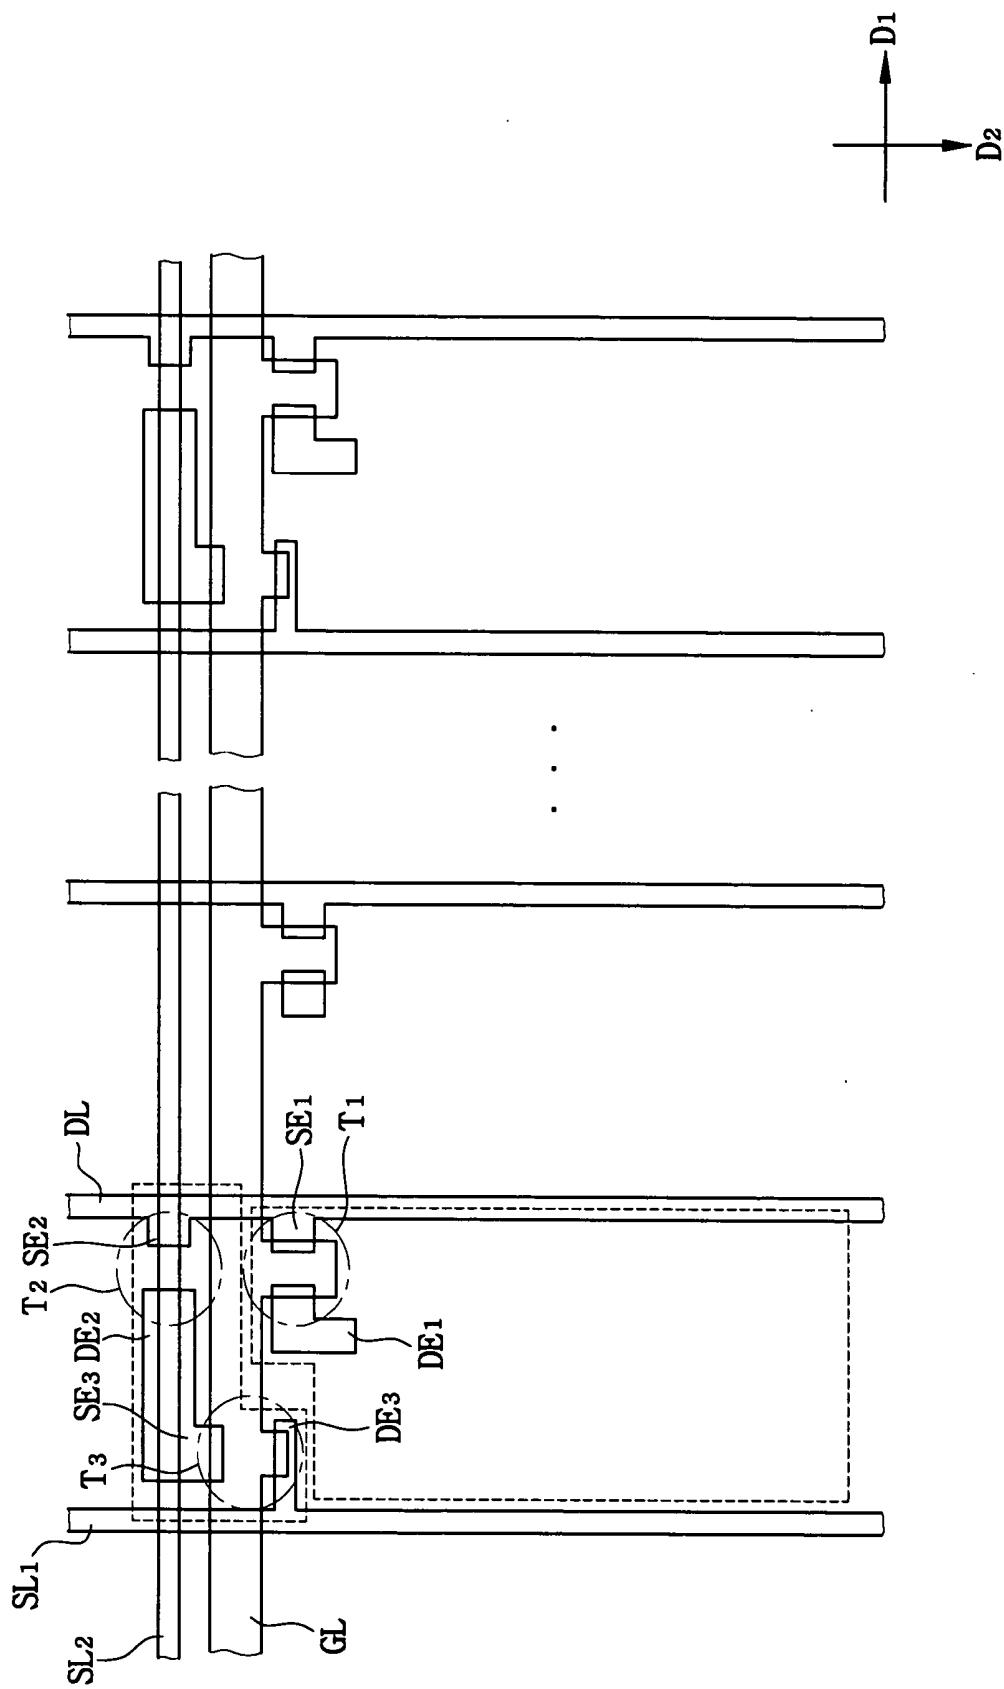


FIG. 6D

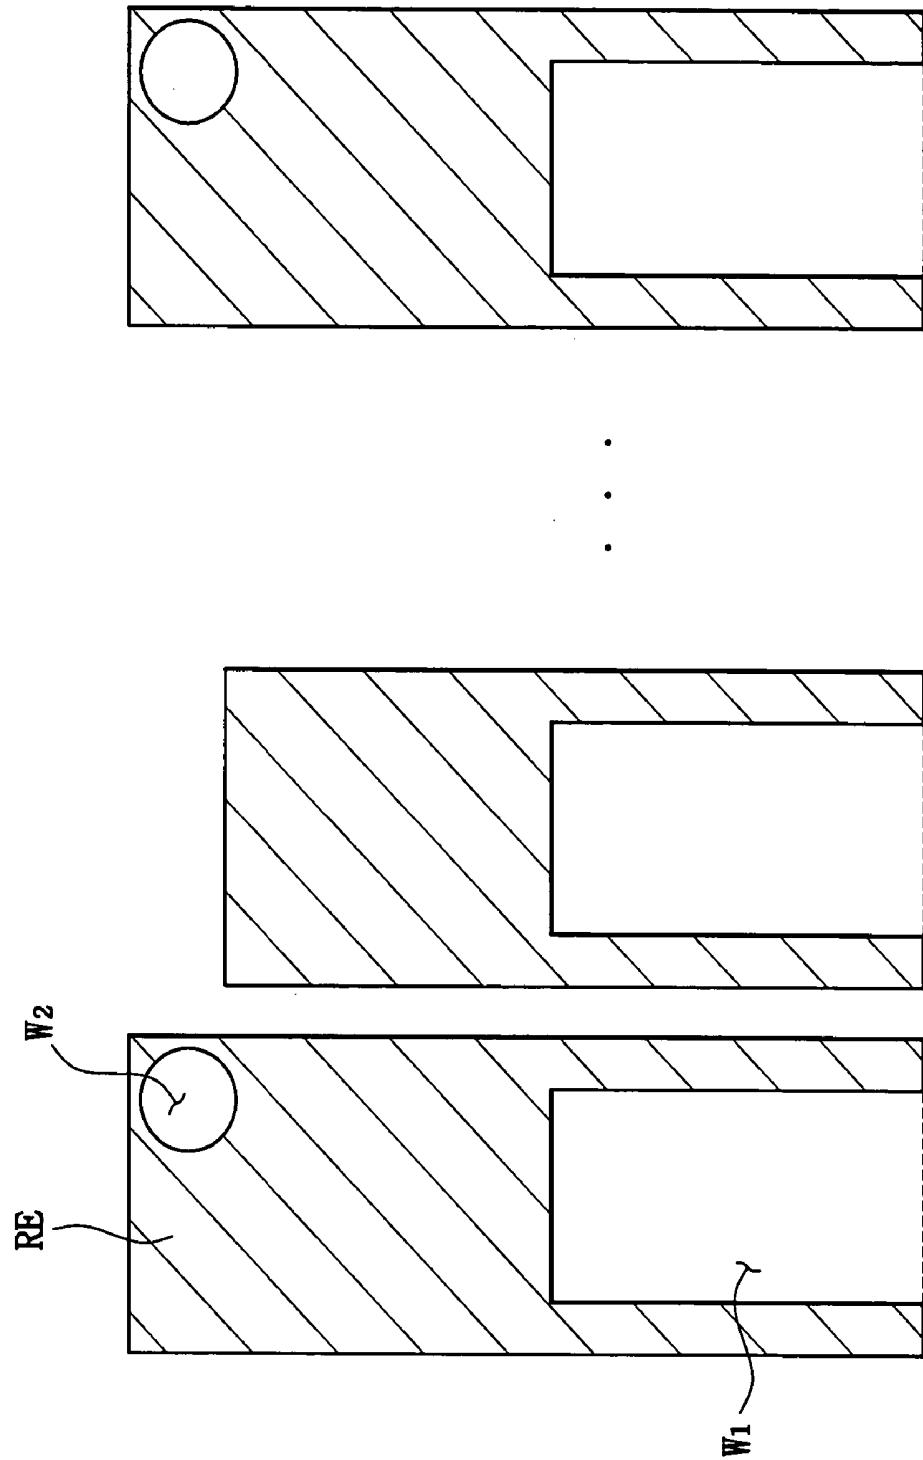


FIG. 7

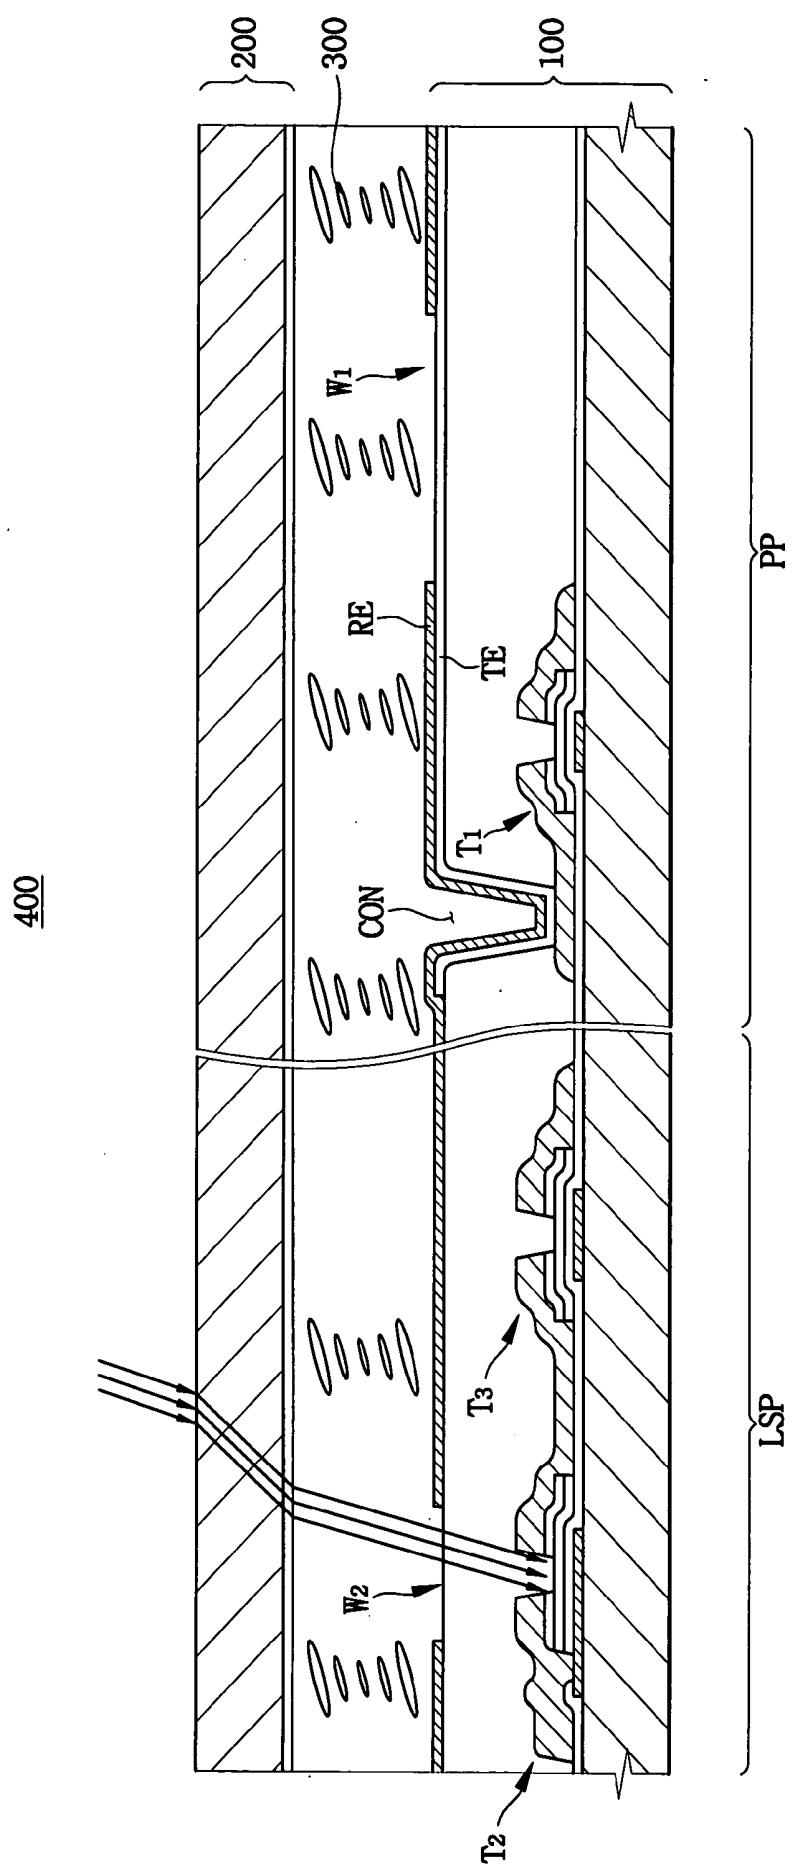


FIG. 8

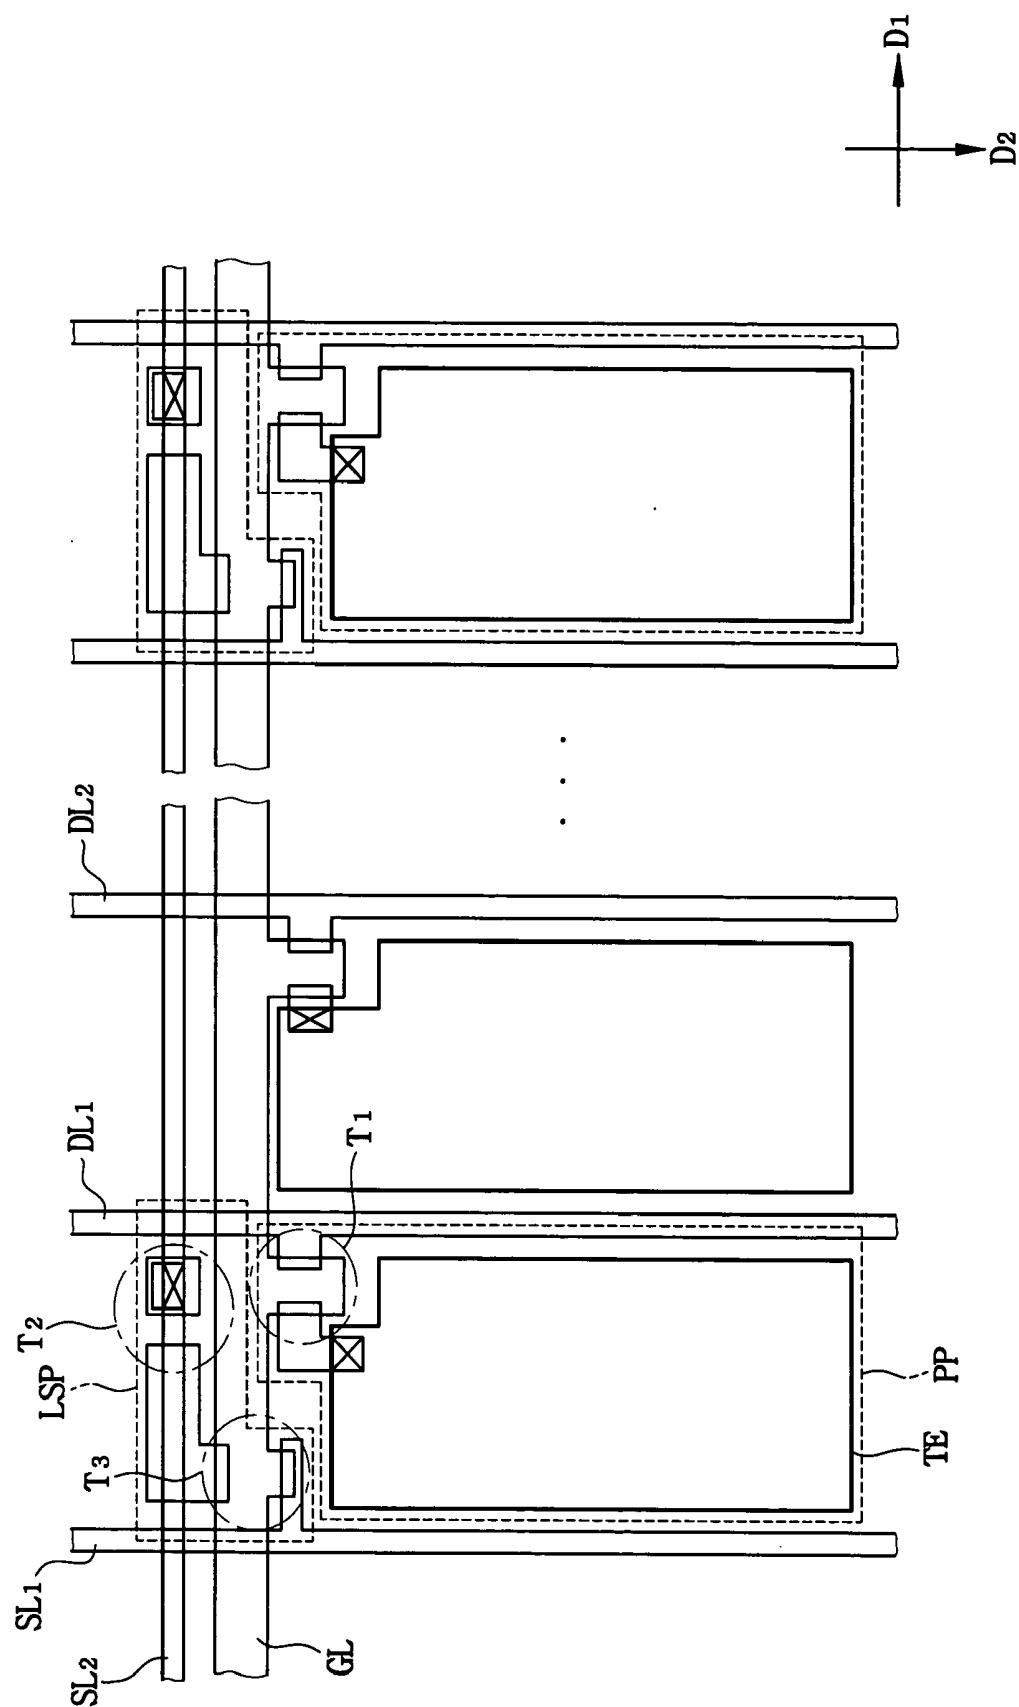


FIG. 9

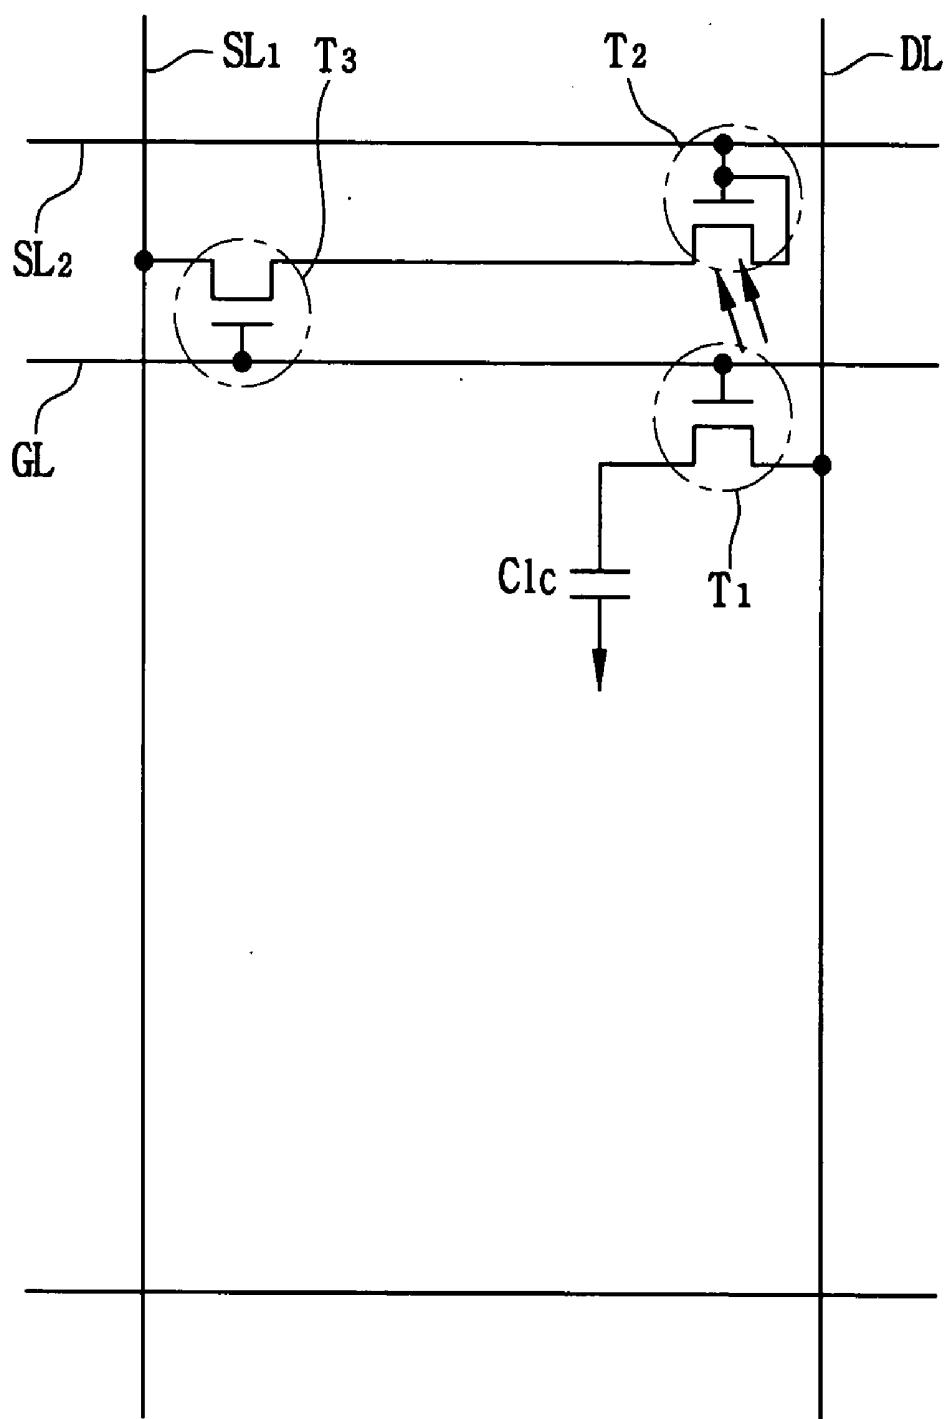


FIG. 10

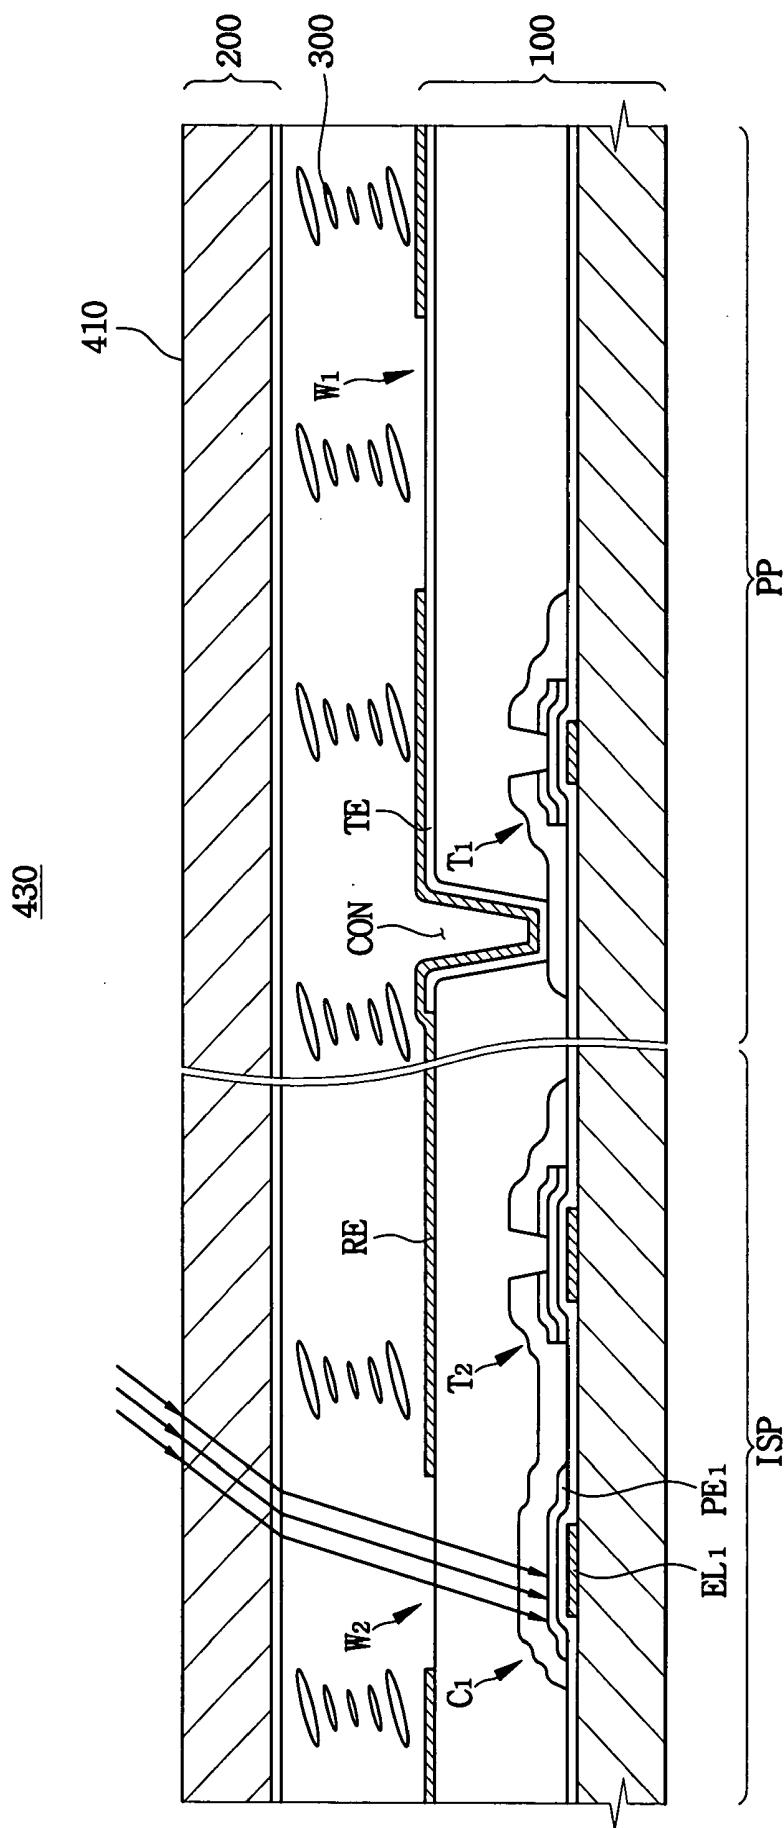


FIG. 11

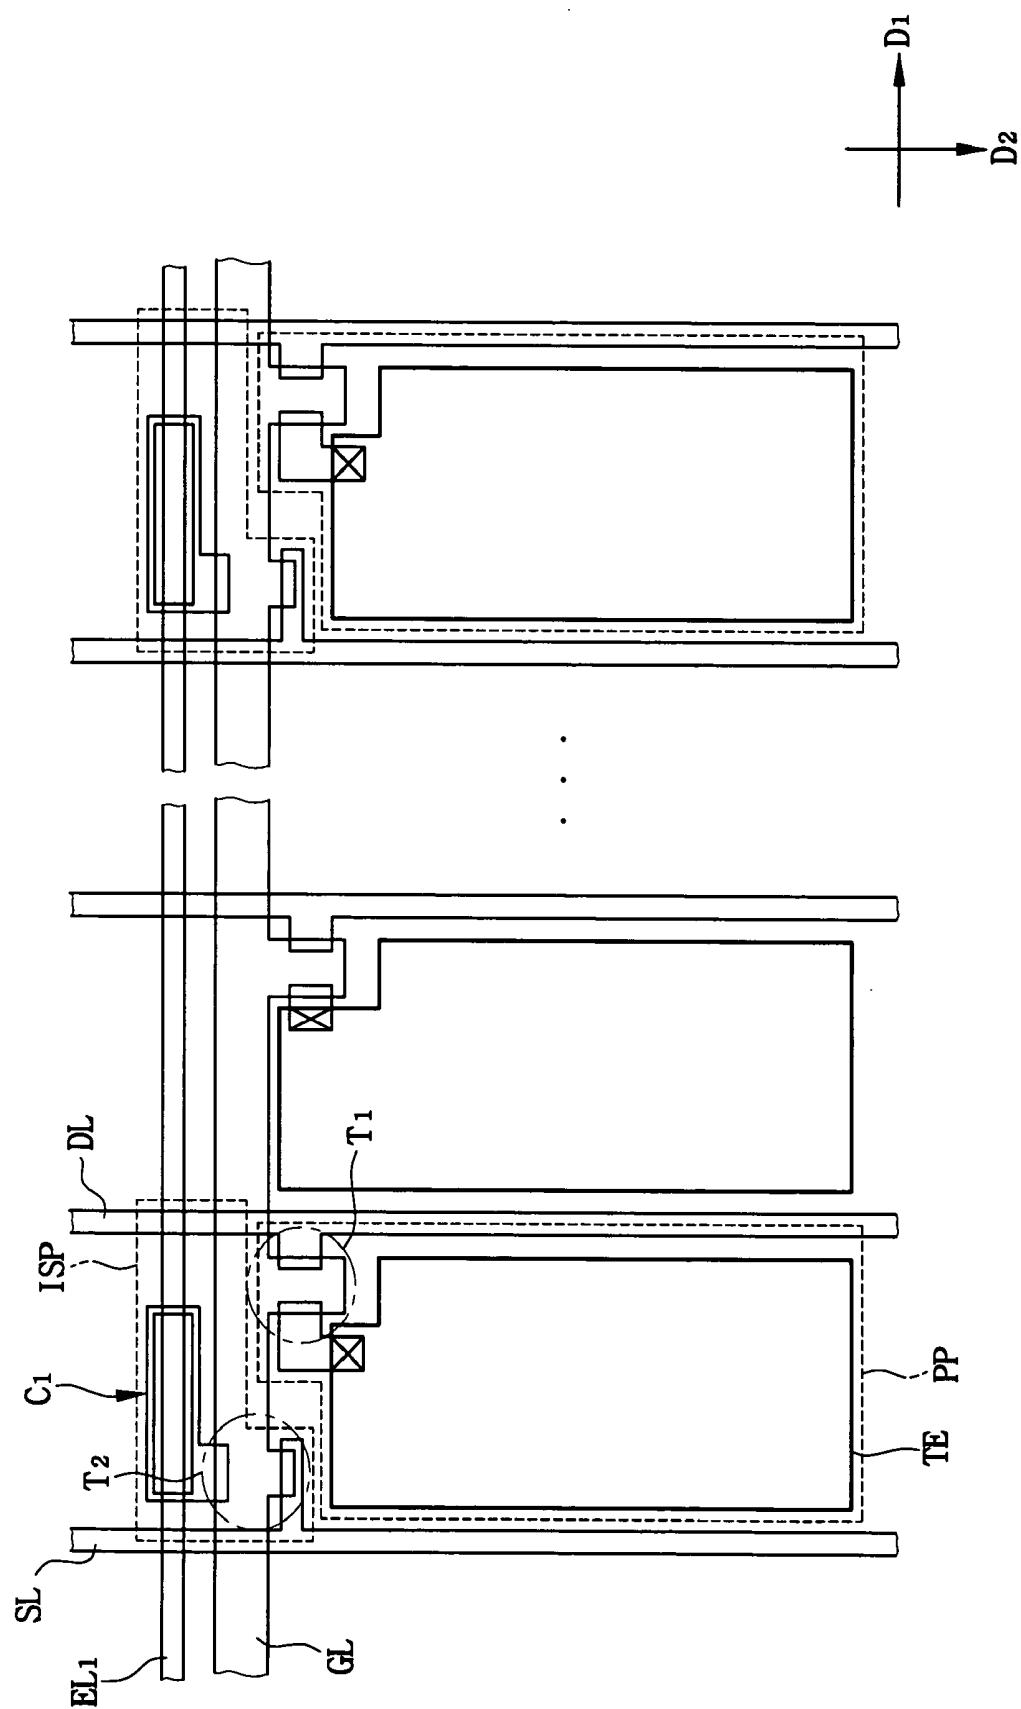


FIG. 12

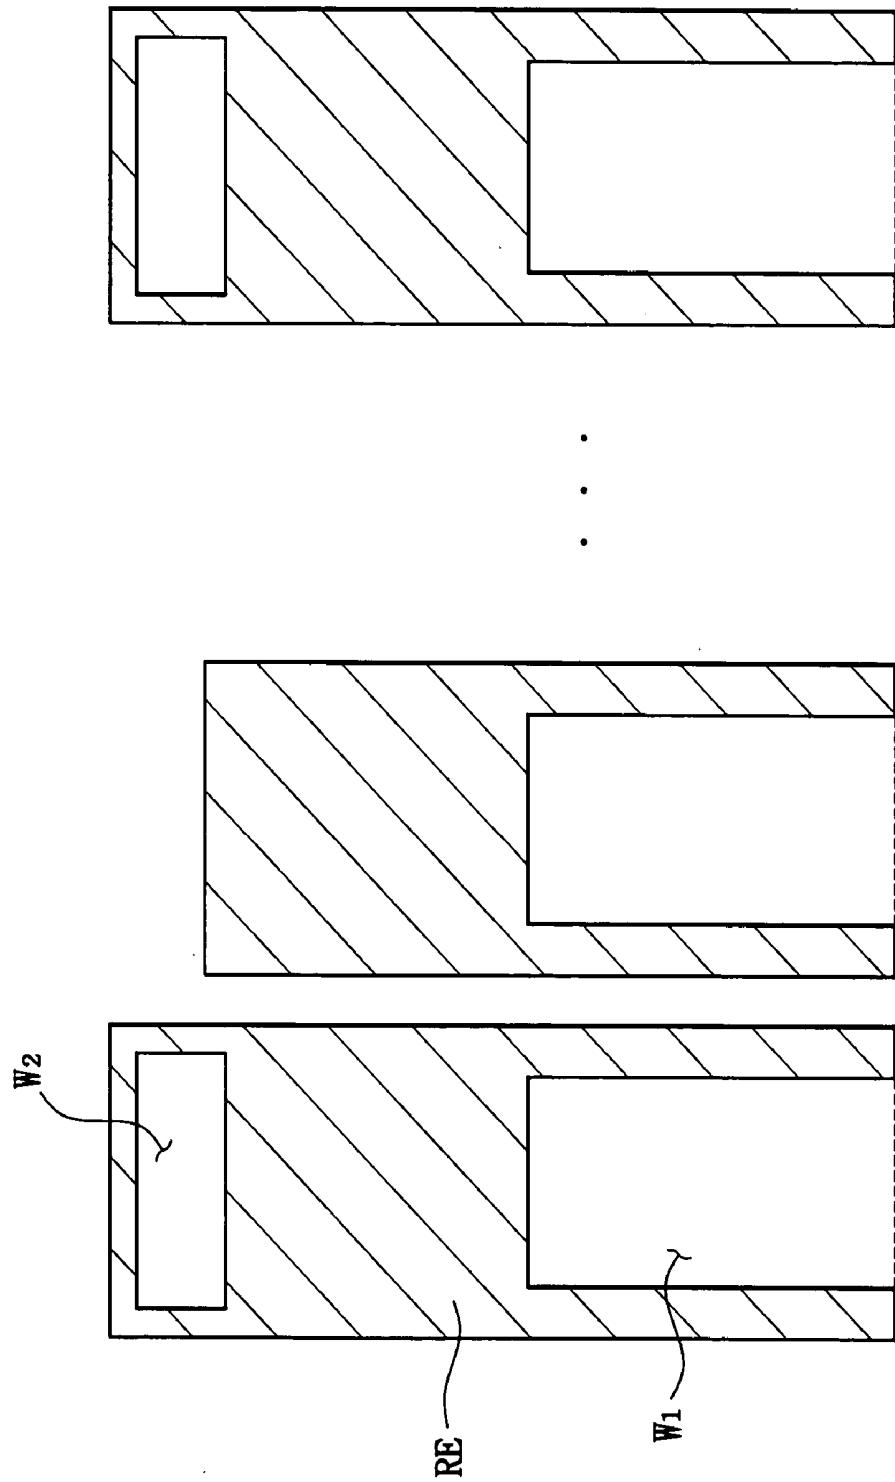


FIG. 13

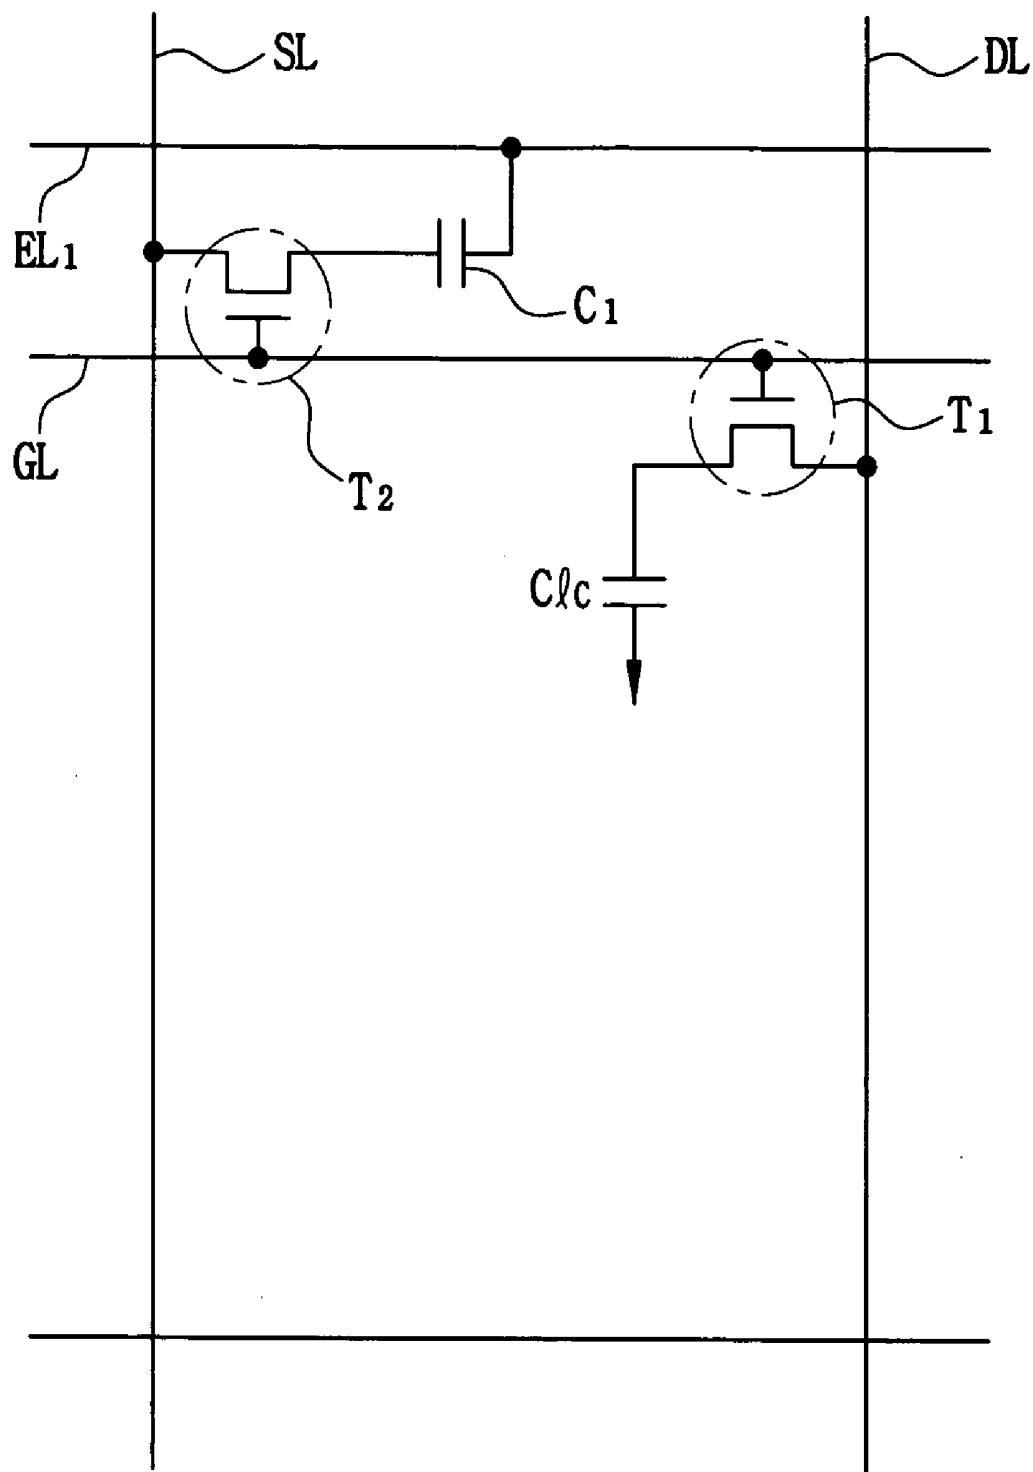


FIG14

900

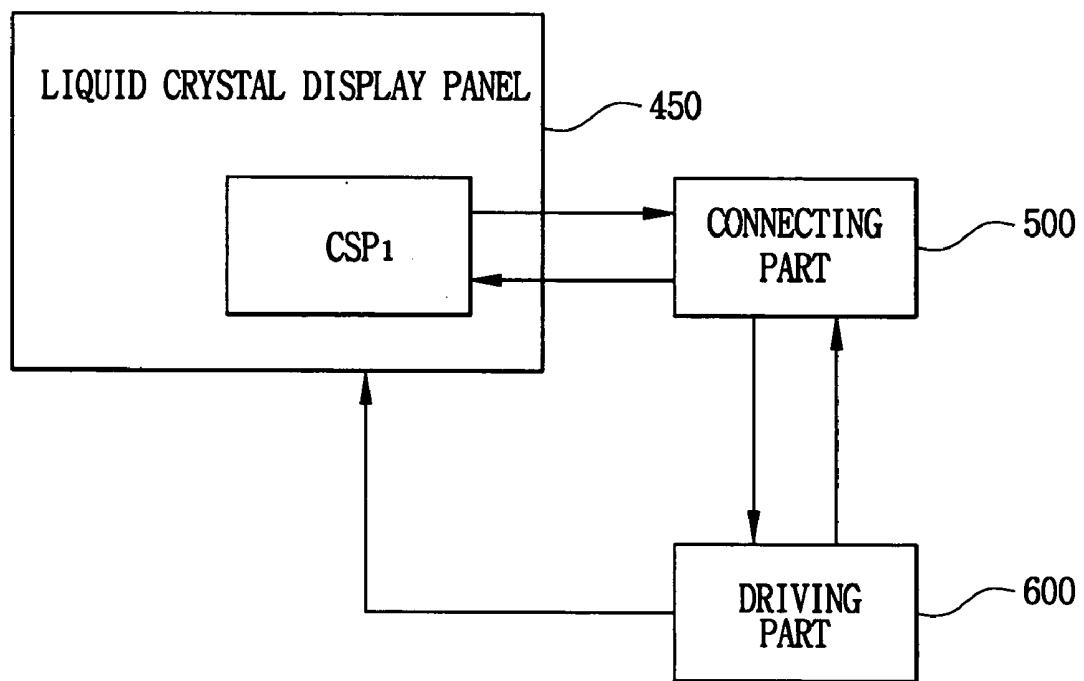


FIG. 15

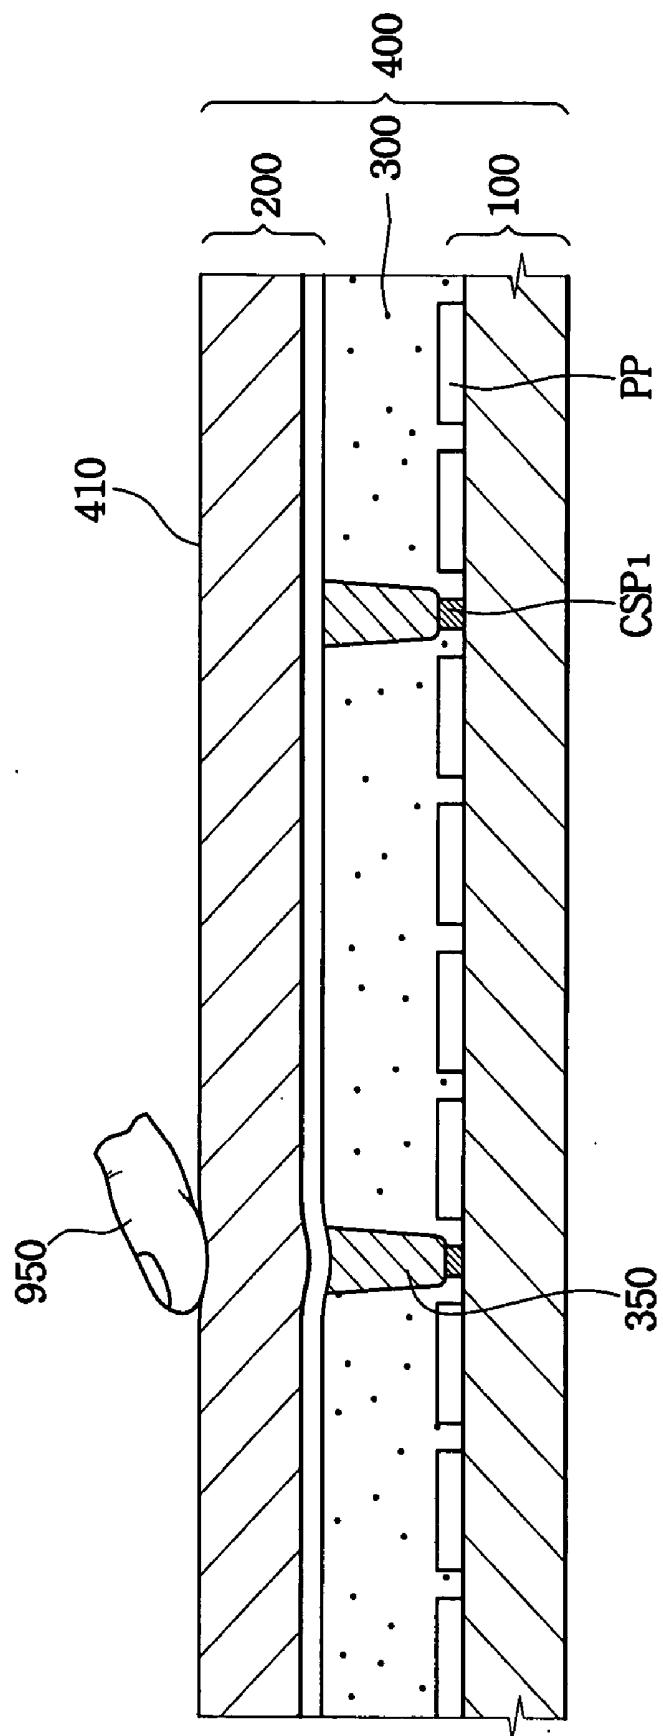


FIG. 16

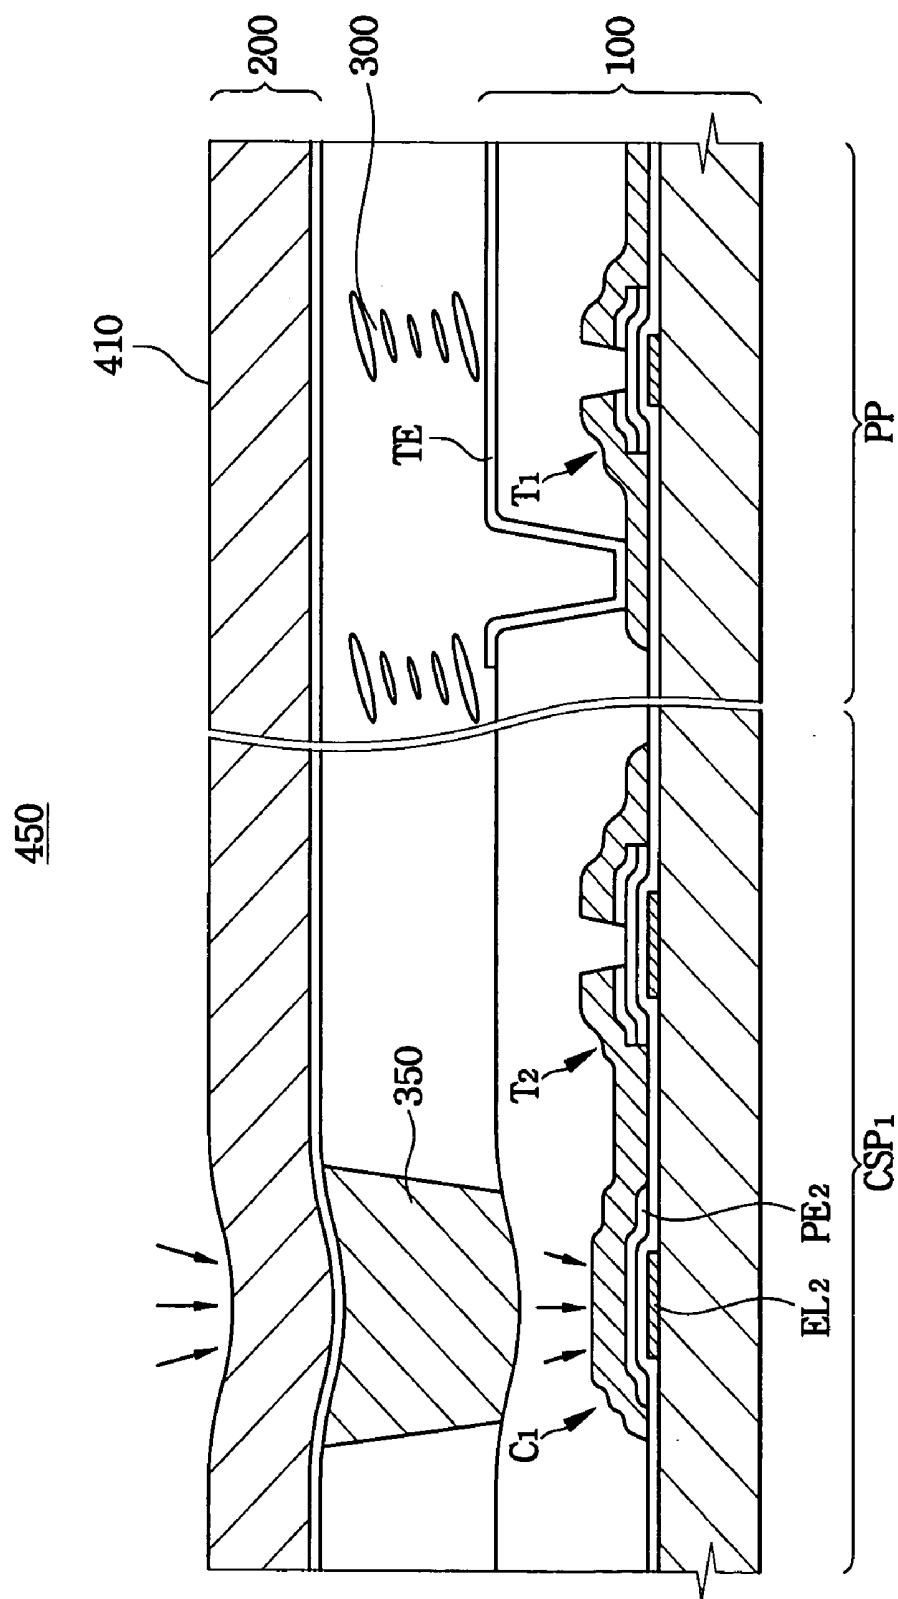


FIG. 17

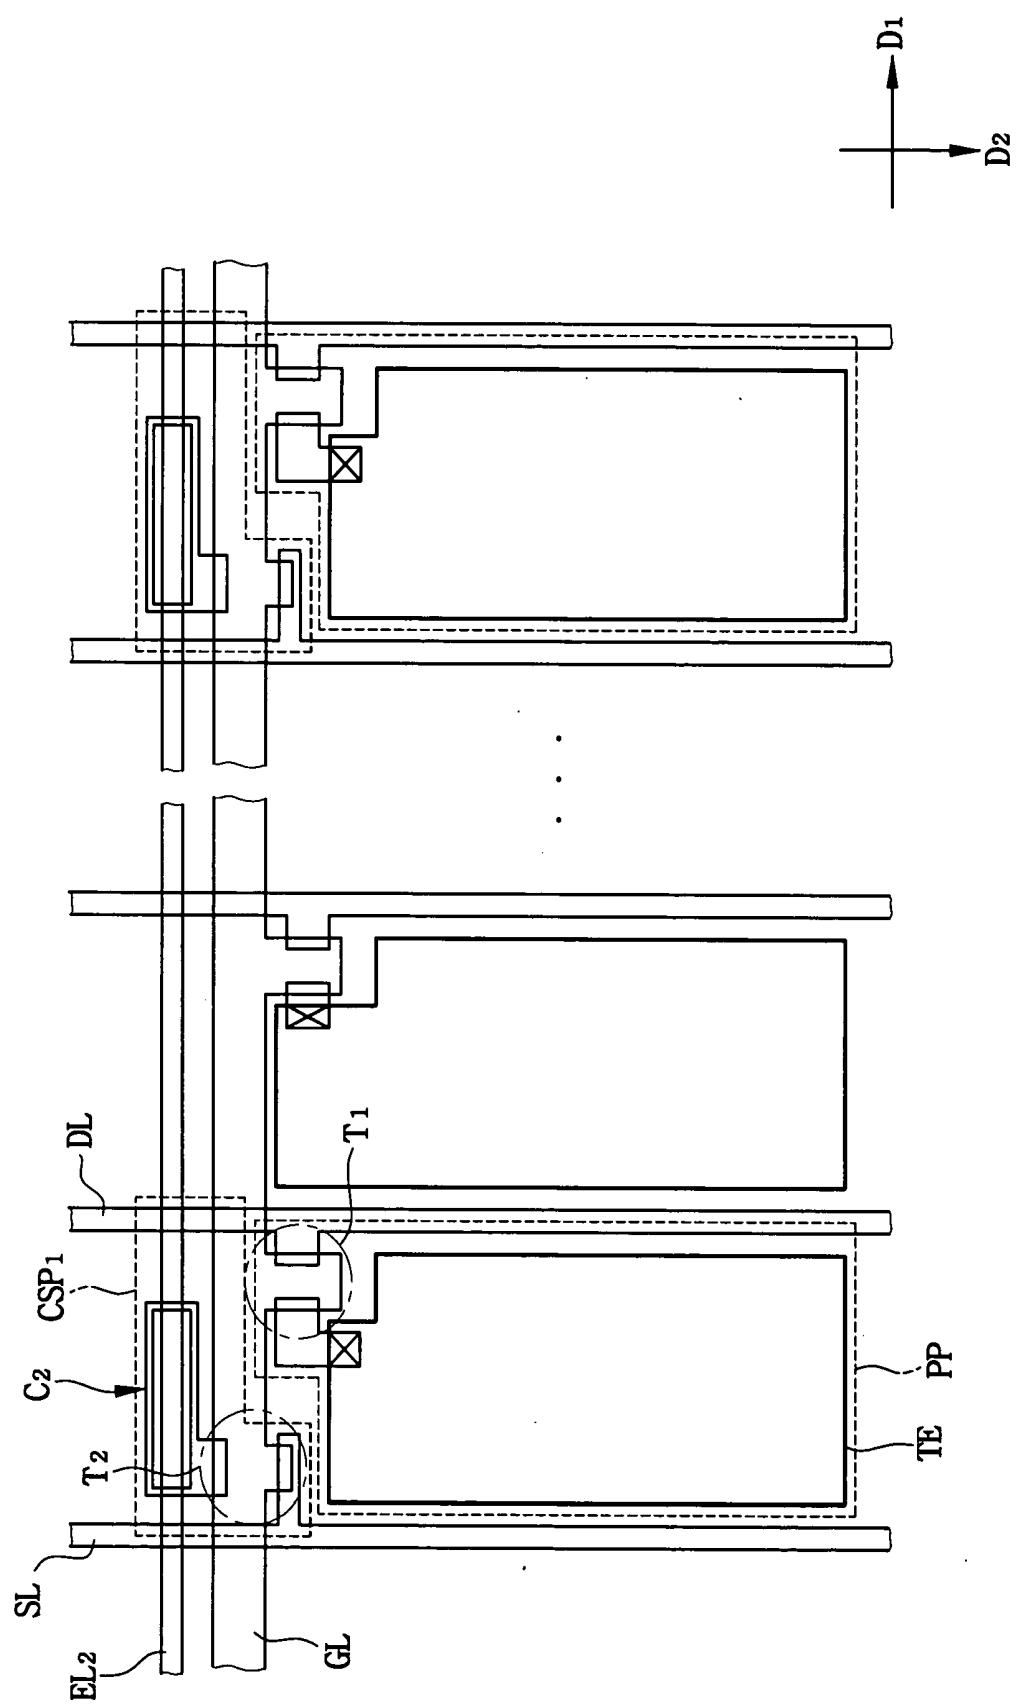


FIG. 18

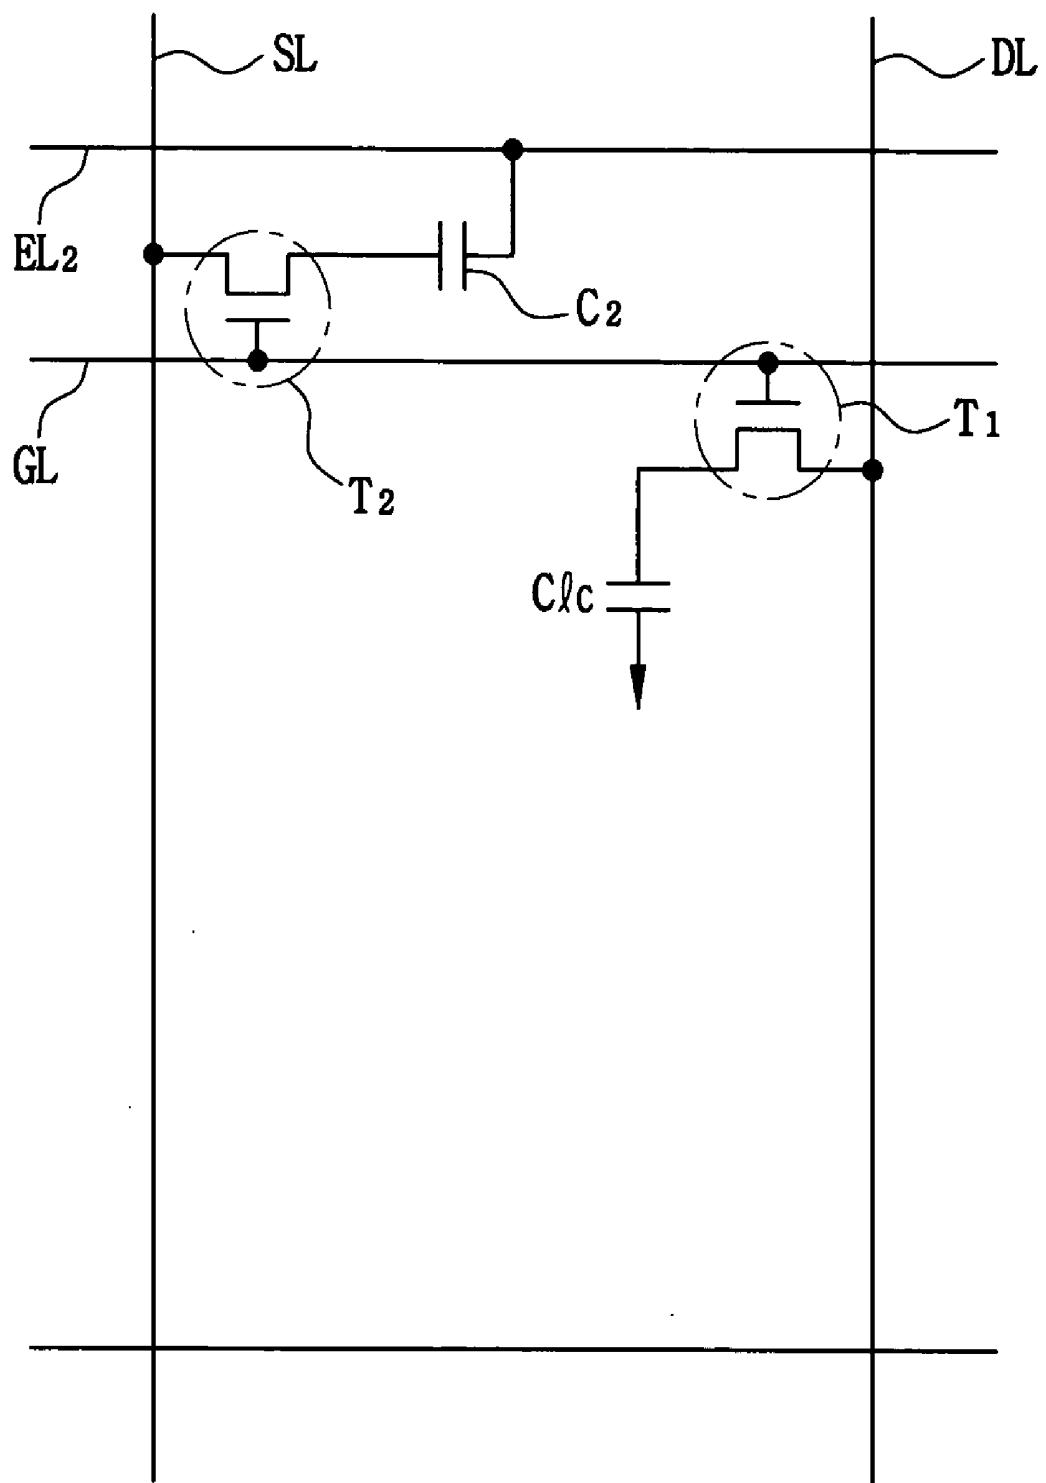


FIG. 19

470

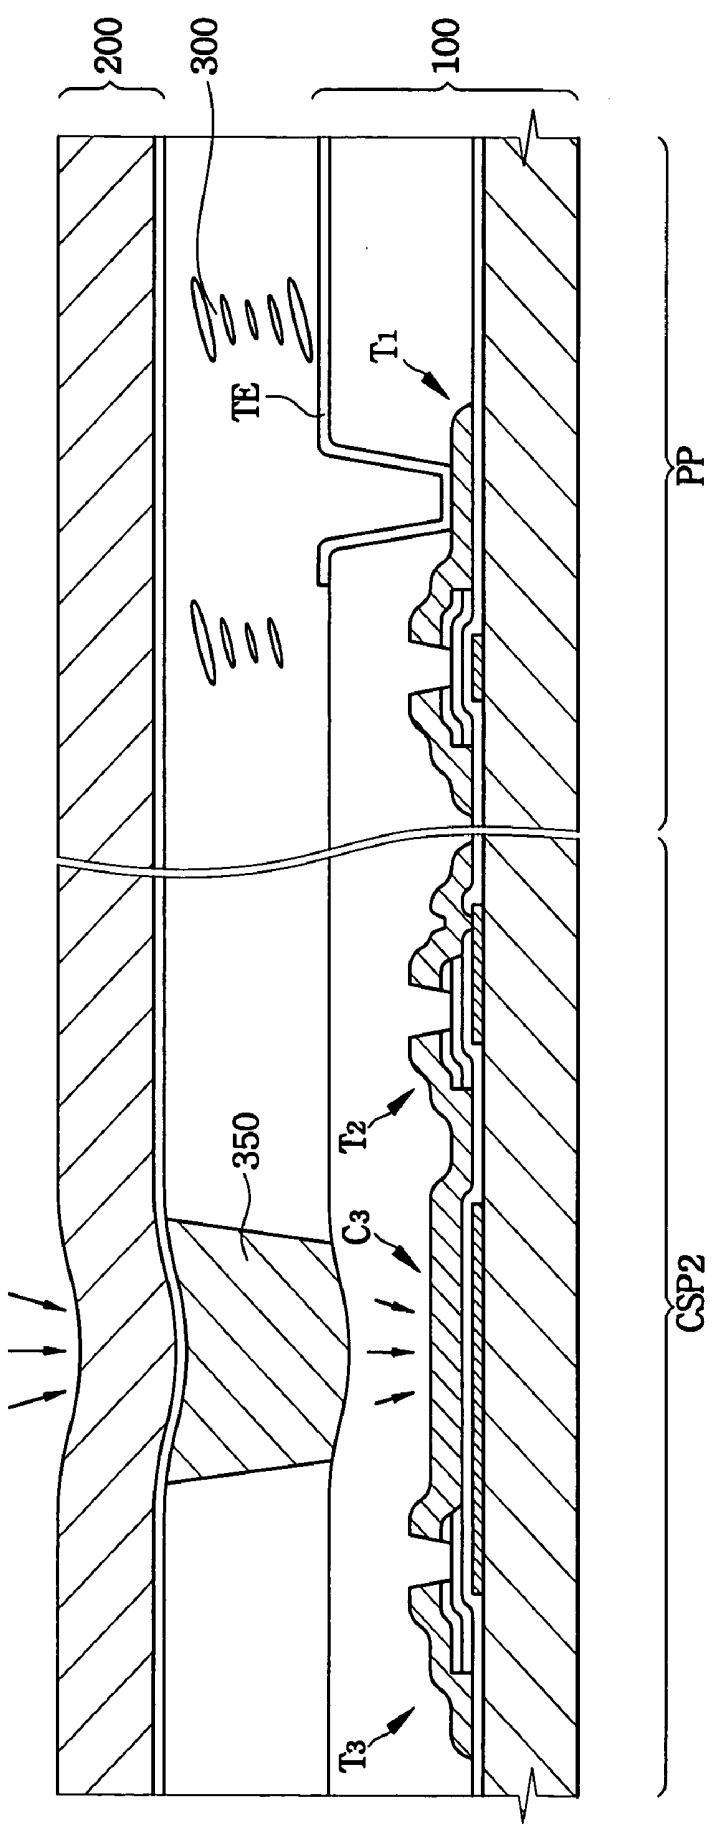


FIG. 20

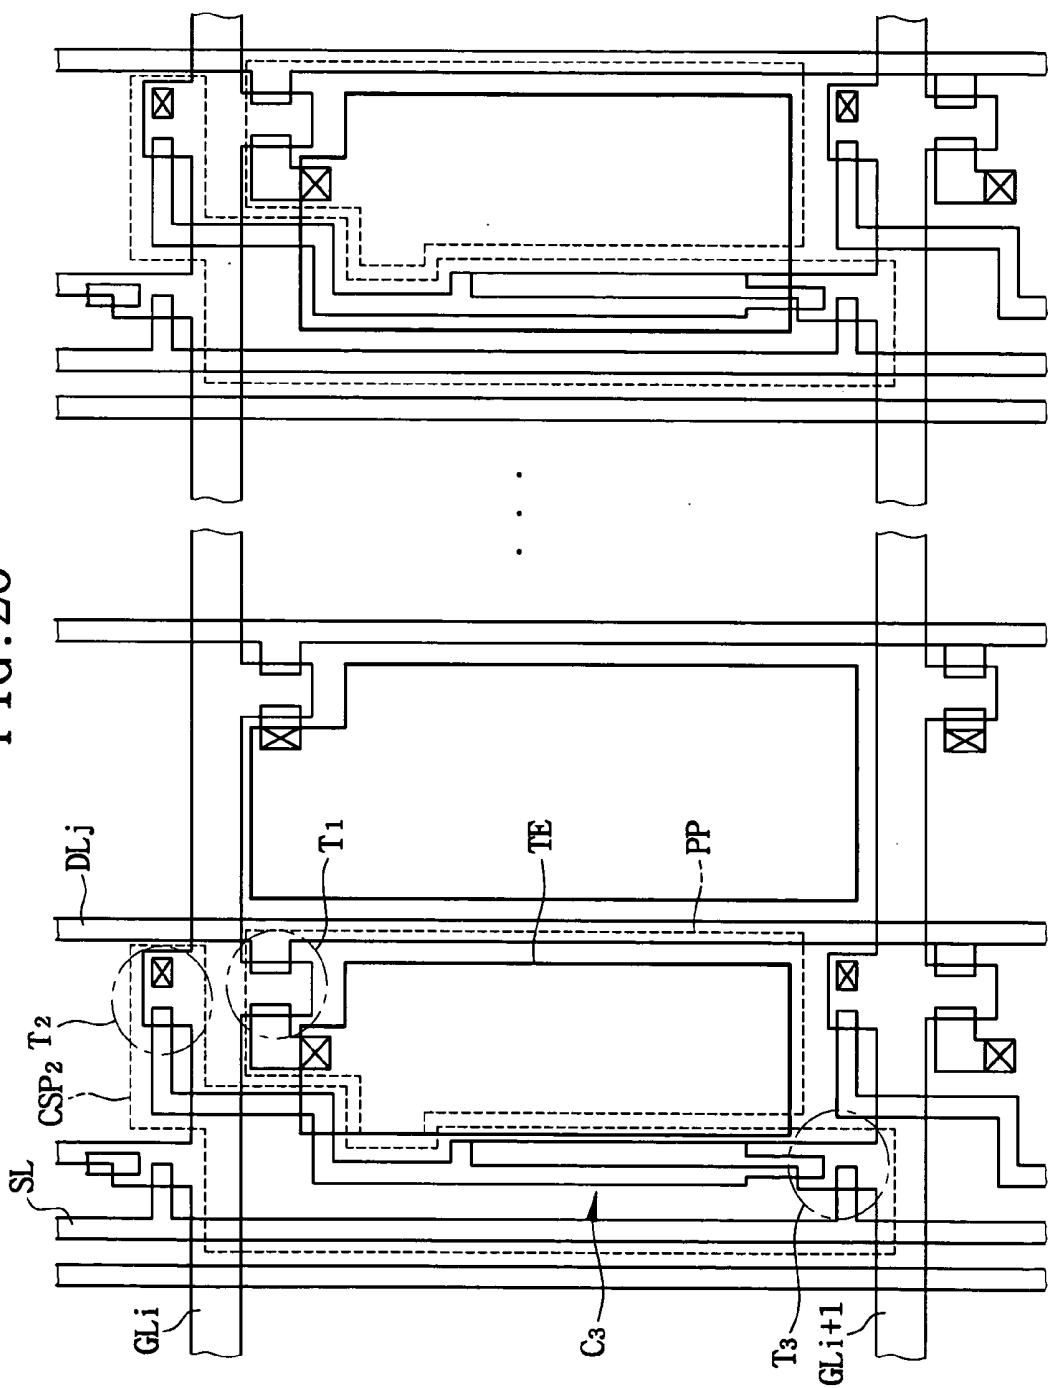


FIG.21

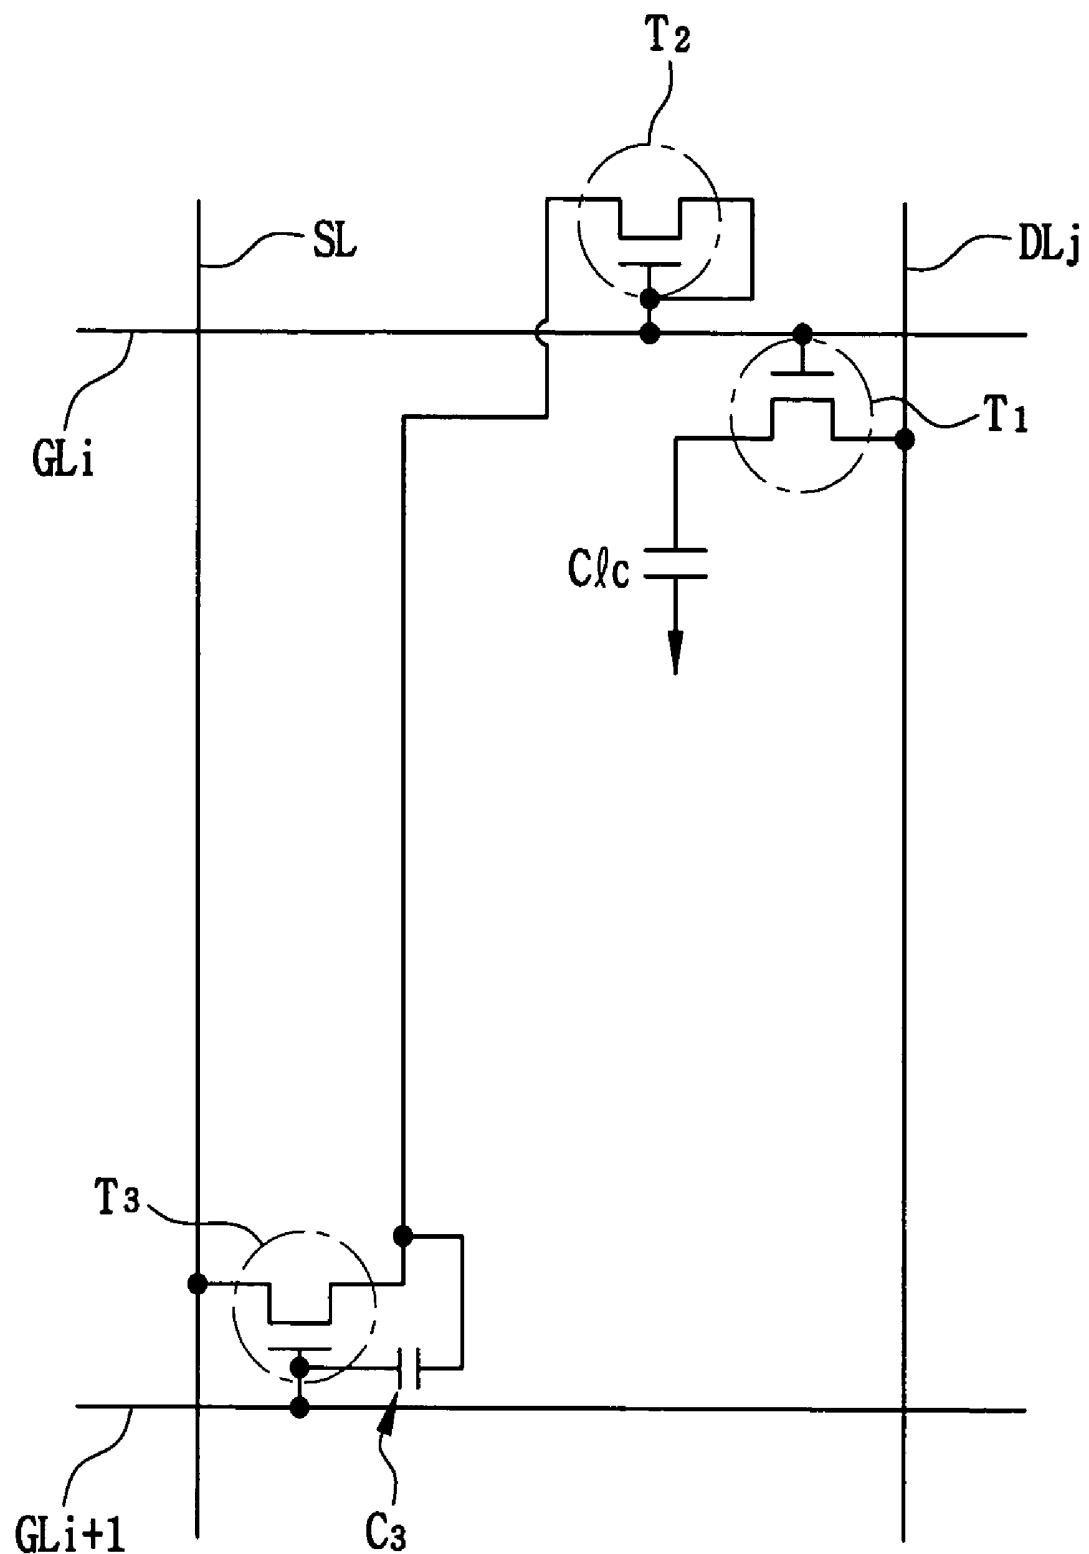


FIG.22

1000


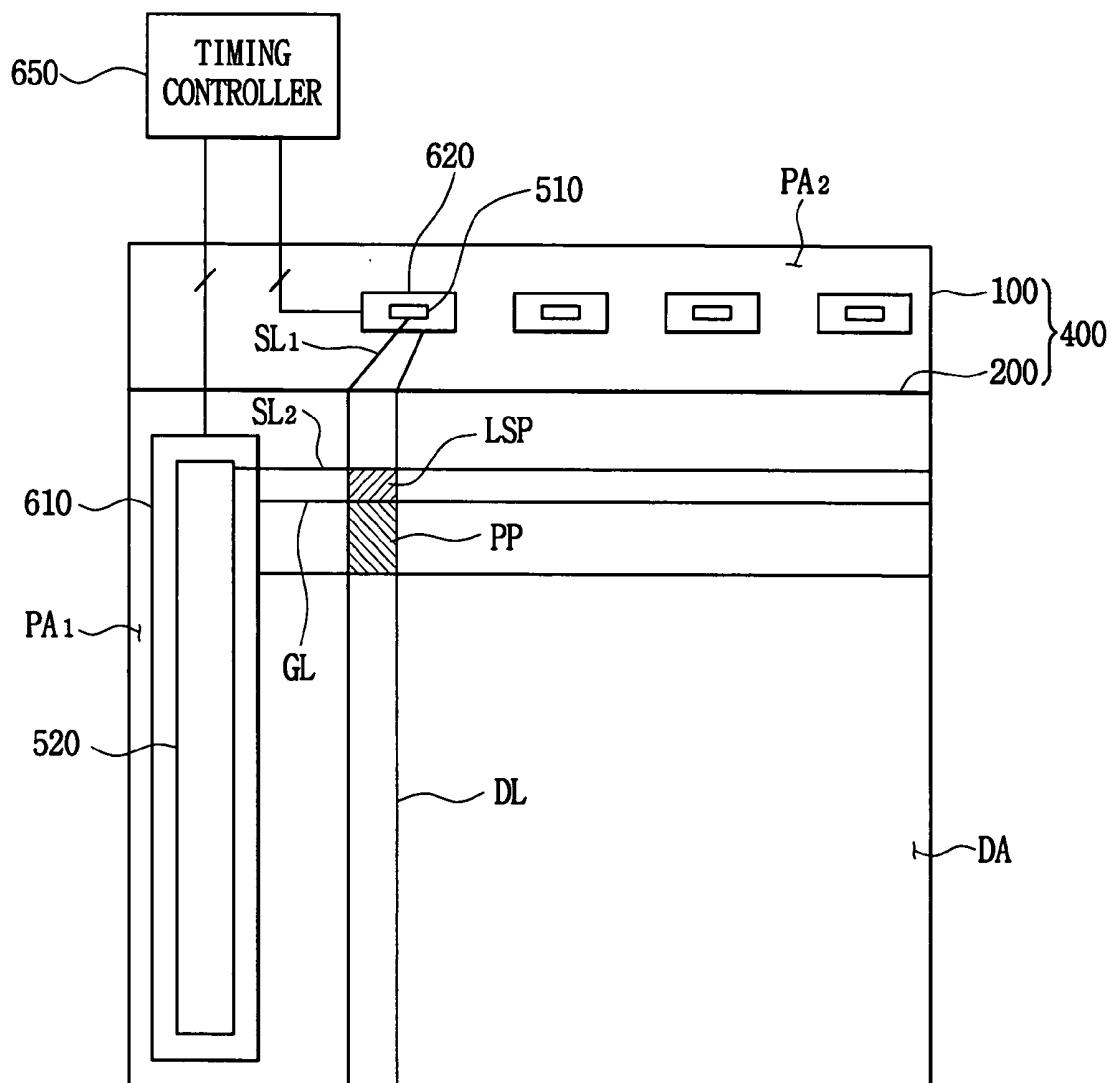


FIG.23

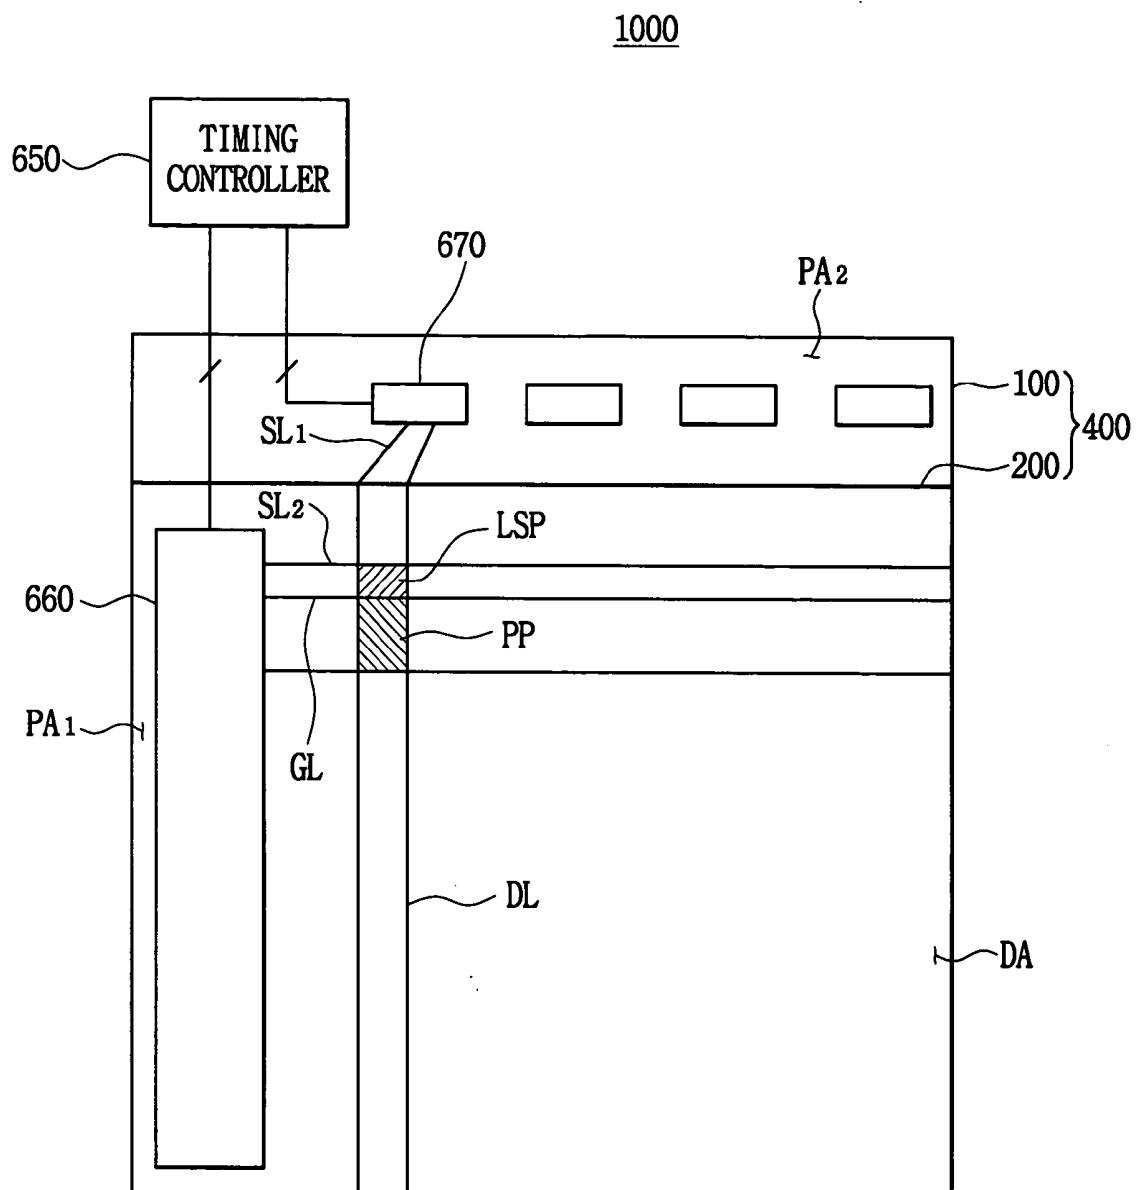

LIQUID CRYSTAL DISPLAY PANEL, LIQUID CRYSTAL DISPLAY DEVICE HAVING THE SAME, AND METHOD OF MANUFACTURING THE SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application relies for priority upon Korean Patent Application No.2003-12768 filed on Feb. 28, 2003, and Korean Patent Application No. 2003-24380 filed on Apr. 17, 2003, the contents of which are herein incorporated by reference in their entirety.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display panel, a liquid crystal display device having the liquid crystal display panel and a method of manufacturing the liquid crystal display device, and more particularly to a liquid crystal display panel having reduced thickness and enhanced display quality, a liquid crystal display device having the liquid crystal display panel, and a method of manufacturing the liquid crystal display device.

[0004] 2. Description of the Related Art

[0005] A touch panel is disposed on a display panel, so that a user may touch the touch panel with a hand or other objects so as to select an article displayed via the display panel. A selected position is perceived via the touch panel. The display device drives the display panel according to the article corresponding to the position.

[0006] The display device including the touch panel needs no input device such as a keyboard or a mouse. Therefore, the display device including the touch panel becomes widely used.

[0007] In recent, a liquid crystal display device employs the touch panel. The touch panel is disposed on a liquid crystal display panel that displays an image, so that a user may input instructions into the liquid crystal display device via the touch panel.

[0008] The touch panel includes a first substrate, a second substrate, a first transparent electrode and a second transparent electrode. The first substrate is spaced apart from the second substrate. The first transparent electrode is formed on the first substrate. The second transparent electrode is formed on the second substrate. The first transparent electrode faces the second transparent substrate.

[0009] An adhesive layer is interposed between the liquid crystal display panel and the touch panel so as to attach the touch panel on the liquid crystal display panel. A refractive index of the adhesive layer is different from a refractive index of the liquid crystal display panel, so that a light that exits from the liquid crystal display panel is distorted. Therefore, a display quality of the liquid crystal display device is deteriorated.

[0010] Further, the touch panel includes the first transparent electrode, the second transparent electrode, the first substrate and the second substrate. Therefore, both manufacturing cost and thickness of the liquid crystal display device are increased.

SUMMARY OF THE INVENTION

[0011] Accordingly, the present invention is provided for substantially obviate one or more problems due to limitations and disadvantages of the related art.

[0012] It is a feature of the present invention to provide a liquid crystal display panel having a reduced thickness and an enhanced display quality.

[0013] In one aspect of the present invention, a liquid crystal display devices having the liquid crystal display panel is provided.

[0014] In another aspect of the present invention, a method of manufacturing the liquid crystal display panel is provided.

[0015] The liquid crystal display panel includes a first substrate, a second substrate and a liquid crystal layer. The first substrate includes a plurality of pixels and a plurality of sensing parts. Each of the sensing parts generates an output signal containing location information in response to an input signal. The location information indicates a location where the input signal is inputted. The second substrate is connected to the first substrate. The second substrate faces the first substrate. The liquid crystal layer is interposed between the first substrate and the second substrate.

[0016] In another aspect, the liquid crystal display device includes a liquid crystal display panel and a control part. The liquid crystal display panel includes a plurality of pixels and a plurality of sensing parts. Each of the sensing parts generates an analog signal containing location information in response to an incident light. The location information indicates a location where the light enters. An image is displayed through the pixels. The control part receives the analog signal and transforms the analog signal into a digital signal. The liquid crystal display device is controlled in response to the digital signal.

[0017] In still another aspect, the liquid crystal display device includes a liquid crystal display device and a control part as well. The liquid crystal display panel includes a plurality of pixels and a plurality of sensing parts. Each of the sensing parts generates an analog signal containing location information in response to a compression of the liquid crystal display panel. The location information indicates a location on which the liquid crystal display device is compressed. An image is displayed through the pixels. The control part receives the analog signal first and then the control part transforms the analog signal into a digital signal. The liquid crystal display device is controlled in response to the digital signal.

[0018] In order to manufacture a liquid crystal display device, a first substrate including a plurality of pixels and a plurality of sensing parts is formed. Each of the sensing parts generates an output signal containing location information in response to an input signal. The location information indicates a location where the input signal is inputted. A second substrate is formed. Then, the first substrate is combined with the second substrate. A liquid crystal layer is interposed between the first substrate and the second substrate.

[0019] The liquid crystal display panel includes a light sensing part (or compression sensing part) for generating an analog signal containing location information of position where the light enters (or where the liquid crystal display panel is compressed).

[0020] Therefore, the liquid crystal display device needs no additional touch panel, so that no air space is formed between the liquid crystal display panel and the touch panel. Therefore, a display quality is enhanced. Further, a thickness of the liquid crystal display device is reduced.

[0021] The light sensing part (or the compression sensing part) is formed via the process of manufacturing the liquid crystal display panel, so that an additional process is not necessary. Thus, a manufacturing cost is reduced and productivity is enhanced on the other hand.

[0022] Further, a count (or number) of switching devices connected to a first data line is equal to a count of switching devices connected to a second data line, so that electrical load of the data lines are equal to each other. Therefore, electrical load is reduced, and a cross talk and a flicker are reduced to enhance the display quality of the liquid crystal display device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] The above and other features and advantage points of the present invention will become more apparent by describing in detailed exemplary embodiments thereof with reference to the accompanying drawings, in which:

[0024] **FIG. 1** is a block diagram showing a liquid crystal display device according to a first exemplary embodiment of the present invention;

[0025] **FIG. 2** is a schematic cross-sectional view showing a liquid crystal display panel of **FIG. 1**;

[0026] **FIG. 3** is an enlarged view showing a liquid crystal display panel of **FIG. 2**;

[0027] **FIG. 4** is a layout showing an array substrate of **FIG. 3**;

[0028] **FIG. 5** is an equivalent circuit diagram of a pixel of an array substrate and a light sensing part of **FIG. 4**;

[0029] **FIGS. 6A** to **6D** are plan views showing a process of manufacturing an array substrate of **FIG. 3**;

[0030] **FIG. 7** is a cross-sectional view showing a liquid crystal display panel according to a second exemplary embodiment of the present invention;

[0031] **FIG. 8** is a layout showing an array substrate of **FIG. 7**;

[0032] **FIG. 9** is an equivalent circuit diagram of a pixel of an array substrate and a light sensing part of **FIG. 8**;

[0033] **FIG. 10** is a cross-sectional view showing a liquid crystal display panel according to a third exemplary embodiment of the present invention;

[0034] **FIG. 11** is a layout showing an array substrate of **FIG. 10**;

[0035] **FIG. 12** is a plan view showing a reflective electrode formed on an array substrate of **FIG. 11**;

[0036] **FIG. 13** is an equivalent circuit diagram of a pixel of an array substrate and a light sensing part of **FIG. 11**;

[0037] **FIG. 14** is a block diagram showing a liquid crystal display device according to a fourth exemplary embodiment of the present invention;

[0038] **FIG. 15** is a schematic cross-sectional view showing a liquid crystal display panel of **FIG. 14**;

[0039] **FIG. 16** is an enlarged view showing a liquid crystal display panel of **FIG. 15**;

[0040] **FIG. 17** is a layout showing an array substrate of **FIG. 16**;

[0041] **FIG. 18** is an equivalent circuit diagram of a pixel of an array substrate and a light sensing part of **FIG. 17**;

[0042] **FIG. 19** is a cross-sectional view showing a liquid crystal display panel according to a fifth exemplary embodiment of the present invention;

[0043] **FIG. 20** is a layout showing an array substrate of **FIG. 19**;

[0044] **FIG. 21** is an equivalent circuit diagram of a pixel of an array substrate and a light sensing part of **FIG. 20**;

[0045] **FIG. 22** is a plan view showing a liquid crystal display device according to a sixth exemplary embodiment of the present invention; and

[0046] **FIG. 23** is a plan view showing a liquid crystal display device according to a seventh exemplary embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0047] Hereinafter the preferred embodiments of the present invention will be described in detail with reference to the accompanying drawings.

[0048] **FIG. 1** is a block diagram showing a liquid crystal display device according to a first exemplary embodiment of the present invention.

[0049] Referring to **FIG. 1**, a liquid crystal display device **700** according to a first exemplary embodiment of the present invention includes a liquid crystal display panel **400**, a light sensing part **LSP**, a connecting part **500** and a driving part **600**.

[0050] The liquid crystal display panel **400** has a display surface. An image is displayed on the display surface. The liquid crystal display panel **400** receives an incident light provided from a user through the display surface.

[0051] The liquid crystal display panel has the light sensing part **LSP** therein. The light sensing part **LSP** perceives the incident light through the display surface. The light sensing part **LSP** provides the connecting part with an analog signal. The analog signal contains location information indicating a location where the incident light entered into the liquid crystal display panel.

[0052] The connecting part **500** controls the light sensing part **LSP** in response to a control signal generated from the driving part **600**, so that the light sensing part **LSP** perceives the incident light provided from the user.

[0053] The connecting part **500** transforms the analog signal generated from the light sensing part **LSP** into a digital signal. The digital signal is transferred to the driving part **600**.

[0054] The driving part **600** supplies the connecting part **500** with a control signal so as to control the connecting part

500. The driving part **600** outputs a driving signal for driving the liquid crystal display device **700** in response to the digital signal outputted from the connecting part **500**. Therefore, the liquid crystal display device **700** displays an image in response to the driving signal outputted from the driving part **600**. That is, the liquid crystal display device **700** displays an image in response to instructions corresponding to the position where the incident light enters into the liquid crystal display panel **400**.

[0055] **FIG. 2** is a schematic cross-sectional view showing a liquid crystal display panel of **FIG. 1** and **FIG. 3** is an enlarged view showing a liquid crystal display panel of **FIG. 2**.

[0056] Referring to **FIGS. 2 and 3**, a liquid crystal display panel **400** includes an array substrate **100**, a color filter substrate **200** and a liquid crystal layer **300**.

[0057] The color filter substrate **200** faces the array substrate **100**. The liquid crystal layer **300** is interposed between the array substrate **100** and the color filter substrate **200**.

[0058] The array substrate **100** includes a plurality of pixels **PP** arranged in a matrix shape. The array substrate **100** also includes a plurality of the light sensing part **LSP** arranged in a matrix shape. The light sensing part **LSP** perceives a light generated from a light pen **800**. The light generated from the light pen **800** enters at a display face **410** of the color filter substrate **200**. The light sensing parts **LSP** occupies smaller region of the array substrate **100** than the pixels **PP**, so that an aperture ratio of the liquid crystal display panel **400** is satisfactory.

[0059] A user uses the light pen **800** so as to generate the light. The light pen **800** includes a light emitting diode (LED). The light generated from the light emitting diode of the light pen **800** enters into the liquid crystal display panel **400** via the display surface **410**.

[0060] **FIG. 4** is a layout showing an array substrate of **FIG. 3**.

[0061] Referring to **FIGS. 3 and 4**, each of the pixels **PP** includes a gate line **GL**, a data line **DL**, a first thin film transistor **T1**, a transparent electrode **TE** and a reflective electrode **RE**. The gate line **GL** is extended in a first direction **D1**. The data line **DL** is extended in a second direction **D2**. The second direction **D2** is substantially perpendicular to the first direction **D1**. The first thin film transistor **T1** is electrically connected to the gate line **GL** and with the data line **DL** respectively. The reflective electrode and the transparent electrode are electrically connected to the first thin film transistor **T1**.

[0062] The first thin film transistor **T1** includes a first gate electrode, a first source electrode and a first drain electrode. The first gate electrode diverges from the gate line **GL**. The first source electrode diverges from the data line **DL**. The first drain electrode is electrically connected to the transparent electrode **TE** and the reflective electrode **RE**.

[0063] Each of the light sensing part **LSP** includes a second thin film transistor **T2**, a third thin film transistor **T3**, a first sensor line **SL1** and a second sensor line **SL2**. The second thin film transistor **T2** is turned on by an external light. The third thin film transistor **T3** is electrically connected to the second thin film transistor **T2**. The first sensor

line **SL1** is electrically connected to the third thin film transistor **T3**. The first sensor line **SL1** is extended in the second direction **D2**.

[0064] The light sensing part **LSP** is extended in the first direction **D1**. The light sensing part **LSP** includes a second sensor line **SL2** for receiving a signal outputted from the connecting part **500** of **FIG. 1**.

[0065] The second thin film transistor **T2** includes a second gate electrode, a second source electrode and a second drain electrode. The second gate electrode diverges from the second sensor line **SL2**. The second source electrode diverges from the data line **DL**. The second drain electrode is electrically connected to the third thin film transistor **T3**. The second sensor line **SL2** is formed on a plane on which the gate line **GL** is formed. The second sensor line **SL2** and the gate line **GL** are spaced apart from each other, such that the second sensor line **SL2** is electrically insulated from the gate line **GL**.

[0066] The third thin film transistor **T3** includes a third gate electrode, a third source electrode and a third drain electrode. The third gate electrode diverges from the gate line **GL**. The third source electrode is electrically connected to the second drain electrode of the second thin film transistor **T2**. The third drain electrode diverges from the first sensor line **SL1**. The first sensor line **SL1** is formed on a plane on which the data line **DL** is formed. The first sensor line **SL1** and the data line **DL** are spaced apart from each other, such that the first sensor line **SL1** is electrically insulated from the data line **DL**.

[0067] The transparent electrode **TE** is electrically connected to the drain electrode of the first thin film transistor **T1** via a contact hole **CON**. The contact hole **CON** exposes the first drain electrode of the first thin film transistor **T1**. The transparent electrode comprises an indium tin oxide (ITO) or an indium zinc oxide (IZO).

[0068] The reflective electrode **RE** is disposed over the transparent electrode **TE**. The reflective electrode **RE** has a transmission window **W1** and an opening window **W2**. The transparent electrode **TE** is exposed through the transmission window **W1**. The second thin film transistor **T2** is exposed through the opening window **W2**.

[0069] The reflective electrode **RE** may include one layer comprising an aluminum-neodymium (AlNd). The reflective electrode **RE** may include two layers comprising the aluminum-neodymium (AlNd) layer, and a molybdenum-tungsten (MoW) layer.

[0070] The first transmission window **W1** forms a transmission portion of the liquid crystal display panel **400**. A first light generated from a back light assembly passes through the liquid crystal display panel **400**.

[0071] The opening window **W2** exposes the second thin film transistor **T2**, so that the second thin film transistor **T2** may perceive (or recognize) the light generated from the light pen.

[0072] The reflective electrode **RE** covers the first thin film transistor **T1** and the third thin film transistor **T3** so as to prevent the first thin film transistor **T1** and the third thin film transistor **T3** from being exposed to the light.

[0073] The second thin film transistor **T2** is turned on only when the second thin film transistor **T2** perceives the light

generated from the light pen. That is, the second thin film transistor T2 is not turned on when the second thin film transistor T2 perceives a first light generated from the back light assembly or a second light such as sunlight. A brightness of the light generated from the light pen is higher than the brightness of the first light generated from the back light assembly and the brightness of the second light such as the sunlight. Therefore, the second thin film transistor T2 operates in response to the light generated from the light pen.

[0074] In **FIGS. 3 and 4**, a transmissive and reflective type liquid crystal display device is disclosed for example. However, the present invention may be applied to a transmissive type liquid crystal display device and to a reflective type liquid crystal display device.

[0075] When the present invention is applied to the transmissive type liquid crystal display device, the transmissive type liquid crystal display device includes a covering member for covering the first thin film transistor T1 and the third thin film transistor T3, so that the light may not reach the first thin film transistor T1 and the third thin film transistor T3.

[0076] **FIG. 5** is an equivalent circuit diagram of a pixel of an array substrate and a light sensing part of **FIG. 4**.

[0077] Referring to **FIGS. 1, 2 and 5**, each of the pixels PP includes a gate line GL, a data line DL, a first thin film transistor T1 and a liquid crystal capacitor Clc. The liquid crystal capacitor Clc is referred to as a capacitor formed by a pixel electrode, a common electrode 201 of the color filter substrate 200 and liquid crystal layer interposed between the pixel electrode and a common electrode 201. The liquid crystal capacitor Clc is electrically connected to a first drain electrode of the first thin film transistor T1.

[0078] The light sensing part LSP includes a second thin film transistor T2, a third thin film transistor T3, a first sensor line SL1 and a second sensor line SL2.

[0079] When a user supplies the light sensing part LSP with a light by using a light pen, the second thin film transistor T2 is turned on in response to the light. Then a first signal (or an image signal) applied to the data line DL is transferred to a second drain electrode of the second thin film transistor T2 via the source electrode of the second thin film transistor T2. The first signal contains image information. The first signal is supplied to a pixel electrode via the first thin film transistor T1.

[0080] When the third thin film transistor T3 is turned on in response to a second signal (or gate driving signal) supplied to the gate line GL, the first signal outputted from the drain electrode of the second thin film transistor T2 is supplied to the first sensor line SL1 via the third thin film transistor T3. The second signal corresponds to a gate driving signal outputted from the driving part 600. The second signal is supplied to a gate electrode of the first thin film transistor T1.

[0081] The first signal is transferred to the connecting part 500 via the first sensor line SL1. Next operations are explained in the above with reference to **FIGS. 1 and 2**, so that an explanation of the next operations is omitted.

[0082] **FIGS. 6A to 6D** are plan views showing a process of manufacturing an array substrate of **FIG. 3**.

[0083] Referring to **FIG. 6A**, a first conductive material is deposited on an array substrate, and patterned, so that a first conductive pattern is formed. The first conductive pattern includes a gate line GL and a second sensor line SL2. The gate line GL and the second sensor line SL2 are extended in a first direction D1.

[0084] The first pattern further includes a first gate electrode GE1 of a first thin film transistor T1 and a third gate electrode GE3 of a third thin film transistor T3. The first gate electrode GE1 and the third gate electrode GE3 diverge from the gate line GL.

[0085] Referring to **FIG. 6B**, a semiconductor layer such as an amorphous-silicon layer is deposited and patterned, so that a first semiconductor pattern SP1, a second semiconductor pattern SP2 and a third semiconductor pattern SP3 are formed on the first gate electrode GE1, a second sensor line SL2 and on the third gate electrode line GE3 respectively.

[0086] Referring to **FIG. 6C**, a second conductive material is deposited and patterned, so that a second conductive pattern is formed. The second conductive pattern includes a data line DL and a first sensor line SL1. The data line DL and the first sensor line SL1 are extended in a second direction D2. The second direction D2 is substantially perpendicular to the first direction D1.

[0087] The second conductive pattern further includes a first source electrode SE1 of a first thin film transistor T1, a first drain electrode DE1 of a first thin film transistor T1, a second source electrode SE2 of a second thin film transistor T2, a second drain electrode DE2 of a second thin film transistor T2, a third source electrode SE3 of a third thin film transistor T3, and a third drain electrode DE3 of a third thin film transistor T3. The first drain electrode DE1 is spaced apart from the first source electrode SE1. The third drain electrode DE3 diverges from the first sensor line SL1. The third source electrode SE3 is spaced apart from the third drain electrode DE3.

[0088] Referring again to **FIG. 4**, a transparent electrode TE is formed on an array substrate. The transparent electrode TE is electrically connected to the first thin film transistor T1. The transparent electrode TE comprises the indium tin oxide or the indium zinc oxide.

[0089] Referring to **FIG. 6D**, a reflective electrode RE is formed, such that the reflective electrode RE is disposed over the transparent electrode TE. The reflective electrode RE includes a transmission window W1 for exposing a portion of the transparent electrode TE, and an opening window W2 for exposing the second thin film transistor T2.

[0090] The transmission window W1 forms a transmission part. The reflective electrode forms a reflection part. The opening window W2 exposes the second thin film transistor T2, so that a light generated from a light pen arrives at the second thin film transistor T2. The reflective electrode RE covers the first thin film transistor T1 and the third thin film transistor T3, so that the light generated from the light pen does not arrive at the first thin film transistor T1 and the third thin film transistor T3.

[0091] **FIG. 7** is a cross-sectional view showing a liquid crystal display panel according to a second exemplary

embodiment of the present invention, and **FIG. 8** is a layout showing an array substrate of **FIG. 7**.

[0092] Referring to **FIGS. 1, 7** and **8**, a liquid crystal display panel according to a second exemplary embodiment includes a plurality of pixels **PP** and a plurality of light sensing parts **LSP**.

[0093] Each of the pixels **PP** includes a gate line **GL**, a first data line **DL1**, a first thin film transistor **T1**, a transparent electrode and a reflective electrode **RE**. The gate line is extended in a first direction **D1**. The first data line **DL1** is extended in a second direction **D2**. The second direction **D2** is substantially perpendicular to the first direction **D1**. The first thin film transistor **T1** is electrically connected to the gate line **GL** and the first data line **DL1**. The transparent electrode **TE** and the reflective electrode **RE** are electrically connected to the first thin film transistor **T1**.

[0094] An image signal applied to the first data line **DL1** is supplied to a source electrode of the first thin film transistor **T1**. The image signal is transferred to a drain electrode of the first thin film transistor **T1** in response to a gate driving signal applied to a gate electrode of the first thin film transistor **T1** via the gate line **GL**.

[0095] Each of the light sensing parts **LSP** includes a second thin film transistor **T2**, a third thin film transistor **T3**, a first sensor line **SL1** and a second sensor line **SL2**. The third thin film transistor **T3** is electrically connected to the second thin film transistor **T2**. The first sensor line **SL1** is extended in the second direction **D2**. The first sensor line **SL1** is electrically connected to the third thin film transistor **T3**. The second sensor line **SL2** is extended in the first direction **D1**. The second sensor line **SL2** receives the first signal from the connecting part **500** of **FIG. 1**.

[0096] The second thin film transistor **T2** includes a second gate electrode, a second source electrode and a second drain electrode. A portion of the second sensor line **SL2** corresponds to the second gate electrode. The second gate electrode is electrically connected to the second source electrode, so that the first signal supplied to the second gate electrode is transferred to the second source electrode. The second drain electrode is electrically connected to the third thin film transistor **T3**. The first signal outputted from the connecting part **500** is supplied to the second gate electrode via the second sensor line **SL2**. Then, the first signal is transferred to the source electrode. Therefore, when the second thin film transistor **T2** is turned on in response to the light, the first signal is transferred to the second drain electrode of the second thin film transistor **T2**.

[0097] The third thin film transistor **T3** includes a third gate electrode, a third source electrode and a third drain electrode. The third gate electrode diverges from the gate line **GL**. The third source electrode is electrically connected to the second source electrode of the second thin film transistor **T2**. The third drain electrode diverges from the first sensor line **SL1**.

[0098] The first signal outputted from the second drain electrode of the second thin film transistor **T2** is applied to third source electrode of the third thin film transistor **T3**.

[0099] The third thin film transistor **T3** is turned on in response to the second signal (or gate driving signal) that is applied to the gate line **GL**. When the third thin film

transistor **T3** is turned on, the first signal of the third source electrode is transferred to the third drain electrode. Then the first signal is transferred to the connecting part **500** via the first sensor line **SL1** that is electrically connected to the third drain electrode.

[0100] In the first exemplary embodiment of the present invention of **FIG. 4**, the second source electrode of the second thin film transistor **T2** diverges from the data line **DL**.

[0101] However, in the second exemplary embodiment of the present invention of **FIG. 8**, the second source electrode of the second thin film transistor **T2** is electrically connected to the second gate electrode of the second thin film transistor **T2** via contact. Therefore, an electrical load of the first data line **DL1** is reduced to prevent a delay of the first signal (or image signal).

[0102] Further, when the second source electrode diverges from the first data line **DL1**, a first electrical load of the first data line **DL1** that is electrically connected to the light sensing part **LSP** is different from a second electrical load of the second data line **DL2** that is not electrically connected to the light sensing part **LSP**. Therefore, the liquid crystal display device **400** has demerits such as a cross talk and a flicker.

[0103] When the second source electrode is electrically connected to the second gate electrode via the contact, the first electrical load of the first data line **DL1** becomes substantially equal to the second electrical load of the second data line **DL2**, so that display quality of the liquid crystal display device **400** is enhanced.

[0104] **FIG. 9** is an equivalent circuit diagram of a pixel of an array substrate and a light sensing part of **FIG. 8**.

[0105] Referring to **FIGS. 1** and **9**, a first signal is outputted from the connecting part **500** is applied to the second sensor line **SL2**. When a light arrives at a second thin film transistor **T2**, the second thin film transistor **T2** is turned on, so that a first signal applied to the second gate electrode is transferred to the second drain electrode via the second source electrode.

[0106] The first signal is transferred from the second drain electrode of the second thin film transistor to the third source electrode of the third thin film transistor **T3**. When the third thin film transistor **T3** is turned on in response to the second signal applied to the gate line **GL**, the first signal is outputted from the third drain electrode of the third thin film transistor **T3**.

[0107] **FIG. 10** is a cross-sectional view showing a liquid crystal display panel according to a third exemplary embodiment of the present invention, and **FIG. 11** is a layout showing an array substrate of **FIG. 10**.

[0108] Referring to **FIGS. 1, 10** and **11**, a liquid crystal display panel **430** according to a third exemplary embodiment of the present invention includes an array substrate **100**. The array substrate **100** includes a plurality of pixels **PP** and a plurality of an infrared light sensing part **ISP**.

[0109] Each of the pixels **PP** includes a gate line **GL**, a data line **DL**, a first thin film transistor **T1**, a transparent electrode **TE** and a reflective electrode **RE**.

[0110] Each of the infrared light sensing part ISP includes a capacitor C1, a second thin film transistor T2 and a sensor line SL. The infrared light sensing part ISP perceives an infrared light and outputs an analog signal containing of location information.

[0111] The capacitor C1 includes a first electrode line EL1 and a pyroelectric thin film PE1. The capacitor C1 is electrically insulated from the gate line GL. The first electrode line EL1 is extended in the first direction D1. An insulation layer is disposed between the first electrode line EL1 and the pyroelectric thin film PE1. The pyroelectric thin film PE1 is disposed over the first electrode line EL1. The pyroelectric thin film PE1 comprises a pyroelectric material that has a conductance, when the infrared light is irradiated onto the pyroelectric material. When the infrared light is irradiated onto the pyroelectric material, a carrier is generated.

[0112] The first electrode line EL1 is electrically connected to the connecting part 500 to receive a signal from the connecting part 500. The first electrode line EL1 is formed on a plane where the gate line GL is formed. The first electrode line EL1 is spaced apart from the gate line GL, so that the first electrode line EL1 is electrically insulated from the gate line GL. The first electrode line is extended in the first direction D1.

[0113] The sensor line SL is formed on a plane where the data line DL is formed. The sensor line SL is spaced apart from the data line DL, so that the sensor line SL is electrically insulated from the data line DL. The sensor line SL is extended in the second direction D2 that is perpendicular to the first direction D1.

[0114] The second thin film transistor T2 includes a second gate electrode, a second source electrode and a third drain electrode. The second gate electrode diverges from the gate line GL. The second source electrode is electrically connected to the first pyroelectric thin film PE1. The drain electrode diverges from the sensor line SL.

[0115] The second source electrode of the second thin film transistor T2 covers the first pyroelectric thin film PE1, so that the second source electrode is electrically connected to the first pyroelectric thin film PE1. The second source electrode comprises the indium tin oxide (ITO) or the indium zinc oxide (IZO). The indium tin oxide and the indium zinc oxide are transparent and electrically conductive, so that the infrared light arrives at the first pyroelectric thin film PE1 via the second source electrode. The indium tin oxide or the indium zinc oxide may be deposited and patterned, so that the second drain electrode and the second source electrode of the second thin film transistor T2, the sensor line SL, the data line DL, and the first source electrode and the first drain electrode of the first thin film transistor T1 are formed simultaneously.

[0116] FIG. 12 is a plan view showing a reflective electrode formed on an array substrate of FIG. 11.

[0117] Referring to FIGS. 10 and 12, the transparent electrode is formed on an insulation layer. The transparent electrode TE is electrically connected to the first thin film transistor T1 via a contact hole CON. The contact hole CON penetrates an insulation layer so as to expose the first drain electrode of the first thin film transistor T1.

[0118] The reflective electrode RE is formed on the insulation layer. A portion of the reflective electrode RE overlaps with the transparent electrode TE. The reflection layer RE includes a transmission window W1 and an opening window W2. The transparent electrode is exposed through the transmission window W1. The first pyroelectric thin film PE1 is exposed through the opening window W2, so that the infrared light generated by a user arrives at the first pyroelectric thin film PE1.

[0119] In FIGS. 10 to 12, a transmissive and reflective type liquid crystal display device having the transparent electrode TE and the reflective electrode RE is disclosed for an example. However, the present invention may be applied to both of a transmissive type liquid crystal display device and a reflective type liquid crystal display device.

[0120] When the present invention is applied to the transmissive type liquid crystal display device, the transmissive type liquid crystal display device includes a covering member for covering the first thin film transistor T1, so that a light may not arrive at the first thin film transistor T1.

[0121] FIG. 13 is an equivalent circuit diagram of a pixel of an array substrate and a light sensing part of FIG. 11.

[0122] Referring to FIG. 13, each of the pixels PP includes a gate line GL, a data line DL, a first thin film transistor T1 and a liquid crystal capacitor Clc. The liquid crystal capacitor is electrically connected to a first drain electrode of the first thin film transistor T1.

[0123] Each of the infrared light sensing part ISP includes a first electrode line EL1, a first capacitor C1, a second thin film transistor T2 and a sensor line SL.

[0124] When the infrared light sensing part ISP perceives the infrared light, the first capacitor C1 stores charges that correspond to a first signal. When the second thin film transistor T2 is turned on in response to the second signal applied to the gate line GL, the first signal is transferred to the second drain electrode of the second thin film transistor T2 via the second source electrode of the second thin film transistor T2. The second signal is outputted from the connecting part 600, and it is applied to the first gate electrode of the first thin film transistor T1.

[0125] The first signal applied to the second drain electrode of the second thin film transistor T2 is transferred to the connecting part 500 via the sensor line SL. Therefore, the connecting part 500 may receive location information of a position where the light enters.

[0126] FIG. 14 is a block diagram showing a liquid crystal display device according to a fourth exemplary embodiment of the present invention.

[0127] Referring to FIG. 14, a liquid crystal display device 900 according to a fourth exemplary embodiment of the present invention includes a liquid crystal display panel 450, a compression sensing part CSP1, a connecting part 500 and a driving part 600.

[0128] The liquid crystal display panel 450 includes a display surface. The display surface displays an image. A compression signal of a user is received through the display surface.

[0129] The liquid crystal display panel 450 has the compression sensing part CSP1 therein. The compression sens-

ing part CSP1 perceives the compression signal and outputs an analog signal containing location information that is a position where the user compresses. Then, the analog signal is transferred to the connecting part 500.

[0130] The connecting part 500 controls the compression sensing part CSP1 in response to a control signal outputted from the driving part 600, so that the compression sensing part CSP1 perceives the compression signal. The connecting part 500 transforms the analog signal containing the location information into a digital signal. The digital signal is then transferred to the driving part 600.

[0131] The driving part 600 supplies the connecting part with the control signal. The driving part 600 outputs a driving signal for driving the liquid crystal display panel 450 in response to the digital signal of the connecting part 500. Therefore, an image is displayed on the display surface of the liquid crystal display panel 450 in response to the driving signal. The image corresponds to instructions of the user.

[0132] FIG. 15 is a schematic cross-sectional view showing a liquid crystal display panel of FIG. 14, and FIG. 16 is an enlarged view showing a liquid crystal display panel of FIG. 15.

[0133] Referring to FIGS. 15 and 16, a liquid crystal display panel includes an array substrate 100, a color filter substrate 200, a liquid crystal layer 300 and a cell gap retaining member 350. The color filter substrate 200 faces the array substrate 100. The liquid crystal layer 300 is interposed between the array substrate 100 and the color filter substrate 200. The cell gap retaining member 350 maintains the distance of the gap formed between the array substrate 100 and the color filter substrate 200.

[0134] The array substrate 100 includes a plurality of pixels PP and a plurality of compression sensing parts CSP1. The pixels PP are arranged in a matrix shape. The compression sensing part CSP1 perceives a compression signal.

[0135] The cell gap retaining member 350 is disposed on the compression sensing parts CSP1. Therefore, when a display face 410 is pressed by a finger 950 or pen, the compression is then transferred to the compression sensing part CSP1 via the cell gap retaining member 350.

[0136] The color filter substrate 200 may comprise a plastic material that is flexible so as to transfer the compression to the compression sensing part CSP1. However, the array substrate 100 may comprise a glass that is not flexible, because the array substrate 100 is not related to the compression.

[0137] FIG. 17 is a layout showing an array substrate of FIG. 16.

[0138] Referring to FIGS. 15, 16 and 17, each of the pixels includes a gate line GL, a data line DL, a first thin film transistor T1 and a transparent electrode TE.

[0139] Each of the compression sensing part CSP1 includes a second capacitor C2, a second thin film transistor T2 and a sensor line SL. The compression sensing part CSP1 perceives a location where the display face of the liquid crystal display panel is compressed. The compression sensing part CSP1 outputs an analog signal containing location information.

[0140] The second capacitor C2 is electrically insulated from the gate line GL. The second capacitor C2 includes a second electrode line EL2 and a piezoelectric thin film PE2. The second electrode line EL2 is extended in a first direction D1. An insulation layer is disposed between the second electrode line EL2 and the piezoelectric thin film PE2. The piezoelectric thin film PE2 is disposed over the second electrode line EL2. The piezoelectric thin film PE2 comprises a piezoelectric material such as a polyvinylidene fluoride (PTDF) and a polyvinyl fluoride (PVF).

[0141] When the piezoelectric material is compressed, carriers are generated.

[0142] The second electrode line EL2 is electrically connected to the connecting part 500 so as to receive signals.

[0143] The second thin film transistor T2 includes a second gate electrode, a source electrode and a drain electrode. The second gate electrode diverges from the gate line GL. The second source electrode is electrically connected to the piezoelectric thin film PE2. The second drain electrode diverges from the sensor line SL.

[0144] FIG. 18 is an equivalent circuit diagram of a pixel of an array substrate and a light sensing part of FIG. 17.

[0145] Referring to FIGS. 14 and 18, each of the pixels includes a gate line GL, a data line DL, a first thin film transistor T1 and a liquid crystal capacitor Clc. The liquid crystal capacitor Clc is electrically connected to a first drain electrode of the first thin film transistor T1. Each of the compression sensing part CSP1 includes a second electrode line EL2, a second capacitor C2, a second thin film transistor T2 and a sensor line SL.

[0146] When the compression sensing part CSP1 is compressed, the second capacitor C2 stores charges that corresponds to a first signal. When the second thin film transistor T2 is turned on in response to a second signal applied to the gate line GL, the first signal is then transferred to the second drain electrode of the second thin film transistor T2 via the second source electrode of the second thin film transistor T2. The second signal corresponds to a gate driving signal outputted from the driving part 600.

[0147] The first signal outputted from the second drain electrode is applied to the sensor line SL to be transferred to the connecting part 500 via the sensor line SL. Therefore, the connecting part 500 receives the location information generated from the compression sensing part CSP1 via the sensor line SL.

[0148] FIG. 19 is a cross-sectional view showing a liquid crystal display panel according to a fifth exemplary embodiment of the present invention, and FIG. 20 is a layout showing an array substrate of FIG. 19.

[0149] Referring to FIGS. 19 and 20, an array substrate 100 according to a fifth exemplary embodiment includes a plurality of pixels PP and a plurality of compression sensing part CSP2 where the compression sensing part CSP2 perceives compression.

[0150] The array substrate 100 includes an n-number of gate lines and an m-number of data lines, where 'm' and 'n' are natural numbers that are greater than 1. Each of the pixels includes an i-th gate line GLi of the n-number of gate lines, a j-th data line DLj, a first thin film transistor T1 and

transparent electrode TE, where 'i' is one of numbers from 1 to n and 'j' is one of numbers from 1 to m. The first thin film transistor T1 is electrically connected to the i-th gate line GLi and the j-th data line DLj. The transparent electrode TE is electrically connected to the first thin film transistor T1.

[0151] Each of the compression sensing parts CSP2 includes a second thin film transistor T2, a third thin film transistor T3, a third capacitor C3 and a sensor line SL. The second thin film transistor T2 is electrically connected to the i-th gate line GLi. The third thin film transistor T3 is electrically connected to the (i+1)-th gate line GLi+1. The third capacitor C3 is electrically connected to the second thin film transistor T2 and the third thin film transistor T3.

[0152] The third thin film transistor T3 includes a third gate electrode, a third source electrode and a third drain electrode. The third gate electrode diverges from the (i+1)-th gate line GLi+1. The third source electrode is electrically connected to the third capacitor C3 and the second thin film transistor T2. The third drain electrode diverges from the sensor line SL.

[0153] The second thin film transistor T2 includes a second gate electrode, a second source electrode and a second drain electrode. The second gate electrode diverges from the i-th gate line GLi. The second source electrode is electrically connected to the second gate electrode. The second drain electrode is electrically connected to the third source electrode of the third thin film transistor T3 and the third capacitor C3.

[0154] The third capacitor C3 includes a first electrode and a second electrode. The first electrode faces the second electrode. An insulation layer is interposed between the first electrode and the second electrode. The first electrode is electrically connected to the second drain electrode of the second thin film transistor T2 and the third source electrode of the third thin film transistor T3. The second electrode of the third capacitor C3 is electrically connected to the third gate electrode of the third thin film transistor T3. The first electrode and the second electrode of the third capacitor are disposed below the cell gap retaining member 350.

[0155] FIG. 21 is an equivalent circuit diagram of a pixel of an array substrate and a light sensing part of FIG. 20.

[0156] Referring to FIG. 21, each of the pixels includes an i-th gate electrode line GLi, a j-th data line DLj, a first thin film transistor T1 and a liquid crystal capacitor Clc. The liquid crystal capacitor Clc is electrically connected to a first drain electrode of the first thin film transistor T1.

[0157] Each of the compression sensing part CSP 2 includes a second thin film transistor T2, a third capacitor C3, a third thin film transistor T3 and a sensor line SL.

[0158] The second thin film transistor T2 is turned on in response to a first signal applied to the i-th gate line GLi. Then, a first signal applied from the second source electrode is transferred to the second drain electrode. The first signal is a gate driving signal that is outputted from the driving part and applied to the i-th gate line GLi.

[0159] When the compression sensing part is compressed, the third capacitor stores charges corresponding to a second signal. The third thin film transistor T3 is turned on in response to the second signal stored in the third capacitor

C3, so that the first signal supplied from the second thin film transistor T2 is transferred to the sensor line SL.

[0160] The first signal is supplied to the connecting part 500 via the sensor line. Therefore, the connecting part 500 receives the location information from the compression sensing part CSP2 via the first signal.

[0161] FIG. 22 is a plan view showing a liquid crystal display device according to a sixth exemplary embodiment of the present invention. For example, a liquid crystal display panel according to a first exemplary example of FIGS. 1 to 5 is used as a liquid crystal display panel of the liquid crystal display device of FIG. 22, so that the same reference numerals denote the same elements in FIGS. 1 to 5, and thus the detailed descriptions of the same elements will be omitted.

[0162] Referring to FIG. 22, a liquid crystal display device 1000 according to a sixth exemplary embodiment includes a liquid crystal display panel 400, a gate driving part 610 and a data driving part 620. The liquid crystal display panel 400 includes a light sensing part LSP1. The gate driving part 610 and the data driving part drive the liquid crystal display panel 400. The liquid crystal display device 1000 further includes a first connecting part 510 and a second connecting part 520. The data driving part 620 has the first connecting part 510 therein. The first connecting part 510 transforms an analog signal outputted from a second sensor line SL2 into a digital signal. The gate driving part 610 has the second connecting part 520 therein. The second connecting part 520 controls the light sensing part LSP.

[0163] A timing controller 650 controls the gate driving part 610, the data driving part 620, the first connecting part 510 and the second connecting part 520. The timing controller 650 outputs a control signal for controlling the first connecting part 510 and the second connecting part 520. The timing controller 650 receives the digital signal from the second connecting part 520. Then the timing controller 650 controls the gate driving part 610 and the data driving part 620 in response to the digital signal so as to drive the liquid crystal display panel 400.

[0164] The liquid crystal display panel 400 includes a display region DA and a first peripheral region PA1 and a second peripheral region PA2. The display region DA displays an image. The first peripheral region PA1 and the second peripheral region PA2 are disposed adjacent to the display region DA. The display region DA of the liquid crystal display panel 400 includes light sensing parts LSP and pixels PP.

[0165] The gate driving part 610 is formed in the first peripheral region PA1 via a process of manufacturing the pixels PP. The data driving part 620 is formed in the second peripheral region PA2 via the process of manufacturing the pixels PP. The data driving part 620 has the first connecting part 510 therein. The driving part 620 is mounted on the second peripheral region PA2. The gate driving part 610 has the second connecting part 520 therein. The gate driving part 610 is formed on the first peripheral region PA1.

[0166] As described above, the first connecting part 510 is mounted on the second peripheral region PA2 and the second connecting part 520 is formed on the first peripheral region PA1, so that an additional space for disposing the first

connecting part **510** and the second connecting part **520** is not necessary. Therefore, a size of the liquid crystal display device **1000** is reduced.

[0167] FIG. 23 is a plan view showing a liquid crystal display device according to a seventh exemplary embodiment of the present invention.

[0168] Referring to FIG. 23, a liquid crystal display device **1000** includes a liquid crystal display panel **400** having a light sensing part **LSP**, a gate driving part **660** and a data driving part **670**. A timing controller **650** controls the gate driving part **660** and the data driving part **670**.

[0169] The gate driving part **660** is electrically connected to the light sensing part **LSP** via a first sensor line **SL1**. The data driving part **670** is electrically connected to the light sensing part **LSP** via a second sensor line **SL2**.

[0170] The gate driving part **660** controls the light sensing part **LSP** in response to a first control signal outputted from the timing controller **650**. The data driving part **670** receives an analog signal outputted from the light sensing part **LSP** in response to the second signal outputted from the timing controller **650**. The analog signal is then transformed into a digital signal.

[0171] The timing controller **650** receives the digital signal from the data driving part **670**. Then, the timing controller **650** drives the liquid crystal display panel **400** so as to display an image via the gate driving part **660** and the data driving part **670** in response to the digital signal.

[0172] In FIGS. 22 and 23, the gate driving parts **610** and **660** are formed on the liquid crystal display panel **400**. However, the gate driving parts **610** and **660** may be formed in a chip that may be mounted on the liquid crystal display panel **400**.

[0173] According to a liquid crystal display panel, a liquid crystal display device and a method of manufacturing the liquid crystal display device, the liquid crystal display panel includes a light sensing part (or compression sensing part) for generating an analog signal containing location information of position where the light enters (or where the liquid crystal display panel is compressed).

[0174] Therefore, the liquid crystal display device does not need an additional touch panel, so that an air space formed between the liquid crystal display panel and the touch panel does not exist. Thus a display quality is enhanced on one hand, a thickness of the liquid crystal display device is reduced on the other hand.

[0175] The light sensing part (or the compression sensing part) is formed via the process of manufacturing the liquid crystal display panel, so that an additional process is not necessary. As a result, a manufacturing cost is reduced and productivity is enhanced.

[0176] Further, a count (or number) of switching devices connected to a first data line is equal to a count of switching devices connected to a second data line, so that electrical load of the data lines are equal with each other. Therefore, electrical load is reduced, and a cross talk and a flicker are reduced to enhance the display quality of the liquid crystal display device.

[0177] Having described the exemplary embodiments of the present invention and its advantages, it is noted that

various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the invention as defined by appended claims.

What is claimed is:

1. A liquid crystal display panel comprising:
 - a first substrate including a plurality of pixels and a plurality of sensing parts, each of the sensing parts generating an output signal containing location information in response to an input signal, the location information indicating a location where the input signal is inputted;
 - a second substrate connected to the first substrate, the second substrate facing the first substrate; and
 - a liquid crystal layer interposed between the first substrate and the second substrate.
2. The liquid crystal display device of claim 1, wherein the input signal corresponds to an incident light, the incident light passing through the second substrate to reach the sensing part, and the sensing part outputting an analog signal in response to the incident light.
3. The liquid crystal display device of claim 2, wherein the incident light is an infrared light.
4. The liquid crystal display device of claim 1, wherein the input signal corresponds to compression applied to the sensing part, the sensing part outputting an analog signal in response to the compression.
5. A liquid crystal display device comprising:
 - a liquid crystal display panel including a plurality of pixels and a plurality of sensing parts, each of the sensing parts generating an analog signal containing location information in response to an incident light, the location information indicating a location where the light enters; and
 - a control part receiving the analog signal and transforming the analog signal into a digital signal, the liquid crystal display device being controlled in response to the digital signal.
6. The liquid crystal display device of claim 5, wherein each of the pixels includes a gate line, a data line, a first switching device electrically connected to the gate line and the data line, and a pixel electrode electrically connected to the first switching device.
7. The liquid crystal display device of claim 6, wherein each of the sensing part comprises:
 - a second switching device being turned on in response to the incident light to output a first signal that is applied to the data line;
 - a third switching device outputting the first signal provided from the second switching device in response to a second signal applied to the gate line; and
 - a first sensor line receiving the first signal from the third switching device and transmitting the first signal to the control part.
8. The liquid crystal display device of claim 7, wherein each of the sensing part further comprises a second sense line.
9. The liquid crystal display device of claim 8, wherein the second switching device includes a second gate electrode diverging from the second sensor line, a second source

electrode diverging from the data line, and a second drain electrode being electrically connected to the third switching device.

10. The liquid crystal display device of claim 7, wherein the third switching device includes a third gate electrode diverging from the gate line, a third source electrode being electrically connected to the second switching device, and a third drain electrode being electrically connected to the first sensor line.

11. The liquid crystal display device of claim 7, wherein the first switching device, the second switching device and the third switching device correspond to an amorphous-silicon thin film transistor.

12. The liquid crystal display device of claim 6, wherein each of the sensing part comprises:

- a first sensor line receiving a first signal from the control part;

- a second switching device outputting the first signal in response to the light;

- a third switching device outputting the first signal provided from the second switching device in response to a second signal provided from the gate line; and

- a second sensor line providing the control part with the first signal outputted from the third switching device.

13. The liquid crystal display device of claim 12, wherein the second switching device includes a second gate electrode diverging from the first sensor line, a second source electrode electrically connected to the gate electrode, and a second drain electrode electrically connected to the third switching device.

14. The liquid crystal display device of claim 12, wherein the third switching device comprises a third gate electrode diverging from the gate line, a third source electrode electrically connected to the second switching device, and the third drain electrode electrically connected to the second sensor line.

15. The liquid crystal display device of claim 6, wherein the pixel electrode comprises a transparent electrode and a reflective electrode including a transmission portion and a reflection portion, the reflective electrode facing the transparent electrode.

16. The liquid crystal display device of claim 15, wherein the reflective electrode comprises an opening window exposing the sensing part, the incident light passing through the opening window and arriving at the sensing part.

17. The liquid crystal display device of claim 6, wherein the incident light is an infrared light.

18. The liquid crystal display device of claim 17, wherein the sensing part comprises:

- a capacitor formed with an electrode line and a pyroelectric thin film, an insulation layer being interposed between the electrode line and the pyroelectric thin film, the capacitor storing a first signal in response to the infrared light;

- a second switching device outputting the first signal stored in the capacitor in response to a second signal provided from the gate line; and

- a sensor line receiving the first signal from the second switching device and transmitting the first signal to the control part.

19. The liquid crystal display device of claim 18, wherein the second switching device comprises a second gate electrode diverging from the gate line being provided with the second signal, a second source electrode electrically connected to the pyroelectric thin film and a second drain electrode electrically connected to the sensor line.

20. The liquid crystal display device of claim 17, wherein the sensor line, the second source electrode and the second drain electrode of the second switching device comprise a transparent and electrically conductive material.

21. The liquid crystal display device of claim 20, wherein the pixel electrode comprises a transparent electrode and a reflective electrode including a transmission portion and a reflection portion, the reflective electrode facing the transparent electrode.

22. The liquid crystal display device of claim 21, wherein the reflective electrode comprises an opening window exposing the second switching device, the infrared light passing through the opening window and arriving at the second switching device.

23. The liquid crystal display device of claim 5, wherein the control part comprises:

- a connecting part to receive the analog signal and transform the analog signal into a digital signal in response to a first control signal;

- a first driving part to drive the liquid crystal display panel in response to a second control signal; and

- a second driving part to provide the connecting part with the first control signal and receive the digital signal from the connecting part to output the second control signal.

24. The liquid crystal display device of claim 23, wherein the first driving part is formed in a chip, the chip being mounted on the liquid crystal display panel, the chip having the connecting part therein.

25. The liquid crystal display device of claim 23, wherein the first driving part and the connecting part are integrally formed in the liquid crystal display panel.

26. A liquid crystal display device comprising:

- a liquid crystal display panel including a plurality of pixels and a plurality of sensing parts, each of the sensing part generating an analog signal containing location information in response to a compression of the liquid crystal display panel, the location information indicating a location on which the liquid crystal display device is compressed, an image being displayed via the pixels; and

- a control part to receive the analog signal and transform the analog signal into a digital signal, the liquid crystal display device being controlled in response to the digital signal.

27. The liquid crystal display device of claim 26, wherein the liquid crystal display panel comprises:

- a first substrate including a first switching device, a plurality of pixels and a plurality of sensing parts, each of the pixels having a gate line and a data line, the gate line and the data line being electrically connected to the first switching device;

- a second substrate facing the first substrate;

a liquid crystal layer interposed between the first substrate and the second substrate; and

a cell gap retaining member disposed between the first substrate and the second substrate, the cell gap retaining member maintains a distance between the first substrate and the second substrate.

28. The liquid crystal display device of claim 26, wherein the sensing part comprises:

a capacitor formed by an electrode line and a piezoelectric thin film, an insulation layer being interposed between the electrode line and the piezoelectric thin film, the capacitor storing a first signal in response to the compression of the liquid crystal display panel;

a second switching device outputting the first signal stored in the capacitor in response to a second signal provided from the gate line; and

a sensor line receiving the first signal from the second switching device and transmitting the first signal to the control part.

29. The liquid crystal display device of claim 28, wherein the piezoelectric thin film is interposed between the cell gap retaining member and the electrode line.

30. The liquid crystal display device of claim 28, wherein the second switching device includes a second gate electrode diverging from the gate line, a second source electrode and a second drain electrode being electrically connected to the sensor line.

31. The liquid crystal display device of claim 30, wherein the second source electrode of the second thin film transistor is electrically connected to the piezoelectric thin film.

32. The liquid crystal display device of claim 26, wherein the liquid crystal display panel comprises:

a first substrate including an n-number of gate lines and an m-number of data lines, where 'n' and 'm' are natural numbers greater than one;

a second substrate facing the first substrate;

a liquid crystal layer interposed between the first substrate and the second substrate; and

a cell gap retaining member interposed between the first substrate and the second substrate, the cell gap retaining member maintaining a distance between the first substrate and the second substrate.

33. The liquid crystal display device of claim 32, wherein the sensing part comprises:

a capacitor including a first electrode and a second electrode, the capacitor storing a first signal in response to the compression of the liquid crystal display panel;

a first switching device electrically connected to the first electrode of the capacitor, the first switching device being turned on in response to a second signal provided from i-th gate line to output a second signal, where 'i' is a natural number that is in a range from one to n;

a second switching device electrically connected to the first and the second electrode of the capacitor, the second switching device being turned on in response to the first signal to output the second signal; and

a sensor line receiving the second signal from the second switching device, the sensor line transmitting the second signal to the control part.

34. The liquid crystal display device of claim 33, wherein the compression is applied to the cell gap retaining member to reduce a distance between the first electrode and the second electrode of the capacitor, so that a capacitance of the capacitor increases.

35. The liquid crystal display device of claim 33, wherein the first switching device comprises a first gate electrode diverging from the i-th gate line, a first drain electrode electrically connected to the first gate electrode, and a third source electrode electrically connected to the first electrode of the capacitor.

36. The liquid crystal display device of claim 33, wherein the second switching device comprises a second gate electrode electrically connected to the second electrode with the capacitor, a second source electrode and a second drain electrode, the second signal of the i-th gate line being transferred to the sensor line via the second source electrode and the second drain electrode.

37. The liquid crystal display device of claim 36, wherein the second gate electrode of the second switching device diverges from an (i+1)-th gate line.

38. A method of manufacturing a liquid crystal display device comprising:

forming a first substrate including a plurality of pixels and a plurality of sensing parts, each of the sensing parts generating an output signal containing location information in response to an input signal, the location information indicating a location where the input signal is inputted;

forming a second substrate;

combining the first substrate and the second substrate; and forming a liquid crystal layer between the first substrate and the second substrate.

39. The method of claim 38, wherein the first substrate is formed by:

forming a plurality of pixels and a plurality of sensing parts, each of the pixels including a gate line, a data line and a first switching device, each of the sensing parts including a first sensor line, a second sensor line, a second switching device and a third switching device;

forming a transparent electrode being electrically connected to the first switching device; and

forming a reflective electrode including a transmission portion and a reflection portion, the second switching device being exposed via the transmission portion.

40. The method of claim 39, wherein the pixels and the sensing parts are formed by:

forming a first conductive pattern including a gate line, a first gate electrode of the first switching device, a third gate electrode of the third switching device, a first sensor line and a second gate electrode of the second switching device, the first gate electrode and the third gate electrode diverging from the gate line, the second gate electrode diverging from the first sensor line;

forming a gate insulation layer on the first conductive pattern;

forming a semiconductor layer on a portion of the gate insulation layer, the portion being disposed near the first gate electrode, the second electrode and the third gate electrode; and

forming a second conductive pattern on the semiconductor layer and the gate insulation layer, the second conductive pattern including the data line, a first source electrode and a first drain electrode of the first switch-

ing device, a second source electrode and a second drain electrode of the second switching device, a second sensor line, and a third source electrode and a third drain electrode of the third switching device, the first source electrode and the second source electrode diverging from the data line, the third source electrode diverging from the second sensor line.

* * * * *

专利名称(译)	液晶显示面板，具有该液晶显示面板的液晶显示装置及其制造方法		
公开(公告)号	US20040169625A1	公开(公告)日	2004-09-02
申请号	US10/699142	申请日	2003-10-30
[标]申请(专利权)人(译)	朴元相 UH KEE HAN 金亨GUEL CHO JONG HWAN PARK SANG JIN 郑在勋 JUNG BAE YOUNG		
申请(专利权)人(译)	朴元相 KEE UH-HAN 金亨GUEL CHO JONG-HWAN 朴相-JIN 郑在勋 JUNG YOUNG-BAE		
当前申请(专利权)人(译)	朴元相 KEE UH-HAN 金亨GUEL CHO JONG-HWAN 朴相-JIN 郑在勋 JUNG YOUNG-BAE		
[标]发明人	PARK WON SANG UH KEE HAN KIM HYUNG GUEL CHO JONG HWAN PARK SANG JIN JUNG JAE HOON JUNG YOUNG BAE		
发明人	PARK, WON-SANG UH, KEE-HAN KIM, HYUNG-GUEL CHO, JONG-HWAN PARK, SANG-JIN JUNG, JAE-HOON JUNG, YOUNG-BAE		
IPC分类号	G02F1/1368 G02F1/1343 G02F1/1345 G02F1/135 G02F1/1362 G06F3/033 G06F3/042 G09G3/36		
CPC分类号	G02F1/135 G06F3/042 G06F3/0412 G02F1/1362		
优先权	1020030024380 2003-04-17 KR 1020030012768 2003-02-28 KR		
其他公开文献	US8587511		
外部链接	Espacenet USPTO		

摘要(译)

一种液晶显示面板，包括第一基板，第二基板和液晶层。第一基板包括多个像素和多个感测部。每个感测部分响应于输入信号生成包含位置信息的输出信号。位置信息指示输入信号被输入的位置。第二基板连接到第一基板。第二基板面向第一基板。液晶层插入在第一基板和第二基板之间。液晶显示装置不需要另外的触摸面板，使得在液晶显示面板和触摸面板之间不存在空气空间。因此，提高了显示质量。

