



US 20090046215A1

(19) **United States**(12) **Patent Application Publication**
Shiomi(10) **Pub. No.: US 2009/0046215 A1**(43) **Pub. Date: Feb. 19, 2009**(54) **LIQUID CRYSTAL DISPLAY APPARATUS****Publication Classification**(76) Inventor: **Makoto Shiomi, Nara (JP)**Correspondence Address:
HARNES, DICKEY & PIERCE, P.L.C.
P.O. BOX 8910
RESTON, VA 20195 (US)(51) **Int. Cl.****G02F 1/1335** (2006.01)**H04N 13/00** (2006.01)(52) **U.S. Cl.** **349/15**(57) **ABSTRACT**

In a liquid crystal display apparatus realizing a dual view display by bonding a liquid crystal panel and a parallax barrier, the parallax barrier separates display images by treating three pixels including R, G, and B pixels as one unit (one picture element). At this time, luminance variation due to crosstalk concentrates on a right-end pixel among the three pixels constituting the one picture element (in a case where each pixel receives data from a source line immediately on the left of the pixel). Accordingly, the right-end pixel is arranged to be a B pixel that has a low correlation with luminance information and in which influence of crosstalk is hard to be viewed. Further, an applied voltage to be supplied to the display pixel of the B (blue) color and an input gradation are set to have a relationship along a γ curve that makes luminance variation difficult to occur in a low luminance area.

(21) Appl. No.: **12/224,854**(22) PCT Filed: **Dec. 18, 2006**(86) PCT No.: **PCT/JP2006/325212**

§ 371 (c)(1),

(2), (4) Date: **Sep. 8, 2008**(30) **Foreign Application Priority Data**

Mar. 27, 2006 (JP) 2006-086207

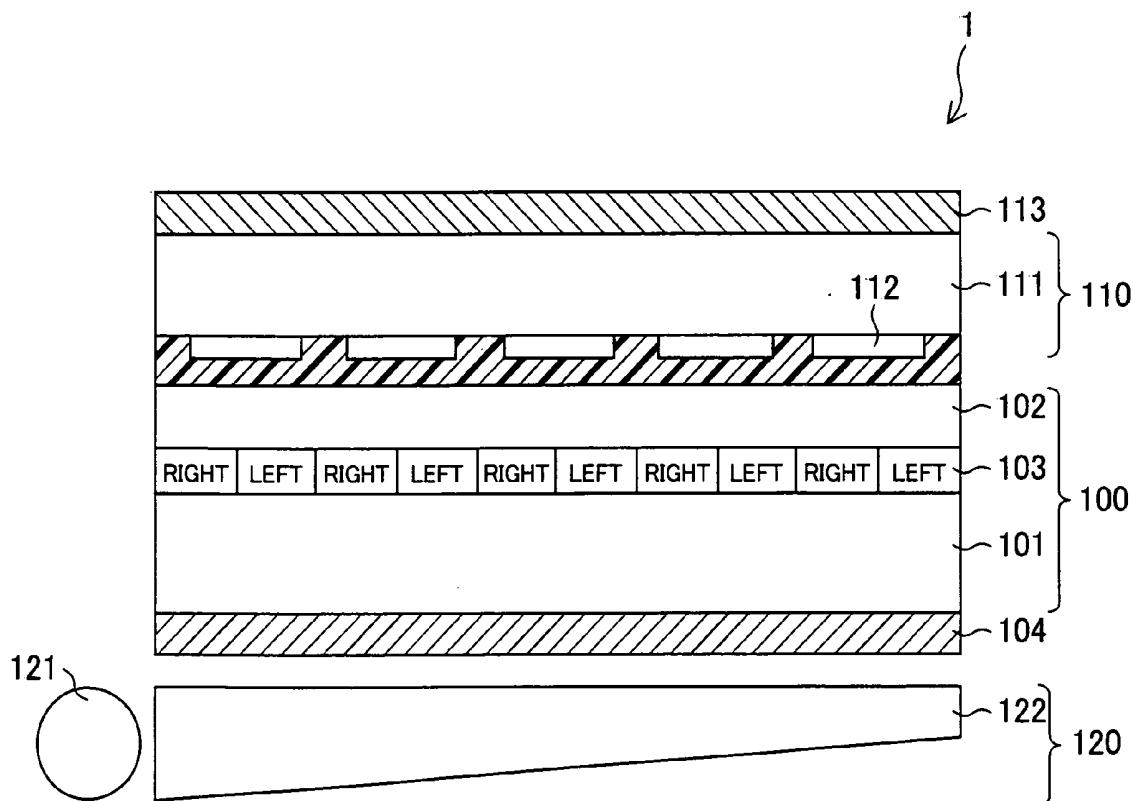


FIG. 1 (a)

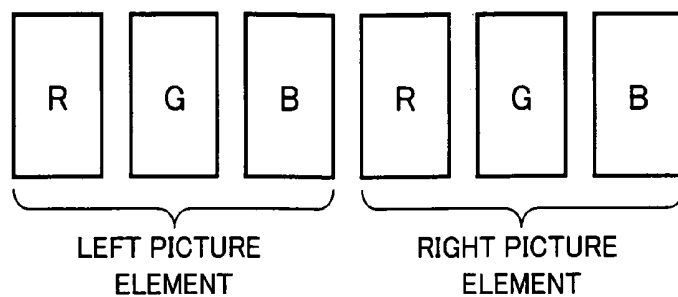


FIG. 1 (b)

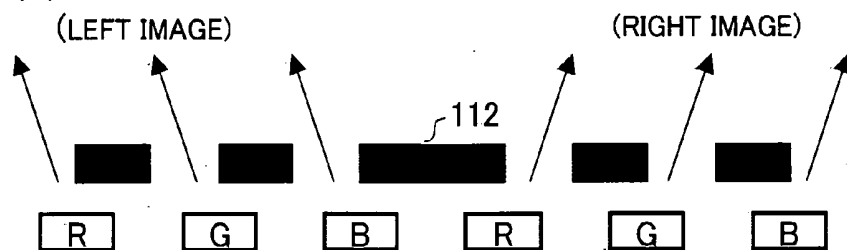


FIG. 2

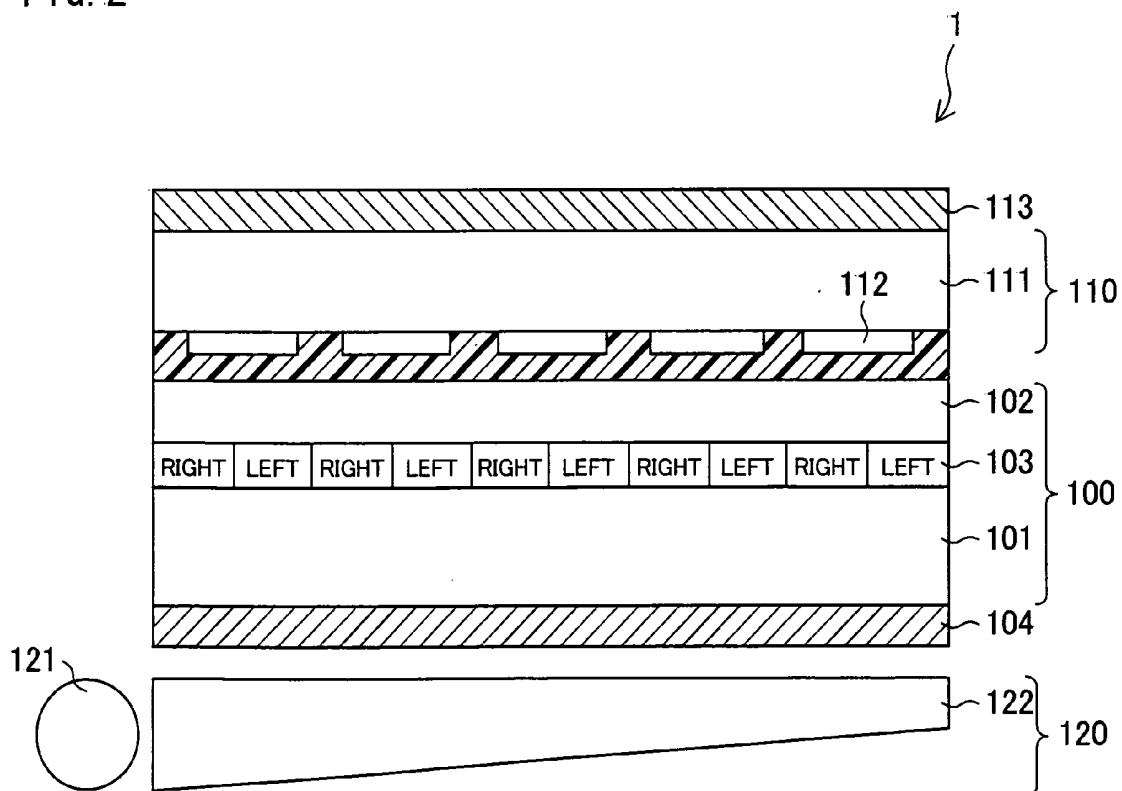


FIG. 3

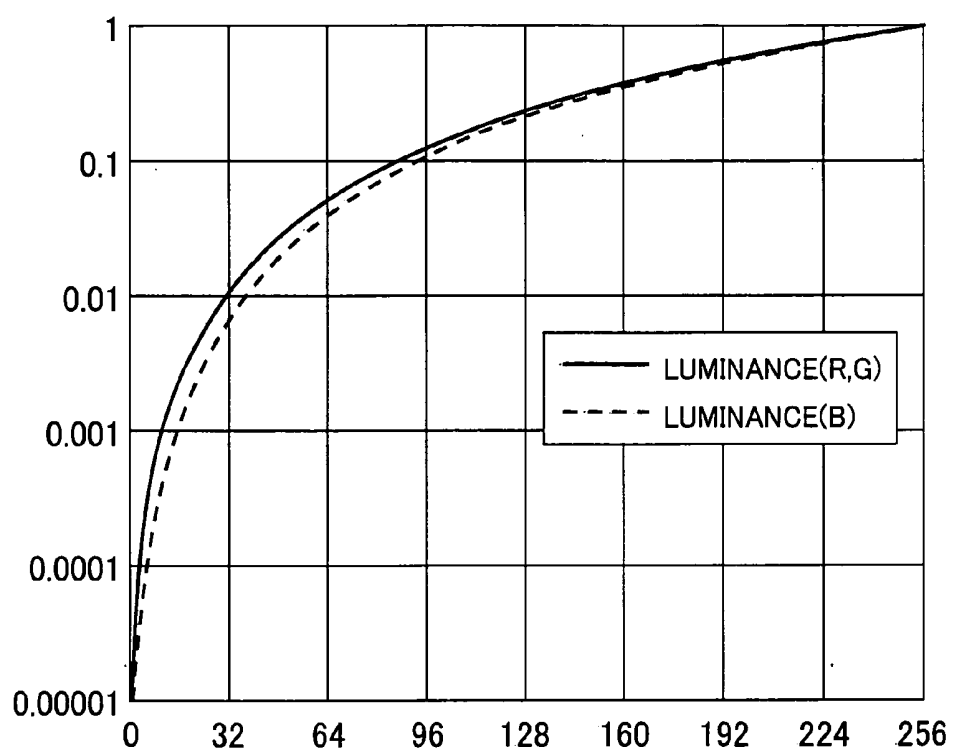


FIG. 4

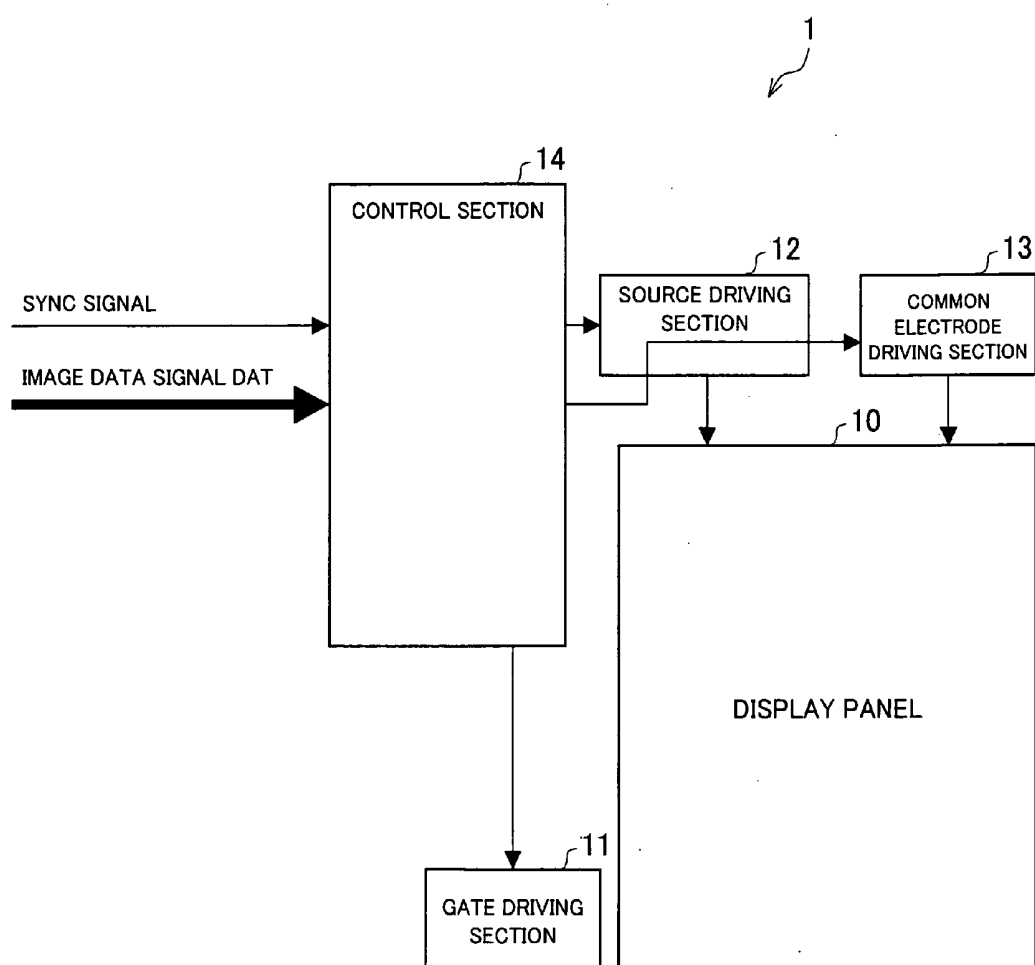


FIG. 5

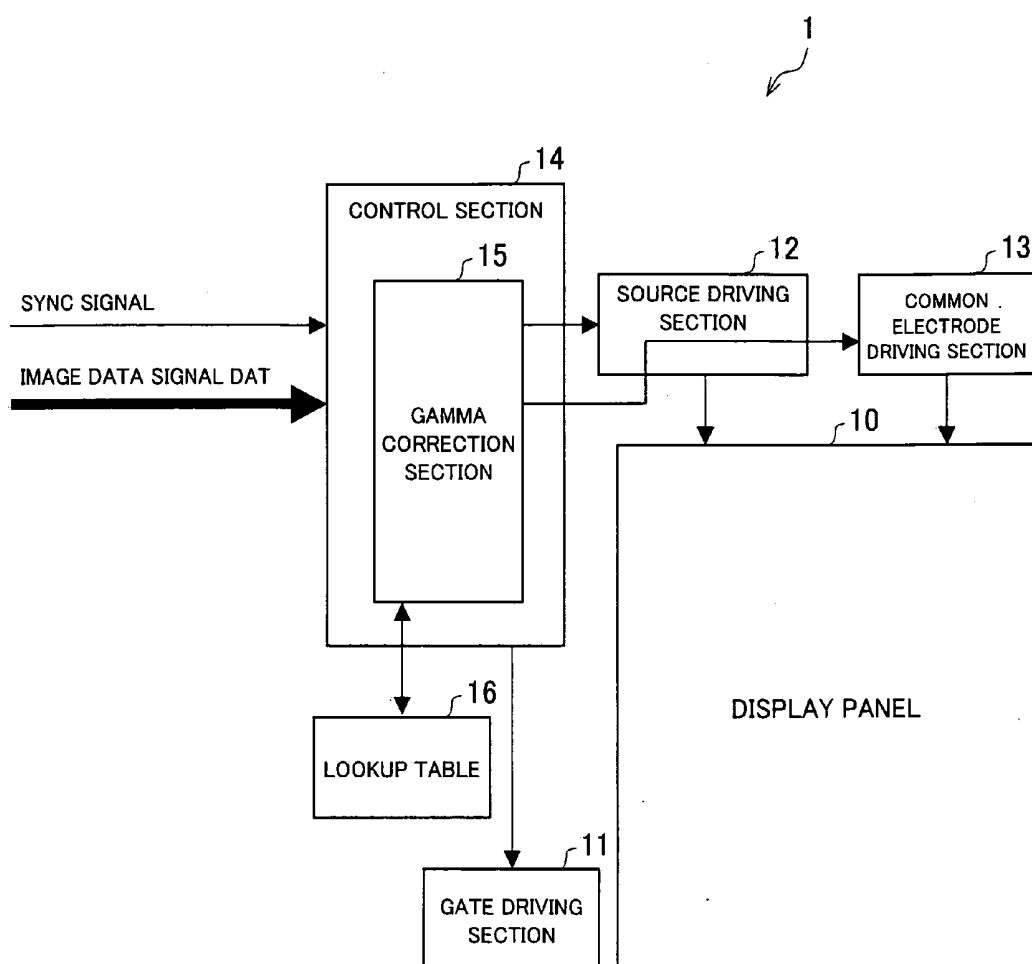


FIG. 6(a)

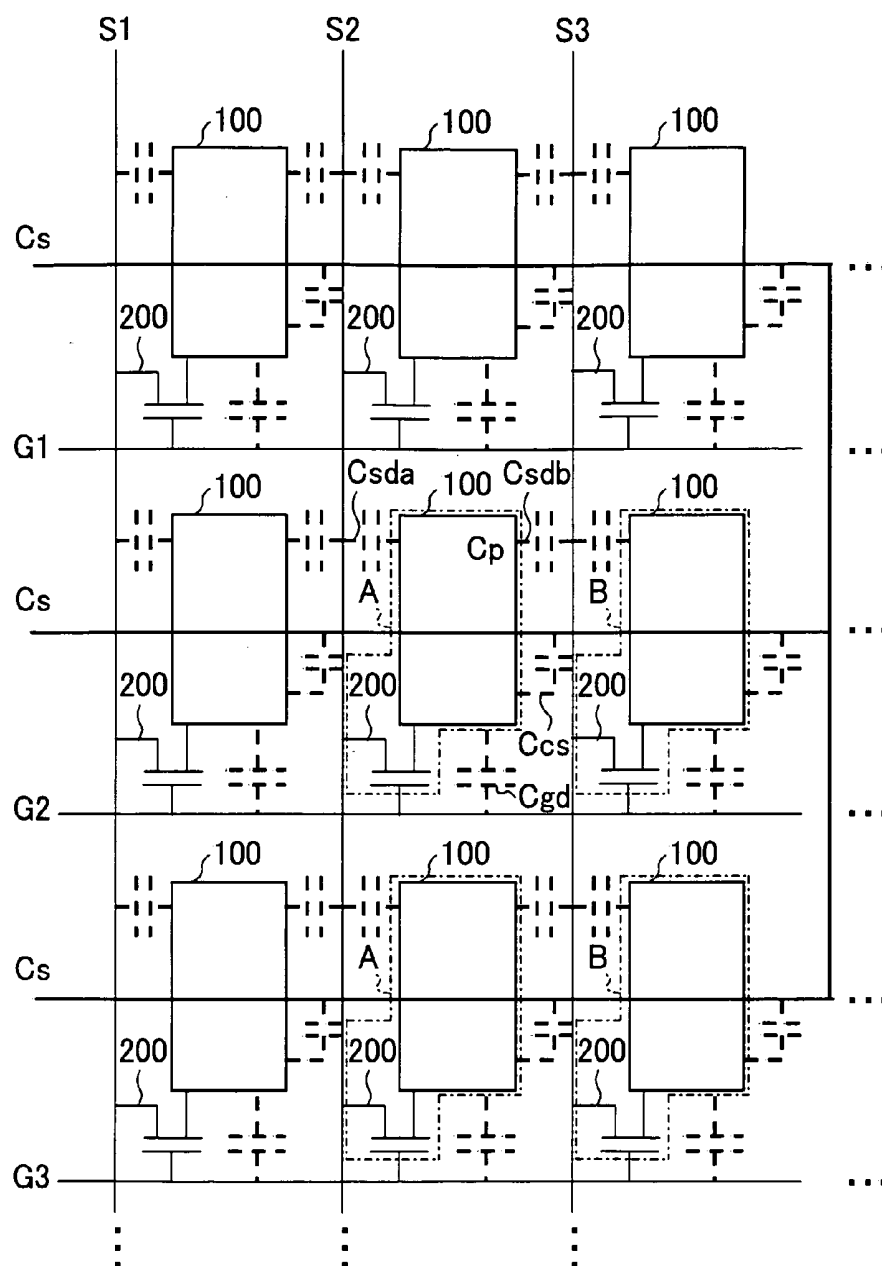


FIG. 6(b)

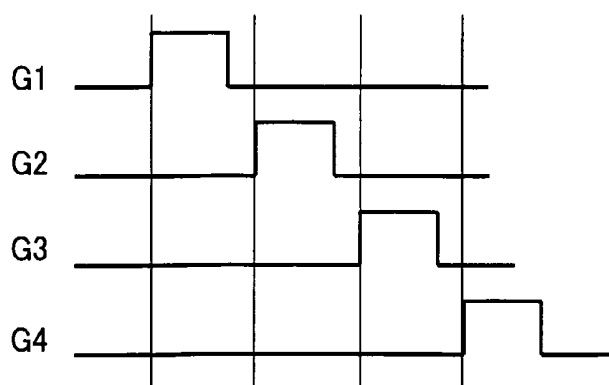


FIG. 7


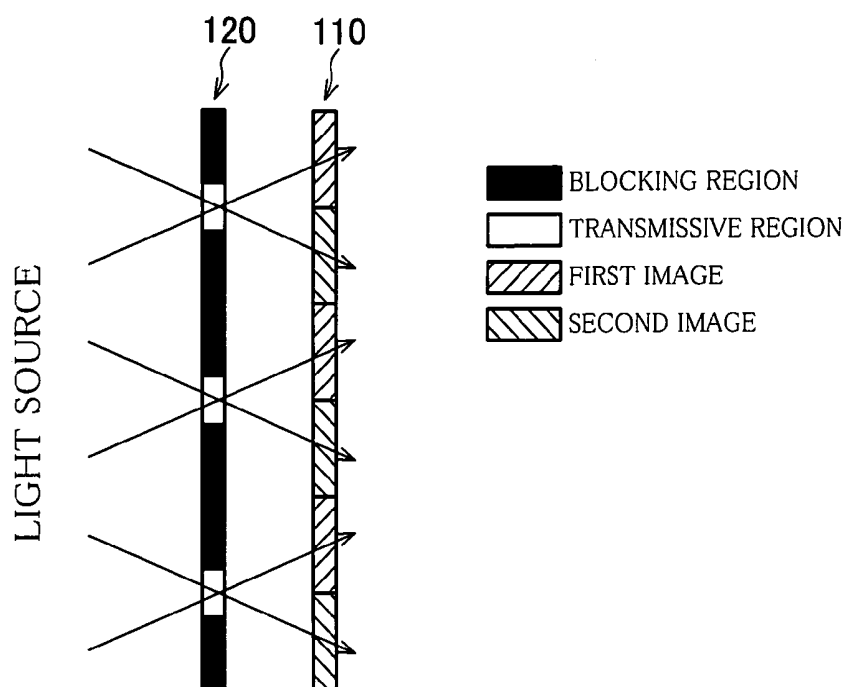


FIG. 8

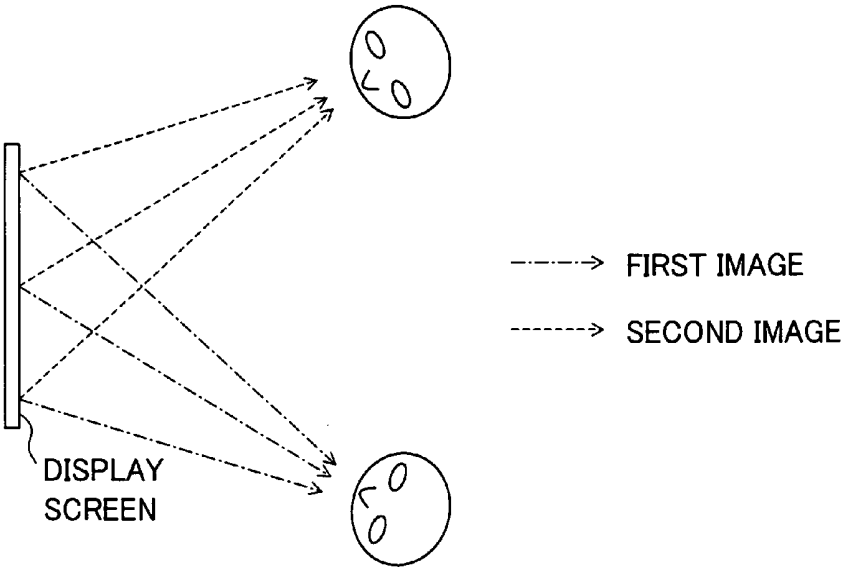

LIQUID CRYSTAL DISPLAY APPARATUS

TECHNICAL FIELD

[0001] The present invention relates to a liquid crystal display apparatus that performs a dual view display, in particular, to a liquid crystal display apparatus that improves color reproducibility by reducing color crosstalk.

BACKGROUND ART

[0002] A problem of crosstalk is pointed out as a specific problem in a TFT-LCD. The crosstalk occurs because adjacent pixels are connected via a parasitic capacitance. In other words, when an insulating film intervenes between a transparent electrode and a source line, a parasitic capacitance is produced between the transparent electrode and the source line. In the same manner, parasitic capacitances are produced between a gate line and the transparent electrode and between the source line and a common electrode, respectively. Due to influence of these parasitic capacitances and a capacitance of a liquid crystal itself, an electric potential of a display pixel becomes different from a desired voltage when a gate is turned OFF. Consequently, a display gradation becomes different from a desired gradation.

[0003] In other words, at the moment a gate is high, a desired voltage is applied to a display pixel that is connected to a TFT. However, when the gate is low, the pixel is connected to many peripheral electric circuits via parasitic capacitances. Because many of these peripheral electric circuits are related to panel design, a driving voltage can be set in advance in consideration of parasitic capacitances between the display pixel and the peripheral electric circuits. Therefore, the crosstalk caused by the parasitic capacitances that are formed between the display pixel and the peripheral electric circuits can be compensated in advance. However, an electric potential of a source line that drives other display pixel cannot be determined in advance. Therefore, it is difficult to compensate, in advance, crosstalk that is caused by other source line.

[0004] As illustrated in FIG. 6(a), in a liquid crystal display apparatus, source lines Si ("i" is an integer) and gate lines Gj (j is an integer) are provided to be orthogonal. At each intersection of source lines Si and gate lines Gj, a display pixel 100 and a switching element 200 are provided. Regarding a display pixel (A) among the display pixels 100, parasitic capacitances Csda, Csdb, Cgd, and Ccs are formed as follows. A display pixel (B) indicates a display pixel that is adjacent to the display pixel (A) in a direction along which a gate line is provided.

[0005] The details of the parasitic capacitances Csda, Csdb, Cgd, and Ccs are as follows:

[0006] the parasitic capacitance Csda: a parasitic capacitance that is formed between a source line S2 for driving display pixels (A) and the display pixel (A);

[0007] the parasitic capacitance Csdb: a parasitic capacitance that is formed between a source line S3 for driving display pixels (B) and the display pixel (A);

[0008] the parasitic capacitance Cgd: a parasitic capacitance that is formed between a gate line G2 for driving display pixels (A) and the display pixel (A); and

[0009] the parasitic capacitance Ccs: a parasitic capacitance that is formed between a common electrode line and the display pixel (A).

[0010] A capacitance of the display pixel (A) itself is Cp and a voltage which is applied to each gate line varies as shown in FIG. 6(b). Furthermore, while the display pixel (A) displays a G color, the display pixel (B) displays an R color or B color. In addition, in a case where a gradation of the display pixel (A) is LA and a gradation of the display pixel (B) is LB, LA≠LB.

[0011] In this case, at the time at which the gate is high, when a drain voltage +V(A) is applied to a liquid crystal part of the display pixel (A), a drain voltage -V(B) is applied to a liquid crystal part of the display pixel (B). Then, when a next gate line is turned ON, -V(A) is applied to the source line that drives the display pixel (A) and +V(B) is applied to a source line that drives the display pixel (B).

[0012] However, in the reality, the above-mentioned drain voltage is not applied directly to the display pixel (A). A drain voltage that is varied due to the influence of the parasitic capacitances is applied to the display pixel (A). Specifically, an effective value Va of a voltage that is applied to the display pixel (A) is represented by

$$V_a = V(A) + (C_{sda} * V(A) + C_{gd} * V_g + C_{sdb} * V(B) + C_{cs} * V_c) / C_p,$$

[0013] where: Vg is a voltage that is applied to the gate line; and Vc is a voltage that is applied to an opposed electrode.

[0014] In this way, a voltage different from a desired drain voltage (A) is applied to the display pixel (A).

[0015] The parasitic capacitances Csda, Cgd, and Ccs that are formed between the display pixel (A) and the respective lines as mentioned above are predictable at a stage of designing. Therefore, a drain voltage can be set in consideration of values of the parasitic capacitances. Accordingly, these parasitic capacitances do not have much influence on a display gradation of the display pixel (A).

[0016] However, the calculation formula of the effective voltage Va above includes the parasitic capacitance Csdb and a drain voltage V(B). In other words, the voltage Va is influenced by the source line that is connected to the display pixel (B). This causes color crosstalk that changes the gradation of the display pixel (A) according to a display gradation of the display pixel (B). For example, Patent Document 1 discloses a method of solving the problem of the color crosstalk by correcting a display signal.

[0017] [Patent Document 1] Japanese Unexamined Patent Publication No. 202377/2005 (*Tokukai* 2005-202377 (published on Jun. 28, 2005))

DISCLOSURE OF INVENTION

[0018] However, in a conventional arrangement, a circuit and a process for correction become complicated.

[0019] Further, in a normal display mode in which the same image is displayed with respect to all display directions, color crosstalk mentioned above does not occur prominently for the following reason. That is, in a normal display state, image data of adjacent source lines are of the same image. In regard to luminances of the image data of the adjacent source lines, the image data that relate to R, G, and B colors are highly correlated to one another. Therefore, even if crosstalk occurs, influence of the crosstalk is hard to appear in a visible image.

[0020] On the other hand, recently, a display mode (hereinafter, referred to as a dual view display) in which different images can be displayed with respect to a plurality of display directions, respectively, is realized. In such a mode, a display panel is combined with a parallax barrier. In this dual view

display, the problem of the crosstalk caused by other source line becomes particularly prominent.

[0021] That is, in the dual view display, as illustrated in FIG. 7, a specific viewing angle is given, by a parallax barrier **120** that is provided outside a display panel **110**, to each of first and second images that are produced by the display panel **110**. This allows, as illustrated in FIG. 8, displaying different images to a plurality of observers at different observation points, respectively.

[0022] In the dual view display, data of a different image is provided to each source line. The display is performed by separating, with the use of the parallax barrier, the different images into different directions, respectively. Accordingly, the image data of the adjacent source lines relate to different images, respectively. As a result, the influence of the crosstalk to a visible image becomes large.

[0023] The present invention is attained in view of the above problem. The object of the present invention is to reduce, by a simple method, color crosstalk in a liquid crystal display that performs a dual view display.

[0024] In order to achieve the object above, in a liquid crystal display apparatus of the present invention allowing a display mode in which a different image can be displayed with respect to each of a plurality of display directions to be realized by bonding a liquid crystal panel and a parallax barrier, the liquid crystal panel being provided with a display pixel including a switching element and a pixel electrode which display pixel corresponds to each intersection of a plurality of gate lines and a plurality of source lines: the parallax barrier separates display images viewed in different directions, respectively, by treating, as one unit, three pixels including R, G, and B pixels provided in a direction in which a gate line is extended; in a case where, among the three pixels constituting the one unit, a pixel that is present at one end in the direction in which the gate line is extended is a first display pixel and a pixel that is adjacent to the first display pixel and belongs to a display image that is separated into a display direction different from that of the first display pixel is a second display pixel, a source line connected to the second display pixel is adjacent to the first display pixel, the first display pixel is a display pixel of a B (blue) color, and an applied voltage to be supplied to the display pixel of the B (blue) color and an input gradation are set to have a relationship along a γ curve that makes luminance variation difficult to occur in a low luminance area, compared with applied voltages supplied to display pixels of R (red) and G (green) colors, respectively.

[0025] According to the arrangement, in a pixel other than the first display pixel, influence of crosstalk from other source line (other than a source line that supplies data to the pixel other than the first display pixel) is hard to appear because the pixel other than the first display pixel and a pixel that is connected to the other source line relate to the same image and are highly correlated to each other. On the other hand, influence of crosstalk that is caused by other source line (other than a source line that supplies data to the first display pixel) easily appears in the first display pixel because the first display pixel and a pixel that is connected to the other source line relates to images different from each other and are not correlated.

[0026] In other words, influence of the crosstalk is concentrated in the first display pixel, by treating three pixels including R, G, and B pixels as one unit in separation of display images with the use of a parallax barrier at the time when a

dual view display is performed. By arranging the first display pixel to be a B pixel that has a low correlation with luminance information, a change in a luminance due to the crosstalk can be suppressed. Accordingly, influence of the crosstalk to a display screen can be reduced.

[0027] Further, the applied voltage to be supplied to the display pixel of the B (blue) color and the input gradation are set to have a relationship along a γ curve that makes luminance variation difficult to occur in a low luminance area (dark area), compared with applied voltages supplied to display pixels of R (red) and G (green) colors, respectively (γ of B is set large in the dark area).

[0028] This is for two reasons. A ratio of luminance variation due to crosstalk becomes larger in a darker area. However, in an area that is darker than a certain level, even if the luminance changes at a large ratio, the luminance variation becomes insensible. In a bright area, because the ratio of the luminance variation is small, it is clearly not necessary to care about color crosstalk. That is, influence of the color crosstalk is the largest in a half-tone area that is relatively dark. The relatively dark area can be avoided by setting γ so that γ on a low gradation side is relatively large. γ may be separately set such that, for example, γ of a gradation not more than a certain level is 2.5 and γ of a gradation not less than the certain level is 2.2. In particular, it is preferable to set γ so that γ of a gradation not less than 128th gradation is 2.2 and γ of a gradation not more than 128th gradation varies sequentially from 2.2 towards 2.5 that is γ at 0th gradation. This is for the purpose of realizing a gradation display characteristic that is relatively sequential and smooth even in a case where the crosstalk tends to influence the gradation display. The γ of 2.5 that is set here is one example. The γ may be set as appropriate according to an application, as long as a video image does not deviate largely from the image in a case where γ is set to 2.2 as in a general case.

BRIEF DESCRIPTION OF DRAWINGS

[0029] FIG. 1(a) is a plan view showing an embodiment of the present invention and a positional relationship of a picture element and R, G, and B pixels in a color liquid crystal display apparatus.

[0030] FIG. 1(b) is a diagram showing the embodiment of the present invention and illustrating an example of a structure in a case where separation is carried out by providing a barrier light-blocking layer and treating three pixels including R, G, and B pixels as one unit.

[0031] FIG. 2 is a cross sectional view schematically illustrating an arrangement of the color liquid crystal display apparatus.

[0032] FIG. 3 is a graph illustrating an example of a setting of a γ curve.

[0033] FIG. 4 is a block diagram schematically illustrating a structure of the color liquid crystal display apparatus.

[0034] FIG. 5 is a block diagram schematically illustrating an example of an arrangement of the color liquid crystal display apparatus which example is different from the arrangement of FIG. 4.

[0035] FIG. 6(a) is a diagram illustrating an arrangement of a display panel in a conventional liquid crystal display apparatus.

[0036] FIG. 6(b) is a diagram illustrating a state in which a voltage is applied to a gate line.

[0037] FIG. 7 is a diagram illustrating an effect of giving a viewing angle with the use of a viewing barrier in a dual view display.

[0038] FIG. 8 is a diagram illustrating a relationship between a display screen and observers in a case where a dual view display is performed.

BEST MODE FOR CARRYING OUT THE INVENTION

[0039] One embodiment of the present invention is explained with reference to drawings.

[0040] First, FIG. 2 schematically illustrates an arrangement of a liquid crystal display apparatus 1 of the present embodiment. The liquid crystal display apparatus 1 is a color liquid crystal display apparatus that is capable of performing a dual view display. As illustrated in FIG. 2, roughly, the liquid crystal display apparatus 1 includes a display panel 100, a parallax barrier 110, and a backlight 120.

[0041] The backlight 120 includes a light source 121 and a reflecting section 122. The reflecting section 122 reflects light that is emitted from the light source 121, so that light is irradiated on the display panel 100. Examples of the light source 121 are an LED (Light Emitting Diode), a CCFT (Cold Cathode Fluorescent Tube), and a CCFL (Cold Cathode Fluorescent Lamp).

[0042] The display panel 100 is an active matrix type liquid crystal display panel in which a liquid crystal layer 103 made of a nematic liquid crystal is sandwiched between a TFT (Thin Film Transistor) substrate 101 and a CF (Color Filter) substrate 102 that are provided so as to face each other.

[0043] The TFT substrate 101 is provided with a plurality of source lines and a plurality of gate lines each intersecting each of the source lines. At each intersection of a source line and a gate line, a pixel is provided. As illustrated in FIG. 2, the pixels are provided along a direction in which a data signal line (not shown) is extended so that pixels of a left picture element line for an image display to a left side (an image display to a left side of the display apparatus) is provided alternatively with pixels of a right picture element line for an image display to a right side (an image display to a right side of the display apparatus). As illustrated in FIG. 1(a), each of the left picture element and the right picture element are formed so as to have R, G, and B pixels as one set.

[0044] On the CF substrate 102, a color filter layer (not shown) is provided. In the color filter layer, R, G, and B filters are provided so as to correspond to respective pixels.

[0045] On opposed surfaces of the TFT substrate 101 and the CF substrate 102 are provided with alignment films (not shown), respectively. The alignment films have been subjected to alignment treatments in directions that are substantially perpendicular to each other, respectively. A surface of the TFT substrate 101 on a side provided with the backlight 120 is provided with a polarizer 104.

[0046] The parallax barrier 110 is made of a barrier glass 111 and a barrier light-blocking layer 112. The barrier light-blocking layer 112 is formed by patterning a metal layer or a resin layer on the barrier glass 111. On a display surface side of the barrier glass 111 (an opposite side with respect to a side provided with the backlight 120), a polarizer 23 is provided.

[0047] The barrier light-blocking layer 112 is provided so as to form, for example, striped lines in a direction parallel to a direction in which the picture element lines are extended. A material of the barrier light-blocking layer 112 is not specifically limited. The barrier light-blocking layer 112 may be

formed, for example, by using a photosensitive resin in which black pigments are dispersed or by patterning a metal thin film.

[0048] Further, each line of the barrier light-blocking layer 112 is provided so as to correspond to each picture element line of the display panel 100. Namely, the barrier light-blocking layer 112 separates a right image and a left image by treating three pixels including R, G, and B pixels as one unit. FIG. 1(b) illustrates an example of a structure in a case where separation is performed by providing the barrier light-blocking layer 112 and treating three pixels including R, G, and B pixels as one unit.

[0049] In this way, as illustrated in FIGS. 1(a) and 1(b), the separation of a right image and a left image with the use of the barrier light-blocking layer 112 is performed by treating the three pixels (corresponding to R, G, and B pixels) as one unit. In such a case, in a structure in which data is supplied to each pixel from a source line on the left side of the pixel, crosstalk that is caused by other source line largely influences only a pixel at the right end among the three pixels constituting one unit.

[0050] In other words, in the above-mentioned structure, a left-end pixel (R pixel in FIGS. 1(a) and 1(b)) among the three pixels constituting one unit is influenced by crosstalk from a source line that supplies data to a pixel (a center pixel among the three pixels constituting one unit: G pixel in FIGS. 1(a) and 1(b)) immediately on the right of the left-end pixel. However, the left-end pixel and the center pixel relate to an identical image. Therefore, the left-end pixel and the center pixel are highly correlated to each other. Accordingly, even when crosstalk occurs, influence of the crosstalk is hard to appear in a visible image. In the same manner, although the center pixel is influenced by crosstalk from a source line that supplies data to a right-end pixel (B pixel in FIGS. 1(a) and 1(b)) immediately on the right of the center pixel, the crosstalk is hard to appear in a visible image.

[0051] On the other hand, the right-end pixel is influenced by crosstalk from a source line that supplies data to another left-end pixel immediately on the right of the right-end pixel. Here, the right-end pixel and the another left-end pixel relates to different images, respectively. Therefore, display data of the right-end pixel and the another left-end pixel are not correlated to each other. Therefore, the right-end pixel is influenced by crosstalk more than the left-end pixel and the center pixel.

[0052] The above explanation assumes a structure in which data is supplied to each pixel from a source line that is provided on the left of the pixel. Accordingly, the right-end pixel is largely influenced by crosstalk. However, in the present invention, it is assumed that, among three pixels constituting one unit, (i) a first display pixel is a pixel provided to one end in a direction in which the gate line is extended and (ii) a second display pixel is a pixel that is adjacent to the first display pixel and belongs to a display image separated into a display direction different from that of a display image to which the first display pixel belongs. On this assumption, the first display pixel is a pixel that is largely influenced by crosstalk. In such a case, an end pixel on a side adjacent to a source line that connects to the second display pixel is the first display pixel.

[0053] Here, the present invention has a feature such that the first display pixel is arranged to be a B pixel, as illustrated in FIGS. 1(a) and 1(b), so that influence of crosstalk to the first display pixel is reduced.

[0054] That is, the larger a change in luminance due to crosstalk that is caused by other source line is, the more easily the crosstalk is viewed. On the other hand, in regard to correlation of each of R, G, and B colors and a luminance, R and G colors have a high correlation with luminance information while B color has a low correlation with luminance information. Accordingly, by arranging the first display pixel to which the influence of crosstalk is large to be a B color pixel whose correlation with luminance information is low, a change in the luminance due to crosstalk can be suppressed and influence of the crosstalk to a display screen can be reduced.

[0055] In other words, in the liquid crystal display apparatus 1 of the present embodiment, separation of display images with the use of a parallax barrier is performed by treating the three pixels including R, G, and B pixels as one unit, when a dual view display is performed. This concentrates the influence of the crosstalk in the first display pixel. Further, by arranging the first display pixel to be a B pixel that has a low correlation with luminance information, a change in the luminance can be suppressed, thereby reducing the influence to the display screen.

[0056] Further, in the liquid crystal display apparatus 1, γ correction capable of further suppressing influence of crosstalk is carried out in the first display pixel in which the influence of the crosstalk is large.

[0057] Specifically, when the γ correction is carried out with respect to data of a B color, a γ curve of the data is set deep so that influence of crosstalk in a dark area becomes hard to see. This is because a color shift due to a change in luminance is more easily seen in a dark area than in a bright area. By setting a γ value of B in a dark area to be small, a change in luminance in the display region of B becomes hard to be produced even when a potential changes due to an adjacent source line (R).

[0058] FIG. 3 as follows illustrates an example of a setting of the γ curve. A curve illustrated by a solid line in FIG. 3 shows a general γ curve that is generally used. However, in the liquid crystal display apparatus 1 of the present embodiment, the curve illustrated by the solid line in FIG. 3 is used for γ correction with respect to data of R and G colors. Moreover, a curve illustrated by a dotted line in FIG. 3 shows a curve that is used for the γ correction with respect to data of a B color.

[0059] The following explains an example of a circuit configuration that carries out γ correction with respect to an input gradation signal and generates a write signal for a liquid crystal panel in the liquid crystal display apparatus 1 of the present embodiment.

[0060] As illustrated in FIG. 4, the liquid crystal display apparatus 1 includes a display panel 10, a gate driving section 11, a source driving section 12, a common electrode driving section 13, and a control section 14.

[0061] The display panel 10 (detailed illustration thereof is omitted here) includes m gate lines that are parallel to each other, n source lines that are parallel to each other, and pixels arranged in a matrix. Each pixel is formed in a region that is surrounded by two of the gate lines adjacent to each other and two of the source lines adjacent to each other.

[0062] The gate driving section 11 sequentially generates scanning signals that are to be provided to the gate lines to which pixels in each line are connected, according to gate clock signals and gate start pulses that are outputted from the control section 14.

[0063] The source driving section 12 samples image data signals DAT in accordance with the source clock signals and

the source start pulses that are outputted from the control section 14, and outputs image data obtained to the source lines to which pixels in each line are connected.

[0064] The control section 14 is a circuit that generates and outputs, in accordance with a sync signal and an image data signal DAT that are inputted, various kinds of control signals that control operations of the gate driving section 11 and the source driving section 12. As mentioned above, clock signals, start pulses, the image data signals DAT, and the like are prepared as control signals that are outputted from the control section 14.

[0065] Each pixel of the display panel 10 includes a switching element such as a TFT, and a liquid crystal capacitor. In such a pixel, a gate of the TFT is connected to a gate line. Moreover, a source line is connected to one electrode of the liquid crystal capacitor via a drain and a source of the TFT. Further, the other end of the liquid crystal capacitor is connected to a common electrode line that is common to all the pixels. The common electrode driving section 13 is arranged to supply a voltage to be applied to the common electrode line.

[0066] In the liquid crystal display apparatus 1, the gate driving section 11 selects a gate line. Then, the source driving section 12 outputs, to each source line, an image data signal DAT for a pixel corresponding to a combination of the gate line and a source line that are being selected. This allows each image data to be written into the pixel that is connected to the gate line. Further, the gate driving section 11 sequentially selects the gate lines and the source driving section 12 outputs image data to the source lines. As a result, the respective image data is written into all of the pixels of the display panel 10, and an image corresponding to the image data signals DAT is displayed on the display panel 10.

[0067] Here, the image data sent from the control section 14 to the source driving section 12 is transmitted as image data signals DAT in a time-sharing manner. The source driving section 12 extracts each image data from the image data signals DAT according to timing on the basis of a source clock signal, an inversion source clock signal, and a source start pulse that become timing signals, and transmits the extracted image data to each pixel.

[0068] Next, the γ correction in the liquid crystal display apparatus 1 is explained.

[0069] For example, in the liquid crystal display apparatus that performs multi-gradation display including 256 gradations, 256 kinds of applied voltage values are required. However, in practice, it is not possible to include power source voltages that correspond to all of these gradation voltages, respectively. Therefore, in general, several kinds of reference voltages are prepared as the power source voltages. By dividing these reference voltages by resistance dividing means into partial voltages, applied voltages (gradation quasi-voltages) that correspond to all the gradations, respectively, are generated.

[0070] The resistance dividing means are composed of many resistors connected in series. An applied voltage that is obtained at each of connecting points of respective resistors is extracted according to switching control in accordance with the image data signal DAT. That is, the image data signal DAT is, for example, an 8-bit digital signal (in case where the number of gradations is 256). A desired applied voltage can be extracted from the 256 kinds of applied voltages, by carrying out 8-stage switching control with the use of each bit signal. Note that such resistance dividing means is a publicly

known arrangement that is conventionally used in a liquid crystal display of a voltage modulation system. The source driving section **12** includes a gradation voltage generating circuit (not shown) that employs the resistance dividing means as mentioned above.

[0071] Here, a relationship between the gradation and the applied voltage in the liquid crystal apparatus is not proportional, but has a specific γ curve. Accordingly, a resistance value of each resistor is set so that the resistance dividing means of the gradation voltage generating circuit obtains a gradation voltage along the γ curve. In this way, the resistance value of each resistor is not set so that the reference voltages are proportionally distributed.

[0072] In the liquid crystal display apparatus **1**, the gradation voltage generation circuit that supplies a gradation voltage to a source line that is connected to a B-color pixel should be set so that it becomes possible to obtain a gradation voltage along γ curve with respect to the B-color data in FIG. **3**.

[0073] A method of the γ correction in the liquid crystal display apparatus **1** is not limited to this. The γ correction may be carried out by carrying out data conversion with respect to image data of a B-color. The γ correction in such a case is explained with reference to FIG. **5**.

[0074] In this case, as illustrated in FIG. **5**, the liquid crystal display apparatus **1** further includes a γ correction section **15** and a lookup table **16**. In other words, the γ correction section **15** carries out data conversion with reference to the lookup

are directly sent to the source driving section **12**. However, image data of a B color is subjected to data conversion with the use of the γ correction section **15** and the lookup table **16**, and then sent to the source driving section **12**.

[0076] The lookup table **16** stores an input gradation level and an output gradation level so that the input gradation level and the output gradation level correspond to each other. When an input gradation level of the image data signal DAT is inputted from the γ correction section **15**, an output gradation level corresponding to this input gradation level is read out. The γ correction section **15** outputs the output gradation level that is read out from the lookup table **16** to the source driving section **12**.

[0077] For example, in the liquid crystal display apparatus **1**, an ideal applied voltage along the γ curve with respect to the data of a B color in FIG. **3** is in a range of V' **0** to V' **255** (in the case of 256-gradation display). The following Table 1 is shows a relationship between (i) each of the applied voltages V' **0** to V' **255** and (ii) an applied voltage among the applied voltages V**0** to V**255** that are generated by the resistance dividing means for carrying out the 256 gradation display which applied voltage is the closest to the each of the applied voltages V' **0** to V' **255**. Note that the Table 1 below shows an example in which a gradation equal to or less than 128th gradation is set to γ 2.5. Moreover, in the Table 1, the output gradation indicates a voltage that corresponds to the output gradation.

TABLE 1

IG	OG(B)	IG	OG(B)	IG	OG(B)	IG	OG(B)	IG	OG(B)	IG	OG(B)	IG	OG(B)	IG	OG(B)
0	0	32	25	64	58	96	92	128	128	160	160	192	192	224	224
1	0	33	26	65	59	97	93	129	129	161	161	193	193	225	225
2	1	34	27	66	60	98	95	130	130	162	162	194	194	226	226
3	1	35	28	67	61	99	96	131	131	163	163	195	195	227	227
4	2	36	29	68	62	100	97	132	132	164	164	196	196	228	228
5	2	37	30	69	63	101	98	133	133	165	165	197	197	229	229
6	3	38	31	70	64	102	99	134	134	166	166	198	198	230	230
7	4	39	32	71	65	103	100	135	135	167	167	199	199	231	231
8	5	40	33	72	66	104	101	136	136	168	168	200	200	232	232
9	5	41	34	73	67	105	102	137	137	169	169	201	201	233	233
10	6	42	35	74	68	106	103	138	138	170	170	202	202	234	234
11	7	43	36	75	69	107	104	139	139	171	171	203	203	235	235
12	8	44	37	76	71	108	106	140	140	172	172	204	204	236	236
13	9	45	38	77	72	109	107	141	141	173	173	205	205	237	237
14	9	46	39	78	73	110	108	142	142	174	174	206	206	238	238
15	10	47	40	79	74	111	109	143	143	175	175	207	207	239	239
16	11	48	41	80	75	112	110	144	144	176	176	208	208	240	240
17	12	49	42	81	76	113	111	145	145	177	177	209	209	241	241
18	13	50	43	82	77	114	112	146	146	178	178	210	210	242	242
19	14	51	44	83	78	115	113	147	147	179	179	211	211	243	243
20	14	52	45	84	79	116	114	148	148	180	180	212	212	244	244
21	15	53	46	85	80	117	115	149	149	181	181	213	213	245	245
22	16	54	47	86	81	118	117	150	150	182	182	214	214	246	246
23	17	55	48	87	83	119	118	151	151	183	183	215	215	247	247
24	18	56	49	88	84	120	119	152	152	184	184	216	216	248	248
25	19	57	50	89	85	121	120	153	153	185	185	217	217	249	249
26	20	58	51	90	86	122	121	154	154	186	186	218	218	250	250
27	21	59	52	91	87	123	122	155	155	187	187	219	219	251	251
28	22	60	54	92	88	124	123	156	156	188	188	220	220	252	252
29	23	61	55	93	89	125	124	157	157	189	189	221	221	253	253
30	23	62	56	94	90	126	125	158	158	190	190	222	222	254	254
31	24	63	57	95	91	127	126	159	159	191	191	223	223	255	255

(IG: INPUT GRADATION, OG(B): OUTPUT GRADATION (B))

table **16** so that image data of a B-color pixel stays along the γ curve with respect to the B-color data in FIG. **3**.

[0075] Specifically, among data signals DAT that are inputted into the control section **14**, image data of R and G colors

[0078] In other words, in case where γ correction of the image data of a B color is to be performed along the γ curve with respect to the data of a B color in FIG. **3**, for example, an applied voltage V**1** that is generated by the resistance dividing

means becomes the closest to an ideal applied voltage V^*3 with respect to display of the input gradation level 3. Accordingly, the lookup table 16 should be set to have an output gradation level of 1 in a case where the input gradation level of the image data of a B color is 3.

[0079] As mentioned above, in a liquid crystal display apparatus of the present invention allowing a display mode in which a different image can be displayed with respect to each of a plurality of display directions to be realized by bonding a liquid crystal panel and a parallax barrier, the liquid crystal panel being provided with a display pixel including a switching element and a pixel electrode which display pixel corresponds to each intersection of a plurality of gate lines and a plurality of source lines: the parallax barrier separates display images viewed in different directions, respectively, by treating, as one unit, three pixels including R, G, and B pixels provided in a direction in which a gate line is extended; in a case where, among the three pixels constituting the one unit, a pixel that is present at one end in the direction in which the gate line is extended is a first display pixel and a pixel that is adjacent to the first display pixel and belongs to a display image that is separated into a display direction different from that of the first display pixel is a second display pixel, a source line connected to the second display pixel is adjacent to the first display pixel, the first display pixel is a display pixel of a B (blue) color, and an applied voltage to be supplied to the display pixel of the B (blue) color and an input gradation are set to have a relationship along a γ curve that makes luminance variation difficult to occur in a low luminance area, compared with applied voltages supplied to display pixels of R (red) and G (green) colors, respectively.

[0080] According to the arrangement, in a pixel other than the first display pixel, influence of crosstalk from other source line (other than a source line that supplies data to the pixel other than the first display pixel) is hard to appear because the pixel other than the first display pixel and a pixel that is connected to the other source line relate to the same image and are highly correlated to each other. On the other hand, influence of crosstalk that is caused by other source line (other than a source line that supplies data to the first display pixel) easily appears in the first display pixel because the first display pixel and a pixel that is connected to the other source line relates to images different from each other and are not correlated.

[0081] In other words, influence of the crosstalk is concentrated in the first display pixel, by treating three pixels including R, G, and B pixels as one unit in separation of display images with the use of a parallax barrier at the time when a dual view display is performed. By arranging the first display pixel to be a B pixel that has a low correlation with luminance information, a change in a luminance due to the crosstalk can be suppressed. Accordingly, influence of the crosstalk to a display screen can be reduced.

[0082] Further, the applied voltage to be supplied to the display pixel of the B (blue) color and the input gradation are set to have a relationship along a γ curve that makes luminance variation difficult to occur in a low luminance area (dark area), compared with applied voltages supplied to display pixels of R (red) and G (green) colors, respectively (γ of B is set large in the dark area).

[0083] This is for two reasons. A ratio of luminance variation due to crosstalk becomes larger in a darker area. However, in an area that is darker than a certain level, even if the luminance changes at a large ratio, the luminance variation

becomes insensible. In a bright area, because the ratio of the luminance variation is small, it is clearly not necessary to care about color crosstalk. That is, influence of the color crosstalk is the largest in a half-tone area that is relatively dark. Luminance variation in the relatively dark area can be avoided by setting γ so that γ on a low gradation side is relatively large. γ may be separately set such that, for example, γ of a gradation not more than a certain level is 2.5 and γ of a gradation not less than the certain level is 2.2. In particular, it is preferable to set γ so that γ of a gradation not less than 128^{th} gradation is 2.2 and γ of a gradation not more than 128^{th} gradation varies sequentially from 2.2 towards 2.5 that is γ at 0^{th} gradation. This is for the purpose of realizing a gradation display characteristic that is relatively sequential and smooth even in a case where the crosstalk tends to influence the gradation display. The γ of 2.5 that is set here is one example. The γ may be set as appropriate according to an application, as long as a video image does not deviate largely from the image in a case where γ is set to 2.2 as in a general case.

[0084] Moreover, the liquid crystal display apparatus may include: a reference voltage generating circuit that generates an applied voltage to be supplied to the display pixel of the B (blue) color, the reference voltage generating circuit performing an input gradation signal/applied voltage conversion along the γ curve that makes the luminance variation difficult to occur in the low luminance area.

[0085] According to the arrangement, an input gradation signal-application voltage relationship can be arranged along an optimum γ curve.

[0086] Further, the liquid crystal display apparatus may include: a data converting section converting input gradation data of the B (blue) color so as to generate an output gradation signal to be outputted to a data driving section, the data converting section carrying out data conversion so that an output gradation signal-applied voltage relationship is along the γ curve that makes the luminance variation difficult to occur in the low luminance area.

[0087] According to the arrangement, it is not necessary to separately have a reference voltage generating circuit for a B (blue) color and a reference voltage generation circuit for R (red) and G (green) colors. Therefore, the gradation signal-applied voltage relationship can be arranged along an appropriate γ curve in a simple arrangement.

1. A liquid crystal display apparatus allowing a display mode in which a different image can be displayed with respect to each of a plurality of display directions to be realized by bonding a liquid crystal panel and a parallax barrier, the liquid crystal panel being provided with a display pixel including a switching element and a pixel electrode which display pixel corresponds to each intersection of a plurality of gate lines and a plurality of source lines, wherein:

the parallax barrier separates display images viewed in different directions, respectively, by treating, as one unit, three pixels including R, G, and B pixels provided in a direction in which a gate line is extended;

in a case where, among the three pixels constituting the one unit, a pixel that is present at one end in the direction in which the gate line is extended is a first display pixel and a pixel that is adjacent to the first display pixel and belongs to a display image that is separated into a display direction different from that of the first display pixel is a second display pixel,

a source line connected to the second display pixel is adjacent to the first display pixel,
the first display pixel is a display pixel of a B (blue) color, and

an applied voltage to be supplied to the display pixel of the B (blue) color and an input gradation are set to have a relationship along a γ curve that makes luminance variation difficult to occur in a low luminance area, compared with applied voltages supplied to display pixels of R (red) and G (green) colors, respectively.

2. The liquid crystal display apparatus as set forth in claim 1, comprising:

a reference voltage generating circuit that generates an applied voltage to be supplied to the display pixel of the

B (blue) color, the reference voltage generating circuit performing an input gradation signal/applied voltage conversion along the γ curve that makes the luminance variation difficult to occur in the low luminance area.

3. The liquid crystal display apparatus as set forth in claim 1, comprising:

a data converting section converting input gradation data of the B (blue) color so as to generate an output gradation signal to be outputted to a data driving section,

the data converting section carrying out data conversion so that an output gradation signal-applied voltage relationship is along the γ curve that makes the luminance variation difficult to occur in the low luminance area.

* * * * *

专利名称(译)	液晶显示装置		
公开(公告)号	US20090046215A1	公开(公告)日	2009-02-19
申请号	US12/224854	申请日	2006-12-18
[标]申请(专利权)人(译)	潮见MAKOTO		
申请(专利权)人(译)	潮见MAKOTO		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	SHIOMI MAKOTO		
发明人	SHIOMI, MAKOTO		
IPC分类号	G02F1/1335 H04N13/00		
CPC分类号	G02F1/1335 G09G2320/068 G09G3/3648		
优先权	2006086207 2006-03-27 JP		
其他公开文献	US7948566		
外部链接	Espacenet USPTO		

摘要(译)

在通过粘合液晶面板和视差屏障实现双视图显示的液晶显示装置中，视差屏障通过将包括R，G和B像素的三个像素视为一个单元（一个图像元素）来分离显示图像。此时，由串扰引起的亮度变化集中在构成一个像素的三个像素中的右端像素上（在每个像素从紧邻像素左侧的源极线接收数据的情况下）。因此，右端像素被布置为与亮度信息具有低相关性并且难以观察到串扰的影响的B像素。此外，将要提供给B（蓝色）显示像素的施加电压和输入灰度设置为具有沿 γ 曲线的关系，这使得在低亮度区域中难以发生亮度变化。

