



US 20070279545A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2007/0279545 A1**
(43) **Pub. Date: Dec. 6, 2007**(54) **INVERTER FOR LIQUID CRYSTAL DISPLAY
DEVICE AND LIQUID CRYSTAL DISPLAY
MODULE USING THE SAME**(30) **Foreign Application Priority Data**

Jun. 1, 2006 (KR) 10-2006-0049228

(75) **Inventor: Hoon Jang, Seoul (KR)****Publication Classification**

Correspondence Address:

**MORGAN LEWIS & BOCKIUS LLP
1111 PENNSYLVANIA AVENUE NW
WASHINGTON, DC 20004**(51) **Int. Cl.****G02F 1/1333** (2006.01)(52) **U.S. Cl. 349/56**(57) **ABSTRACT**(73) **Assignee: LG.Philips LCD Co., Ltd.**

An inverter for a liquid crystal display device and a liquid crystal display module using the inverter are provided. The inverter includes a circuit board defining a hole through itself, and a transformer inversely inserted into the hole of the circuit. The transformer generates a high voltage.

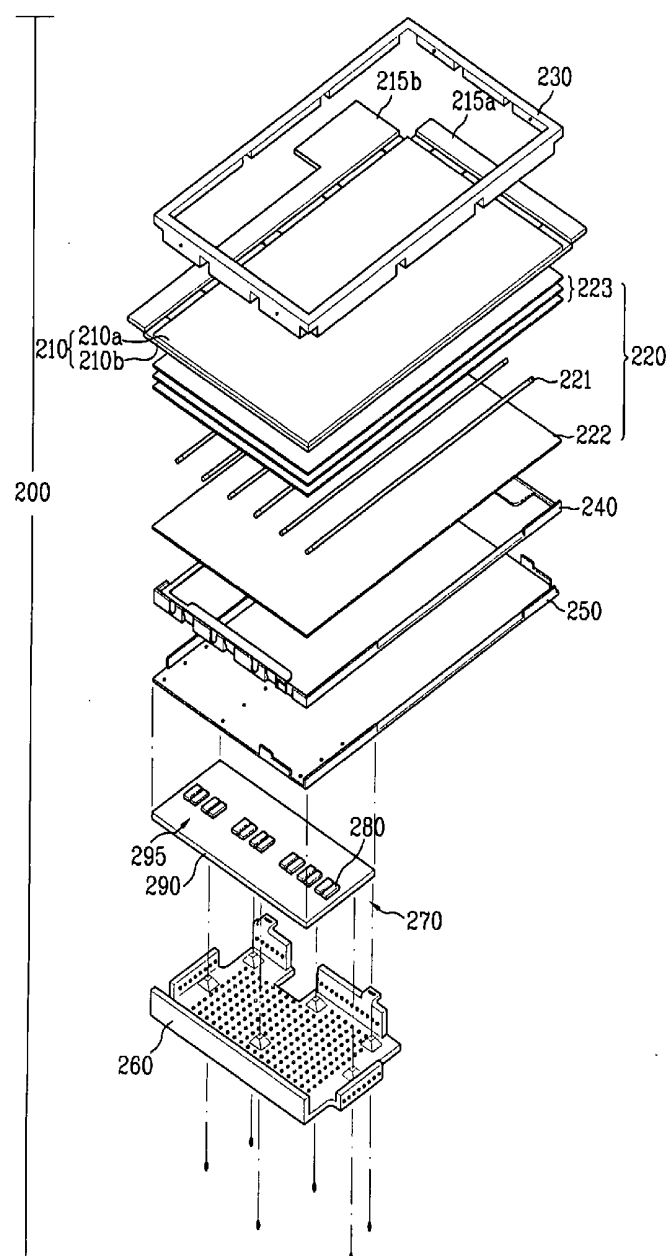
(21) **Appl. No.: 11/806,361**(22) **Filed: May 31, 2007**

FIG. 1
Related Art

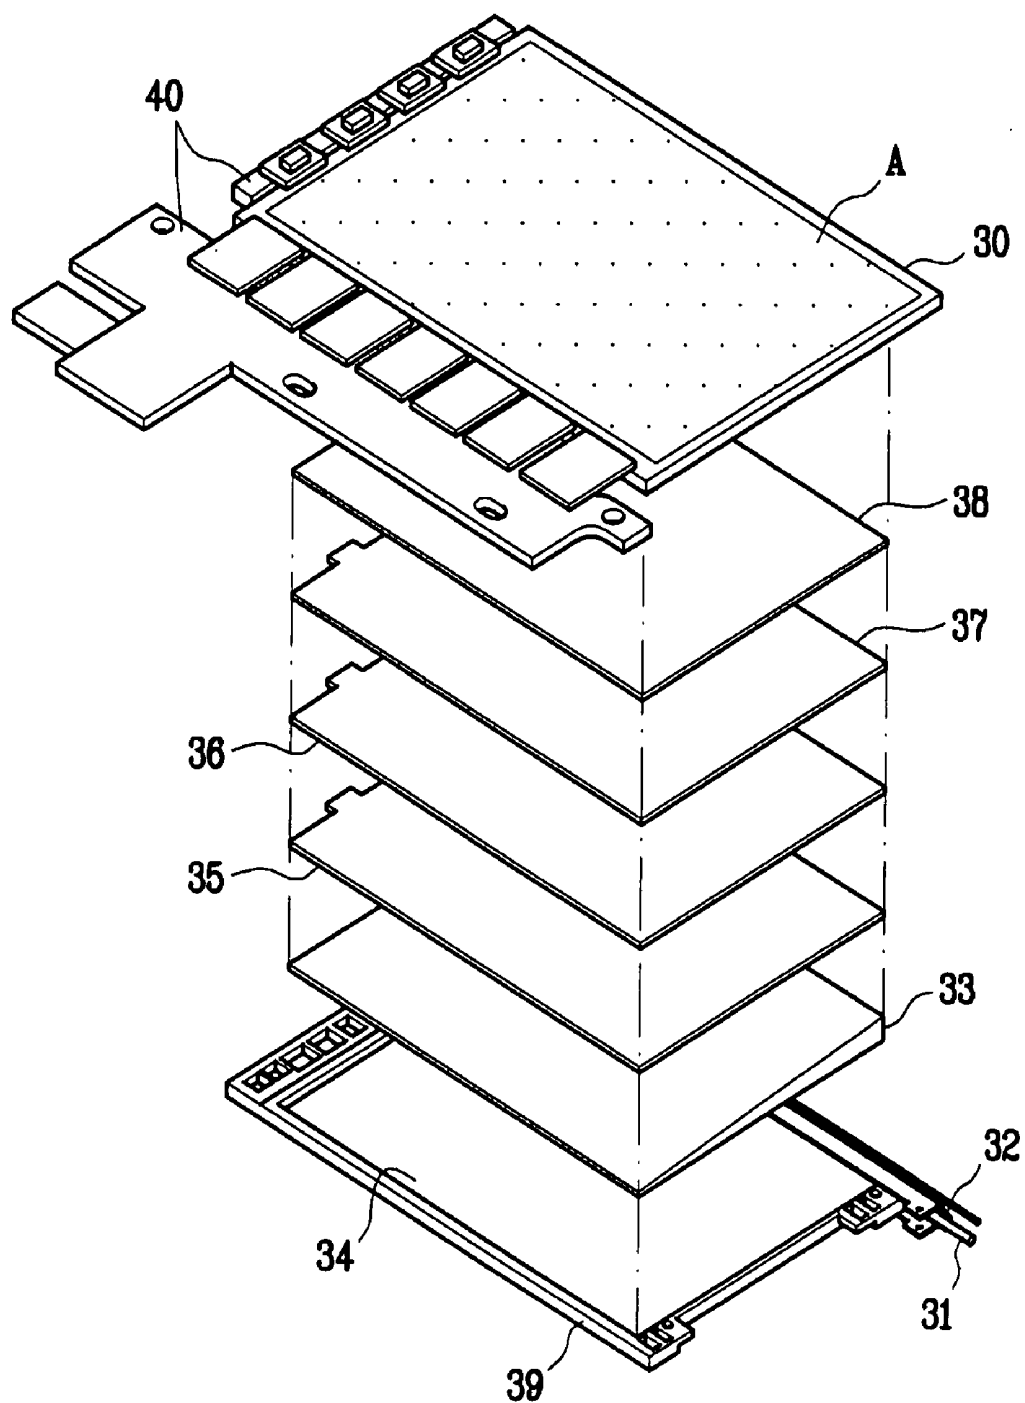


FIG. 2
Related Art

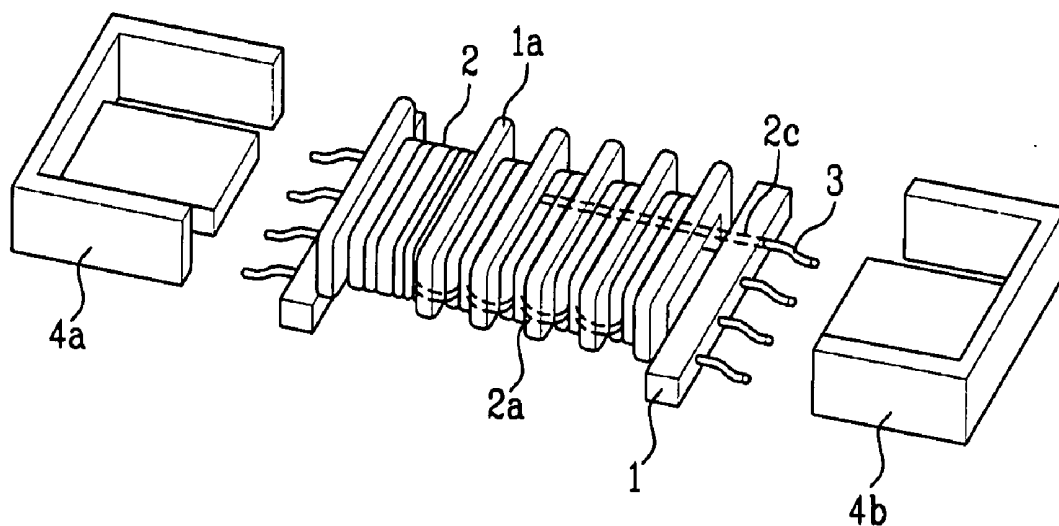


FIG. 3
Related Art

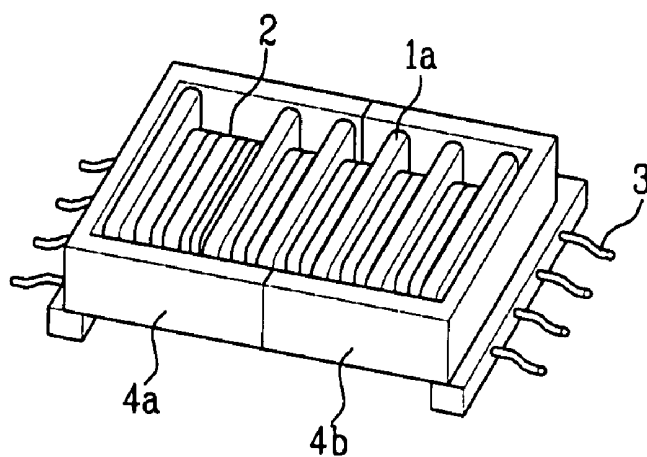


FIG. 4
Related Art

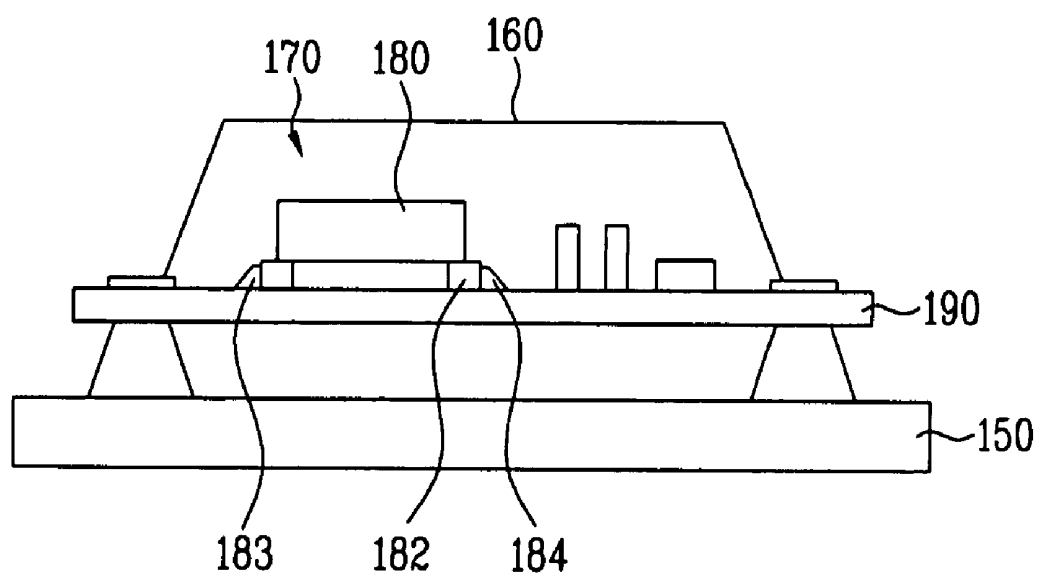


FIG. 5


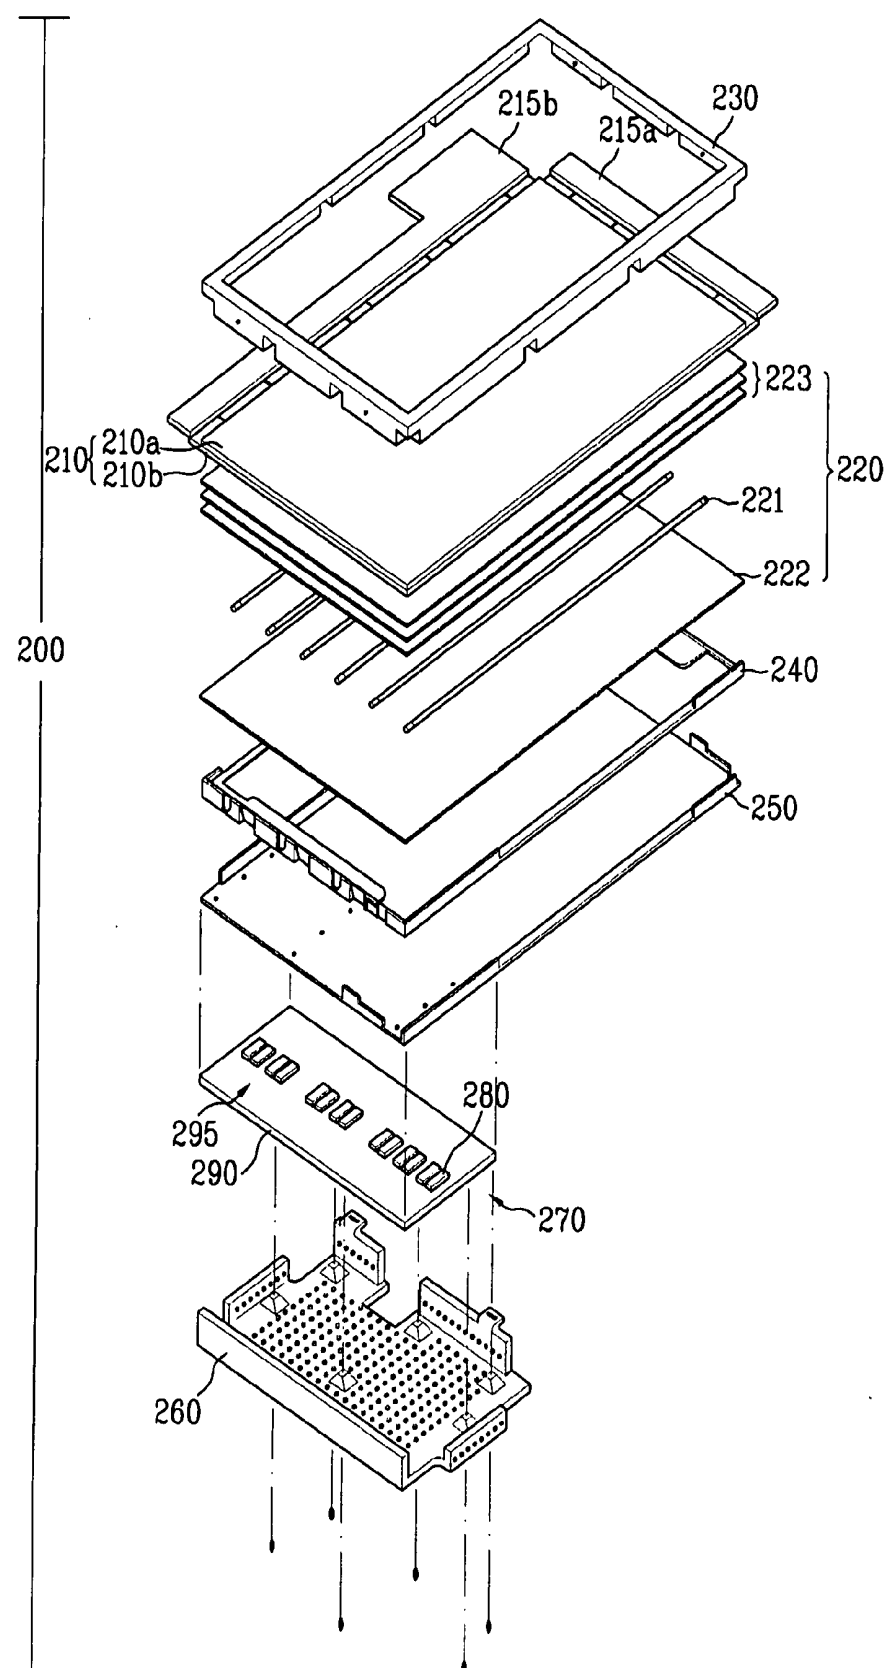


FIG. 6

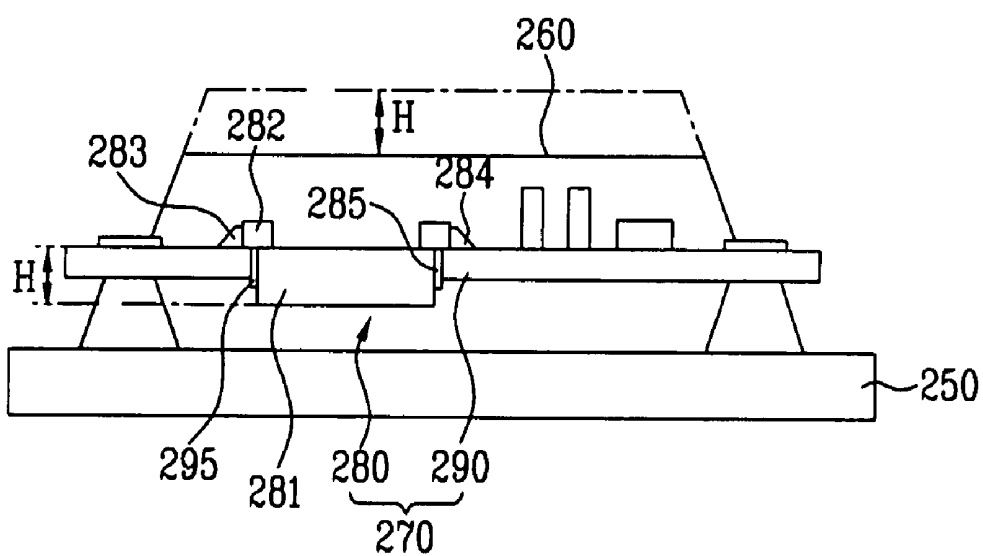

INVERTER FOR LIQUID CRYSTAL DISPLAY DEVICE AND LIQUID CRYSTAL DISPLAY MODULE USING THE SAME

[0001] This application claims the benefit of Korean Patent Application No. 10-2006-0049228 filed in Korea on Jun. 1, 2006, which is hereby incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display (LCD) device, and more particularly, to an inverter for a backlight unit and an LCD module using the same.

[0004] 2. Discussion of the Related Art

[0005] In general, an active matrix (AM) type LCD device displays moving images using thin film transistors (hereinafter, referred to as "TFTs") as switching elements. In comparison with a cathode ray tube (CRT), the LCD device can have a smaller size. Thus, the LCD device may be used in a wide variety of applications, such as personal computers, notebook computers, office equipment, and mobile phones.

[0006] The LCD device is not a self-lighting emission device. In this respect, the LCD device necessarily requires a light source, for example, a backlight unit, which is operated by an inverter. Among various components provided in the LCD device, the backlight unit consumes the most power.

[0007] The inverter that drives the backlight unit is generally divided into a DC/DC inverter and a DC/AC inverter. In this case, the DC/DC inverter generates a DC voltage by a pulse width modulation (PWM) method. Also, the DC/AC inverter converts the DC voltage supplied from the DC/DC converter into a high AC voltage having a level suitable for driving a lamp. However, the inverter for the LCD device of the related art consumes a large amount of power due to the low efficiency of a transformer included in the DC/AC inverter.

[0008] FIG. 1 is an exploded perspective view of a related art LCD device.

[0009] As shown in FIG. 1, the related art LCD device includes an LCD panel 30 to display images and a backlight unit. The backlight unit includes a fluorescent lamp 31 to emit light, a U-shaped lamp housing 32 to surround the fluorescent lamp 31, a light-diffusion sheet 35, a first prism sheet 37, a second prism sheet 36 and a protective sheet 38 provided in sequence below the LCD panel 30. The backlight further includes a light-guiding plate 33, a reflective sheet 34, and main support 39 to support and fix the LCD panel 30 and the backlight unit.

[0010] A display area (A) of LCD panel 30 is illuminated with the light emitted from the backlight unit. Although not shown, the display area (A) of LCD panel 30 is comprised of two transparent substrates bonded to each other, and a liquid crystal layer formed by providing liquid crystal material in an inner space between the two transparent substrates. Further, two polarizing plates are adhered to respective outer surfaces of the two substrates. A driving circuit 40 is provided to drive the display area (A).

[0011] The backlight unit operates as follows. When the fluorescent lamp 31 provided at one end of the light-guiding plate 33 is turned on, the light emitted from the fluorescent lamp 31 is reflected by the lamp housing 32. Then, the

reflected light is transmitted to an end of light-guiding plate 33, in which the fluorescent lamp 31 is not provided, through a cross section of light-guiding plate 33. As a result, the light is diffused to the entire surface of light-guiding plate 33, and the display area (A) of LCD panel is illuminated by the light using the light-diffusion plate 35.

[0012] In the related art LCD device, thin film transistors formed in the LCD panel control respective pixels according to a signal provided by the driving circuit 40 so that the light for the display area (A) of LCD panel is selectively transmitted. By controlling light transmission through the respective pixels, the image is displayed on the display area (A) of LCD panel.

[0013] FIG. 2 is an exploded perspective view of a transformer for a lamp-driving circuit of an LCD device according to the related art. FIG. 3 is a perspective view of the transformer shown in FIG. 2.

[0014] As shown in FIGS. 2 and 3, the transformer for the inverter of the LCD device comprises a bobbin 1, on which coil 2 is wound, provided with partitions 1a at fixed intervals, and ferrite cores 4a and 4b inserted into the center of bobbin 1. Here, the bobbin 1 having the partitions 1a is formed of a plastic material. The ferrite cores 4a and 4b are formed by mixing minutely powdered iron oxide and manganese together, thereby being able to guide a magnetic flux.

[0015] Each of the ferrite cores 4a and 4b is formed in the shape of an "E" wherein the central part of the "E"-shaped ferrite core penetrates the center of bobbin 1. The sidewalls of ferrite cores 4a and 4b surround the sides of bobbin 1 having the coil 2 wound thereon.

[0016] Based on a predetermined winding ratio, the winding number of coil 2 at a first side is different from the winding number of coil 2 at a second side. A current flows through the coil 2.

[0017] At both ends of the bobbin 1, there are lead pins 3. In detail, the coil 2 is wound on each grooved coil-winding part between the partitions 1a. Then, a tape is wound on the coil-winding part of bobbin 1 having the coil 2 wound thereon. After assembling the ferrite cores 4a and 4b into the bobbin 1, the ferrite cores 4a and 4b are bound up with an adhesive tape.

[0018] The coil-winding parts having the coil 2 wound thereon are divided by the sidewalls of bobbin 1 and partitions 1a of bobbin 1. In this case, the coil-winding parts include a low tension part, a medium tension part, and a high tension part.

[0019] FIG. 4 is a cross sectional view illustrating a lower part of the LCD module according to the related art including an inverter, a bottom cover, and a cover shield.

[0020] As shown in FIG. 4, an inverter 170 is positioned at a predetermined interval from a rear surface of bottom cover 150. Also, a cover shield 160 covers the inverter 170. Here, the inverter 170 comprises a printed circuit board (PCB) 190, a transformer 180, and high-tension and low-tension patterns 182. There is a connector (not shown) in the PCB 190. Through the connector of PCB 190, the inverter 170 is connected to a fluorescent lamp (not shown) so that power is supplied to the fluorescent lamp. Also, a plurality of integrated circuits (ICs) are provided in the PCB 190, thereby controlling the operation of the inverter 170.

[0021] The transformer 180 comprises a core to guide a magnetic flux; a bobbin (not shown) having first and second coils (not shown) wound thereon; and first and second lead pins 183 and 184 respectively connected to the first and

second coils at both sides of the bobbin (not shown). The first and second lead pins **183** and **184** are soldered on the PCB **190**. As the transformer **180** is supplied with DC voltage outputted from the PCB **190**, the transformer **180** generates AC voltage to drive the lamp.

[0022] The total thickness of inverter **170** is measured by adding the thickness of PCB **190** and the thickness of transformer **180** together. In this case, the transformer **180** is thicker than the PCB **190**. Thus, the total thickness of inverter **170** is determined by the thickness of transformer **180**. The transformer **180** has a considerable thickness so that the inverter **170** also has a considerable thickness. The rear surface of the cover shield **160** to cover the inverter **170** is formed at a predetermined height from the rear surface of PCB **190** to the upper surface of transformer **180**. That is, the transformer **180** is positioned at a predetermined interval from the cover shield **160**, thereby defining an insulation distance. To obtain an insulation distance between the bottom cover **150** and the transformer **180**, the transformer **180** is positioned at a predetermined interval from the bottom cover **150**. Accordingly, the thickness of LCD module is increased due to the thickness of the transformer **180**.

[0023] If a high-tension voltage is supplied to a high-luminance lamp, the transformer **180** of the inverter **170** must be thick. In the related art structure, the total thickness of the LCD module is mostly due to the thickness of the transformer **180**. By supplying the high-tension voltage from the inverter **170**, the LCD module must be thicker.

[0024] However, the related art inverter has the following disadvantages. First, it is difficult to decrease the total thickness of the inverter due to the thickness of the transformer used as a voltage-boosting means. In an LCD module for a television, the fluorescent lamps are arranged parallel to each other so that the cost of the inverter is decreased. Thus, the thickness of the transformer is increased to realize the high capacity so that the thickness of inverter as well as the total thickness of the LCD module is also increased.

SUMMARY OF THE INVENTION

[0025] Accordingly, the present invention is directed to an inverter for an LCD device and an LCD module using the same that substantially obviates one or more problems due to limitations and disadvantages of the related art.

[0026] An object of the present invention is to provide an inverter for an LCD device to obtain an insulation distance between a cover shield and a bottom cover in a transformer and a high-tension pattern so that a total thickness of an LCD device and an LCD module using the same are decreased.

[0027] Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0028] To achieve these objects and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, an inverter for a liquid crystal display (LCD) device comprises a circuit board defining a hole therethrough; and a transformer inversely inserted into the hole of the circuit, the transformer generating a high voltage.

[0029] In another aspect, a liquid crystal display (LCD) module comprises an LCD panel; a backlight assembly including a light source to supply light to a rear surface of the LCD panel; a main support on which the LCD panel and the backlight assembly are supported; and an inverter including a circuit board defining a hole therethrough and a transformer inversely inserted into the hole of the circuit board, wherein the inverter supplies power to the light source of the backlight assembly.

[0030] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0031] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

[0032] FIG. 1 is an exploded perspective view of an LCD device according to the related art;

[0033] FIG. 2 is an exploded perspective view of a transformer for a lamp-driving circuit of an LCD device according to the related art;

[0034] FIG. 3 is a perspective view of a transformer of the type shown in FIG. 2;

[0035] FIG. 4 is a cross sectional view of a lower part of an LCD module according to the related art having an inverter, a bottom cover and a cover shield;

[0036] FIG. 5 is a perspective view, illustrating an LCD module according to an exemplary embodiment of the present invention; and

[0037] FIG. 6 is a cross sectional view of a lower part of the LCD module of FIG. 5 illustrating an inverter, a bottom cover, and a cover shield.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0038] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts. Hereinafter, an inverter for an LCD device according to the present invention and an LCD module using the same will be described with reference to the accompanying drawings.

[0039] FIG. 5 is a perspective view of an LCD module according to an exemplary embodiment of the present invention. FIG. 6 is a cross sectional view of a lower part of the LCD module of FIG. 5 illustrating an inverter, a bottom cover, and a cover shield.

[0040] As shown in FIG. 5, the LCD module **200** according to an exemplary embodiment of the present invention includes an LCD panel **210**, a backlight assembly **220**, a main support **240**, a top case **230**, a bottom cover **250**, a cover shield **260**, and an inverter **270**. The LCD panel **210** includes upper and lower substrates **210a** and **210b** facing each other and a liquid crystal layer (not shown) formed between the upper and lower substrates **210a** and **210b**. The lower substrate **210b** has thin film transistors as switching

elements, and the upper substrate **210a** has a color filter layer. Images are displayed under the control of the thin film transistors being turned-on/off.

[0041] The LCD panel **210** is connected to gate and source PCBs **215a** and **215b** which respectively output an image signal and a scanning signal to the LCD panel **210**. Also, the backlight assembly **220** is positioned underneath the LCD panel **210**, and the backlight assembly **220** supplies light to the LCD panel **210**. The backlight assembly **220** is a direct type backlight. A plurality of lamps **221** are arranged parallel to each other, a reflective sheet **222** is positioned underneath the plurality of lamps **221**, and a plurality of optical sheets **223** are provided on the plurality of lamps **221**.

[0042] The LCD panel **210** and the backlight assembly **220** are positioned on the main support **240** so that the main support **240** stably supports and fixes the LCD panel **210** and the backlight assembly **220**. Also, the top case **230** covers the upper edges of LCD panel **210** and the lateral sides of main support **240** so that the upper edges of LCD panel **210** and the lateral sides of main support **240** are supported and protected by the top case **230**. The bottom cover **250** covers the bottom of main support **240** so that the bottom cover **250** protects the lower side of LCD module **200**. Thereafter, the bottom cover **250** is connected together with the top case **230** and the support main **240** by a connection part (not shown), thereby completing the module.

[0043] Then, the inverter **270** is positioned underneath the bottom cover **250** so that the inverter **270** can supply power to the plurality of lamps **221**. The inverter **270** is covered with the cover shield **260**. The cover shield **260** and the bottom cover **250** cover the inverter **270** to protect the inverter **270** from the external impact. The cover shield **260** and the bottom cover **250** are formed of metal materials to block an electromagnetic wave.

[0044] The inverter **270** includes a PCB **290** and a transformer **280**. Here, a connector (not shown) is positioned in the PCB **290** of inverter **270**. Through the connector (not shown), the inverter **270** is connected to the lamp **221** so that the lamp **221** is supplied with power. Also, the PCB **290** of inverter **270** is provided with a plurality of ICs (not shown) to control the operation of inverter **270**.

[0045] As shown in FIG. 6, the transformer **280** of inverter **270** includes a core **281** to guide a magnetic flux; a bobbin (not shown) having first and second coils (not shown) wound thereon; first and second lead pins **283** and **284** respectively connected with the first and second coils and respectively positioned at both sides of bobbin (not shown); and high-tension and low-tension patterns **282** respectively connected with the first and second lead pins **283** and **284**. The first and second lead pins **283** and **284** are soldered on the PCB **290**. The transformer **280** is supplied with a DC voltage from the PCB **290** of inverter **270**, and the transformer **280** generates the AC voltage to drive the lamp **221**.

[0046] The inverter **270** is positioned at a predetermined interval from the rear surface of bottom cover **250**. Also, the rear surface of cover shield **260** is positioned at a predetermined interval from the rear surface of PCB **290** of inverter **270**. To insert the transformer **280** into the PCB **290** of inverter **270**, a hole **295** is provided in the PCB **290** of inverter **270**. The hole **295** is open to the front and rear directions. After the transformer **280** is inversely inserted into the hole **295** of PCB **290**, the transformer **280** is soldered on the PCB **290**.

[0047] For the hole **295** of PCB **290** on which the transformer **280** is soldered, there is an insulation material **285** to obtain a creeping distance between the high-tension and low-tension patterns **282**. That is, the core of transformer **280** is positioned toward the bottom cover **250**, and the first and second lead pins **283** and **284** are assembled into the PCB **290**, thereby forming the inverter **270**. To obtain the creeping distance of insulation distance, the gap of hole **295**, formed between the transformer **280** and the PCB **290**, should be filled with the insulation material **285**.

[0048] In the above-mentioned structure, the thickness of inverter **270** is substantially identical to that of the transformer **280**. For example, on inserting the transformer **280** into the hole **295** of PCB **290**, if the transformer **280** is thicker than the PCB **290**, the thickness of inverter **270** corresponds to the thickness of transformer **280**. Conversely, if the transformer **280** is thinner than the PCB **290**, the thickness of inverter **270** corresponds to the value measured by subtracting the insertion depth of transformer **280** from the sum of the thickness of transformer **280** and the thickness of PCB **290**. Even though the insertion depth of transformer **280** is smaller than the thickness of PCB **290** of inverter **270**, the thickness of transformer **280** is relatively large so that the thickness of inverter **270** is about the thickness of transformer **280**.

[0049] As a result, in comparison to the related art inverter having a thickness corresponding to the sum of the thickness of transformer and the thickness of the PCB, the inverter of the present invention has a smaller thickness.

[0050] Also, the height from the rear surface of PCB **290** to the rear surface of cover shield **260** is less than that of the related art. In comparison to the height to the cover shield **160** of the related art shown in the dotted line of FIG. 6, the height from the rear surface of PCB **290** to the cover shield **260** is decreased in proportion to the depth (H) of transformer **280** inserted into the hole **295**.

[0051] In comparison to the related art, the inverter of the present invention is formed with the cover shield having a height that is decreased in proportion to the insertion depth of transformer **280**, thereby also decreasing the thickness of the LCD module **200**. In addition, the transformer is inserted into the hole formed in the PCB, thereby decreasing the total thickness of inverter. As a result, the height of the cover shield **260** is decreased so that the total thickness of LCD module **200** is decreased.

[0052] As mentioned above, the inverter for the LCD device according to the present invention and the LCD module using the same has numerous advantages. For example, the transformer is inversely inserted into the hole formed in the PCB of inverter such that the core is formed toward the bottom cover, thereby decreasing the total thickness of inverter. Accordingly, the height of cover shield is decreased so that the total thickness of the LCD module is decreased.

[0053] The above-mentioned structure to decrease the total thickness of inverter may be applicable to all kinds of LCD devices without regard to the type of inverter.

[0054] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the inventions. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. An inverter for a liquid crystal display (LCD) device, comprising:

a circuit board defining a hole therethrough; and
a transformer inversely inserted into the hole of the circuit, the transformer generating a high voltage.

2. The inverter of claim 1, further comprising an insulation material filled to obtain a creeping distance of high-tension pattern in the hole of the circuit board having the transformer inserted thereinto.

3. The inverter of claim 1, wherein first and second lead pins of the transformer are assembled in a front surface of the circuit board.

4. The inverter of claim 1, wherein the circuit board is a printed circuit board (PCB).

5. The inverter of claim 1, wherein the hole of the circuit board is open with respect to front and rear directions.

6. A liquid crystal display (LCD) module, comprising:
an LCD panel;

a backlight assembly including a light source to supply light to a rear surface of the LCD panel;

a main support on which the LCD panel and the backlight assembly are supported; and

an inverter including a circuit board defining a hole therethrough and a transformer inversely inserted into

the hole of the circuit board, wherein the inverter supplies power to the light source of the backlight assembly.

7. The LCD module of claim 6, further comprising:

a cover shield to cover the inverter;

a top case to cover the lateral sides of the main support and edges of LCD panel; and

a bottom cover positioned adjacent to a rear surface of the main support.

8. The LCD module of claim 7, wherein a core of the transformer is positioned toward the bottom cover.

9. The LCD module of claim 6, further comprising an insulation material filled to obtain a creeping distance of high-tension pattern in the hole of the circuit board having the transformer inserted thereinto.

10. The LCD module of claim 6, wherein first and second lead pins of the transformer are assembled in a front surface of the PCB.

11. The LCD module of claim 6, wherein the circuit board is a printed circuit board (PCB).

12. The LCD module of claim 6, wherein the hole of the circuit board is open with respect to front and rear directions.

* * * * *

专利名称(译)	用于液晶显示装置的变换器和使用该变换器的液晶显示模块		
公开(公告)号	US20070279545A1	公开(公告)日	2007-12-06
申请号	US11/806361	申请日	2007-05-31
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG.PHILIPS LCD CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	JANG HOON		
发明人	JANG, HOON		
IPC分类号	G02F1/1333		
CPC分类号	G02F2001/133612 H05K2201/1003 H05K1/182 H05K1/0256		
优先权	1020060049228 2006-06-01 KR		
其他公开文献	US8184446		
外部链接	Espacenet USPTO		

摘要(译)

提供一种用于液晶显示装置的逆变器和使用该逆变器的液晶显示模块。逆变器包括通过其自身限定孔的电路板，以及反向插入电路的孔中的变压器。变压器产生高压。

