



US 20060279687A1

(19) **United States**

(12) **Patent Application Publication**

Park et al.

(10) **Pub. No.: US 2006/0279687 A1**

(43) **Pub. Date: Dec. 14, 2006**

(54) **LIQUID CRYSTAL DISPLAY DEVICE**

(52) **U.S. Cl. 349/142**

(76) Inventors: **Kwang Soon Park**, Daegu-si (KR);
Soo Young Yoon, Goyang-si (KR); **Min
Doo Chun**, Seoul (KR)

(57)

ABSTRACT

Correspondence Address:

BRINKS HOFER GILSON & LIONE
P.O. BOX 10395
CHICAGO, IL 60610 (US)

(21) Appl. No.: **11/446,572**

(22) Filed: **Jun. 2, 2006**

(30) **Foreign Application Priority Data**

Jun. 2, 2005 (KR) P2005-0046991

Publication Classification

(51) **Int. Cl.**
G02F 1/1343 (2006.01)

Disclosed herein is an LCD device having a drive area directly formed inside a non-pixel area of a substrate without an additional drive IC. The LCD device includes a first substrate having a pixel area and a non-pixel area disposed peripherally to the pixel area. The pixel area has a thin film transistor and a pixel electrode in each sub-pixel defined by gate and data lines crossing each other. A second substrate formed in opposition to the first substrate includes a color filter layer and a black matrix layer. A liquid crystal layer is formed between the first and second substrates. An opening in the black matrix layer reveals an alignment mark, which is disposed on at least one of the first substrate and the second substrate.

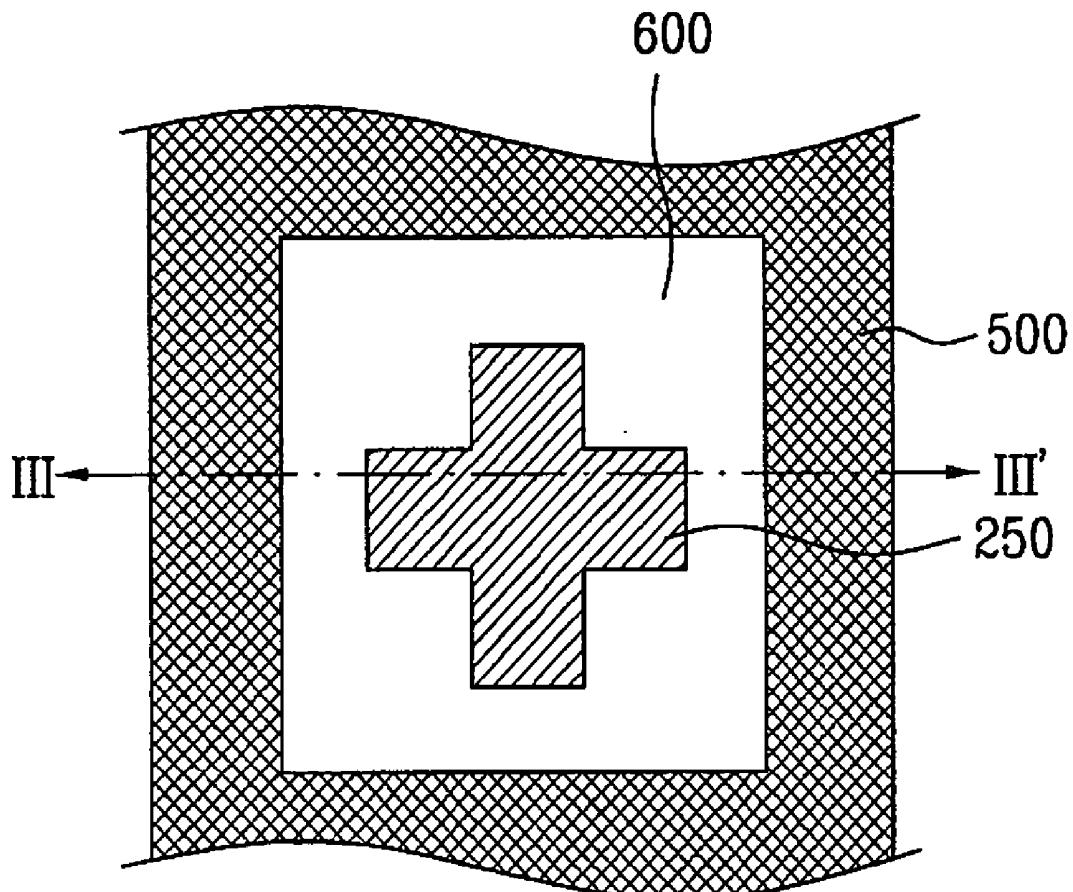


FIG. 1
Related Art

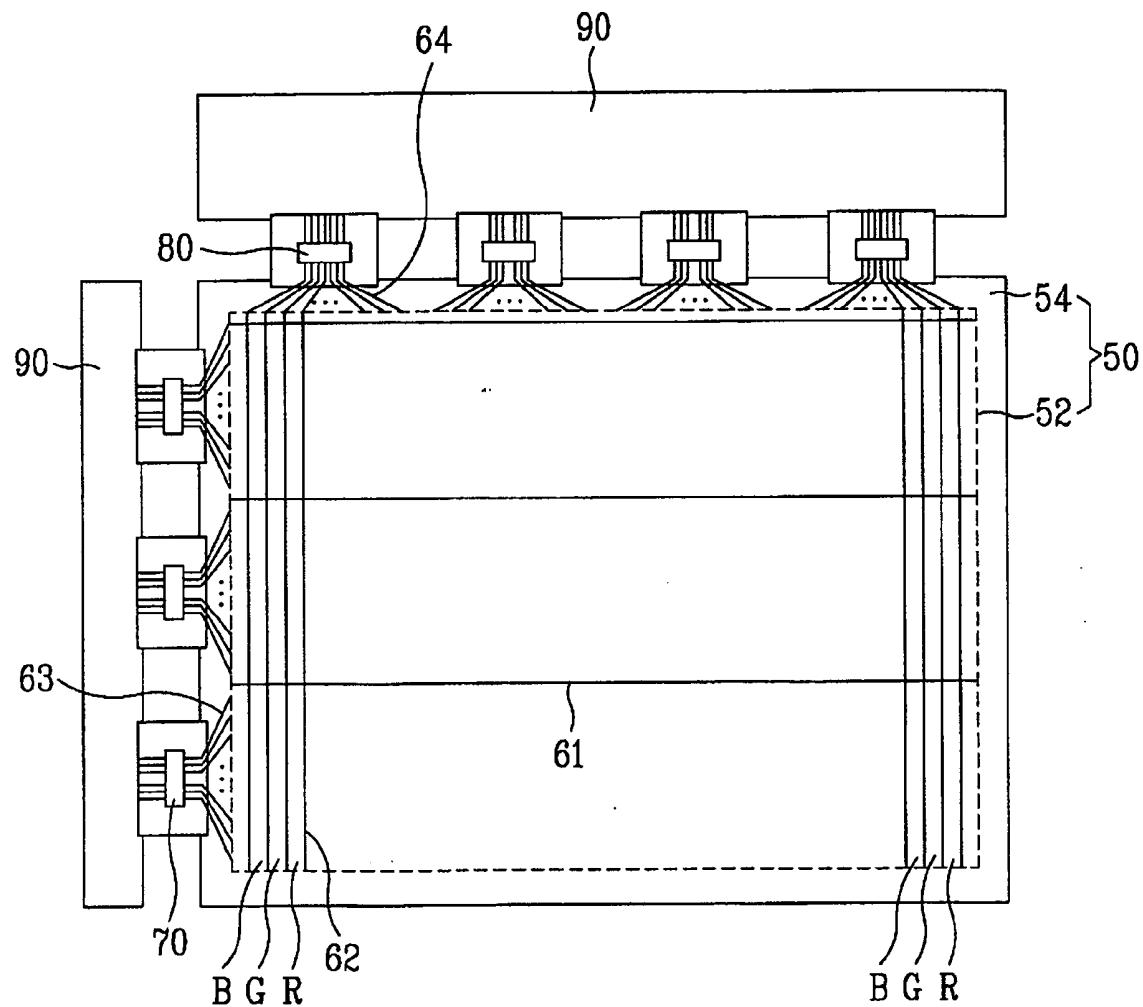


FIG. 2
Related Art

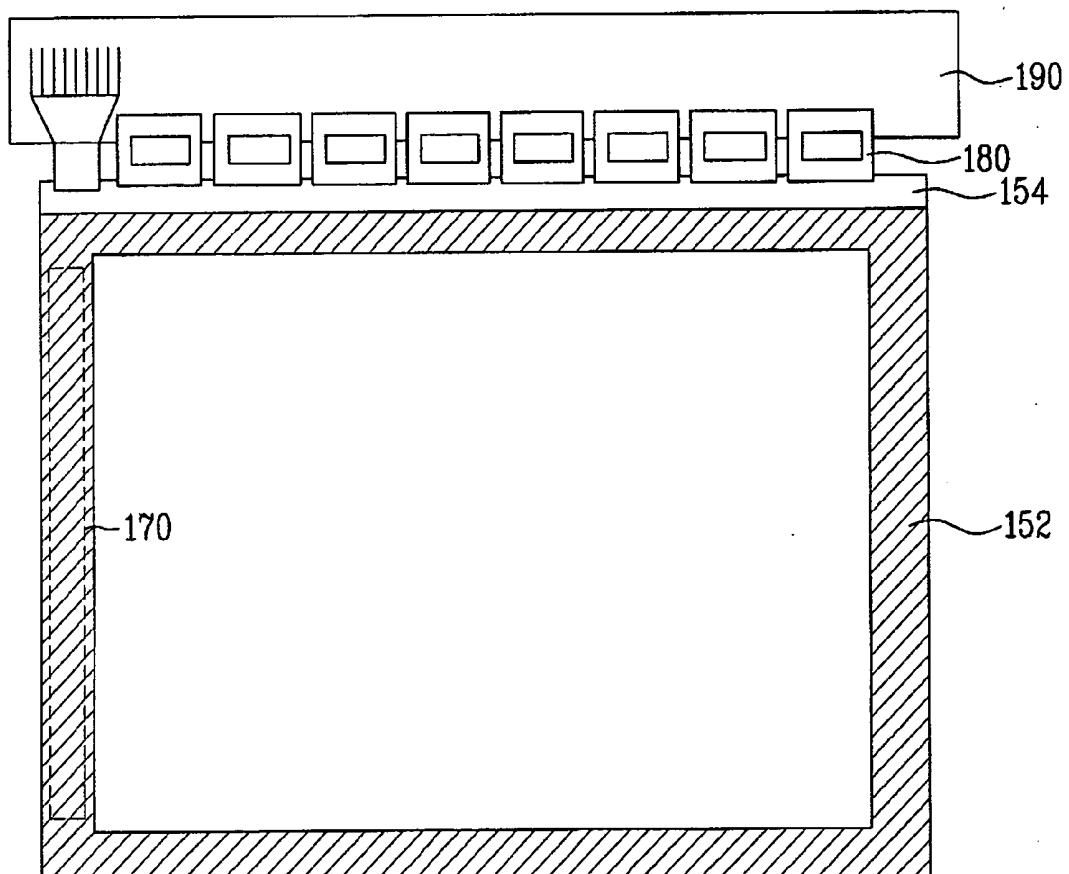


FIG. 3

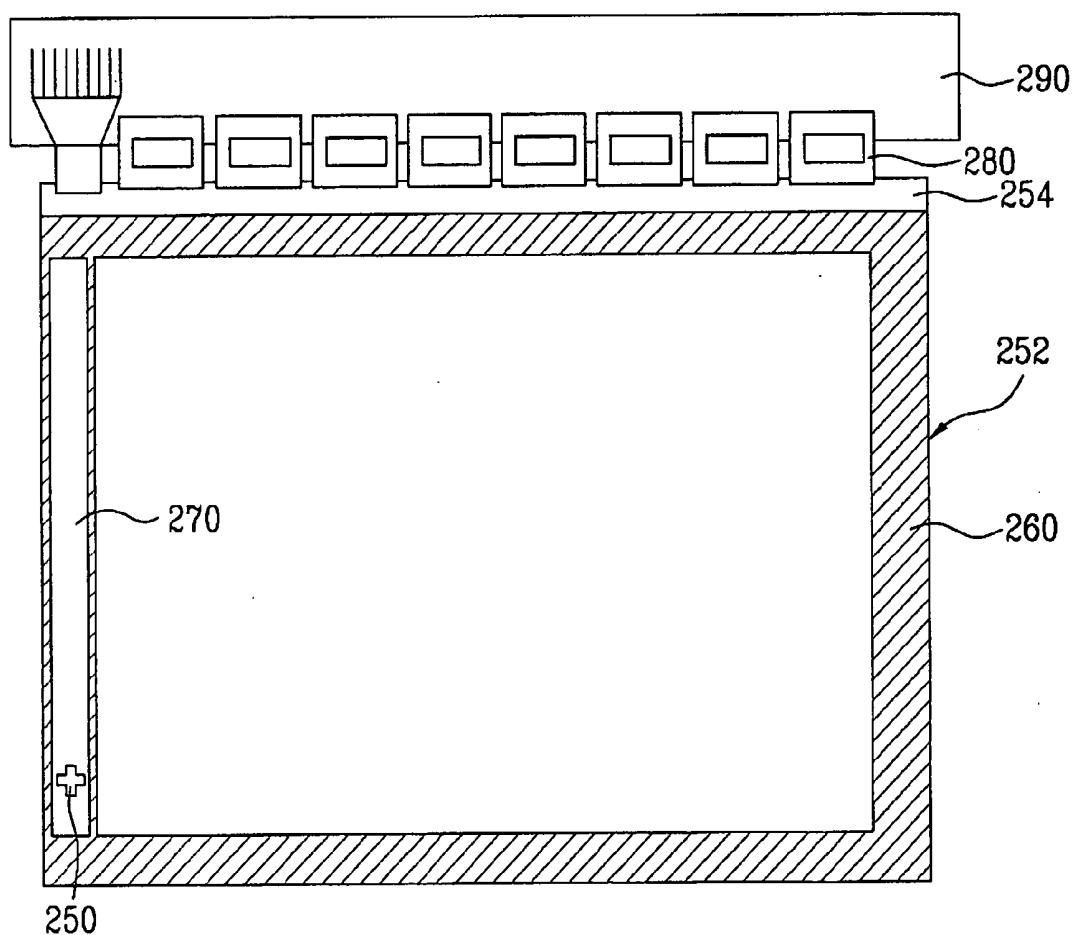


FIG. 4A

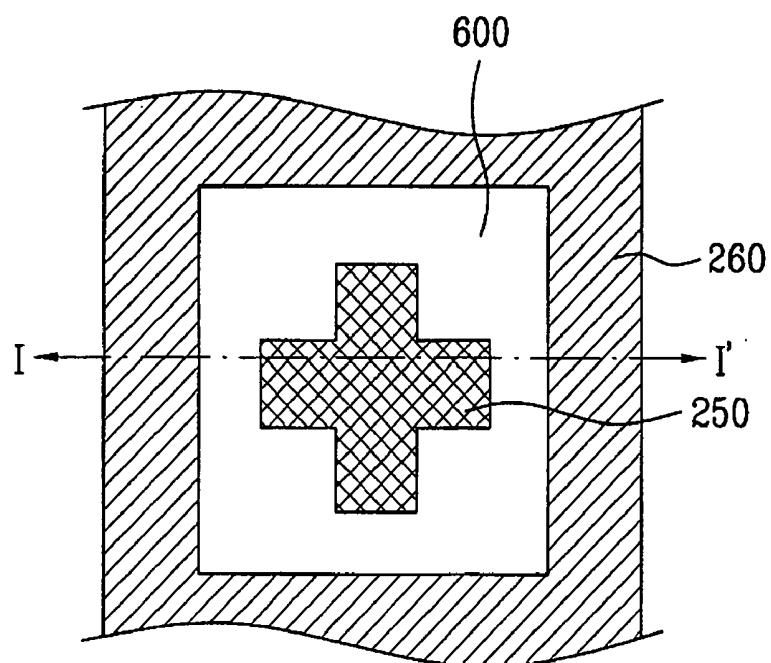


FIG. 4B

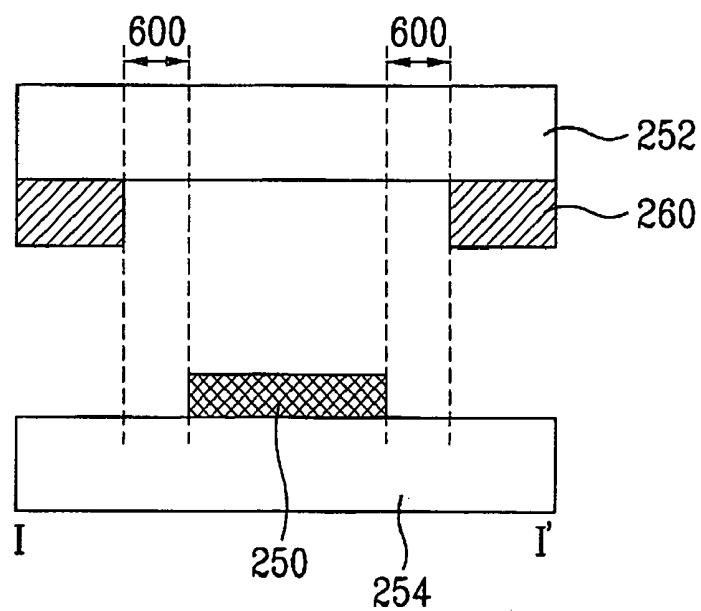


FIG. 5A

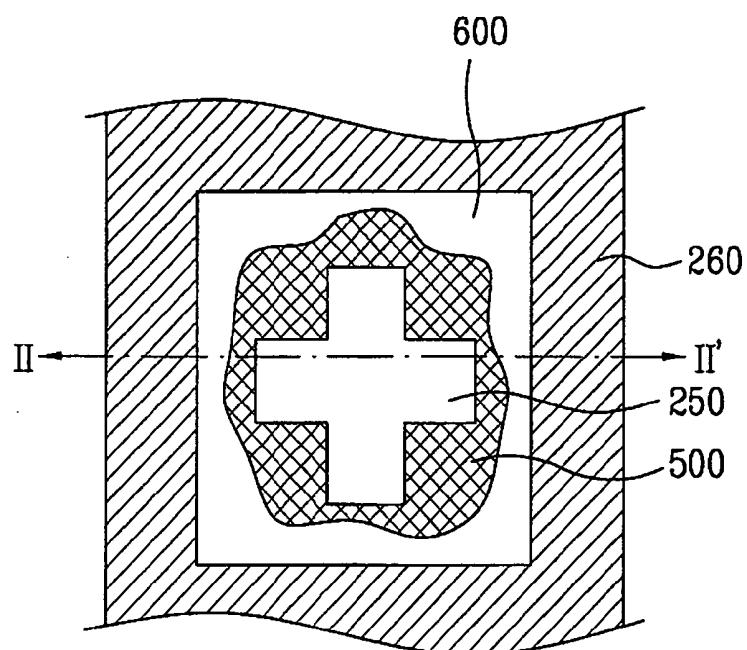


FIG. 5B

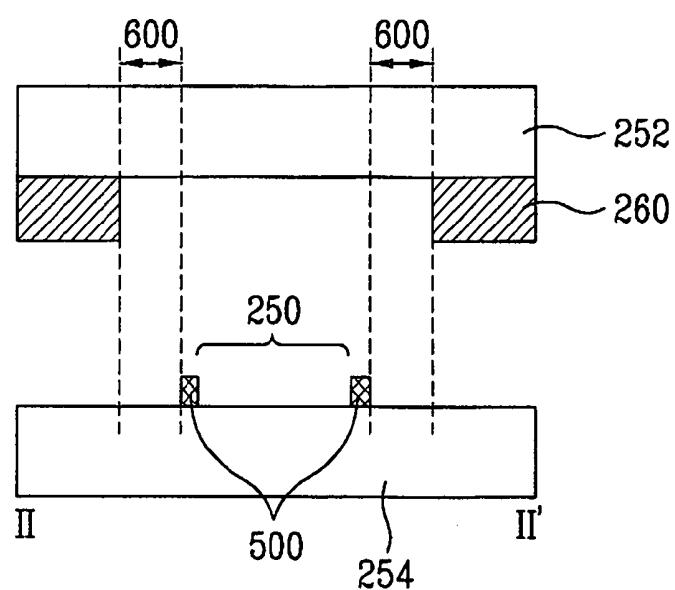


FIG. 6A

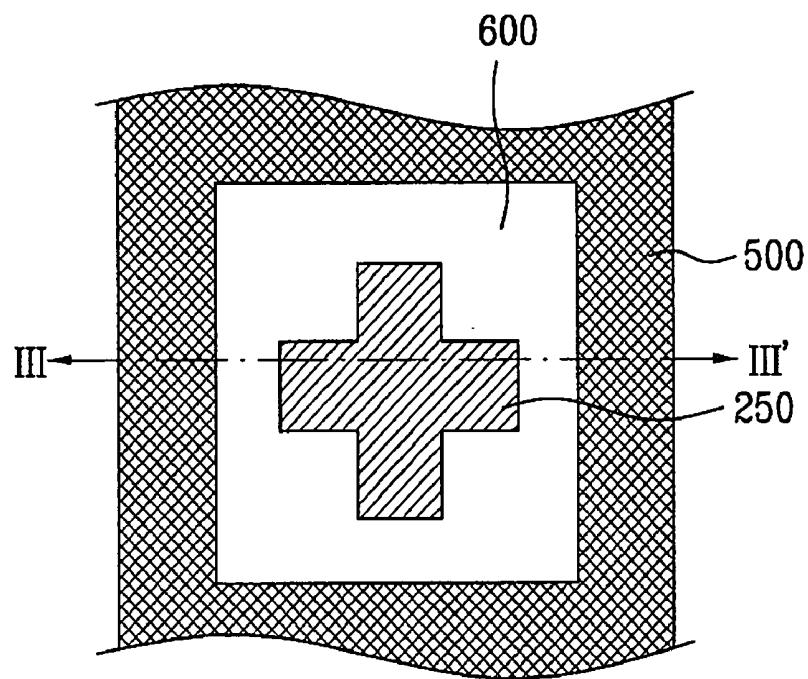


FIG. 6B

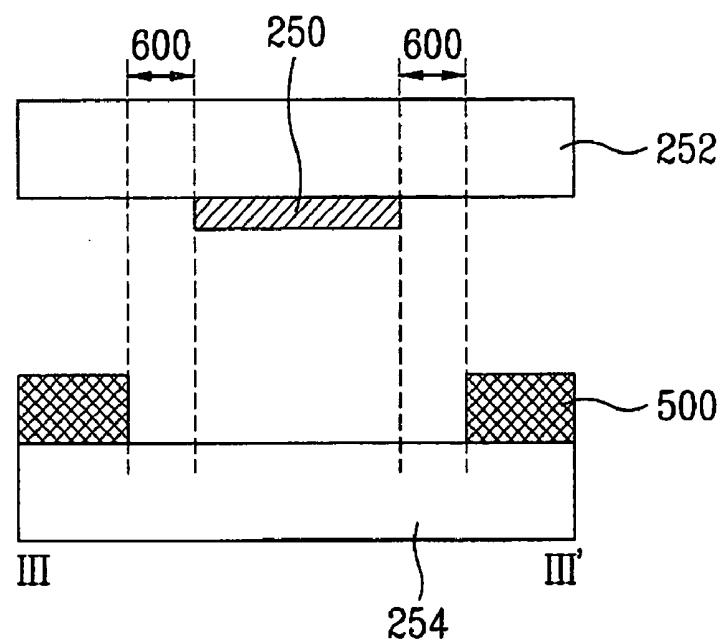


FIG. 7A

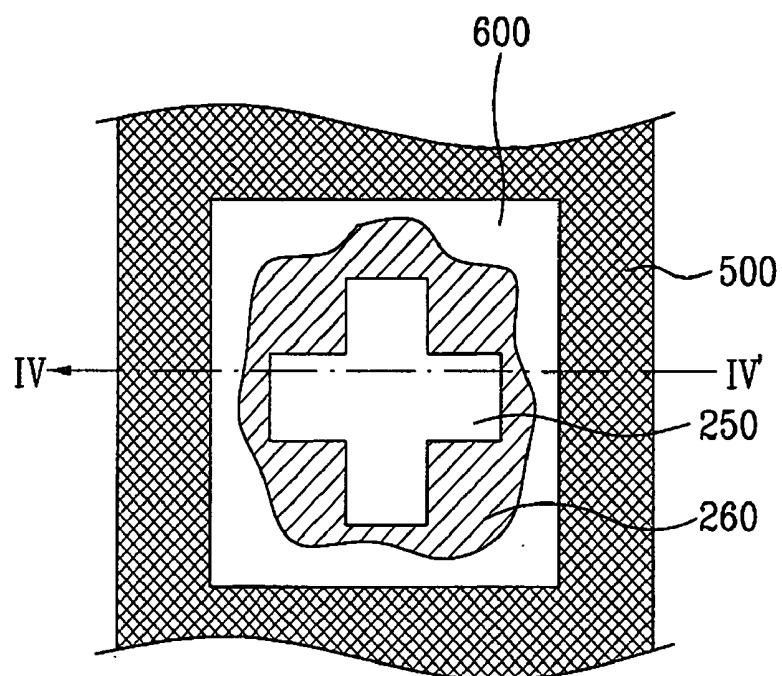


FIG. 7B

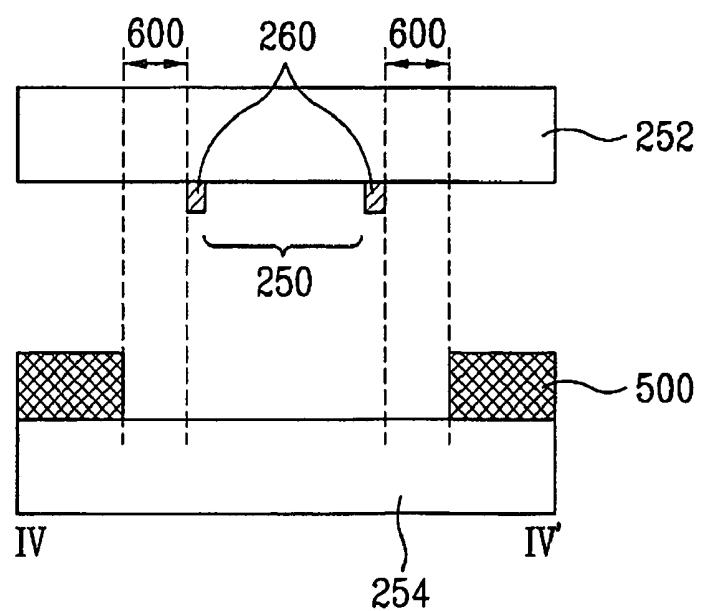


FIG. 8A


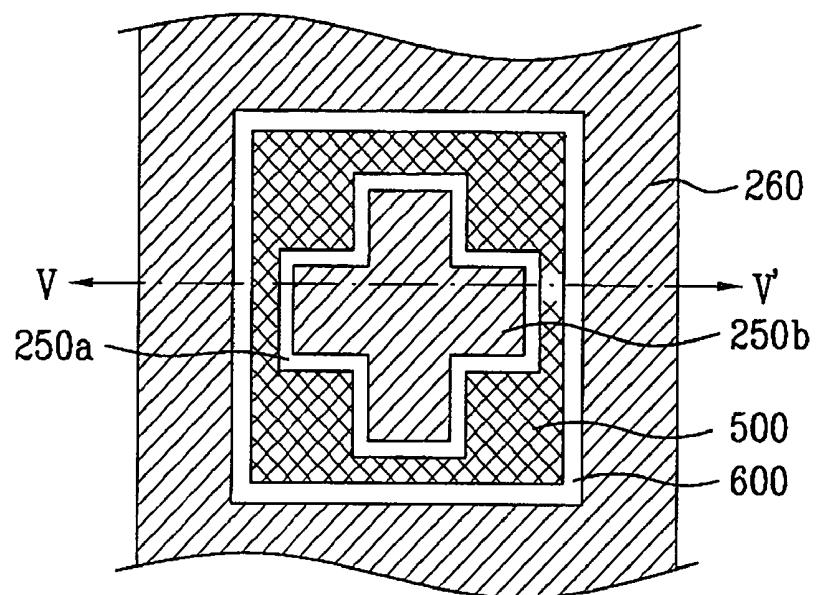


FIG. 8B

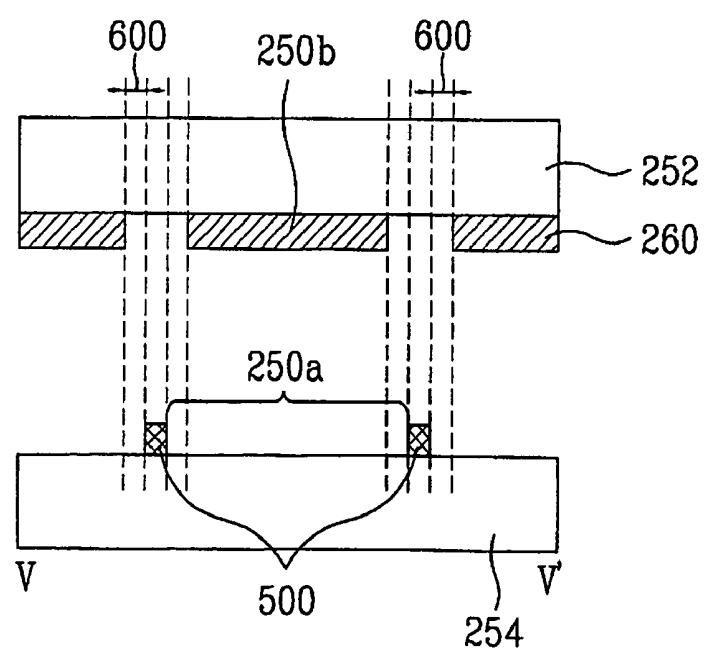

LIQUID CRYSTAL DISPLAY DEVICE

[0001] This application claims the benefit of the Korean Patent Application No. P2005-46991, filed on Jun. 2, 2005, which is hereby incorporated by reference as if fully set forth herein.

TECHNICAL FIELD

[0002] The present disclosure relates to a liquid crystal display (LCD) device, and more particularly, to an LCD device which has a drive area formed on a non-pixel area of a substrate without an additional drive IC.

BACKGROUND

[0003] Among flat display devices, liquid crystal display (LCD) devices are widely used for notebook computers, monitors, aircraft, and other applications. LCDs have the advantages of high contrast ratio, good gray scale level, low power consumption, and good motion quality.

[0004] In particular, LCD technology may be applied to ultra-thin displays, such as wall-mountable televisions, because the LCD device has a thin profile. In addition, the LCD device is light in weight and has low power consumption; thus it may be used as a display device for a notebook computer which is driven by a battery. Also, the LCD device can be fabricated in a small size and used for a display of a mobile phone.

[0005] Generally, the LCD device includes an upper substrate of a color filter array substrate, a lower substrate of a thin film transistor array substrate, and a liquid crystal layer of a dielectric anisotropy. In this case, the lower and upper substrates are positioned in opposition to each other, and the liquid crystal layer is formed between the lower and upper substrates. A plurality of pixels are formed, each of which has a thin film transistor TFT. A voltage is applied to the corresponding pixel through a pixel-selection address line by switching the thin film transistor of the pixel region.

[0006] A light source (backlight) is provided to a rear surface of the LCD device. That is, the LCD device is formed in a transmitting mode, wherein the light emitted from the backlight is used to display images on a screen. In this case, a color filter layer of red (R), green (G) and blue (B) colors is provided to the LCD device.

[0007] The LCD device may also be used for a desktop monitor as well as for a notebook computer, in which case the color filter layer of the LCD device preferably has high luminosity and chromaticity.

[0008] Hereinafter, an LCD device according to the related art will be described with reference to the accompanying drawings.

[0009] FIG. 1 is a plan view of a general LCD device. FIG. 2 is a plan view of an LCD device according to the related art.

[0010] As shown in FIG. 1, a general LCD device includes a TFT array substrate 50 which is divided into a pixel area 52 for displaying images inside a dotted line of FIG. 1, and a non-pixel area 54 outside the dotted line of FIG. 1.

[0011] In the pixel area 52, there are a plurality of gate and data lines 61 and 62 crossing each other to define sub-pixels.

Also, a thin film transistor TFT (not shown) is formed adjacent to a crossing of the gate and data lines 61 and 62. Each sub-pixel has a pixel electrode (not shown) which is electrically connected with a drain electrode of the thin film transistor. The images are displayed by switching the corresponding thin film transistor.

[0012] The non-pixel area 54 is provided with gate and data link lines 63 and 64 respectively extended from the gate and data lines 61 and 62. Each one end of the gate link lines 63 is connected with a gate drive IC 70, and each one end of the data link lines 64 is connected with a data drive IC 80.

[0013] The gate and data drive IC 70 and 80 are mounted by a tape automated bonding (TAB) method for connection with a printed circuit board (PCB) 90. On the PCB 90, there are a plurality of elements such as integrated circuits to generate various control signals and data signals for operation of the LCD device.

[0014] Although not shown, the color filter array substrate of the LCD device includes a color filter layer of red (R), green (G) and blue (B) color filter patterns, a black matrix layer for division of R, G and B color filter patterns and for light-shielding function, and a common electrode to apply a voltage to the liquid crystal cells.

[0015] After cutting the LCD device to a desired size, processes for edge grinding and polarizer attachment are performed. For the edge grinding process, the position of the LCD device is sensed by a charged-couple device (CCD) camera, and then a grinder grinds the edge of the LCD device. For the polarizer attachment process, after sensing the position of the LCD device with the CCD camera, a polarizer is attached to the LCD device.

[0016] To sense the precise position of the LCD device, the CCD camera may benefit from having an alignment mark. The alignment mark is formed corresponding to the region where the data and gate drive ICs are formed prior to the processes of edge grinding and polarizer attachment. For reference, the data and gate drive IC are connected with the LCD device after the processes of edge grinding and polarizer attachment.

[0017] Recently, a new model has been proposed, wherein the gate drive area is formed on the TFT array substrate and the space for mounting the gate drive IC is eliminated from the LCD device, thereby increasing the pixel area of the LCD device. In this case, the alignment mark may be hidden by the black matrix layer of the color filter array substrate.

[0018] In detail, as shown in FIG. 2, a PCB 190 is provided only corresponding to a data line part, and the PCB 190 is connected with a data drive IC 180. In this state, a gate drive area 170 is formed inside a non-pixel area 154 of the LCD device without the gate drive IC, thereby decreasing the non-pixel area in size corresponding to the region where the gate drive IC would be attached. Thus, an alignment mark corresponding to a related art gate drive IC is formed in the gate drive area 170.

[0019] In case of the LCD device having no gate drive IC, the space for mounting the gate drive IC is eliminated. That is, the alignment mark is hidden in the processes for edge grinding and polarizer attachment. In other words, the gate drive area 170 is overlapped with a color filter array sub-

strate having a black matrix layer, and thus the alignment mark is hidden by the black matrix layer.

[0020] In the general LCD device, the alignment mark is formed in the portions including the gate and data drive ICs and having no black matrix layer so that it can be seen in the edge grinding and polarizer attachment processes, and therefore, such processes are performed without any problem. However, in case of the LCD device having no gate drive IC, the alignment mark formed in the TFT array substrate is hidden by the color filter array substrate, so that the CCD camera cannot sense the alignment mark. That is, the alignment mark is hidden by the black matrix layer formed at the edge of the color filter array substrate.

SUMMARY

[0021] Accordingly, the present disclosure is directed to an LCD device which has a drive area formed on a non-pixel area of a substrate without an additional drive IC.

[0022] According to one embodiment, the LCD device comprises a first substrate including a pixel area and a non-pixel area disposed peripherally to the pixel area. The pixel area has a thin film transistor and a pixel electrode in each sub-pixel defined by gate and data lines crossing each other. A second substrate is disposed in opposition to the first substrate and includes a color filter layer and a black matrix layer. A liquid crystal layer is disposed between the first and second substrates. An alignment mark is disposed on at least one of the first substrate and the second substrate. An opening in the black matrix layer reveals the alignment mark.

[0023] According to another embodiment, the LCD device includes a first substrate having a pixel area and a non-pixel area disposed peripherally to the pixel area. The pixel area has a thin film transistor and a pixel electrode in each sub-pixel defined by gate and data lines crossing each other. A second substrate is disposed in opposition to the first substrate and includes a color filter layer and a black matrix layer. A liquid crystal layer is disposed between the first and second substrates. An alignment mark is disposed on the first substrate and is visible through an opening in the black matrix layer.

[0024] According to another embodiment, the LCD device includes a first substrate having a pixel area and a non-pixel area disposed peripherally to the pixel area. The pixel area has a thin film transistor and a pixel electrode in each sub-pixel defined by gate and data lines crossing each other. A second substrate is disposed in opposition to the first substrate and includes a color filter layer and a black matrix layer. A liquid crystal layer is disposed between the first and second substrates. An alignment mark is disposed on one of the first substrate and the second substrate and is defined by an opening in the black matrix layer.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] FIG. 1 is a plan view of a general LCD device;

[0026] FIG. 2 is a plan view of an LCD device according to the related art;

[0027] FIG. 3 is a plan view of an LCD device according to the present disclosure;

[0028] FIGS. 4A and 4B are plan and cross section views of an alignment mark according to a first embodiment;

[0029] FIGS. 5A and 5B are plan and cross section views of an alignment mark according to a second embodiment;

[0030] FIGS. 6A and 6B are plan and cross section views of an alignment mark according to a third embodiment;

[0031] FIGS. 7A and 7B are plan and cross section views of an alignment mark according to the fourth embodiment embodiment; and

[0032] FIGS. 8A and 8B are plan and cross section views of an alignment mark according to the fifth embodiment embodiment.

DETAILED DESCRIPTION

[0033] Reference will now be made in detail to various preferred embodiments, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0034] FIG. 3 is a plan view of an LCD device according to the present disclosure. FIGS. 4A and 4B are plan views of an alignment mark according to a first embodiment. FIGS. 5A and 5B are plan views of an alignment mark according to a second embodiment. FIGS. 6A and 6B are plan and cross section views of an alignment mark according to a third embodiment. FIGS. 7A and 7B are plan and cross section views of an alignment mark according to a fourth embodiment. FIGS. 8A and 8B are plan and cross section views of an alignment mark according to a fifth embodiment.

[0035] As shown in FIG. 3, an LCD device according to the present disclosure includes a TFT array substrate 254, a color filter array substrate 252, a liquid crystal layer (not shown), and an alignment mark 250.

[0036] The TFT array substrate 254 includes a pixel area for displaying images and a non-pixel area for supplying various signals to the pixel area. The pixel area is provided with switching elements to change an alignment direction of the liquid crystals. The color filter array substrate 252 is comprised of a color filter layer for representing colors, and a black matrix layer 260 for preventing light leakage. Also, the liquid crystal layer (not shown) is formed between the color filter array substrate and the TFT array substrate. Then, a portion of the black matrix layer 260 may be removed to form an opening therein that reveals the alignment mark 250, which may aid in determining the precise position of the LCD device in the steps of edge grinding and polarizer attachment. As used herein, the term "reveals" means makes visible or defines.

[0037] Although not shown, the pixel area of the TFT array substrate 254 is provided with a plurality of gate and data lines crossing each other to define sub-pixels, with a gate insulating layer disposed between the gate and data lines. A plurality of thin film transistors TFTs are formed adjacent to the crossings of the gate and data lines, and a pixel electrode is electrically connected with each thin film transistor TFT and formed in an opening of each sub-pixel.

[0038] The non-pixel area is provided with a gate drive area 270 directly formed on the TFT array substrate 250, and

a data drive IC **280** connected with the data line by a data link line extended from the data line. The data drive IC **280** is connected with a PCB **290**. That is, the PCB **290** is formed corresponding to a data line part, and the PCB **290** is connected with the data drive IC **280**. However, the gate drive area **270** may be directly formed in the non-pixel area of the LCD device without forming an additional gate drive IC.

[0039] The gate and data lines may be formed of a light-shielding material, for example, copper (Cu), aluminum (Al), aluminum neodymium (AlNd), molybdenum (Mo), chrome (Cr), titanium (Ti), tantalum (Ta), or molybdenum-tungsten (MoW).

[0040] Also, the alignment mark **250** may be formed when forming the gate or data line, together. As shown in FIGS. **4A**, **4B**, **5A** and **5B**, a portion of the black matrix layer **260** overlapped with the alignment mark **250** may be removed, thereby forming an opening in the black matrix layer **260** and preventing the alignment mark **250** from being hidden by the black matrix layer **260**. The opening in the black matrix layer **260** thus reveals the alignment mark **250** when viewed from a plan view perspective, as shown in the figures. As used herein, the term "reveals" means makes visible or defines. As shown in FIGS. **4A** and **4B**, the alignment mark **250** may be formed on the TFT array substrate **254** by patterning the light-shielding material layer. The alignment mark **250** shown in FIGS. **4A** and **4B** has a relief structure. Also, as shown in FIGS. **5A** and **5B**, the alignment mark **250** may be formed on the TFT array substrate **254** having an intaglio structure by removing a portion of the light-shielding metal layer **500**. The two substrates **252** and **254** may be aligned to show the alignment mark through the opening in the black matrix layer **260**. For reference, the reference numeral **600** corresponds to a portion having no pattern between the black matrix layer **260** and the alignment mark **250**.

[0041] The color filter array substrate **252** includes a color filter layer, a black matrix layer **260**, and a common electrode. The color filter layer is disposed in opposition to the pixel area so as to represent colors, the black matrix layer **260** is disposed in opposition to the periphery of the subpixels and the non-pixel area so as to prevent light leakage, and a common electrode is disposed in opposition to the pixel electrode so as to apply an electric field to the liquid crystal layer.

[0042] The black matrix layer **260** is formed by depositing or coating a material having an optical density of 3.5 or above, for example, an inorganic material of chrome oxide (CrO_x) or a metallic material of chrome (Cr). The alignment mark **250** may be formed when forming the black matrix layer, together. As shown in FIGS. **6A**, **6B**, **7A** and **7B**, one or more portions of the black matrix layer **260** may be removed to form an opening therein that reveals the alignment mark from a plan view perspective. As used herein, the term "reveals" means makes visible or defines.

[0043] As shown in FIGS. **6A** and **6B**, the alignment mark **250** may be formed to have a relief structure on the color filter array substrate **252** by patterning the black matrix layer **260**. Also, as shown in FIGS. **7A** and **7B**, the alignment mark **250** may be formed on the color filter array substrate **252** having an intaglio structure by patterning the black matrix layer **260**. The two substrates **252** and **254** may

be aligned to show the alignment mark **250** revealed by the opening in the black matrix layer **260**. For reference, the reference numeral **600** corresponds to a portion having no pattern between the black matrix layer **260** and the alignment mark **250**.

[0044] As shown in FIGS. **8A** and **8B**, the alignment mark may include a first alignment mark **250a** formed on a TFT array substrate, and a second alignment mark **250b** formed on a color filter array substrate. For example, the second alignment mark **250b** having a relief structure may be positioned inside the first alignment mark **250a** having an intaglio structure. Alternatively, the second alignment mark **250b** having a relief structure may be positioned inside the first alignment mark **250a** having a relief structure. The first alignment mark **250a** may be formed at the same time as the light-shielding metal layer **500** for the gate or data line, and the second alignment mark **250b** may be formed at the same time as the black matrix layer. The two substrates **252** and **254** may be aligned to show the second alignment mark **250b** within the first alignment mark **250a**. For reference, the reference numeral **600** corresponds to portions having no pattern, for example, between the light-shielding material layer **500** and the second alignment mark **250b**, and between the light shielding material layer **500** and the black matrix layer **260**.

[0045] Alternatively, the first alignment mark having a relief or an intaglio structure may be positioned inside the second alignment mark having an intaglio or a relief structure.

[0046] In this case, the first and second alignment marks may be used when bonding the TFT array substrate and the color filter array substrate to each other in addition to the edge grinding and polarizer attachment processes.

[0047] The alignment mark may be formed at the same time as the gate or data line of the TFT array substrate. Alternatively, the alignment mark may be formed at the same time as the black matrix layer of the color filter array substrate.

[0048] Also, the alignment mark may be comprised of the first alignment mark on the TFT array substrate formed at the same time as the gate or data line, and the second alignment mark on the color filter array substrate formed at the same time as the black matrix layer. Also, the alignment mark may be comprised of the first alignment mark on the TFT array substrate formed at the same time as the black matrix layer, and the second alignment mark on the color filter array substrate formed at the same time as the black matrix layer.

[0049] In the LCD device having the drive area directly formed on the substrate, the black matrix layer may be partially removed to form an opening that reveals the alignment mark, which may aid in determining the correct and precise position of the LCD device in the steps of edge grinding and polarizer attachment.

[0050] In the above drawings, the alignment mark is formed in the shape of a cross. However, it is not limited to the cross shape.

[0051] A data drive area as well as the gate drive area may be directly formed inside the non-pixel area of the TFT array substrate, thereby removing the data drive IC. In this case,

a portion of the black matrix layer covering the data drive area may be removed, forming an opening in the black matrix layer over the drive area and preventing the alignment mark from being hidden by the black matrix layer. Accordingly, it may be possible to sense the correct and precise position of the LCD device in the steps of substrate bonding, edge grinding, and polarizer attachment.

[0052] In the LCD device having the drive area directly formed inside the non-pixel area of the substrate, a portion of the black matrix layer covering the drive area of the non-pixel area may be removed to form an opening in the black matrix layer that reveals the alignment mark. Accordingly, it may be possible to sense the correct and precise position of the LCD device in the steps of edge grinding and polarizer attachment.

[0053] Also, the alignment mark may be formed at the same time as the gate or data line of the TFT array substrate, or as the black matrix layer of the color filter array substrate. Thus, the alignment mark may be formed without an additional step.

[0054] It will be apparent to those skilled in the art that various modifications and variations can be made in the present disclosure without departing from the spirit or scope of the invention. Thus, it is intended that the present disclosure covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. An LCD device comprising:

a first substrate comprising a pixel area and a non-pixel area disposed peripherally to the pixel area, the pixel area having a thin film transistor and a pixel electrode in each sub-pixel defined by gate and data lines crossing each other;

a second substrate having a color filter layer and a black matrix layer, the second substrate disposed in opposition to the first substrate;

a liquid crystal layer disposed between the first and second substrates; and

an alignment mark disposed on at least one of the first substrate and the second substrate, wherein an opening in the black matrix layer reveals the alignment mark.

2. The LCD device of claim 1, wherein the alignment mark comprises a first substrate portion disposed on the first substrate.

3. The LCD device of claim 2, wherein the first substrate portion is formed at the same time as the gate line.

4. The LCD device of claim 2, wherein the first substrate portion is formed at the same time as the data line.

5. The LCD device of claim 2, wherein the first substrate portion is formed at the same time as the black matrix layer.

6. The LCD device of claim 1, wherein the alignment mark comprises a second substrate portion disposed on the second substrate.

7. The LCD device of claim 6, wherein the second substrate portion is formed at the same time as the black matrix layer.

8. The LCD device of claim 1, wherein the alignment mark comprises one of an intaglio structure and a relief structure.

9. The LCD device of claim 1, wherein the alignment mark comprises a first substrate portion disposed on the first substrate and a second substrate portion disposed on the second substrate.

10. The LCD device of claim 9, wherein the first substrate portion is formed at the same time as the gate line.

11. The LCD device of claim 9, wherein the first substrate portion is formed at the same time as the data line.

12. The LCD device of claim 9, wherein the first substrate portion is formed at the same time as the black matrix.

13. The LCD device of claim 9, wherein the second substrate portion is formed at the same time as the black matrix layer.

14. The LCD device of claim 9, wherein the first substrate portion comprises one of a first intaglio structure and a first relief structure and the second substrate portion comprises one of a second relief structure and a second intaglio structure.

15. The LCD device of claim 9, wherein the second substrate portion is positioned inside the first substrate portion.

16. The LCD device of claim 9, wherein the first substrate portion is positioned inside the second substrate portion.

17. The LCD device of claim 1, wherein the non-pixel area has a drive area formed thereon.

18. The LCD device of claim 17, wherein the drive area corresponds to a gate drive area connected with the gate line.

19. The LCD device of claim 17, wherein the drive area corresponds to a data drive area connected with the data line.

20. The LCD device of claim 1, wherein the black matrix layer is disposed over the non-pixel area except a portion including the alignment mark.

21. An LCD device comprising:

a first substrate comprising a pixel area and a non-pixel area disposed peripherally to the pixel area, the pixel area having a thin film transistor and a pixel electrode in each sub-pixel defined by gate and data lines crossing each other;

a second substrate having a color filter layer and a black matrix layer, the second substrate disposed in opposition to the first substrate;

a liquid crystal layer disposed between the first and second substrates; and

an alignment mark disposed on the first substrate and visible through an opening in the black matrix layer.

22. An LCD device comprising:

a first substrate comprising a pixel area and a non-pixel area disposed peripherally to the pixel area, the pixel area having a thin film transistor and a pixel electrode in each sub-pixel defined by gate and data lines crossing each other;

a second substrate having a color filter layer and a black matrix layer, the second substrate disposed in opposition to the first substrate;

a liquid crystal layer disposed between the first and second substrates; and

an alignment mark disposed on one of the first substrate and the second substrate and defined by an opening in the black matrix layer.

专利名称(译)	液晶显示装置		
公开(公告)号	US20060279687A1	公开(公告)日	2006-12-14
申请号	US11/446572	申请日	2006-06-02
[标]申请(专利权)人(译)	PARK KWANG小号 YOON SOOÿ CHUN MIND		
申请(专利权)人(译)	PARK KWANG小号 YOON SOOÿ CHUN MIND		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	PARK KWANG SOON YOON SOO YOUNG CHUN MIN DOO		
发明人	PARK, KWANG SOON YOON, SOO YOUNG CHUN, MIN DOO		
IPC分类号	G02F1/1343		
CPC分类号	G02F2001/133354 G02F1/1333		
优先权	1020050046991 2005-06-02 KR		
其他公开文献	US7808608		
外部链接	Espacenet USPTO		

摘要(译)

本发明公开了一种LCD装置，其具有直接形成在基板的非像素区域内的驱动区域，而无需额外的驱动IC。LCD装置包括具有像素区域的第一基板和设置在像素区域外围的非像素区域。像素区域在每个子像素中具有薄膜晶体管和像素电极，所述子像素由彼此交叉的栅极线和数据线限定。与第一基板相对形成的第二基板包括滤色器层和黑色矩阵层。在第一和第二基板之间形成液晶层。黑矩阵层中的开口露出对准标记，该对准标记设置在第一基板和第二基板中的至少一个上。

