




US 20100171729A1

(19) **United States**(12) **Patent Application Publication**  
**Chun**(10) **Pub. No.: US 2010/0171729 A1**(43) **Pub. Date: Jul. 8, 2010**(54) **DISPLAY MODULE AND LCD HAVING THE SAME****Publication Classification**(76) Inventor: **Jin Young Chun, Seoul (KR)**(51) **Int. Cl.**  
**G09G 3/36** (2006.01)  
**G06F 3/038** (2006.01)Correspondence Address:  
**SALIWANCHIK LLOYD & SALIWANCHIK**  
**A PROFESSIONAL ASSOCIATION**  
**PO Box 142950**  
**GAINESVILLE, FL 32614 (US)**(52) **U.S. Cl. .... 345/211; 345/88**(57) **ABSTRACT**


An embodiment provides a display module comprising: a first substrate comprising a red filter, a green filter, a blue filter, and a white filter; a second substrate disposed facing the first substrate and comprising a first switching device and a first transparent electrode being formed corresponding to a position where the red filter is disposed, a second switching device and a second transparent electrode being formed corresponding to a position where the green filter is disposed, a third switching device and a third transparent electrode being formed corresponding to a position where the blue filter is disposed, and a fourth switching device and a reflective part being formed corresponding to a position where the white filter is disposed; and a liquid crystal layer formed between the first substrate and the second substrate.

(21) Appl. No.: **12/601,707**(22) PCT Filed: **Jun. 5, 2008**(86) PCT No.: **PCT/KR08/03173**§ 371 (c)(1),  
(2), (4) Date: **Nov. 24, 2009**(30) **Foreign Application Priority Data**


Jun. 5, 2007 (KR) ..... 10-2007-0054959

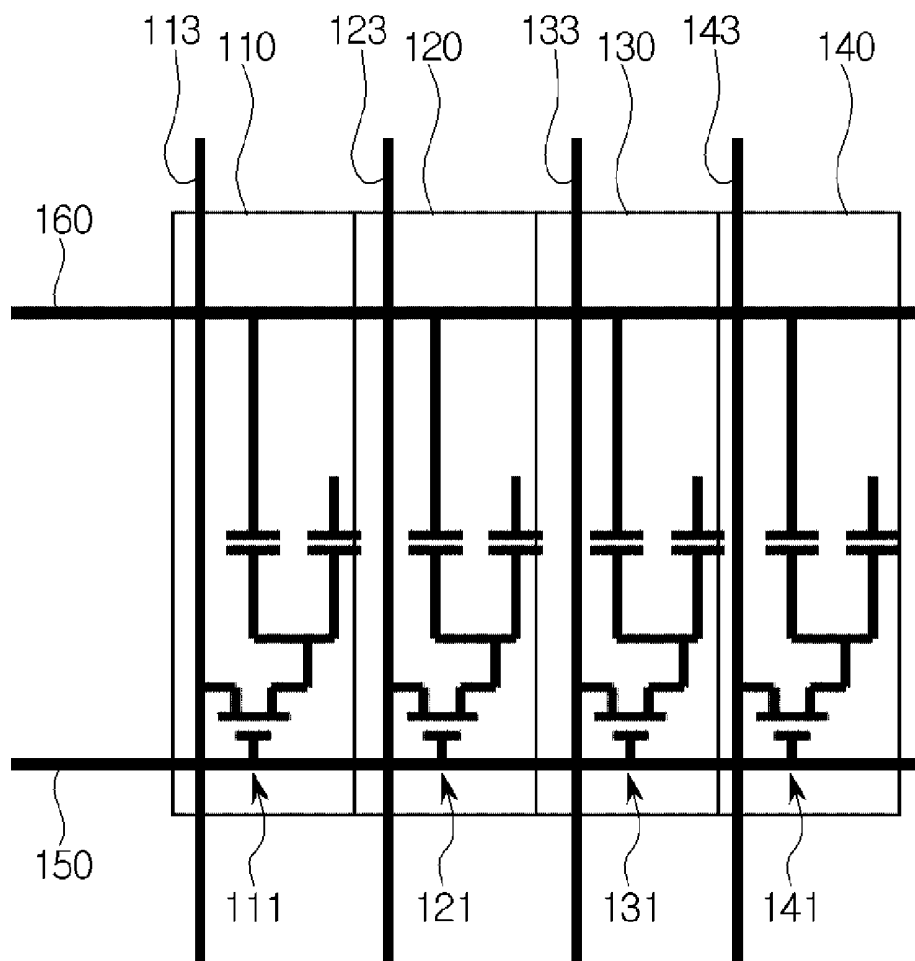


[Fig. 1]

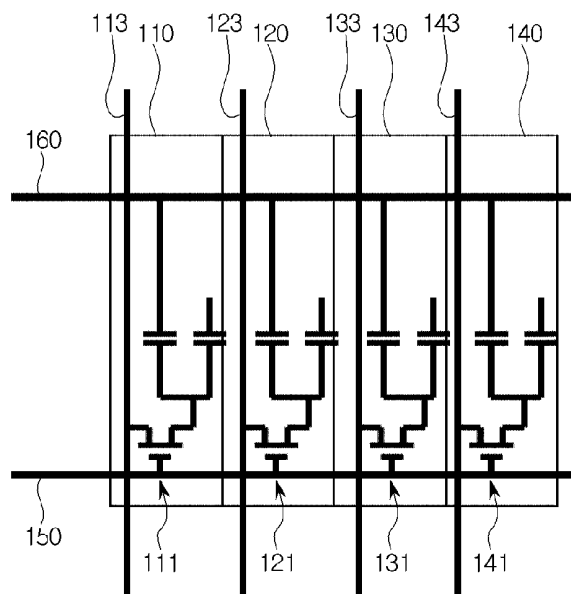


[Fig. 2]

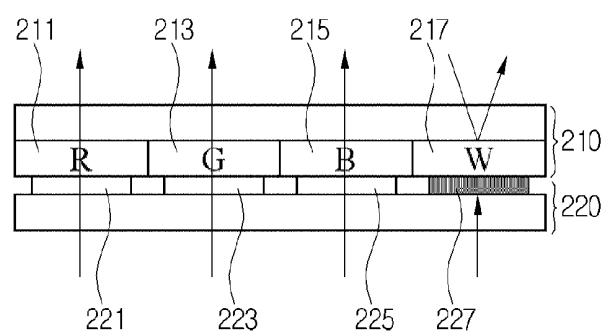


[Fig. 3]

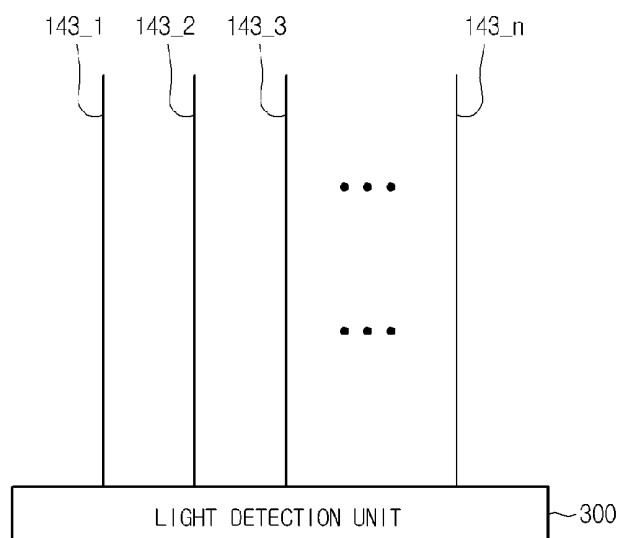


[Fig. 4]

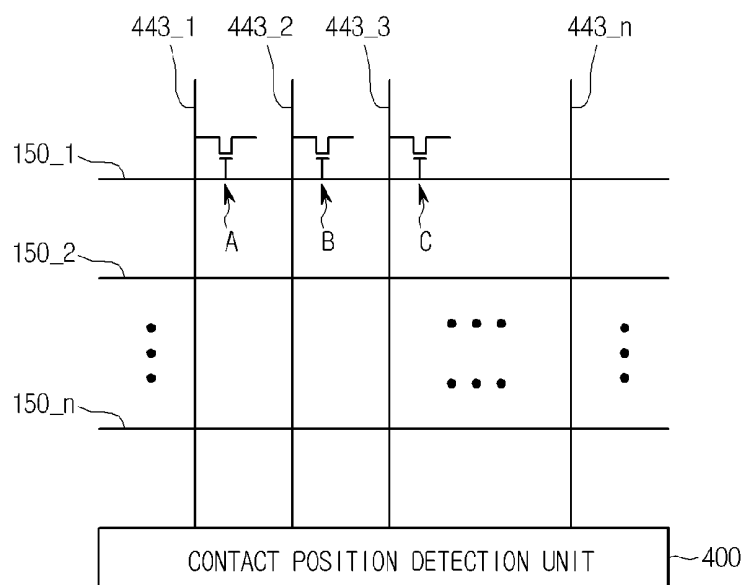

[Fig. 5]

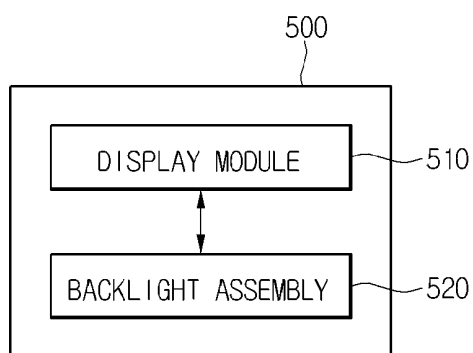

[Fig. 6]

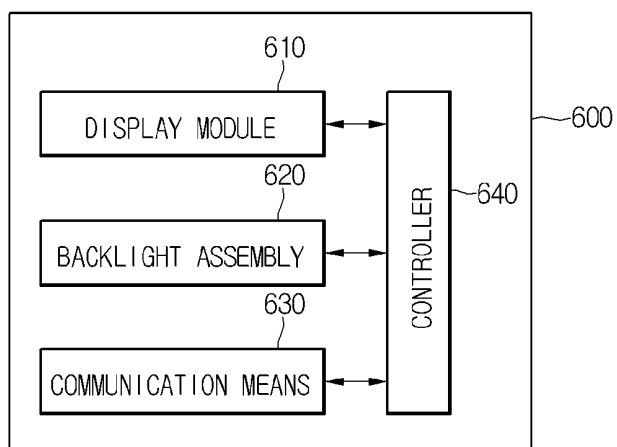

## DISPLAY MODULE AND LCD HAVING THE SAME

### TECHNICAL FIELD

**[0001]** Embodiments relate to a display module and a liquid crystal display (LCD) device comprising the same.

### BACKGROUND ART

**[0002]** Various display devices have been suggested to display an image. These display devices adopt a luminance sensor in order to control light emitting brightness by measuring surrounding luminance. Additionally, provided is a display device in which an additional touch screen panel capable of detecting a contact position of a user to perform a touch panel function is mounted on a display panel. However, because an additional touch screen panel is required to be mounted in order to realize a touch panel, there is a disadvantage which increases the thickness of a display device.

### DISCLOSURE OF INVENTION

#### Technical Problem

**[0003]** Embodiments provide a display module that effectively detecting surrounding luminance and a contact position of an object, and an LCD device comprising the same.

#### Technical Solution

**[0004]** An embodiment provides a display module comprising: a first substrate comprising a red filter, a green filter, a blue filter, and a white filter; a second substrate disposed facing the first substrate and comprising a first switching device and a first transparent electrode being formed corresponding to a position where the red filter is disposed, a second switching device and a second transparent electrode being formed corresponding to a position where the green filter is disposed, a third switching device and a third transparent electrode being formed corresponding to a position where the blue filter is disposed, and a fourth switching device and a fourth transparent electrode being formed corresponding to a position where the white filter is disposed; and a liquid crystal layer formed between the first substrate and the second substrate.

**[0005]** An embodiment provides a display module comprising: a pixel area comprising a gate line, a data line intersecting the gate line, a switching device formed on an intersection area of the gate line and the data line, and a transparent electrode connected to the switching device; and a contact position detection area comprising the gate line, a sensing line intersecting the gate line, and a detection device disposed on an intersection area of the gate line and the sensing line, and being changed in an amount of a current flowing according to incident light.

**[0006]** An embodiment provides a liquid crystal display device comprising: a display module; and a backlight assembly providing light to the display module; wherein the display module comprises: a first substrate comprising a red filter, a green filter, a blue filter, and a white filter; a second substrate disposed facing the first substrate and comprising a first switching device and a first transparent electrode being formed corresponding to a position where the red filter is disposed, a second switching device and a second transparent electrode being formed corresponding to a position where the green filter is disposed, a third switching device and a third transparent electrode being formed corresponding to a position where the blue filter is disposed, and a fourth switching device and a fourth transparent electrode being formed corresponding to a position where the white filter is disposed; and a liquid crystal layer formed between the first substrate and the second substrate, wherein the liquid crystal display device comprises a first drive mode and a second drive mode, wherein the first drive mode displays a color image in a first direction of the display module by adjusting an amount of light transmitted through the red filter, the green filter and the blue filter through light provided from the backlight assembly, and the second drive mode displays a black and white image in the first direction of the display module by using incident light from surrounding and adjusting an amount of light reflected from the reflective part and transmitted through the white filter.

tion where the blue filter is disposed, and a fourth switching device and a reflective part being formed corresponding to a position where the white filter is disposed; and a liquid crystal layer formed between the first substrate and the second substrate, wherein the liquid crystal display device comprises a first drive mode and a second drive mode, wherein the first drive mode displays a color image in a first direction of the display module by adjusting an amount of light transmitted through the red filter, the green filter and the blue filter through light provided from the backlight assembly, and the second drive mode displays a black and white image in the first direction of the display module by using incident light from surrounding and adjusting an amount of light reflected from the reflective part and transmitted through the white filter.

#### Advantageous Effects

**[0007]** A display module according to an embodiment and an LCD device comprising the same effectively detect surrounding luminance and a contact position of an object.

### BRIEF DESCRIPTION OF THE DRAWINGS

**[0008]** FIGS. 1 and 2 are conceptual views of a display module according to an embodiment.

**[0009]** FIG. 3 is a view illustrating a luminance measuring function in a display module according to an embodiment.

**[0010]** FIG. 4 is a view illustrating a touch panel function in a display module according to an embodiment.

**[0011]** FIG. 5 is a view of a liquid crystal display device according to an embodiment.

**[0012]** FIG. 6 is a view of a mobile communication terminal according to an embodiment.

### MODE FOR THE INVENTION

**[0013]** In the description of the embodiments, it will be understood that when a layer (or film), a region, a pattern, or a structure is referred to as being “on” or “under” another substrate, another layer (or film), another region, another pad, or another pattern, it can be “directly” or “indirectly” on/under the other substrate, layer (or film), region, pad, or pattern.

**[0014]** Hereinafter, embodiments will be described with the accompanying drawings.

**[0015]** FIGS. 1 and 2 are conceptual views of a display module according to an embodiment. FIG. 1 shows equivalent circuit of a display module according to the embodiment and FIG. 2 is a cross-sectional view of the display module according to the embodiment.

**[0016]** The display module according to the embodiment comprises a first substrate **210** and a second substrate **220**. The first substrate **210** comprises a red filter **211**, a green filter **213**, a blue filter **215**, and a white filter **217**. The second substrate **220** comprises a first transparent electrode **221**, a second transparent electrode **223**, a third transparent electrode **225**, and a reflective part **227**. A liquid crystal layer may be formed between the first substrate **210** and the second substrate **220**.

**[0017]** The display module according to the embodiment comprises a first sub-pixel area **110**, a second sub-pixel area **120**, a third sub-pixel area **130**, and a fourth sub-pixel area **140**. A first switching device **111** and a first sub-pixel data line **113** are formed in the first sub-pixel area **110**. A second switching device **121** and a second sub-pixel data line **123** are formed in the second sub-pixel area **120**. A third switching

device **131** and a third sub-pixel data line **133** are formed in the third sub-pixel area **130**. A fourth switching device **141** and a fourth sub-pixel data line **143** are formed in the fourth sub-pixel area **140**. A reference number **150** represents a gate line, and a reference number **160** represents a common line forming a storage capacitor.

[0018] The first substrate **210** is disposed to face the second substrate **220**. The first switching device **111** is formed on an intersection area of the gate line **150** and the first sub-pixel data line **113**. The first switching device **111** is connected to the first transparent electrode **221** and controls an amount of light transmitted through the first sub-pixel area **110**. The second switching device **121** is formed on an intersection area of the gate line **150** and the second sub-pixel data line **123**. The second switching device **121** is connected to the second transparent electrode **223** and controls an amount of light transmitted through the second sub-pixel area **120**. The third switching device **131** is formed on an intersection area of the gate line **150** and the third sub-pixel data line **133**. The third switching device **131** is connected to the third transparent electrode **225** and controls an amount of light transmitted through the third sub-pixel area **130**.

[0019] The first switching device **111**, the second switching device **121**, the third switching device **131**, and the fourth switching device **141** may be formed of a thin film transistor comprising an amorphous silicon layer. Additionally, the first switching device **111**, the second switching device **121**, and the third switching device **131** may be formed of a thin film transistor comprising a polycrystalline silicon layer.

[0020] For example, the red filter **211** may be disposed on the first sub-pixel area **110**, and the green filter **213** may be disposed on the second sub-pixel area **120**. Additionally, the blue filter **215** may be disposed on the third sub-pixel area **130**, and the white filter **217** may be disposed on the fourth sub-pixel area **140**. In the display module according to the embodiment, one pixel displaying an image may comprise at least each one of the first sub-pixel area **110**, the second sub-pixel area **120**, the third sub-pixel area **130**, and the fourth sub-pixel area **140**.

[0021] The size of the fourth sub-pixel area **140** may be formed smaller than the sizes of the first sub-pixel area **110**, the second sub-pixel area **120**, and the third sub-pixel area **130**. The size of the white filter **217** may be formed smaller than the sizes of the red filter **211**, the green filter **213**, and the blue filter **215**.

[0022] In the display module according to the embodiment, light incident from the bottom is not transmitted through an area where the reflective part **227** is formed, but is transmitted through areas where the first transparent electrode **221**, the second transparent electrode **223**, and the third transparent electrode **225** are formed in order to realize a color image. On the other hand, light incident from the top is reflected from the reflective part **227** and progresses into a top direction such that brightness of a displayed image can be improved.

[0023] The reflective part **227** may comprise a first reflective part formed of the same material on the same layer as a gate electrode constituting the fourth switching device **141**. Additionally, the reflective part **227** may comprise a second reflective part formed of the same material on the same layer as a drain electrode constituting the fourth switching device **141**. The reflective part **227** may be formed with the size corresponding to an area of the white filter **217**. Accordingly, light incident from the bottom of the display module can be

prevented from being transmitted through the white filter **217**, thereby stopping light leakage from affecting an image display.

[0024] The display module comprising the above structure utilizes the fourth sub-pixel area **140** and the fourth switching device **141**, thereby effectively realizing functions such as a luminance sensor and a touch panel.

[0025] First, a luminance sensor function in the display module according to the embodiment will be described with reference to FIGS. 1 to 3.

[0026] The display module according to the embodiment measures surrounding luminance by sensing changes in an amount of a current flowing through the fourth switching device **141**. The fourth switching device **141** may be formed of a thin film transistor comprising amorphous silicon.

[0027] A photo leakage current flows through the fourth switching device **141** due to incident light. The fourth switching device **141** comprises amorphous silicon such that a photo leakage current occurs due to light incident to the amorphous silicon. The white filter **217** is disposed on the fourth sub-pixel area **140** where the fourth switching device **141** is placed. Accordingly, compared to when a color filter is disposed, an amount of light transmitted through the white filter **217** is increased such that an amount of light incident to the fourth switching device **141** is increased also. Therefore, the display module according to the embodiment effectively performs a luminance sensor function.

[0028] The display module according to the embodiment, as illustrated in FIG. 3, comprises a plurality of fourth sub-pixel data lines **143\_1** to **143\_n** and a photo sensing unit **300**. Each of the fourth sub-pixel data lines **143\_1** to **143\_n** is formed on each pixel area. A photo leakage current flowing through the fourth sub-pixel data lines **143\_1** to **143\_n** is transferred into the photo sensing unit **300**. The photo sensing unit **300** senses an amount of current provided from fourth sub-pixel data lines **143\_1** to **143\_n** such that surrounding luminance can be measured. The display module according to the embodiment can control light emitting luminance by reflecting surrounding luminance measured in the photo sensing unit **300**. For example, the display module can adjust light emitting brightness according to surrounding luminance by controlling the degree of light emitting of a backlight assembly.

[0029] Moreover, the display module according to the embodiment can perform a touch panel function effectively. The touch panel function will be described with reference to FIGS. 1, 2 and 4. The display module according to the embodiment does not need to comprise an additional touch screen panel in order to realize the touch panel function. Accordingly, a display module comprising a touch panel function may be realized with a thin thickness.

[0030] The display module according to the embodiment, as illustrated in FIG. 4, comprises a plurality of sensing lines **443\_1** to **443\_n**, a plurality of gate lines **150\_1** to **150\_n**, and a contact position detection unit **400**.

[0031] The sensing lines **443\_1** to **443\_n** are disposed intersecting the gate lines **150\_1** to **150\_n**. The fourth sub-pixel data line **143** described referring to FIGS. 1 and 2 may be utilized as the sensing lines **443\_1** to **443\_n**. If the fourth sub-pixel data line **143** is utilized as the sensing line, the fourth sub-pixel area **140** may be defined as a connection position detection area, and the fourth switching device **141** may be defined as a detection device.

[0032] The detection device may be formed of a thin film transistor comprising amorphous silicon. A current flowing through the detection device is a photo leakage current caused by light incident to the contact position detection area. Accordingly, a position of an object contacting the display module can be detected by measuring changes of the photo leakage current flowing through the detection device. The white filter may be disposed on the contact position detection area where the detection device is formed.

[0033] A photo leakage current flowing through the detection device is transferred into the sensing lines 443\_1 to 443\_n. Additionally, the contact position detection unit 400 detects an amount of current flowing through the sensing lines 443\_1 to 443\_n.

[0034] On the other hand, an amount of a photo leakage current flowing through the detection device connected to the gate lines 150\_1 to 150\_n is changed according to whether or not there is a voltage applied to the gate lines 150\_1 to 150\_n. Accordingly, an amount of a current flowing through the sensing lines 443\_1 to 443\_n is changed according to whether or not there is a voltage applied to the gate lines 150\_1 to 150\_n.

[0035] A voltage is sequentially applied to the gate lines 150\_1 to 150\_n by scan drive. For example, if a voltage is applied to the gate line 150\_1, it is applied to each gate electrode of the detection devices A, B, and C connected to the gate line 150\_1. Likewise, a more amount of a photo leakage current flows through the detection devices A, B, and C where a voltage is applied to each gate electrode thereof, compared to when a voltage is not applied.

[0036] On the other hand, let's assume one case that external light is not projected on an area where the detection device A is formed. This may occur when an object contacts the display module surface of an area where the detection device A is formed. Likewise, if external light is not projected on the area where the detection device A is formed, a photo leakage current does not flow through the detection device A. Accordingly, even when a voltage is applied to the gate line 150\_1 providing a gate voltage to the detection device A, a current does not flow through the detection device A.

[0037] However, a photo leakage current flows through the detection devices B and C to which external light is projected, and when a voltage is applied to the gate line 150\_1, a sudden current increase occurs in the detection devices B and C.

[0038] Likewise, when a voltage is applied to the gate line 150\_1, it can be determined whether or not external light is projected on an area where a corresponding detection device is formed by detecting changes in an amount of a photo leakage current flowing through the detection devices connected to the gate line 150\_1.

[0039] By using this phenomenon, the display module according to the embodiment can perform a touch panel function. That is, it can be determined whether or not there is an object contact and that its contact position by measuring changes in an amount of a photo leakage current flowing through the detection devices through scan drive for the gate line.

[0040] For example, the display module comprises the first substrate 210 and the second substrate 220 as illustrated with reference to FIGS. 1 and 2. An image can be displayed in a top direction of the first substrate 210, and a menu item can be displayed for user selection. At this point, a touch panel function can be performed by determining whether or not there is an object placed on the surface of the first substrate

210. If there is an object placed on the surface of the first substrate 210, a menu item displayed on a corresponding position can be executed.

[0041] Then, the display module according to the above-mentioned embodiment may be applied to a liquid crystal display (LCD) device. As illustrated in FIG. 5, an LCD device 500 according to the embodiment may comprise a display module 510 and a backlight assembly 520 providing light to the display module 510.

[0042] As described above, the LCD device 500 can effectively perform a luminance sensor function and a touch panel function.

[0043] Additionally, the LCD device 500 comprises a first drive mode displaying an image in a first direction of the display module 510 by using light provided from the backlight assembly 520, and a second drive mode displaying an image in the first direction of the display module 510 by using light incident from the surrounding.

[0044] A case where the LCD device 500 is driven in the first drive mode will be described with reference to FIGS. 1, 2, and 5.

[0045] If being driven in the first drive mode, the LCD device 500 displays an image in a top direction of the first substrate 210 by using light provided from the backlight assembly 520. The LCD device 500 can display a color image in the top direction of the first substrate 210 by adjusting an amount of light transmitted through the red filter 211, the green filter 213, and the blue filter 215.

[0046] A case where the LCD device 500 is driven in the second drive mode will be described with reference to FIGS. 1, 2, and 5.

[0047] If being driven in the second drive mode, the LCD device 500 displays an image in the top direction of the first substrate 210 by using light incident from the surrounding. The LCD device 500 can display a black and white image in the top direction of the first substrate 210 by adjusting an amount of light transmitted through the white filter 217. At this point, the light transmitted through the white filter 217 is reflected from the reflective part 227 and then is projected toward the top direction of the first substrate 210.

[0048] The LCD device 500 according to the embodiment can selectively display a color image or a black and white image by using the first and second drive modes.

[0049] Additionally, the display module according to the above-mentioned embodiment may be applied to a mobile communication terminal. As illustrated in FIG. 6, the mobile communication terminal 600 according to the embodiment may comprise a display module 610, a backlight assembly 620, a communication means 630, and a controller 640.

[0050] The backlight assembly 620 provides light to the display module 610. The communication means 630 communicates with the external entity. The controller 640 can control the display module 610, the backlight assembly 620, and the communication means 630.

[0051] As described above, the mobile communication terminal 600 can effectively perform a luminance sensor function and a touch panel function. Additionally, the mobile communication terminal 600 may comprise a first drive mode displaying a color image in a first direction of the display module 610 by using light provided from the backlight assembly 620 and a second drive mode displaying a black and white image in the first direction of the display module 610 by using light incident from the surrounding.

**[0052]** The mobile communication terminal **600** according to the embodiment can selectively display a color image or a black and white image if necessary by using the first and second drive modes.

**[0053]** Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the spirit and scope of the principles of this disclosure.

#### INDUSTRIAL APPLICABILITY

**[0054]** The display module according to the embodiment and the LCD device comprising the same have advantages in effectively detecting surrounding luminance and a contact position of an object.

1. A display module comprising:

a first substrate comprising a red filter, a green filter, a blue filter, and a white filter;

a second substrate disposed facing the first substrate and comprising a first switching device and a first transparent electrode being formed corresponding to a position where the red filter is disposed, a second switching device and a second transparent electrode being formed corresponding to a position where the green filter is disposed, a third switching device and a third transparent electrode being formed corresponding to a position where the blue filter is disposed, and a fourth switching device and a reflective part being formed corresponding to a position where the white filter is disposed; and  
a liquid crystal layer formed between the first substrate and the second substrate.

2. The display module according to claim 1, comprising a light detection unit detecting an amount of a current flowing through the fourth switching device by incident light and measuring surrounding luminance.

3. The display module according to claim 1, comprising a contact position detection unit detecting changes in an amount of a current flowing through the fourth switching device and detecting a contact position of an object contacting a surface of the first substrate.

4. The display module according to claim 1, wherein one pixel displaying an image comprises at least each one of the red filter, the green filter, the blue filter, and the white filter as a sub pixel.

5. The display module according to claim 1, wherein the fourth switching device is a thin film transistor comprising an amorphous silicon layer.

6. The display module according to claim 5, wherein a current flowing through the fourth switching device is a photo leakage current occurring in the amorphous silicon layer by incident light.

7. The display module according to claim 5, wherein the reflective part comprises a first reflective part, the first reflective layer being formed on the same layer as at least one of a gate electrode and a drain electrode constituting the thin film transistor.

8. A display module comprising:

a pixel area comprising a gate line, a data line intersecting the gate line, a switching device formed on an intersection area of the gate line and the data line, and a transparent electrode connected to the switching device; and  
a contact position detection area comprising the gate line, a sensing line intersecting the gate line, and a detection

device disposed on an intersection area of the gate line and the sensing line, and being changed in an amount of a current flowing according to incident light.

9. The display module according to claim 8, comprising a color filter disposed on the pixel area and a white filter disposed on the contact position detection area.

10. The display module according to claim 8, wherein the detection device is a thin film transistor comprising an amorphous silicon layer.

11. The display module according to claim 10, wherein a current flowing through the detection device is a photo leakage current occurring by incident light.

12. The display module according to claim 9, comprising a reflective part disposed on the contact position detection area and formed with a size corresponding to an area of the white filter.

13. The display module according to claim 12, wherein the reflective part comprises a first reflective part, the first reflective part being formed on the same layer as at least one of the gate line and the sensing line.

14. The display module according to claim 8, wherein an amount of a current flowing through the detection device is changed according to whether or not a voltage is applied to the gate line.

15. The display module according to claim 14, wherein changes in an amount of a current flowing through the detection device are detected through scan drive of the gate line, and whether there is an object contact or not and its contact position are determined.

16. The display module according to claim 15, wherein the contact position is detected and a menu item displayed on the contact position is executed.

17. A liquid crystal display device comprising:

a display module; and

a backlight assembly providing light to the display module; wherein the display module comprises:

a first substrate comprising a red filter, a green filter, a blue filter, and a white filter;

a second substrate disposed facing the first substrate and comprising a first switching device and a first transparent electrode being formed corresponding to a position where the red filter is disposed, a second switching device and a second transparent electrode being formed corresponding to a position where the green filter is disposed, a third switching device and a third transparent electrode being formed corresponding to a position where the blue filter is disposed, and a fourth switching device and a reflective part being formed corresponding to a position where the white filter is disposed; and  
a liquid crystal layer formed between the first substrate and the second substrate, wherein the liquid crystal display device comprises a first drive mode and a second drive mode,

wherein the first drive mode displays a color image in a first direction of the display module by adjusting an amount of light transmitted through the red filter, the green filter and the blue filter through light provided from the backlight assembly, and the second drive mode displays a black and white image in the first direction of the display module by using incident light from surrounding and adjusting an amount of light reflected from the reflective part and transmitted through the white filter.

18. The liquid crystal display device according to claim 17, wherein changes in an amount of a current flowing through the fourth switching device are sensed, a contact position of

an object contacting a surface of the display module is detected, and a menu item displayed on the contact position is executed.

**19.** The liquid crystal display device according to claim **17**, wherein one pixel displaying an image comprises at least each one of the red filter, the green filter, the blue filter, and the white filter as a sub pixel.

**20.** The liquid crystal display device according to claim **17**, wherein the fourth switching device is a thin film transistor comprising an amorphous silicon layer, and a current flowing through the fourth switching device is a photo leakage current occurring by incident light.

\* \* \* \* \*

|                |                                                               |         |            |
|----------------|---------------------------------------------------------------|---------|------------|
| 专利名称(译)        | 显示模块和具有相同的LCD                                                 |         |            |
| 公开(公告)号        | <a href="#">US20100171729A1</a>                               | 公开(公告)日 | 2010-07-08 |
| 申请号            | US12/601707                                                   | 申请日     | 2008-06-05 |
| [标]申请(专利权)人(译) | CHUN JIN YOUNG                                                |         |            |
| 申请(专利权)人(译)    | 春, JIN YOUNG                                                  |         |            |
| [标]发明人         | CHUN JIN YOUNG                                                |         |            |
| 发明人            | CHUN, JIN YOUNG                                               |         |            |
| IPC分类号         | G09G3/36 G06F3/038                                            |         |            |
| CPC分类号         | G02F1/13338 G02F1/133514 G02F1/13318 G02F2201/52 G02F1/133555 |         |            |
| 优先权            | 1020070054959 2007-06-05 KR                                   |         |            |
| 其他公开文献         | US9316861                                                     |         |            |
| 外部链接           | <a href="#">Espacenet</a> <a href="#">USPTO</a>               |         |            |

#### 摘要(译)

一个实施例提供了一种显示模块，包括：第一基板，包括红色滤色器，绿色滤色器，蓝色滤色器和白色滤色器；第二基板，设置为面向第一基板，并且包括对应于设置红色滤色器的位置形成的第一开关器件和第一透明电极，第二开关器件和第二透明电极对应于绿色滤波器，与设置蓝色滤光器的位置对应地形成第三开关器件和第三透明电极，并且与设置白色滤光器的位置对应地形成第四开关器件和反射部；以及形成在第一基板和第二基板之间的液晶层。

