



US 20050140312A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0140312 A1**
(43) **Pub. Date: Jun. 30, 2005**

Nishinosono et al.

(54) **BACKLIGHT APPARATUS FOR LIQUID CRYSTAL DISPLAY****Publication Classification**(75) Inventors: **Kazuo Nishinosono**, Osaka (JP);
Hitoshi Miyamoto, Osaka (JP)(51) **Int. Cl.⁷** **H05B 37/02**(52) **U.S. Cl.** **315/224; 315/291**

Correspondence Address:

OSHA LIANG L.L.P.
1221 MCKINNEY STREET
SUITE 2800
HOUSTON, TX 77010 (US)(57) **ABSTRACT**

A secondary winding W2 of a step-up transformer of a self-excited inverter 2 is grounded at the midpoint thereof. High-frequency voltages differing in polarity from each other are outputted from both terminals OT1 and OT2 of the secondary winding W2. Two U-shaped cold-cathode tubes L1 and L2 series-connected to each other are provided directly below a liquid crystal panel. One of terminals of the secondary winding W2 is connected to the terminal OT1 through the ballast capacitor C1. The other terminal thereof is connected to the terminal OT2 of the ballast capacitor C2. The connecting point P between the two U-shaped cold-cathode tubes L1 and L2 is ungrounded. Thus, electric currents flowing through the cold-cathode tubes are equal in value to each other.

(73) Assignee: **Funai Electric Co., Ltd.**, Daito-shi (JP)(21) Appl. No.: **11/020,502**(22) Filed: **Dec. 23, 2004**(30) **Foreign Application Priority Data**

Dec. 25, 2003 (JP) JP2003-430868

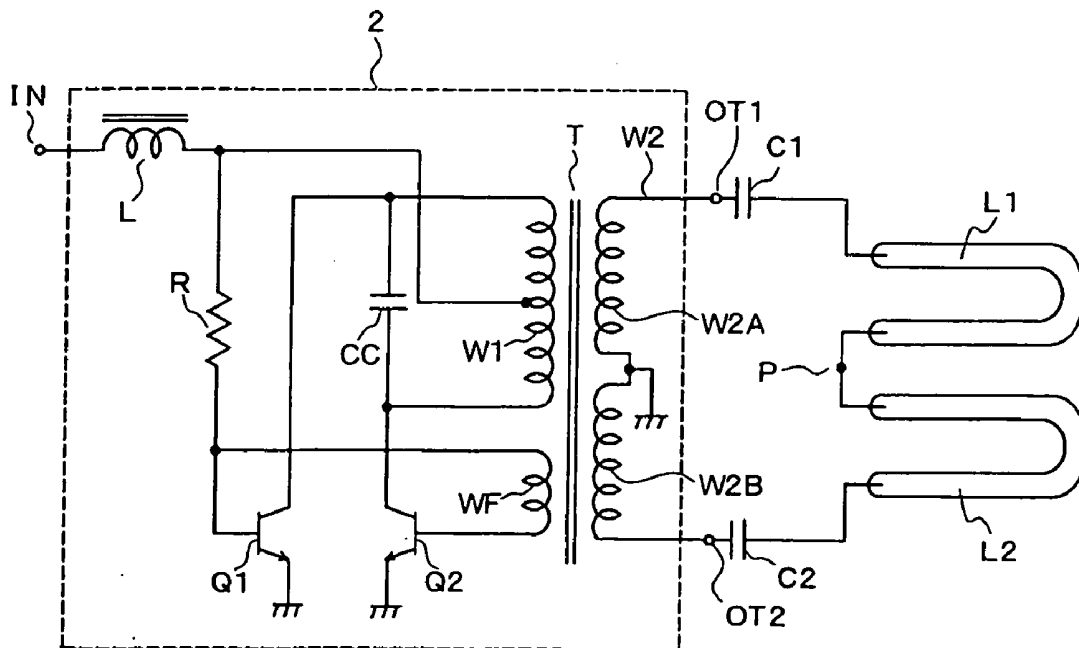


Fig. 1

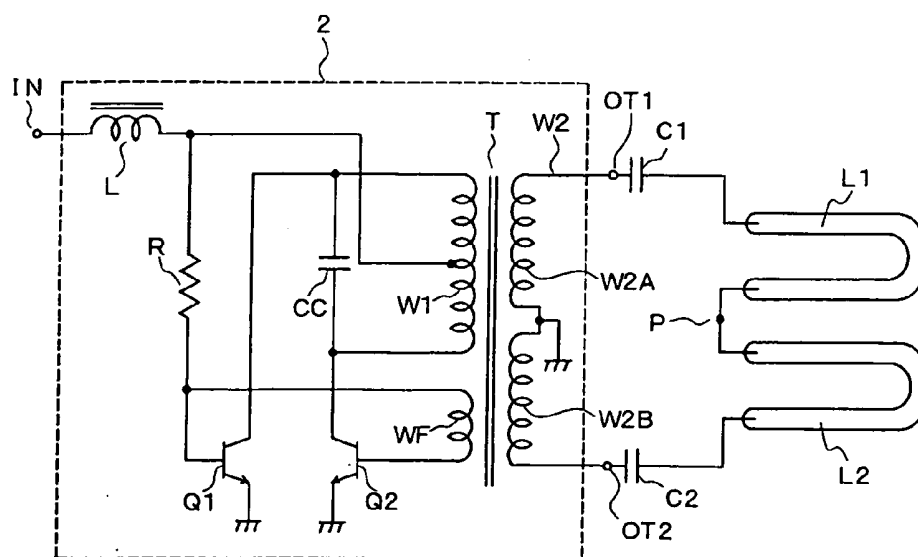


Fig. 2

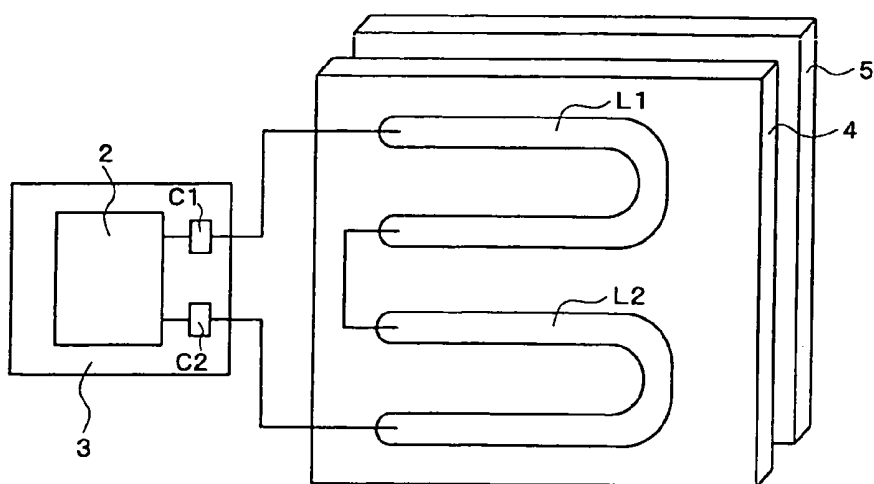


Fig. 3


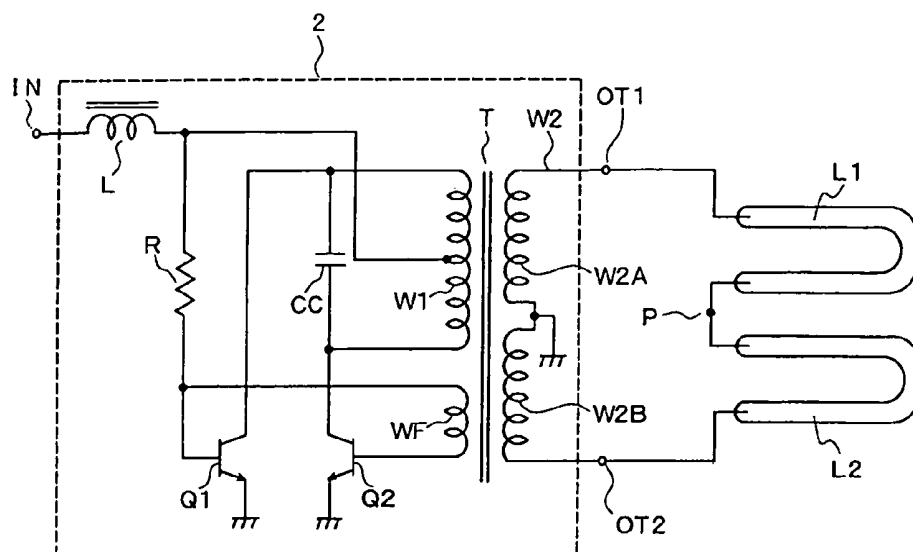


Fig. 4

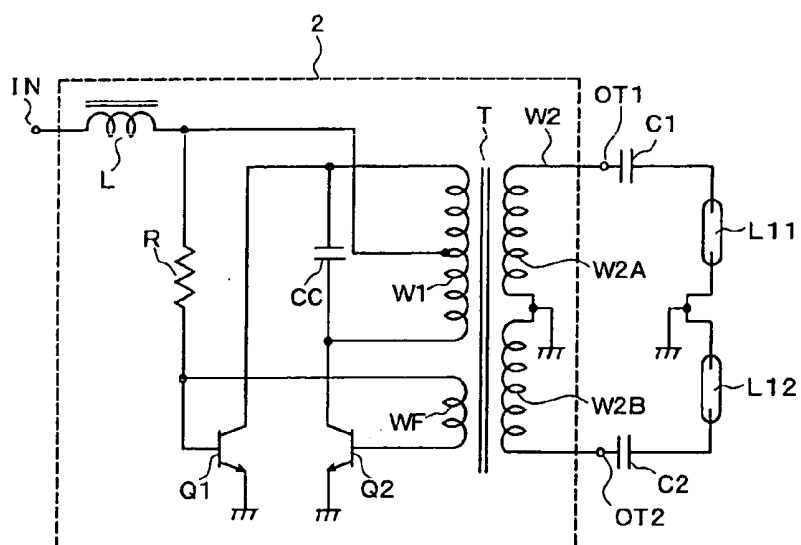

BACKLIGHT APPARATUS FOR LIQUID CRYSTAL DISPLAY

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a backlight apparatus for a liquid crystal display, which has at least two cold-cathode tubes.

[0003] 2. Description of the Related Art

[0004] In recent years, the liquid crystal panels of liquid crystal display apparatuses have been enlarged in size. Further, the back surface of the liquid crystal panel is illuminated with plural (for example, two) cold-cathode tubes thereby to uniformize the luminance of the screen of the enlarged liquid crystal panel. A lighting system (a backlight apparatus) shown in FIG. 4 is disclosed in JP-A-2000-124045 (on paragraphs [0016] and [0017], and in FIG. 5). The circuit of this backlight apparatus comprises a self-excited inverter 2, ballast capacitors C1 and C2, and cold-cathode tubes L11 and L12. Reference character T designates a step-up transformer, reference character W1 denotes a primary winding of the ballast capacitor, reference character WF designates a feedback winding, reference character W2 denotes a secondary winding, reference character W2A designates a first part of the secondary winding, and reference character W2B denotes a second part of the secondary winding. The secondary winding W2 is grounded at the midpoint thereof. An intermediate tap of the primary winding W1 is connected to an input terminal IN through a choke coil L. Reference characters Q1 and Q2 designate push-pull connected transistors, reference character R denotes a bias-resistor, and reference character CC designates a resonance capacitor parallel-connected to the primary winding W1.

[0005] One OT1 of terminals of the second winding W2 is connected to one of terminals of the cold-cathode tubes L11 through the ballast capacitor C1. The other terminal of the cold-cathode tube L11 is grounded. Further, the other terminal OT2 of the secondary winding W2 is connected to one of terminals of the cold-cathode tube L12 through the ballast capacitor C2. The other terminal of the cold-cathode tube L12 is grounded.

[0006] When a DC voltage rectified by a rectifying circuit (not shown) is inputted to the input terminal IN, high frequency voltages, which differ in polarity from and are equal in value to each other, are generated at both the terminals OT1 and OT2 of the second winding W2. The ballast capacitors C1 and C2 limit electric currents flowing through the cold-cathode tubes L11 and L12, respectively, so as to change the electric currents into constant currents thereby to stabilize the lighting of the cold-cathode tubes L11 and L12. However, in a case where the electromagnetic coupling between the primary winding W1 and the secondary winding W2 is weak (or where the voltages produced at the terminals OT1 and OT2 are low), it is unnecessary to provide the ballast capacitors C1 and C2 in the circuit. Additionally, JP-A-2002-043148 (on FIG. 5) discloses a backlight apparatus similar to that shown in FIG. 4.

SUMMARY OF THE INVENTION

[0007] However, in the apparatus disclosed in JP-A-2000-124045, the other terminals of the cold-cathode tubes L11

and L12 are grounded. Thus, in a case where there is a variation in the capacitance values of the ballast capacitors C1 and C2 or in the characteristics of the inverter 2, electric currents flowing through the cold-cathode tubes L1 and L2 differ from each other, and there is a variation in the intensity of light coming from the cold-cathode tubes L1 and L2. Therefore, this apparatus has problems that the liquid crystal panel cannot be illuminated with the same luminance, and that the luminance of the screen of the liquid crystal panel does not become uniform. Incidentally, the influence of the variation in the intensity of light coming from the cold-cathode tubes L1 and L2 is significant in a liquid crystal panel of the directly-below type (that is, a liquid crystal panel of the type having a diffusing plate provided on the back surface of the liquid crystal panel and also having cold-cathode tubes on the rear surface of the diffusing plate), which is higher in the correlation between the intensity of light coming from the cold-cathode tubes L1 and L2 and an amount of light passing through the liquid crystal panel than a liquid crystal panel of the sidelight type.

[0008] The invention is accomplished to solve the aforementioned problems. Accordingly, one of objects of the invention is to provide a backlight apparatus for a liquid crystal television, which is enabled to uniformize the luminance of the screen of the liquid crystal panel of the liquid crystal television, by using two cold-cathode tubes.

[0009] According to a first aspect of the invention, there is provided a backlight apparatus for a liquid crystal display having a liquid crystal panel, the backlight apparatus including: a diffusing plate that is to be provided on entirety of the liquid display panel; a first and a second U-shaped cold-cathode tubes provided on a back surface of the diffusing plate and series-connected to each other; and a driver circuit for driving the first and the second U-shaped cold-cathode tubes, the driver circuit including a self-excited inverter for generating high-frequency voltages differing in polarity from each other at both terminals of a secondary winding of a step-up transformer whose midpoint is grounded, wherein the first and the second U-shaped cold-cathode tubes are connected between both terminals of the secondary winding without being interposed by ballast capacitors, and wherein a connecting point between the first and the second U-shaped cold-cathode tubes is ungrounded.

[0010] According to a second aspect of the invention, there is provided a backlight apparatus for a liquid crystal display having a liquid crystal panel, the backlight apparatus including: a diffusing plate that is to be provided on entirety of the liquid display panel; a first and a second U-shaped cold-cathode tubes provided on a back surface of the diffusing plate and series-connected to each other; and a driver circuit for driving the first and the second U-shaped cold-cathode tubes, the driver circuit including a self-excited inverter for generating high-frequency voltages differing in polarity from each other at both terminals of a secondary winding of a step-up transformer whose midpoint is grounded, wherein the first and the second U-shaped cold-cathode tubes are connected between both terminals of the secondary winding through ballast capacitors respectively, and wherein a connecting point between the first and the second U-shaped cold-cathode tubes is ungrounded.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The above objects and advantages of the present invention will become more apparent by describing pre-

ferred exemplary embodiments thereof in detail with reference to the accompanying drawings, wherein:

[0012] **FIG. 1** is a circuit diagram showing a backlight apparatus for a liquid crystal television according to the invention;

[0013] **FIG. 2** is a perspective view showing the arrangement of a liquid crystal panel and the backlight apparatus;

[0014] **FIG. 3** is a circuit diagram showing a backlight apparatus according to another embodiment; and

[0015] **FIG. 4** is a circuit diagram showing a conventional backlight apparatus.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0016] Referring now to the accompanying drawings, a description will be given in detail of preferred embodiments of the invention.

[0017] **FIG. 1** is a circuit diagram showing a backlight apparatus according to the invention for a liquid crystal television. This circuit includes a self-excited inverter **2**, ballast capacitors **C1** and **C2**, and two U-shaped cold-cathode tubes **L1** and **L2** (hereunder referred to simply as “cold-cathode tubes **L1** and **L2**”) series-connected to each other. Reference character **T** designates a step-up transformer that has a primary winding **W1**, a feedback winding **WF**, and a secondary winding **W2**. An intermediate tap of the primary winding **W1** is connected to an input terminal **IN** through a choke coil **L**. The secondary winding **W2** is divided into a first part **W2A** and a second part **W2B**. The secondary winding **W2** is grounded at the midpoint thereof. Reference characters **Q1** and **Q2** designate push-pull connected transistors (or switching elements) reference character **R** denotes a bias-resistor, and reference character **CC** designates a resonance capacitor parallel-connected to the primary winding **W1**. One **OT1** of terminals of the second winding **W2** is connected to one of terminals of the cold-cathode tubes **L1** and **L2**, which are series-connected to each other, through the ballast capacitor **C1**. The other terminal **OT2** of the secondary winding **W2** is connected to the other terminal of the cold-cathode tubes **L1** and **L2**, which are series-connected to each other, through the ballast capacitor **C2**.

[0018] When a DC voltage rectified by a rectifying circuit (not shown) is inputted to the input terminal **IN**, electric current the transistors **Q1** and **Q2** to alternately conduct in response to electric current from the feedback winding **WF**. Thus, the inverter **2** self-oscillates and generates a high-frequency voltage in the secondary winding **W2** by alternately and intermittently supplying a current, which flows from the intermediate tap to one side of the primary winding **W1**, and a current flowing from the intermediate tap to the other side thereof. That is, high-frequency voltages, which differ in polarity from and are equal in value to each other, are generated at both the terminals **OT1** and **OT2** of the secondary winding **W2**, respectively. The amplitude of each of these amplitude is, for example, about 1000 V until the cold-cathode tubes **L1** and **L2** turn on (or are activated), whereas the amplitude thereof is, for instance, about 40 kHz to 70 kHz during the tubes turn on. The ballast capacitors **C1** and **C2** serve to stabilize the lighting of the cold-cathode tubes **L1** and **L2** by limiting electric currents respectively

flowing therethrough. The capacitances of the capacitors are, for example, about several tens pF.

[0019] As described above, because the two cold-cathode tubes **L1** and **L2** are series-connected to each other (or because the connecting point **P** between both cold-cathode tubes **L1** and **L2** is not grounded), electric currents respectively flowing through the two cold-cathode tubes **L1** and **L2** are equal in value to each other. The luminances of the two cold-cathode tubes **L1** and **L2** are equal to each other. Therefore, the luminances of the two cold-cathode tubes **L1** and **L2** are equal to each other even in a case where there is a variation in the capacitance values of the ballast capacitors **C1** and **C2** or in the voltages at both the terminals **OT1** and **OT2** of the secondary winding. Further, in a case where failures of the inverter **2** or of the cold-cathode tubes **L1** and **L2** occur, both the cold-cathode tubes **L1** and **L2** do not turn on. A situation, in which only one thereof turns on, does not occur. Consequently, a state, in which the luminance of the screen of the liquid crystal panel **5** (see **FIG. 2**) has an intermediate value, does not occur.

[0020] **FIG. 2** is a perspective view showing the arrangement of the liquid crystal panel **5** of the liquid crystal television and the backlight apparatus. A diffusing plate having substantially the same size as that of the liquid crystal panel **5** is provided on the rear surface (a front side of this figure) of the liquid crystal panel **5** of the liquid crystal television. This diffusing plate **4** diffuses light irradiated from the cold-cathode tubes **L1** and **L2** to thereby illuminate the liquid crystal panel **5**. The two U-shaped cold-cathode tubes **L1** and **L2** series-connected to each other are juxtaposed in an upward-downward direction on the rear surface of the diffusing plate **4**. A reflecting plate (not shown) is provided on the back surface of each of the cold-cathode tubes **L1** and **L2**. One of terminals of a set of the two series-connected cold-cathode tubes **L1** and **L2** is connected to the inverter through the ballast capacitor **C1**, while the other terminal of the set of the tubes **L1** and **L2** is connected to the inverter **2** through the ballast capacitor **C2**. Reference numeral **3** designates a printed circuit board, on which the inverter **2** and the ballast capacitors **C1** and **C2** are mounted.

[0021] Next, the uniformity of the luminance of the screen of the liquid crystal is described hereinbelow. A liquid crystal monitor for a personal computer, which indicates an icon on a peripheral part of the screen thereof, requires high uniformity of luminance in the entire screen thereof. Conversely, the liquid crystal television does not require the high uniformity of luminance in the entire screen thereof. Thus, even when the luminance of the peripheral part of the screen is slightly lower than that of the central part thereof (this state is referred to as a “substantially uniform” state), this state is tolerated.

[0022] According to the invention, the two cold-cathode tubes **L1** and **L2** are U-shaped. Additionally, the two cold-cathode tubes **L1** and **L2** are disposed at places set so that the entire liquid crystal panel **5** is illuminated by using the diffusion plate **4**. Consequently, the entire liquid crystal panel **5** is substantially uniformly illuminated by the two cold-cathode tubes **L1** and **L2**, so that the luminance of the screen of the liquid crystal panel **5** is substantially uniform.

[0023] The aforementioned configuration eliminates the necessity for employing the panel of the sidelight type using an expensive optical waveguide. Further, as shown in **FIG.**

2, the invention employs the panel of the directly-below type, so that the luminance of the liquid panel 5 can be enhanced. Incidentally, the liquid crystal panel can similarly be illuminated by juxtaposing four cold-cathode tubes of the straight tube type. However, in this case, the cold-cathode tubes are connected to one another by many wires. Thus, high-frequency electric currents leak through the stray capacitances of the wires from the inverter 2. Thus, the luminances of the cold-cathode tubes of the straight tube type are reduced.

[0024] As described above, according to the embodiment, there is provided a backlight apparatus for a liquid crystal television, which is adapted to illuminate a liquid crystal panel of the liquid crystal television from a back surface thereof and to drive two cold-cathode tubes by using a self-excited inverter for generating high-frequency voltages differing in polarity from each other at both terminals of a secondary winding of a step-up transformer, whose midpoint is grounded. The backlight apparatus includes a diffusing plate, which is provided on the entirety of the liquid crystal panel, and two U-shaped cold-cathode tubes, which are provided on a back surface of the diffusing plate and series-connected to each other. The two U-shaped cold-cathode tubes series-connected to each other are connected to between both terminals of the secondary winding through ballast capacitors, respectively, and a connecting point between the two U-shaped cold-cathode tubes is ungrounded.

[0025] According to the above configuration, electric currents respectively flowing through the two cold-cathode tubes are equal in value to each other. The luminances of the two cold-cathode tubes are equal to each other. Consequently, even when there is a variation in output voltages at both terminals of the secondary winding (that is, output voltages of the inverter), the luminance of the screen of the liquid crystal panel becomes uniform. Further, the two cold-cathode tubes are U-shaped. Consequently, as compared with the case of using four cold-cathode tubes of the straight tube type, the number of wires connecting the cold-cathode tubes is reduced (that is, an interconnection length is decreased). Leak currents flowing through stray capacitances of the wires are reduced. Thus, reduction in the luminance of the cold-cathode tube can be prevented. Furthermore, because the panel of the directly-below type, in which the two U-shaped cold-cathode tubes are provided on the back surface of the diffusing plate, is employed, the luminance of the liquid crystal panel can be enhanced, as compared with that of the sidelight type. Moreover, the luminance thereof can be made to be substantially uniform. As described above, the invention can realize unprecedented effects by using the two U-shaped cold-cathode tubes, which are series-connected to each other, in the backlight apparatus for a liquid crystal television.

[0026] In the embodiment described in the foregoing description, the two U-shaped cold-cathode tubes L1 and L2 series-connected to each other are connected to both the terminals OT1 and OT2 of the secondary winding W2 through the ballast capacitors C1 and C2, respectively. However, as shown in FIG. 3, the cold-cathode tubes may be connected thereto without being interposed by the ballast capacitors between the cold-cathode tubes and the terminals of the secondary winding. In this case, no ballast capacitors interpose therebetween. Thus, the voltages generated at both

the terminals of the secondary winding W2 of the step-up transformer can be lowered. Consequently, the cost of the apparatus can be reduced by using a step-up transformer, whose withstand voltage is low. In an embodiment shown in FIG. 3, two cold-cathode tubes L1 and L2 are series-connected to each other. Furthermore, the two cold-cathode tubes are long in tube length and U-shaped. Thus, the load impedance of the secondary winding W2 thereof is higher than that of the secondary winding of the apparatus shown in FIG. 4. Consequently, the lighting of the cold-cathode tubes L1 and L2 does not become unstable, even in a case where ballast capacitors are provided therein.

[0027] According to the embodiment, there is provided a backlight apparatus for a liquid crystal television, which is adapted to illuminate a liquid crystal panel of the liquid crystal television from a back surface thereof and to drive two cold-cathode tubes by using a self-excited inverter for generating high-frequency voltages differing in polarity from each other at both terminals of a secondary winding of a step-up transformer, whose midpoint is grounded. The backlight apparatus includes a diffusing plate, which is provided on the entirety of the liquid crystal panel, and two U-shaped cold-cathode tubes, which are provided on a back surface of the diffusing plate and series-connected to each other. The two U-shaped cold-cathode tubes series-connected to each other are connected to between both terminals of the secondary winding, respectively, without being interposed by ballast capacitors between the U-shaped cold-cathode tubes and the terminals of the secondary winding, and a connecting point between the two U-shaped cold-cathode tubes is ungrounded.

[0028] According to the above configuration, electric currents respectively flowing through the two cold-cathode tubes are equal in value to each other. The luminances of the two cold-cathode tubes are equal to each other. Consequently, even when there is a variation in output voltages at both terminals of the secondary winding (that is, output voltages of the inverter), the luminance of the screen of the liquid crystal panel becomes uniform. Further, the two cold-cathode tubes are U-shaped. Consequently, as compared with the case of using four cold-cathode tubes of the straight tube type, the number of wires connecting the cold-cathode tubes is reduced (that is, an interconnection length is decreased). Leak currents flowing through stray capacitances of the wires are reduced. Thus, reduction in the luminance of the cold-cathode tube can be prevented. Furthermore, because the panel of the directly-below type, in which the two U-shaped cold-cathode tubes are provided on the back surface of the diffusing plate, is employed, the luminance of the liquid crystal panel can be enhanced, as compared with that of the sidelight type. Moreover, the luminance thereof can be made to be substantially uniform. Furthermore, because the ballast capacitors are not provided therein, the cost of the backlight apparatus can be reduced. Additionally, because a voltage reduction due to the ballast capacitors does not occur, a step-up transformer, whose withstand voltage is low, can be used. Thus, the cost of the step-up transformer can be reduced. As described above, the invention can realize unprecedented effects by using the two U-shaped cold-cathode tubes, which are series-connected to each other, in the backlight apparatus for a liquid crystal television.

[0029] Although it has been described in the foregoing description of the embodiments that the two U-shaped cold-cathode tubes L1 and L2 are series-connected to each other, the apparatus may be configured so that three or more U-shaped cold-cathode tubes are series-connected to one another. Furthermore, although the two U-shaped cold-cathode tubes L1 and L2 are juxtaposed in an upward-downward direction in each of the aforementioned embodiments, the cold-cathode tubes may be laterally juxtaposed.

[0030] According to the invention, the luminance of the screen of the liquid crystal panel of the liquid crystal television can be uniformized by using the two U-shaped cold-cathode tubes series-connected to each other.

[0031] Although the present invention has been shown and described with reference to a specific preferred embodiment, various changes and modifications will be apparent to those skilled in the art from the teachings herein. Such changes and modifications as are obvious are deemed to come within the spirit, scope and contemplation of the invention as defined in the appended claims.

What is claimed is:

1. A backlight apparatus for a liquid crystal display having a liquid crystal panel, the backlight apparatus comprising:

- a diffusing plate that is to be provided on entirety of the liquid display panel;
- a first and a second U-shaped cold-cathode tubes provided on a back surface of the diffusing plate and series-connected to each other; and
- a driver circuit for driving the first and the second U-shaped cold-cathode tubes, the driver circuit including a self-excited inverter for generating high-frequency

quency voltages differing in polarity from each other at both terminals of a secondary winding of a step-up transformer whose midpoint is grounded,

wherein the first and the second U-shaped cold-cathode tubes are connected between both terminals of the secondary winding without being interposed by ballast capacitors, and

wherein a connecting point between the first and the second U-shaped cold-cathode tubes is ungrounded.

2. A backlight apparatus for a liquid crystal display having a liquid crystal panel, the backlight apparatus comprising:

a diffusing plate that is to be provided on entirety of the liquid display panel;

a first and a second U-shaped cold-cathode tubes provided on a back surface of the diffusing plate and series-connected to each other; and

a driver circuit for driving the first and the second U-shaped cold-cathode tubes, the driver circuit including a self-excited inverter for generating high-frequency voltages differing in polarity from each other at both terminals of a secondary winding of a step-up transformer whose midpoint is grounded,

wherein the first and the second U-shaped cold-cathode tubes are connected between both terminals of the secondary winding through ballast capacitors respectively, and

wherein a connecting point between the first and the second U-shaped cold-cathode tubes is ungrounded.

* * * * *

专利名称(译)	用于液晶显示器的背光装置		
公开(公告)号	US20050140312A1	公开(公告)日	2005-06-30
申请号	US11/020502	申请日	2004-12-23
[标]申请(专利权)人(译)	船井电机株式会社		
申请(专利权)人(译)	FUNAI ELECTRIC CO. , LTD.		
当前申请(专利权)人(译)	FUNAI ELECTRIC CO. , LTD.		
[标]发明人	NISHINOSONO KAZUO MIYAMOTO HITOSHI		
发明人	NISHINOSONO, KAZUO MIYAMOTO, HITOSHI		
IPC分类号	G02F1/13357 H05B41/24 H05B41/282 H05B37/02		
CPC分类号	G02F1/133604 Y02B20/185 H05B41/2822		
优先权	2003430868 2003-12-25 JP		
其他公开文献	US7161310		
外部链接	Espacenet USPTO		

摘要(译)

自激逆变器2的升压变压器的次级绕组W2在其中点接地。从次级绕组W2的两个端子OT1和OT2输出彼此极性不同的高频电压。两个彼此串联连接的U形冷阴极管L1和L2直接设置在液晶面板下方。次级绕组W2的一个端子通过镇流电容器C1连接到端子OT1。其另一端连接到镇流电容器C2的端子OT2。两个U形冷阴极管L1和L2之间的连接点P未接地。因此，流过冷阴极管的电流值彼此相等。

